



(51) International Patent Classification:
H01R 24/38 (2011.01)

(21) International Application Number:
PCT/CN2017/071210

(22) International Filing Date:
16 January 2017 (16.01.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201610024900.9 15 January 2016 (15.01.2016) CN

(71) Applicant: COMMSCOPE TECHNOLOGIES LLC
[US/US]; 1100 Commscope Place SE, Hickory, NC 28602
(US).

(72) Inventor; and

(71) Applicant (*for MG only*): ZHANG, Yujun [CN/CN];
Rm301, BD 37, Orchard Manor, Suzhou, Jiangsu 215021
(CN).

(72) Inventors: ZHANG, Li; Rm405, BD 28, Xinxin Garden,
SIP, Suzhou, Jiangsu 215021 (CN). SHEN, Hongwei; 68
Su Hong Xi Lu, Suzhou, Jiangsu 215021 (CN).

(74) Agent: CCPIT PATENT AND TRADEMARK LAW
OFFICE; 8th Floor, Vantone New World Plaza, 2

Fuchengmenwai Street, Xicheng District, Beijing 100037
(CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CABLE-CONNECTOR ASSEMBLY WITH HEAT-SHRINK SLEEVE

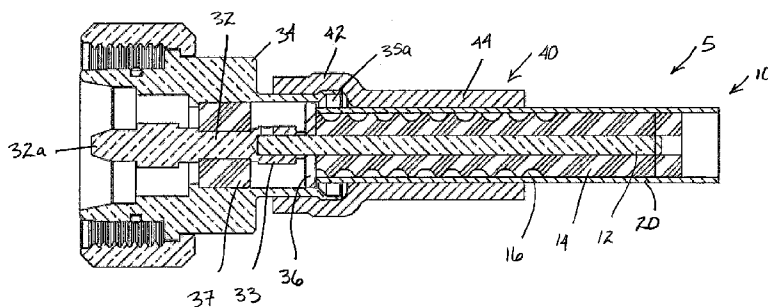


Fig. 2

(57) Abstract: The present disclosures relates to cable-connector assembly with heat-shrink sleeve. The coaxial cable-connector assembly comprises: (a) a coaxial cable having an inner conductor, a dielectric layer circumferentially surrounding the inner conductor, an outer conductor circumferentially surrounding the dielectric layer, and a polymeric jacket circumferentially surrounding the outer conductor; (b) a coaxial connector having a central contact attached to the inner conductor of the coaxial cable, an outer conductor body attached to the outer conductor of the coaxial cable, and a dielectric spacer interposed between the central contact and the outer conductor body; and (c) a heat shrink sleeve that conformably overlies a portion of the cable jacket and a portion of the outer body of the connector.



CABLE-CONNECTOR ASSEMBLY WITH HEAT-SHRINK SLEEVE

Field of the Invention

[0001] The present invention is directed generally to electrical cable connectors, and more particularly to coaxial connectors for electrical cable.

Background of the Invention

[0002] Coaxial cables are commonly utilized in RF communications systems. A typical coaxial cable includes an inner conductor, an outer conductor, a dielectric layer that separates the inner and outer conductors, and a jacket that covers the outer conductor. Coaxial cable connectors may be applied to terminate coaxial cables, for example, in communication systems requiring a high level of precision and reliability.

[0003] Coaxial connector interfaces provide a connect/disconnect functionality between a cable terminated with a connector bearing the desired connector interface and a corresponding connector with a mating connector interface mounted on an apparatus or on another cable. Typically, one connector will include a structure such as a pin or post connected to an inner conductor and an outer conductor connector body connected to the outer conductor; these are mated with a mating sleeve (for the pin or post of the inner conductor) and another outer conductor connector body of a second connector. Coaxial connector interfaces often utilize a threaded coupling nut or other retainer that draws the connector interface pair into secure electro-mechanical engagement when the coupling nut (which is captured by one of the connectors) is threaded onto the other connector. The interface between the cable and the connector is typically protected with a polymeric sleeve, tube or the like, often in the form of an “overmolded” body that is injection molded over the end of the cable and a narrowed portion of the connector. An exemplary overmold body is shown in U.S. Patent Publication No. 2014/0370747 to Vaccaro, the disclosure of which is hereby incorporated herein in its entirety.

[0004] Passive Intermodulation Distortion (PIM) is a form of electrical interference/signal transmission degradation that may occur with less than symmetrical interconnections and/or as electro-mechanical interconnections shift or degrade over time. Interconnections may shift due to mechanical stress, vibration, thermal cycling, and/or material degradation. PIM can be an

important interconnection quality characteristic, as PIM generated by a single low quality interconnection may degrade the electrical performance of an entire RF system. Thus, the reduction/elimination of PIM via cable-connector design is typically desirable.

Brief Description of the Figures

[0005] FIG. 1 is a partial cutaway side view of a cable-connector assembly according to embodiments of the present invention.

[0006] FIG. 2 is a side section view of the assembly of FIG. 1.

[0007] FIG. 3 is a schematic side section view of a heat shrink sleeve of the assembly of FIG. 1, shown in a pre-shrunk state (left side of the figure) and a shrunk state (right side of the figure).

[0008] FIG. 4 is a graph showing the results of PIM testing for a cable-connector assembly of FIG. 1 under impact, bending and twisting conditions.

Detailed Description

[0009] The present invention is described with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments that are pictured and described herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. It will also be appreciated that the embodiments disclosed herein can be combined in any way and/or combination to provide many additional embodiments.

[0010] Unless otherwise defined, all technical and scientific terms that are used in this disclosure have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the above description is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in this disclosure, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that when an element (e.g., a device, circuit, etc.) is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening

elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

[0011] Referring now to the figures, a cable-connector assembly, designated broadly at **5**, is shown in **FIGS. 1** and **2**. The assembly **5** includes a cable **10** and a connector **30**. The cable **10** includes an inner conductor **12**, a dielectric layer **14** that circumferentially overlies the inner conductor **12**, an outer conductor **16** that circumferentially overlies the dielectric layer **14**, and a polymeric cable jacket **20** that circumferentially overlies the outer conductor **16**. In the illustrated embodiment, the outer conductor **16** is corrugated, but those of skill in this art will appreciate that the outer conductor **16** may be smooth, braided, or any other configuration known to be suitable for a coaxial cable. The cable **10** may be of any size, including 1/4" and 3/8", and may be a jumper cable (such as an RF jumper cable) or another variety of cable.

[0012] The connector **30** includes a central contact **32** and an outer conductor body **34**. The central contact **32** has a generally cylindrical post **32a** and is mounted on and is in electrical contact with the inner conductor **12** of the cable **10** via a boss **33**. The outer conductor body **34** is mounted in electrical contact with the outer conductor **16** of the cable **10** via a tail **35** that is soldered to the outer conductor **16** at a solder joint **35a**. An annular dielectric spacer **36** is positioned between the central contact **32** and the outer conductor body **34** near the junction between the inner conductor **12** and the central contact **32**. Another annular dielectric spacer **37** is positioned adjacent the closed end of the boss **33** and maintains separation between the central contact **32** and the outer conductor body **34**. The spacers **36**, **37** position the outer conductor body **34** to be spaced apart from and to circumferentially surround the central contact **32**.

[0013] Those of skill in this art will appreciate that the connector **30** may be a plug, a jack, or another variety of connector that may be interconnected with a mating connector. The connector **30** may be of any type, including 4.3/10, 7/16 DIN, and N-type connectors.

[0014] As can be seen in **FIGS. 1** and **2**, the assembly **5** includes a heat shrink sleeve **40** that overlies the end of the cable **10** and the tail **35** of the outer conductor body **34** of the connector **30**. The heat shrink sleeve **40** is formed of a material, such as a cross-linked polyolefin, that shrinks when heated (this is shown schematically in **FIG. 3**, wherein the wider left end of the sleeve **40** is shown prior to heating/shrinking, and the narrower right end is shown after heating/shrinking). One exemplary sleeve is the SBRS-(3X) tube (available from Woer, Pingshan, Shenzhen P.R.CHINA), which is a dual-layer tube having an outer layer of a cross-

linked polyolefin and an inner layer of a hot melt adhesive. In some embodiments, it may be desirable for the inner diameter of the heat shrink sleeve **40** to shrink to about 1/3 of its original diameter (see **Table 1** below).

Table 1 - Heavy-Duty Heat-Shrink Sleeve Dimensions					
Nominal (inch)	Size	Before Shrink		After Shrink	
		Min. Diameter (mm)	Inner	Max. Diameter (mm)	Inner Thickness (mm)
3/8		9.5		3.20	1.45
1/2		12.7		4.20	1.65
5/8		15.0		5.20	1.80
3/4		19.1		6.30	1.95
1		25.4		8.50	2.00

[0015] The heat shrink sleeve **40** may have a thickness of between about 1.25 and 2.25 mm, and in some embodiments between about 1.4 and 2.0 mm. The heat shrink sleeve **40** may have a length of between about 40 and 60 mm. It will also be understood that, in some embodiments, more than one layer of heat shrink sleeve may be applied; for example, positive results have been achieved with two overlying layers of heat-shrink sleeves **40**.

[0016] As noted above and as can be seen in **FIG. 2**, the heat shrink sleeve **40** conformably overlies the end of the cable **10** and the tail **35** (or other portion) of the outer conductor body **34**. A wider portion **42** of the sleeve **40** shrinks to overlie the tail **35**, and a narrower portion **44** shrinks to overlie a portion of the jacket **20** of the cable **10**. Those skilled in this art will recognize that the underlying structures may have different sizes, dimensions and/or shapes (e.g., the tail **35** may be circular, hexagonal, square, or the like) and still be suitable for use with this invention.

[0017] The heat-shrink sleeve **40** is typically applied by inserting a terminated cable (i.e., the cable **10** with the connector **30** attached thereto) into the hollow core of the sleeve **40**, then heating the sleeve **40** to cause it to shrink to conformably overlie the end of the cable **10** and a portion of the connector **30**. Heating may be performed at a temperature of between about 125 and 200 degrees C.

[0018] It has been seen that cable-connector assemblies **5** that employ a heat shrink sleeve to protect the cable-connector interface (rather than using an overmolded body as was often done

previously) can provide the assembly with unexpectedly strong performance in PIM testing conducted as the cable-connector interface is under stress.

[0019] As an example, a cable-connector assembly such as that described above (employing two heat-shrink sleeves **40** layered over each other) was subjected to PIM testing under three different stress-inducing conditions as defined by IEC-62037: impact (a 60g weight dropped 30 cm onto the cable); 90 degree bending; and 360 degree twisting. PIM was measured for a 1,800 MHz band, in a sweep mode, with a power output of 2x43 dBm.

[0020] Results of the testing are shown in **FIG. 4**. In each instance (i.e., stress due to impact, bending, and twisting), the cable desirably exhibited an average PIM of approximately -129 dBm. This result indicates excellent PIM performance, as it falls below the desired PIM of an interface for 4.3/10 connectors (-119 dBm), 7/16 DIN connectors (-116 dBm) and N-type connectors (-112 dBm). Use of the heat-shrink sleeve **40** can provide good return loss over a wide frequency band (e.g., 45 MHz to 3,800 MHz).

[0021] Notably, inclusion of the heat shrink sleeve **40** can also provide environmental sealing of the interface as well as robust strain relief and mechanical protection for the connector (particularly soldered and/or clamped joints). Insulation and abrasion resistance may also be increased by use of the heat shrink sleeve **40**.

[0022] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

That Which is Claimed is:

1. A coaxial cable-connector assembly, comprising:
 - (a) a coaxial cable having an inner conductor, a dielectric layer circumferentially surrounding the inner conductor, an outer conductor circumferentially surrounding the dielectric layer, and a polymeric jacket circumferentially surrounding the outer conductor;
 - (b) a coaxial connector having a central contact attached to the inner conductor of the coaxial cable, an outer conductor body attached to the outer conductor of the coaxial cable, and a dielectric spacer interposed between the central contact and the outer conductor body; and
 - (c) a heat shrink sleeve that conformably overlies a portion of the cable jacket and a portion of the outer conductor body of the connector.
2. The assembly defined in Claim 1, wherein the heat shrink sleeve comprises a polyolefin.
3. The assembly defined in Claim 2, wherein the heat shrink sleeve comprises an inner layer of hot melt adhesive and an outer layer formed of the polyolefin.
4. The assembly defined in Claim 1, wherein the outer conductor is a corrugated outer conductor.
5. The assembly defined in Claim 1, wherein the heat shrink sleeve is a first heat shrink sleeve, and the coaxial cable-connector assembly further comprising a second heat shrink sleeve overlying the first heat shrink sleeve.
6. The assembly defined in Claim 1, wherein the assembly satisfies the conditions of IRC 62037.
7. The assembly defined in Claim 1, wherein the connector is selected from the group consisting of: 4.3/10 connectors; 7/16 DIN connectors; and N-type connectors.
8. A method of forming a cable-connector assembly, comprising the steps of:

(a) providing a coaxial cable terminated with a coaxial connector, wherein the coaxial cable has an inner conductor, a dielectric layer circumferentially surrounding the inner conductor, an outer conductor circumferentially surrounding the dielectric layer, and a polymeric jacket circumferentially surrounding the outer conductor, and wherein the coaxial connector has a central contact attached to the inner conductor of the coaxial cable, an outer conductor body attached to the outer conductor of the coaxial cable, and a dielectric spacer interposed between the central contact and the outer conductor body;

(b) inserting the terminated cable into a heat shrink sleeve; and

(c) heating the heat-shrink sleeve to shrink the heat-shrink sleeve sufficiently to conformably overlie a portion of the cable jacket and a portion of the outer conductor body of the connector.

9. The method defined in Claim 8, wherein the heat shrink sleeve comprises a polyolefin.

10. The method defined in Claim 9, wherein the heat shrink sleeve comprises an inner layer of hot melt adhesive and an outer layer formed of the polyolefin.

11. The method defined in Claim 8, wherein the outer conductor is a corrugated outer conductor.

12. The method defined in Claim 8, wherein the heat shrink sleeve is a first heat shrink sleeve, and the coaxial cable-connector assembly further comprising a second heat shrink sleeve overlying the first heat shrink sleeve.

13. The method defined in Claim 8, wherein the assembly satisfies the conditions of IRC 62037.

14. The method defined in Claim 8, wherein the connector is selected from the group consisting of: 4.3/10 connectors; 7/16 DIN connectors; and N-type connectors.

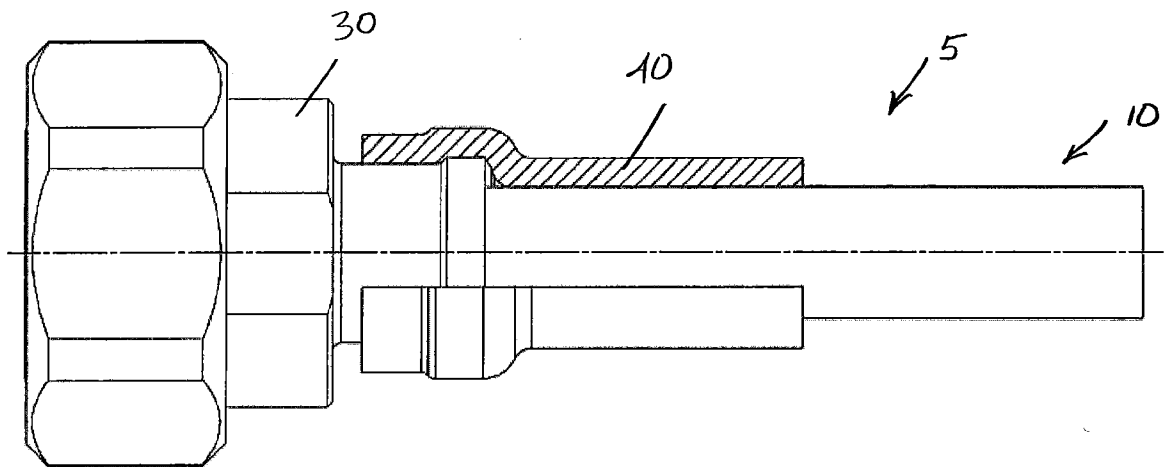


Fig. 1

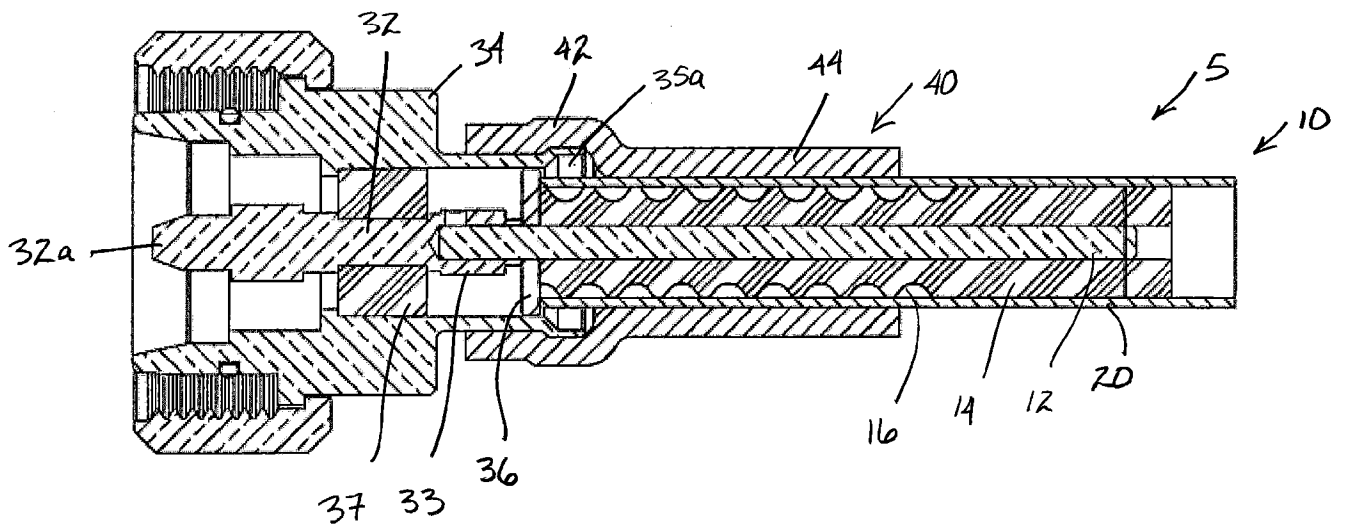


Fig. 2

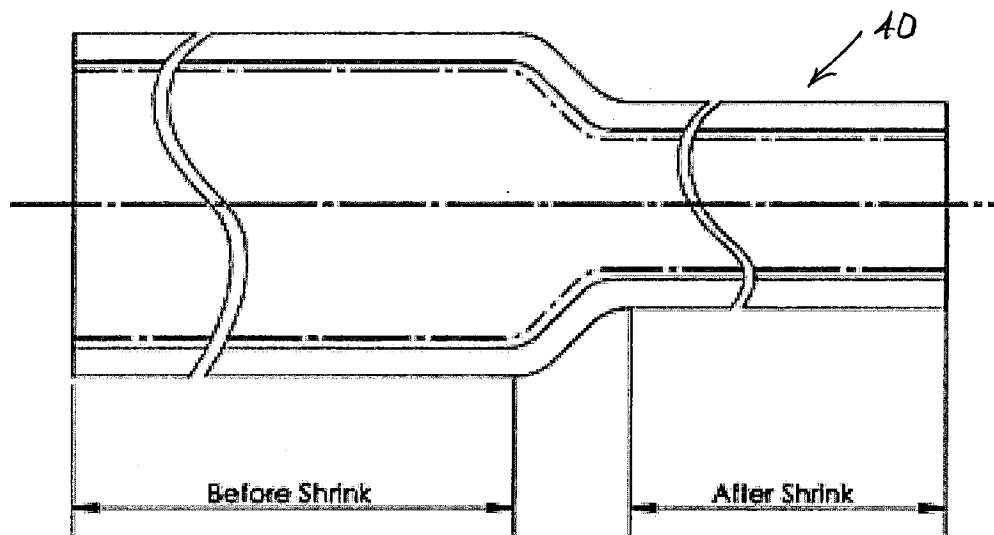


Fig. 3

#1 - #3
Φ12 with wall thickness 0.7mm

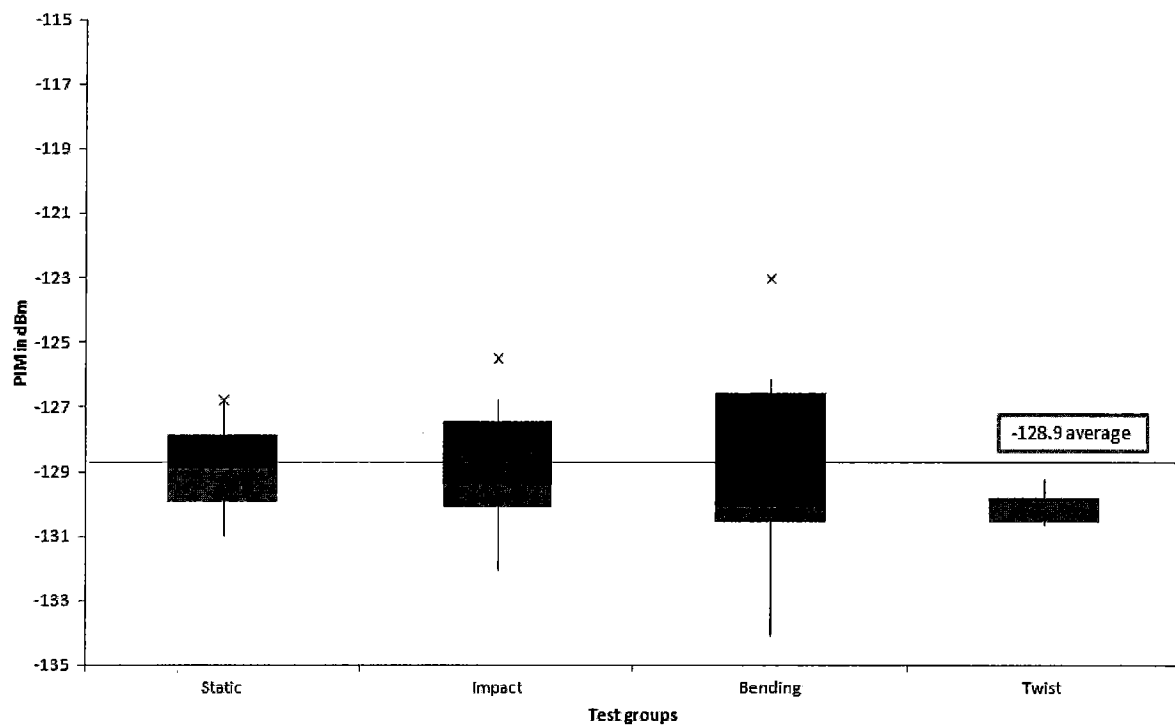


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/071210

A. CLASSIFICATION OF SUBJECT MATTER

H01R 24/38(2011.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI EPODOC VEN CNABS CNTXT CNKI: cable connector coaxial inner outer conductor shrink PIM

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005079759 A1 (RADIO FREQUENCY SYSTEMS INC) 14 April 2005 (2005-04-14) description, page 4	1-14
Y	CN 202308592 U (BEIJING AEROSPACE INST OF THE LONG MARCH VEHICLE ET AL.) 04 July 2012 (2012-07-04) description, page 2	1-14
Y	CN 1173601 A (CHENGDU HUAYI INST OF THERMAL) 18 February 1998 (1998-02-18) description, pages 2 and 3	3, 5, 10, 12
A	US 2012184135 A1 (ANDREW LLC) 19 July 2012 (2012-07-19) the whole document	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- “A” document defining the general state of the art which is not considered to be of particular relevance
- “E” earlier application or patent but published on or after the international filing date
- “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- “O” document referring to an oral disclosure, use, exhibition or other means
- “P” document published prior to the international filing date but later than the priority date claimed

- “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- “&” document member of the same patent family

Date of the actual completion of the international search

06 April 2017

Date of mailing of the international search report

21 April 2017

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

WANG, Xiaoyan

Facsimile No. (86-10)62019451

Telephone No. (86-10)62411731

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/071210

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2005079759	A1	14 April 2005	US	6926555	B2	09 August 2005
				CN	100444477	C	17 December 2008
				EP	1523073	A2	13 April 2005
				CN	1606200	A	13 April 2005
				EP	1523073	A3	23 April 2008
CN	202308592	U	04 July 2012	None			
CN	1173601	A	18 February 1998	None			
US	2012184135	A1	19 July 2012	US	8758053	B2	24 June 2014