




(86) Date de dépôt PCT/PCT Filing Date: 2017/02/13
(87) Date publication PCT/PCT Publication Date: 2017/08/31
(45) Date de délivrance/Issue Date: 2023/10/17
(85) Entrée phase nationale/National Entry: 2018/08/03
(86) N° demande PCT/PCT Application No.: BE 2017/000011
(87) N° publication PCT/PCT Publication No.: 2017/143408
(30) Priorités/Priorities: 2016/02/23 (US62/298,682);
2017/01/09 (BE2017/5006)

(51) Cl.Int./Int.Cl. *F01C 1/00* (2006.01),
F01K 27/00 (2006.01), *F04F 13/00* (2009.01)
(72) Inventeur/Inventor:
OHMAN, HENRIK, BE
(73) Propriétaire/Owner:
ATLAS COPCO AIRPOWER, NAAMLOZE
VENNOOTSCHAP, BE
(74) Agent: ROBIC

(54) Titre : DISPOSITIF D'EXPANSION DE GAZ ET PROCEDE D'EXPANSION DE GAZ
(54) Title: GAS EXPANSION DEVICE AND METHOD FOR EXPANDING GAS

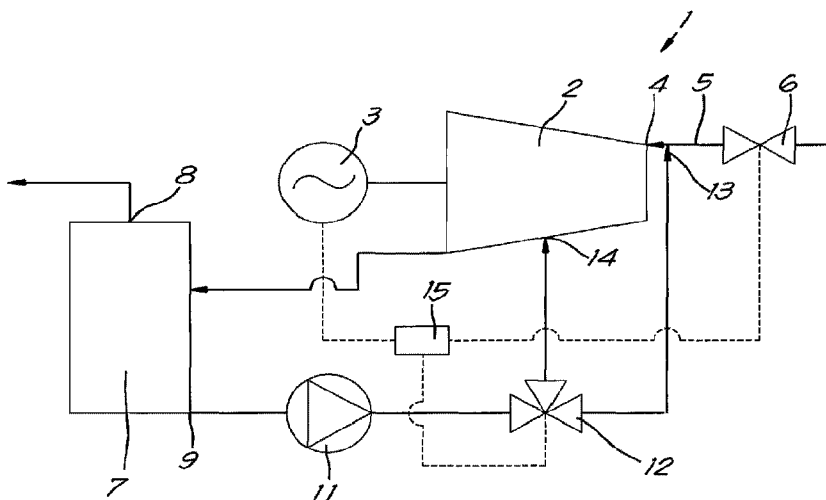

(57) Abrégé/Abstract:

Gas expansion device (1) for expanding a gas or a gas-liquid mixture, whereby the gas expansion device (1) comprises a gas expansion element (2) with an inlet port (4) for the gas to be expanded and an inlet pipe (5) for the gas to be expanded, whereby the inlet pipe (5) is connected to the inlet port (4), whereby the gas expansion device (1) comprises a first liquid injection point (13) for the injection of liquid, whereby the first liquid injection point (13) is at a position level with the inlet port (4) or upstream from the inlet port (4).



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2017/143408 A3

(43) International Publication Date
31 August 2017 (31.08.2017)

(51) International Patent Classification:

F01C 1/00 (2006.01) *F04F 13/00* (2009.01)
F01K 27/00 (2006.01)

(21) International Application Number:

PCT/BE2017/000011

(22) International Filing Date:

13 February 2017 (13.02.2017)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

62/298,682 23 February 2016 (23.02.2016) US
2017/5006 9 January 2017 (09.01.2017) BE

(71) Applicant: **ATLAS COPCO AIRPOWER, NAAM-
LOZE VENNOOTSCHAP** [BE/BE]; Boomssteenweg
957, B-2610 Wilrijk (BE).

(72) Inventor: **ÖHMAN Henrik**; c/o ATLAS COPCO AIR-
POWER, naamloze vennootschap, Boomssteenweg 957,
B-2610 Wilrijk (BE).

(74) Agents: **VAN VARENBERG, P.** et al.; Bureau M.F.J.
Bockstael nv., Arenbergstraat 13, 2000 Antwerpen (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

5 October 2017

(54) Title: GAS EXPANSION DEVICE AND METHOD FOR EXPANDING GAS

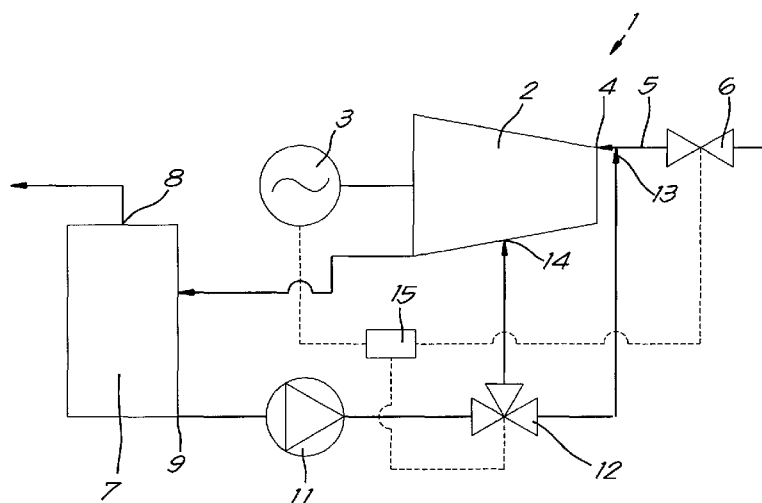


Fig. 1

(57) Abstract: Gas expansion device (1) for expanding a gas or a gas-liquid mixture, whereby the gas expansion device (1) comprises a gas expansion element (2) with an inlet port (4) for the gas to be expanded and an inlet pipe (5) for the gas to be expanded, whereby the inlet pipe (5) is connected to the inlet port (4), whereby the gas expansion device (1) comprises a first liquid injection point (13) for the injection of liquid, whereby the first liquid injection point (13) is at a position level with the inlet port (4) or upstream from the inlet port (4).



WO 2017/143408 A3

Gas expansion device and method for expanding gas.

The present invention relates to a gas expansion device and
5 method for expanding gas.

Applications for multiphase fluid expansion in a volumetric
expansion element that is coupled to a generator for
electrical energy present a wide range of characteristics
10 and limitations.

One example can be found in CN 204,060,830 wherein a
compressed air energy storage system can be found. The
system comprising a compressor, an expansion machine, an
15 oil reservoir, a high-pressure air storage tank and an oil
sprayer.

In some known applications, the pressure and gas
compositions are relatively stable over time, which enables
20 constant operating characteristics and a low control level.

In other applications the operating conditions can vary
substantially, which leads to inefficiently and/or
reliability problems.

25 Some applications, such as pressure reduction stations for
natural gas, generally maintain a constant pressure
downstream from the pressure reduction stations but a
variable pressure upstream. The constant pressure
30 downstream is needed for the correct distribution of gas to
the end customers while the varying pressure upstream is

→la

1a

determined by effects such as variations in the supply and an unstable control.

In such cases the energy generated by the expansion device
5 is strongly influenced by the inlet pressure. There are two reasons for this. Firstly a higher inlet pressure leads to

→2

an increased pressure ratio and consequently a greater enthalpy drop per unit of expanded mass, secondly a higher inlet pressure leads to a greater mass flow on account of a higher gas density.

5

As it is of vital importance for the system that the downstream pressure is maintained, the expansion machine may only expand a mass flow that is equivalent to the instantaneous demand for gas at the endpoints of the gas network.

10

This leads to requirements for a complex variability of the volume flow at the inlet in a volumetric expansion machine with variable inlet pressure.

15

Existing solutions to control the volume flow in a volumetric expansion device include VSD, i.e. variable speed drives, flow reduction at the inlet, and mechanical means to vary the stroke volume of the machine.

20

Flow reduction at the inlet means that the density of the gas can be adjusted to control the mass flow that is expanded. The disadvantage is the clear efficiency loss as the pressure ratio of the expansion device is substantially reduced at all times, except when a maximum flow is required which is rarely the case.

25

• To control the stroke volume, a movable sleeve valve or other valve mechanism that changes the stroke volume of the machine is generally used. Such solutions can be extremely efficient but are expensive and increase the

30

complexity of the design and thereby jeopardise the reliability.

• A VSD enables a precise control of the expanded mass
5 volume and also preserves a high efficiency and low design complexity. But the torque of volumetric expansion machines is generally little dependent on the speed or even inversely dependent.

10 This means that a VSD generator must be able to operate safely at a low speed and at a high torque. Moreover, it means that forces that act on the inside of the volumetric expansion device will be defined by the inlet pressure, and not by the generated power. In other words the forces are
15 directly dependent on the mechanical torque that is produced on the outgoing shaft.

In VSD applications, the risk of a structural overload of the expansion device is clear if the inlet pressure varies
20 upwards. If an overdimensioned expansion machine is used, the efficiency will suffer at every inlet pressure in normal operating conditions. If a precisely dimensioned expansion device is used, the efficiency will be optimised at a normal inlet pressure, while structural damage can be
25 expected at high peaks in the inlet pressure.

Moreover, it is complex and expensive to control the speed in conditions with an exceptionally high torque and a low speed.

A related problem is the expensive and complex moderations of the problem of too high a speed. When the braking torque is lost, the expansion machine will accelerate quickly and create hazardous operating conditions that jeopardise the reliability of the system and will result in an excessive supply to the downstream gas network.

An often used moderation technique is to use quick-closing valves before the expansion device, such that the mass flow and the torque are effectively cut off in a fraction of a second.

Such quick-closing valves cause a temporary vacuum at the inlet of the expansion device on account of its rotation delay. The vacuum quickly brakes the expansion machine to a stop. The use of quick-closing valves means very high transient loads on the mechanical system.

Moreover, the expansion machine remains out of operation until it is properly controlled, restarts and is synchronised again with the electricity network.

The loss of braking torque can be due to a broken shaft connection, then a stoppage by a quick-closing valve can be adequate. But it can also be due to short or long disruptions in the electricity network, an unstable speed control of the VSD, or an overload of the brake generator.

The detection of real or supposed emergency situations, for example in auxiliary systems or by means of an emergency button, can lead to the need to use quick-closing valves.

A safe, reliable and quick way to limit the torque in an expansion device is thus desirable, and preferably a method
5 that can operate continuously without losing operating time of the expansion machine, even if an inlet pressure is temporarily stopped.

The purpose of the present invention is to provide a
10 solution to the aforementioned and other disadvantages by providing a gas expansion device for expanding a gas or a gas-liquid mixture, whereby the gas expansion device comprises a gas expansion element with an inlet port for the gas to be expanded and an inlet pipe for the gas to be
15 expanded, whereby the inlet pipe is connected to the inlet port, whereby the gas expansion device comprises a first liquid injection point for the injection of liquid, whereby the first liquid injection point is at a position level with the inlet port or upstream from the inlet port, and
20 preferably upstream from the inlet port and whereby the expansion device is provided with a liquid separator for separating liquid from gas that is expanded in the gas expansion element, whereby the first liquid injection point is connected to a liquid outlet of the liquid separator.

25

As a result, when too high a torque is detected, liquid can be injected in the gas flow upstream from the inlet port, or level with the inlet port, so that this liquid goes into an expansion chamber together with the gas.

30

When operating at high speed, the liquid that is injected ensures a braking effect on the inlet gas. The energy

→5a

5a

needed to accelerate the liquid reduces the total pressure of the gas, such that the pressure ratio of the expansion and volumetric inflow of the gas expansion device is reduced. As a result the torque is limited.

5

→6

When operating at low speed the liquid that is injected fills a large proportion of the chamber volume that would otherwise be occupied by inlet gas. Consequently the volumetric inflow of gas is reduced. The pressure ratio remains preserved but the mass flow is reduced. As a result the torque is limited.

Furthermore, when an emergency situation is detected that requires a rapid stoppage of the gas expansion device, liquid can be injected upstream from the inlet port.

The liquid then has the effect as described above, but also substantially reduces the high speed that would otherwise briefly occur. This means that a protection valve, before the expansion device, can be closed with a slower operating speed than would otherwise be the case. Consequently an extremely fast and expensive quick-closing valve is unnecessary, and a standard valve can be used for this, a possible brief overload does not occur and the gas expansion device is operational again more quickly after an emergency situation.

Such an emergency situation can occur in the event of a technical fault, for example a disconnection of the energy network to which energy is supplied, or the loss of the mechanical coupling between the expansion element and the generator, and can be detected in many ways known to a man skilled in the art.

Such an emergency situation can also occur if an auxiliary apparatus, correctly or incorrectly, issues an emergency signal, or if an emergency stop procedure is activated by human intervention or by software.

5

Furthermore, because the gas expansion device comprises a liquid separator, the same liquid that has already been separated from the gas, normally oil, can be used to supply the first liquid injection point.

10

In a preferred embodiment, the gas expansion device is provided with means for starting up or switching off a flow of the said liquid to the first liquid injection point, so that the first liquid injection point can be used or
15 otherwise according to need.

Preferably these means are connected to a control unit to control the means, and the gas expansion element is mechanically coupled to a generator such that the expansion
20 element can drive the generator, whereby the control unit is connected to the generator.

As a result operating conditions and measured parameters of the generator can be used to control the said means.

25

→8

Preferably the gas expansion device comprises a second liquid injection point that is configured to inject the said liquid in the gas expansion element at a position downstream from the inlet port, and the gas expansion
5 device is provided with a reservoir or supply pipe for the said liquid, whereby the first liquid injection point and the second liquid injection point are both connected to this supply pipe or this reservoir.

10 As a result the same liquid that is normally already injected via the second liquid injection point for cooling and/or lubrication can also [be injected] to the first liquid injection point so that the complexity of the device is reduced.

15 Preferably the said means comprise a three-way valve with three connecting ports, whereby a first of the connecting ports is connected to the supply pipe or the reservoir and the other connecting ports are each connected to one of the
20 said liquid injection points.

As a result, the supply of the second liquid injection point, that is desirable in normal operation, can easily be diverted to the first liquid injection point if the
25 operation is such that the use of the first liquid injection point is desirable.

In a preferred embodiment, the first liquid injection point is positioned such that the injection direction is
30 upstream. This ensures a maximum braking effect upon the occurrence of a high torque when operating at high speed,

because the direction of the liquid must then be reversed by the flowing gas.

5 The invention further concerns a method for expanding gas in which this gas is guided by a gas expansion device according to the invention, in which liquid is only injected via the first liquid injection point upon the detection of an exceptional operating condition.

10 Hereby a first threshold value of a torque being exceeded indicates a first exceptional operating condition.

15 This torque is the torque of mechanically coupled shafts of the generator and the expansion element. This can be measured in various places, or derived in a known way by a man skilled in the art from other measured values such as speed of rotation and power.

20 Hereby the occurrence of an emergency situation that requires the stoppage of the gas expansion device indicates a second exceptional operating condition, for example.

25 Hereby a threshold value of the speed of rotation of the expansion element being exceeded for example, or a second threshold value of a torque being exceeded, or a first threshold value of generated electric power being exceeded indicates an emergency situation.


30 Alternatively the invention can be defined by means of the following items:

1. Gas expansion device comprising a gas expansion element with an inlet port connected to an inlet pipe for pressurised gas, whereby the gas expansion device comprises a liquid injection point that is located before the inlet
5 port.
2. Gas expansion device according to item 1, in which the gas expansion device further comprises a main liquid injection point that is configured to inject liquid in the
10 gas expansion element at a location after the inlet port.
3. Gas expansion device according to items 1 and 2, in which the liquid injection point and the main liquid injection point are both connected via a liquid pipe to two
15 connecting ports of a three-way valve, whereby the third connecting port of the three-way valve is connected to a liquid outlet of a liquid separator connected to the outlet of the gas expansion element.
- 20 4. Gas expansion device according to items 1 and 2, in which injection control means are provided for controlling the flow of the liquid that is injected via the liquid injection point and the flow of the liquid injected via the main liquid injection point.
25
5. Gas expansion device according to items 3 and 4 in which the control means comprise the three-way valve.
6. Gas expansion device according to item 3, in which the
30 three-way valve is connected to a controller.

7. Gas expansion device according to item 6, in which the controller is further connected to a generator that is connected to the gas expansion element, such that the expansion element can drive the generator.
- 5
8. Method for operating a gas expansion device according to item 1, in which the liquid injection is switched off during normal operation via the liquid injection point.
- 10
9. Method for operating a gas expansion device according to item 1, in which, when operating at high speed, the liquid injection via the liquid injection point is activated when the torque or the inlet pressure exceeds a first preset threshold value.
- 15
10. Method for operating a gas expansion device according to item 1, in which, when operating at low speed, the liquid injection via the liquid injection point is activated when the torque or the inlet pressure exceeds a
- 20
- second preset threshold value.
11. Method for operating a gas expansion device according to item 1, in which during normal operation the liquid injection via the liquid injection point is activated when
- 25
- it goes below a power or torque limit; or when a speed limit is exceeded. The present invention relates to a method for registering the movements of the limbs of an articulated body.
- 30
12. Gas expansion device for expanding a gas or a gas-liquid mixture, whereby the gas expansion device comprises

a gas expansion element with an inlet port for the gas to be expanded and an inlet pipe for the gas to be expanded, whereby the inlet pipe is connected to the inlet port, whereby the gas expansion device comprises a first liquid
5 injection point for the injection of liquid, characterised in that the first liquid injection point is at a position level with the inlet port or upstream from the inlet port, and in that the expansion device is provided with a liquid separator for separating liquid from gas that is expanded
10 in the gas expansion element, whereby the first liquid injection point is connected to a liquid outlet of the liquid separator.

With the intention of better showing the characteristics of
15 the invention, a preferred embodiment of a gas expansion

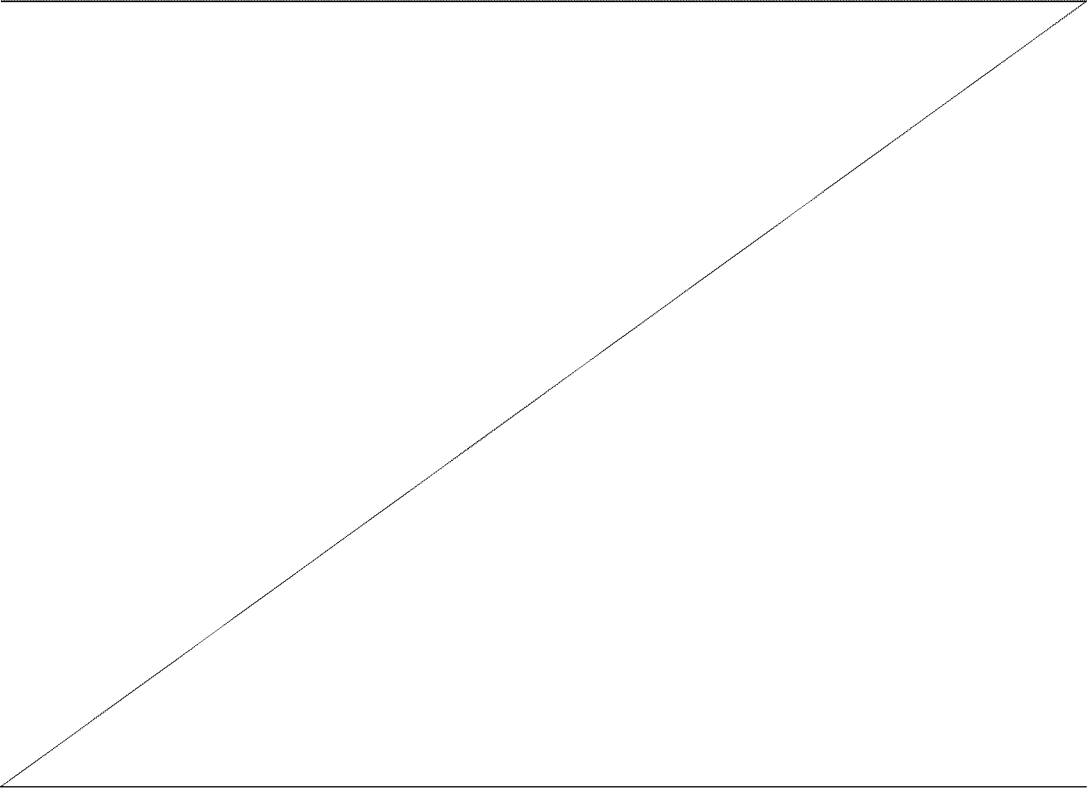

device according to the invention and an accompanying method are described hereinafter by way of an example without any limiting nature, with reference to the accompanying drawings, wherein:

5

figure 1 schematically shows a gas expansion device according to the invention;

figure 2 illustrates the operating principle of the gas expansion device.

10

In this example the gas expansion device 1 is a double screw natural gas expansion device with oil injection to the expansion.

15 However, the invention can be similarly applied to other types of volumetric expansion machines and other fluids than oil and natural gas.

The gas expansion device 1, as shown in figure 1, comprises
20 a double screw expansion element 2 and an electricity generator 3 that are mechanically coupled together.

The expansion element 2 comprises an inlet port 4 for natural gas that is connected to an inlet pipe 5 for
25 natural gas. A shut-off valve 6 is provided in the inlet pipe 5.

An oil separator 7 for separating oil and gas is provided downstream from the expansion element 2. This has an outlet
30 8 for expanded gas and an outlet 9 for oil.

13

The outlet 9 for oil is connected via an oil pump 11 to a first connecting port of a three-way valve 12.

5 The two other connecting ports of the three-way valve 12 are connected to liquid injection points.

More specifically this concerns a first liquid injection point 13 that is affixed just upstream from the inlet port 4 in the expansion element 2 or in the inlet pipe 5, and a
10 second liquid injection point 14 that is affixed downstream from the inlet port 4.

The first liquid injection point 13 hereby has an injection direction that is opposite to the flow direction of the
15 gas.

The gas expansion device 1 is further provided with an electronic control unit 15 that is connected in a data-transferring way to the shut-off valve 6, the three-way
20 valve 12 and the generator 3.

The operation of the gas expansion device 1 is simple and as follows.

25 In the event of normal operation, i.e. when a higher torque than desired is not detected, the three-way valve 12 is set such that all oil is driven to the second liquid injection point 14. The operation is then analogous to a traditional gas expansion device.

30

This is schematically shown in figure 2. The horizontal axis indicates the progress of the rotation of a rotor of the expansion element 2. The vertical axis indicates the volume of an expansion chamber.

5

Hereby the inlet port 4 is open to the expansion chamber between the points indicated by A and B. Just after the inlet port 4 is closed, oil is injected via the second liquid injection point 14, schematically indicated by the interval from point C to point D.

10

This is done in this way because, for a cost efficient application of a screw expansion device, the peripheral speed of the rotors must be as high as possible. Hence the oil injection to the inlet of the machine must be minimised to limit the friction losses that reduce an optimum filling of the expansion chamber. Hence, the oil injection is generally controlled such that the oil gets in the expansion chamber after the inlet port is closed, when the oil has no further effect on the filling process of the chamber with gas.

15

20

In order to obtain a good effect of the injected oil, it is often injected at high pressure, immediately after the inlet port is closed. The oil pressure is generally higher than the gas pressure at the inlet of the piping, despite the fact that the chamber pressure is reduced immediately after the inlet port closes.

25

In a first exceptional operating condition, i.e. if a higher than desired torque is measured or calculated in the

30

15

generator 3 by the control unit 15, the three-way valve 12 is set such that all oil flows to the first liquid injection point 13.

5 This has two effects. The first effect is that upon injection, the oil experiences a narrowing and change of direction due to the gas flowing past so that the effective inlet pressure of the gas is reduced. The second effect is that the oil flows in the expansion chamber of the
10 expansion element, so that there is less room for the gas. With a high speed of rotation in the first effect will significantly gain the upper hand and at a low speed of rotation the second effect will significantly gain the upper hand.

15

In both cases the torque is reduced so that an overload of the gas expansion device 1 is prevented.

In a second exceptional operating condition, upon detection
20 of an emergency situation, the three-way valve 12 is also set such that all oil flows to the first liquid injection point 13, with the above-mentioned effects, and additionally the shut-off valve 6 is closed by the control unit 15, so that the gas expansion device 1 quickly comes
25 to a stop in a way that does not cause any damage to the gas expansion device 1.

In the above, downstream and upstream refer to the flow direction of the gas.

30

The present invention is by no means limited to the embodiments described as an example and shown in the drawings, but a gas expansion device and method according to the invention can be realised in all kinds of forms and
5 dimensions without departing from the scope of the invention.

Claims.

-
1. Gas expansion device for expanding a gas or a gas-liquid mixture, whereby the gas expansion device comprises a gas expansion element with an inlet port for the gas to be expanded and an inlet pipe for the gas to be expanded, whereby the inlet pipe is connected to the inlet port, whereby the gas expansion device comprises a first liquid injection point for the injection of liquid, characterised in that the first liquid injection point is at a position level with the inlet port or upstream from the inlet port, and in that the expansion device is provided with a liquid separator for separating liquid from gas that is expanded in the gas expansion element, whereby the first liquid injection point is connected to a liquid outlet of the liquid separator.
2. Gas expansion device according to claim 1, characterised in that the liquid is oil.
3. Gas expansion device according to claim 1 or 2, characterised in that the gas expansion element is a double screw gas expansion element.
4. Gas expansion device according to any one of claims 1 to 3, characterised in that the gas expansion device is provided with means for starting up and switching off a flow of the said liquid to the first liquid injection point.

5. Gas expansion device according to claim 4, characterised in that the gas expansion device comprises a control unit to control the said means.
6. Gas expansion device according to claim 5, characterised in that the gas expansion element is coupled to a generator, such that the expansion element can drive the generator, whereby the control unit is connected in a data-transferring way to the generator.
7. Gas expansion device according to any one of claims 1 to 6, characterised in that the gas expansion device comprises a second liquid injection point that is configured to inject the said liquid into the gas expansion element at a position downstream from the inlet port.
8. Gas expansion device according to claim 7, characterised in that the gas expansion device is provided with a reservoir or supply pipe for the said liquid, whereby the first liquid injection point and the second liquid injection point are both connected to this supply pipe or this reservoir.
9. Gas expansion device according to any one of claims 4 to 6, characterised in that
- the gas expansion device comprises a second liquid injection point that is configured to inject the said liquid into the gas expansion element at a position downstream from the inlet port;
 - the gas expansion device is provided with a reservoir or supply pipe for the said liquid, whereby

the first liquid injection point and the second liquid injection point are both connected to this supply pipe or this reservoir; and

- 5 - the said means comprise a three-way valve with three connecting ports, whereby a first of the connecting ports is connected to the supply pipe or the reservoir and other connecting ports are each connected to one of the said liquid injection points.

10 10. Gas expansion device according to any one of claims 1 to 9, characterised in that the first liquid injection point is positioned such that the injection direction of the liquid is upstream.

15 11. Method for expanding a gas in which this gas is guided by a gas expansion device according to any one of claims 1 to 10, in which liquid is only injected via the first liquid injection point upon the detection of an exceptional operating condition, wherein the exceptional operating condition is indicated by:

- 20 - a first threshold value of a torque being exceeded; and/or
- an occurrence of an emergency situation that requires the stoppage of the gas expansion device.

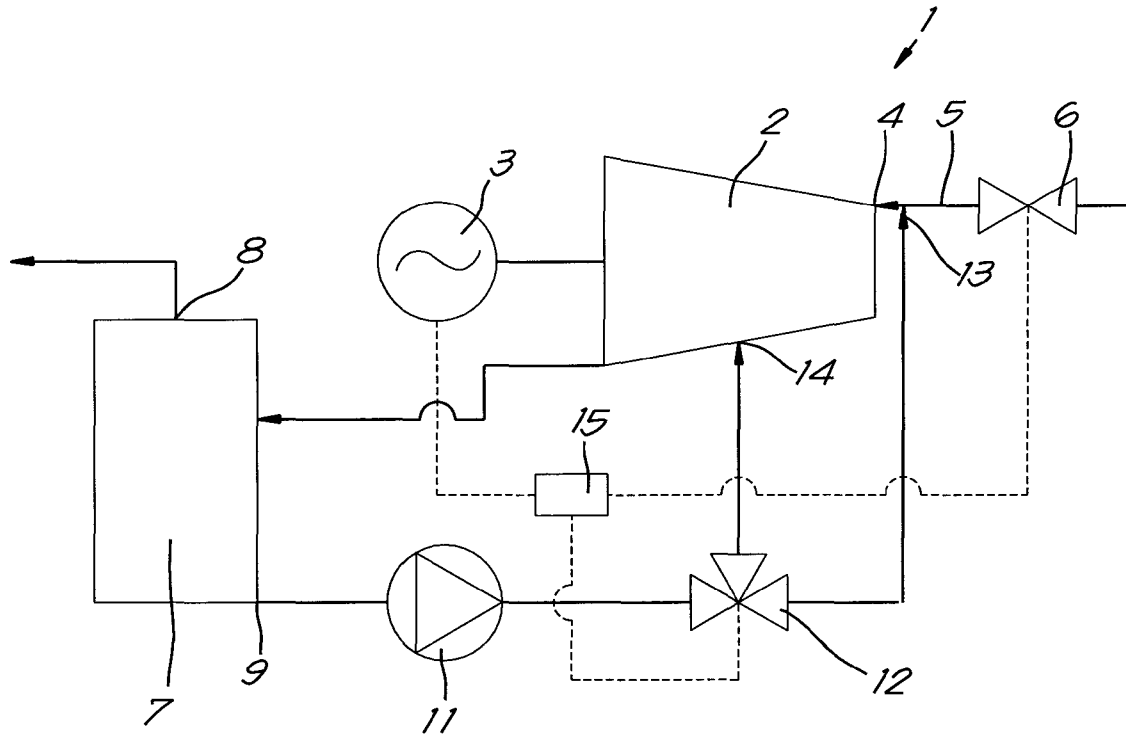


Fig. 1

