



(51) International Patent Classification:

H04L 12/931 (2013.01) *G06F 9/50* (2006.01)
H04L 29/12 (2006.01) *H04L 12/26* (2006.01)
G06F 9/455 (2006.01) *H04L 12/717* (2013.01)

(21) International Application Number:

PCT/US2016/028713

(22) International Filing Date:

21 April 2016 (21.04.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/737,867 12 June 2015 (12.06.2015) US

(71) Applicant: **AT&T INTELLECTUAL PROPERTY I, L.P.** [US/US]; 675 W. Peachtree Street, Suite 4000, Atlanta, Georgia 30308 (US).

(72) Inventors: **HIGGINS, Robert M.**; 1116 Lakewood Road, Manasquan, New Jersey 08736 (US). **FOLDARE, Mark Jeffrey**; 15 Rebel Run Drive, East Brunswick, New Jersey 08816 (US). **BRAGG, Dean**; 1243 N. Maple Avenue,

Toms River, New Jersey 08755 (US). **NG, John**; 4 Diane Drive, Morganville, New Jersey 07751 (US).

(74) Agents: **WATSON, Thomas E.** et al.; Amin, Turocy & Watson, LLP, 127 Public Square, 57th Fl., Cleveland, Ohio 44114 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: REFERENT SYSTEM FOR DEVICES OF AN NFV NETWORK

(57) Abstract: A network functions virtualization (NFV) network can be configured to operate according to NFV protocols that decouple software functionality from specific hardware elements. A referent system can be provided that identifies a precise physical location of devices associated with the NFV network relative to other equipment or devices associated with the NFV network.

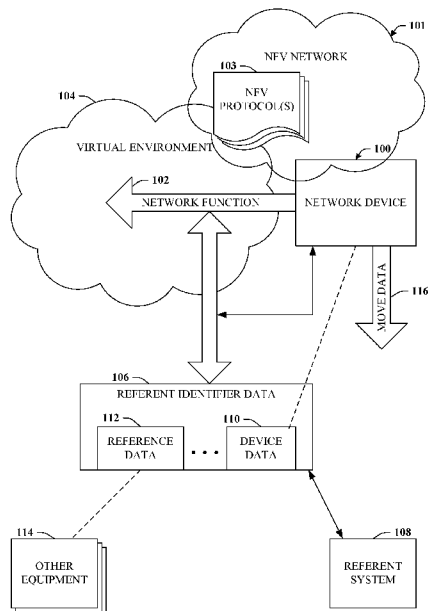


FIG. 1



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).

Title: REFERENT SYSTEM FOR DEVICES OF AN NFV NETWORK

CROSS REFERENCE TO RELATED APPLICATION

[0001] The subject application claims priority to U. S. Non-Provisional Patent Application Serial No. 14/737,867 filed June 12, 2015 and entitled “REFERENT SYSTEM FOR DEVICES OF AN NFV NETWORK”, the entirety of which is incorporated herein by reference.

TECHNICAL FIELD

[0002] The present application relates generally to associating a network functions virtualization (NFV) function created in a virtual environment with a referent system that identifies a precise physical location of the device that is executing the NFV function and/or providing the virtual environment.

BACKGROUND

[0003] In the domain of network architecture, there is an ongoing research trend, both in industry and academia, directed toward exploring the possibility of implementing software-defined networking (SDN) and network functions virtualization (NFV) for at least a portion of a network. Primary motivations for such a transition are a reduction of the custom hardware costs and performance enhancements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Numerous aspects, embodiments, objects and advantages of the present invention will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

[0005] FIG. 1 illustrates a block diagram of an example system that can provide for a referent system indicative of a geographical or physical location of devices associated with an NFV Network in accordance with certain embodiments of this disclosure;

[0006] FIG. 2 provides an illustration that depicts various examples of the other equipment in accordance with certain embodiments of this disclosure;

[0007] FIG. 3 illustrates a graphical depiction of an example referent system that hierarchically identifies the network device in relation to the other equipment specified by the referent system in accordance with certain embodiments of this disclosure;

[0008] FIG. 4 illustrates a table that depicts various examples of the referent identifier data in accordance with certain embodiments of this disclosure;

[0009] FIG. 5 illustrates a block diagram of an example system that provides for a network health monitoring device that can leverage the referent system to identify a physical location of the network device in accordance with certain embodiments of this disclosure;

[0010] FIG. 6 illustrates a block diagram of an example system that illustrates the network health monitoring device monitoring a group of devices associated with the NFV network and transmitting various indicators in response to status data in accordance with certain embodiments of this disclosure;

[0011] FIG. 7 illustrates an example methodology that can provide for a referent system indicative of a geographical or physical location of devices associated with an NFV Network in accordance with certain embodiments of this disclosure;

[0012] FIG. 8 illustrates an example methodology that can provide for additional features or aspects in connection with providing a referent system for elements of the NFV Network in accordance with certain embodiments of this disclosure;

DETAILED DESCRIPTION

OVERVIEW

[0013] Network functions virtualization (NFV) can be employed to virtualize components (e.g., nodes, switches, interfaces, etc.) of a network, wherein virtual machines located in a cloud or virtual environment can perform processing that was previously performed by custom hardware devices these virtualized components replace in an NFV architecture. These virtual machines can be readily instantiated or destroyed in the cloud with very little effort and represent a separation of hardware from software. In other words, NFV can be implemented in connection with cloud-based computing instead of requiring localized custom hardware to perform the same

functions--hence, the network functions being executed are no longer tied to custom hardware.

[0014] As noted, there are advantages to implementing a network according to NFV architecture. For example, since NFV represents a separation between hardware and software, virtual environments can be constructed by servers or other devices that are physically located substantially anywhere in the world instead of being tied to a specific location, as is the case with previous network architectures. For instance, traditional hardware tasked with providing a service to network users was generally tied to a physical location associated with that service or a related network element. In contrast, this same service can be provided by leveraging a virtual environment that is constructed by devices that are not tied to any specific physical location. Moreover, the devices can be commodity-based servers rather than application-specific custom devices and hence less expensive to operate and maintain.

[0015] However, separating hardware from software in connection with network functions, which represents an advantage that is provided by NFV, also introduces challenges that are not present for many other types of networks. In this regard, generally due to the fact that NFV operates to separate hardware and software elements, identifying the location associated with a specific device represents a distinct challenge.

[0016] The disclosed subject matter relates to a referent system that can be utilized to identify a precise physical location of devices associated with NFV networks. Such can be advantageous for a number of reasons. For example, consider the case in which a network device of a traditional network fails. Typically, such was remedied by dispatching service personnel to repair or replace the failing network device, which often represented a significant expense and possibly interrupted service for a significant amount of time. Historically, however, due to the tight coupling between hardware and software elements of traditional networks, these service personnel generally knew which failing network device required service and knew the location of that device.

[0017] Now consider a similar example in which a network device that instantiates a network function in a virtual environment associated with an NFV network. Suppose an error of some type occurs and the network function does not execute as intended. One of the advantages of an NFV network is that the network function can be moved and/or re-instantiated and executed by other devices of the

network, generally without any interruption to the service and at virtually no cost. However, if the error occurred due to hardware failure or the like, service personnel generally do not have a good idea which physical device is failing and needs service, largely because there is no tight coupling between hardware and software elements, as is the case for traditional networks.

[0018] A given building might have many floors, each with many aisles of computing devices that operate in connection with the network. Each of these aisles might have many device bays, and each of the device bays can have multiple shelves, and within each shelf, multiple devices that can execute the network function. Such can be a difficult undertaking to identify which device, from among potentially many thousands, requires service. Such a difficulty can be further compounded by the fact that many such buildings might exist, distributed at various locations throughout the world.

[0019] Another advantage provided by the disclosed referent system can relate to selecting devices at specific locations for instantiating network functions. Consider a network service that critically requires low latency between various interoperating network functions. As another example, consider a network service that has very stringent regulatory demands relating to that service or the underlying equipment. In these and other cases, the referent system can be used to select specific devices that are used to execute a particular network function. For example, devices in very close geographic proximity can be selected to execute interoperating network functions that have low latency constraints or devices at a very specific location can be specifically selected to execute network functions in order to accommodate regulatory or other constraints.

NFV REFERENT SYSTEM ARCHITECTURES

[0020] The disclosed subject matter is now described with reference to the drawings, wherein like reference numerals are used to refer to like elements throughout. In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosed subject matter. It may be evident, however, that the disclosed subject matter may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to facilitate describing the disclosed subject matter.

[0021] Referring now to the drawing, with reference initially to FIG. 1, network device 100 is depicted. Network device 100 can provide for a referent system (e.g., referent system 108) indicative of a geographical or physical location of devices associated with an NFV Network 101. In some embodiments, the referent system can be associated with a network function so that a precise physical location of the device executing the network function can be determined. In some embodiments, the referent system can be leveraged to select a device to be used to execute a network function, for instance selecting a precise physical location that is to be the location of devices executing the network function. Generally, network device 100 can comprise a processor and a memory that stores executable instructions that, when executed by the processor, facilitate performance of operations. Said processor and memory, as well as other suitable computer or computing-based elements, can be used in connection with implementing one or more of the systems or components shown and described in connection with FIG. 1 and other figures disclosed herein.

[0022] Network device 100 can be configured to execute network function 102 according to one or more NFV protocol(s) 103. For example, NFV protocol(s) 103 can define rules relating to functions of a NFV network 101 being provided in virtual environment 104. In some embodiments, virtual environment 104 can be generated by network device 100 or by many network devices, including network device 100, associated with the NFV network.

[0023] In some embodiments, network device 100 can associate network function 102 with referent identifier data 106, which can be identifier data defined by referent system 108. Referent identifier data 106 can comprise device data 110 and reference data 112.

[0024] Device data 110 can specifically identify network device 100. Hence, device data 110 can be used to identify the device (e.g., network device 100) that is executing network function 102. Additionally or alternatively, device data 110 can be used to select a specific device (e.g., network device 100) to execute or instantiate network function 102. In some embodiments, device data 110 identifies network device 100 relative to other equipment 114 associated with the NFV Network 101, which provides certain advantages over other identification techniques such as utilizing media access control (MAC) address data or the like, as further detailed herein. As used herein, other equipment 114 is contemplated to include any suitable

equipment related to the NFV network 101 other than network device 100, which can be identified relative to the other equipment 114.

[0025] Reference data 112 can represent data that identifies the other equipment 114. In some embodiments, referent identifier data 106 can indicate a physical location of network device 100 and the other equipment 114. FIG. 2 illustrates various examples of other equipment 114, FIG. 3 depicts an example of a hierarchical referent system 108 in connection with other equipment 114, and FIG. 4 depicts an example of referent identifier data 106 that is defined by referent system 108, all of which are intended to be referenced in conjunction with FIG. 1.

[0026] Turning now to FIG. 2, illustration 200 is provided. Illustration 200 depicts various examples of the other equipment 114. For instance, other equipment 114 can relate to building structure 202 or a floor structure 204. In those cases, the associated referent identifier data 106 can identify the particular building structure 202 as well as identify a specific floor of the building associated with floor structure 204 that generally includes devices associated with NFV network 101. Additionally or alternatively, other equipment 114 can comprise an aisle structure 206 that can comprise a group of devices associated with the NFV Network 101, a bay structure 208 that can comprise a group of devices associated with the NFV Network 101, a shelf structure 210 that can comprise a group of devices associated with the NFV Network 101, or any other suitable structure or device. It is understood that other equipment 114 can represent substantially any equipment associated with the NFV Network 101 or any structure or housing that comprises devices such as network device 100 that execute network functions of an NFV Network 101. Hence, the examples provided herein are referred to by convention, but other conventions or terminology is contemplated and, where suitable, is consistent with the disclosed referent system 108 and/or other disclosed subject matter.

[0027] FIG. 3 provides a graphical depiction 300 of an example referent system 108 that hierarchically identifies network device 100 in relation to the other equipment 114 specified by the referent system 108. At the upper hierarchical levels, a country or region 302 can be identified, as well as a city 304 within that country or region 302. Below these are the middle hierarchical levels, building structure 202 and floor structure 204. Hence, referent system 108 is contemplated to identify a particular floor of a particular building that is in a particular city of a particular country.

[0028] At the lowest hierarchical level in this example, is device 100 that executes network function 102. This device might be located within a specific shelf structure 210 that is in a specific bay structure 208, of a specific aisle structure 206 that is on the floor of the building indicated above.

[0029] It is understood that the upper hierarchical levels (e.g., 302, 304, etc.) and in some cases the middle levels associated with structures 202 and/or 204 can be identified by other referent systems and/or other location-based services such as global position satellite (GPS) or other trilateration or multi-lateration techniques. Hence, the disclosed subject matter can be used in combination with other referent systems, generally to identify the higher hierarchical tiers. It is appreciated, however, that the disclosed referent system 108 can describe a location of a specific device with much greater granularity than can be provided by other location-based services. One of the innovative aspects of the disclosed referent system 108 is that this precise location can be specified and/or identified relative to other equipment 114 associated with the NFV Network 101, which makes effective use of hierarchy such as that provided in graphical depiction 300.

[0030] With reference now to FIG. 4, illustration 400 is provided. Illustration 400 depicts various examples of the referent identifier data 106. As detailed previously, referent identifier data 106 can include reference data 112 that is indicative of other equipment 114 and device data 110 that identifies network device 100 relative to the other equipment 114.

[0031] In this example, reference data 112 includes four columns of data, indicated as "Location", "Aisle", "Bay", and "Shelf". It is assumed that data associated with the "Location" column sufficiently represents a location in the context of a specific country, region, city, building, floor, or other pertinent data. Such data can be provided by a different referent system (e.g., GPS) and transformed to the example referent system 108 depicted here. The subsequent columns, "Aisle", "Bay", and "Shelf" can expressly represent other equipment 114, and specifically elements 206, 208, and 210, respectively. It is understood that individual identifiers for these columns can, like device data 110, be an identifier that is relative to other (e.g., higher hierarchical tier) equipment 114.

[0032] In some embodiments, and due to the hierarchical nature of example referent system 108, device data 110 can be a non-unique identifier within referent system 108. Such is illustrated by boxes 402a and 402b, which both depict the same

identifier for two different network devices. Similarly, reference data 112 can be a non-unique identifier for certain other equipment 114, as illustrated by box 404, which both describe in this example the same shelf structure 210, even though referring to different devices within that shelf structure 210. However, referent identifier data 106, which represents a combination of (potentially non-unique) reference data 112 and (potentially non-unique) device data 110 can be unique within referent system 108, as illustrated by box 406. Hence, a precise location of a network device (e.g., network device 100) that does execute or is available to execute a network function (e.g., network function 102) at a particular time can be identified by referent system 108.

[0033] Turning back FIG. 1, in some embodiments, network device 100 can determine move data 116. Move data 116 can relate to a move associated with network function 102. In some embodiments, this move (which can be characterized and/or facilitated by move data 116) of network function 102 can relate to transferring execution of network function 102 from network device 100 to another network device (not shown) of the NFV network 101. For example, network device 100 can terminate processes related to the execution of network function 102 and the other device can instantiate processes related to the execution of network function 102. It is understood that when network device 100 off-loads the computing/processing of network function 102 to the other device, the physical location of the computing elements that are executing network function 102 has likely changed. Referent identifier data 106 can be updated to reflect this change. Additionally or alternatively, referent system 108 can be accessed in order to specify or select a suitable physical location or area where network function 102 is to be off-loaded or instantiated, and the execution of network function 102 can be moved to one or more devices at that location or area, as described by referent system 108.

[0034] In some embodiments, move data 116 associated with a move of network function 102 can relate to a change in a physical location associated with network device 100. For example, consider a mobile computing platform that collects data relating to weather events that is moved to avoid adverse weather such as a tornado or hurricane. It is appreciated that although the physical device executing network function 102 (e.g., network device 100) has not changed, the actual physical location of that device has changed as a result of the move and these changes can be reflected by an appropriate update to referent identifier data 106 and/or selected or

determined in advance of the move based on referent system 108 (e.g., to select where to move the network device).

[0035] It is understood that there are many reasons why network function 102 might be moved or why identifying in advance of a move a desirable target (e.g., device or location) for the move. For example, certain network functions might be subject to legal, regulatory, or contractual obligations to be executed within specified geographic boundaries or to be executed at certain local times (e.g., "follow the sun"). As another example, disaster recovery (e.g., weather, political, etc.) events might lead to a move as might capacity management issues, performance management issues, or equipment failure events.

[0036] Regardless of the reasons, moving a network function 102 creates difficulties for other reference systems. For example, relying on MAC addresses or the like might provide an ID for the device executing a network function, but says nothing specific as to the actual physical location of that device, particularly after a move. GPS or other location-based services can provide a physical location reference, but require additional equipment for devices and often do not provide location information to the resolution of what might be required for many applications since identifying a city or even a particular building or floor can still be insufficient to readily locate a given network device in many instances. Advantageously, the disclosed referent system 108 can mitigate certain deficiencies of other reference systems and can provide for updating appropriate information in response to changes in the physical location of the device(s) executing network function 102.

[0037] Referring now to FIG. 5, system 500 is illustrated. System 500 provides for a network health monitoring device 502 that can leverage the referent system 108 to identify a physical location of the network device 100. In some embodiments, network health monitoring device 502 can receive status data 504 from network device 100 or from another device or equipment associated with the NFV Network 101. Receipt of status data 504 can be in accordance with push or pull techniques or based on a schedule. Put differently, network device 100 can initiate transmission of status data 504, transmit status data 504 in response to a request (e.g., from network health monitoring device 502), or in accordance with a schedule.

[0038] Status data 504 can include referent identifier data 106 as detailed herein. Furthermore, status data 504 can include various status-based data such as, for example, spare capacity message 506 that indicates network device 100 has spare

computing capacity, maintenance message 508 that indicates network device 100 requires maintenance, or some other suitable indication of a state or status associated with network device 100. In response to status data 504, network health monitoring device 502 can determine location data 510 indicative of a physical location of network device 100 based on the referent identifier data 106 included in status data 504.

[0039] Turning now to FIG. 6, system 600 is illustrated. System 600 illustrates the network health monitoring device 502 monitoring a group of devices associated with the NFV network 101 and transmitting various indicators in response to status data. In this example, network devices 602 can represent a group of all or a portion of the devices that provide NFV network 101. The devices of the group of network devices 602 can be substantially similar to network device 100, as described herein, and/or the group of network devices 602 can include network device 100. Likewise, status data 604 represent a group of individual status indicators from all or a portion of the individual network devices 602, any of which can be substantially similar to status data 506 detailed herein. For example, status data 602 can include referent identifier 106 for the associated network device 602 and an associated status indicator.

[0040] In response to receiving status data 604, network health monitoring device 502 can transmit location data 510 associated with the particular network device(s) 602 and an appropriate status indicator (e.g., 506, 508, etc.) to other network elements or devices that can facilitate appropriate action in response.

METHODS FOR NFV ARCHITECTURE REFERENT SYSTEM

[0041] FIGS. 7 and 8 illustrate various methodologies in accordance with the disclosed subject matter. While, for purposes of simplicity of explanation, the methodologies are shown and described as a series of acts, it is to be understood and appreciated that the disclosed subject matter is not limited by the order of acts, as some acts may occur in different orders and/or concurrently with other acts from that shown and described herein. For example, those skilled in the art will understand and appreciate that a methodology could alternatively be represented as a series of interrelated states or events, such as in a state diagram. Moreover, not all illustrated acts may be required to implement a methodology in accordance with the disclosed subject matter. Additionally, it should be further appreciated that the methodologies

disclosed hereinafter and throughout this specification are capable of being stored on an article of manufacture to facilitate transporting and transferring such methodologies to computers.

[0042] Turning now to FIG. 7, exemplary method 700 is depicted. Method 700 can provide for a referent system indicative of a geographical or physical location of devices associated with an NFV Network. For example, at reference numeral 702, a network function can be executed according to a network functions virtualization protocol that defines rules relating to functions of a network being provided in a virtual environment constructed by the device.

[0043] At reference numeral 704, a first portion of referent identifier data associated with a referent system can be received. The first portion can comprises reference data that identifies other equipment of the network. At reference numeral 706, a second portion of the referent identifier data can be received. The second portion can comprise device data that identifies the device relative to the other equipment.

[0044] At reference numeral 708, the network function can be associated with referent identifier data. Hence, the network function is associated with data that identifies the device that is executing the network function. Such data can, for example, indicate a precise physical location of the device that is executing the network function. Method 700 can proceed to insert A, which is further detailed in connection with FIG. 8, or end.

[0045] With reference now to FIG. 8, exemplary method 800 is illustrated. Method 800 can provide for additional features or aspects in connection with providing for a referent system for elements of an NFV Network. For example, at reference numeral 802, transmission of status data can be facilitated. The status data can be transmitted to a monitoring device in response to a determination that the device has spare computing capacity, wherein the status data comprises the referent identifier data associated with the device and indicates the device has spare computing capacity.

[0046] At reference numeral 804, transmission of status data can be facilitated. In this example, the status data can be transmitted to a monitoring device in response to a determination that the device requires service, wherein the status data comprises the referent identifier data associated with the device and indicates the device requires service.

[0047] As used in this application, the terms “system,” “component,” “interface,” and the like are generally intended to refer to a computer-related entity or an entity related to an operational machine with one or more specific functionalities. The entities disclosed herein can be either hardware, a combination of hardware and software, software, or software in execution. For example, a component may be, but is not limited to being, a process running on a processor, a processor, an object, an executable, a thread of execution, a program, and/or a computer. By way of illustration, both an application running on a server and the server can be a component. One or more components may reside within a process and/or thread of execution and a component may be localized on one computer and/or distributed between two or more computers. These components also can execute from various computer readable storage media having various data structures stored thereon. The components may communicate via local and/or remote processes such as in accordance with a signal having one or more data packets (e.g., data from one component interacting with another component in a local system, distributed system, and/or across a network such as the Internet with other systems *via* the signal). As another example, a component can be an apparatus with specific functionality provided by mechanical parts operated by electric or electronic circuitry that is operated by software or firmware application(s) executed by a processor, wherein the processor can be internal or external to the apparatus and executes at least a part of the software or firmware application. As yet another example, a component can be an apparatus that provides specific functionality through electronic components without mechanical parts, the electronic components can comprise a processor therein to execute software or firmware that confers at least in part the functionality of the electronic components. An interface can comprise input/output (I/O) components as well as associated processor, application, and/or API components.

[0048] Furthermore, the disclosed subject matter may be implemented as a method, apparatus, or article of manufacture using standard programming and/or engineering techniques to produce software, firmware, hardware, or any combination thereof to control a computer to implement the disclosed subject matter. The term “article of manufacture” as used herein is intended to encompass a computer program accessible from or by a computing device.

[0049] As is employed in the subject specification, the term “processor” can refer to substantially any computing processing unit or device comprising, but not

limited to comprising, single-core processors; single-processors with software multithread execution capability; multi-core processors; multi-core processors with software multithread execution capability; multi-core processors with hardware multithread technology; parallel platforms; and parallel platforms with distributed shared memory. Additionally, a processor can refer to an integrated circuit, an application specific integrated circuit (ASIC), a digital signal processor (DSP), a field programmable gate array (FPGA), a programmable logic controller (PLC), a complex programmable logic device (CPLD), a discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. Processors can exploit nano-scale architectures such as, but not limited to, molecular and quantum-dot based transistors, switches and gates, in order to optimize space usage or enhance performance of user equipment. A processor also can be implemented as a combination of computing processing units.

[0050] In the subject specification, terms such as “store,” “data store,” “data storage,” “database,” “repository,” “queue”, and substantially any other information storage component relevant to operation and functionality of a component, refer to “memory components,” or entities embodied in a “memory” or components comprising the memory. It will be appreciated that the memory components described herein can be either volatile memory or nonvolatile memory, or can comprise both volatile and nonvolatile memory. In addition, memory components or memory elements can be removable or stationary. Moreover, memory can be internal or external to a device or component, or removable or stationary. Memory can comprise various types of media that are readable by a computer, such as hard-disk drives, zip drives, magnetic cassettes, flash memory cards or other types of memory cards, cartridges, or the like.

[0051] By way of illustration, and not limitation, nonvolatile memory can comprise read only memory (ROM), programmable ROM (PROM), electrically programmable ROM (EPROM), electrically erasable ROM (EEPROM), or flash memory. Volatile memory can comprise random access memory (RAM), which acts as external cache memory. By way of illustration and not limitation, RAM is available in many forms such as synchronous RAM (SRAM), dynamic RAM (DRAM), synchronous DRAM (SDRAM), double data rate SDRAM (DDR SDRAM), enhanced SDRAM (ESDRAM), Synchlink DRAM (SLDRAM), and direct Rambus RAM (DRRAM). Additionally, the disclosed memory components of

systems or methods herein are intended to comprise, without being limited to comprising, these and any other suitable types of memory.

[0052] In particular and in regard to the various functions performed by the above described components, devices, circuits, systems and the like, the terms (including a reference to a “means”) used to describe such components are intended to correspond, unless otherwise indicated, to any component which performs the specified function of the described component (*e.g.*, a functional equivalent), even though not structurally equivalent to the disclosed structure, which performs the function in the herein illustrated exemplary aspects of the embodiments. In this regard, it will also be recognized that the embodiments comprises a system as well as a computer-readable medium having computer-executable instructions for performing the acts and/or events of the various methods.

[0053] Computing devices typically comprise a variety of media, which can comprise computer-readable storage media and/or communications media, which two terms are used herein differently from one another as follows. Computer-readable storage media can be any available storage media that can be accessed by the computer and comprises both volatile and nonvolatile media, removable and non-removable media. By way of example, and not limitation, computer-readable storage media can be implemented in connection with any method or technology for storage of information such as computer-readable instructions, program modules, structured data, or unstructured data. Computer-readable storage media can comprise, but are not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disk (DVD) or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or other tangible and/or non-transitory media which can be used to store desired information. Computer-readable storage media can be accessed by one or more local or remote computing devices, *e.g.*, via access requests, queries or other data retrieval protocols, for a variety of operations with respect to the information stored by the medium.

[0054] On the other hand, communications media typically embody computer-readable instructions, data structures, program modules or other structured or unstructured data in a data signal such as a modulated data signal, *e.g.*, a carrier wave or other transport mechanism, and comprises any information delivery or transport media. The term “modulated data signal” or signals refers to a signal that has one or

more of its characteristics set or changed in such a manner as to encode information in one or more signals. By way of example, and not limitation, communications media comprise wired media, such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media

[0055] Further, terms like “user equipment,” “user device,” “mobile device,” “mobile,” station,” “access terminal,” “terminal,” “handset,” and similar terminology, generally refer to a wireless device utilized by a subscriber or user of a wireless communication network or service to receive or convey data, control, voice, video, sound, gaming, or substantially any data-stream or signaling-stream. The foregoing terms are utilized interchangeably in the subject specification and related drawings. Likewise, the terms “access point,” “node B,” “base station,” “evolved Node B,” “cell,” “cell site,” and the like, can be utilized interchangeably in the subject application, and refer to a wireless network component or appliance that serves and receives data, control, voice, video, sound, gaming, or substantially any data-stream or signaling-stream from a set of subscriber stations. Data and signaling streams can be packetized or frame-based flows. It is noted that in the subject specification and drawings, context or explicit distinction provides differentiation with respect to access points or base stations that serve and receive data from a mobile device in an outdoor environment, and access points or base stations that operate in a confined, primarily indoor environment overlaid in an outdoor coverage area. Data and signaling streams can be packetized or frame-based flows.

[0056] Furthermore, the terms “user,” “subscriber,” “customer,” “consumer,” and the like are employed interchangeably throughout the subject specification, unless context warrants particular distinction(s) among the terms. It should be appreciated that such terms can refer to human entities, associated devices, or automated components supported through artificial intelligence (e.g., a capacity to make inference based on complex mathematical formalisms) which can provide simulated vision, sound recognition and so forth. In addition, the terms “wireless network” and “network” are used interchangeable in the subject application, when context wherein the term is utilized warrants distinction for clarity purposes such distinction is made explicit.

[0057] Moreover, the word “exemplary” is used herein to mean serving as an example, instance, or illustration. Any aspect or design described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over

other aspects or designs. Rather, use of the word exemplary is intended to present concepts in a concrete fashion. As used in this application, the term “or” is intended to mean an inclusive “or” rather than an exclusive “or”. That is, unless specified otherwise, or clear from context, “X employs A or B” is intended to mean any of the natural inclusive permutations. That is, if X employs A; X employs B; or X employs both A and B, then “X employs A or B” is satisfied under any of the foregoing instances. In addition, the articles “a” and “an” as used in this application and the appended claims should generally be construed to mean “one or more” unless specified otherwise or clear from context to be directed to a singular form.

[0058] In addition, while a particular feature may have been disclosed with respect to only one of several implementations, such feature may be combined with one or more other features of the other implementations as may be desired and advantageous for any given or particular application. Furthermore, to the extent that the terms “includes” and “including” and variants thereof are used in either the detailed description or the claims, these terms are intended to be inclusive in a manner similar to the term “comprising.”

CLAIMS

What is claimed is:

1. A network device, comprising:
a processor; and
a memory that stores executable instructions that, when executed by the processor, facilitate performance of operations, comprising:
executing a network function according to a network functions virtualization protocol that defines rules relating to functions of network devices of a network being provided in a virtual environment generated by the network device;
and
associating the network function with referent identifier data of a referent system, wherein the referent identifier data comprises:
device data that identifies the network device relative to equipment other than the network device associated with the network; and
reference data indicative of the equipment associated with the network.
2. The network device of claim 1, wherein the referent identifier data is indicative of a physical location of the network device and the equipment.
3. The network device of claim 1, wherein the operations further comprise determining move data indicative of a move associated with the network function.
4. The network device of claim 3, wherein the move associated with the network function relates to transferring execution of the network function from the network device to another network device and updating the referent identifier data in accordance with information indicative of a physical location of the other network device.

5. The network device of claim 3, wherein the move associated with the network function relates a change in a physical location associated with the network device that is executing the network function and updating the referent identifier data in accordance with information indicative of the change of the physical location of the network device.

6. The network device of claim 1, wherein the equipment comprises a floor structure associated with a floor identifier of a building structure and the floor structure comprising a group of devices associated with the network, the equipment comprises an aisle structure comprising a group of devices associated with the network, the equipment comprises a bay structure comprising a group of devices associated with the network, or the equipment comprises a shelf structure comprising a group of devices associated with the network.

7. The network device of claim 1, wherein the reference data and the device data represent non-unique identifiers within the referent system.

8. The network device of claim 1, wherein the referent identifier data, comprising a combination of the reference data and the device data, represents a unique identifier within the referent system.

9. The network device of claim 1, wherein the operations further comprise facilitating transmission of status data to a monitoring device in response to a determination that the network device has spare computing capacity, and wherein the status data comprises the referent identifier data and indicates the network device has spare computing capacity.

10. The network device of claim 1, wherein the operations further comprise facilitating transmission of status data to a monitoring device in response to a determination that the network device requires maintenance, and wherein the status data comprises the referent identifier data and indicates the network device requires maintenance.

11. A monitoring device, comprising:
 - a processor; and
 - a memory that stores executable instructions that, when executed by the processor, facilitate performance of operations, comprising:
 - receiving status data from a network device configured to execute a network function according to a network functions virtualization protocol that defines rules relating to functions of network devices of a network being provided in a virtual environment instantiated by the network device;
 - receiving referent identifier data indicative of a referent system, wherein the referent identifier data comprises device data that identifies the network device relative to equipment, other than the device, associated with the network and reference data that identifies the equipment associated with the network; and
 - determining location data indicative of a physical location of the network device based on the referent identifier data.
12. The monitoring device of claim 11, wherein the reference data is indicative of a physical location of the equipment and the equipment comprises: a floor structure associated with a floor identifier of a building structure, wherein the floor structure comprising a first group of devices associated with the network, an aisle structure comprising a second group of devices associated with the network, a bay structure comprising a third group of devices associated with the network, or a shelf structure comprising a fourth group of devices associated with the network.
13. The monitoring device of claim 11, wherein the operations further comprise receiving move data indicative of a move associated with the network function and updating the location data in accordance with the move data.
14. The monitoring device of claim 11, wherein the operations further comprise receiving move request data indicative of a request to change a physical location associated with the network function and determining target location data indicative of a target for the change of the physical location based on the referent system.

15. The monitoring device of claim 11, wherein the reference data and the device data are, within the referent system, non-unique identifiers and the referent identifier data, comprising a combination of the reference data and the device data, is, within the referent system, a unique identifier.

16. The monitoring device of claim 11, wherein the operations further comprise transmitting a spare capacity message that indicates a first device has spare capacity, and wherein the first device is identified by the referent system and is at a physical location defined by the referent system.


17. The monitoring device of claim 11, wherein the operations further comprise transmitting a maintenance message that indicates a first device potentially requires service, and wherein the first device is identified by the referent system and is at a physical location defined by the referent system.

18. A method, comprising:

- executing, by a device comprising a processor, a network function according to a network functions virtualization protocol that defines rules relating to functions of network devices of a network being provided in a virtual environment constructed by the device;
- receiving, by the processor, a first portion of referent identifier data associated with a referent system, wherein the first portion comprises reference data that identifies equipment of the network other than the device;
- receiving, by the processor, a second portion of the referent identifier data comprising device data that identifies the device relative to the equipment; and
- associating, by the device, the network function with referent identifier data.

19. The method of claim 18, further comprising facilitating, by the device, transmission of status data to a monitoring device in response to a determination that the device has spare computing capacity, wherein the status data comprises the referent identifier data and indicates the device has spare computing capacity.

20. The method of claim 18, further comprising facilitating, by the device, transmission of status data to a monitoring device in response to a determination that the device requires service, wherein the status data comprises the referent identifier data and indicates the device requires service.

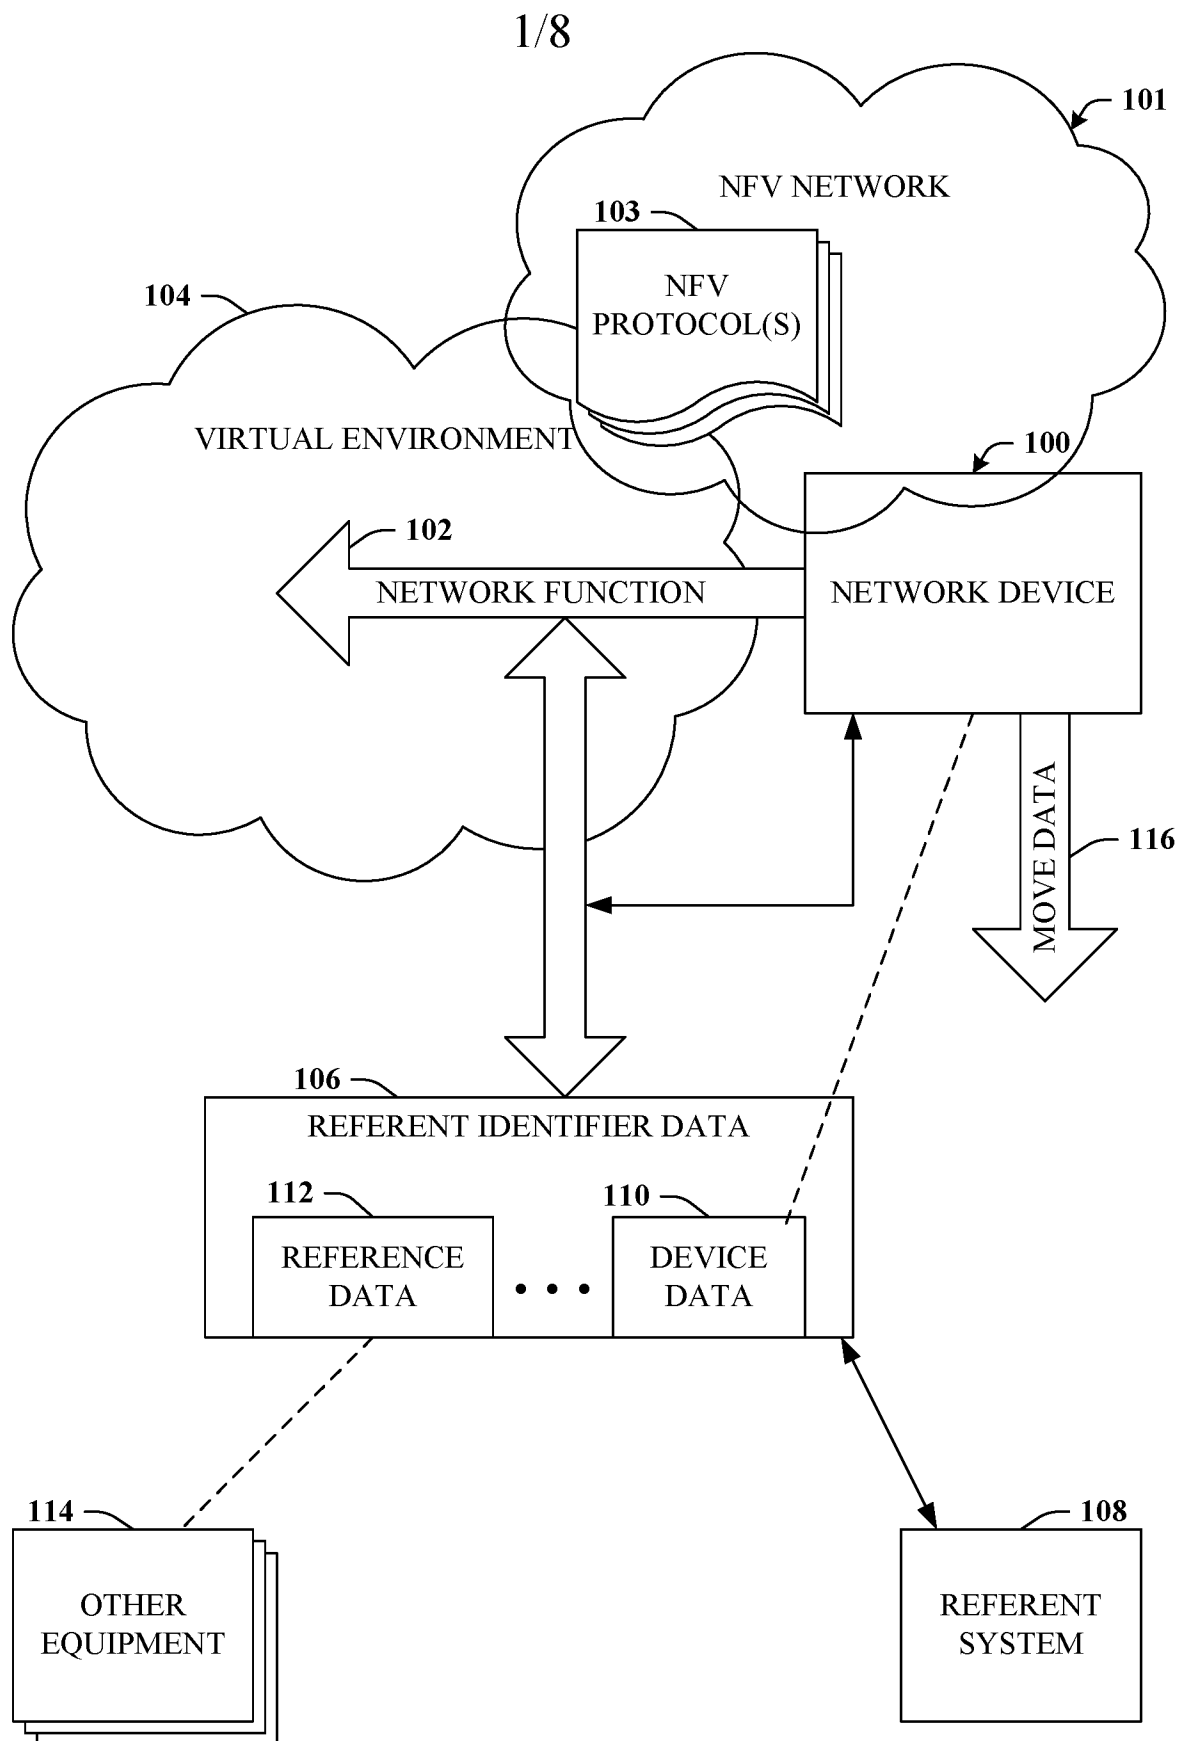**FIG. 1**

200

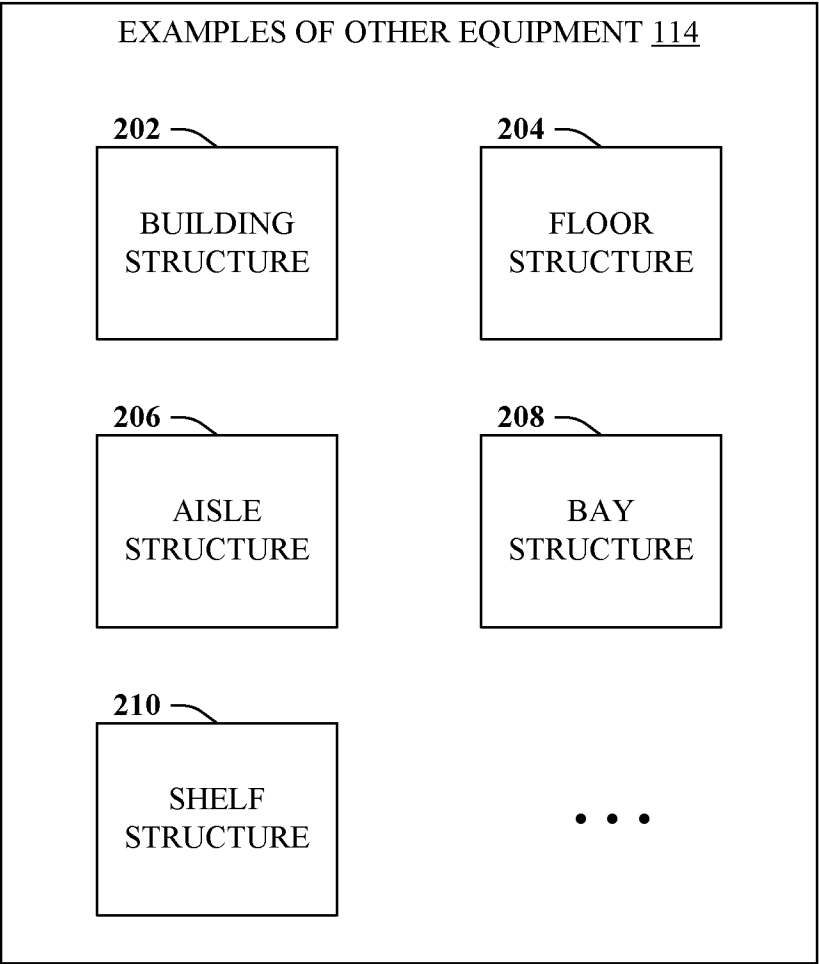


FIG. 2

3/8

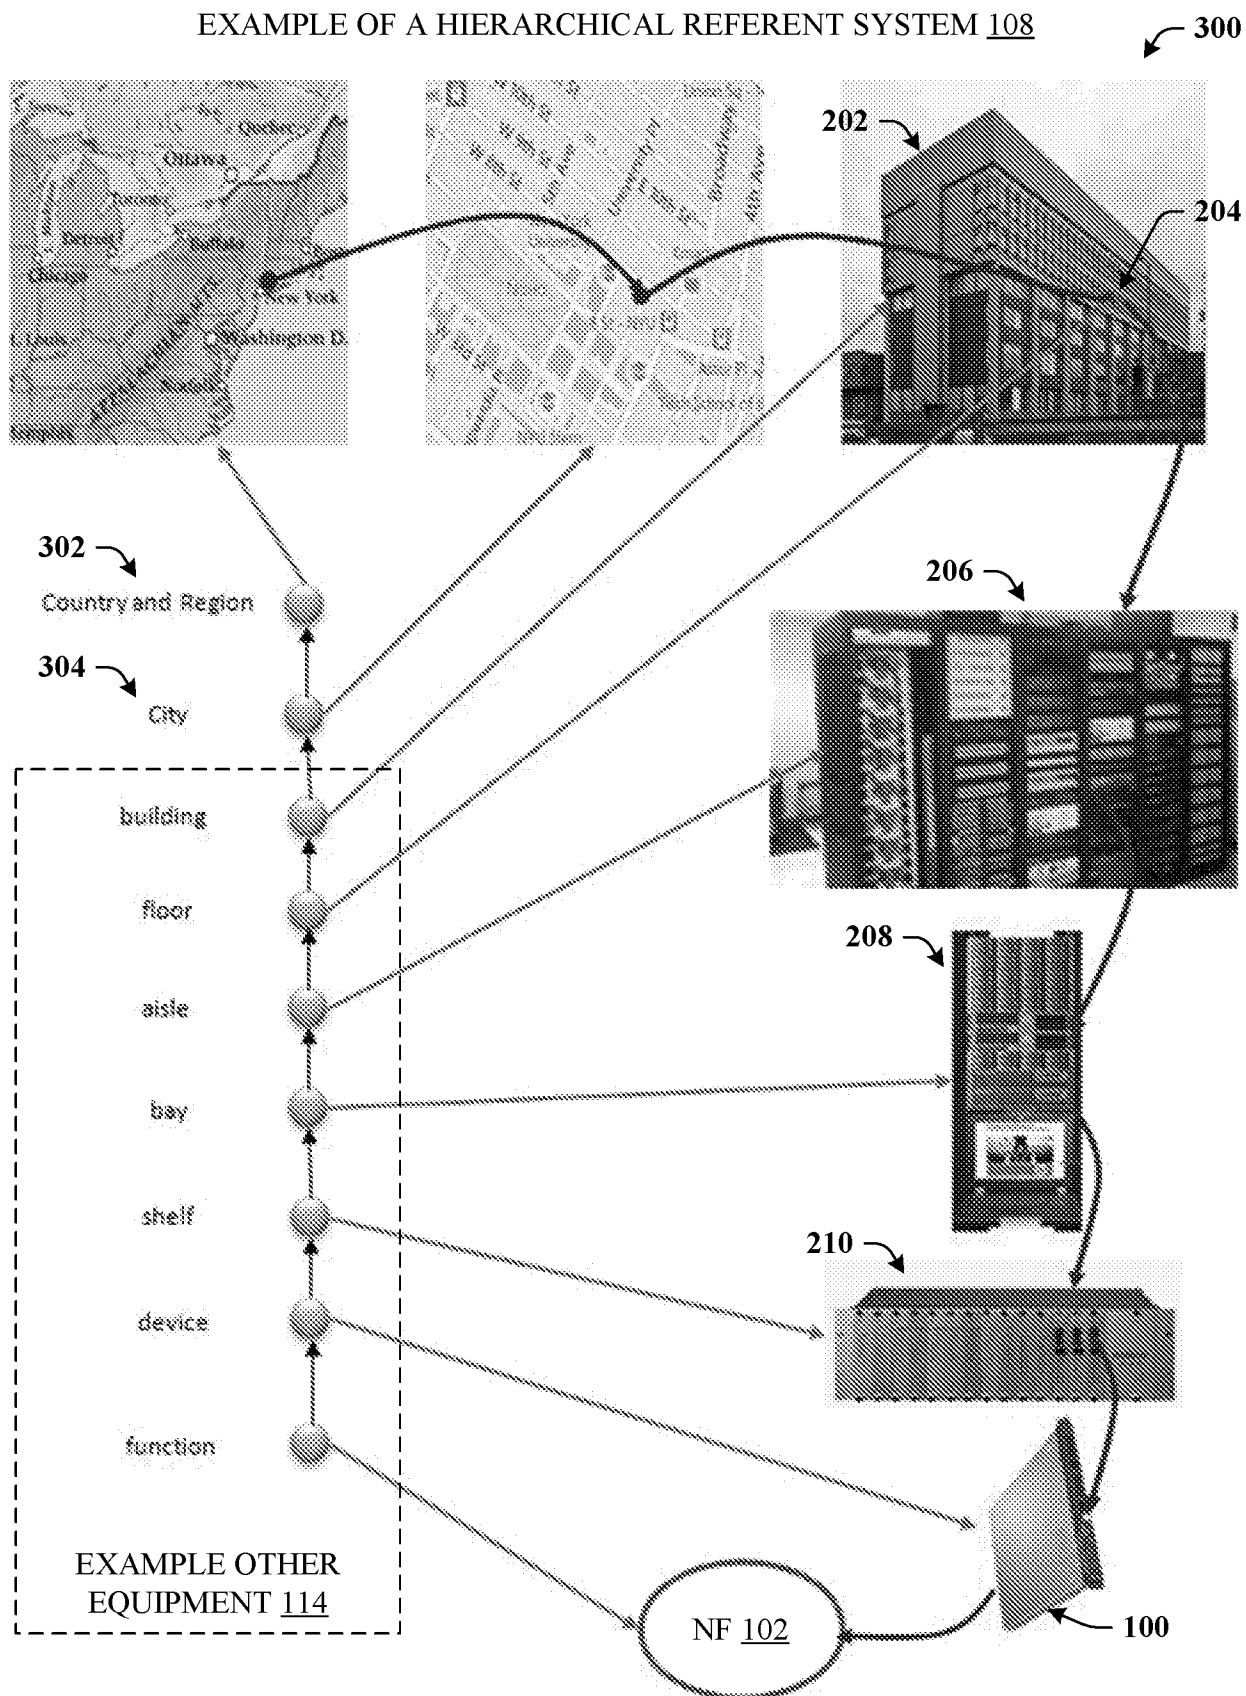
EXAMPLE OF A HIERARCHICAL REFERENT SYSTEM 108

FIG. 3

EXAMPLE REFERENT IDENTIFIER DATA 106

400

EXAMPLE DEVICE
DATA 110

EXAMPLE REFERENCE DATA 112

Location	Aisle	Bay	Shelf	Device	Function
					$\text{VNF} = \text{function } a \text{ at time } t$ $a, t = \{1, \dots, \text{infinity}\}$
UNY31111	1	1	1	1	$\text{VNF}(a, t)$
UNY31111	1	1	1	2	$\text{VNF}(a, t)$
UNY31113	1	1	1	3	$\text{VNF}(a, t)$
UNY31121	1	1	2	1	$\text{VNF}(a, t)$
UNY31122	1	1	2	2	$\text{VNF}(a, t)$
UNY31211	1	2	1	1	$\text{VNF}(a, t)$
UNY31212	1	2	1	2	$\text{VNF}(a, t)$
UNY31223	1	2	1	3	$\text{VNF}(a, t)$
UNY31221	1	2	2	1	$\text{VNF}(a, t)$
UNY31222	1	2	2	2	$\text{VNF}(a, t)$
UNY31223	1	2	2	3	$\text{VNF}(a, t)$
UNY32111	2	1	1	1	$\text{VNF}(a, t)$


404
CAN BE A
NON-UNIQUE
IDENTIFIER
WITHIN THE
REFERENT
SYSTEM

406
COMBINATION
OF 112 AND 110
CAN BE A
UNIQUE
IDENTIFIER
WITHIN THE
REFERENT
SYSTEM

CAN BE A
NON-UNIQUE
IDENTIFIER
WITHIN THE
REFERENT
SYSTEM

FIG. 4

5/8

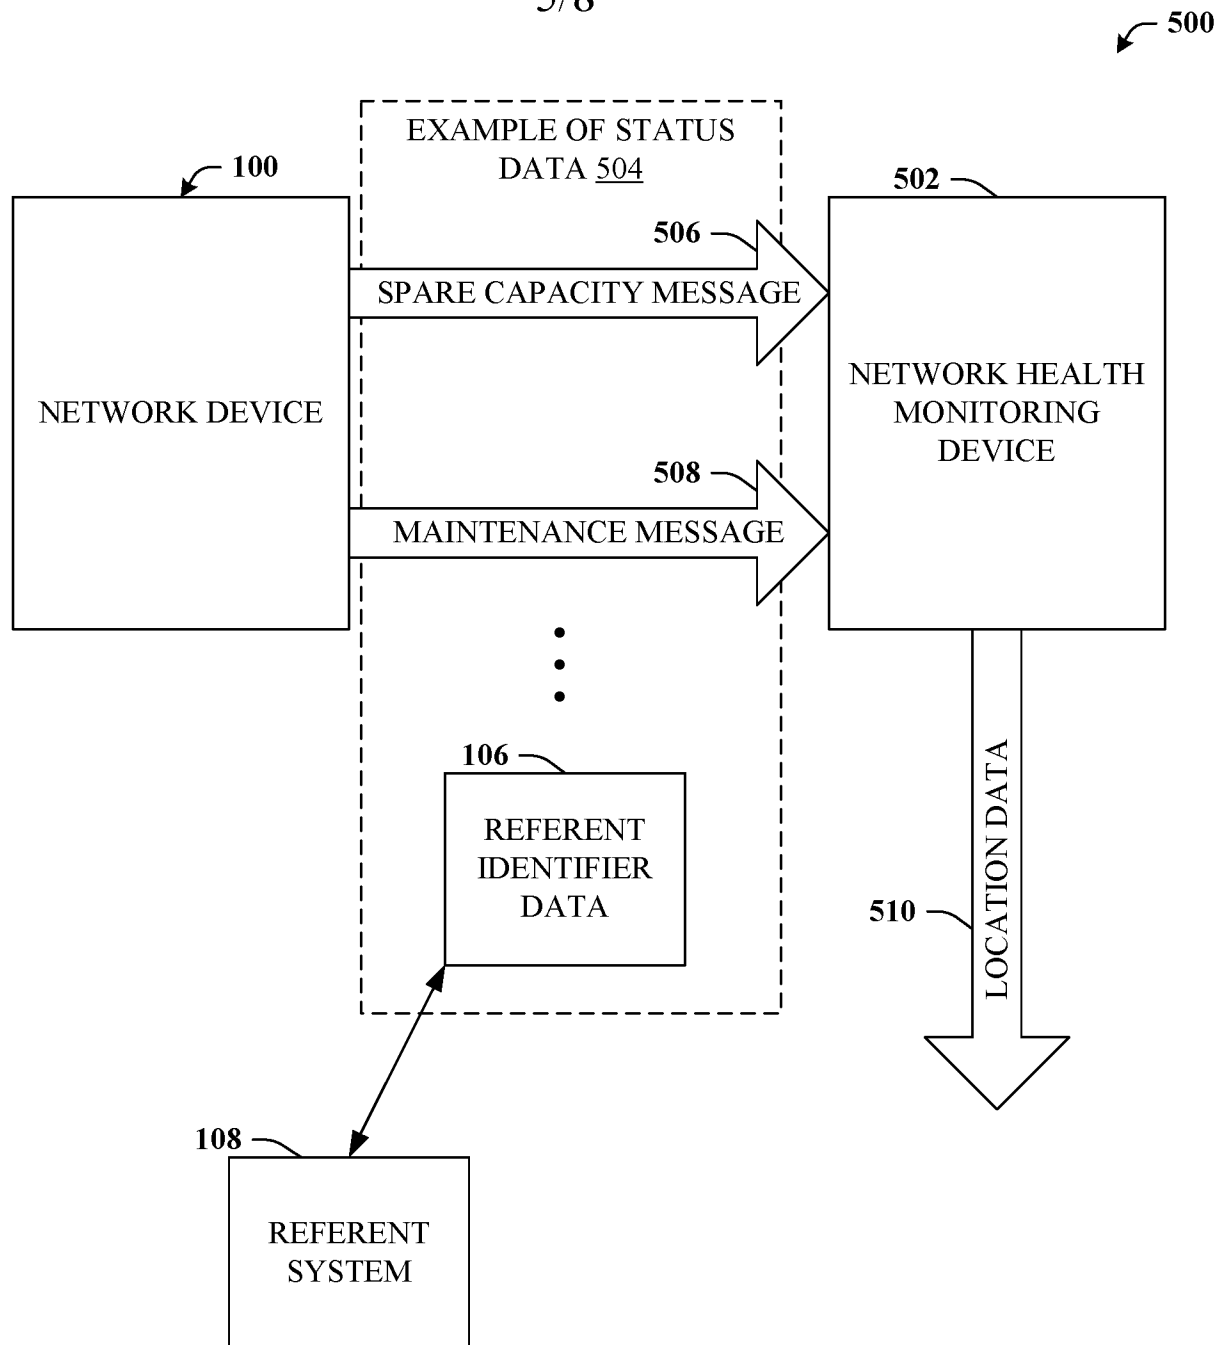**FIG. 5**

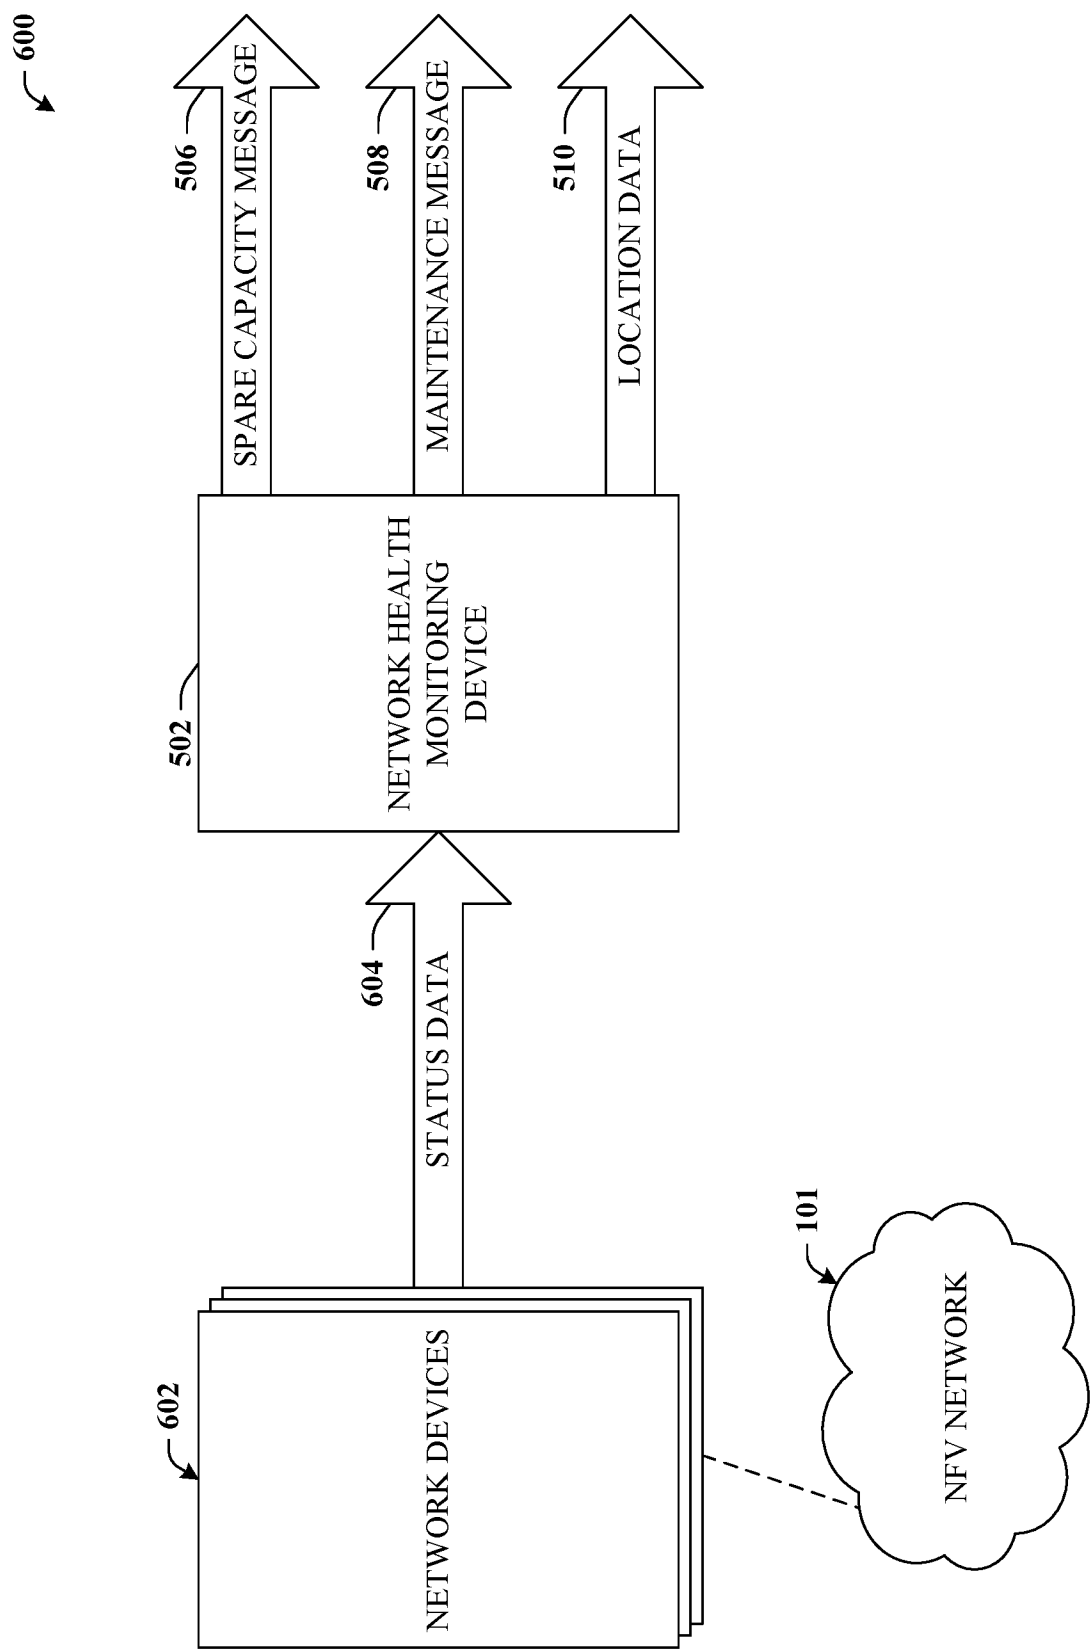


FIG. 6

7/8

700

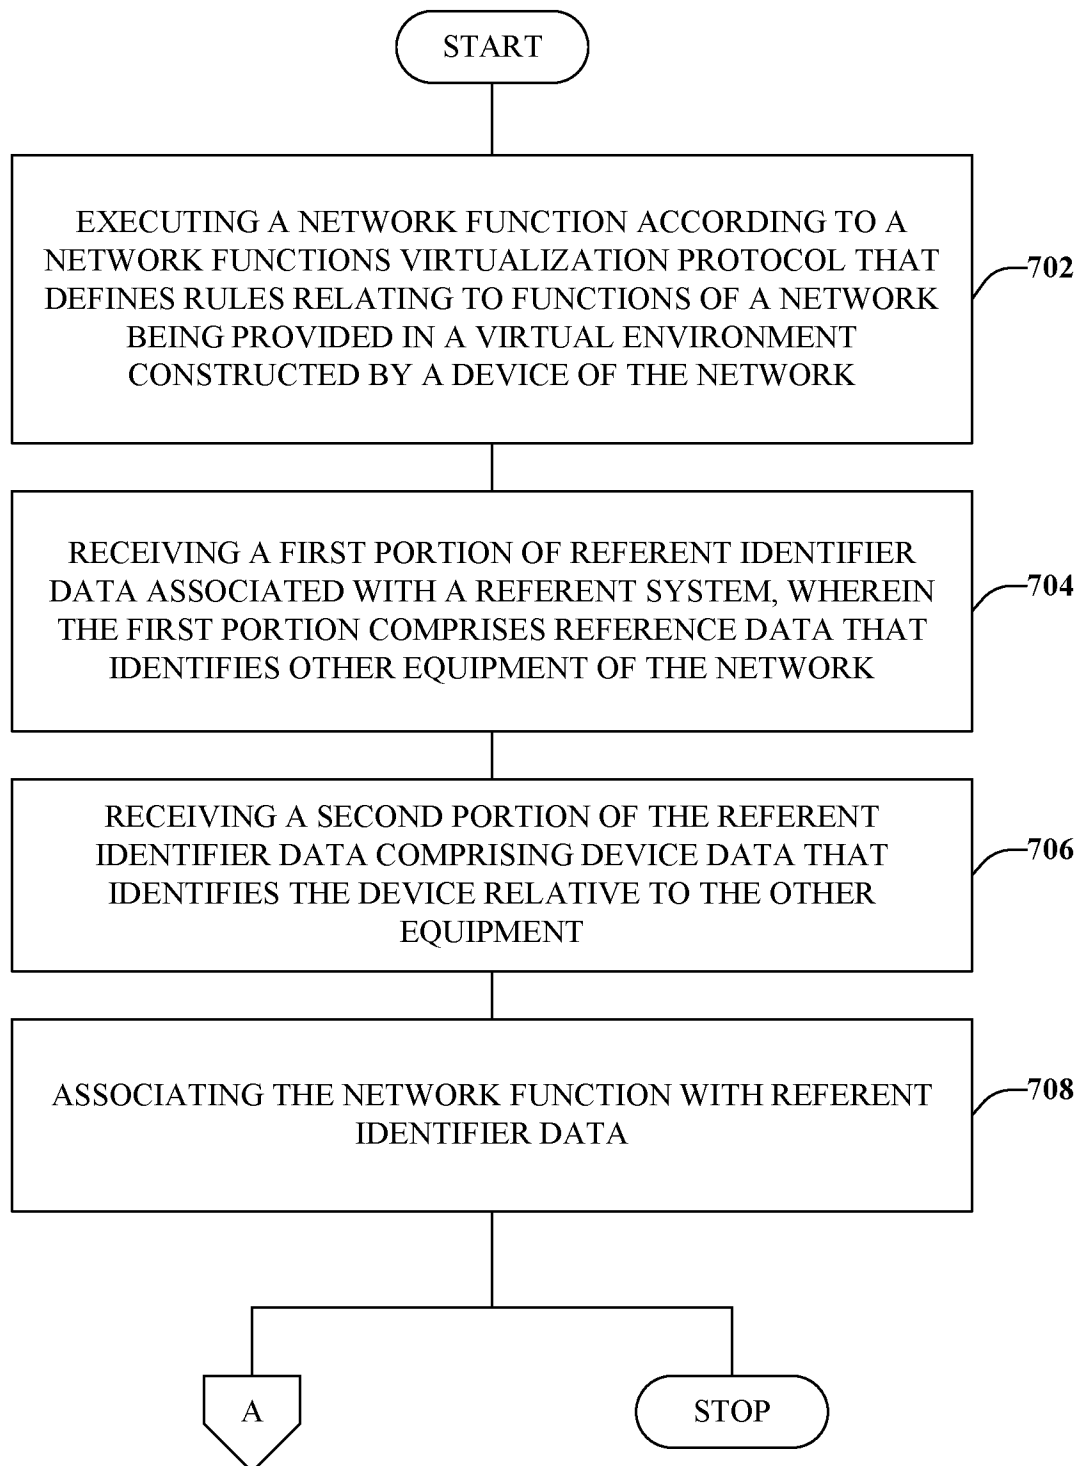
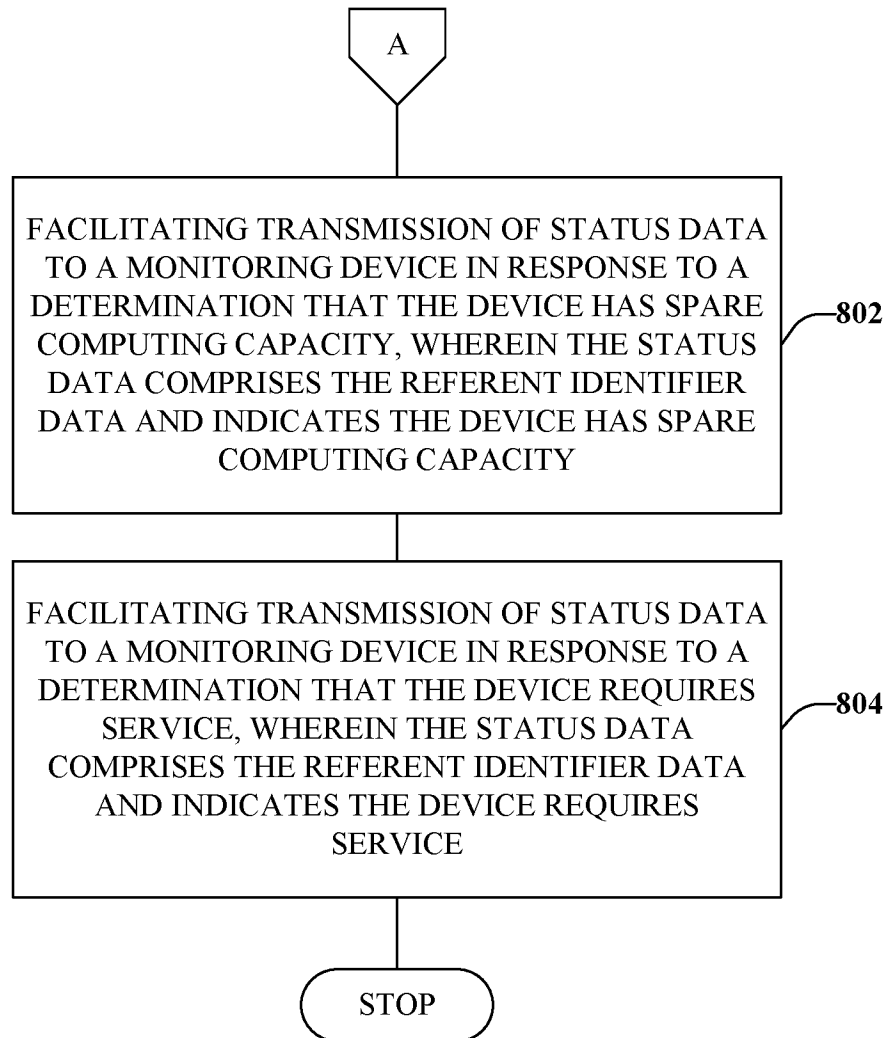


FIG. 7

8/8

800

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/028713

A. CLASSIFICATION OF SUBJECT MATTER INV. H04L12/931 H04L29/12 G06F9/455 G06F9/50 H04L12/26 H04L12/717 ADD. According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H04L G06F Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, INSPEC, WPI Data														
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Category*</th> <th style="width: 70%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width: 20%;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td> US 2014/201374 A1 (ASHWOOD-SMITH PETER [CA] ET AL) 17 July 2014 (2014-07-17) paragraphs [0004], [0005], [0007] - [0009], [0023] - [0025], [0028] - [0032], [0034], [0040], [0041], [0057] - [0059] ----- </td> <td style="text-align: center; vertical-align: top;">1-20</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td> US 2008/298302 A1 (ISHIDA AKIHITO [JP]) 4 December 2008 (2008-12-04) figures 2,4a,4b,4c,5-10,12a, 12b,13-15 paragraphs [0056] - [0081], [0094] - [0139], [0144], [0206] ----- </td> <td style="text-align: center; vertical-align: top;">1-20</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td> US 2013/091255 A1 (JAI BEN-CHIAO [TW]) 11 April 2013 (2013-04-11) figures 1,2 paragraphs [0007] - [0009], [0015] - [0035] ----- </td> <td style="text-align: center; vertical-align: top;">1-20</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2014/201374 A1 (ASHWOOD-SMITH PETER [CA] ET AL) 17 July 2014 (2014-07-17) paragraphs [0004], [0005], [0007] - [0009], [0023] - [0025], [0028] - [0032], [0034], [0040], [0041], [0057] - [0059] -----	1-20	A	US 2008/298302 A1 (ISHIDA AKIHITO [JP]) 4 December 2008 (2008-12-04) figures 2,4a,4b,4c,5-10,12a, 12b,13-15 paragraphs [0056] - [0081], [0094] - [0139], [0144], [0206] -----	1-20	A	US 2013/091255 A1 (JAI BEN-CHIAO [TW]) 11 April 2013 (2013-04-11) figures 1,2 paragraphs [0007] - [0009], [0015] - [0035] -----	1-20
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	US 2014/201374 A1 (ASHWOOD-SMITH PETER [CA] ET AL) 17 July 2014 (2014-07-17) paragraphs [0004], [0005], [0007] - [0009], [0023] - [0025], [0028] - [0032], [0034], [0040], [0041], [0057] - [0059] -----	1-20												
A	US 2008/298302 A1 (ISHIDA AKIHITO [JP]) 4 December 2008 (2008-12-04) figures 2,4a,4b,4c,5-10,12a, 12b,13-15 paragraphs [0056] - [0081], [0094] - [0139], [0144], [0206] -----	1-20												
A	US 2013/091255 A1 (JAI BEN-CHIAO [TW]) 11 April 2013 (2013-04-11) figures 1,2 paragraphs [0007] - [0009], [0015] - [0035] -----	1-20												
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.														
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family														
Date of the actual completion of the international search 8 July 2016		Date of mailing of the international search report 18/07/2016												
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Tyszka, Krzysztof												

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/028713

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2014201374	A1	17-07-2014	CN 105247826 A	13-01-2016
			EP 2936754 A1	28-10-2015
			JP 2016509412 A	24-03-2016
			KR 20150105421 A	16-09-2015
			US 2014201374 A1	17-07-2014
			WO 2014110453 A1	17-07-2014

US 2008298302	A1	04-12-2008	CN 101184010 A	21-05-2008
			JP 4213176 B2	21-01-2009
			JP 2008131101 A	05-06-2008
			US 2008298302 A1	04-12-2008

US 2013091255	A1	11-04-2013	CN 103037022 A	10-04-2013
			EP 2579543 A1	10-04-2013
			TW 201316739 A	16-04-2013
			US 2013091255 A1	11-04-2013
