



(22) Date de dépôt/Filing Date: 1991/11/28  
(41) Mise à la disp. pub./Open to Public Insp.: 1992/05/30  
(45) Date de délivrance/Issue Date: 2002/06/04  
(30) Priorités/Priorities: 1990/11/29 (325914/1990) JP;  
1991/07/05 (191063/1991) JP

(51) Cl.Int.<sup>5</sup>/Int.Cl.<sup>5</sup> C03C 17/23, C23C 28/00


(72) Inventeurs/Inventors:  
Miyazaki, Masami, JP;  
Ando, Eiichi, JP

(73) Propriétaire/Owner:  
ASAHI GLASS COMPANY LTD., JP

(74) Agent: SMART & BIGGAR

(54) Titre : UNE PELLICULE A BASSE EMISSIVITE

(54) Title: A LOW EMISSIVITY FILM

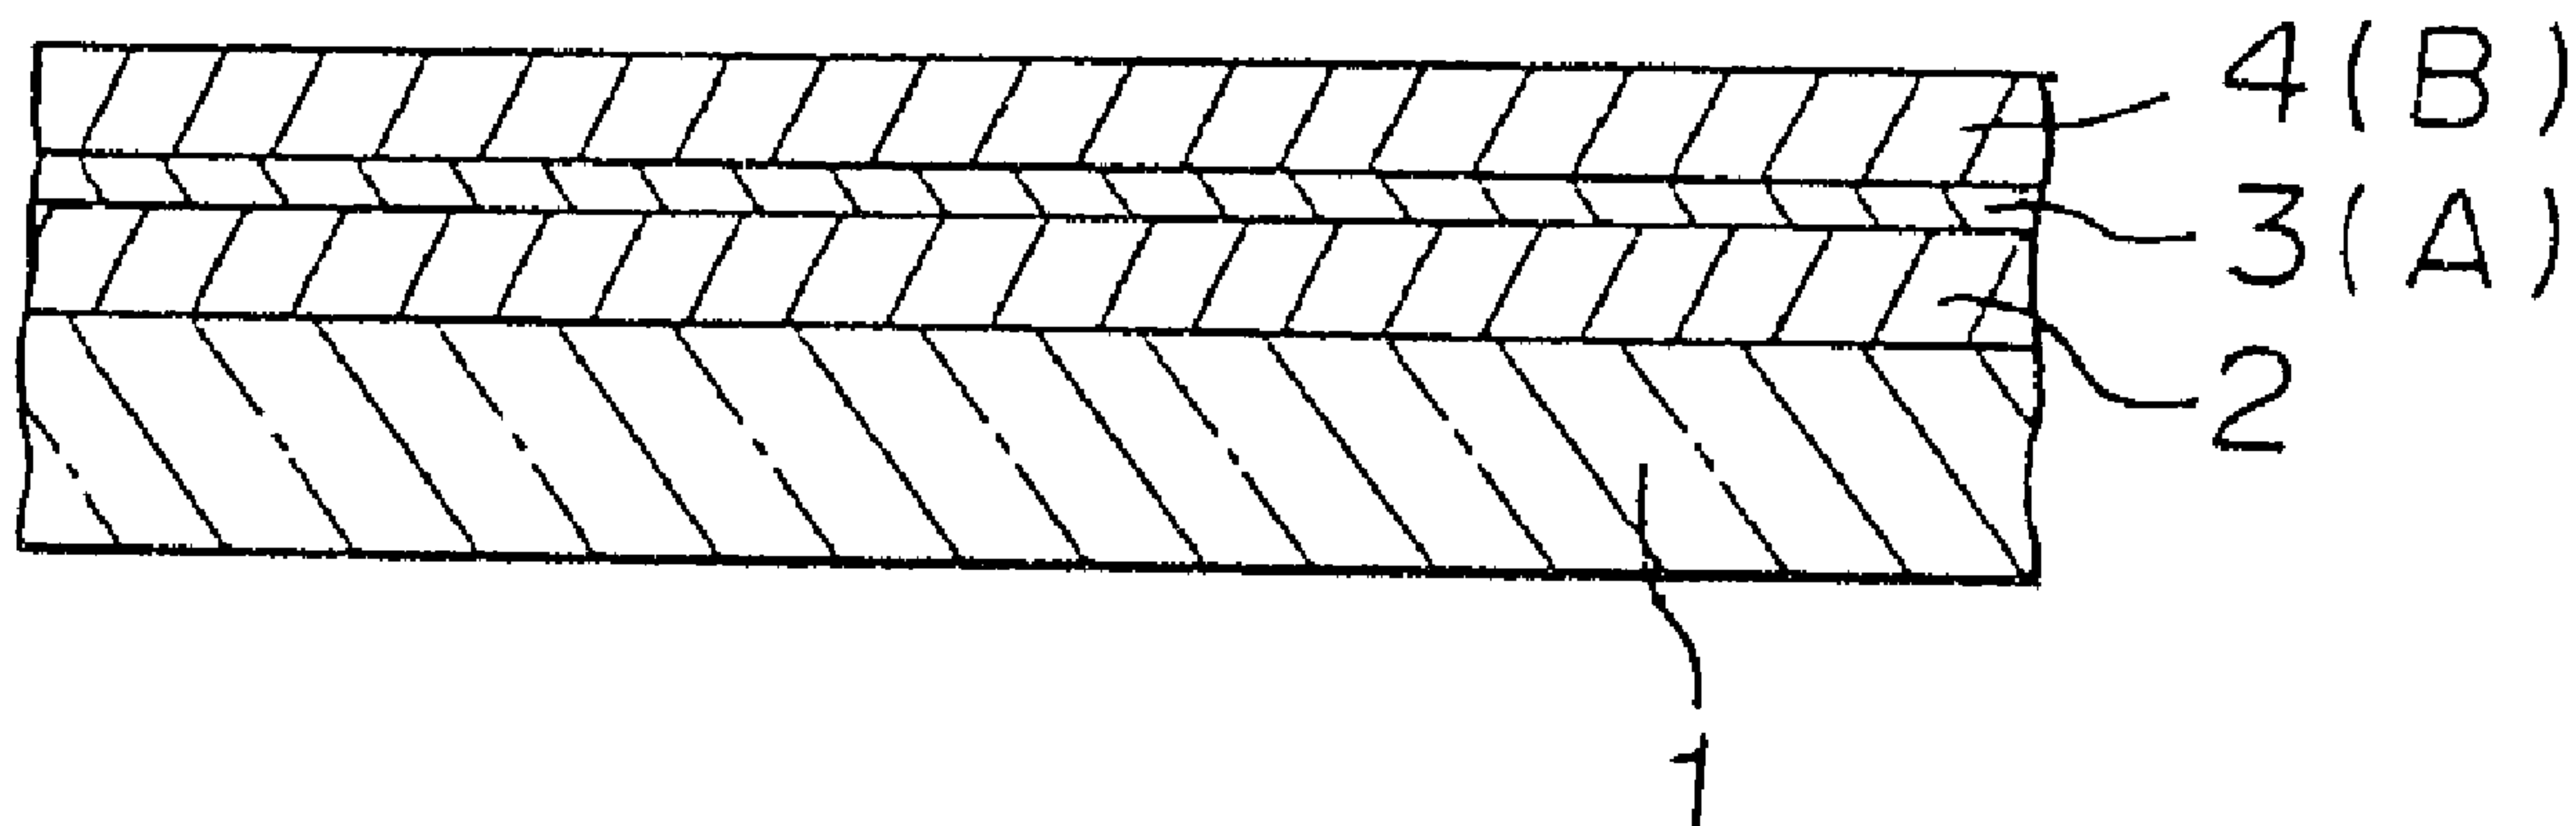

(57) Abrégé/Abstract:

A low emissivity film formed on a substrate, which comprises a coating of oxide films and films whose major component is Ag alternately formed on the substrate in a total of  $(2n+1)$  layers where  $n$  is an integer being equal to or more than 1, with the innermost layer being an oxide film, wherein an integral width  $\beta_i(^{\circ})$  of (111) diffraction line of a cubic Ag in an X-ray diffraction diagram of the low emissivity film exists in a first range of  $180\lambda / (d\pi\cos\theta) \leq \beta_i \leq 180\lambda / (d\pi\cos\theta) + 0.15$ , where  $d(\text{\AA})$  designates a thickness of a film whose major component is Ag,  $\lambda(\text{\AA})$ , a wave length of an X-ray for measurement and  $\theta$ , Bragg angle.



ABSTRACT

A low emissivity film formed on a substrate, which comprises a coating of oxide films and films whose major component is Ag alternately formed on the substrate in a total of  $(2n+1)$  layers where  $n$  is an integer being equal to or more than 1, with the innermost layer being an oxide film, wherein an integral width  $\beta_i(^{\circ})$  of (111) diffraction line of a cubic Ag in an X-ray diffraction diagram of the low emissivity film exists in a first range of  $180\lambda/(d\pi\cos\theta) \leq \beta_i \leq 180\lambda/(d\pi\cos\theta) + 0.15$ , where  $d(\text{\AA})$  designates a thickness of a film whose major component is Ag,  $\lambda(\text{\AA})$ , a wave length of an X-ray for measurement and  $\theta$ , Bragg angle.

- 1 -

A LOW EMISSIVITY FILM

The present invention relates to a low emissivity  
5 film which is excellent in durability, especially in  
moisture resistance.

A film composed of  $(2n+1)$  layers ( $n \geq 1$ ) such as a film  
composed of three layers in which an oxide film, an Ag  
film, and an oxide film are successively coated on a  
10 surface of a substrate, or a film composed of five layers  
in which an oxide film, an Ag film, an oxide film, an Ag  
film and an oxide film are successively coated on a  
surface of a substrate, is a heat mirror film of Low-E  
(Low-Emissivity) film. A glass in which such a low-E  
15 film is formed, is called a Low-E glass. This glass can  
prevent lowering of room temperature by reflecting the  
thermal infrared radiation emitted from within a heated  
room, which is mainly used in cold district in a form of  
double glazing for the purpose of decreasing heating  
20 load. Furthermore, since this glass has a heat

insulating effect of the solar radiation energy, it is adopted in a windshield of an automobile in a form of laminated glass. Since this glass is transparent and is electrically conductive, it has a utility as an

5 electromagnetic shielding glass. When this glass is equipped with an electric heating means such as a bus bar composed of an electrically conductive printing or the like, this glass can be used as an electrically heated window for defogging and deicing.

10 In the conventional Low-E glass, white dot or white turbidity is caused, by moisture in the air or by moisture contained in an intermediate plastic film in case of the laminated glass. Therefore, caution is required in the long term storage or in handling of a  
15 single plate having the Low-E film, before it is transformed into the double glazing or the laminated glass.

A detailed investigation on the deteriorated portion of the conventional Low-E glass (film composition:  
20 ZnO/Ag/ZnO/glass) reveals that damage of the film such as wrinkle, or crack, or exfoliation takes place on the outermost layer of the oxide film. Furthermore, it is found that considerable grain growth of Ag takes place. From these facts, the mechanism of the generation of the  
25 white turbidity is found to be as follows. The outermost layer of the oxide film can not resist with internal stress of the film, is exfoliated from an interface with

an Ag film, and is destroyed. Next the grain size of Ag increases. Light is scattered by the destroyed surface and the large Ag grain, which causes the white turbidity in appearance.

5       Therefore, the inventors found that decreasing the internal stress of the oxide film, as a measure for improving the moisture resistance, is extremely effective. (described in Japanese Patent Application No. 191063/1991) By this measure, the durability of the film  
10 is considerably improved. However, it is necessary to further enhance it.

It is an object of the present invention to provide a Low-E glass excellent in the durability thereof, especially in the moisture resistance thereof, by solving  
15 the above shortcomings of the conventional technology.

According to an aspect of the present invention, there is provided a low emissivity film formed on a substrate which comprises: a coating of oxide films and films whose major component is Ag alternately formed on  
20 the substrate in a total of  $(2n+1)$  layers where  $n$  is an integer being equal to or more than 1, with the innermost layer being an oxide film, wherein an integral width  $\beta_i(^{\circ})$  of (111) diffraction line of a cubic Ag in an X-ray diffraction diagram of the low emissivity film exists in  
25 a first range of  $180\lambda/(d\pi\cos\theta) \leq \beta_i \leq 180\lambda/(d\pi\cos\theta) + 0.15$ , where  $d(\text{\AA})$  designates a thickness of a film whose major component is Ag,  $\lambda(\text{\AA})$ , a wave length of an X-ray for

measurement and  $\theta$ , Bragg angle.

A more preferable range of the integral width  $\beta_i(^{\circ})$  of (111) diffraction line of a cubic Ag is  $180/(d\pi\cos\theta) \leq \beta_i \leq 180\lambda/(d\pi\cos\theta) + 0.10$ .

5        The most preferable range of the integral width  $\beta_i(^{\circ})$  is  $180/(d\pi\cos\theta) \leq \beta_i \leq 180\lambda/(d\pi\cos\theta) + 0.05$ .

In the accompanying drawings:

Figures 1A, 1B and 1C are cross sectional diagrams showing examples of Low-E glasses on which Low-E films  
10 are formed;

Figure 2 is a graph showing a relationship between the film thickness of an Ag film and the integral width of (111) diffraction line of cubic Ag;

Figure 3 is an X-ray diffraction diagram showing  
15 change of profile of (111) diffraction line of Ag before and after the moisture resistance test of sample 2; and

Figure 4 is an X-ray diffraction diagram showing change of profile of (111) diffraction line of Ag before and after the moisture resistance test of sample 5.

20        This invention improves the moisture resistance of the Low-E film by improving imperfection of Ag crystal, and by stabilizing Ag. The moisture resistance can further be improved by combining the oxide film 4 having low internal stress, with the Ag layer.

25        Explanation will be given in details in the following on the relationship between the stability of Ag and the deterioration of the Low-E film.

A moisture resistance test was performed on a conventional Low-E film (ZnO/Ag/ZnO/glass). In this moisture resistance test, the sample is left in an atmosphere of 50°C in temperature and 95% in relative humidity for 6 days. White dots and white turbidity are found in the Low-E film after the moisture resistance test. Investigation is performed on the Low-E film before and after the moisture resistance test by X-ray diffraction method. Table 1 shows respectively the diffraction angle  $2\theta$  (center of gravity position of X-ray diffraction peak), the interplanar spacing  $d_{111}$ , and the integral width  $\beta_i$ , concerning (111) diffraction line of cubic Ag.

Table 1

|               | Before<br>moisture test | After<br>moisture test |
|---------------|-------------------------|------------------------|
| $2\theta$ (°) | 38.09                   | 38.09                  |
| $d_{111}$ (Å) | 2.361                   | 2.361                  |
| $\beta_i$ (°) | 0.977                   | 0.675                  |

According to Table 1, concerning (111) diffraction line of Ag, after the moisture resistance test, the integral width  $\beta_i$  is decreased to a large extent, and the diffraction peak becomes considerably sharp. This shows that the crystallite size of Ag is considerably increased. (That is, the crystallite size becomes larger than the film thickness.) The increase of the grain size and the agglomeration of Ag is recognized by the

observation of the sample by a SEM (scanning electron microscope) of the Low-E film after the moisture resistance test. In this specification, crystallite designates a crystal particle recognized by an X-ray, and  
5 grain designates a particle aggregated with the crystallite recognized by an SEM. From this observation, it is found that the Ag film is changeable and unstable.

The Low-E film is liable to be deteriorated due to the instability of such Ag. This is due to the following  
10 two reasons.

First of all, exfoliation of the oxide film is liable to take place at the interface between Ag and the oxide, and the outermost layer of the oxide film is liable to be destroyed. The portion wherein the oxide film is  
15 exfoliated and destroyed appears to be the white turbidity. (This phenomena is naturally significant when the internal stress of the oxide film is large. The fact that the deterioration can be prevented by lowering the internal stress of the oxide film, was mentioned in  
20 details in Japanese Patent Application No. 191063/1991).

Secondly, in addition to the destruction of the oxide film, the grain growth of Ag and the agglomeration thereof take place, by which the degree of white turbidity becomes more and more conspicuous. This is  
25 also due to the instability of Ag.

When Ag is stabilized, exfoliation of the oxide film is hard to take place at the interface between Ag and the

oxide. Therefore, the destruction of the outermost layer of the oxide film is hard to take place. Even when the outermost layer of the oxide film is exfoliated, the degree of the white turbidity is not so conspicuous since  
5 the grain of Ag does not considerably grow and agglomerate. As a result the deterioration of the Low-E film is prevented.

From above reasonings, it is found that the stabilization of Ag is indispensable for improving the  
10 durability of the Low-E film.

A search is performed by observing the X-ray diffraction line, on the imperfection of Ag crystal, and the relationship between the stability of Ag and the observation result is mentioned as follows.

15 Scherrer introduced the following experiment formula concerning a general crystal, assuming that there is no imperfection in crystal and the spacing of the profile depends only on the crystallite size, and presuming that the crystallite size is uniform.

20 
$$D_{hkl} = K \cdot 180\lambda / (\pi\beta_i \cos\theta)$$

where  $D_{hkl}$  (Å) is a crystallite size perpendicular to  $hkl$ ,  $K$ , a constant,  $\lambda$  (Å), an X-ray wave length for measurement,  $\beta_i$  (°), an integral width, and  $\theta$ , a Bragg angle of a diffraction angle ( $2\theta$  is peak position). When  
25  $\beta_i$  signifies the integral width,  $K$  is about 1.

Generally speaking, an Ag film coated by a sputtering method is liable to be oriented in (111) plane parallel

to the substrate. Accordingly, normally, only (111) diffraction line of Ag is observed.

When Ag is a perfect crystal in the direction perpendicular to the substrate, the crystallite size in the direction perpendicular to the substrate is the same as the film thickness. In case of the above (111) plane oriented in parallel to the substrate, the crystallite size  $D_{111}$  is equal to the film thickness. Therefore, the film thickness and the integral width are defined by the following equation.

$$d = D_{111} = 180\lambda/(\pi\beta_i\cos\theta)$$

Therefore,

$$\beta_i = 180\lambda/(d\pi\cos\theta) \quad (1)$$

Figure 2 shows the relationship between the film thickness of Ag and the integral width of (111) diffraction line of Ag. The bold line shows the relationship as shown in equation (1). Each dot signifies a measured value in the conventional ZnO/Ag/ZnO/glass.

When Ag is of a perfect crystal in the direction perpendicular to the substrate, the integral width of (111) diffraction line of Ag should approximately agree with the bold line in Figure 2. However, Figure 2 shows that the measured value of the integral width of the conventional Low-E film are larger than that of the bold line.

The main reason that integral width is enlarged, is

that the Ag crystal is not a perfect crystal, and contains imperfection such as ununiform distortion or defect.

Due to the imperfection of the crystal, Ag becomes  
5 unstable then oxide film is liable to be exfoliated and the grain growth of Ag is liable to take place. As the result, the moisture resistance of the Low-E film is deteriorated, and white turbidity or white dot is generated.

10 In this invention, it is found that alleviation of the imperfection of the Ag crystal is effective for preventing the white turbidity or the white dot due to moisture.

Table 2 shows the relationship among the integral  
15 width  $\beta_i$  of (111) diffraction line of cubic Ag of the Low-E film before the moisture resistance test, the ratio of change of integral width of the Low-E film after the moisture resistance test in comparison to the integral width before the moisture resistance test, and the  
20 moisture resistance. Every uppermost layer of the ZnO film and every Ag film are produced under the same condition. The film thickness of the Ag film is 100 Å. The internal stress of the uppermost layer of ZnO film is  $1.2 \times 10^{10}$  dyn/cm<sup>2</sup>. In samples 4 and 5, heat  
25 treatment of 200 to 300°C is performed after the film deposition. When the samples are investigated by X-ray diffraction method, almost no change is found on the peak

position of (002) diffraction line of hexagonal ZnO before and after the heat treatment. From this fact, it seems that there is almost no change in the internal stress of ZnO film.

5        The moisture resistance of sample is evaluated by performing the test in which the sample is left in an atmosphere of 50°C in temperature and 95% in relative humidity for 6 days. As the evaluation standard, ○ is for a sample having no white turbidity at adjacent to  
10   the edge of the film, and white dot with a diameter less than 1 mm or no white dot, △ for a sample having no white turbidity at adjacent to the edge of the film, and white dot with a diameter of 1 to 2 mm, and X for a  
15   sample having white turbidity at adjacent to the edge of the film, or white dot with a diameter of more than 2 mm.

From Table 2, it is found that the moisture resistance depends on the integral width  $\beta_i$  of (111) diffraction line of cubic Ag of the Low-E film before the moisture resistance test.

Table 2

|   | Layer system of<br>Low-E film<br>(numerals: film<br>thickness (Å)) | Integral<br>width (°) of<br>Ag(111)<br>diffraction<br>line | Ratio of<br>change of<br>integral<br>width of<br>Ag(111)<br>diffraction<br>line (%) | Moisture<br>resistance |
|---|--------------------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------|
| 1 | ZnO/Ag/G<br>450 100                                                | 1.75                                                       | 63.5                                                                                | ×                      |
| 2 | ZnO/Ag/Ti/Zno/G<br>450 100 40 450                                  | 1.25                                                       | 48.2                                                                                | ×                      |
| 3 | ZnO/Ag/ZnO/G<br>450 100 450                                        | 1.12                                                       | 14.4                                                                                | △                      |
| 4 | ZnO/Ag/Ti/ZnO/G<br>450 100 40 450                                  | 1.03                                                       | 7.1                                                                                 | ○                      |
| 5 | ZnO/Ag/ZnO/G<br>450 100 450                                        | 0.95                                                       | 0.3                                                                                 | ○                      |

When the integral width is small and approximately equal to 0.93 which is a value calculated from equation (1) when the film thickness of Ag is 100 Å, that is, when the crystallite size in the direction perpendicular to the substrate is approximately equal to the film thickness (that is, imperfection of crystal is not considerable), the change of (111) diffraction line of Ag after the moisture resistance test in comparison to that of before the test is small and Ag is stable.

Figures 3 and 4 show the change of the profile of (111) diffraction line of Ag before and after the moisture resistance test in X-ray diffraction diagrams of samples 2 and 5, respectively.

Furthermore, in Figures 3 and 4, the profiles after moisture resistance test are shifted with respect to the profiles before moisture resistance test, in order to clearly show the change of profiles before and after moisture resistance test. Moreover, Figures 3 and 4 show only the relative change of the profile, and do not necessarily show the absolute values of the intensity.

In the conventional Low-E film which is deteriorated and which has white turbidity caused by the moisture resistance test, and in the Low-E film of the present invention in which the imperfection of Ag crystal is alleviated, both integral widths of (111) diffraction line of Ag are small, compared with the conventional Low-E film before the deterioration. However, as shown in

Figures 3 and 4, there is a clear difference in the profiles of X-ray diffraction. In a sample which is deteriorated and which has the white turbidity by the moisture resistance test, the peak top thereof is sharp as shown in Figure 3. In case of the sample of the present invention in which the integral width is narrowed by removing the imperfection of Ag crystal, the shape of the peak does not change and is smooth as shown in Figure 4.

Furthermore, as mentioned above, when the conventional Low-E film is deteriorated, the grain growth of Ag or the agglomeration of Ag crystal is observed by a SEM (scanning electron microscope), which is clearly differentiated from the Low-E film of the present invention.

Normally, since the crystallite size in the direction perpendicular to the substrate varies with the film thickness of Ag, naturally, so does the integral width. Accordingly, the optimum value of the integral width of Ag crystal changes with the film thickness of Ag. Table 3 shows the relationship between the integral width of (111) diffraction line of cubic Ag and the moisture resistance when the film thickness of Ag in the Low-E film (ZnO/Ag/ZnO/glass), is changed. The evaluation standard of the moisture resistance is the same as in the above Table 1.

Table 3

| Film thickness<br>of Ag (Å) | Integral width<br>(°)          | Moisture<br>resistance |
|-----------------------------|--------------------------------|------------------------|
| 90                          | 1.34<br>1.20<br>1.05<br>(1.03) | ×<br>△<br>○            |
| 100                         | 1.25<br>1.12<br>0.95<br>(0.93) | ×<br>△<br>○            |
| 110                         | 1.07<br>1.01<br>0.84<br>(0.84) | ×<br>△<br>○            |

The values in the parentheses in Table 3 are the values wherein the peak position  $2\theta = 38.11$  of (111) diffraction line of Ag powder in case of X-ray diffraction by  $\text{CuK}\alpha$  radiation ( $\lambda = 1.54 \text{ \AA}$ ), is put into  
5 the equation (1).

Figures 1A, 1B and 1C are cross sectional diagrams showing representative embodiments of the Low-E film according to the present invention. Figure 1A is a cross sectional diagram of the Low-E film composed of three  
10 layers, Figure 1B, a cross sectional diagram of the Low-E film composed of  $(2n+1)$  layers, and Figure 1C, a cross sectional diagram of the Low-E film wherein the interstitial layer 5 is interposed between the film 3 whose major component is Ag, and the oxide film 2. A  
15 reference numeral 1 designates a substrate, 2, an oxide film, 3, a film whose major component is Ag (hereinafter, Ag film 3), 4, the oxide film (B) formed on the outer side of the Ag film 3 (A) being most apart from the substrate, and 5, an interstitial layer for alleviating  
20 the imperfection of the Ag crystal.

As for the material of the Ag film 3 whose major component is Ag, an Ag film, or a film whose major component is Ag containing at least one selected from the group consisted of Au, Cu, and Pd, can be utilized.

25 The film thickness of the Ag film 3 is desirable to be 80 to 160  $\text{\AA}$ , preferably 90 to 120  $\text{\AA}$ , considering a balance between the high heat reflective function and the

visible light transmittance of Low-E film.

In the Low-E film according to the present invention, the integral width  $\beta_i(^{\circ})$  of (111) diffraction line of cubic Ag in the X-ray diffraction diagram of the Low-E  
 5 film, is desirable to be in the range of  
 $180\lambda/(d\pi\cos\theta)\leq\beta_i\leq 180\lambda/(d\pi\cos\theta)+0.15$ , more preferably,  
 $180\lambda/(d\pi\cos\theta)\leq\beta_i\leq 180\lambda/(d\pi\cos\theta)+0.10$  and the most  
 preferably,  $180\lambda/(d\pi\cos\theta)\leq\beta_i\leq 180\lambda/(d\pi\cos\theta)+0.05$ , where  
 10  $d(\text{\AA})$  designates the thickness of the Ag layer 3 whose  
 major component is Ag,  $\lambda$  ( $\text{\AA}$ ), the wave length of the X-ray for measurement, and  $\theta$ , Bragg angle ( $2\theta$  is peak position).

Furthermore, the X-ray diffraction analysis in this specification is performed by using an X-ray diffraction  
 15 apparatus, RU200-RINT (with a diffracted beam curved crystal monochromator, Rigaku CN2726A1) of RIGAKU Company. The measurement is performed by utilizing  $\text{CuK}\alpha$  radiation, in step scanning by every  $0.002^{\circ}$ . In calculating the value of the integral width  $\beta_i$ ,  
 20 correction for removing the influence of the instrumental broadening of the profile, is performed.

In the Low-E film according to this invention, when there are a plurality of layers of the film 3 whose major component is Ag, the mean thickness value of the  
 25 respective Ag films 3 is considered to be regarded as the thickness  $d$  in the equation  
 $(180\lambda/(d\pi\cos\theta)\leq\beta_i\leq 180\lambda/(d\pi\cos\theta)+0.15$ .

This invention concerns with the crystallized Ag film, and promotes the corrosion resistance of the Ag film by diminishing the incompleteness of the crystal. Accordingly, the effect of the present invention shows especially in the crystalline Ag film. In the X-ray diffraction of the crystalline Ag film, the peak of (111) diffraction line shows significantly. The intensity I of the peak top is frequently a large value, in comparison with the intensity of background, as shown in,

10 
$$I - I_B \geq 0.5nI_B \quad (2)$$

(where n designates number of layers of the film 3 whose major component is Ag).

However, when the Low-E film comprises two or more films 3 whose major component is Ag, equation (2) is applied to the case wherein the film thicknesses of the respective layers are almost equal. When the thicknesses of the respective layers are significantly different, equation (2) is not applicable. An Ag film showing small peak intensity I, wherein  $I - I_B \leq 0.5nI_B$ , is considered to be in a state of partial crystallization, or a state of amorphous. The X-ray diffraction data of Ag in this specification (including Examples, Comparative Examples, and data in Tables 1 to 3), show values of profiles wherein significant peaks which satisfy equation (2) are recognized.

As for the methods of forming the Ag film 3 wherein the imperfection of the crystal is alleviated, the heat

treatment of at least about 200°C during or after the film deposition, or forming the interstitial layer 5 which alleviates the imperfection of the Ag crystal on one side or both sides of the interface between the Ag film 3 and the oxide film, are proposed. Furthermore, the method depends on the film deposition condition of the Ag film 3, or the kind and the film forming condition of the interstitial layer 5. The respective concrete condition may be chosen according to each film deposition device and is not particularly restricted.

As an interstitial layer 5 which alleviates the imperfection of Ag crystal, a film which is easy to crystallize and in which the inter-atomic distance in the crystal plane parallel to the substrate is approximately equal to that of Ag lattice, is desirable. The film in the hexagonal system in which the C axis is easy to be orientated perpendicular to the substrate, or the film in the cubic system (face centered cubic lattice, diamond-type, NaCl-type) which is easy to be oriented in (111) plane parallel to the substrate, has tendency to promote the crystallization of Ag. As the examples, Ti, Zr, and ZnO liable to be oriented in (001) plane parallel to the substrate, TiN, ZrN, Pt, Au, Al, and Pd liable to be oriented in (111) plane parallel to the substrate, are pointed out. Even in using the same film material, the degree of the crystalline perfection and the orientation differ depending on the deposition condition thereof, or

the degree of the crystalline perfection of the under  
lying layer (oxide film 2), and the stability of Ag  
varies with these factors. Furthermore, when the oxide  
film 2 or the oxide film 4 is composed of a single layer  
5 of ZnO, or when these layers are composed of multi-layers  
and have a ZnO film at the interface with the Ag film 3,  
the interstitial layer 5 can be dispensed with, since,  
these ZnO films show the effect similar to the  
interstitial layer 5.

10       The film thickness of the interstitial layer 5 is not  
particularly restricted. When it is too thin, the effect  
of decreasing the crystalline imperfection of Ag is  
reduced. When it is too thick, it influences on the  
total color hue of the Low-E film, and reduces the  
15 visible light transmittance. Considering these factors,  
the thickness of the interstitial layer 5 is desirable to  
be 10 to 40 Å.

      The interstitial layer 5 functions to alleviate the  
incompleteness of the crystallized Ag film, and is  
20 different from the conventionally known nucleating layer,  
which is utilized in order to provide coalescence at the  
beginning of the formation of a film to be deposited on  
the nucleating layer and thereby ensure a smooth and thin  
continuous layer.

25       The material of the film 2 is not particularly  
restricted. It is possible to utilize a film composed of  
a single layer made of ZnO, SnO<sub>2</sub>, TiO<sub>2</sub> etc., or composite

of these materials, or these materials added with other elements, a multi-layer film comprising at least two of the above films. However, considering the productivity thereof, it is desirable to utilize a ZnO film, a SnO<sub>2</sub> film, a ZnO film added with at least one selected from the group consisted of Al, Si, B, Ti, Sn, Mg and Cr, by 10 atomic % or less in total quantity including Zn, or a multi-layer film in which ZnO and SnO<sub>2</sub> are alternatively laminated.

10       The oxide film 2 influences Ag crystal, directly, or indirectly through the interstitial layer 5. Therefore, as the oxide film 2, a crystalline film is desirable in order to promote the crystallization of the Ag film 3.

As the oxide film 4, a film similar to the above  
15       oxide film 2 can be utilized. Furthermore, when a laminated glass is produced by laminating another substrate on the Low-E glass interposing an intermediate plastic film, (for example, polyvinyl butyral), the oxide film 4 may be composed of a multi-layer film, and may be  
20       comprising an oxide film (for instance, chromium oxide) of the film thickness of 100 Å or less, is formed, as a layer contacting the intermediate plastic film for the purpose of controlling the adhesive strength between the Low-E film and the intermediate plastic film, or for the  
25       purpose of increasing the durability of the laminated glass. In this case, the oxide film 4 may be composed of two layers or more including these films.

When the internal stress of the oxide film 4 is large, the film is liable to be exfoliated and destroyed, which causes the deterioration of the Ag film 3 (especially Ag film (A)). Accordingly, it is desirable  
5 that the internal stress of the total of the oxide film 4 is  $1.1 \times 10^{10}$  dyn/cm<sup>2</sup> or below. When the oxide film 4 has a film whose major component is ZnO, and when the internal stress is small, the value of the diffraction line  $2\theta$  (center of gravity position) of (002) diffraction  
10 line of hexagonal ZnO by X-ray diffraction method utilizing CuK $\alpha$  radiation, of the Low-E film is not smaller than 33.88° and not larger than 35.00°.

Especially, in case of the Low-E film comprising five layers of an oxide film 2, a metallic film, an oxide film  
15 2, a metallic film, and an oxide film 4, or of more than five layers, the internal stress of the oxide film 2 other than the oxide film 4, is also desirable to be  $1.1 \times 10^{10}$  dyn/cm<sup>2</sup> or less, for improving the moisture resistance thereof.

20 The film thicknesses of the oxide film 2 and the oxide film 4 are desirable to be in the range of 200 to 700 Å, considering the total color hue and the visible light transmittance of the Low-E film. In case the oxide film 2 and the oxide film 4 are composed of a multi-layer  
25 film, a total film thickness of the oxide film is desirable to be in the range of 200 to 700 Å, and the film thicknesses of the respective layers are not

restricted.

As the substrate 1 of the present invention, a glass substrate, a film or a substrate made of plastics or the like may be utilized.

5 EXAMPLE 1

A ZnO film, an Ag film, and a ZnO film are successively deposited on a glass substrate, with the film thicknesses of 450 Å, 100 Å, and 450 Å, respectively, by the RF sputtering method. In this  
10 Example, during deposition of a ZnO film as the first layer the temperature of the substrate is set at 200°C.

A ZnO target and an Ag target are used and the sputtering is performed in an atmosphere of argon gas. The film deposition of the first layer of ZnO is  
15 performed under the sputtering pressure of  $5.0 \times 10^{-2}$  Torr, with the RF power density of  $1.8 \text{ W/cm}^2$ , at the substrate temperature of 200°C. The film deposition of Ag is performed under the sputtering pressure of  $3.0 \times 10^{-3}$  Torr, with the RF power density of  $1.1 \text{ W/cm}^2$ , at  
20 the substrate temperature of room temperature. The film formation of the third layer of ZnO is performed under the sputtering pressure of  $1.0 \times 10^{-2}$  Torr, with the RF power density of  $1.8 \text{ W/cm}^2$ , and at the substrate temperature of room temperature.

25 The obtained Low-E film is examined by X-ray diffraction method utilizing RU200-RINT of RIGAKU Company (the same for the following Examples and Comparative

- 23 -

Examples). The integral width of  $\beta_i$  of the (111) diffraction line of Ag is  $0.98^\circ$ .

The moisture resistance test (hereinafter the same test is performed in the following Examples, and Comparative Examples) is performed on the Low-E film, by leaving the sample in an atmosphere of  $50^\circ\text{C}$  in temperature and 95% in relative humidity. The appearance of the sample after 6 days of the moisture resistance test, is fair wherein no conspicuous white dot nor white turbidity is observed, although very small negligible dots are found partially.

#### EXAMPLE 2

A ZnO film, an Ag film, and a ZnO film are successively deposited on a glass substrate having respectively the film thicknesses of  $450 \text{ \AA}$ ,  $100 \text{ \AA}$ , and  $450 \text{ \AA}$ , by the RF sputtering method similar to the above Example 1. In this Example, the sample is heat-treated at  $240^\circ\text{C}$  in vacuum after the film formation.

A ZnO target and an Ag target are used, and the sputtering is performed in an atmosphere of argon gas. The substrate temperature is set at room temperature during the deposition. The film deposition of the first layer and the third layer of ZnO is performed under the sputtering pressure of  $1.0 \times 10^{-2}$  Torr, with the RF power density of  $1.8 \text{ W/cm}^2$ . The film deposition of the Ag layer is performed under the sputtering pressure of  $3.0 \times 10^{-2}$  Torr, with the RF power density of  $1.1 \text{ W/cm}^2$ . The

Low-E film after the film deposition is heat-treated at 240°C in vacuum for 1 hour. The Low-E film after the heat treatment is examined by X-ray diffraction method. The integral width  $\beta_i$  of (111) diffraction line of Ag is  
5 0.95°.

The appearance of this Low-E film after 6 days of the moisture resistance test is excellent without any white dot or white turbidity observed.

Furthermore, a laminated glass is made by laminating  
10 another glass plate on top of the Low-E glass plate interposing a polyvinyl butyral intermediate film, with the Low-E film before the moisture resistance test being disposed inbetween, and the similar moisture resistance test is performed for this laminated glass. No white  
15 turbidity nor white dot is observed in the laminated glass after 14 days of the moisture resistance test.

### EXAMPLE 3

A ZnO film, a Ti film, an Ag film, and a ZnO film, are successively deposited on the glass substrate having  
20 respectively the film thicknesses of 450 Å, 40 Å, 100 Å, and 450 Å, by the RF sputtering method similar to the above Example 1. In this Example, the Ti film is formed as the interstitial layer 5, and the sample is heat-treated in vacuum after the film deposition of the Low-E  
25 film.

A ZnO target, a Ti target, an Ag target are used, and the sputtering is performed in an atmosphere of argon

gas. The substrate temperature is at room temperature. The film deposition of the first layer and the fourth layer of ZnO is performed under the sputtering pressure of  $1.0 \times 10^{-2}$  Torr, with the RF power density of 1.8 W/cm<sup>2</sup>. The film formation of the Ag layer is performed under the sputtering pressure of  $3.0 \times 10^{-3}$  Torr, with the RF power density of 1.1 W/cm<sup>2</sup>. The film deposition of the Ti layer is performed under the sputtering pressure of  $3.0 \times 10^{-3}$  Torr, with the RF power density of 1.8 W/cm<sup>2</sup>. The Low-E film after deposition is heat-treated at 200°C in vacuum for 1 hour.

The Low-E film after the heat treatment is examined by X-ray diffraction method. The integral width  $\beta_i$  of (111) diffraction line of Ag is 1.03°.

The moisture resistance of the Low-E film is fair as in the above Examples.

#### EXAMPLE 4

An Al-doped ZnO film, an Ag film, and an Al-doped ZnO film are successively deposited on a glass substrate having respectively the thicknesses of 450 Å, 100 Å, and 450 Å, by the RF sputtering method similar to the above Example 1. In this Example, the Al-doped ZnO films are formed, as the oxide film 2 and the oxide film 4, and the Low-E film after the film formation is heat-treated in vacuum.

A ZnO target containing Al by 3.2 atomic % of the total quantity including Zn and an Ag target are used,

and the sputtering is performed in an atmosphere of argon gas. The substrate temperature is at room temperature. The film deposition of the Al-doped ZnO films of the first and the third layers, is performed under the RF pressure of  $1.0 \times 10^{-2}$  Torr, with the RF power density of 1.8 W/cm<sup>2</sup>. The film deposition of the Ag layer is performed under the sputtering pressure of  $3.0 \times 10^{-3}$  Torr, with the RF power density of 1.1 W/cm<sup>2</sup>. The Low-E film after deposition is heat treated at 240°C in vacuum for 1 hour.

The Low-E film after the heat treatment is examined by X-ray diffraction method. The integral width  $\beta_i$  of (111) diffraction line of Ag is 0.96°.

The appearance of the Low-E film after 6 days of the moisture resistance test, is excellent without any white dot or turbidity observed by human eyes.

#### COMPARATIVE EXAMPLE 1

A ZnO film, an Ag film, and a ZnO film are successively deposited having respectively the thicknesses of 450 Å, 100 Å, and 450 Å, by the RF sputtering method similar to the above Example 2.

A ZnO target and an Ag target are used, and the sputtering is performed in an atmosphere of argon gas. The sputtering pressure, the substrate temperature, and the RF power density in the film deposition of ZnO and Ag are similar to those in the above Example 2. In this Comparative Example, no heat treatment in vacuum after

the film deposition as in sample 2 is not performed.

The obtained Low-E film is examined by X-ray diffraction method. The integral width  $\beta_i$  of (111) diffraction line of Ag is  $1.12^\circ$ .

5        On the Low-E film after 6 days of the moisture resistance test, conspicuous white dots with diameter of 1 mm or more are observed.

10       The Low-E film before the test is incorporated in a laminated glass as described in Example 2, and then the moisture resistance test is performed. On the laminated glass after 14 days of the moisture resistance test, the white turbidity having the width of 6 mm is observed from the periphery of the sample.

#### COMPARATIVE EXAMPLE 2

15       A ZnO film, a Ti film, an Ag film and a ZnO film, are successively deposited on a glass substrate having respectively the film thicknesses of 450 Å, 40 Å, 100 Å, and 450 Å, by the RF sputtering method similar to the above Example 3.

20       A ZnO target, a Ti target, an Ag target are used, and the sputtering is performed in an atmosphere of argon gas. The sputtering pressure, the substrate temperature, and the RF power density in the film deposition of the ZnO film, the Ti film and the Ag film are the same with  
25       those in the above Example 3. In this Comparative Example, the heat treatment in vacuum after the deposition as in Example 3 is not performed.

The obtained Low-E film is examined by X-ray diffraction method. The integral width  $\beta_i$  of (111) diffraction line of Ag is  $1.25^\circ$ .

As for the appearance of this Low-E film after 6 days  
5 of the moisture resistance test, the white turbidity and the conspicuous white dots with particle size of 1 mm or more are observed.

In the Low-E film of this invention, the moisture resistance is considerably improved. Therefore, the  
10 handling of the Low-E film on a single plate before it is incorporated in a double glazing, or a laminated glass can be facilitated. Furthermore, the possibility of a long term storage in a room as a single plate is realized. This leads to the promotion of the reliability  
15 of the Low-E glass for an automobile or for architectural use. Furthermore, since the Low-E film is not deteriorated by moisture contained in an intermediate plastic film when it is used in a laminated glass, it promotes durability of the laminated glass for an  
20 automobile or for architectural use.

Since the Low-E film of this invention comprises the film whose major component is Ag, it has electrical conductivity as well as the heat reflective function. Therefore, this Low-E film of the present invention, can  
25 be utilized in various fields of technology utilizing this electric conductivity. For instance, it can be utilized as an electrode (for example, electrode for

solar cell) in the field of electronics. Furthermore, in case of an electrically heating window, it can be used as a heating body. In case of a window or electronic components, it can be used as an electromagnetic  
5 shielding film. In some cases, the Low-E film of this invention can be formed on a substrate, interposing films with various functions therebetween. In such a case, the optical property thereof can be controlled by choosing the optical film thicknesses of the respective films of  
10 the Low-E film of the present invention, depending on the purpose.

71416-17

-30-

CLAIMS:

1. A low emissivity film formed on a substrate, which comprises:

a coating of 200-700 Å thick oxide films and at  
 5 least one 80-160 Å thick film whose major component is Ag alternately formed on the substrate in a total of (2n+1) layers where n is an integer of at least 1, with an inner most layer formed directly on the substrate being one of the oxide films,

10 wherein the film whose major component is Ag is an Ag film or a film whose major component is Ag containing at least one other element selected from the group consisting of Au, Cu and Pd; and

wherein an integral width  $\beta_i(^{\circ})$  of (111)  
 15 diffraction line of cubic Ag in an X-ray diffraction diagram of the low emissivity film exists within the range of:

$$180\lambda / (d\pi\cos\theta) \leq \beta_i \leq 180\lambda / (d\pi\cos\theta) + 0.15,$$

in which:

d(Å) designates the thickness of the film whose  
 20 major component is Ag,

$\lambda$ (Å) designates a wave length of the X-ray for measurement and

$\theta$  designates a Bragg angle.

2. The low emissivity film according to claim 1,  
 25 wherein the integral width  $\beta_i(^{\circ})$  exists within the range of  $180\lambda / (d\pi\cos\theta) \leq \beta_i \leq 180\lambda / (d\pi\cos\theta) + 0.10$ .

71416-17

-31-

3. The low emissivity film according to claim 1, wherein the integral width  $\beta_i(^{\circ})$  exists within the range of  $180\lambda/(d\pi\cos\theta) \leq \beta_i \leq 180\lambda/(d\pi\cos\theta) + 0.05$ .

4. The low emissivity film according to any one of  
5 claims 1 to 3, further comprising:

an interstitial layer or layers for alleviating crystalline imperfection of Ag, formed at an interface between the film whose major component is Ag and the oxide film.

10 5. The low emissivity film according to claim 4, wherein the interstitial layer or layers are made of Ti or Zr deposited by an RF sputtering method and have a thickness of 10-40 Å.

6. The low emissivity film according to any one of  
15 claims 1 to 5, wherein the oxide film formed on an outer side of the film whose major component is Ag being most apart from the substrate, has an internal stress which is equal to or less than  $1.1 \times 10^{10}$  dyne/cm<sup>2</sup>.

7. The low emissivity film according to any one of  
20 claims 1 to 5, wherein the oxide film formed on an outer side of the film whose major component is Ag being most apart from the substrate, is composed of a single layer or a multi-layer, comprising at least a layer whose major component is zinc oxide, a crystal structure of which is  
25 hexagonal, and a value of a diffraction angle  $2\theta$  (center of gravity position) of (002) diffraction line of the hexagonal zinc oxide in X-ray diffraction method using CuK $\alpha$  radiation is not smaller than 33.88° and not larger than 35.00°.

71416-17

-32-

8. The low emissivity film according to any one of claims 1 to 5, wherein the oxide film formed on an outer side of the film whose major component is Ag being most apart from the substrate, is composed of a multi-layer film comprising an outermost layer that is a controlling layer for controlling adhesive strength between the low emissivity film and an intermediate plastic film interposed for lamination with another substrate.

9. The low emissibility film according to any one of claims 1 to 8, wherein the film whose major component is Ag is subjected to a heat treatment at a temperature of at least about 200°C during or after deposition of the film, for alleviating crystalline imperfection of Ag.

10. The low emissibility film according to claim 9, wherein the heat treatment is conducted at 240°C in vacuum after formation of the film.

11. The low emissivity film according to any one of claims 1 to 10, n is 1 or 2.

12. The low emissivity film according to any one of claims 1 to 11, wherein the oxide film is a film formed by an RF sputtering method and is made of ZnO, SnO<sub>2</sub> or ZnO to which at least one element selected from the group consisting of Al, Si, B, Ti, Sn, Mg and Cr in an amount of 10 atomic % or less based on total quantity including Zn is added.

71416-17

-33-

13. The low emissivity film according to any one of claims 1 to 12, wherein the film whose major component is Ag is a 90-120 Å thick Ag film formed by an RF sputtering method, and is formed of Ag crystallites having a  
5 crystallite size perpendicular to the substrate approximately equal to the thickness of the Ag film.

14. The low emissibility film according to any one of claims 1 to 13, wherein the substrate is made of glass.

SMART & BIGGAR  
OTTAWA, CANADA

PATENT AGENTS

FIGURE 1 A

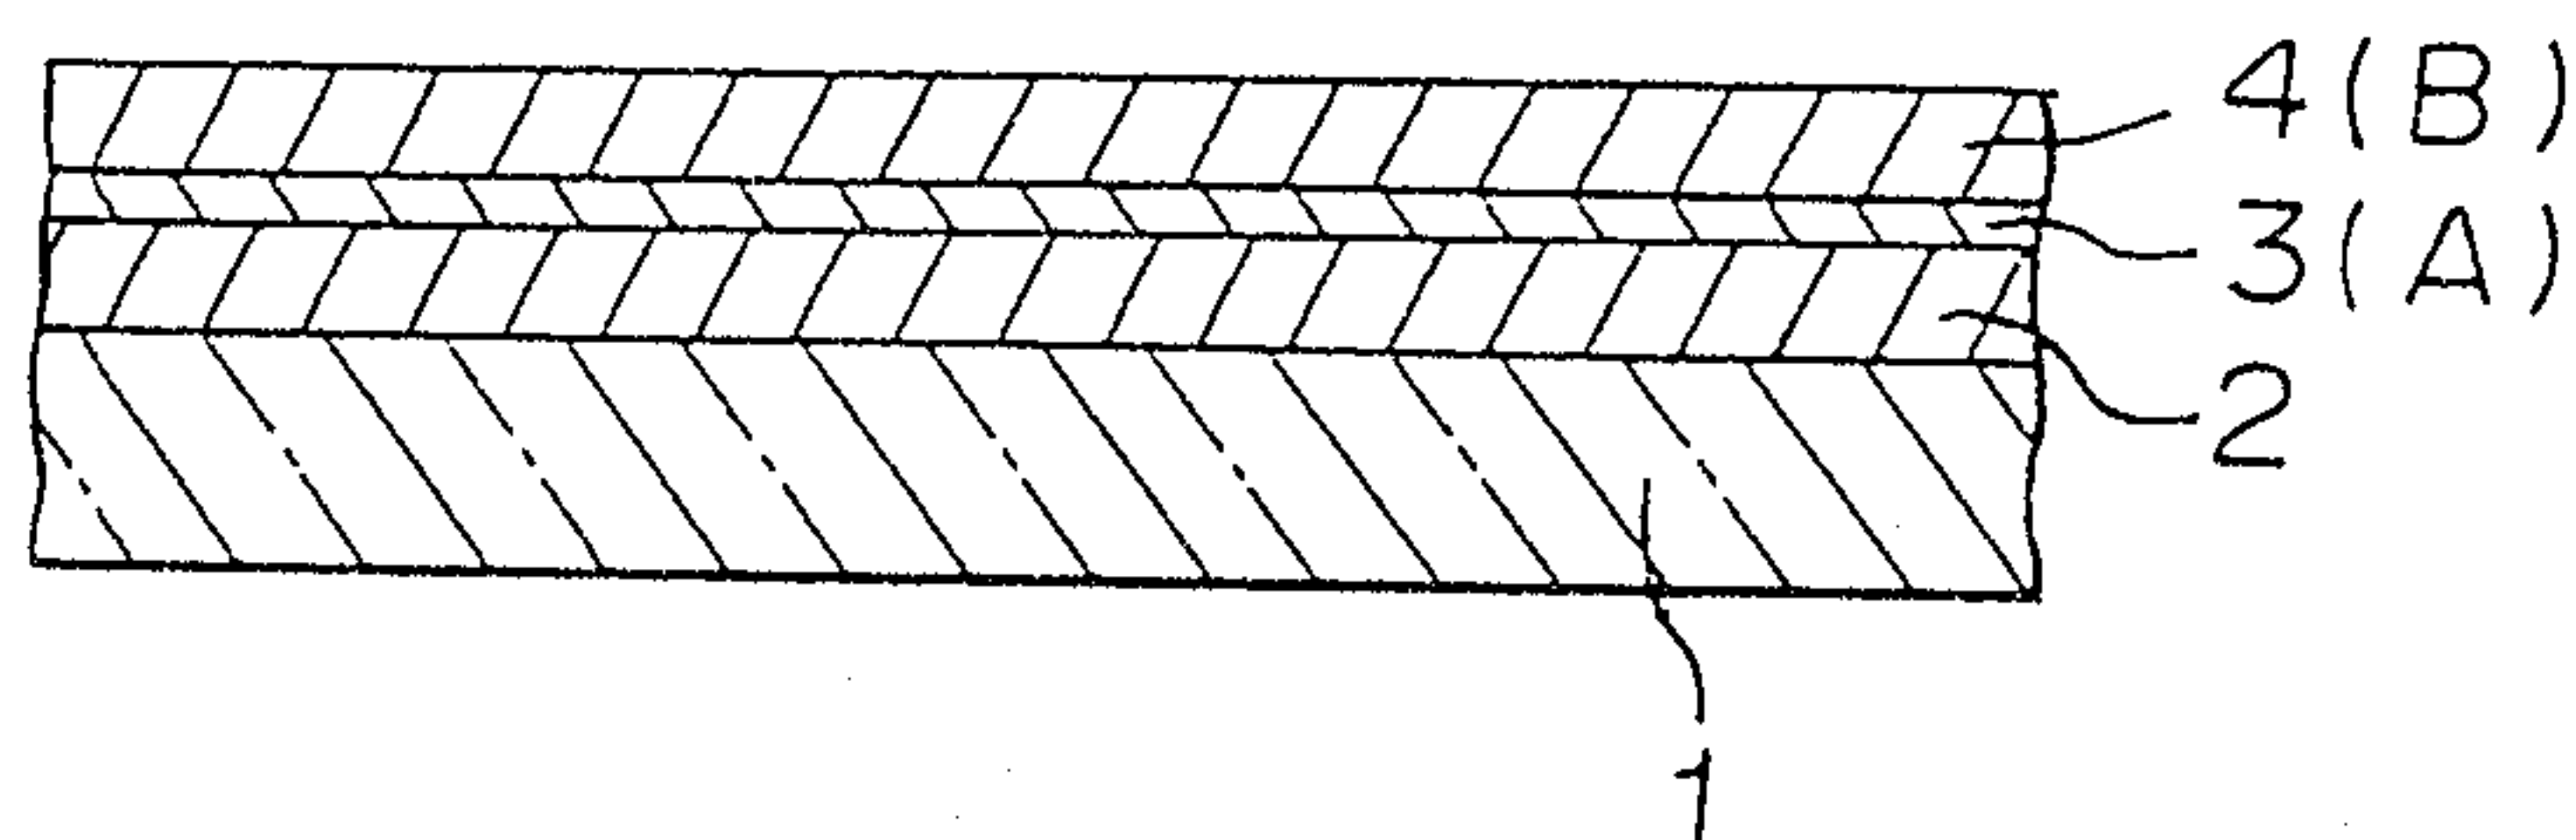


FIGURE 1 B



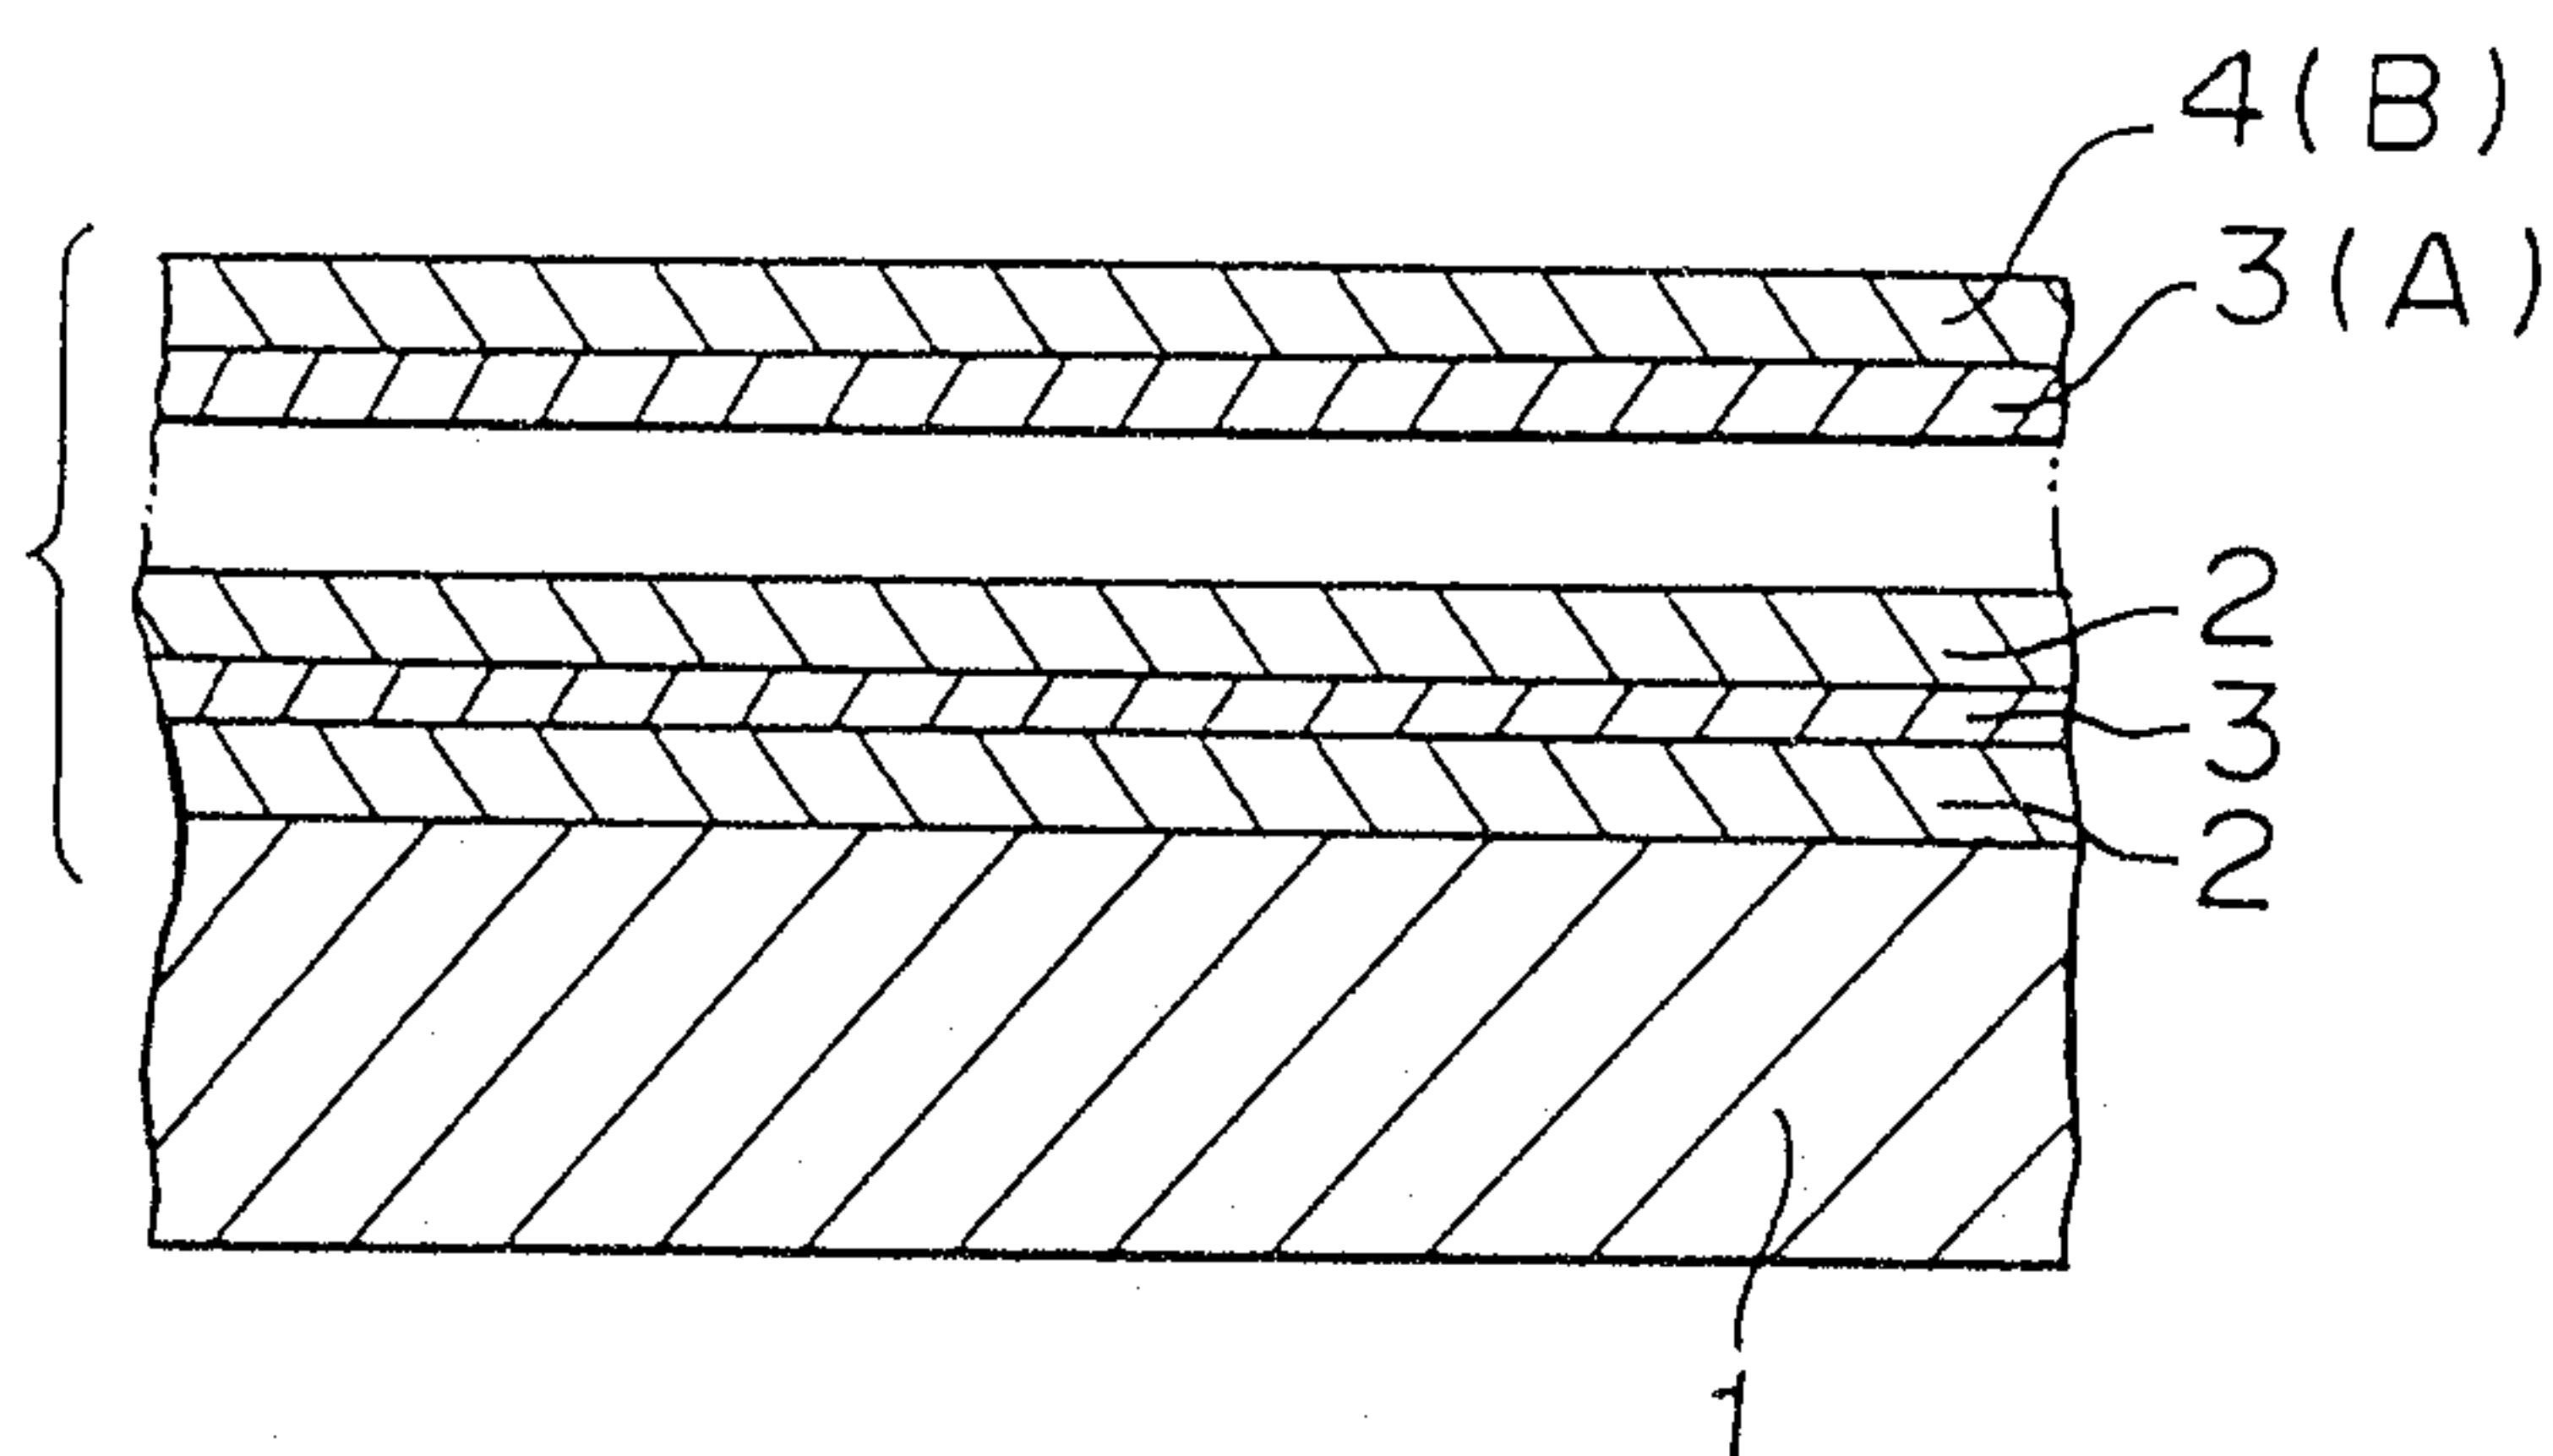


FIGURE 1 C


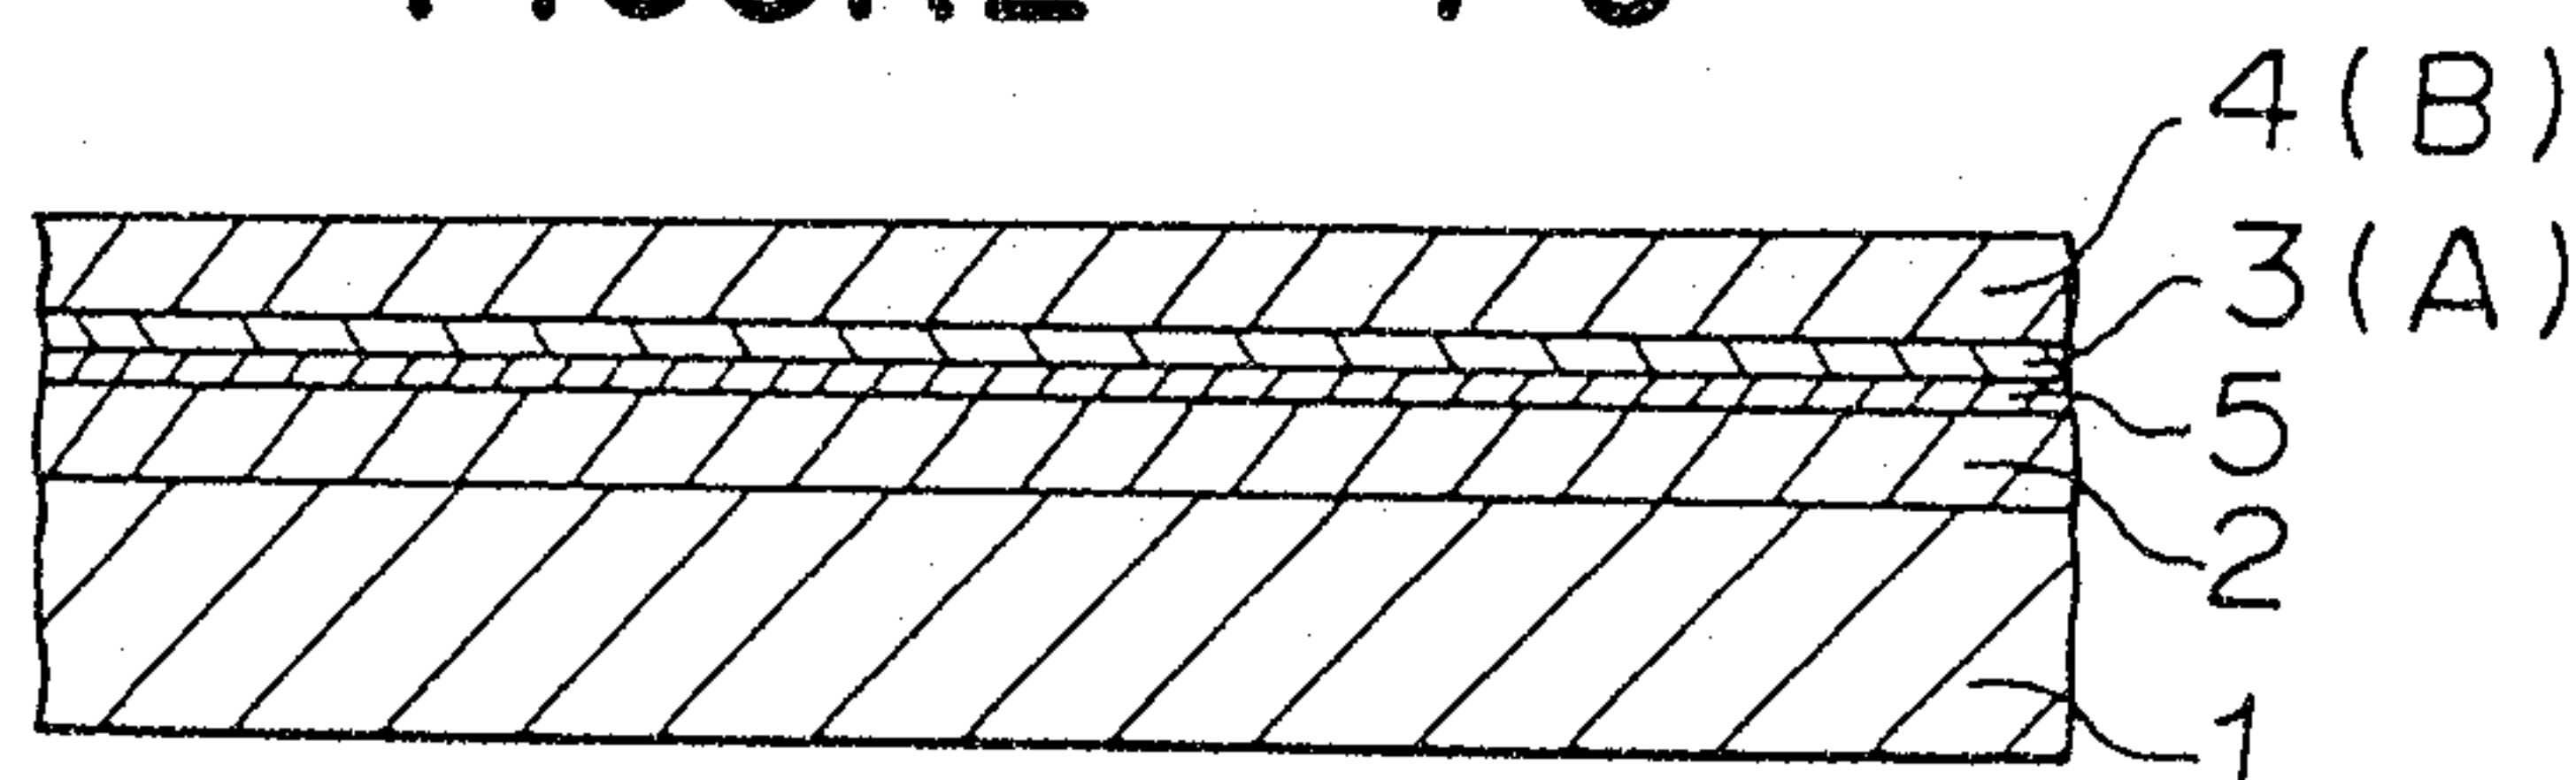


2056524

FIGURE 2

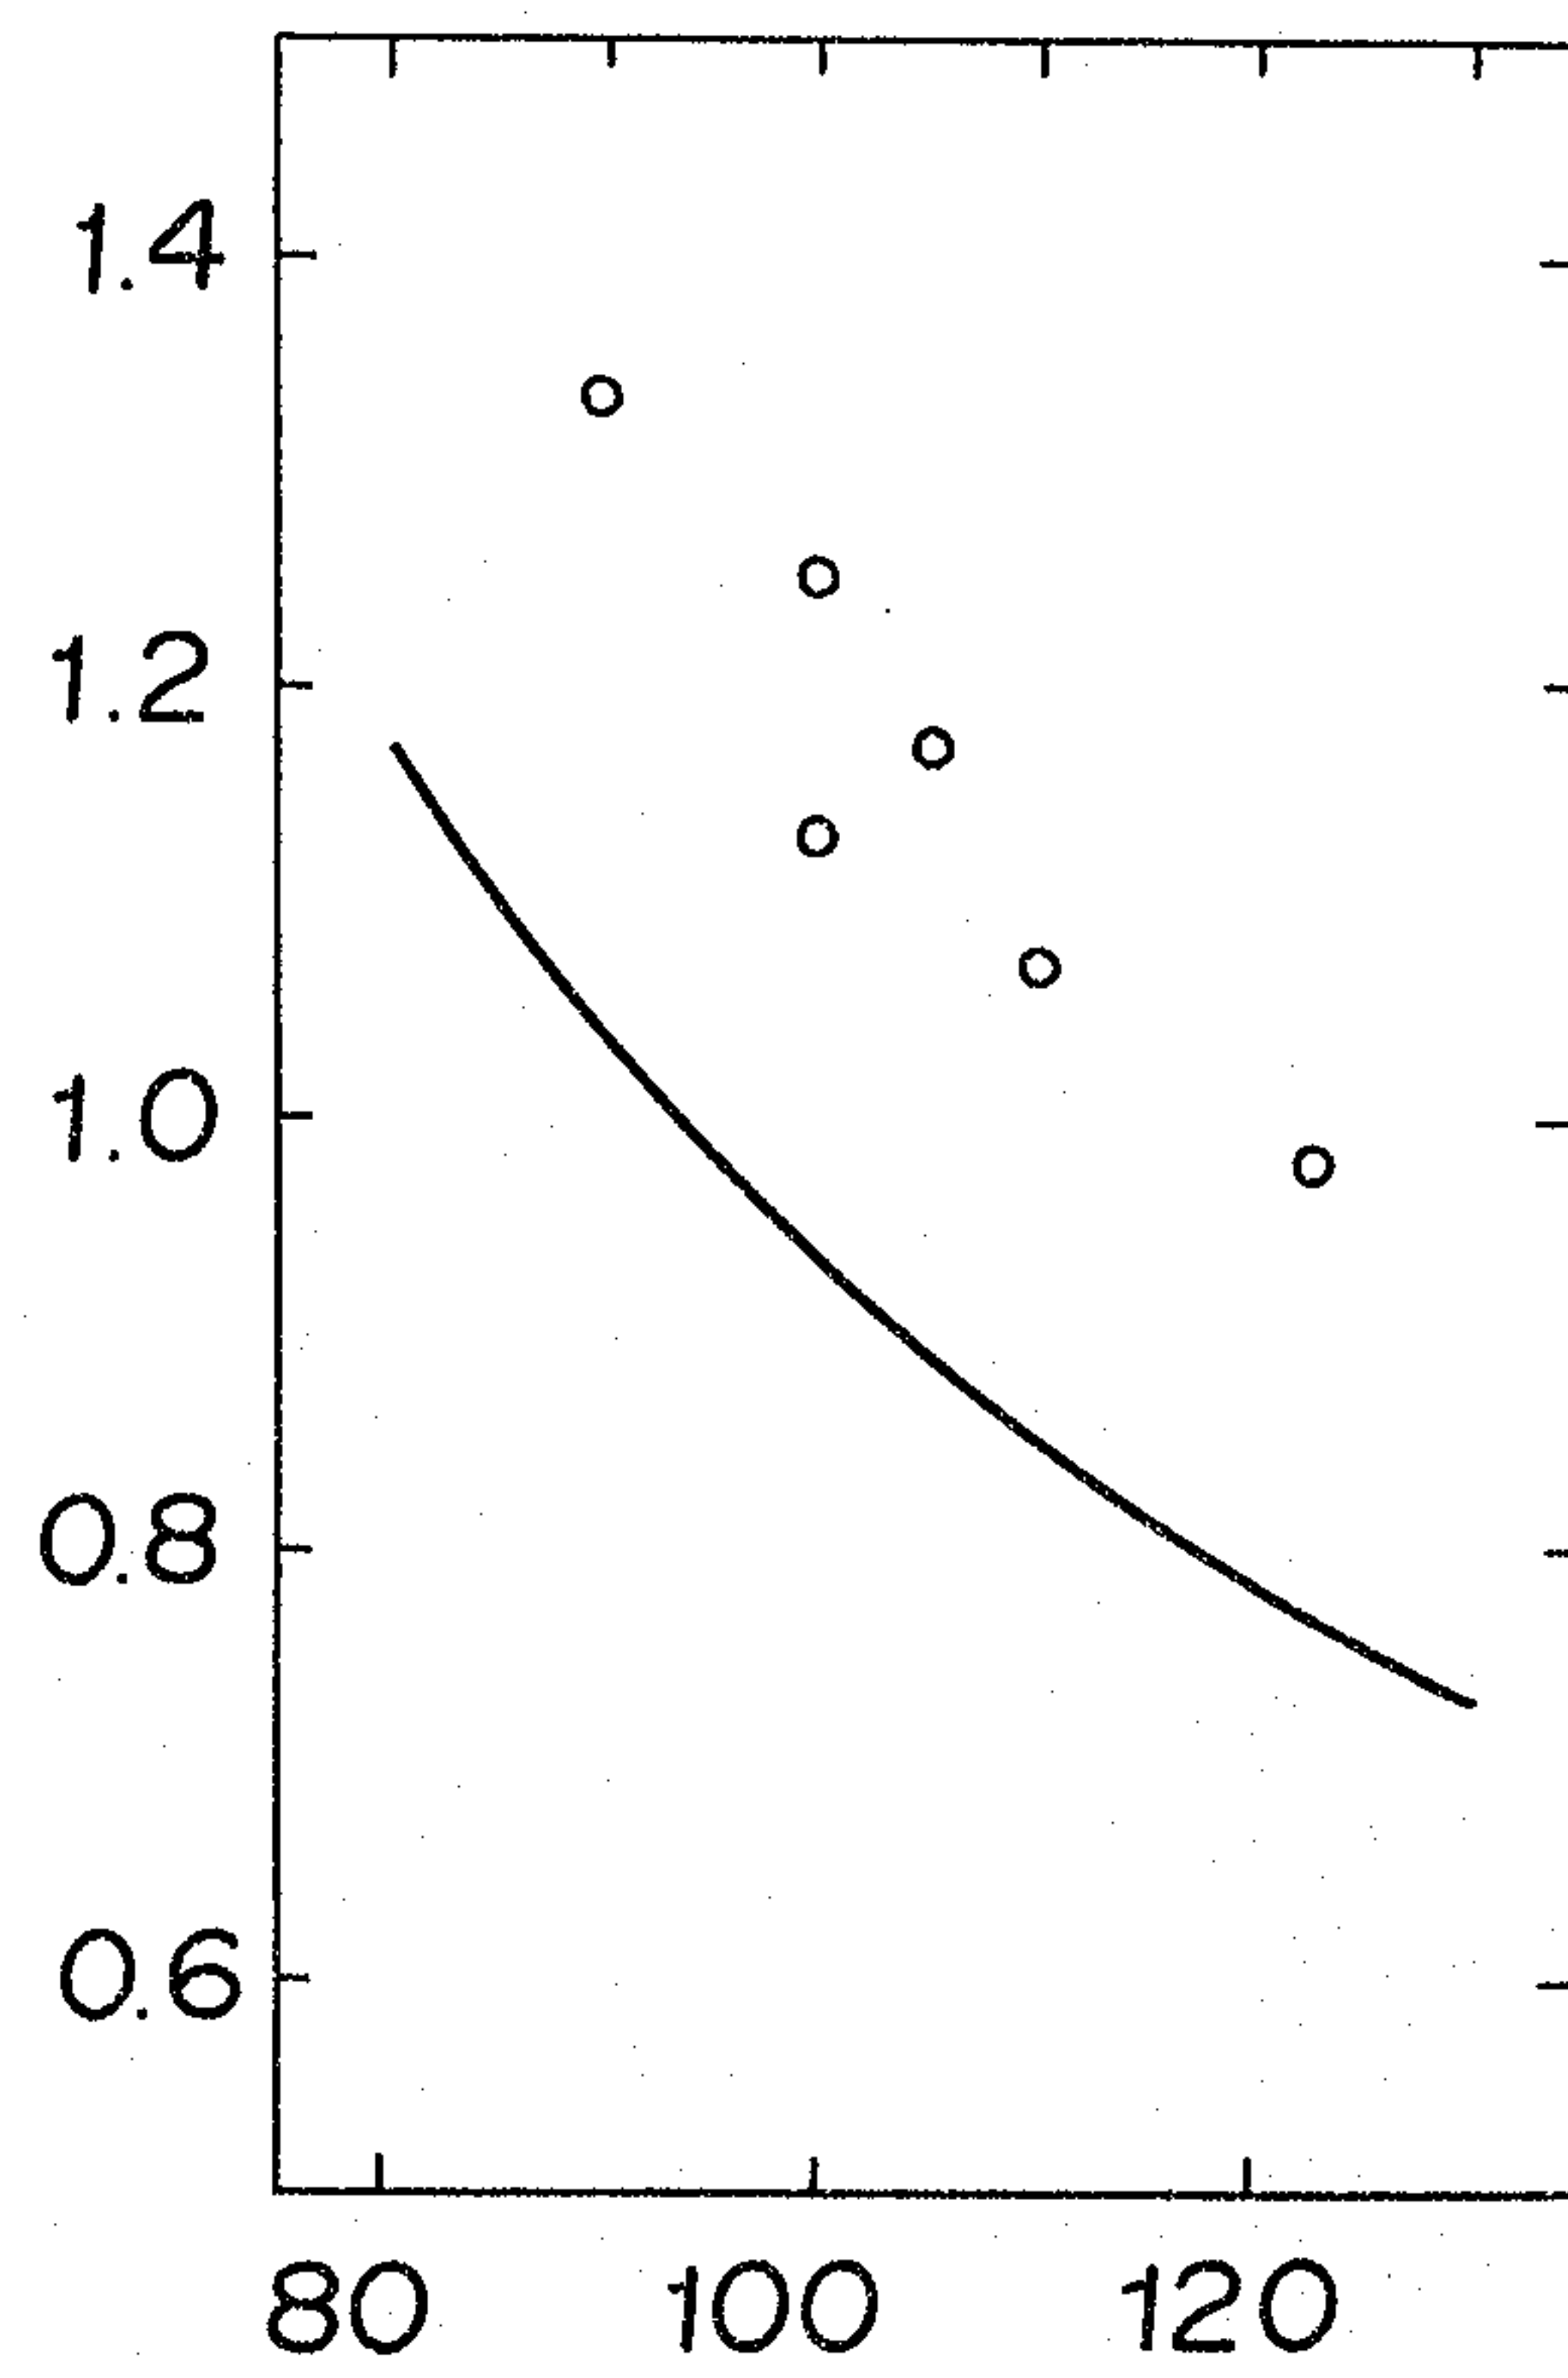

Patent Agents  
Smart & Biggar

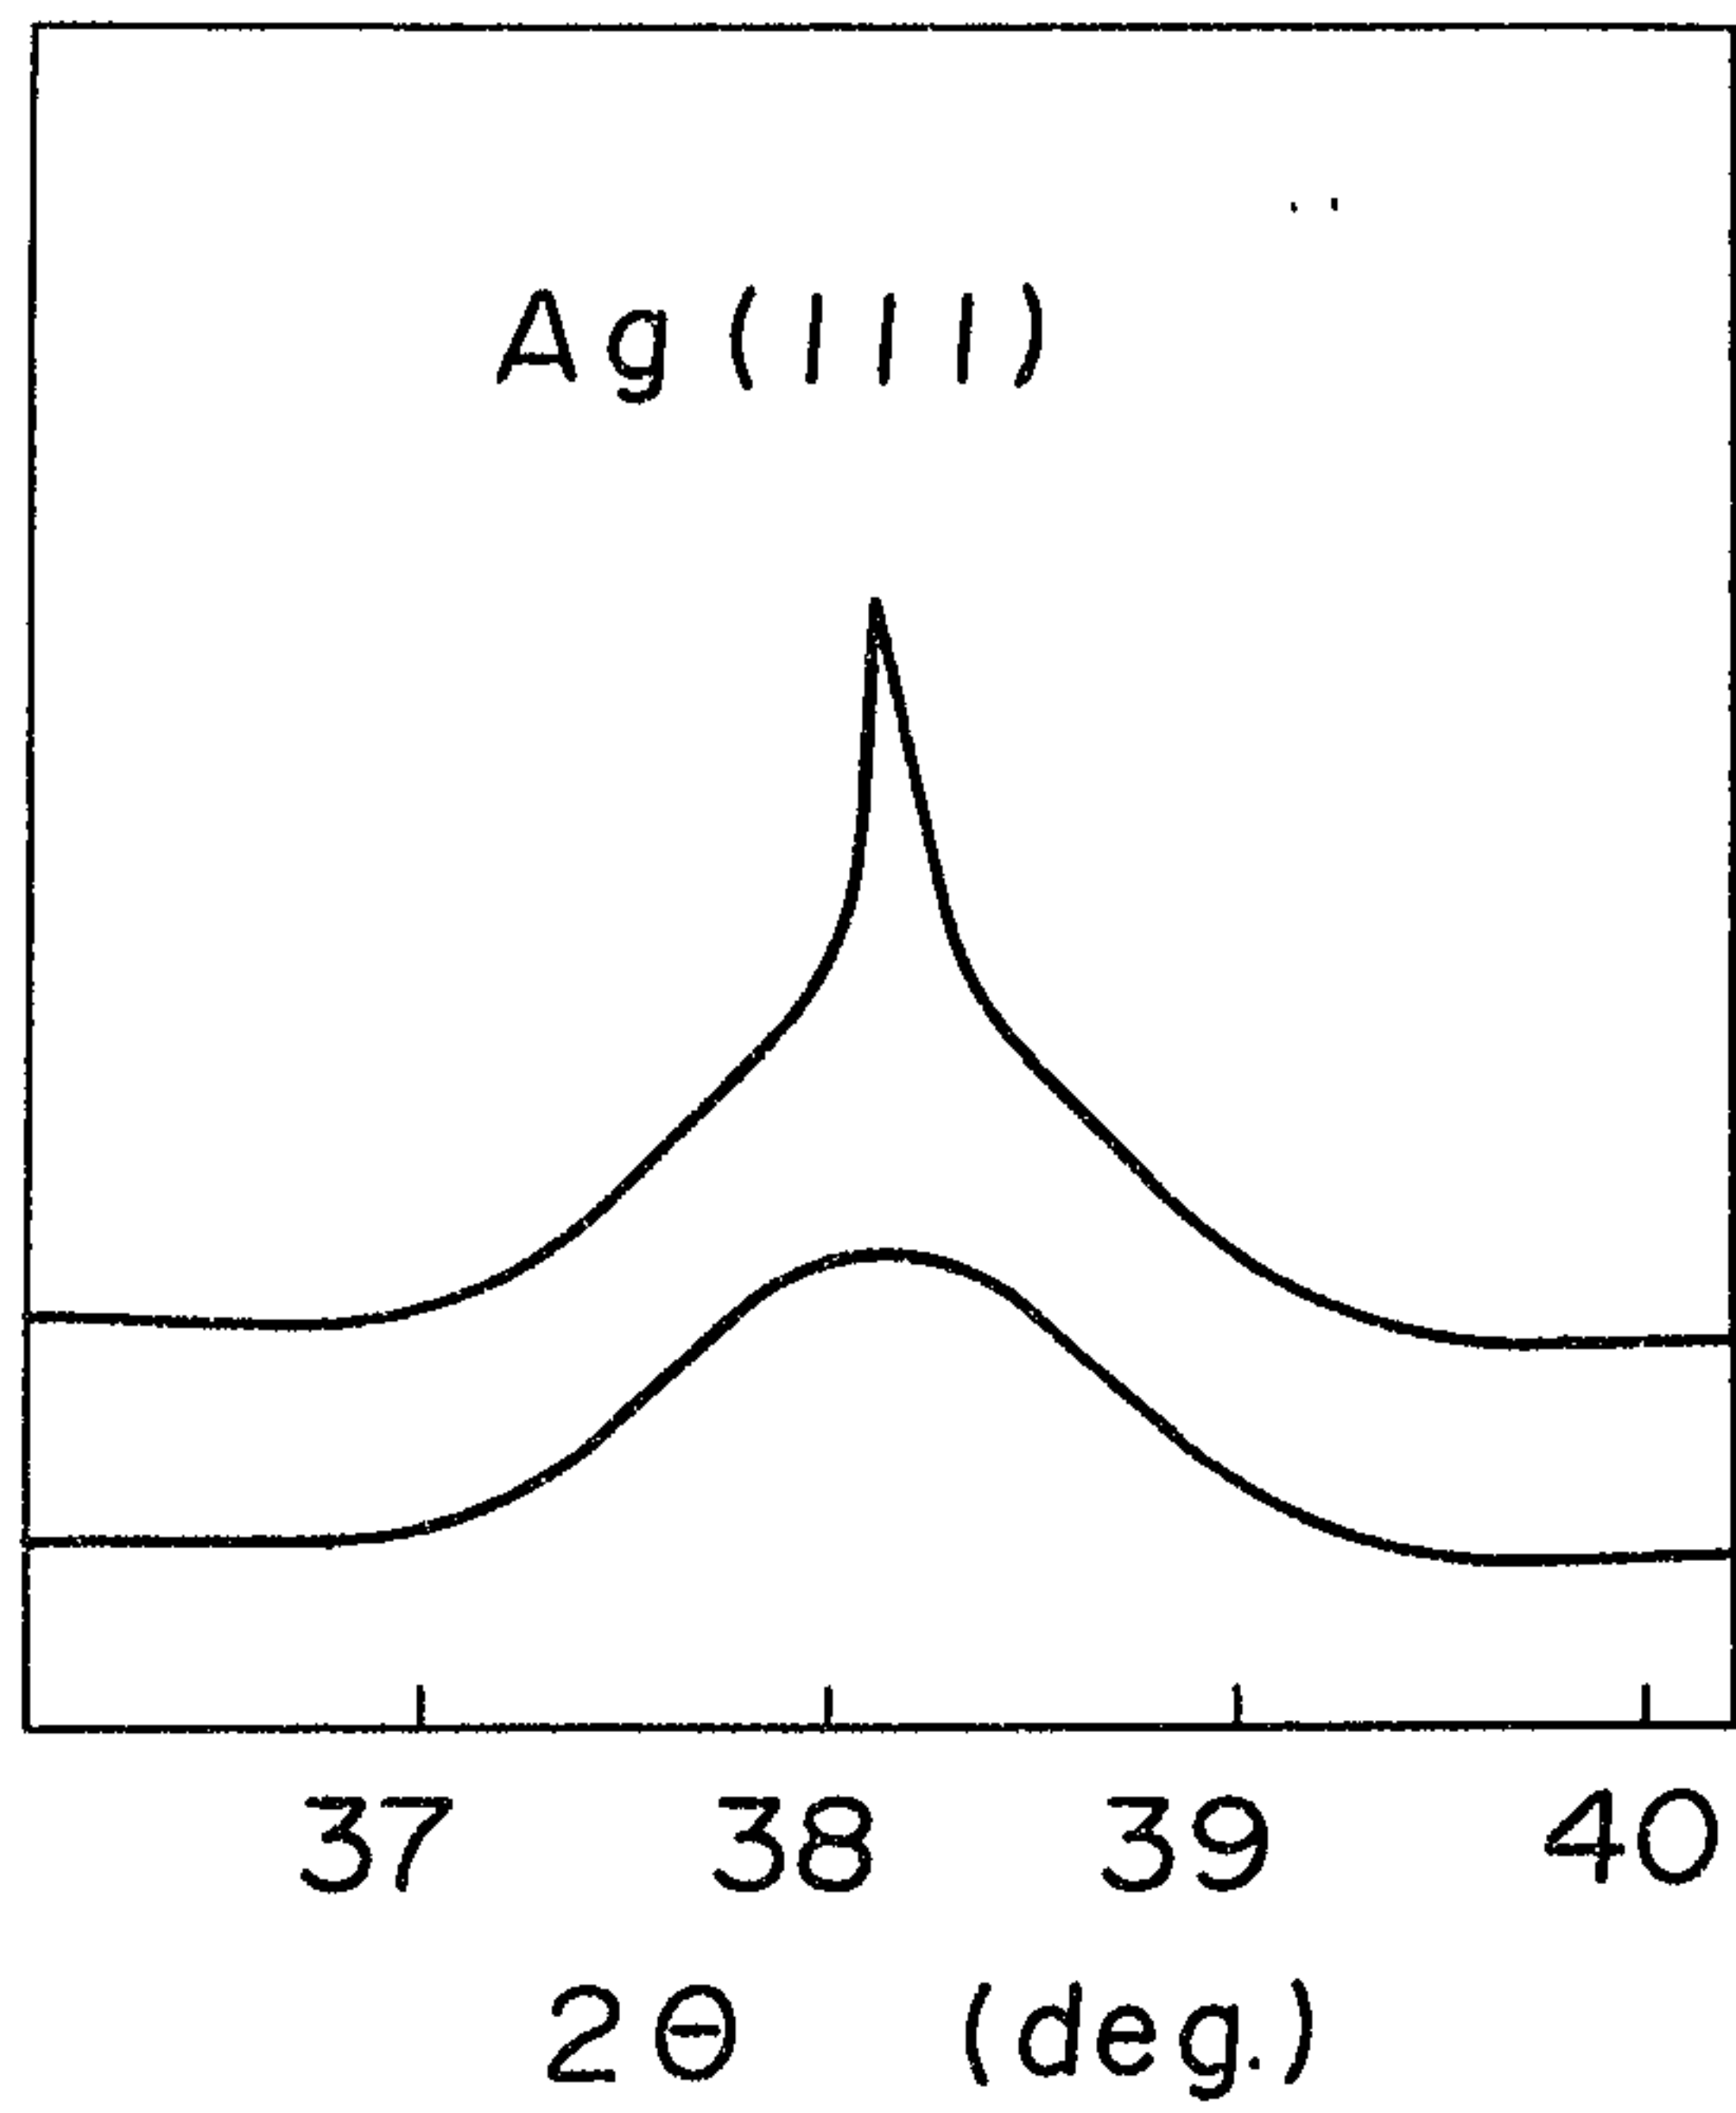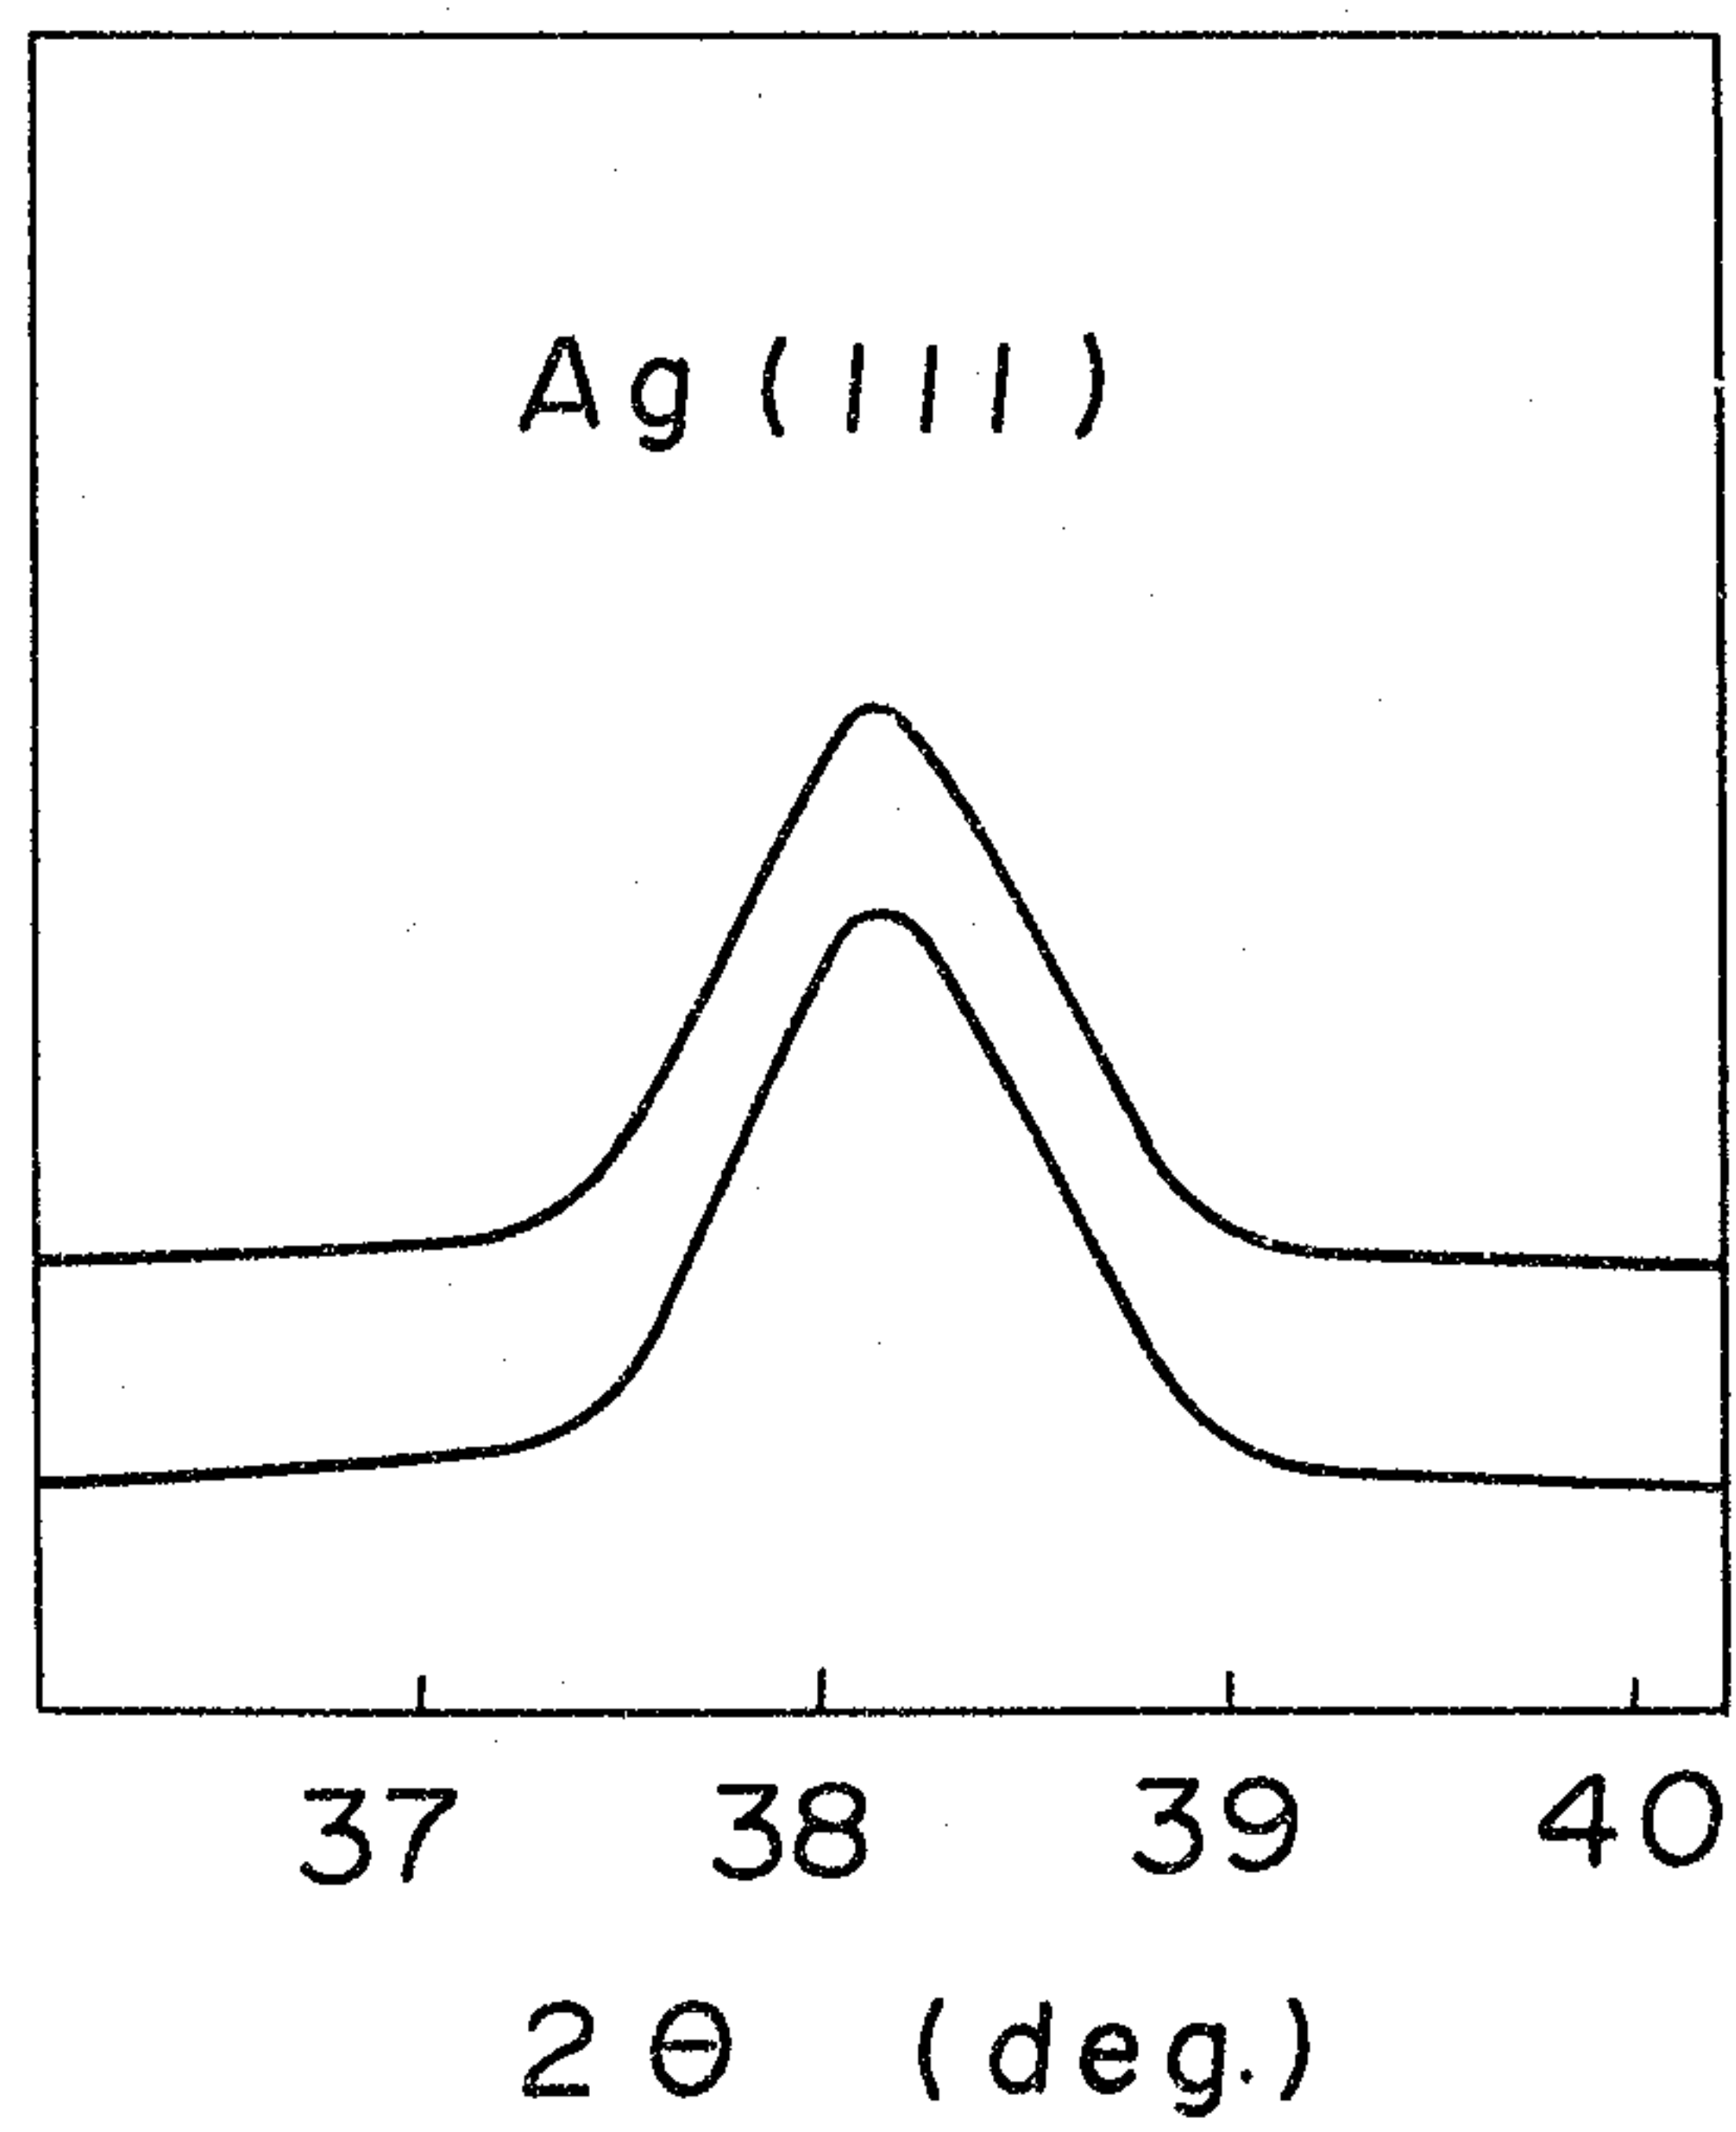**FIGURE 3****FIGURE 4**

*Patent Agents*  
*Sweet & Biggar*

