



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A43B 10/00	A1	(11) International Publication Number: WO 91/08684 (43) International Publication Date: 27 June 1991 (27.06.91)
--	-----------	---

(21) International Application Number: PCT/US90/07330
 (22) International Filing Date: 11 December 1990 (11.12.90)
 (30) Priority data:
 449,974 12 December 1989 (12.12.89) US

(71) Applicant: ORTHOFEET INC. [US/US]; 319 Knickerbocker Avenue, Hillsdale, NJ 07642 (US).


(72) Inventors: BAR, Aharaon ; 2600 Netherland Ave., Bronx, NY 10463 (US). BAR, Michael ; 11 Moller, St. Tenafly, NJ 07670 (US).

(74) Agents: HANDELMAN, Joseph, H. et al.; Ladas & Parry, 26 West 61 Street, New York, NY 10023 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), SU.

Published
With international search report.

(54) Title: A METHOD FOR PRODUCING AN INSOLE

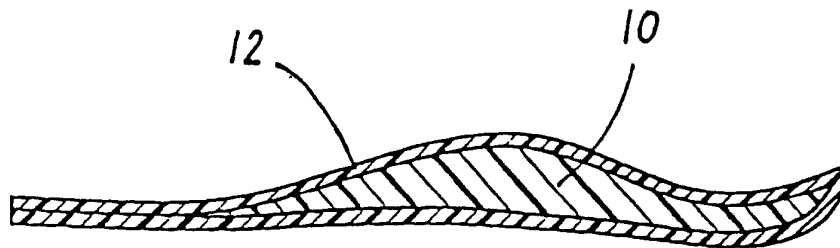

(57) Abstract

A method and apparatus for producing an insole for a foot including defining a flexible insole housing (12) in which is disposed a deformable material (10) impregnated with an uncured resin, activating the resin for initiating curing thereof, locating the foot on the insole housing (12) and allowing the resin to harden and thus, to preserve the configuration defined by the bottom of the foot.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

FIELD OF THE INVENTION

A METHOD FOR PRODUCING AN INSOLE

The present invention relates to insoles or inserts for shoes and to a method of producing them.

BACKGROUND OF THE INVENTION

An insole is an element inserted between a shoe and the foot to reduce local pressures in sensitive spots on the plantar surface of the foot so as to prevent or reduce pain and future damage to the foot and to the locomotor system. This is accomplished by fixing the foot in a certain position and orientation relative to the shoe, and by controlling the shape of the insole/foot interfacial surface.

Several types of insoles are widely marketed. For certain problems, a standard, pre-cut insole which can be mass produced in various shoe sizes and fit into conventional shoes suffices. However, individually tailored shoe inserts which are shaped to the individual foot are always preferable, especially in certain foot disorders. Such inserts are generally made by a process which is both laborious and time consuming. A plaster cast is taken of the affected foot and, using this cast, an insert of the proper size and shape is built by hand and fit into the shoe.

Other methods disclosed in the literature are less time consuming than this method being based on molding an insole

2

inside the shoe. The first such method is a method of producing inserts for ordinary shop-bought or standard "deep shoes", disclosed by R.G.S. Platts, S. Knight and I. Jakins in an article entitled "Shoe inserts for small deformed feet", Prosthetics and Orthotics International, 1982, Vol. 6, pp. 108-110. This method involves molding the insert in the shoe either using the foot itself or a positive cast of the foot. The method includes preparing a shoe-shaped "polythene" bag, which is cut, sealed and heat shrunk onto a last of approximately appropriate size for the shoe, and preparing an insole base for stiffening. The insole base is placed in the polythene shoe bag and both are placed in the shoe. If using the patient's foot directly, the foot is clothed in stockinette and covered with a shaped sock made of Ambla PO72 having a polyurethane film which is painted with a release agent where adhesion to the foam is not required. If using a cast, the cast is covered with a thin latex sheet.

The components of a flexible self-generating polyurethane foam are mixed and quickly poured into the polythene bag in the shoe. The foot or cast is placed in the shoe and the correct attitude is maintained for a further two minutes until the foam hardens. The patient should bear weight on the foot.

Once the foam has hardened, the foot and the polythene bag are removed from the shoe and the insert is trimmed as necessary. A layer of preformed polyurethane foam is added to complete the insert.

It is a disadvantage of this method that the

3

uncontrolled pressure created within the shoe during molding causes a change in foot shape and placement relative to the shoe. The method is also relatively laborious and time consuming.

A second method of preparing an insole inside the shoe is disclosed in U.S. Patent 3,895,405. This method comprises placing a flexible foam insole member into a shoe, heating the insole to a temperature sufficient to cause the foam to lose some of its resiliency, placing a foot in the shoe before the insole regains its resiliency, and taking steps with the foot in the shoe until the insole regains its resiliency.

This method suffers from the difficulty of obtaining the desired height of the insole by the molding process itself, thus requiring additional steps of trimming or adding layers to the insole, which lengthen the process of insole production. Furthermore, thermoplastic foam materials tend to deform and lose their original shape after a short period of time.

U.S. Patent 4,128,951 to Tansill describes an insole which includes outer and inner containers. The inner container holds a quantity of liquid catalyst, while the remainder of the interior of the outer container is filled with a curable liquid elastomeric material. In the technique of insole configuration, the inner container is rendered frangible and then the outer container is compressed to rupture the inner container, producing contact between the catalyst and the curable liquid elastomeric material.

A principle disadvantage of the method described above is that the insole is filled with premeasured quantities of

4

materials, notwithstanding the fact that every foot has a different shape and thus requires an insole of different shape and containing a different volume of such materials. If the premeasured quantity of materials does not fill the space between the shoe and the foot, the insole does not conform to the foot. Moreover, if the premeasured quantity of materials exceeds the space between the shoe and the foot, the insole will become too thick and create excessive pressure on the foot.

Tansill suggests a solution for the above problem in U.S. Patent 4,385,024. In that patent, he describes a method for measuring the amount of elastomeric material for each individual foot, employing special equipment. This method is cumbersome, expensive and time consuming.

In U.S. Patent 4,272,898, Tansill describes a shoe insert comprising a mass of fibers which are coated with a curable resin and other fibers which are hollow and contain a curing agent. This proposal is relatively complicated and expensive for the following reasons:

1. It is difficult to fabricate the insert structure to have the hollow fibers uniformly dispersed among the coated fibers.
2. The material of the hollow fibers is required to serve initially as a barrier separating the curing agent and its vapors from the curable material and its vapors and later to be rendered frangible such that it allows a uniform release of the curing agent on the coated fibers. Tansill does not suggest

5

suitable materials for making the hollow fibers.

3. The proposed technique of rendering the hollow fibers frangible requires special equipment and treatments.

Applicant's U.S. Patent 4,716,662 describes a simple and fast method for production of shoe insoles which permits the precise control of the insole being produced. U.S. Patent 4,716,662 teaches a method for casting in situ an insole on a foot comprising the steps of preparing a mold, defining an open top recess, providing a casting material in the recess, placing the foot inside the recess at a predetermined angle and position relative to the mold, engaging the casting material by the plantar surface of the foot, permitting the casting material to conform to the shape of the plantar surface of the foot, and permitting the casting material to harden.

6

SUMMARY OF THE INVENTION

It is an object of the present invention to provide apparatus and a technique for custom forming an insole inside the shoe.

There is thus provided in accordance with a preferred embodiment of the present invention a method for producing an insole for a foot including the steps of defining an insole housing in which is disposed a deformable material impregnated with an uncured resin, injecting a curing agent into the insole housing to activate the resin and to start curing thereof, locating the foot on the insole housing, and allowing the resin to harden and to preserve the configuration defined by the bottom of the foot.

There is also provided in accordance with a further preferred embodiment of the present invention a method for producing an insole for a foot including the steps of defining an insole housing in which is disposed a deformable material impregnated with an uncured resin, allowing water vapor contained in the atmosphere to penetrate the insole housing to activate the resin and to start curing thereof, locating the foot on the insole housing, and allowing the resin to harden and to preserve the configuration defined by the bottom of the foot.

There is further provided in accordance with still a further preferred embodiment of the present invention a method for producing an insole for a foot including the steps of defining an insole housing in which is disposed a deformable

7

material impregnated with an uncured resin, disposing in the housing a container containing a curing agent, forming at least one opening in the container, allowing the curing agent to escape via the at least one opening, to contact the resin and to activate the resin, locating the foot on the insole housing, and allowing the resin to harden and preserve the configuration defined by the bottom of the foot.

Further in accordance with a preferred embodiment of the present invention, the forming step includes the step of puncturing the container.

Still further in accordance with a preferred embodiment of the present invention, the curing agent is maintained under pressure in the container.

Additionally in accordance with a preferred embodiment of the present invention, the at least one opening is formed in the container by application of external pressure.

Further in accordance with a preferred embodiment of the present invention, the application of external pressure is provided by a patient stepping onto the insole housing.

Still further in accordance with a preferred embodiment of the present invention, the step of defining also includes the step of wrapping an elongate member around the container and extending the elongate member outside the insole housing and wherein the step of forming includes the step of rupturing the container by pulling the elongate member.

Additionally in accordance with a preferred embodiment

8

of the present invention, the container and a portion of the elongate member, located within the insole housing, are contained within another container whose upper layer is perforated.

Further in accordance with a preferred embodiment of the present invention, the resin includes a moisture cured prepolymer polyurethane.

Still further in accordance with a preferred embodiment of the present invention, the method also includes the step of storing the insole housing in a moisture impermeable storage enclosure.

Additionally in accordance with a preferred embodiment of the present invention, the method also includes the step of defining at least one opening in the insole housing, for allowing resin curing reaction products to escape therethrough.

Further in accordance with a preferred embodiment of the present invention, the resin includes polyurethane resin.

Still further in accordance with a preferred embodiment of the present invention, the method also includes the step of inserting the insole into a shoe.

Additionally in accordance with a preferred embodiment of the present invention, the step of defining includes the step of integrally forming the insole within a shoe.

Still further in accordance with a preferred embodiment of the present invention, the curing agent includes a protic compound.

Additionally in accordance with a preferred embodiment of the present invention, the deformable material includes

reticulated polyurethane foam.

Further in accordance with a preferred embodiment of the present invention, the resin, when activated, expands into spaces defined by cells of the deformable material.

According to still another preferred embodiment of the present invention, there is provided apparatus for producing a custom made insole including an insole housing having a selectable shape, a deformable material located within the insole housing, and means for selectably hardening the deformable material following desired configuration thereof by engagement with a foot.

Further in accordance with a preferred embodiment of the present invention, the insole housing is selectably locatable in a shoe.

Still further in accordance with a preferred embodiment of the present invention, the insole is integrally formed with a shoe.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in which:

Fig. 1 is a sectional illustration of an insole constructed and operative in accordance with an embodiment of the invention;

Fig. 2 is a sectional illustration of the insole of Fig. 1 with an associated syringe supplying curing agent thereto;

Fig. 3 is a sectional illustration of another type of insole constructed and operative in accordance with the present invention;

Fig. 4 is a sectional illustration of the insole of Fig. 3 after release of the curing agent, in engagement with a foot for curing in accordance with the foot configuration;

Fig. 5 is a sectional illustration of a further type of insole constructed and operative in accordance with the present invention;

Fig. 6 is a sectional illustration of the insole of Fig. 5 taken along the lines A-A in Fig. 5;

Fig. 7 is a sectional illustration of the insole, depicting an upper layer of an external container; and

Fig. 8 is a sectional illustration of yet another type of insole constructed and operative in accordance with the present invention.

//

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Reference is now made to Fig. 1 which illustrates an insole constructed and operative in accordance with a preferred embodiment of the present invention. A flexible insole housing 12 has the general configuration of the inner sole of the shoe. It can be fitted inside the shoe, and can preferably be transferred from one shoe to another. Examples of materials for the insole housing are polyethylene foam, polyethylene film, polyurethane foam, rubber foam and leather.

According to an alternative embodiment of the invention, the insole housing is integrally formed with the shoe, allowing the foot to engage the upper layer of the insole housing.

According to a preferred embodiment of the invention, the insole housing 12 is filled with a deformable material 10 such as open-cell cellular material or a matrix of fibers, as described hereinafter. The pressure engagement of the foot on the deformable material defines its desired shape. This shape is later fixed by a curing step.

According to a preferred embodiment of the present invention, the deformable material is a reticulated polyurethane foam, such as is widely used for air-conditioning filters and is available in various densities for various levels of resiliency from Crest Foam, Inc. of Moonachie, N.J., U.S.A., under the designation RO - 20. This material has large open cells which allow easy penetration of the curing agent and contact therewith.

According to a preferred embodiment of the present

12

invention, the deformable material is impregnated with a material that can harden and preserve the shape defined by the bottom of the foot. The impregnated material is typically an unactivated resin which is activated by a curing agent before or when the foot is placed on top of the insole housing. An example of such impregnating material is a moisture cure polyurethane prepolymer, such as Hypol FHP 4000, commercially available from WR Grace of Lexington, Massachusetts. This prepolymer reacts with a curing agent such as a protic (active hydrogen containing) compound to form elastomeric foams. Examples of protic compounds include hydroxyl groups, e.g. water, alcohols, polyols and phenols; primary and secondary amino groups; and carboxylic acid groups. When water is used as the curing agent, carbon dioxide may be produced as a by-product of the reaction.

An advantage in using a moisture cure polyurethane instead of two-component polyurethane lies in the fact that the moisture cure polyurethane cures even when it is not well mixed with a curing agent and can also be cured by the moisture contained in the air.

According to a preferred embodiment of the present invention, the curing agent is injected into the insole.

According to a preferred embodiment of the present invention, illustrated in Fig. 2, the curing agent is injected via a syringe tip 20 which penetrates into the insole housing 12. An array of small holes 22 is defined on the tip, to allow effective and uniform dispersion of the curing agent within the

13

entire insole housing. In the illustrated embodiment of Fig. 2, the syringe pushes up the deformable material 10, allowing the curing agent to come into contact with most of the deformable material for curing thereof. After injection, the hole in the insole housing 12 may be closed as by use of a substantially moisture impermeable laminated film which may comprise a combination of 0.002 inch polypropylene film, 0.001 inch aluminum foil and a pressure sensitive adhesive.

According to a further embodiment of the present invention, illustrated in Fig. 3, a curing agent 30 is contained in a container 32 located inside the insole housing 12. Prior to use, at least one opening is defined in the container 32 to release the curing agent. As illustrated in Fig. 3, the opening may be produced by puncturing the container 32 by means of a sharp element 34, such as a needle, pin or push-pin, to form at least one opening in the container and to release the curing agent.

Alternatively, an opening in container 32 may be produced by applying external pressure to the container. Such pressure may be applied by a person's foot when the person steps on the insole housing.

According to the further embodiment of the invention, the pressure inside container 32 is maintained slightly below the level that can cause an opening in or breakage of the container. This enables an opening to be formed in container 32 by application thereto of only a relatively small amount of external pressure.

Fig. 4 illustrates the embodiment of Fig. 3 after the curing agent 30 has been released from container 32 and container 32 has been effectively flattened, as shown. The resin is permitted to harden while the foot engages the insole in order to configure the insole in accordance with the foot configuration.

Reference is now made to Figs. 5 and 6, which illustrate an alternative embodiment of the present invention wherein an opening in container 32 is produced by pulling a string 52. Container 32, as shown in Fig. 6, may comprise a compartment 60 containing a curing agent 62 and extensions 64 and 66 maintained between top layer 22 and a bottom layer 50. String 52 is wrapped around container 32 and one end of the string is sealingly positioned between extensions 64 and 66, while the other end protrudes from the insole housing through a hole 54. Pulling the protruding portion of string 52 ruptures container 32, allowing curing agent 62 to come into contact with the uncured resin, which in turn impregnates the deformable foam 10.

According to a further alternative embodiment of this invention, as shown in Fig. 7, container 32 and the string 52 are contained within another external container 70 comprising an open end 72 and an upper layer which is perforated by holes 74. An example of the external container 70 is a 0.002 polyethylene film pouch.

So as to eliminate the contact of string 52 with the resin which impregnates deformable material 10, string 52 extends

15

outside the container 70 and the insole housing 12. Open end 72 is heat sealed onto string 52, permitting it to be pulled and thus, to cause container 32 to rupture. After container 32 is ruptured, the curing agent 62, contained in container 32, fills external container 70. As the foot engages the insole, the pressure of the foot on the insole causes the curing agent 62 to flow out of the holes of the upper layer of the external container 70.

Reference is now made to Fig. 8, which illustrates an insole constructed and operative in accordance with an alternative embodiment of the present invention. At least one opening is defined in the insole housing 12. This opening may be defined by apertures 82 in the top layer 22, and/or in the bottom layer 50 or in predetermined gaps (not shown) between the bottom layer 50 and the top layer 22.

The opening or openings in the insole housing 12 enable excess resin or gas, generated by the chemical curing reaction, to escape from the interior of the insole housing, thus eliminating the build up of excessive pressure under the foot during the molding process which might adversely affect the shape of the finished insole.

According to a preferred embodiment of the present invention, the aperture or apertures 82 may be sealed with a material which is permeable to gas but impermeable to liquid. This permits the escape of any air, or gases produced by the curing process, which may have become trapped inside the insole housing, thus eliminating the build up of excessive pressure

16

beneath the foot.

According to an alternative embodiment of the present invention, apertures 82 enable communication of air between the exterior and interior of the insole housing, allowing contact of the water vapor contained in the air with the uncured resin, for moisture curing thereof.

According to a further alternative embodiment of the present invention, apertures 82 allow foot perspiration to penetrate the insole housing, allowing it to cure the impregnated material.

According to an alternative embodiment of the invention, the insole housing 12, containing deformable material which is impregnated with an uncured resin, is stored in a moisture barrier container, so as to eliminate exposure of the uncured resin to air and moisture and thus prevent unintended curing during storage. An example of a material useful in the construction of such a moisture barrier container is a three layer laminate comprising a 0.002 inch polypropylene film, a 0.0005 inch aluminum foil and a 0.002 inch polypropylene film.

According to a preferred embodiment of the present invention, the insole housing can be located on a flat surface, on a special mold, or inside a shoe before the step of locating the foot on the insole.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described hereinabove. Rather the scope of the present invention is defined only by the claims which follow:

C L A I M S

1. A method for producing an insole for a foot comprising the following steps:

defining an insole housing in which is disposed a deformable material impregnated with an uncured resin;

injecting a curing agent into said insole housing to activate said resin and to start curing thereof;

locating the foot on said insole housing;

allowing said resin to harden and to preserve the configuration defined by the bottom of the foot.

2. A method for producing an insole for a foot comprising the following steps:

defining an insole housing in which is disposed a deformable material impregnated with an uncured resin;

allowing water vapor contained in the atmosphere to penetrate said insole housing to activate said resin and to start curing thereof;

locating the foot on said insole housing;

allowing said resin to harden and to preserve the configuration defined by the bottom of the foot.

3. A method for producing an insole for a foot comprising the following steps:

a. defining an insole housing in which is disposed a deformable material impregnated with an uncured resin;

b. disposing in said housing a container containing a

curing agent;

c. forming at least one opening in said container, allowing said curing agent to escape via said at least one opening, to contact said resin and to activate said resin;

d. locating the foot on said insole housing; and

e. allowing said resin to harden and preserve the configuration defined by the bottom of the foot.

4. A method according to claim 3 and wherein said forming step includes the step of puncturing said container.

5. A method according to claim 3 and wherein said curing agent is maintained under pressure in said container.

6. A method according to claim 3 and wherein said at least one opening is formed in said container by application of external pressure.

7. A method according to claim 6 and wherein said application of external pressure is provided by a patient stepping onto said insole housing.

8. A method according to claim 3 wherein said step of defining also comprises the step of wrapping an elongate member around said container and extending said elongate member outside said insole housing and wherein said step of forming comprises the step of rupturing said container by pulling said elongate member.

9. A method according to claim 8 and wherein said

container and a portion of said elongate member, located within said insole housing, are contained within another container whose upper layer is perforated.

10. A method according to claim 3 and wherein said resin comprises a moisture cured prepolymer polyurethane.

11. A method according to claim 3 and also comprising the step of storing said insole housing in a moisture impermeable storage enclosure.

12. A method according to claim 3 and also comprising the step of defining at least one opening in said insole housing, for allowing resin curing reaction products to escape therethrough.

13. A method according to claim 3 and wherein said resin comprises polyurethane resin.

14. A method according to claim 3 and also comprising the step of inserting said insole into a shoe.

15. A method according to claim 3 and wherein said step of defining comprises the step of integrally forming said insole within a shoe.

16. A method according to claim 3 and wherein said curing agent comprises a protic compound.

17. A method according to claim 3 and wherein said deformable material comprises reticulated polyurethane foam.

20

18. A method according to claim 3 and wherein said resin, when activated, expands into spaces defined by cells of said deformable material.

19. Apparatus for producing a custom made insole comprising:

an insole housing having a selectable shape;

a deformable material located within said insole housing;

means for selectably hardening said deformable material following desired configuration thereof by engagement with a foot.

20. Apparatus according to claim 19 and wherein said insole housing is selectably locatable in a shoe.

21. Apparatus according to claim 19 and wherein said insole is integrally formed with a shoe.

22. A method according to claim 1 and wherein said resin comprises a moisture cured prepolymer polyurethane.

23. A method according to claim 1 and also comprising the step of storing said insole housing in a moisture impermeable storage enclosure.

24. A method according to claim 1 and also comprising the step of defining at least one opening in said insole housing, for allowing resin curing reaction products to escape therethrough.

21

25. A method according to claim 1 and wherein said resin comprises polyurethane resin.

26. A method according to claim 1 and also comprising the step of inserting said insole into a shoe.

27. A method according to claim 1 and wherein said step of defining comprises the step of integrally forming said insole within a shoe.

28. A method according to claim 1 and wherein said curing agent comprises a protic compound.

29. A method according to claim 1 and wherein said deformable material comprises reticulated polyurethane foam.

30. A method according to claim 1 and wherein said resin, when activated, expands into spaces defined by cells of said deformable material.

31. A method according to claim 2 and wherein said resin comprises a moisture cured prepolymer polyurethane.

32. A method according to claim 2 and also comprising the step of storing said insole housing in a moisture impermeable storage enclosure.

33. A method according to claim 2 and also comprising the step of defining at least one opening in said insole housing, for allowing resin curing reaction products to escape therethrough.

22

34. A method according to claim 2 and wherein said resin comprises polyurethane resin.

35. A method according to claim 2 and also comprising the step of inserting said insole into a shoe.

36. A method according to claim 2 and wherein said step of defining comprises the step of integrally forming said insole within a shoe.

37. A method according to claim 2 and wherein said curing agent comprises a protic compound.

38. A method according to claim 2 and wherein said deformable material comprises reticulated polyurethane foam.

39. A method according to claim 2 and wherein said resin, when activated, expands into spaces defined by cells of said deformable material.

1 / 3

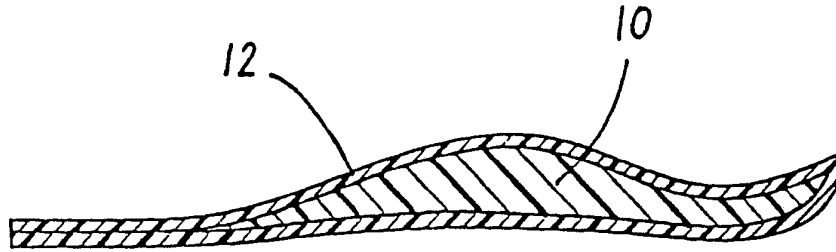


Fig. 1

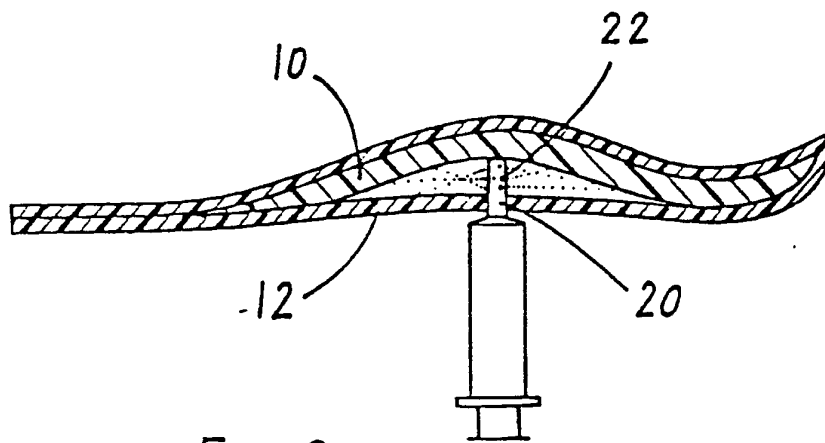


Fig. 2

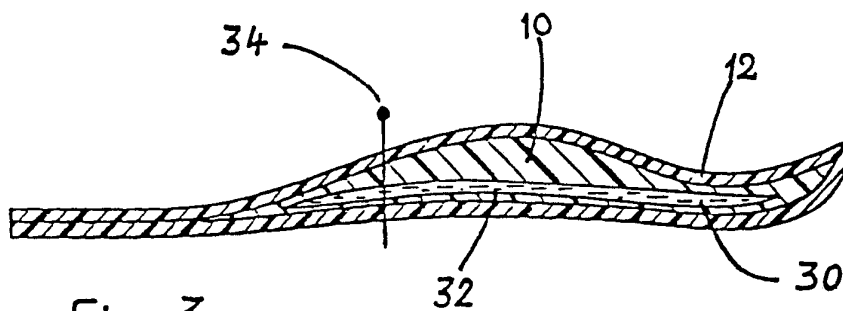
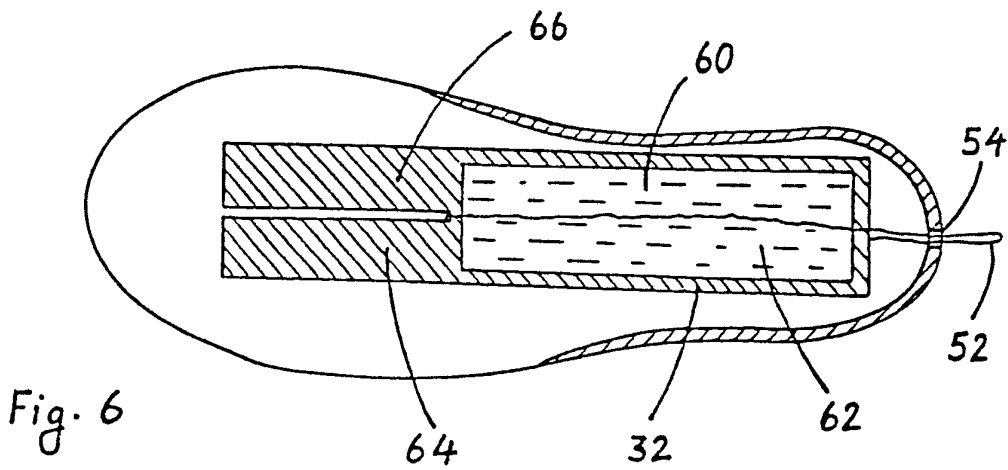
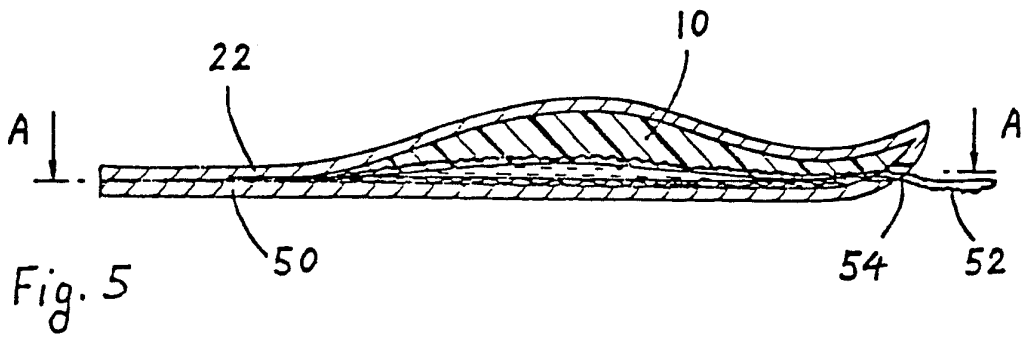
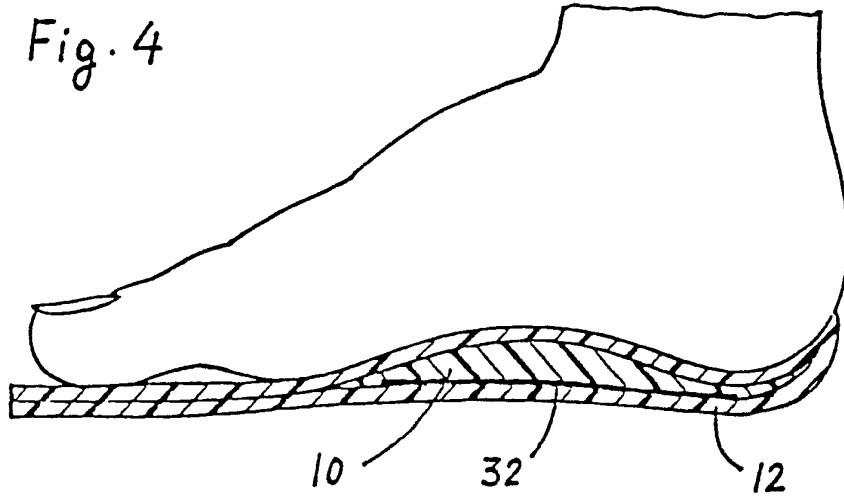


Fig. 3

Fig. 4



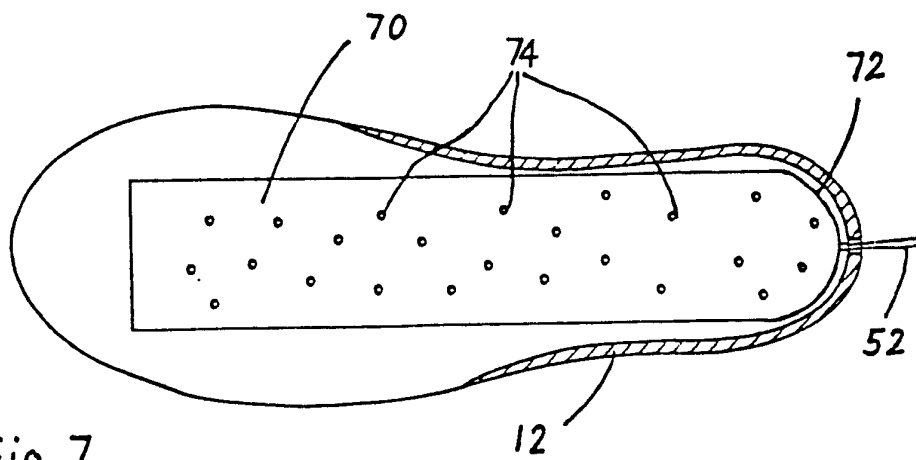


Fig. 7

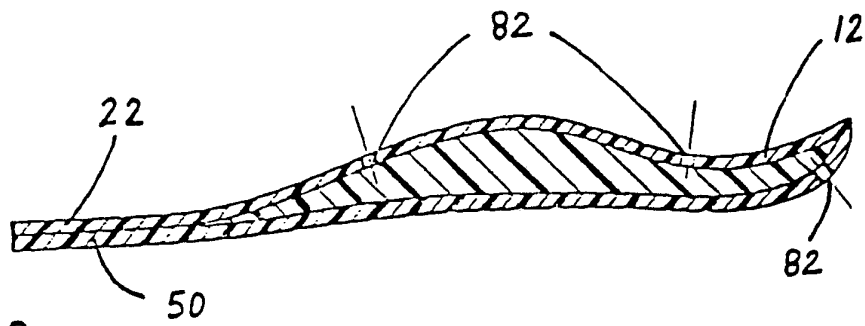


Fig. 8

INTERNATIONAL SEARCH REPORT

International Application No **PCT/US90/07330**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) :

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5) : **A43B 10/00**
 U.S. CL : **12/146M**

II. FIELDS SEARCHED

Classification System	Minimum Documentation Searched *
U.S.	12/142N, 146M; 264/223

Documentation Searched other than Minimum Documentation
to the extent that such Documents are included in the Fields Searched *

III. DOCUMENTS CONSIDERED TO BE RELEVANT 14

Category *	Citation of Document, 15 with indication, where appropriate, of the relevant passages 17	Relevant to Claim No. 18
X Y	US,A 4,385,024 (TANSILL) 05 May 1983 See the entire reference.	1,19-22,24- 27,29,30 <hr/> 23,28
X	US,A 2,092,910 (DANIELS) 14 September 1937 See Figure 3.	1,19-21,24, 26,27
A	US,A 4,520,581 (IRWIN ET AL) 04 June 1985 See Figure 5.	1,19
A	US,A 4,823,420 (BARTNECK) 25 April 1989 See Figure 8.	1,19,20
A	US,A 2,136,815 (FORSTER ET AL) See Column 1, Lines 25-42	1,19-21,26, 27,

(CON'T)

- | | |
|---|---|
| <p>* Special categories of cited documents: 19</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> |
|---|---|

IV. CERTIFICATION

Date of the Actual Completion of the International Search 20	Date of Mailing of .
06 FEBRUARY 1991	08 MAR 1991
International Searching Authority 1	Signature of Authorized Officer 20.
ISA/US	<i>Jerome</i> M. D. PATTERSON

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ¹⁰ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No ¹³
A	US,A 2,242,818 (DONOVAN) 20 May 1941 See Figure 7.	1,19
A	US,A 4,813,090 (IBRAHIM) 21 March 1989 See Figure 7.	1,19,22
A	US,A 4,470,782 (ZIMMERMAN, JR. ET AL) 11 September 1984 See the entire reference.	1, 19-30
A	US,A 1,044,171 (GUILFORD) 12 November 1912 See Figure 2.	1,19

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

V. OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE¹

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. Claim numbers _____ because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim numbers _____, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out¹, specifically:

3. Claim numbers _____, because they are dependent claims not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING²

This International Searching Authority found multiple inventions in this international application as follows:

SEE ATTACHMENT SHEET (PAGE 5)

1. As all required additional search fees were timely paid by the applicant, this international search report covers all the claims of the international application.
2. As only some of the required additional search fees were timely paid by the applicant, this international search report covers those claims of the international application for which fees were paid, specifically claims:

3. No required additional search fees were timely paid by the applicant. Consequently, this international search report covers the invention first mentioned in the claims; it is covered by claim numbers:

1 & 19-30.

4. As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority does not invite payment of any additional fee.

Remark on Protest

- The additional search fees were accompanied by applicant's protest.
- No protest accompanied the payment of additional search fees.

CONTINUATION SHEET

VI. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

This International Searching Authority found multiple inventions in this international application as follows:

- I. CLAIMS 1,19-30 drawn to a method for producing an in sole by injecting curing agent.
 - II. CLAIM 2 drawn to method for producing an insole by water vapor penetration.
 - III. CLAIMS 3-18 drawn to method for producing an insole by puncturing housed curing agent.
 - IV. CLAIMS 3,8,9 drawn to method for producing an insole by rupturing container with built-in device.
3. CLAIM NUMBERS: 1 & 19-30