



(51) International Patent Classification:

G01S 7/48 (2006.01) *G01S* 13/58 (2006.01)
G01S 11/04 (2006.01) *G01S* 13/60 (2006.01)

(21) International Application Number:

PCT/GB2013/053185

(22) International Filing Date:

2 December 2013 (02.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1222063.8 7 December 2012 (07.12.2012) GB
12275194.4 7 December 2012 (07.12.2012) EP

(71) Applicant: BAE SYSTEMS PLC [GB/GB]; 6 Carlton Gardens, London SW1Y 5AD (GB).

(72) Inventor: NOYES, Stephen, Paul; BAE Systems, Somerton Works, Newprot Road, Cowes, Isle of Wight Hampshire PO31 8PF (GB).

(74) Agent: BAE SYSTEMS PLC, GROUP IP DEPT; PO Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVEMENTS IN AND RELATING TO COURSE AND/OR SPEED DATA

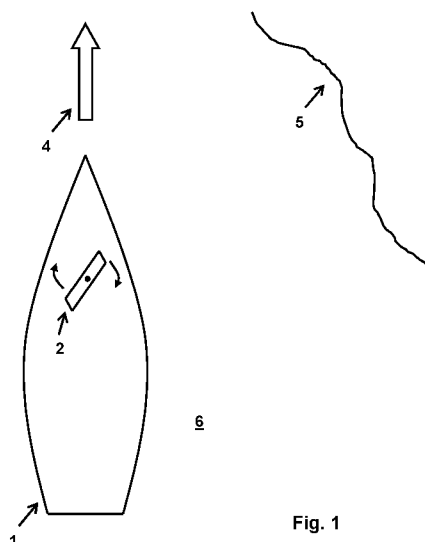


Fig. 1

(57) Abstract: Disclosed is a method of determining a velocity of a vessel, comprising the steps of: detecting objects in the vicinity of the vessel; selecting an object having a velocity relative to the vessel which is below a predefined threshold; and determining the velocity of the vessel to be opposite to the velocity of the object. Also disclosed is an apparatus arranged to perform the method.

- 1 -

IMPROVEMENTS IN AND RELATING TO COURSE AND/OR SPEED DATA

FIELD

The present invention relates to the field of Radars. Specifically, it relates
5 to the mitigation and possible correction of certain navigational data supplied to
a Radar system from another system, such as ship's navigation references
(course and speed made good) on board a ship or other vessel.

BACKGROUND TO THE PRESENT INVENTION

10 A typical ship-based Radar system will be provided with ship's navigation
reference data (course and speed relative to the land) so that the apparent
motion of the objects identified by the Radar on the moving ship can be
compensated for the motion of the ship.

Under normal operation it may be assumed that reliable and accurate
15 ship's course and speed data is available, but under some circumstances such
as fault conditions, this data may not be available or may not be as accurate as
would be expected or desired.

As such, there is a desire to improve the quality and accuracy of
navigation reference data made available to the Radar.

20

SUMMARY OF THE INVENTION

According to an aspect of the present invention, there is provided a
method of determining a velocity of a vessel, comprising the steps of: detecting
objects in the vicinity of the vessel; selecting an object having a velocity relative
25 to the vessel which is below a predefined threshold; and determining the
velocity of the vessel to be opposite to the velocity of the object.

Preferably, if a plurality of objects are detected which have a velocity
relative to the vessel which is below the predefined threshold, selecting the

- 2 -

plurality of objects and calculating an average velocity for the plurality of objects.

Preferably, the step of calculating includes the step of defining an individual velocity vector for each of the plurality of objects and calculating an
5 average velocity vector by means of the equation:

$$(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3 + \dots x_n)/n, (y_1 + y_2 + y_3 + \dots y_n)/n)$$

wherein (x_{avg}, y_{avg}) is the average velocity vector, n is the number of the plurality of objects, and $(x_1, y_1) \dots (x_n, y_n)$ are the n individual velocity vectors.

Preferably, the determined velocity is compared to vessel speed and
10 course data provided by another means, and any discrepancy is registered.

Preferably, the vessel speed and course data is corrected according to the determined velocity.

Preferably an assessment of the accuracy of the velocity measurement is made, based upon the number of stationary objects detected.

15 According to another aspect of the present invention, there is provided an apparatus arranged to determine a velocity of a vessel, comprising:

a signal processing unit arranged to classify Radar signals received from objects according to their relative speeds; a velocity estimation unit, arranged to identify and select from amongst the objects one whose velocity is below a
20 predefined threshold; and a velocity processing unit, arranged to determine the velocity of the vessel to be opposite to the velocity of the one object whose speed is below the predefined threshold.

Preferably, if the slow-channel identification unit identifies and selects a plurality of objects which have a velocity relative to the vessel which is below
25 the predefined threshold, the velocity processing unit is further arranged to calculate an average velocity for the plurality of objects.

Preferably, the velocity processing unit is arranged to calculate the average velocity for the plurality of objects by: defining an individual velocity for

- 3 -

each of the plurality of objects; defining a vector for each individual velocity; and calculating an average velocity vector by means of the equation:

$$(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3 + \dots x_n)/n, (y_1 + y_2 + y_3 + \dots y_n)/n)$$

wherein (x_{avg}, y_{avg}) is the average velocity vector, n is the number of the plurality of objects, and $(x_1, y_1) \dots (x_n, y_n)$ are the n individual velocity vectors.

Preferably, the velocity processing unit is further arranged to discount one of the individual velocity vectors before calculating an average velocity vector.

In a still further aspect, there is provided a tangible, non-transient computer-readable storage medium having instructions which, when executed, cause a computer device to perform any of the methods defined herein

BRIEF DESCRIPTION OF THE FIGURES

For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings in which:

Figure 1 shows an aerial view of a vessel provided with a Radar system;

Figure 2 shows a flowchart according to an embodiment of the present invention; and

Figure 3 shows an apparatus according to an embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Figure 1 shows a representation of a vessel 1 at sea 6. In the particular setting shown here, the vessel is located in littoral zone i.e. relatively close to the coast 5.

The vessel is progressing in a direction indicated by the arrow 4 at a given speed. The vessel is equipped with a Radar system 2.

- 4 -

The Radar system 2 is used to identify and track objects such as aircraft, vessels or missiles. Navigation data, in the form of course and speed data from the ship is supplied to the Radar 2 so that the velocity of the objects can be adjusted for the motion of the ship and the velocity calculated over the ground.

5 However, the course and speed data is not always as reliable as would be desired, and so embodiments of the present invention utilise information derived from the Radar to derive course and speed data. This derived course and speed data may be used to define a correction factor which can be applied to the supplied course and speed data, or it may simply be presented to an
10 operator for information purposes.

A problem encountered in most Radar system is the detection and subsequent handling of signals which are not of interest. Such returns are usually referred to as clutter and can be detected from nearby stationary objects, slow moving debris, such as flotsam and jetsam, wave tips or other
15 nearby vessels. Normally, steps are taken to minimise the effect of clutter, but embodiments of the present invention make use of clutter in order to infer information on the course and speed of the vessel.

When the Radar 2 scans, the return signals are filtered and processed to provide range information and also speed information. Radar returns from slow
20 targets of no interest, such as those from nearby stationary objects, are suppressed.

Figure 2 is a flowchart which shows the steps taken in an embodiment of the invention. Step 20 is the formation of tracks on objects detected by the radar, to determine their velocity relative to the ship.

25 For the purposes of this explanation, it is important to realise that speed and velocity are different, even though they are commonly used interchangeably. Speed is a scalar quantity i.e. it has no directional component, whereas velocity is a vector quantity which represents speed and direction. Unless stated otherwise, embodiments of the present invention are concerned
30 with velocity i.e. course (direction) and speed, together.

- 5 -

By identifying the stationary or slow moving clutter, an inference can be made of the velocity of the vessel. That is, objects that appear stationary when the vessel is moving are actually only relatively stationary i.e. they have the same velocity as the vessel, and so appear not to be moving. In a littoral environment, most of the slow moving objects detected are likely to be absolutely stationary and appear to be slow-moving due to the velocity of the vessel, which is moving away from or towards them.

Step 21 is the slow object identification. Here, any returns having a speed greater than a defined threshold are discarded from this process and only slow or stationary targets are considered.

In practice the truly stationary objects cannot be identified from the slow moving object without a knowledge of ship motion. But, by assuming that in a littoral environment most of the objects tracked will be from stationary objects, then an estimate for the velocity of the ship can be made. For instance, if the returns appear to be moving away from the vessel at a speed X at a heading of 30°, the speed of the vessel is calculated to be X at a heading of 210°.

It is necessary to define an average velocity for all the returns received at the Radar, so that this can be used as the basis for inferring the velocity of the vessel. Straightforward vector mathematics allows a simple average to be defined. For the sake of example, consider the case where three returns are detected. These can be represented in a vector fashion using their Cartesian or (x,y) co-ordinates, with the vessel itself positioned at the origin (0,0). The three vectors are (x_1, y_1) ; (x_2, y_2) ; (x_3, y_3) . The average vector is defined as: $(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3)/3, (y_1 + y_2 + y_3)/3)$. Of course, the same method can be used for any number of vectors, with the generic situation being defined as:

$$(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3 + \dots x_n)/n, (y_1 + y_2 + y_3 + \dots y_n)/n)$$

This vector mathematics is performed in step 22.

In order to eliminate any outlying values measured, either in terms of speed or direction, one or more thresholds may be applied to the detected returns to remove any potentially erroneous readings.

- 6 -

The threshold or thresholds may be applied dynamically. That is, instead of using a fixed value of speed or direction above or below which any readings will be ignored, the threshold or thresholds may change in real time. One possible way of doing this is to statistically analyse the results and to discount
5 any results which lie more than a defined number of standard deviations from a mean. In this way, a more reliable figure for the vessel's velocity may be determined.

In this way, if the majority of returns indicate a certain general direction, but one or two are clearly in a different direction, the one or two that do not
10 conform to the majority may be discounted.

Once the velocity of the vessel has been determined as set out above, there are several possible uses for this information. It may be used to double check the information provided from the navigation system. In that case, it may simply be displayed to the operator, alongside the information from the
15 navigation system. It may also be fed back to the navigation system, again as a double check.

In a more adaptive system, the velocity information supplied from the navigation system can be modified according to the velocity determined according to an embodiment of the invention, in an attempt to give a more
20 accurate reading.

Figure 3 shows a schematic of an apparatus arranged to perform the method set out above. The apparatus 10 forms part of the processing system for the Radar 2.

The apparatus 10 comprises a signal processing unit 11. This is arranged
25 to receive an input from the Radar receiver circuitry. The signal processing unit processes the received signals to identify objects detected by the Radar.

The results of this unit are passed to a velocity estimation unit 12. This unit identifies only those target returns which are stationary or slow, according to a defined threshold. Targets having a speed above the defined threshold are
30 discarded from this process.

- 7 -

Information on the identified slow and stationary targets is then passed to the velocity processing unit 13. This performs the vector mathematics described previously to infer the velocity of the vessel. This unit also performs any pruning of the data which may be required to remove outlying data samples which could
5 skew the result in an undesirable manner.

The output from the velocity processing unit 13 is information on the velocity i.e. course and speed of the vessel, derived from certain measured Radar return signals.

The output signal can be used to drive a display unit so that an operator is
10 made aware of the inferred velocity information. Alternatively, the calculated velocity can be compared to the velocity information supplied by the navigation system and may be used to correct it, or at least to flag to an operator that there is a discrepancy. This may be subject to a threshold so that small differences between the navigational data and the calculated data are ignored.

15 Embodiments of the invention may be arranged to operate in different modes, depending on the relative position of the vessel. For instance, if the vessel is operating in the littoral zone, there is likely to be more stationary clutter than would be the case in open ocean conditions. A small number of stationary returns could cause erroneous determinations of vessel velocity to be made, but
20 recognition of such circumstances may be automated by methods such as setting a threshold on the minimum number of stationary objects that must contribute to the velocity estimate.

Embodiments of the invention are able to make use of clutter data from a Radar, which would normally be discarded or of little interest in the normal
25 operation of such a system, and use the data to derive information on the vessel's velocity. This information can be advantageously used to flag possible issues with the navigational data provided to the crew. It can additionally be used to correct said navigational data, if desired.

Attention is directed to all papers and documents which are filed
30 concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and

- 8 -

the contents of all such papers and documents are incorporated herein by reference.

5 All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

10 Each feature disclosed in this specification (including any accompanying claims, abstract and drawings) may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

15 The invention is not restricted to the details of the foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

CLAIMS

1. A method of determining a velocity of a vessel, comprising the steps of:

detecting objects in the vicinity of the vessel;

5 selecting an object having a velocity relative to the vessel which is below a predefined threshold; and

determining the velocity of the vessel to be opposite to the velocity of the object.

10 2. The method of claim 1 wherein if a plurality of objects are detected which have a velocity relative to the vessel which is below the predefined threshold, selecting the plurality of objects and calculating an average velocity for the plurality of objects.

15 3. The method of claim 2 wherein the step of calculating includes the step of defining an individual velocity vector for each of the plurality of objects and calculating an average velocity vector by means of the equation:

$$(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3 + \dots x_n)/n, (y_1 + y_2 + y_3 + \dots y_n)/n)$$

20 wherein (x_{avg}, y_{avg}) is the average velocity vector, n is the number of the plurality of objects, and $(x_1, y_1) \dots (x_n, y_n)$ are the n individual velocity vectors.

4. The method of claim 3 wherein at least one of the individual velocity vectors is discounted before the average velocity vector is calculated.

25 5. The method of claim 4 where the at least one individual velocity vector is discounted on the basis of a statistical analysis of the plurality of objects

- 10 -

6. The method of any preceding claim wherein the determined velocity is compared to vessel speed and course data provided by another means, and any discrepancy is registered.

5 7. The method of claim 6 wherein the vessel speed and course data is corrected according to the determined velocity.

8. The method of any preceding claim wherein an assessment of the accuracy of the velocity measurement is made, based upon the number of
10 stationary objects detected.

9. Apparatus arranged to determine a velocity of a vessel, comprising:

a signal processing unit arranged to classify Radar signals received from
15 objects according to their relative speeds;

a velocity estimation unit, arranged to identify and select from amongst the objects one whose velocity is below a predefined threshold; and

a velocity processing unit, arranged to determine the velocity of the vessel to be opposite to the velocity of the one object whose speed is below the
20 predefined threshold.

10. The apparatus as claimed in claim 9, wherein if the slow-channel identification unit identifies and selects a plurality of objects which have a velocity relative to the vessel which is below the predefined threshold, the
25 velocity processing unit is further arranged to calculate an average velocity for the plurality of objects.

- 11 -

11. The apparatus as claimed in claim 10, wherein the velocity processing unit is arranged to calculate the average velocity for the plurality of objects by:

defining an individual velocity for each of the plurality of objects;

5 defining a vector for each individual velocity; and

calculating an average velocity vector by means of the equation:

$$(x_{avg}, y_{avg}) = ((x_1 + x_2 + x_3 + \dots x_n)/n, (y_1 + y_2 + y_3 + \dots y_n)/n)$$

wherein (x_{avg}, y_{avg}) is the average velocity vector, n is the number of the plurality of objects, and $(x_1, y_1) \dots (x_n, y_n)$ are the n individual velocity vectors.

10

12. The apparatus as claimed in claim 11, wherein the velocity processing unit is further arranged to discount one of the individual velocity vectors before calculating an average velocity vector.

15 13. A tangible, non-transient computer-readable storage medium having instructions which, when executed, cause a computer device to perform the method of claims 1 to 8.

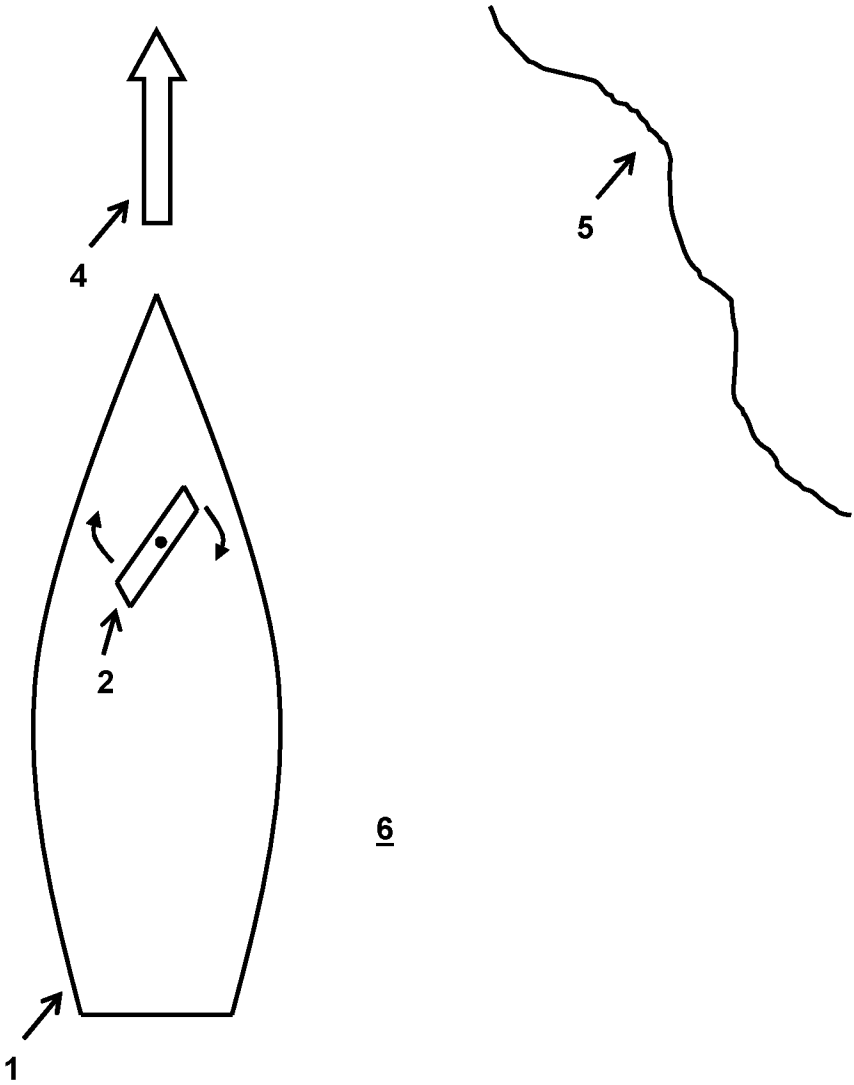


Fig. 1

2/3

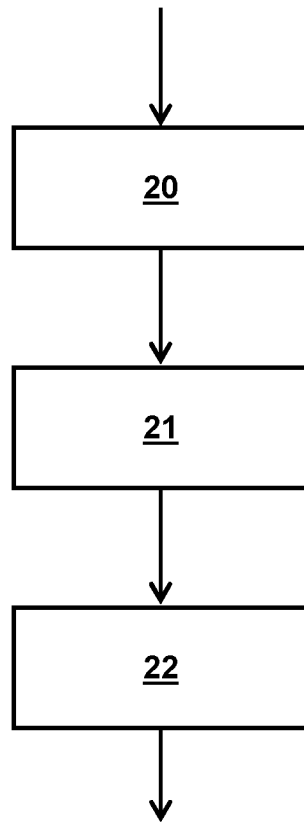


Fig. 2

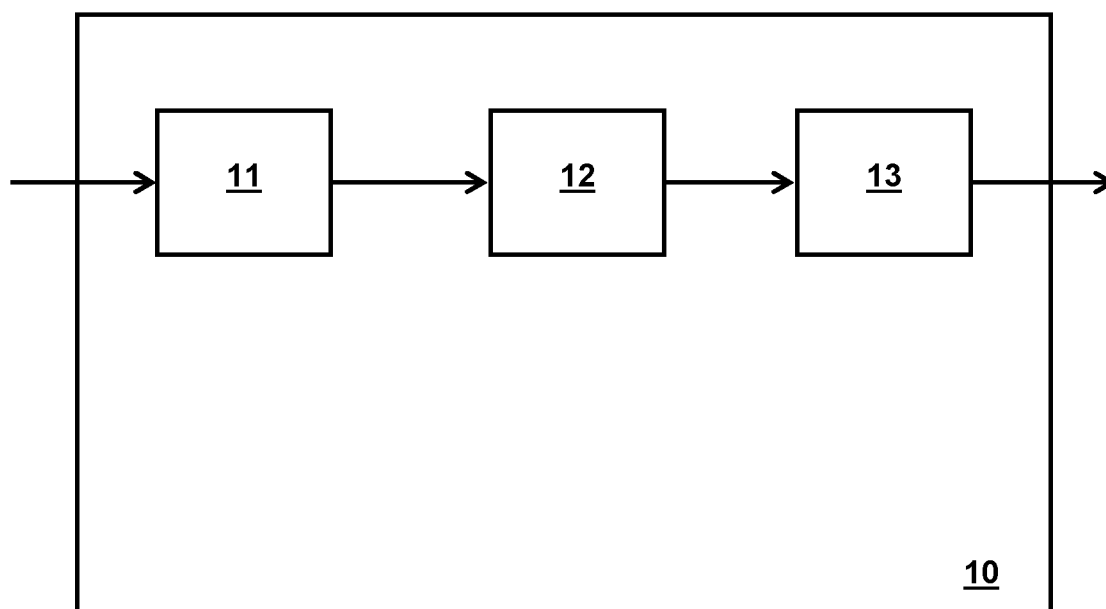


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2013/053185

A. CLASSIFICATION OF SUBJECT MATTER INV. G01S7/48 G01S11/04 G01S13/58 G01S13/60 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G01S		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EP0-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 479 585 A1 (FURUNO ELECTRIC CO [JP]) 25 July 2012 (2012-07-25) paragraph [0054]; figures 1-2 -----	1-13
X	US 2007/075893 A1 (FILIAS FRANCOIS XAVIER [FR] ET AL) 5 April 2007 (2007-04-05) paragraph [0108]; figures 1,11-12,15,18 -----	1-13
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 16 January 2014		Date of mailing of the international search report 31/01/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Shaa'an, Mohamed

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/GB2013/053185

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2479585	A1	25-07-2012	EP 2479585 A1	25-07-2012
			JP 2012154647 A	16-08-2012

US 2007075893	A1	05-04-2007	EP 1724592 A1	22-11-2006
			FR 2886020 A1	24-11-2006
			US 2007075893 A1	05-04-2007
