



(22) Date de dépôt/Filing Date: 2010/08/30

(41) Mise à la disp. pub./Open to Public Insp.: 2011/03/02

(30) Priorité/Priority: 2009/09/02 (US12/552,982)

(51) Cl.Int./Int.Cl. *B23Q 11/10* (2006.01)


(71) Demandeur/Applicant:
LOCKHEED MARTIN CORPORATION, US

(72) Inventeur/Inventor:
JENKINS, WILLIAM L., US

(74) Agent: FINLAYSON & SINGLEHURST

(54) Titre : ADAPATATEUR DE LIQUIDE DE REFROIDISSEMENT TRAVERSANT UN OUTIL POUR UN MOTEUR DE FOREUSE

(54) Title: THROUGH TOOL COOLANT ADAPTER FOR DRILLING MOTOR

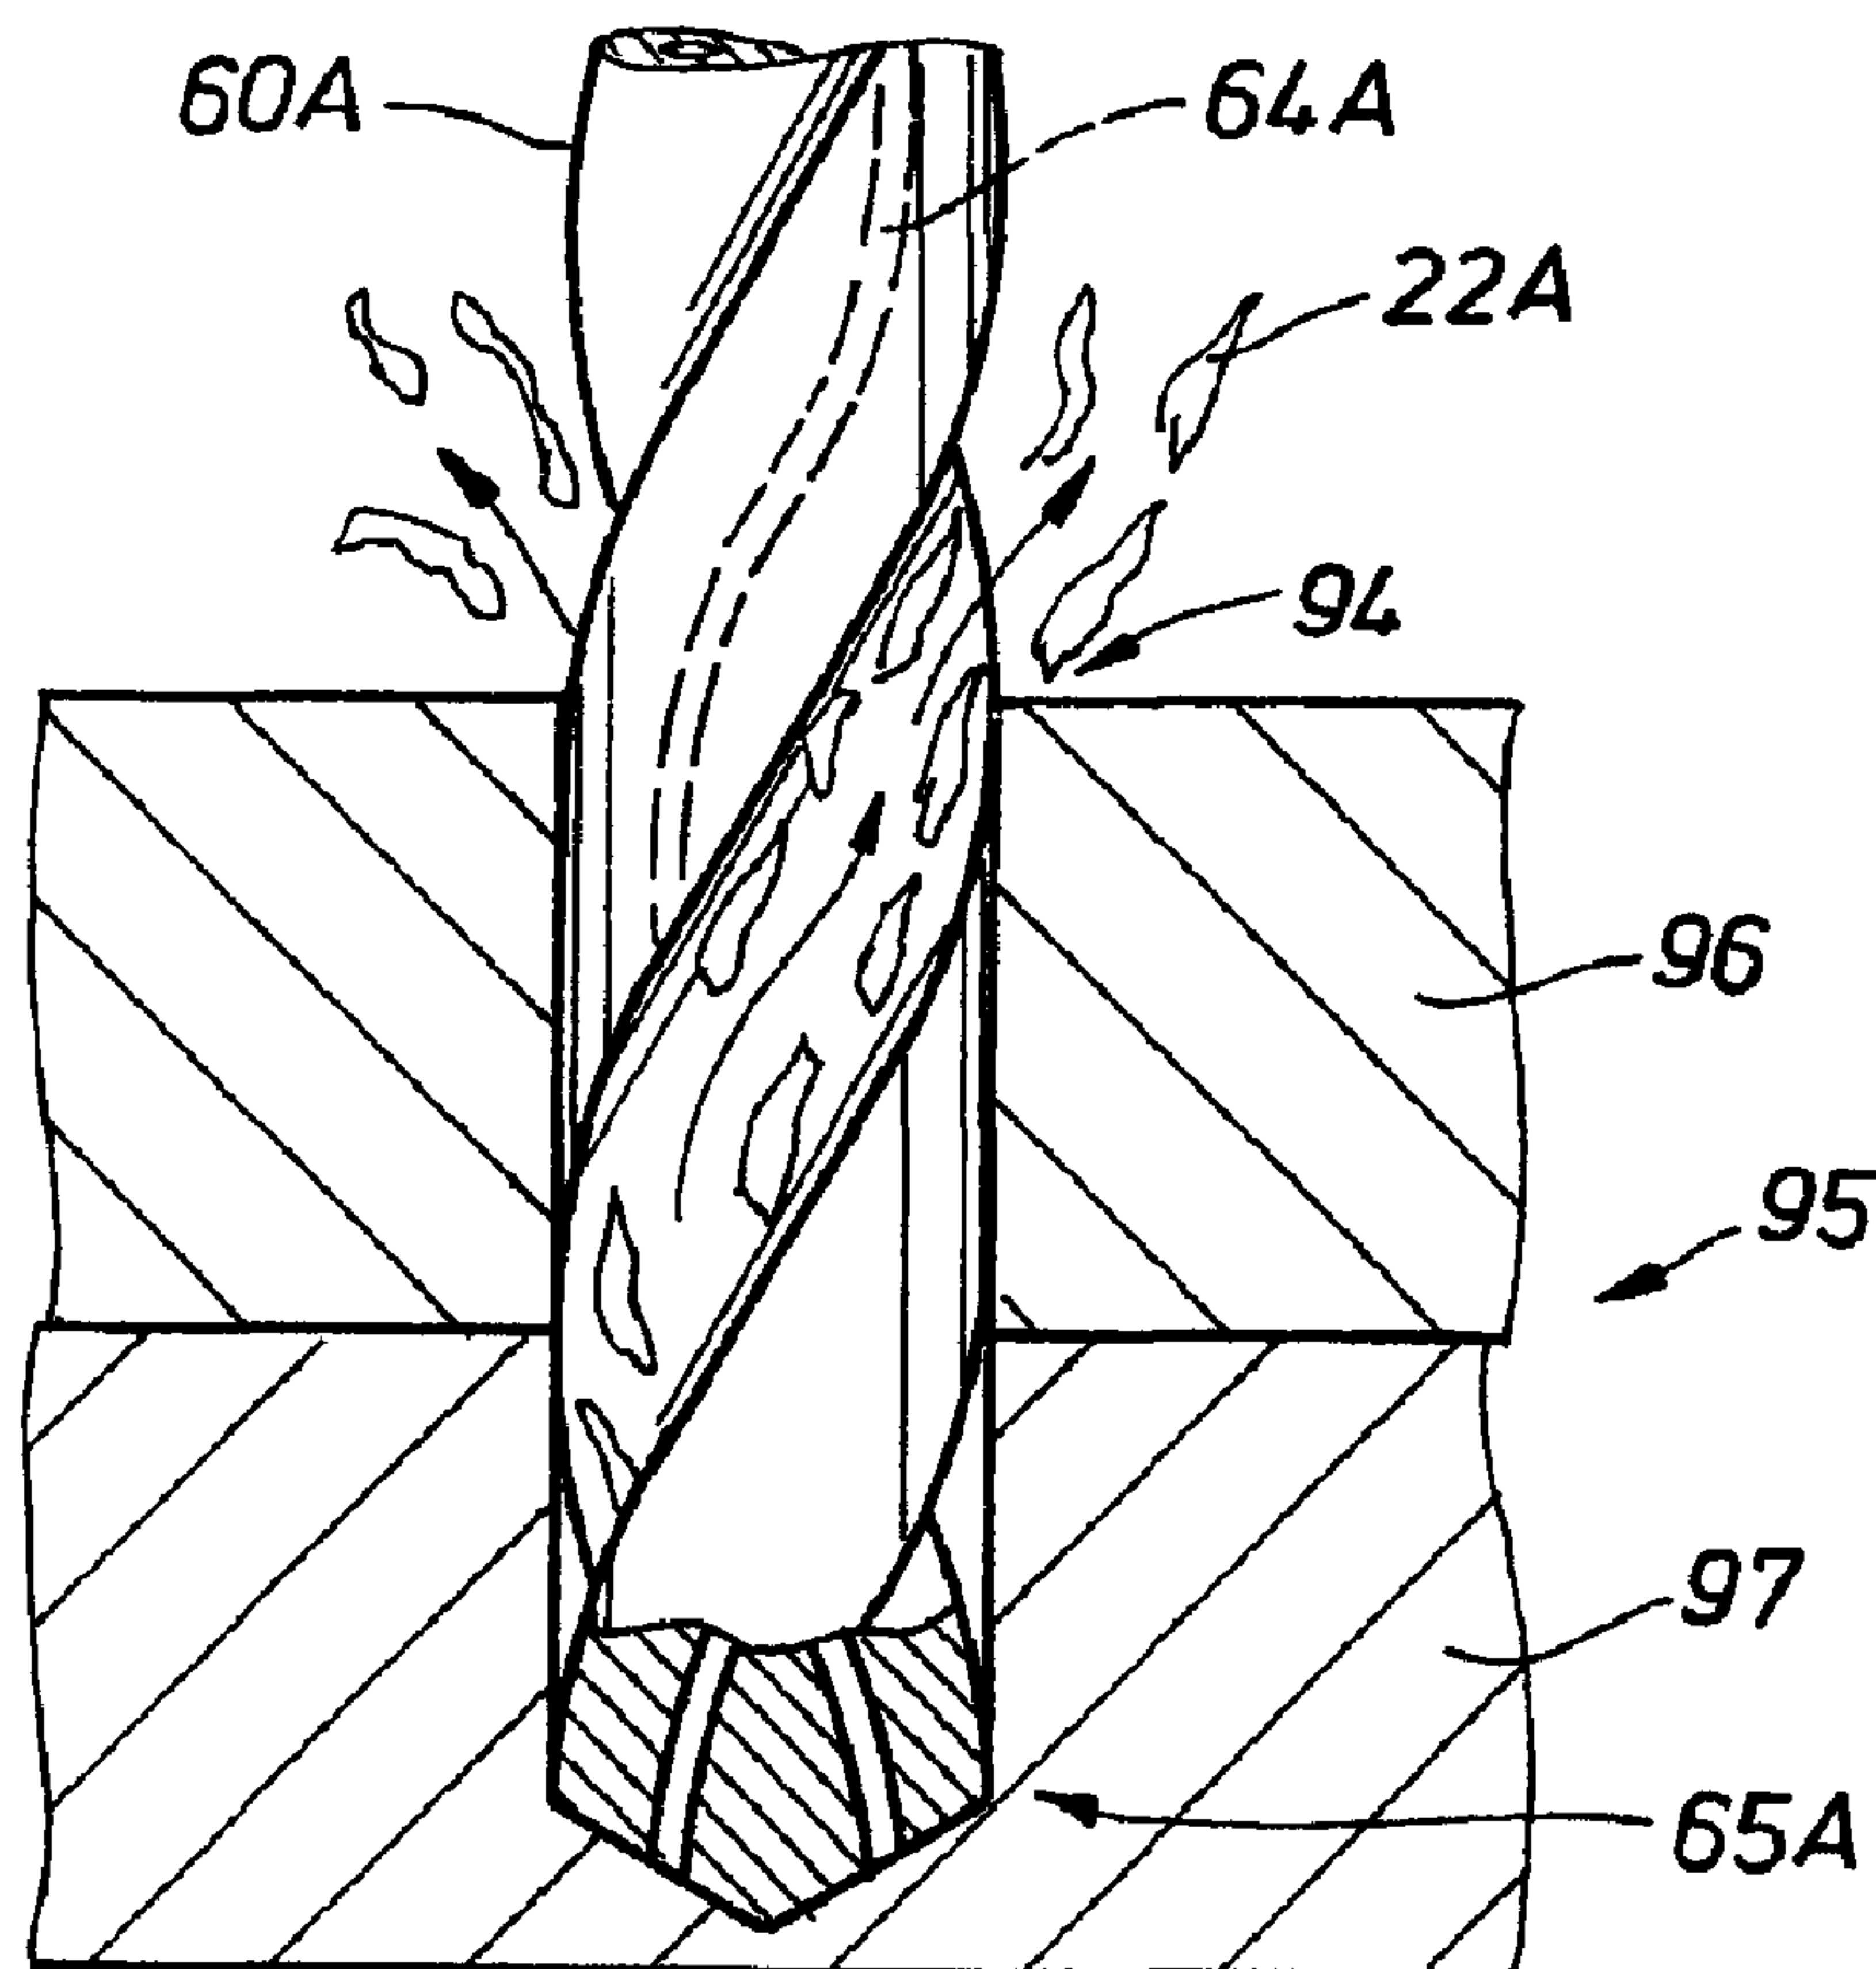

(57) Abrégé/Abstract:

A collet chuck for use in boring through a workpiece that provides a cooling and cleaning fluid to the element that is machining the workpiece. One end of the collet chuck is coupled to the drive end of a motor and its other end retains the machining element. The

(57) **Abrégé(suite)/Abstract(continued):**

motor provides a rotational force to the collet chuck and machining element used in machining the workpiece. The machining element, which can be a drill bit or reamer, includes an axial passage that communicates with an annulus in the chuck. The cooling/cleaning fluid flows into the annulus through a rotary seal that circumscribes the collet chuck.

ABSTRACT

A collet chuck for use in boring through a workpiece that provides a cooling and cleaning fluid to the element that is machining the workpiece. One end of the collet chuck is coupled to the drive end of a motor and its other end retains the machining element. The motor provides a rotational force to the collet chuck and machining element used in machining the workpiece. The machining element, which can be a drill bit or reamer, includes an axial passage that communicates with an annulus in the chuck. The cooling/cleaning fluid flows into the annulus through a rotary seal that circumscribes the collet chuck.

THROUGH TOOL COOLANT ADAPTER FOR DRILLING MOTOR

BACKGROUND

1. Field of Invention

[0001] The present disclosure relates generally to a system and method of delivering fluid through a machining element. More specifically, the present disclosure is directed to a tool adapted to receive a flow of cooling fluid into a machining element holder, that then flows through the machining element.

2. Description of Prior Art

[0002] Machining elements, such as drill bits, reamers, grinders, saws and like, that are used for machining through a workpiece typically remove particles of the material making up the workpiece. The removed particles can sometimes become wedged between the machining element and the portion of the workpiece being machined. This hinders machining efficiency since the particles may be machined a second time and also through possible additional heating of the machining element.

[0003] Machined particles can also become problematic when layers of different material make up the workpiece to be machined. As shown in Figure 1, a known example of machining is shown in a side partially sectional view. A drill bit 8 is illustrated forming a bore 10 through a laminated stack 12 of material layers 14, 16, 18, 20. Particles 22 formed during the machining step are illustrated exiting the bore 10 on top of the stack 12. After being removed from one of the layers 14, 16, 18, 20, the particles 22 can be pushed upward in the space between the drill 8 and bore 10, or within grooves 24 provided in the drill 8 surface. However, when machining two or more layers of material, particles 22 removed from the bore 10 may erode material of another layer and enlarge that layer's bore diameter. The increase in bore size from particle erosion may

exceed specified tolerance. Erosion can be especially pronounced when the layers 14, 16, 18, 20 are formed from different materials having different material properties, such as hardness, ductility, yield strength and the like. For example, if the material of layer 18 is harder than one or both of layers 14, 16, particles 22 machined from layer 18 can enlarge the bore 10 through layers 14, 16 through erosion when exiting the bore 10.

SUMMARY OF INVENTION

[0004] Disclosed herein is a tool for cooling a machining element during use and optionally, for removal of chips produced during machining. In one example the tool is for machining a workpiece and includes an annular seal assembly, a collet chuck inserted through the annular seal assembly and rotatable with respect to the seal assembly, an annulus in the collet chuck, a machining element affixed on an end of the collet chuck, a passage formed through the machining element, so that the end of the machining element opposite the collet chuck is in fluid communication with the annulus, a drive source coupled to an end of the collect chuck opposite the machining element, a housing circumscribing the seal assembly and a portion of the rotating drive source, and a fluid flow line extending through an opening in the housing and having an end at the seal assembly and in fluid communication with the annulus, so that fluid flowing through the fluid flow line into the annulus is flowable through the passage in the machining element.

[0005] Also disclosed is a system for machining workpieces that includes a drive source having a hand grip, a selectively rotatable and extendable drive shaft, and a housing circumscribing the drive shaft. Further included with the system is a collet chuck having an end coupled with the drive shaft, a machining element coupled in an end of the collet chuck opposite the drive shaft, a cutting surface on the machining element, a cavity in the collet chuck in fluid communication with a fluid flow, and a passage formed within the machining element having an end in fluid communication with the cavity and an end adjacent the cutting surface, so that fluid flow provided to the cavity flows through the passage and adjacent the cutting surface.

[0006] Another embodiment disclosed herein is a drill with a cooling system that includes a handheld drill motor, a drive shaft selectively rotatable and selectively extendable from the drill

motor, a bit holder having an end affixed to the drive shaft, a sealed cavity in the bit holder, a rotary seal circumscribing the bit holder having an outer diameter about twice the diameter of the bit holder, a supply of cooling fluid in fluid communication with the cavity, and a drill bit attached to the end of the bit holder opposite the drive shaft.

BRIEF DESCRIPTION OF DRAWINGS

[0007] Some of the features and benefits of the present invention having been stated, others will become apparent as the description proceeds when taken in conjunction with the accompanying drawings, in which:

[0008] FIG. 1 shows in a side partially sectional view a prior art example of drilling through a laminated stack of layers.

[0009] FIG. 2 illustrates a side partial sectional view of an example of a tool with an adapter for delivering a fluid flow through a machining element.

[0010] FIG. 3A schematically illustrates a side partially sectional view of a tool coupled with a machining element holder having a machining element.

[0011] FIG. 3B depicts in side partial sectional view an example of a machining element machining a workpiece.

[0012] FIG. 4 depicts in perspective view an example of a machining element.

[0013] It will be understood the improvement described herein is not limited to the embodiments provided. On the contrary, the present disclosure is intended to cover all alternatives, modifications, and equivalents, as may be included within the spirit and scope of the improvement as defined by the appended claims.

DETAILED DESCRIPTION OF INVENTION

[0014] The improvement(s) of the present disclosure will now be described more fully hereinafter with reference to the accompanying drawings in which disclosed embodiments are shown. The disclosed improvement(s) may, however, be embodied in many different forms and should not be construed as limited to the illustrated embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Like numbers refer to like elements throughout.

[0015] It is to be understood that the improvement(s) described herein is not limited to the exact details of construction, operation, exact materials, or embodiments shown and described, as modifications and equivalents will be apparent to one skilled in the art. In the drawings and specification, there have been disclosed illustrative embodiments and, although specific terms are employed, they are used in a generic and descriptive sense only and not for the purpose of limitation. Accordingly, applicants' improvement(s) is therefore to be limited only by the scope of the appended claims.

[0016] FIG 2 provides in a side partial sectional view, an example of a tool assembly 40 for machining a workpiece that includes a system for delivering a cooling fluid through a machining element. In the example of FIG 2, the tool assembly includes a drive source 42 schematically illustrated as selectively providing a rotating force onto the machining element. In this example the rotating force is represented by the arrow A_1 . Drive source 42 may also selectively provide an axial force, which is represented by arrow A_2 . Extending from an end of the rotating source 42 is a spindle 44 for transferring the rotating and/or axial force to other components within the

tool assembly 40. A housing 46 is shown circumscribing the drive source 42 and extending up at least with the terminal end of the spindle 44.

[0017] Coupled on the spindle 44 is a collet chuck 48 shown having an elongated body 50. A receptacle 52 is formed to receive the spindle 44 therein. The receptacle 52 is provided on the end of the body 50 adjacent the drive source 42. The coupling between the spindle 44 and the receptacle 52 may include threads, splines, pins, or any other known way of fastening mechanical members. The receptacle 52 terminates at a bulkhead 54, which defines a substantially solid portion of the body 50. A cavity 56 is within the body 50 on the side of the bulkhead 54 opposite the receptacle 52. Cavity 56 has an elongate side oriented along the direction of the tool axis A_x . The cavity 56 as shown in FIG 2 extends from the bulkhead 54 through the remaining length of the body 50 to define an open end 58 on the side of the body 50 opposite the receptacle 52.

[0018] A machining element 60, such as a drill bit, is shown attached to the body 50 and aligned substantially parallel with the axis A_x . A collet nut 62 is affixed on the open end 58 having an aperture 61 through its mid-section in which a shank of the machining element 60 is retained and affixed to the collet chuck 48. The machining element 60 as shown in FIG 2 can be any type of device for boring through or machining a workpiece. Examples include a drill bit, a reamer, a grinder, and the like. In one embodiment the machining element 60 is a drill bit with ridges or flutes along its outer surface. A passage 64 is illustrated formed axially through the machining element 60 that provides fluid communication between the cavity 56 and the cutting surface 65 of the machining element 60.

[0019] An optional connector 68 is shown attached on the terminal end of the drive source housing 46. In another embodiment, the drive source housing 46 may encompass the collet chuck 48 in place of the connector 68. The connector 68 circumscribes a portion of the collet chuck 48 and shown as a generally annular member. Alternatively, the connector 68 may not fully circumscribe the collet chuck 48, but instead may be one or more elongated elements extending from the drive source housing 46 along the tool axis A_x . In the embodiment shown, an elongated slot 69 is provided through a wall of the connector 68; with the slot's 69 elongate length substantially aligned with the tool axis A_x . A fluid flow line 70 is shown in sectional view extending through the slot 69 and into fluid communication with the cavity 56.

[0020] Circumscribing the collet chuck 48 is a rotary seal assembly 74 that facilitates coupling between the flow line 70 and cavity 56. As shown, the seal assembly 74 includes a sleeve-like annular body and is positioned adjacent the bulkhead 54. The bulkhead 54 outer diameter is greater than the collet chuck 48 diameter over which the sleeve body 76 is disposed, thereby providing a shoulder against which the sleeve 76 is set. Bearings 78, which may optionally be sealed ball, roller, or needle bearings, are provided between the sleeve 76 and collet chuck 48. Thus, the sleeve 76 may remain substantially stationary as the collet chuck 48 rotates. The sealed bearings 78 also form a pressure barrier between the collet chuck 48 and sleeve body 76. Grooves 79 are shown provided in the sleeve 76 inner surface and configured to receive the bearings 78 therein. Snap rings 80 are set into recesses in the sleeve 76 inner surface and retain the bearings 78 within the grooves 79. The seal assembly 74 is kept in place by an annular retention nut 82 shown coaxially circumscribing the collet chuck body 50 on a side of the seal assembly 74 opposite the bulkhead 54. The retention nut 82 is attached to the collet chuck body 50, such as by corresponding threads. An inner radial portion of the retention nut 82 applies an

axial force against the bearings' 78 race adjacent the chuck 48 body, but is out of contact with the bearings' 78 race adjacent the sleeve body 76. Thus the bearings' 78 race adjacent the collet chuck 48 rotates along with collet chuck 48 rotation. Whereas the bearings' 78 race adjacent the sleeve 76, can remain stationary. An optional washer 83 may be provided between the retention nut 82 and the bearings' 78 race adjacent the collet chuck 48 for transferring the axial force between the nut 82 and bearings 78.

[0021] Radially formed through the non-rotating sleeve body 76 is a port 84 on which the flow line 70 is attached. A gallery annulus 88 is shown circumscribing the rotatable collet chuck body 50 beneath the seal assembly 74. Therefore the port 84 registers with the annulus 88 during full rotation of the collet chuck 48. One or more openings 86 are formed through the collet chuck body 50 between the annulus 88 and cavity 56. The opening(s) 86 provide fluid communication between the annulus 88 and the cavity 56 so that fluid flowing through the flow line 70 and port 84 can freely flow into the cavity 56. Accordingly, introducing fluid into the cavity 56 causes fluid to flow through the passage 64 and exit the machining element 60 proximate the cutting surface 65. The fluid removes thermal energy within the machining element 60 due to machining or other sources. Moreover, after the fluid flow exits the passage 64, it becomes a cleaning source by sweeping away machined particles in its flow stream and moves them away from the cutting surface. This eliminates the low efficiency of machining the same piece of material twice and can also significantly reduce the chances of a harder particle eroding a softer material.

[0022] An optional nosepiece 66 is shown included with the tool assembly 40 of FIG 2. As shown, the nosepiece 66 is an outer housing circumscribing a portion of the collet chuck 48 and machining element 60. Embodiments include a housing 46 that extends along the length of the

collet chuck and past the machining element 60. Although shown as having a reduced diameter that transitions along the length of the machining element 60, the nosepiece 66 can have a consistent diameter or contoured at a slope or angle. In the configuration shown in FIG 2, the tool assembly 40 is in a retracted mode; forward movement of the machining element 60 can initiate machining a workpiece. Thus, in embodiments wherein the drive source 42 provides an axial force as represented by arrow A₂, the collet chuck 48 is moved along the assembly 40 axis so that the machining element 60 is pushed past the edge of the nosepiece 66 and through its corresponding opening 77 to contact and machine a workpiece. The elongated slot 69 provides a length of lateral travel for the flow line 70 so it can move unimpeded by the connector 68. An optional coupling 75 is shown adjacent the opening 77. In the embodiment of FIG 2, the coupling 75 is a bayonet or J-type slot (not shown) in which a corresponding coupling provided on the workpiece is received. After receiving the insertable portion of the workpiece coupling in the slot of the coupling 75, the nosepiece 66 can be rotated to align that portion in the coupling 75 slot bottom. In one example of use, the drive source 42 is a movable and/or hand held device that can be remotely applied to various machining operations.

[0023] Referring now to FIG 3A, a side schematical view of an alternative tool assembly 40A is provided in a partial sectional view. In this embodiment, the drive source 42A is a hand held drill-type motor that includes a handle 43 for gripping by its user. Schematically represented on the handle 43 is a control module 45 by which operation of the drive source 42 may be facilitated. This control module 45 can include on/off switches as well as directional controls for rotating the spindle 44A as represented by arrow A₁ or reciprocating the spindle 44A as represented by arrow A₂. The power, force, and/or speed of the spindle 44A can optionally be set using the control module 45. Examples of drive sources may be found in Born, U.S. Patent

No. 6,575,673 and Krause et al, U.S. Patent No. 7,303,363, assigned to assignee of the present application, the entire contents of which are referenced for incorporation herein in their entireties.

[0024] As noted above, the spindle 44A is coupled with the collet chuck 48 via a receptacle 52A and the chuck body 50A. Therefore, rotational and/or axial movement of the spindle 44A is imparted to the collet chuck 48A and on to the machining element 60A. A fluid supply 71 is provided in the embodiment of FIG 3A and is schematically illustrated attached to the fluid supply line 70A. As noted by the arrows in the cavity 56A, fluid flow supplied by the fluid supply is forced through the fluid supply line 70A and into the cavity 56A, where it can then flow through the passage 64A and the machining element 60A. As described above, the rotary seal 74A enables a side injection of the cooling and cleaning fluid into the collet chuck 48A, even as the collet chuck is rotating and/or axially moving within the housings 46A, 68A, 66A. In the embodiment of FIG 3A, the drive source 42A may be operable by a pressurized fluid, such as a pneumatic source. Thus in an optional embodiment, a pneumatic supply line 73 is shown connecting the drive source 42A with the fluid supply 71. Therefore the fluid supply 71 in this alternative embodiment can operate the drive source 42A and also provide a cooling and cleaning fluid flow for a machining operation of the tool assembly 40A. The fluid delivered to the chuck 48 can include liquids, gas, such as air, nitrogen, two-phase fluids, and combinations thereof. In one example, the fluid is a water based fluid containing a rust inhibitor, that can be synthetic or oil based. Fluids for cooling, lubricating, or both can be included.

[0025] As shown, the nosepiece 66A is coupled with a template-like drill plate 90 on which a coupling 92 is provided that is configured to mate with a coupling 75A provided on the nosepiece 66A. The drill plate 90 is attached to a workpiece 95 that is to be machined using the

tool assembly 40A. Therefore the coupling 92 is strategically placed so that by extending the machining element 60A as aligned per the respective couplings 75A, 92, a corresponding drill hole 94 can be formed through the workpiece 95. An optional pilot hole 93 is provided in the drill plate 90 through which the machining element 64A can pass.

[0026] A detailed example of a drill hole 94 being formed in the workpiece 95 is shown in a side partially sectional view in FIG 3B. As shown, the machine element 60A, shown as a drill bit or auger, has penetrated the surface of the workpiece 95 and extended into layers 96, 97 making up a portion of the workpiece 95. Particles 22A are formed as the machining element 60A removes portions of material from the layers 96, 97 of the workpiece 95. However, rather than residing along the cutting surface 65A at the bottom of the drill hole 94, the particles 22A are removed from the drill hole 94 by the fluid flow exiting the passage 64A. Therefore, in situations where layer 96 is made of a material softer than the material of layer 97, the particle 22A from machining layer 97 will not erode or portions of layer 96 thereby increasing the drill hole 94 diameter within layer 96.

[0027] An alternative machining element 60B is illustrated in perspective view in FIG 4. In this example, the machining element 60B resembles a circular saw having a saw blade 85 transversely mounted on a shaft 87. A passage 64B is formed through the shaft 87 that then registers with passages 63 (shown in dashed outline) formed within the blade 85. Exit ports 67 are provided along the blade 85 have a periphery to allow an exit port for any fluid inserted or injected within the passage 64B.

[0028] The present system and method described herein, therefore, is well adapted to carry out the objects and attain the ends and advantages mentioned, as well as others inherent therein.

While a presently preferred embodiment has been given for purposes of disclosure, numerous changes exist in the details of procedures for accomplishing the desired results. These and other similar modifications will readily suggest themselves to those skilled in the art, and are intended to be encompassed within the spirit of the present disclosure and the scope of the appended claims.

CLAIMS

What is claimed is.

1. A tool for machining a workpiece comprising:
 - a chuck within a housing and rotatable with respect to the housing;
 - a cavity in the chuck;
 - a machining element affixed on an end of the chuck;
 - a passage formed through the machining element, so that an end of the machining element opposite the chuck is in fluid communication with the cavity;
 - a drive source coupled to an end of the chuck opposite the machining element;
 - and
 - a fluid flow line extending through an opening in the housing and having an end and in fluid communication with the cavity, so that fluid flowing through the fluid flow line into the cavity is flowable through the passage in the machining element.
2. The tool of claim 1, further comprising a seal ring non-rotatably mounted around a portion of the chuck, the seal ring having a port connected to the end of the fluid flow line.
3. The tool of claim 1, further comprising a spindle extending from the drive source into coupling engagement with a recess formed on an end of the collect chuck.
4. The tool of claim 1, further comprising an annulus defined by a space between a housing inner surface and chuck.

5. The tool of claim 1, wherein the opening through the housing for the fluid flow line comprises a slot having an elongate side oriented substantially in line with a housing axis.
6. The tool of claim 1, further comprising an opening on the end of the housing opposite the drive source and a coupling provided on the opening engagable with an anchoring coupling.
7. The tool of claim 6, wherein the machining element is selectively moveable through the opening.
8. The tool of claim 1, wherein the drive source selectively exerts a rotatable force onto the collect chuck that is transferable to the machining element.
9. The tool of claim 8, wherein the drive source selectively exerts an axial pushing force onto the collect chuck that is transferable to the machining element.
10. A system for machining workpieces comprising:
 - a drive source comprising:
 - a hand grip;
 - a selectively rotatable and a drive shaft that is axially extendable along a drive shaft axis; and
 - a housing circumscribing the drive shaft;
 - a collet chuck having an end coupled with the drive shaft, so that when the drive shaft rotates the collet chuck rotates and when the drive shaft axially extends the collet chuck axially extends;
 - a machining element coupled in an end of the collet chuck opposite the drive shaft;
 - a cutting surface on the machining element;




a cavity in the collet chuck in fluid communication with a fluid flow; and

a passage formed within the machining element having an end in fluid communication with the cavity and an end adjacent the cutting surface, so that fluid flow provided to the cavity flows through the passage and adjacent the cutting surface.

11. The system of claim 10, further comprising a control module on the hand grip.
12. The system of claim 10, further comprising an annular rotary seal circumscribing the collet chuck, an opening formed laterally through the collet chuck between the cavity and the rotary seal, a port formed through the rotary seal registerable with the opening, and a fluid line having an end connected to the port and an opposite end connected to a fluid supply.
13. The system of claim 12, further comprising a slot in the housing having an elongate end generally aligned with the housing axis, wherein the fluid line passes through the slot.
14. The system of claim 10, further comprising an opening on an end of the housing opposite the drive source and a coupling formed on the housing adjacent the opening.
15. The system of claim 14, wherein the coupling is adapted for engagement with a plate template and the machining element is selected from the list consisting of a drill and a reamer.
16. The system of claim 10, wherein the drive source is controllable so that the drive shaft feed rate is regulated.
17. The system of claim 10, further comprising a pneumatic supply in fluid communication with the fluid flow and the drive source, so that the drive source is pneumatically powered.

18. A drill having a cooling system comprising:
- a handheld drill motor;
 - a drive shaft selectively rotatable and selectively extendable from the drill motor along an axis of the drive shaft;
 - a bit holder having an end affixed to the drive shaft;
 - a sealed cavity in the bit holder;
 - a rotary seal circumscribing the bit holder having an outer diameter greater than the diameter of the bit holder, so that when the bit holder rotates the rotary seal is non-rotating and when the bit holder axially moves, the rotary seal axially moves with the bit holder;
 - a flow port formed laterally through the seal and bit holder and a cooling fluid line having an end connected to the flow port;
 - an outer housing circumscribing the drive shaft and bit holder and an elongated slot in the outer housing formed to receiving the cooling fluid line therethrough;
 - a supply of cooling fluid in fluid communication with the cavity;
 - a drill bit attached to the end of the bit holder opposite the drive shaft; and
 - a passage through the drill bit;.
19. The drill of claim 18, wherein the cooling fluid line exits through the slot into engagement with flow port and moves in unison with the seal and relative to the housing as the seal moves axially.
20. The drill bit further comprising a gallery annulus in the bit holder that registers with the port in the seal.

1/3

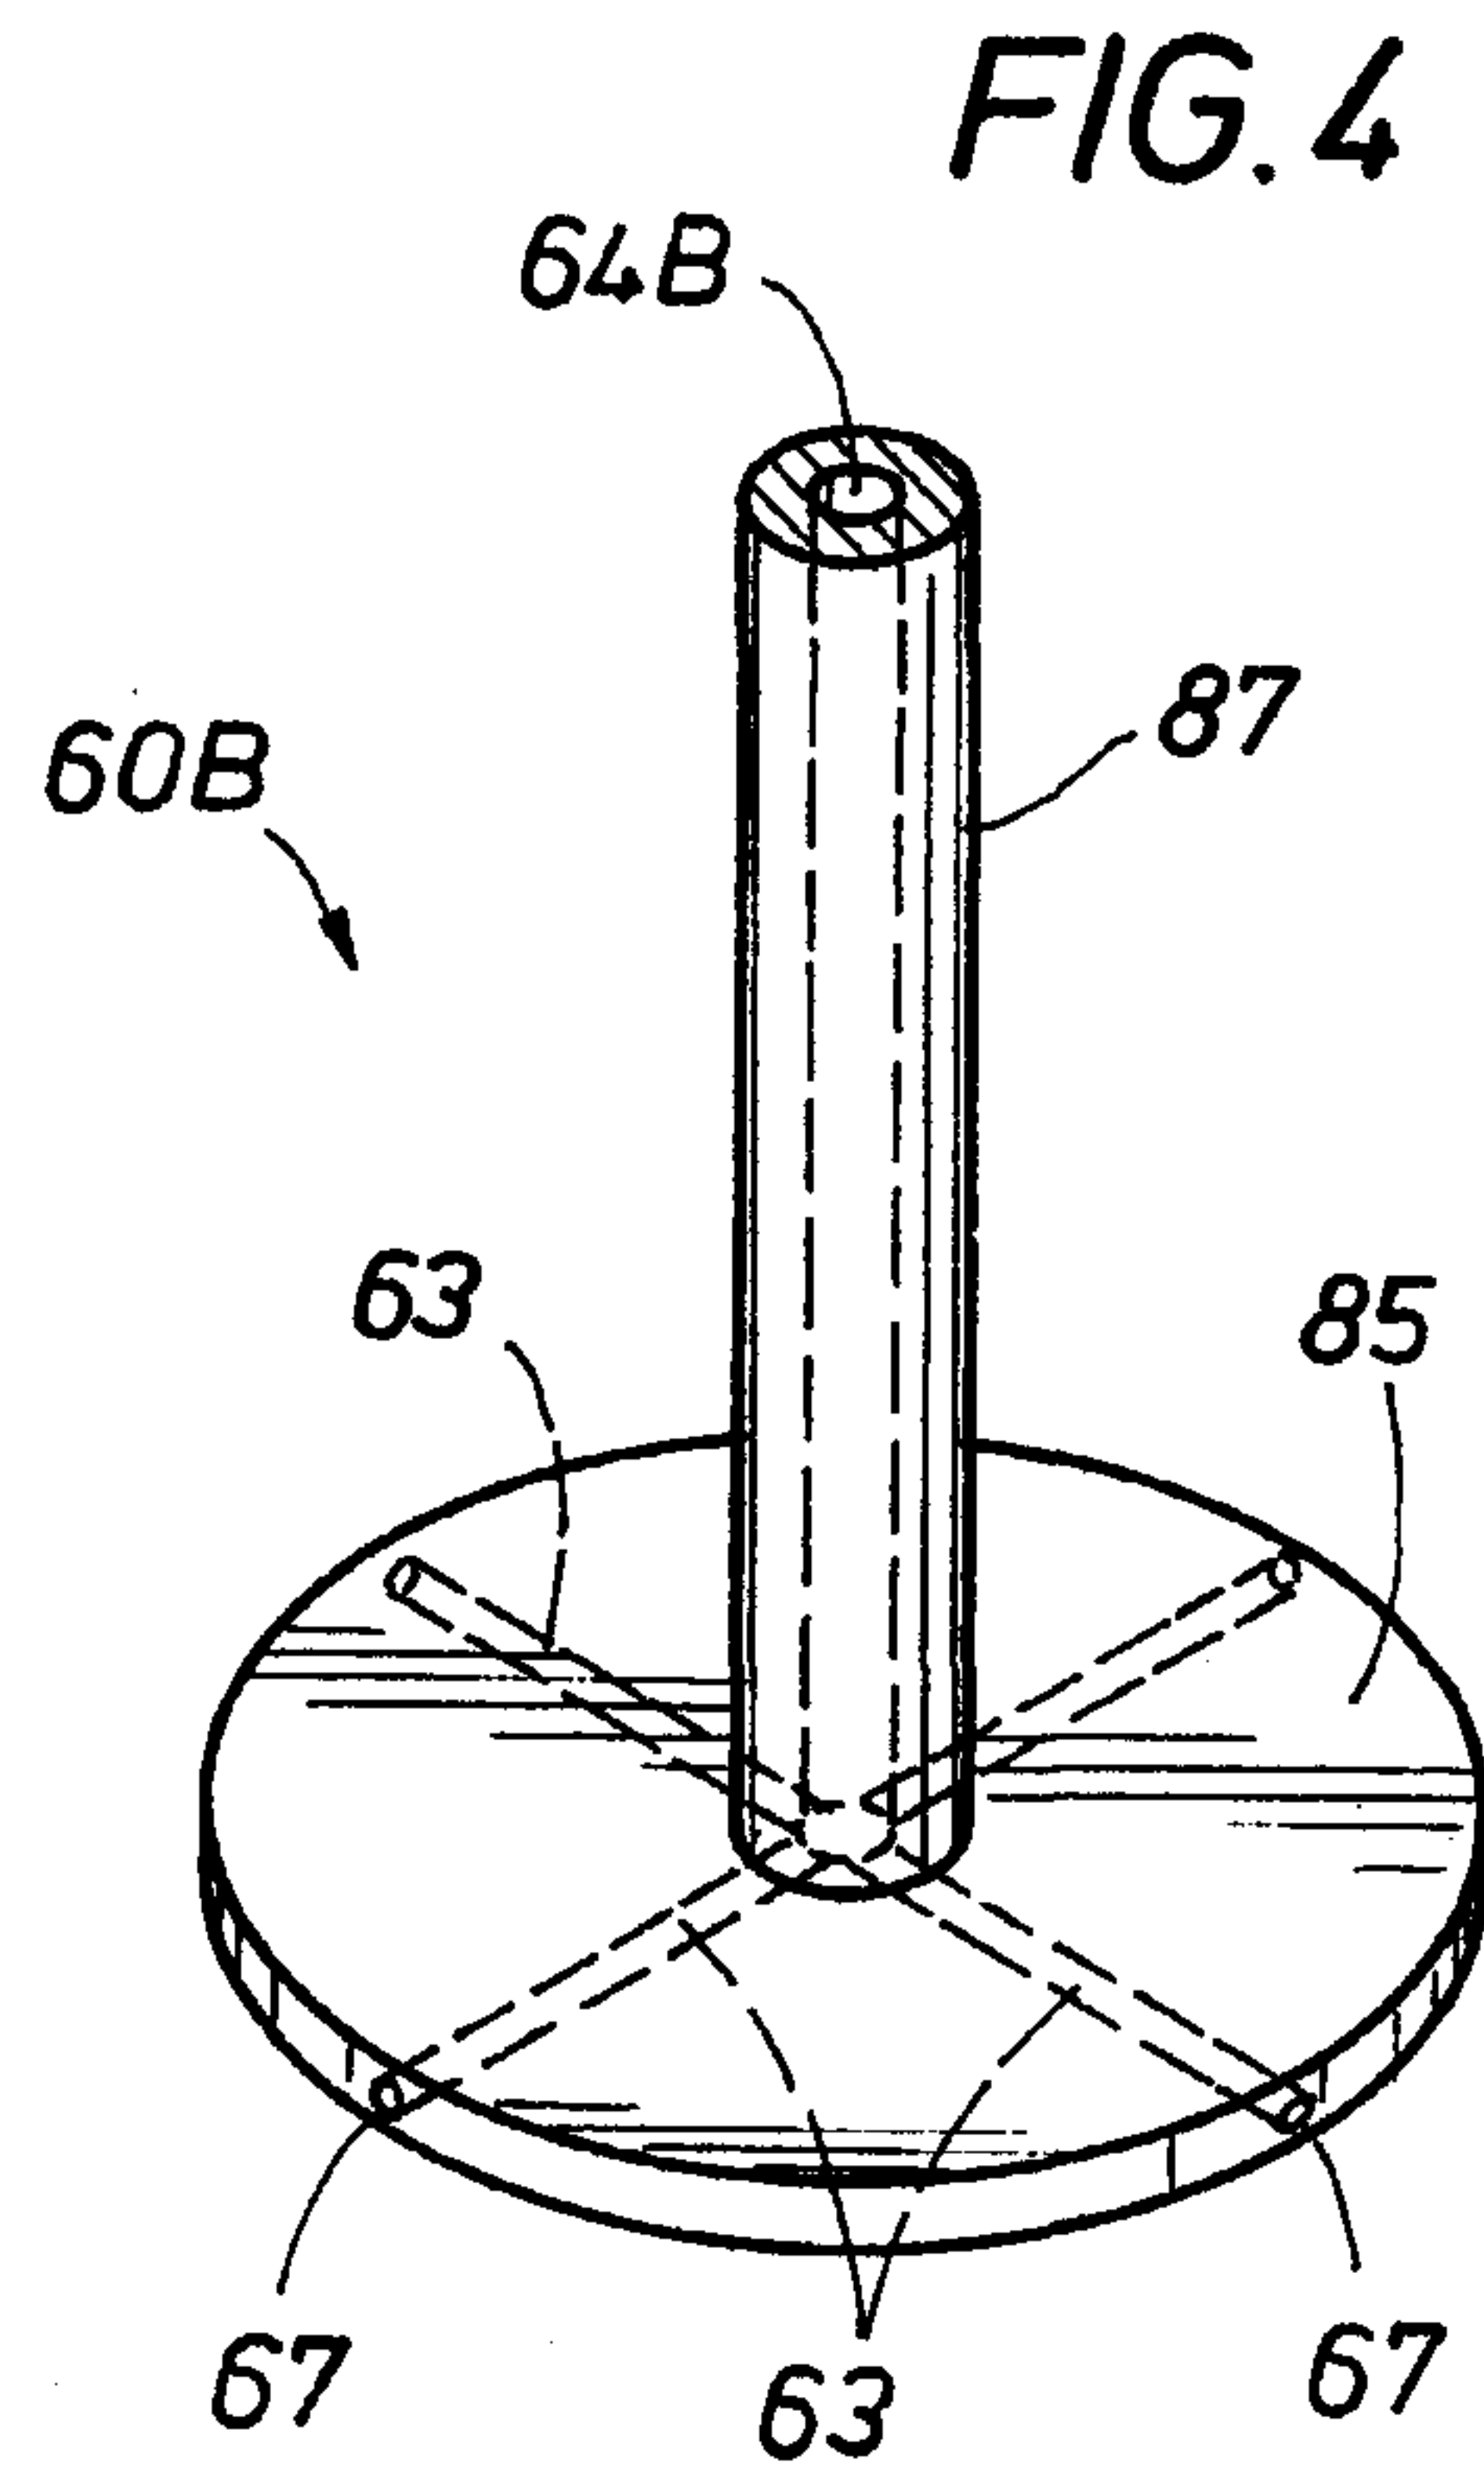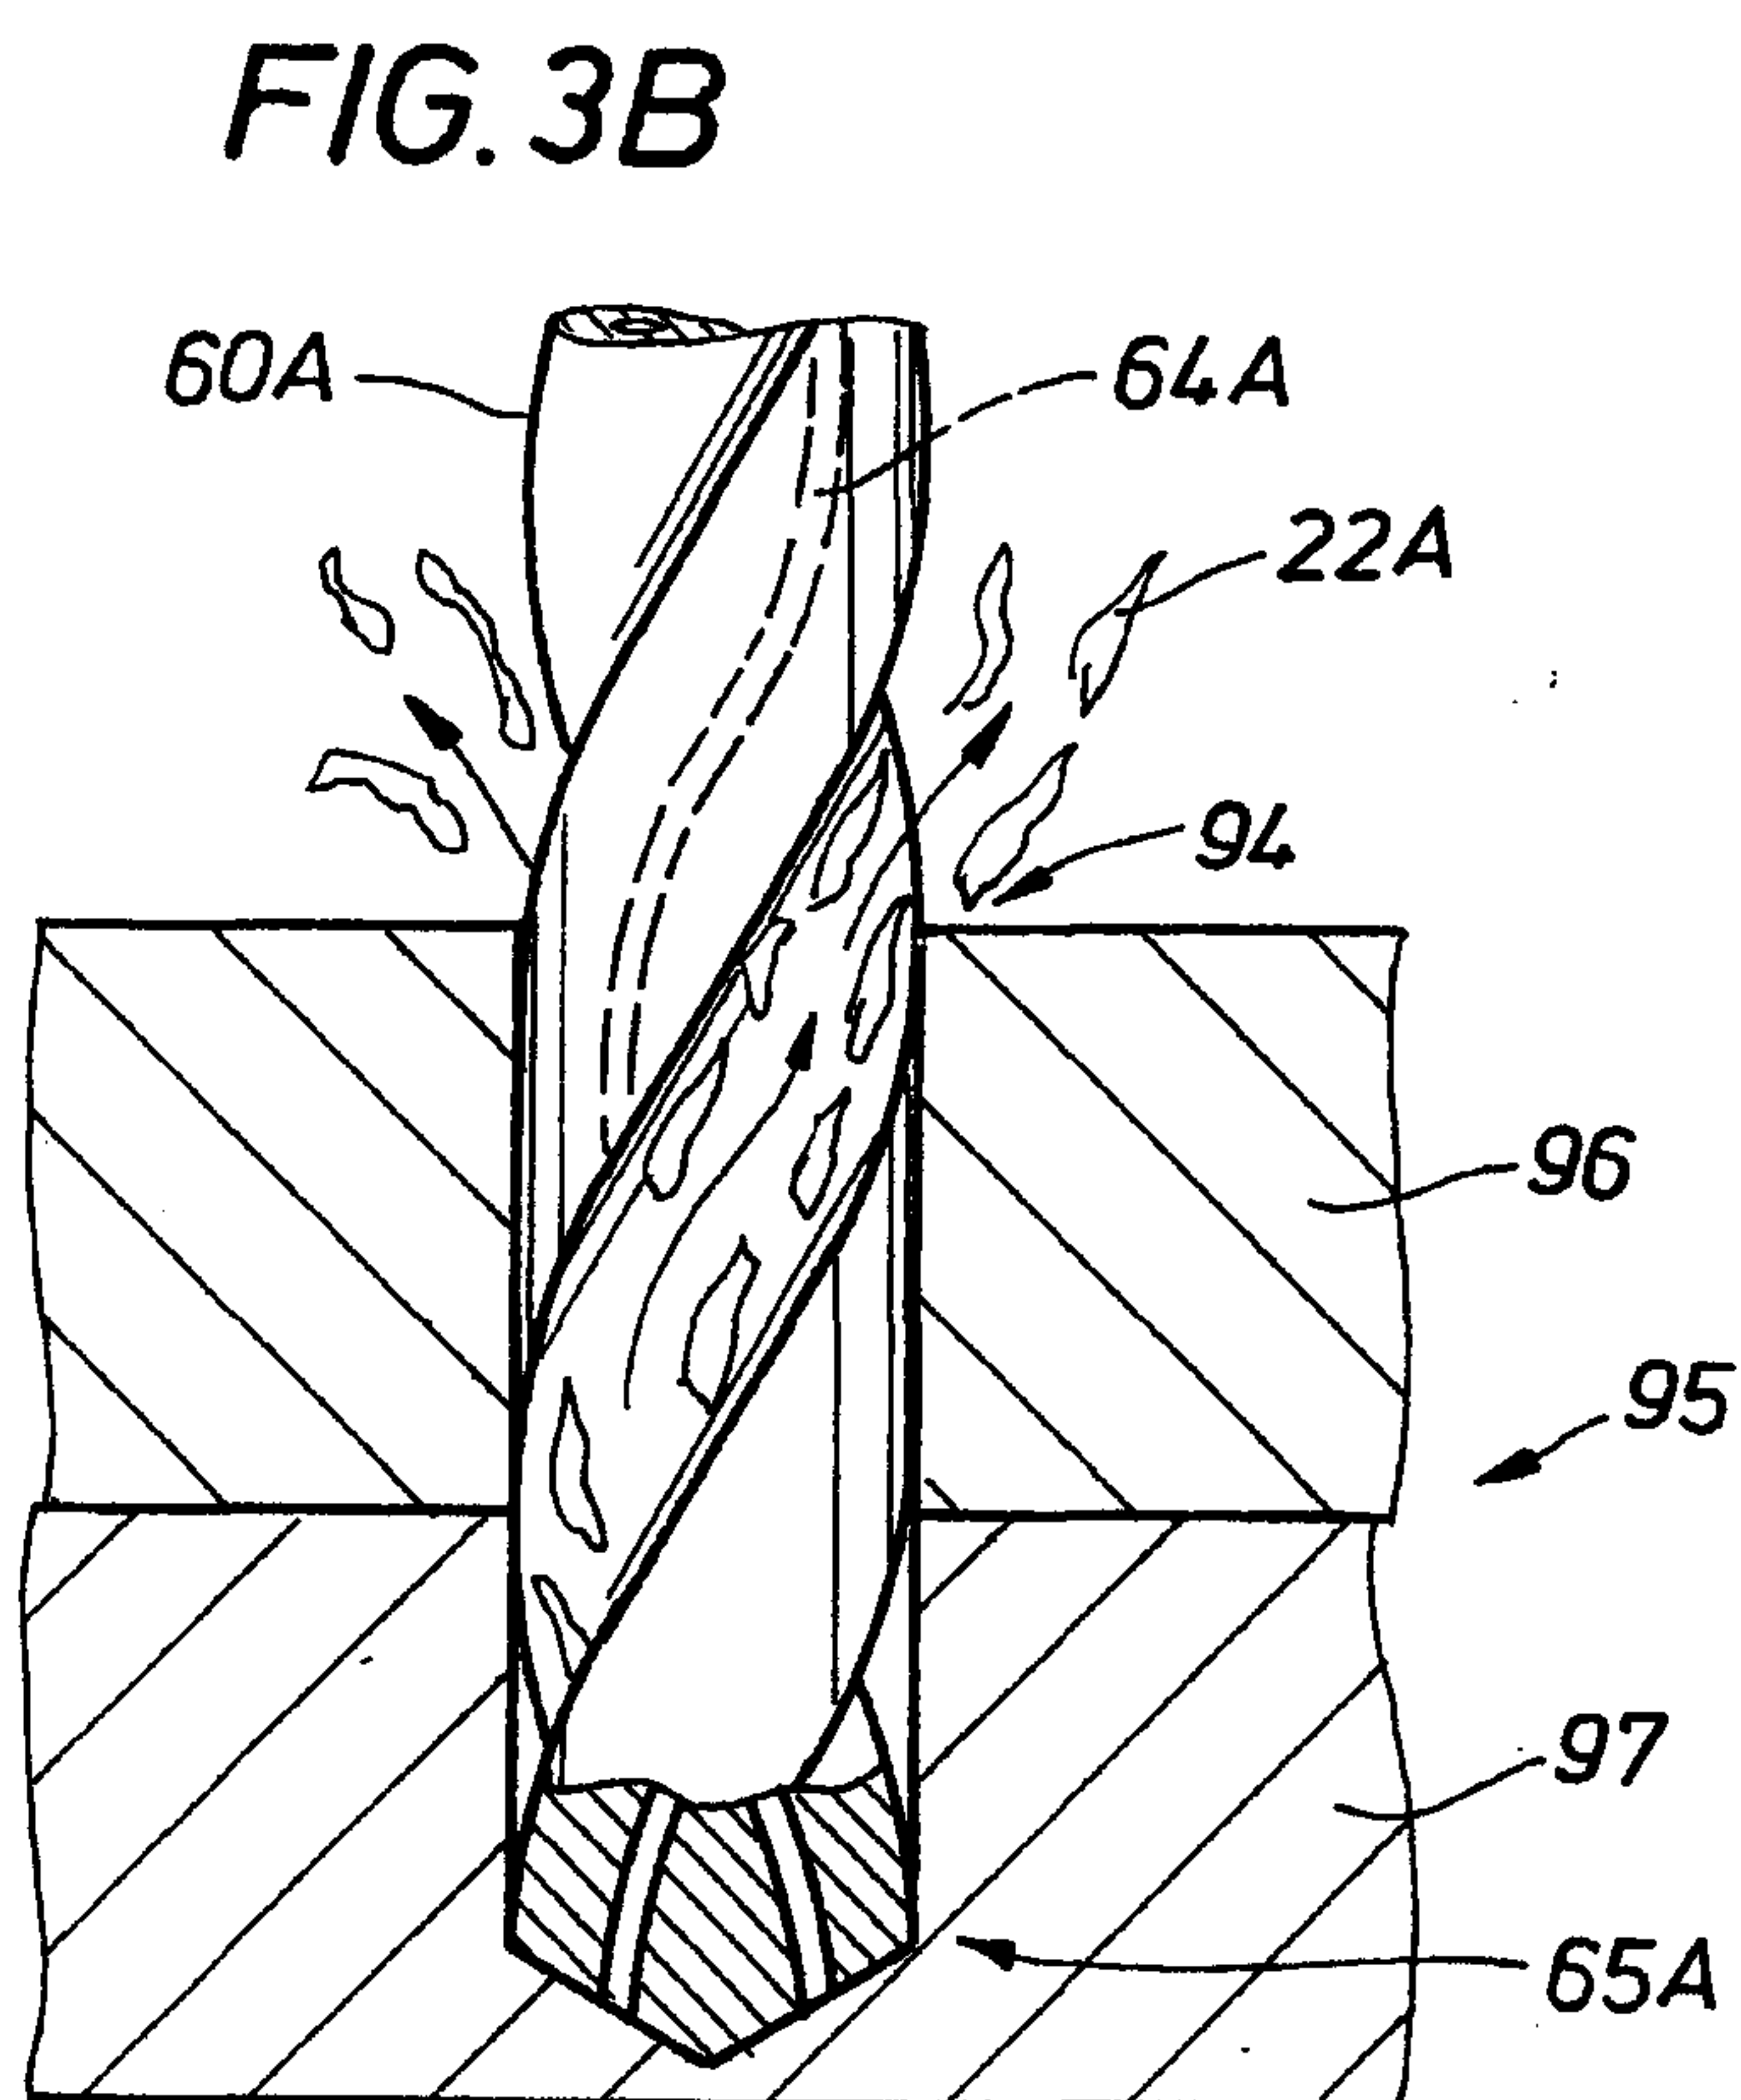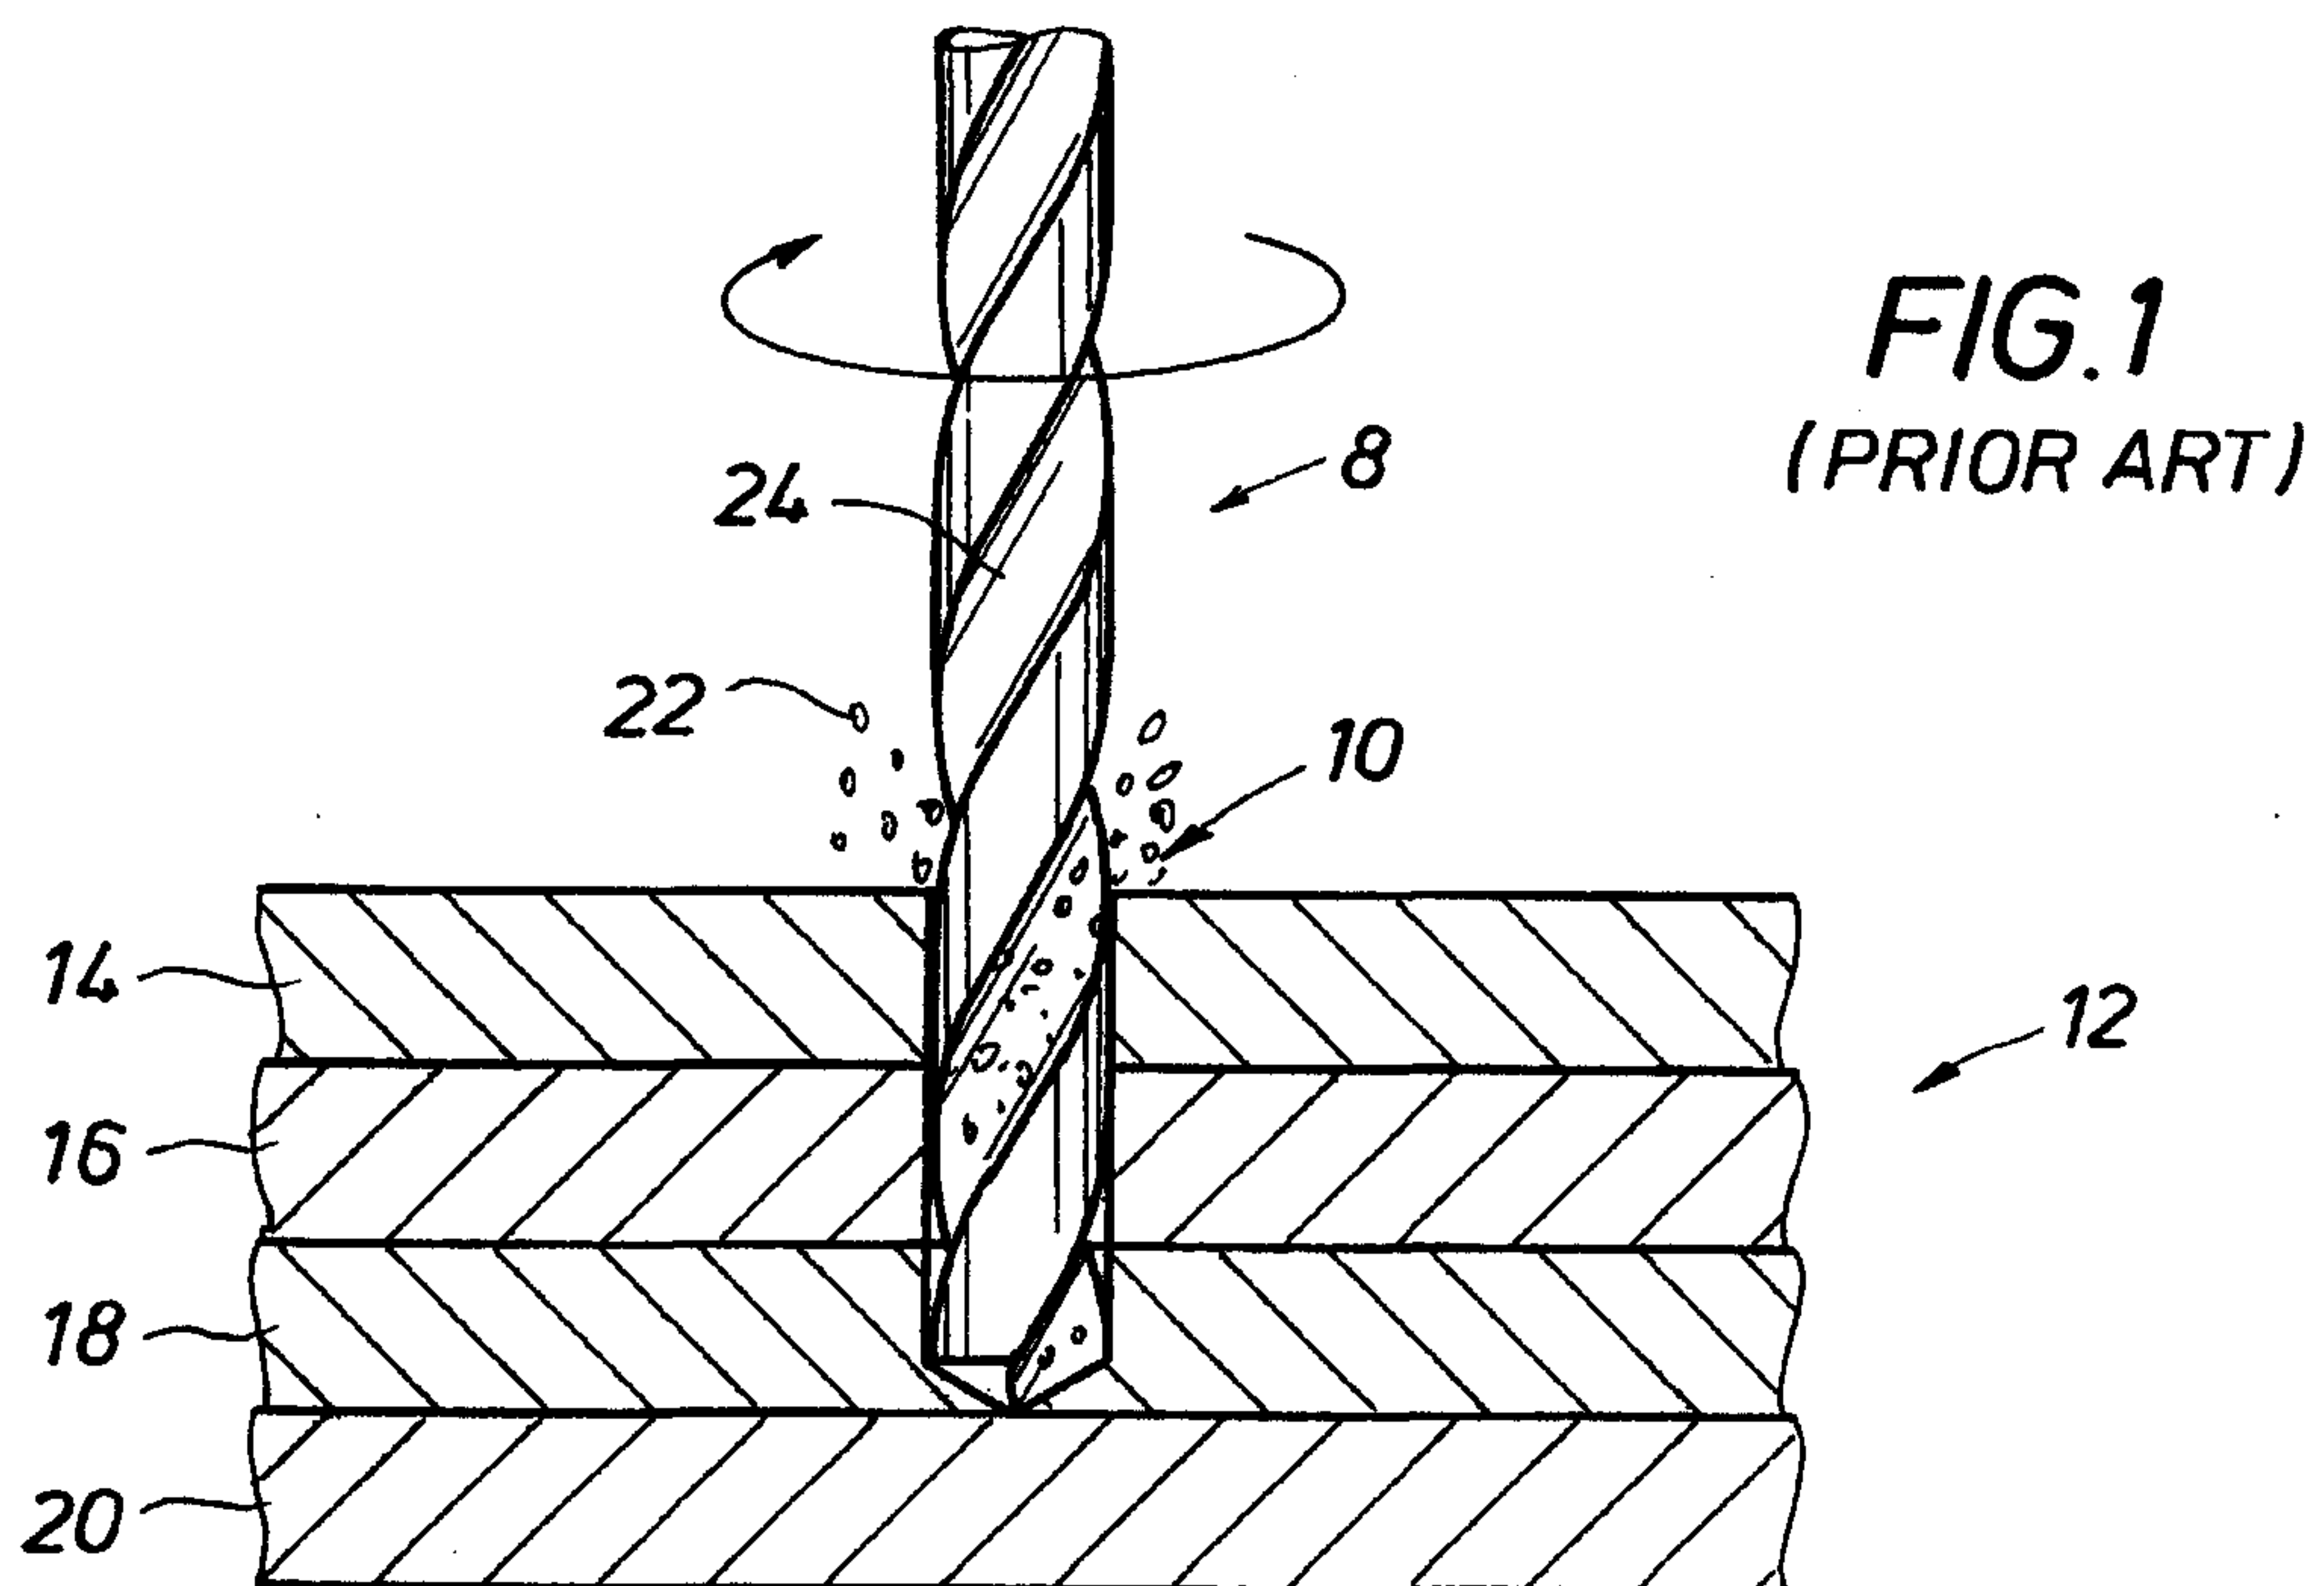

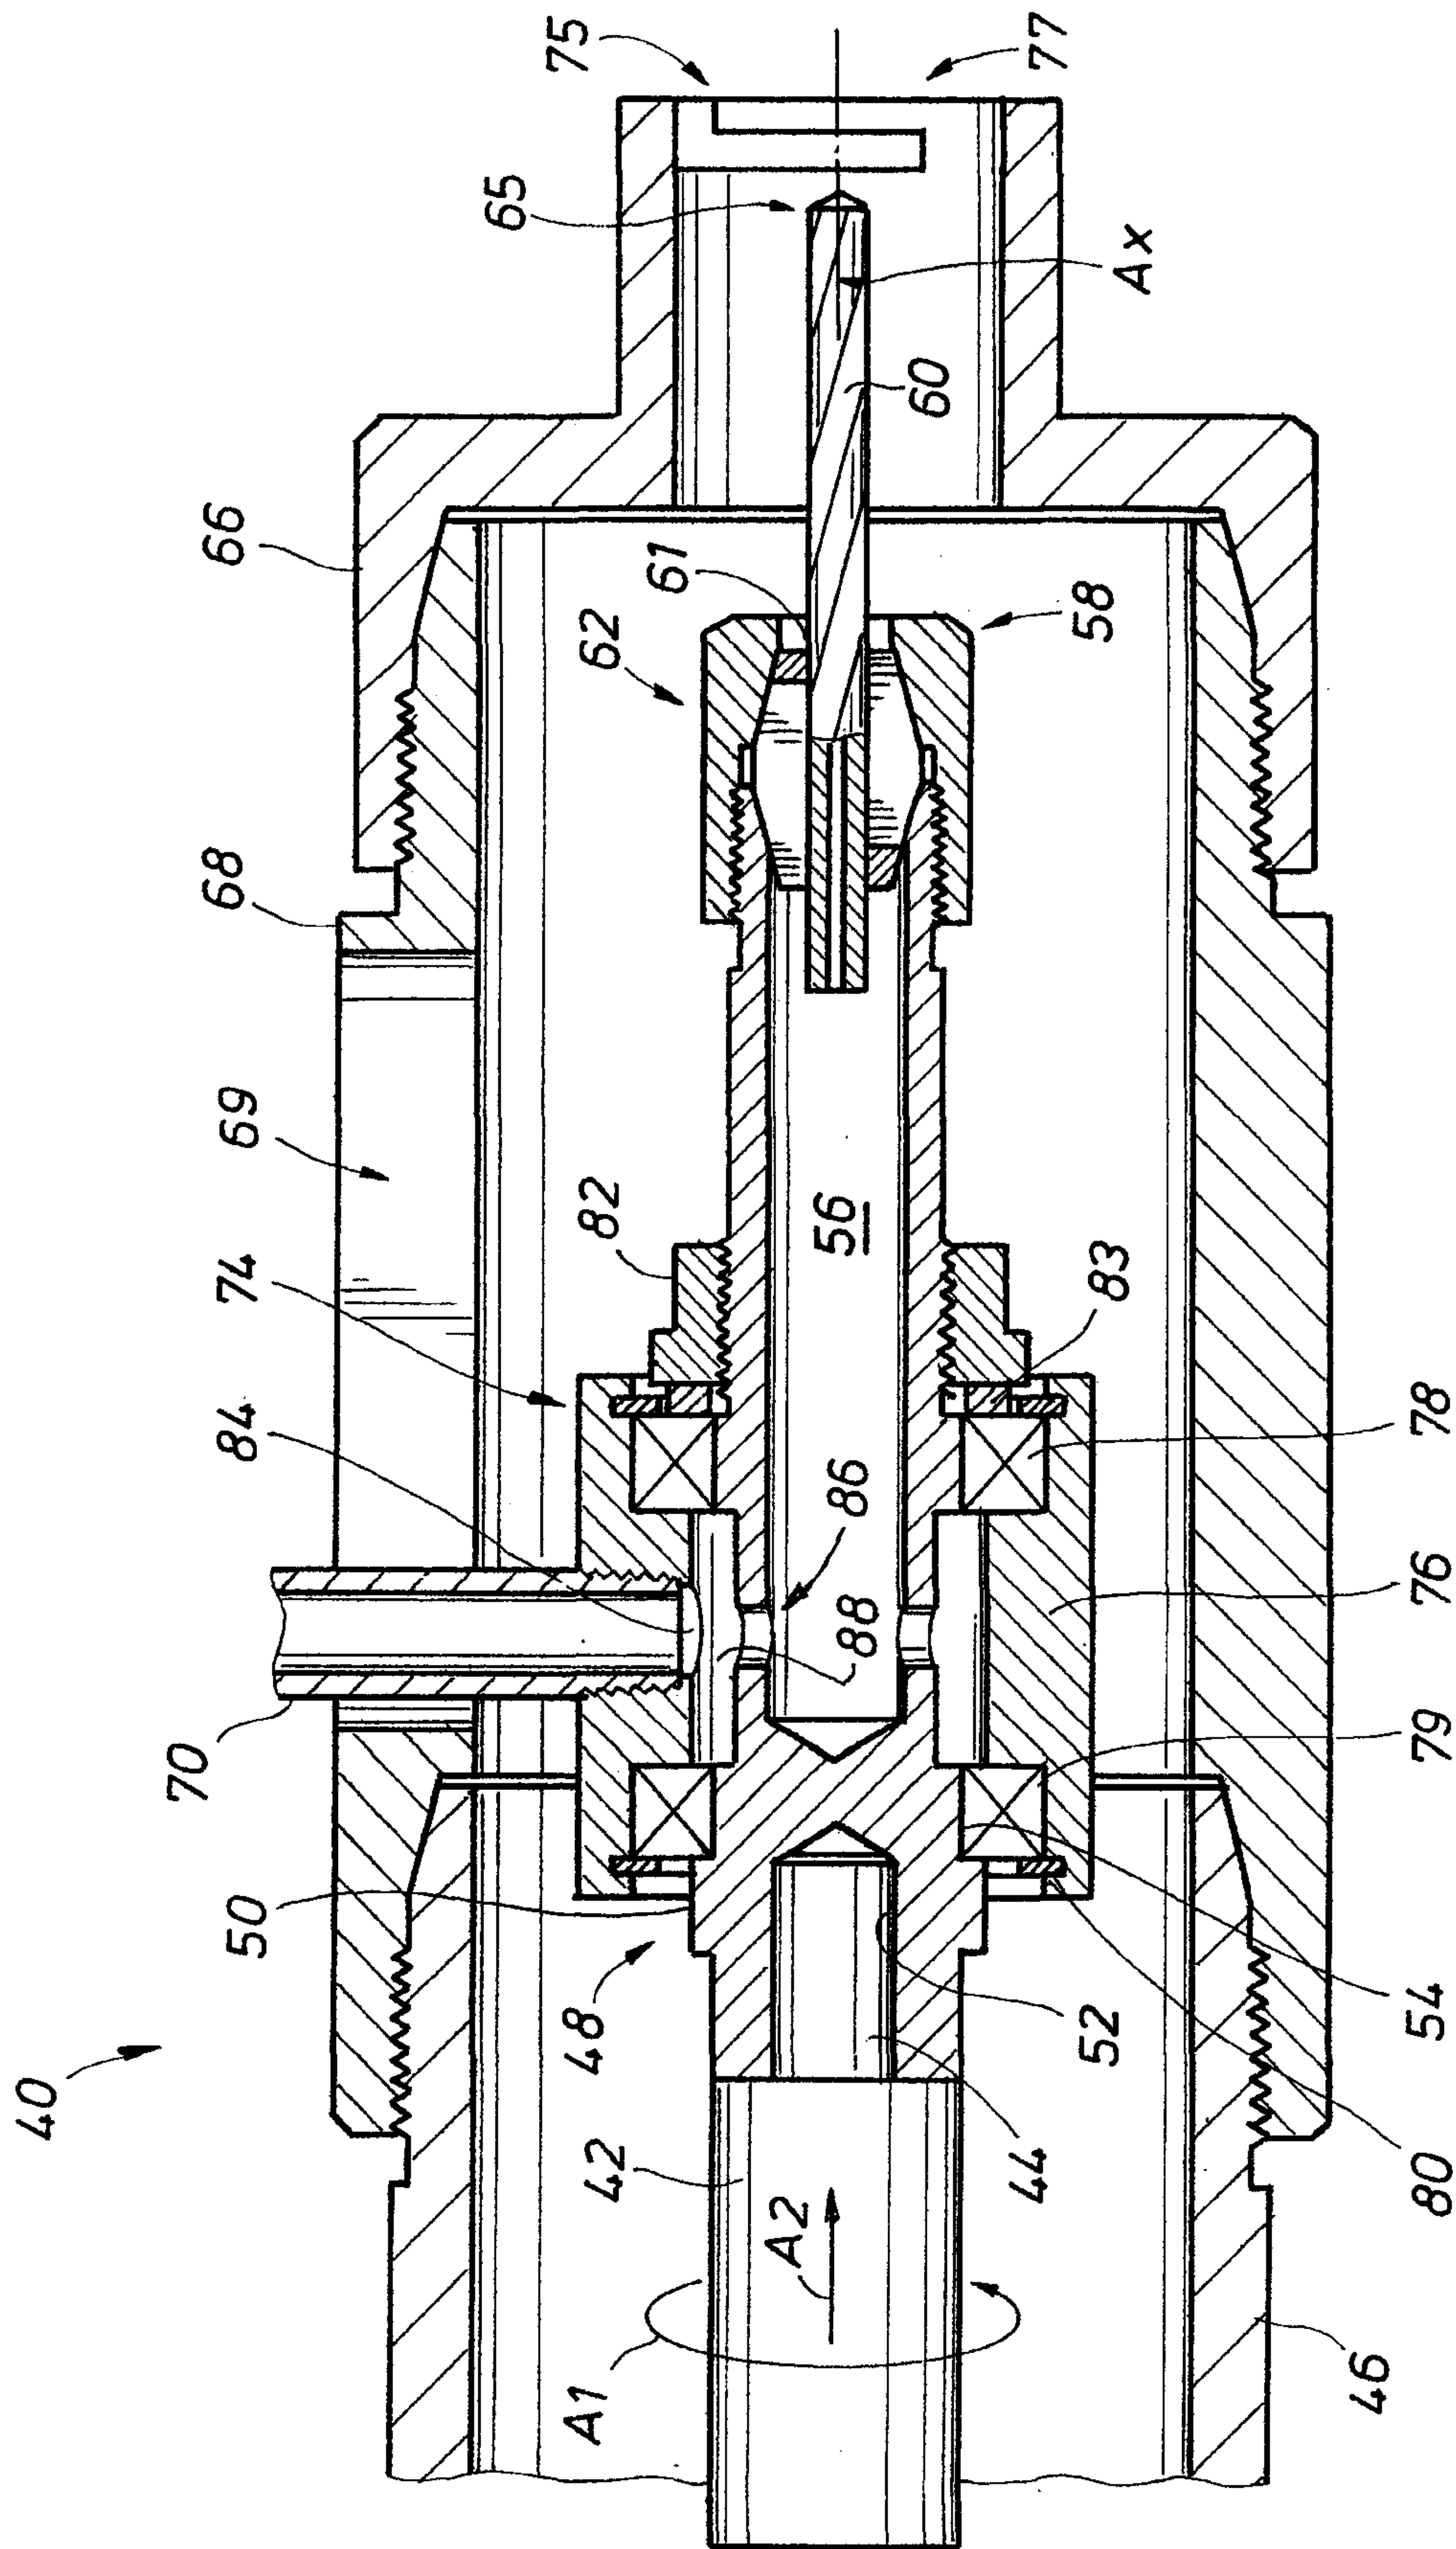


FIG. 2

