



(86) Date de dépôt PCT/PCT Filing Date: 2018/09/11
(87) Date publication PCT/PCT Publication Date: 2019/03/14
(45) Date de délivrance/Issue Date: 2021/09/14
(85) Entrée phase nationale/National Entry: 2020/02/20
(86) N° demande PCT/PCT Application No.: US 2018/050363
(87) N° publication PCT/PCT Publication No.: 2019/051453
(30) Priorité/Priority: 2017/09/11 (US15/700,955)

(51) Cl.Int./Int.Cl. *F16D 65/12* (2006.01),
B60B 27/00 (2006.01), *B60B 3/14* (2006.01),
F16D 65/02 (2006.01)


(72) Inventeurs/Inventors:
BURRIS, JAREN WILEY RICHARD, US;
DUNNA, PAVAN KUMAR, US;
DEMENKO, NAZAR VENTAMINOVICH, US;
JOHNSON, DARREN KIRK, US;
HARRINGTON, JONATHAN DAVID, US;
MANN, KEITH DARRAN, US;
EDWARDS, WILLIAM JOSEPH, US

(73) Propriétaire/Owner:
CONSOLIDATED METCO, INC., US

(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : ENSEMBLE ROTOR DE FREIN A DISQUE

(54) Title: DISC BRAKE ROTOR ASSEMBLY

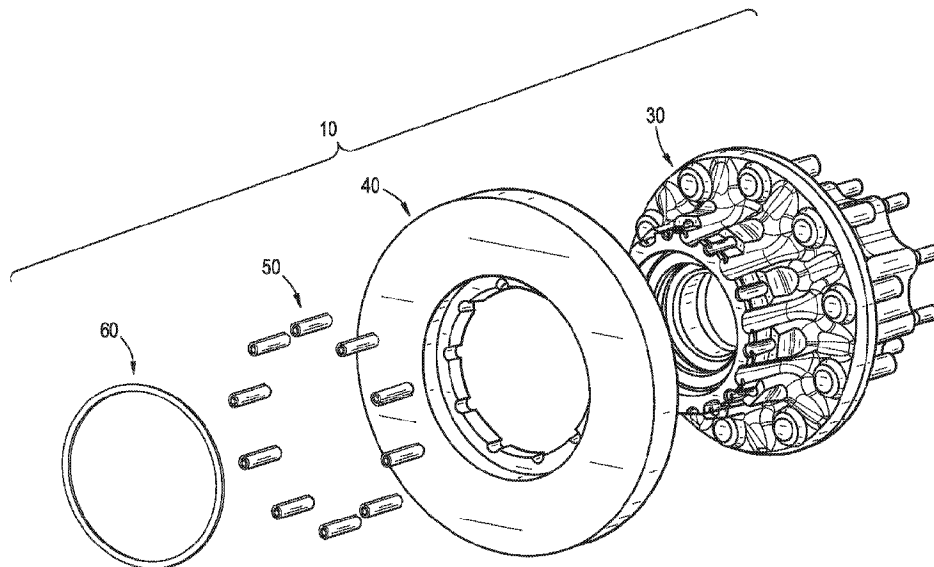

(57) Abrégé/Abstract:

An assembly to secure a disc brake rotor to a wheel hub utilizing spring pins and a retaining ring is provided. A partial keyway is formed in the rotor, and a partial keyway is formed in the wheel hub. The rotor is fitted over an inwardly extending section of the hub, with the partial keyways in the rotor and in the wheel hub being aligned to form complete keyways. The spring pins are then press fit into the completed keyways. Finally, a retaining ring is installed into a slot formed in the inwardly extending section of the wheel hub to complete the assembly of the disc brake rotor assembly.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
14 March 2019 (14.03.2019)



(10) International Publication Number
WO 2019/051453 A1

(51) International Patent Classification:

F16D 65/12 (2006.01) *B60B 27/00* (2006.01)
F16D 65/02 (2006.01) *B60B 3/14* (2006.01)

(21) International Application Number:

PCT/US2018/050363

(22) International Filing Date:

11 September 2018 (11.09.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/700,955 11 September 2017 (11.09.2017) US

(71) Applicant: **CONSOLIDATED METCO, INC.** [US/US];
5701 SE Columbia Way, Vancouver, WA 98661 (US).

(72) Inventors: **BURRIS, Jaren, Wiley, Richard**; 2020 SE
105th Ct., Vancouver, WA 98664 (US). **DUNNA, Pavan,
Kumar**; 1315 NW Goodwin Street, Camas, WA 98607
(US). **DEMENKO, Nazar, Ventaminovich**; 9613 NE 19th


Avenue, Vancouver, WA 98665 (US). **JOHNSON, Dar-
ren, Kirk**; 2403 NE 249th Avenue, Camas, WA 98607
(US). **HARRINGTON, Jonathan, David**; 12500 NE 59th
Avenue, Vancouver, WA 98686 (US). **MANN, Keith, Dar-
ran**; 23720 Crystal Terrace Drive, West Linn, OR 97068
(US). **EDWARDS, William, Joseph**; 3939 SW Bond Av-
enue, #312, Portland, OR 97239 (US).

(74) Agent: **KRAUTNER, Michael, J.**; Amsted Industries In-
corporated, 180 N. Stetson, Suite 1800, Chicago, IL 60601
(US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: DISC BRAKE ROTOR ASSEMBLY

FIG. 2

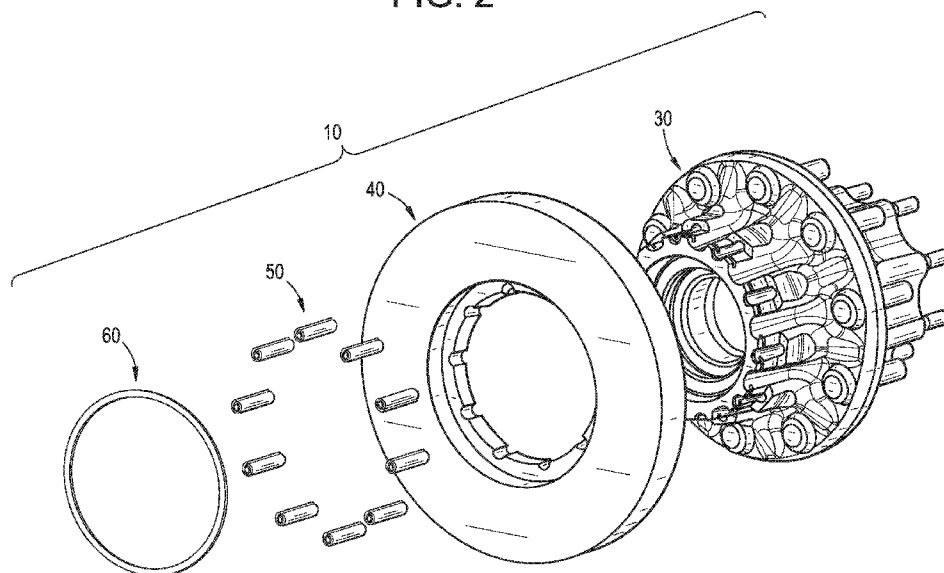

(57) Abstract: An assembly to secure a disc brake rotor to a wheel hub utilizing spring pins and a retaining ring is provided. A partial keyway is formed in the rotor, and a partial keyway is formed in the wheel hub. The rotor is fitted over an inwardly extending section of the hub, with the partial keyways in the rotor and in the wheel hub being aligned to form complete keyways. The spring pins are then press fit into the completed keyways. Finally, a retaining ring is installed into a slot formed in the inwardly extending section of the wheel hub to complete the assembly of the disc brake rotor assembly.

[Continued on next page]

WO 2019/051453 A1

WO 2019/051453 A1

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

5

DISC BRAKE ROTOR ASSEMBLY

BACKGROUND OF THE INVENTION

Disc brake rotors, for example, disc brake rotors used in commercial vehicles, are typically comprised of cast iron. Such disc brake rotors are mounted adjacent wheel hubs which can be comprised of cast aluminum or cast iron. It is desirable to attach the disc brake rotor to the wheel hub in a manner that is secure, yet straightforward.

An object of the invention is, therefore, to provide an assembly wherein a disc brake rotor is secured to a wheel hub in a commercial vehicle.

SUMMARY OF THE INVENTION

An assembly to secure a disc brake rotor to a wheel hub in accordance with an embodiment of the present invention utilizing spring pins and a retaining ring is provided. A partial keyway is formed in the rotor, and a partial keyway is formed in the wheel hub. The rotor is fitted over an inwardly extending section of the hub, with the partial keyways in the rotor and in the wheel hub being aligned to form complete keyways. The spring pins are then press fit into the completed keyways. Finally, a retaining ring is installed into a groove formed in the inwardly extending section of the wheel hub to complete the assembly of the disc brake rotor assembly.

Other embodiments of assemblies to retain a disc brake rotor on a wheel hub will be described in the detailed description.

25

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view in partial cross section of a disc brake rotor assembly in accordance with a first embodiment of the present invention;

FIG. 2 is a perspective exploded view with components shown of a disc brake rotor
30 assembly in accordance with a first embodiment of the present invention;

FIG. 3 is a detailed partial perspective view of the inwardly extending wheel hub interface in accordance with a first embodiment of the present invention;

FIG. 4 is a perspective view of a disc brake rotor in accordance with a first
embodiment of the present invention;

35 FIG. 5 is a perspective view of a spring pin in accordance with all embodiments of the present invention;

FIG. 6 is a perspective view of a retaining ring in accordance with a first, second, third, or fourth embodiment of the present invention;

FIG. 7 is a detailed partial perspective view in partial cross section of a disc brake
40 rotor assembly in accordance with a first embodiment of the present invention;

FIG. 8 is a detailed partial perspective view in partial cross section of a disc brake rotor assembly in accordance with a second embodiment of the present invention;

FIG. 9 is a detailed partial side view in cross section of a disc brake rotor assembly in accordance with a third embodiment of the present invention;

45 FIG. 10 is a detailed partial side view in partial cross section of a disc brake rotor assembly in accordance with a fourth embodiment of the present invention;

FIG. 11 is a detailed partial side view in cross section of a disc brake rotor assembly in accordance with a fifth embodiment of the present invention;

DETAILED DESCRIPTION OF THE INVENTION

50 Fig. 1 shows the hub and rotor assembly 10. The details focus on the joint that is established between the wheel hub 30 and the brake rotor 40.

As shown in Figs. 2-4, assembly operations that are required to create hub and rotor assembly 10, involve first installing brake rotor 40 onto wheel hub 30 using the hub pilot 33 and rotor pilot 42 for alignment. The brake rotor 40 is then clocked so that

55 hub pin slot 31 and rotor pin slot 41 are aligned to form keyways. A plurality of spring pin 50 are then installed into the completed keyways until the pins are seated against hub pilot seat 35. Retaining ring 60 is then installed over retaining ring pilot 34 until it fits properly into retaining groove 32. The hub and rotor assembly 10 is now assembled.

60 Referring now to Figs. 1-3, brake rotor 40 is shown attached to wheel hub 30 using a plurality of spring pin 50 to prevent torsional rotation of the brake rotor 40 relative to wheel hub 30. Retaining ring 60 is shown installed in retaining groove 32 which prevents brake rotor 40 from being able to move axially inward relative to wheel hub 30 while hub pilot seat 35 prevents brake rotor 40 from being able to move
65 axially outward relative to wheel hub 30. Together, the wheel hub 30, the brake rotor 40, the plurality of spring pin 50 and the retaining ring 60 comprise hub and rotor assembly 10.

As shown in Figs. 3-6, wheel hub 30 has features machined on the inward end of the hub which create the interface between brake rotor 40, spring pin 50 and
70 retaining ring 60. Hub pin slot 31 provides one-half of the keyway which nests the spring pin outer surface 51. Hub pilot 33 interfaces with rotor pilot 42 and is used to align brake rotor 40 when installed onto wheel hub 30. Rotor pilot seat 35 serves as an axial stop for both rotor outward face 43 and the end surface of spring pin 52.

Retaining groove 32 is machined into the inwardly extending surface of wheel hub 30
75 and is used to axially constrain retaining ring 60 when it is installed. Retaining ring pilot 34 is slightly smaller than hub pilot 33 and may or may not be tapered so that retaining ring 60 can be properly installed.

In Fig. 4, brake rotor 40 also has machined features along its inner diameter interface. Rotor pin slot 41 provides the second part of the keyway which nests the
80 spring pin outer surface 51. When brake rotor 40 is assembled with wheel hub 30, the brake rotor must be positioned so that rotor pin slot 41 and hub pin slot 31 are aligned and form a complete keyway.

Fig. 7 shows spring pin 50 utilized as a key in the keyway created by hub pin slot 31 and rotor pin slot 41. When under load, spring pin 50 is able to radially
85 compress allowing spring pin 50 to absorb shock and vibrations that are transferred between brake rotor 40 and wheel hub 30 during vehicle braking operations. In its function as a key, spring pin 50 is able to physically constrain brake rotor 40 relative

to wheel hub 30 which is an improvement over hub and rotor assemblies which rely on a friction couple to constrain a rotor to a wheel hub.

90 Fig. 8 illustrates a variation of the disc brake rotor assembly. In this variation, the wheel hub 30A includes hub stop tab 36 which acts against rotor inward face 44 so that the axial loads transferred from the rotor are applied directly to wheel hub 30A instead of to the retaining ring 60. This allows for retaining ring 60 to only support the plurality of spring pins 50. In order to assemble this design, brake rotor 40A is
95 modified so that rotor pilot 42A has interrupted cut features that allow for the rotor to be installed over wheel hub 30A, then positioned to align hub pin slot 31 and rotor pin slot 41.

Fig. 9 illustrates a variation of the disc brake rotor assembly. In this variation, hub pin slot 31B and rotor pin slot 41B are machined in an angled manner about the
100 axis of wheel hub 30B. The benefit of this variation is that spring pin 50 is now able to constrain the brake rotor 40B to the wheel hub 30B both axially and rotationally.

Fig. 10 illustrates a variation of the disc brake rotor assembly. In this variation, a spacer 70 is included in hub and rotor assembly 10 and is positioned between hub pilot seat 35 and rotor outward face 43. The benefit that spacer 70 provides is that it
105 absorbs any axial gap tolerance between brake rotor 40 and wheel hub 30C when assembled.

Fig. 11 illustrates a variation of the disc brake rotor assembly. In this variation, fastener 90 and washer 100 are used together to axially constrain brake rotor 40 to

wheel hub 30D. Wheel hub 30D is modified with hub threaded hole 37 which fastener
110 90 threads into. This design provides an alternate method of axially constraining brake
rotor 40 to wheel hub 30D without the use of a retaining ring.

What is claimed is:

- 115 1. A disc brake rotor assembly comprising:
- a plurality of pins each having an outer circumference,
- a disc brake rotor having a first plurality of partial keyways each configured to
- extend around less than the entire outer circumference of one of the pins,
- a wheel hub having a second plurality of partial keyways each configured to
- 120 extend around less than the entire outer circumference of one of the pins,
- the disc brake rotor installed on the wheel hub such that the partial keyways in
- the disc brake rotor and the partial keyways in the wheel hub are aligned to form
- completed keyways, and
- each pin in one of the completed keyways.
- 125
2. The disc brake rotor assembly of claim 1,
- wherein each pin is press fitted into each completed keyway.
3. The disc brake rotor assembly of claim 1,
- 130 wherein the wheel hub has an inward end with the second plurality of partial
- keyways and the disc brake rotor includes an axially centered opening that receives
- the wheel hub inward end with the plurality of partial keyways.

4. The disc brake rotor assembly of claim 1,

135 wherein the completed keyway is at an angle from a central axis of the disc
brake rotor assembly.

5. The disc brake rotor assembly of claim 1,

140 wherein the wheel hub includes a retaining groove in which a retaining ring is
fitted.

6. The disc brake rotor assembly of claim 1, wherein the pins are spring pins.

7. A disc brake rotor assembly comprising:

145 a disc brake rotor having a plurality of partial keyways and a central opening,

a wheel hub having a plurality of partial keyways and a central opening,

the disc brake rotor installed on the wheel hub such that the partial keyways in
the disc brake rotor and the partial keyways in the wheel hub are aligned to form
completed keyways, and

150 a plurality of elongate spring pins each having a length, each spring pin inserted
into one of the completed keyways,

the disc brake rotor and the wheel hub being rotatable about a central axis that
extends through centers of the central openings of the disc brake rotor and the wheel
hub, and

155 the completed keyways orienting the pins so that the lengths thereof extend
parallel to the central axis.

8. The disc brake rotor assembly of claim 7,
 wherein each spring pin is press fitted into each completed keyway.

160

9. The disc brake rotor assembly of claim 7,
 wherein the wheel hub includes an inward end with the plurality of partial
keyways and the disc brake rotor includes an axially centered opening that receives
the wheel hub inward end with the plurality of partial keyways.

165

10 The disc brake rotor assembly of claim 7,
 wherein each completed keyway has an open end that receives one of the
spring pins and a closed end opposite the open end.

170

11. The disc brake rotor assembly of claim 7,
 wherein the wheel hub includes a retaining groove in which a retaining ring is
fitted.

12. A disc brake rotor assembly comprising:

175 a disc brake rotor having a plurality of partial keyways with first arcuate surfaces,

a wheel hub having a plurality of partial keyways having second arcuate surfaces,

the disc brake rotor installed on the wheel hub such that the partial keyways in
180 the disc brake rotor and the partial keyways in the wheel hub are aligned to form completed keyways with the first and second arcuate surfaces of each completed keyway facing each other,

a plurality of pins, each pin inserted into one of the completed keyways and held between the facing, first and second arcuate surfaces of the one completed
185 keyway, and

a spacer adjacent the wheel hub and the disc brake rotor.

13. The disc brake rotor assembly of claim 12,

wherein each pin is a spring pin that is press fitted into each completed keyway.

190

14. The disc brake rotor assembly of claim 12,

wherein the wheel hub includes an inward end with the plurality of partial keyways and the disc brake rotor includes an axially centered opening that receives the wheel hub inward end with the plurality of partial keyways.

195

15. The disc brake rotor assembly of claim 12,
wherein the wheel hub includes an inward end having an edge against which
the spacer is fitted.

200 16. The disc brake rotor assembly of claim 15,
wherein the spacer is a spring.

17. The disc brake rotor assembly of claim 12,
wherein the wheel hub includes a retaining groove in which a retaining ring is
205 fitted.

18. A disc brake rotor assembly comprising:
a disc brake rotor having a plurality of partial keyways and retaining grooves,
a wheel hub having an inward end with a plurality of partial keyways,
210 the disc brake rotor installed on the wheel hub such that the partial keyways in
the disc brake rotor and the partial keyways in the wheel hub are aligned to form
completed keyways,
a plurality of pins, each pin combined with a threaded fastener and then
inserted into one of the completed keyways.

215

19. The disc brake rotor assembly of claim 18,
wherein each pin is a spring pin that is press fitted into each completed keyway.

20. The disc brake rotor assembly of claim 18,
220 wherein the disc brake rotor includes an axially centered opening that receives
the wheel hub inward end with the plurality of partial keyways.

21. The disc brake rotor assembly of claim 18,
wherein the wheel hub inward end includes a retaining groove in which a
225 retaining ring is fitted.

22. A disc brake rotor assembly comprising:
a disc brake rotor having a plurality of partial keyways and retaining grooves,
a wheel hub having an inward end with a plurality of partial keyways,
230 the disc brake rotor installed on the wheel hub such that the partial keyways in
the disc brake rotor and the partial keyways in the wheel hub are aligned to form
completed keyways,
a plurality of pins, each pin inserted into one of the completed keyways,
and the wheel hub further comprising a stop tab adjacent each pin,
235 wherein the wheel hub inward end includes a retaining groove in which a
retaining ring is fitted.

23. The disc brake rotor assembly of claim 22,
wherein each pin is a spring pin that is press fitted into each completed keyway.

240

24. The disc brake rotor assembly of claim 22,
wherein the disc brake rotor includes an axially centered opening that receives
the wheel hub inward end with the plurality of partial keyways.

#44798551

1/11

FIG. 1



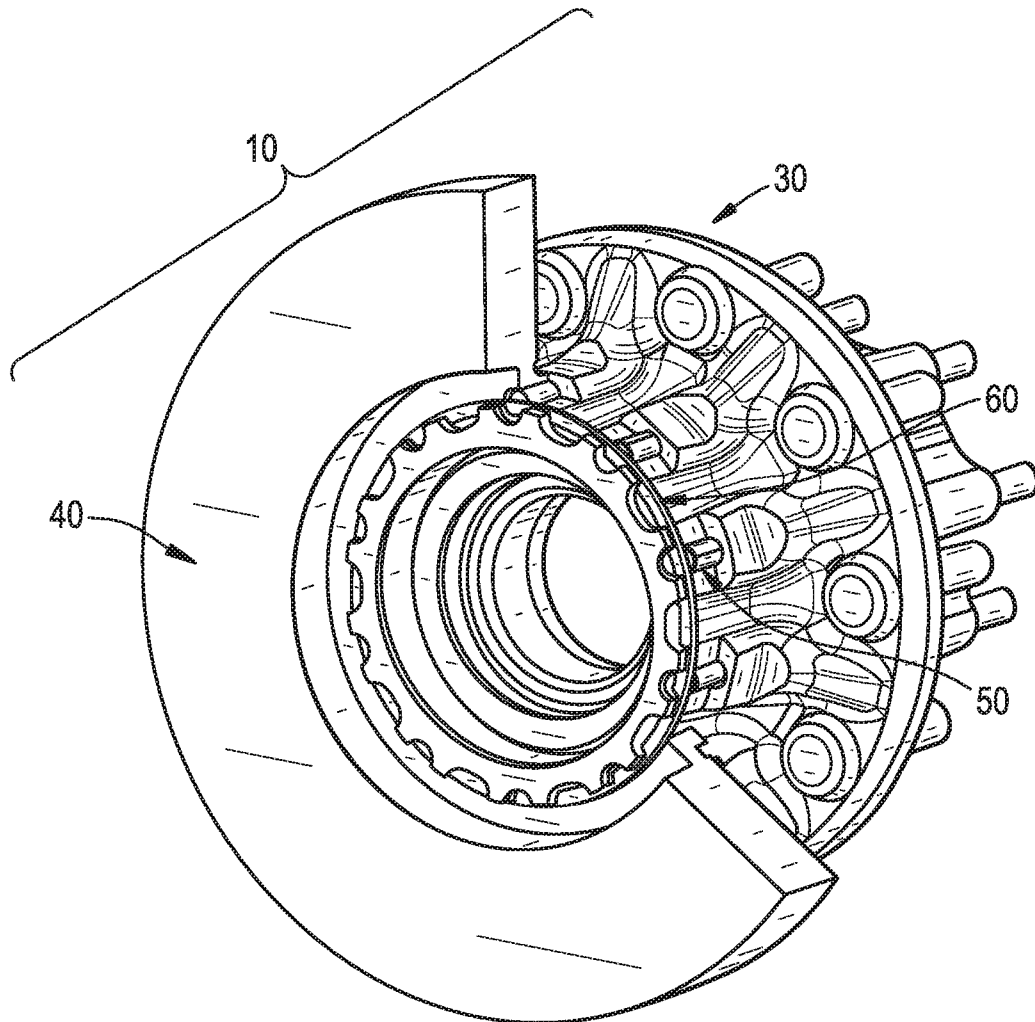


FIG. 2

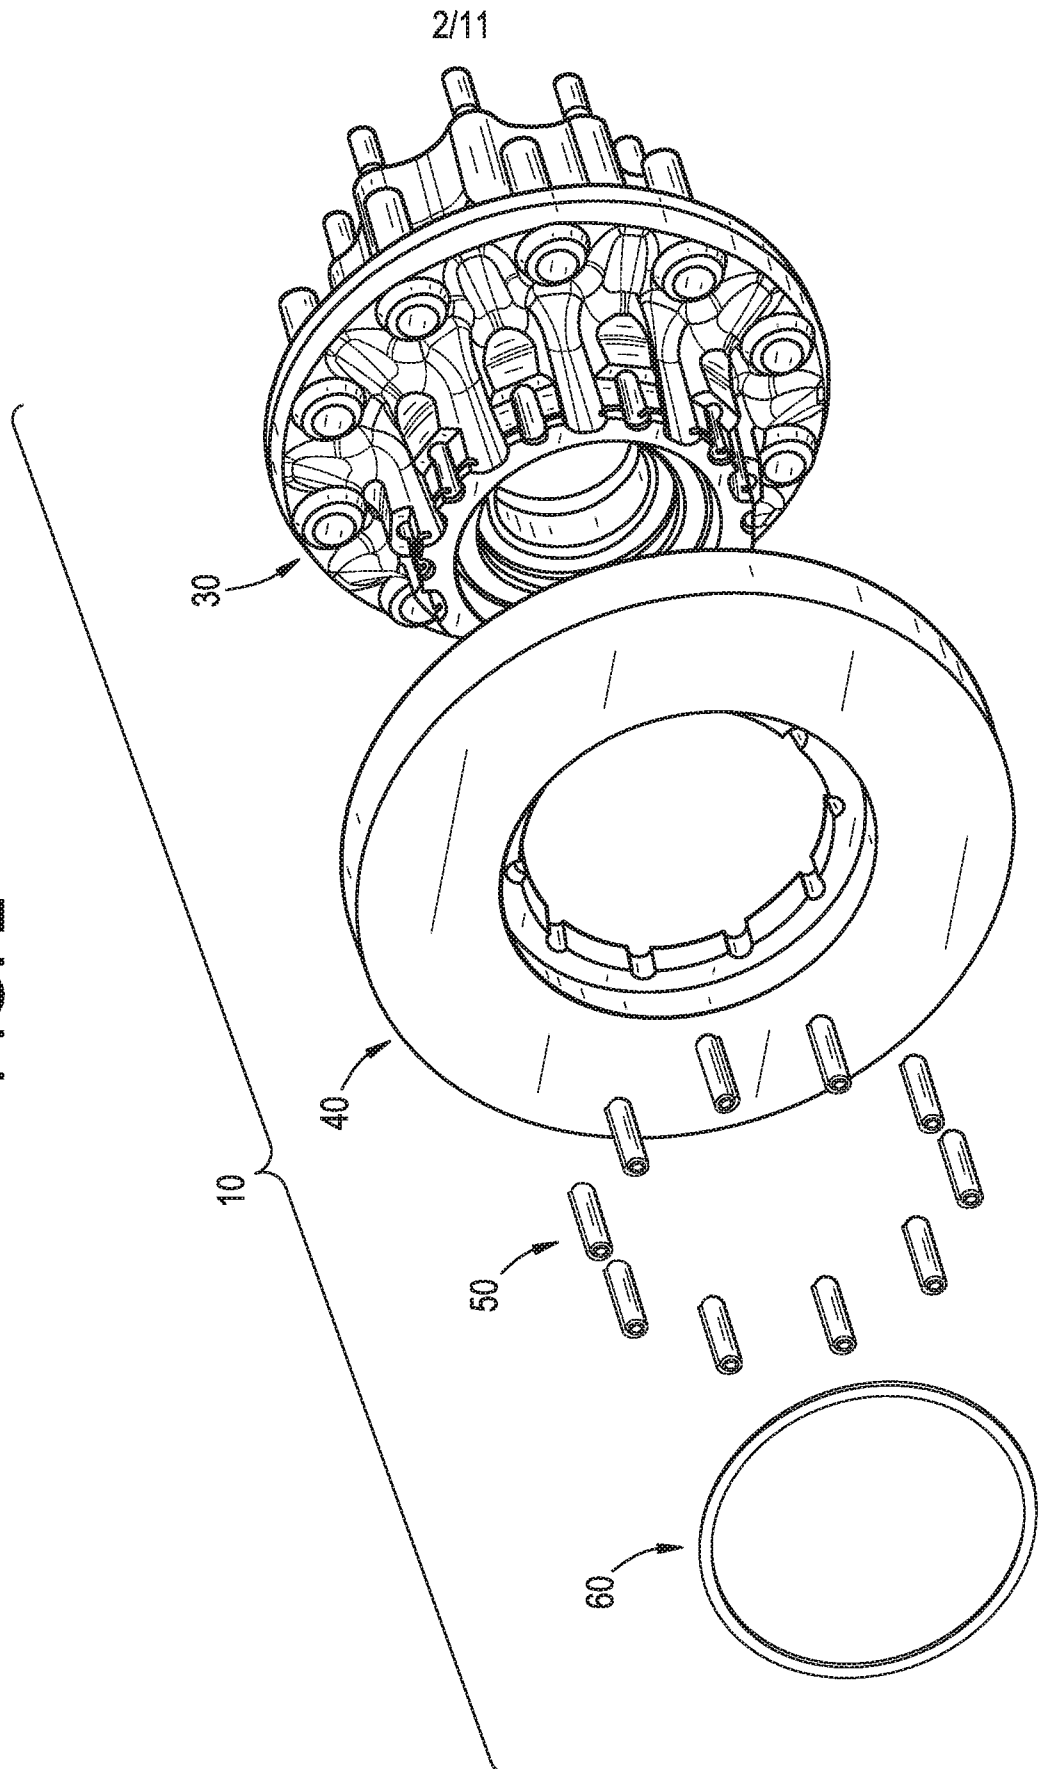


3/11

FIG. 3

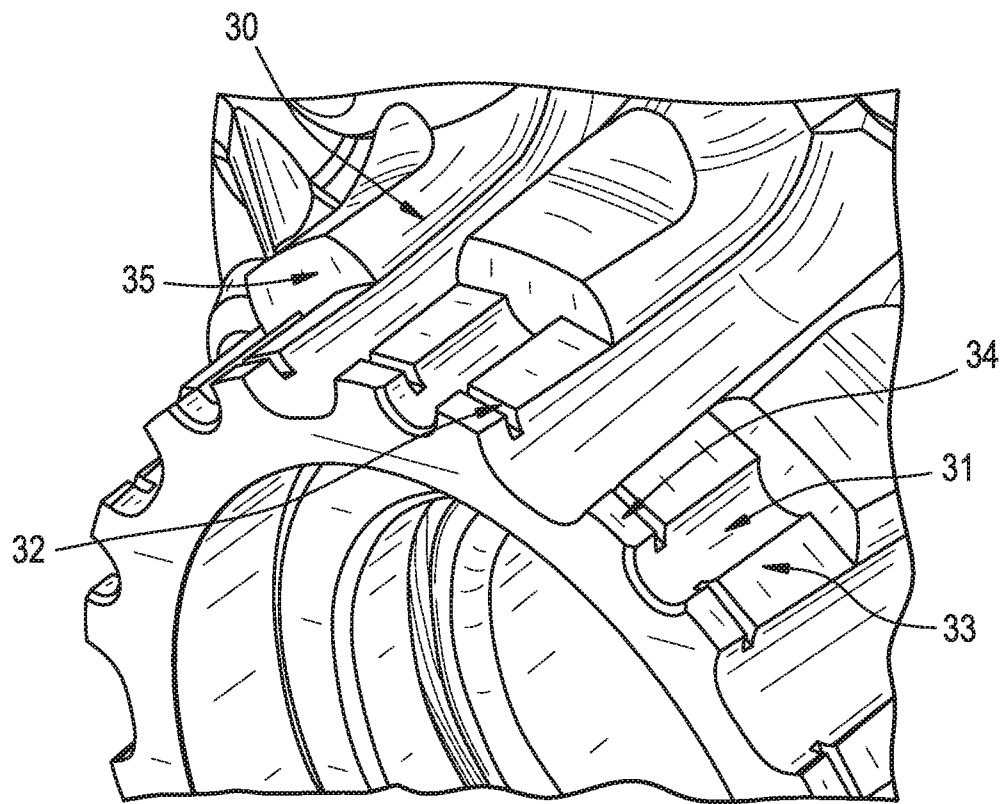


4/11

FIG. 4

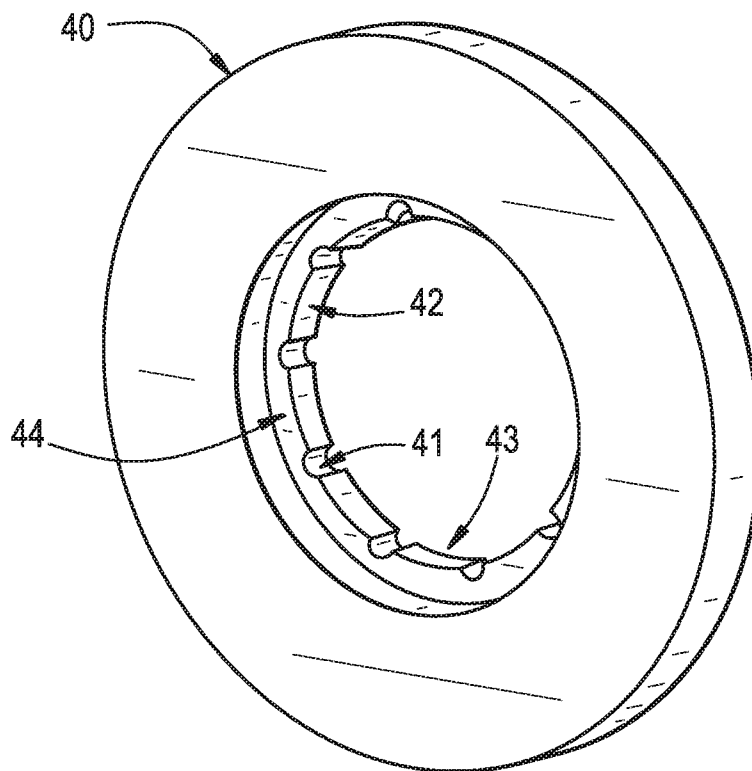


5/11

FIG. 5

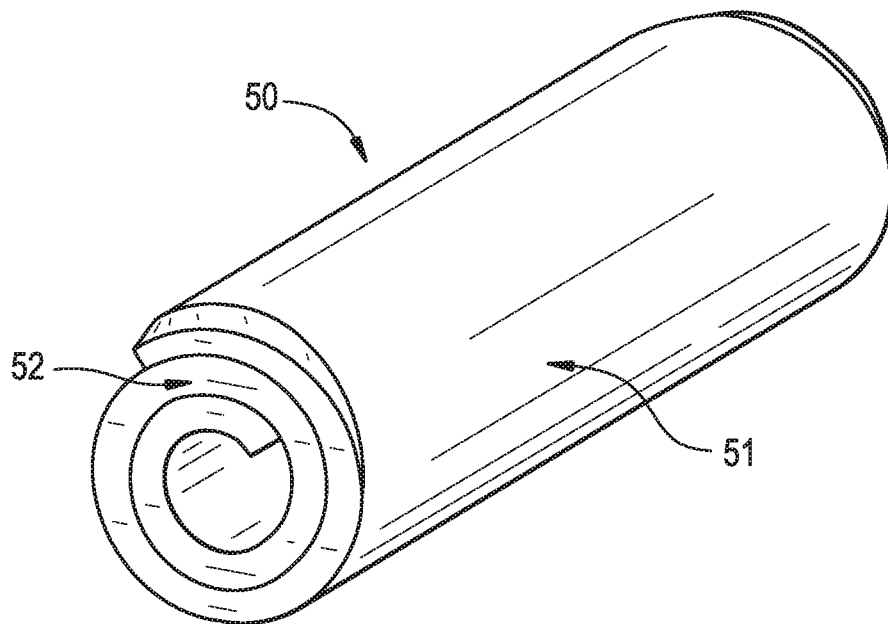


6/11

FIG. 6

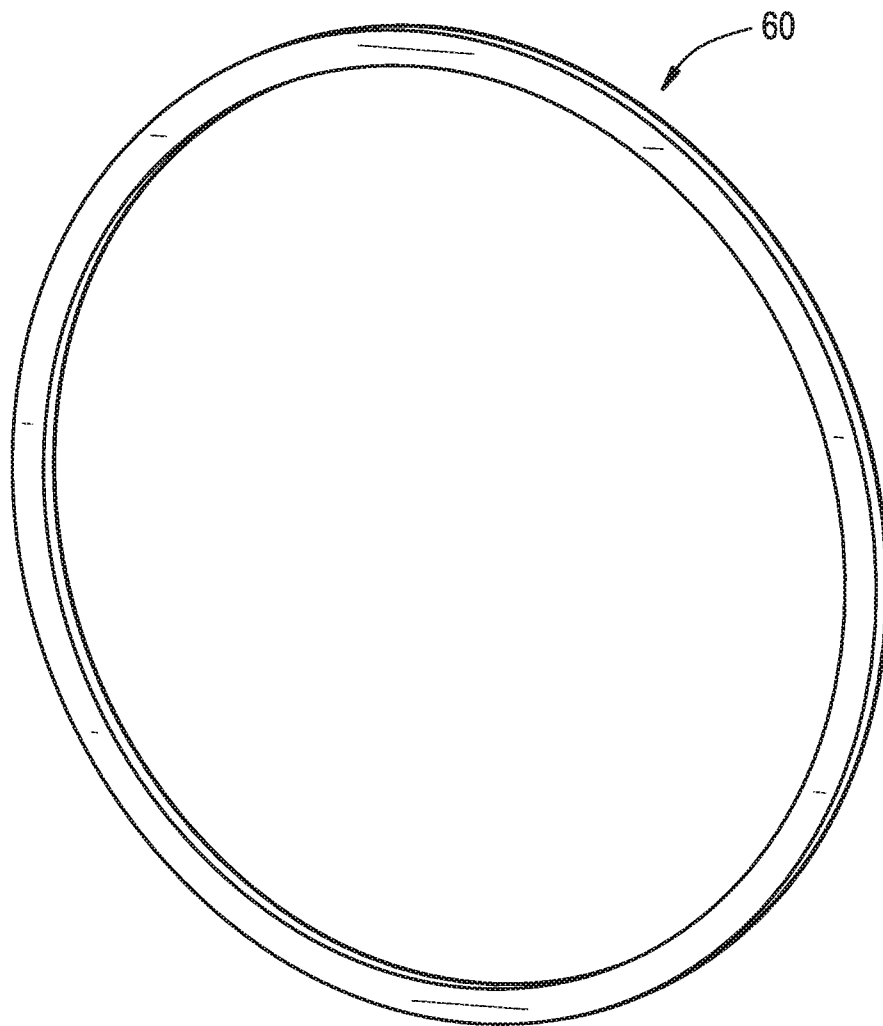


7/11

FIG. 7

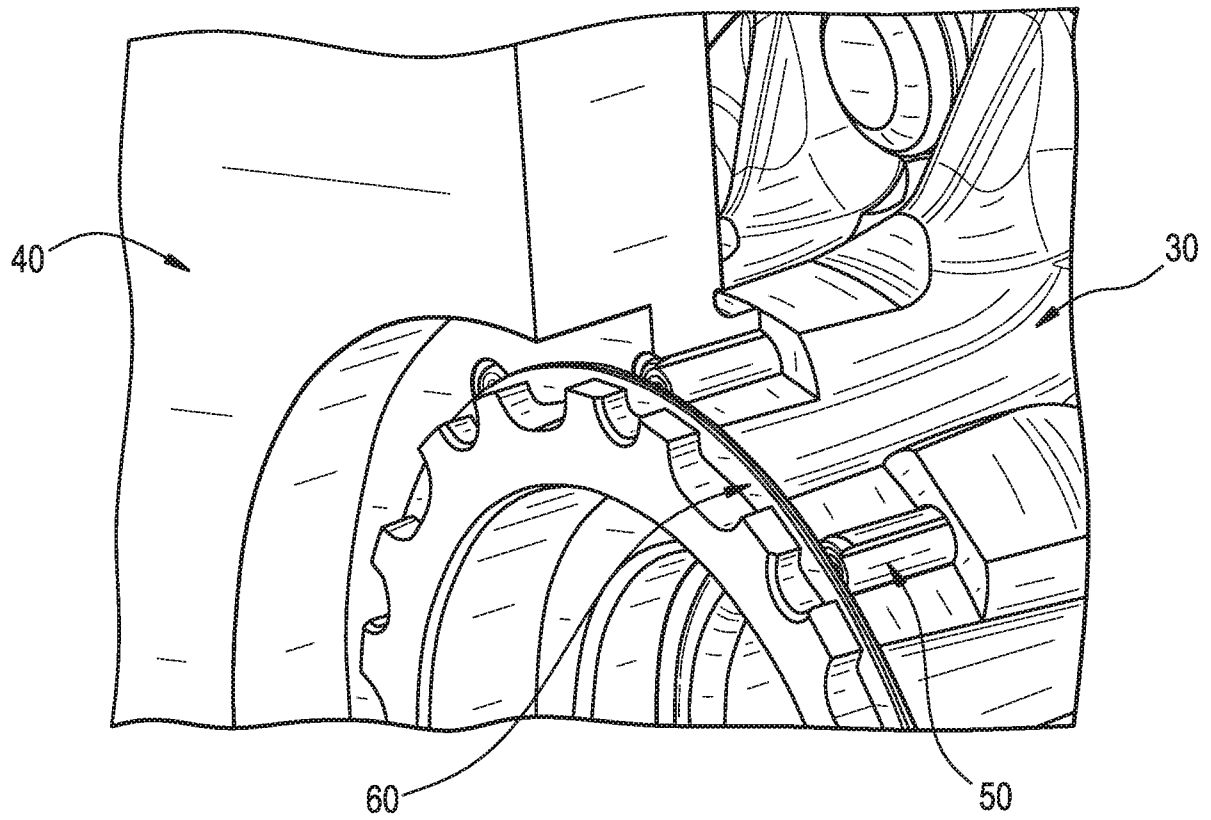


8/11

FIG. 8

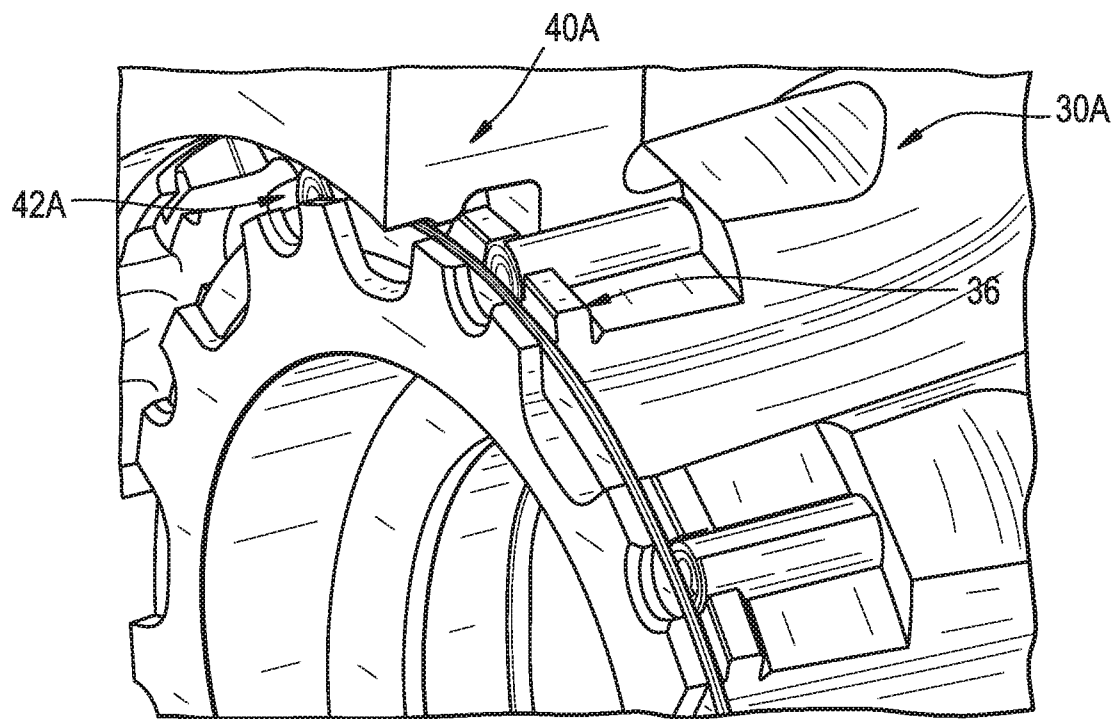


9/11

FIG. 9

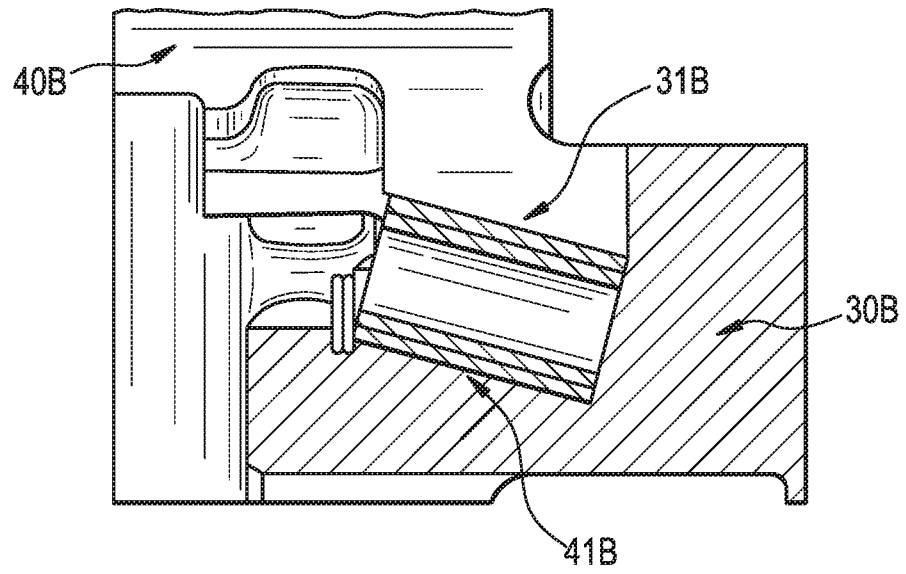

10/11

FIG. 10

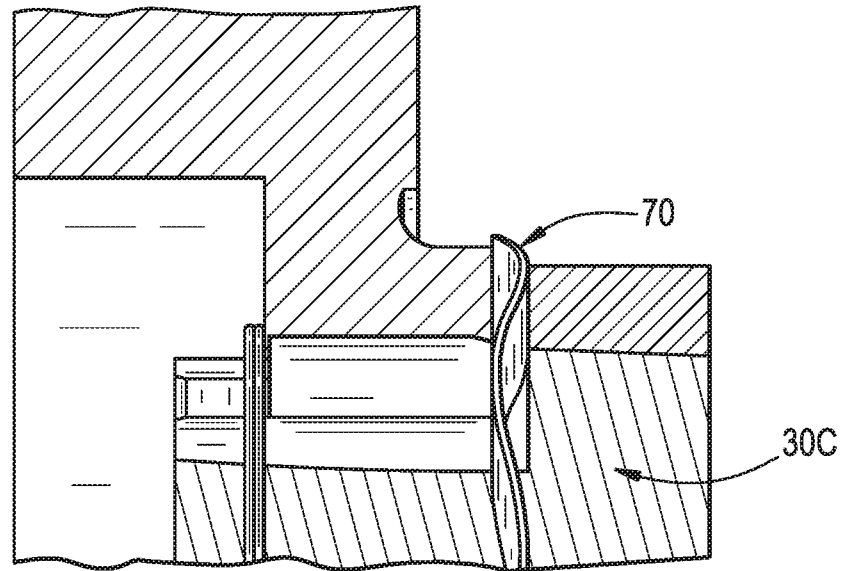

11/11

FIG. 11

