



US 20090057788A1

(19) **United States**

(12) **Patent Application Publication**
Hattendorf et al.

(10) **Pub. No.: US 2009/0057788 A1**

(43) **Pub. Date: Mar. 5, 2009**

(54) **ANGLED IMPLANTATION FOR REMOVAL
OF THIN FILM LAYERS**

(22) Filed: **Oct. 24, 2008**

Related U.S. Application Data

(76) Inventors: **Michael L. Hattendorf**, Beaverton,
OR (US); **Justin K. Brask**,
Portland, OR (US); **Justin S.**
Sandford, Tigard, OR (US); **Jack**
Kavalieros, Portland, OR (US);
Matthew V. Metz, Hillsboro, OR
(US)

(62) Division of application No. 11/293,753, filed on Dec.
1, 2005.

Publication Classification

(51) **Int. Cl.**
H01L 29/78 (2006.01)


(52) **U.S. Cl.** **257/412; 257/E29.255**

(57) **ABSTRACT**

Embodiments of the invention provide a device with a reverse-tapered gate electrode and a gate dielectric layer with a length close to that of the gate length. In an embodiment, this may be done by altering portions of a blanket dielectric layer with one or more angled ion implants, then removing the altered portions of the blanket dielectric layer.

Correspondence Address:
INTEL CORPORATION
c/o INTELLEVATE, LLC
P.O. BOX 52050
MINNEAPOLIS, MN 55402 (US)

(21) Appl. No.: **12/288,944**

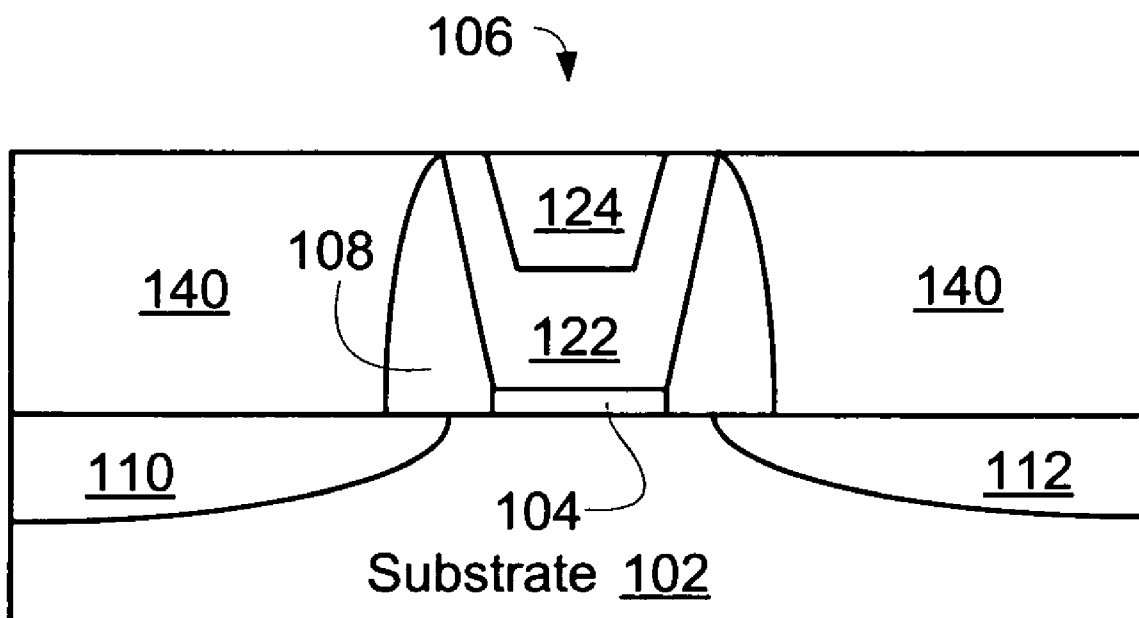

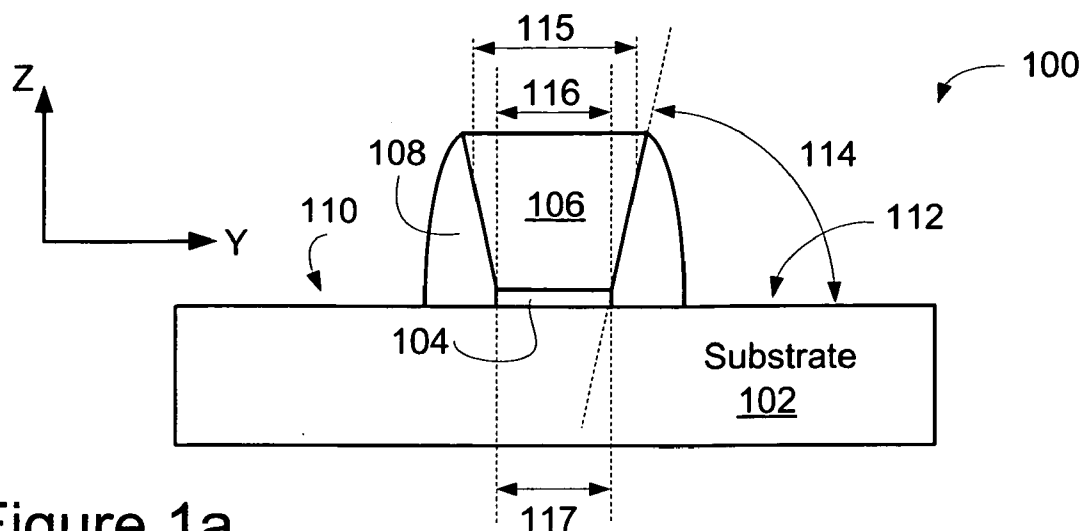


Figure 1a

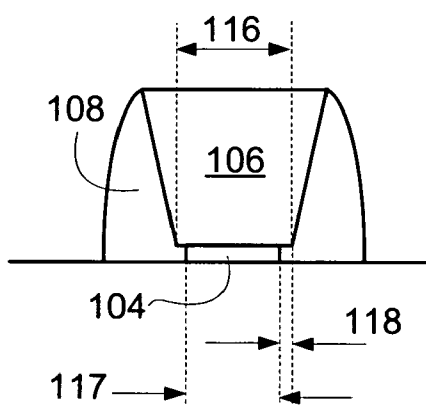


Figure 1b

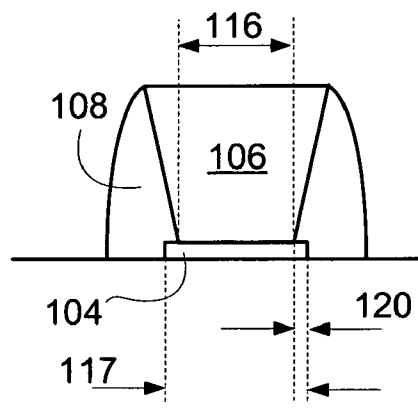


Figure 1c

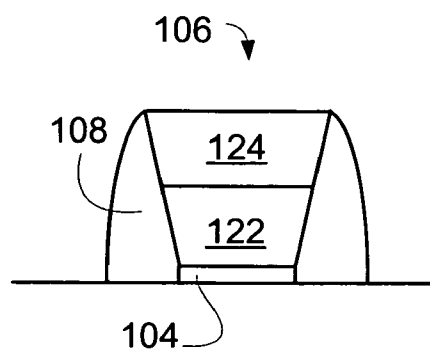


Figure 1d

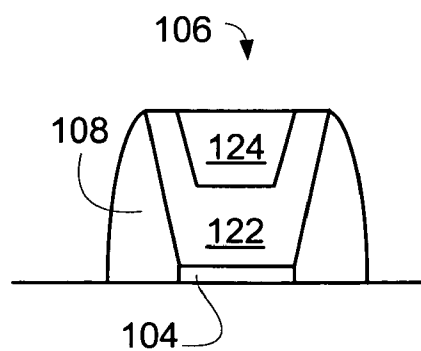


Figure 1e

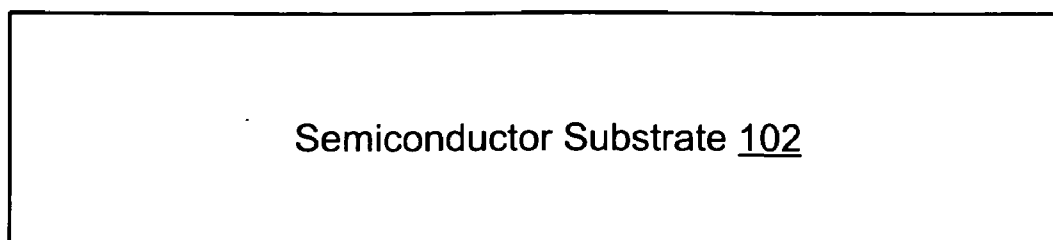


Figure 2

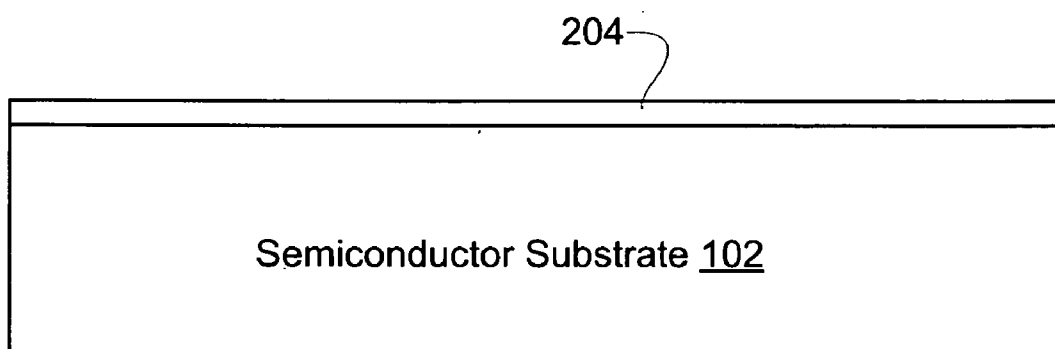


Figure 3

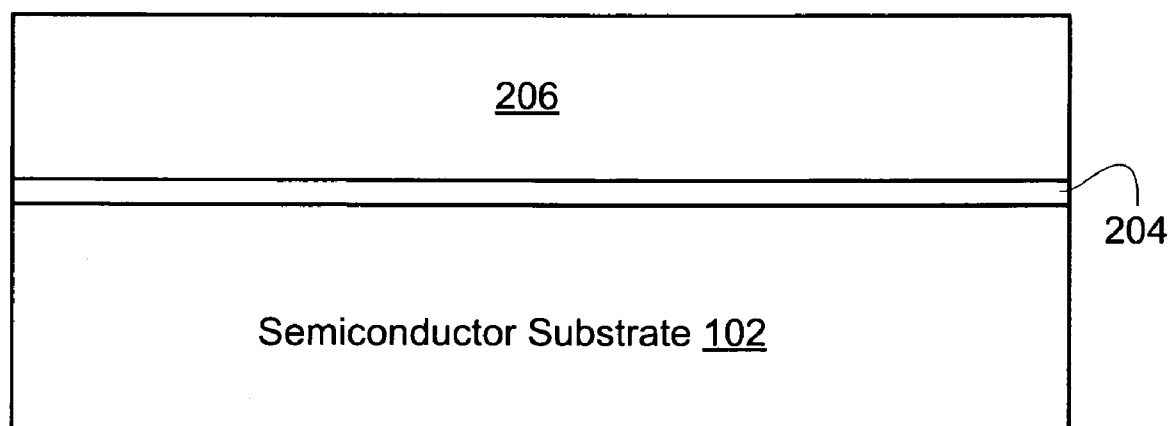


Figure 4

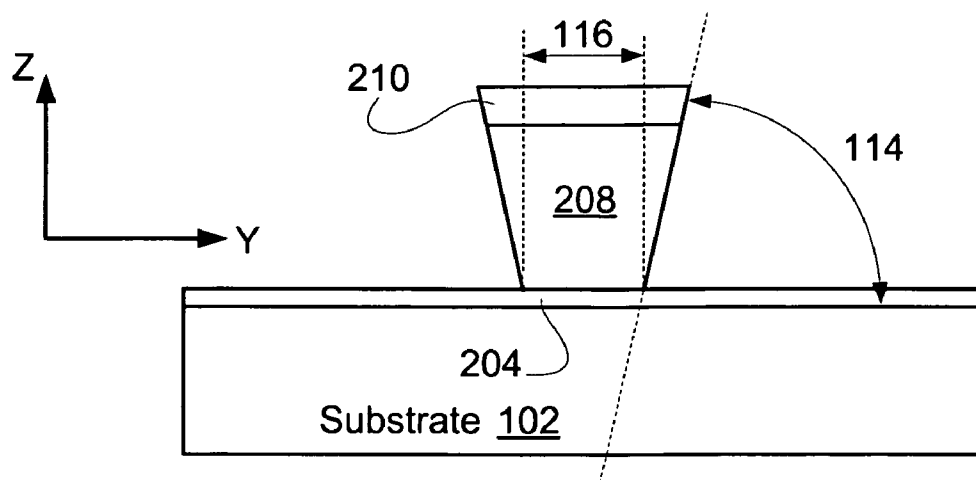


Figure 5

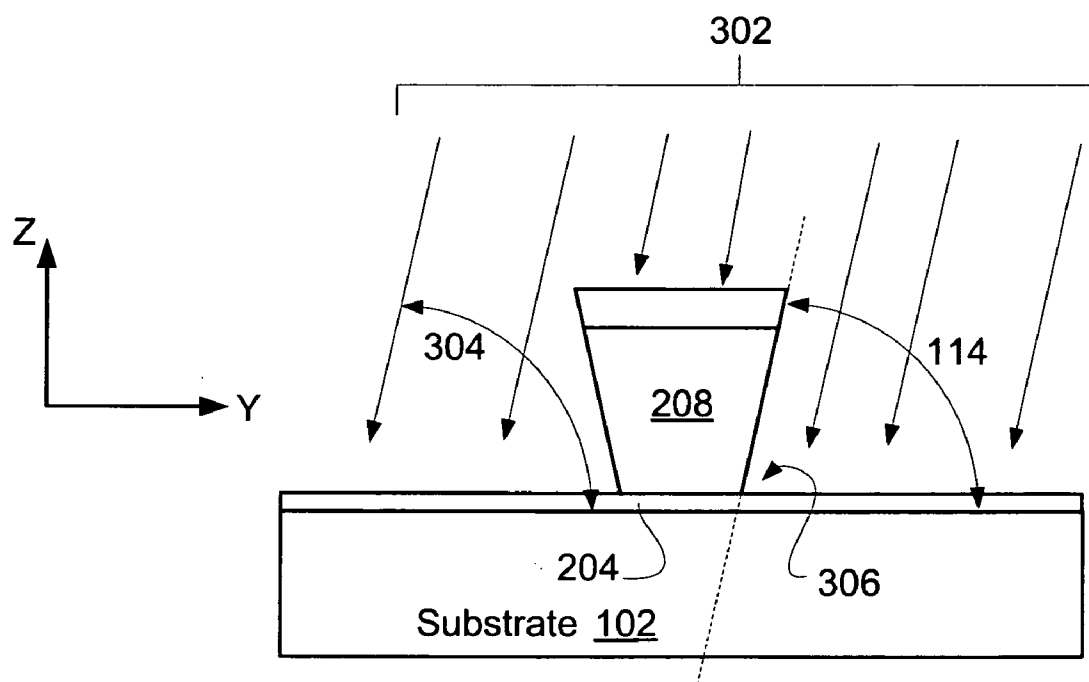


Figure 6

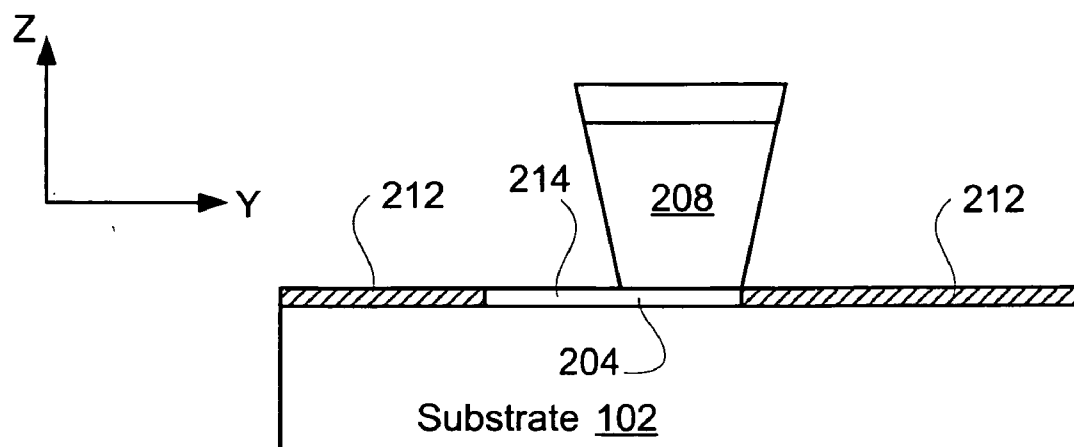


Figure 7

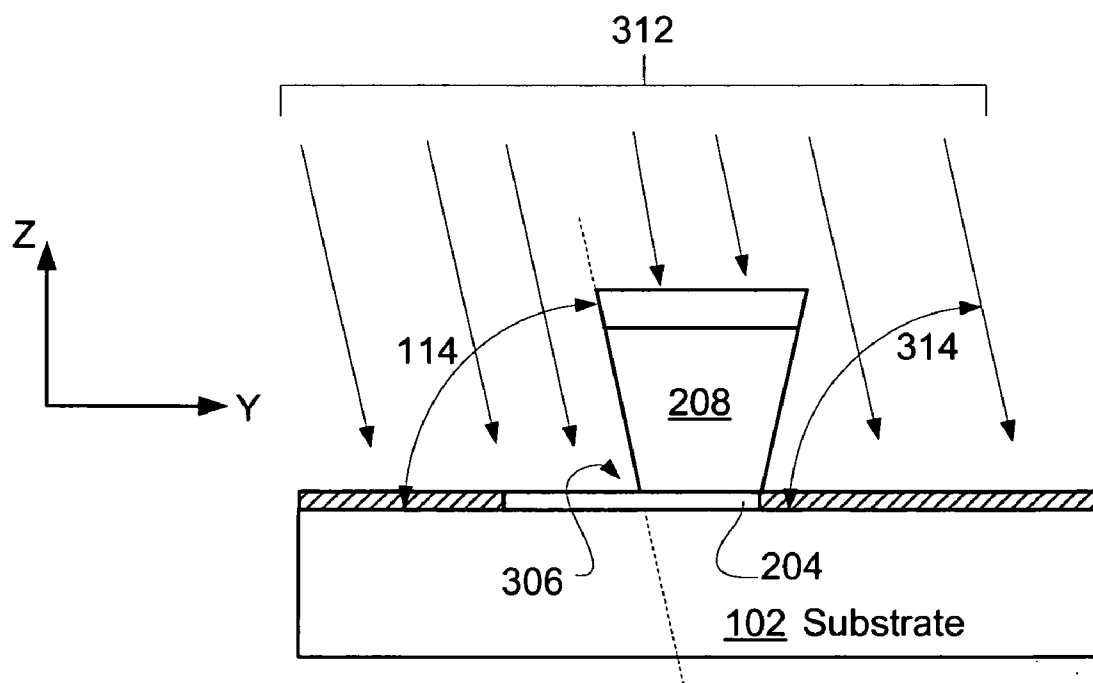


Figure 8

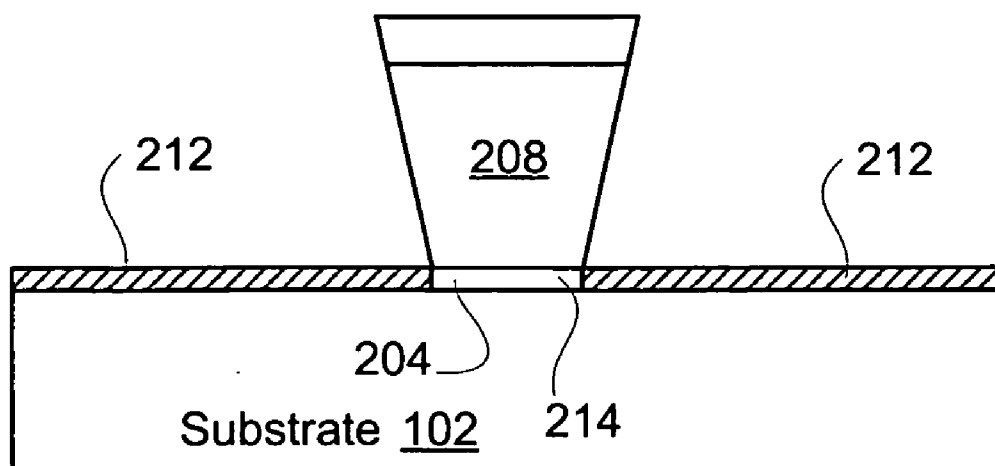


Figure 9

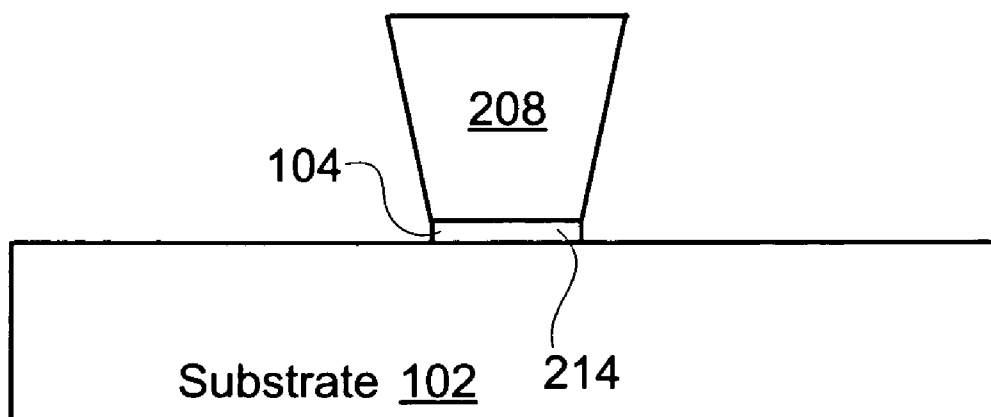


Figure 10

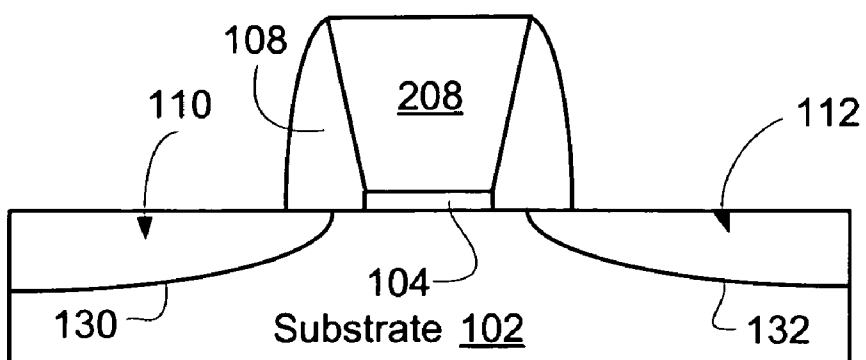


Figure 11

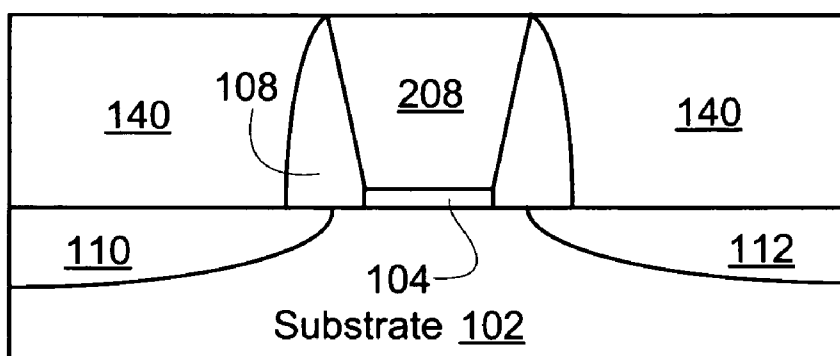


Figure 12

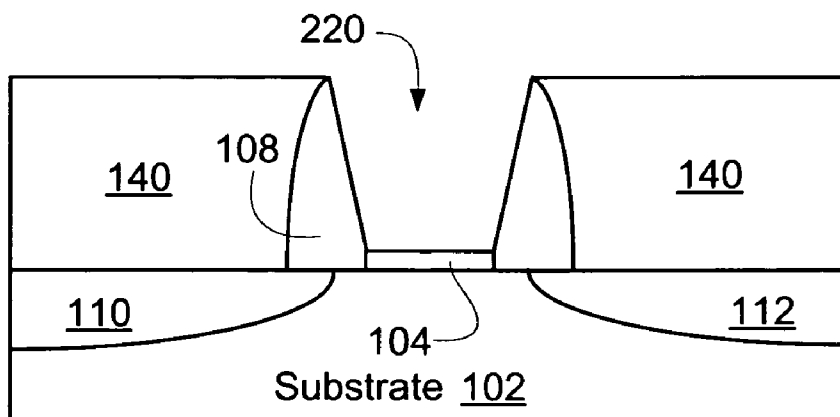


Figure 13

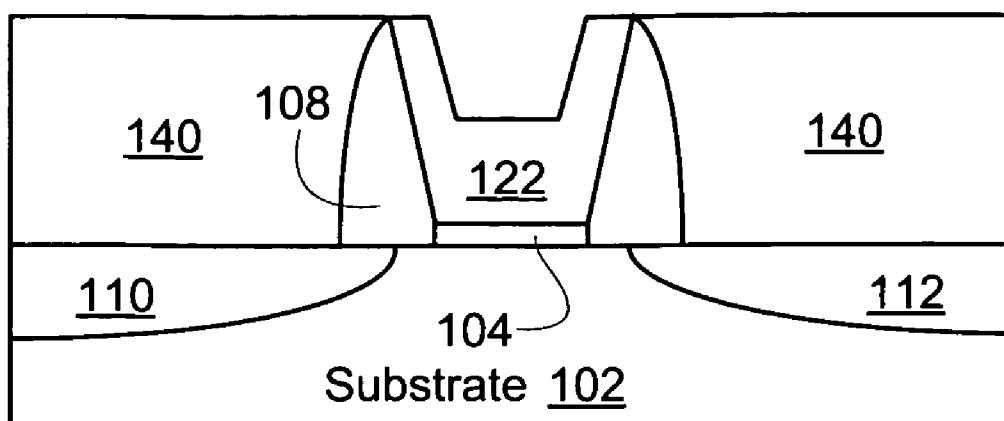


Figure 14

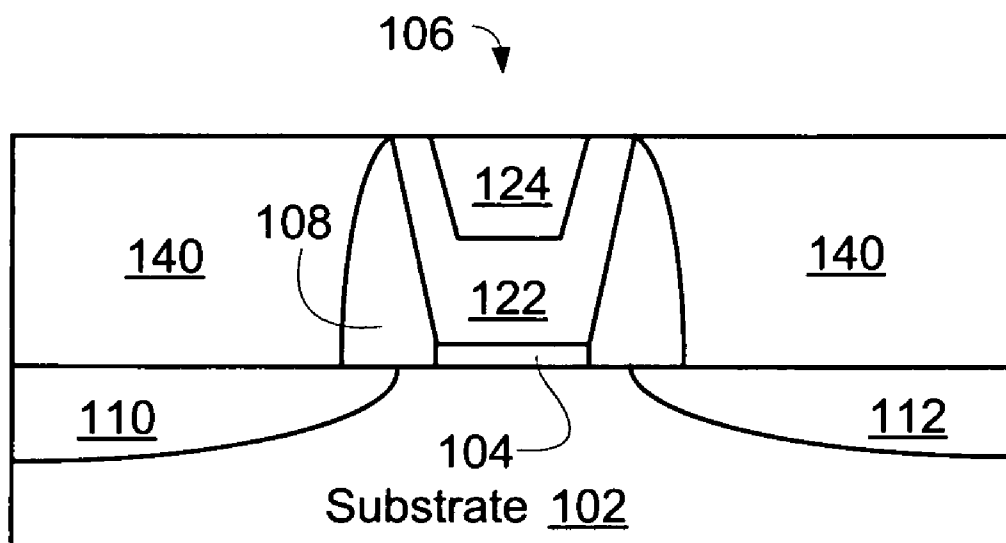


Figure 15

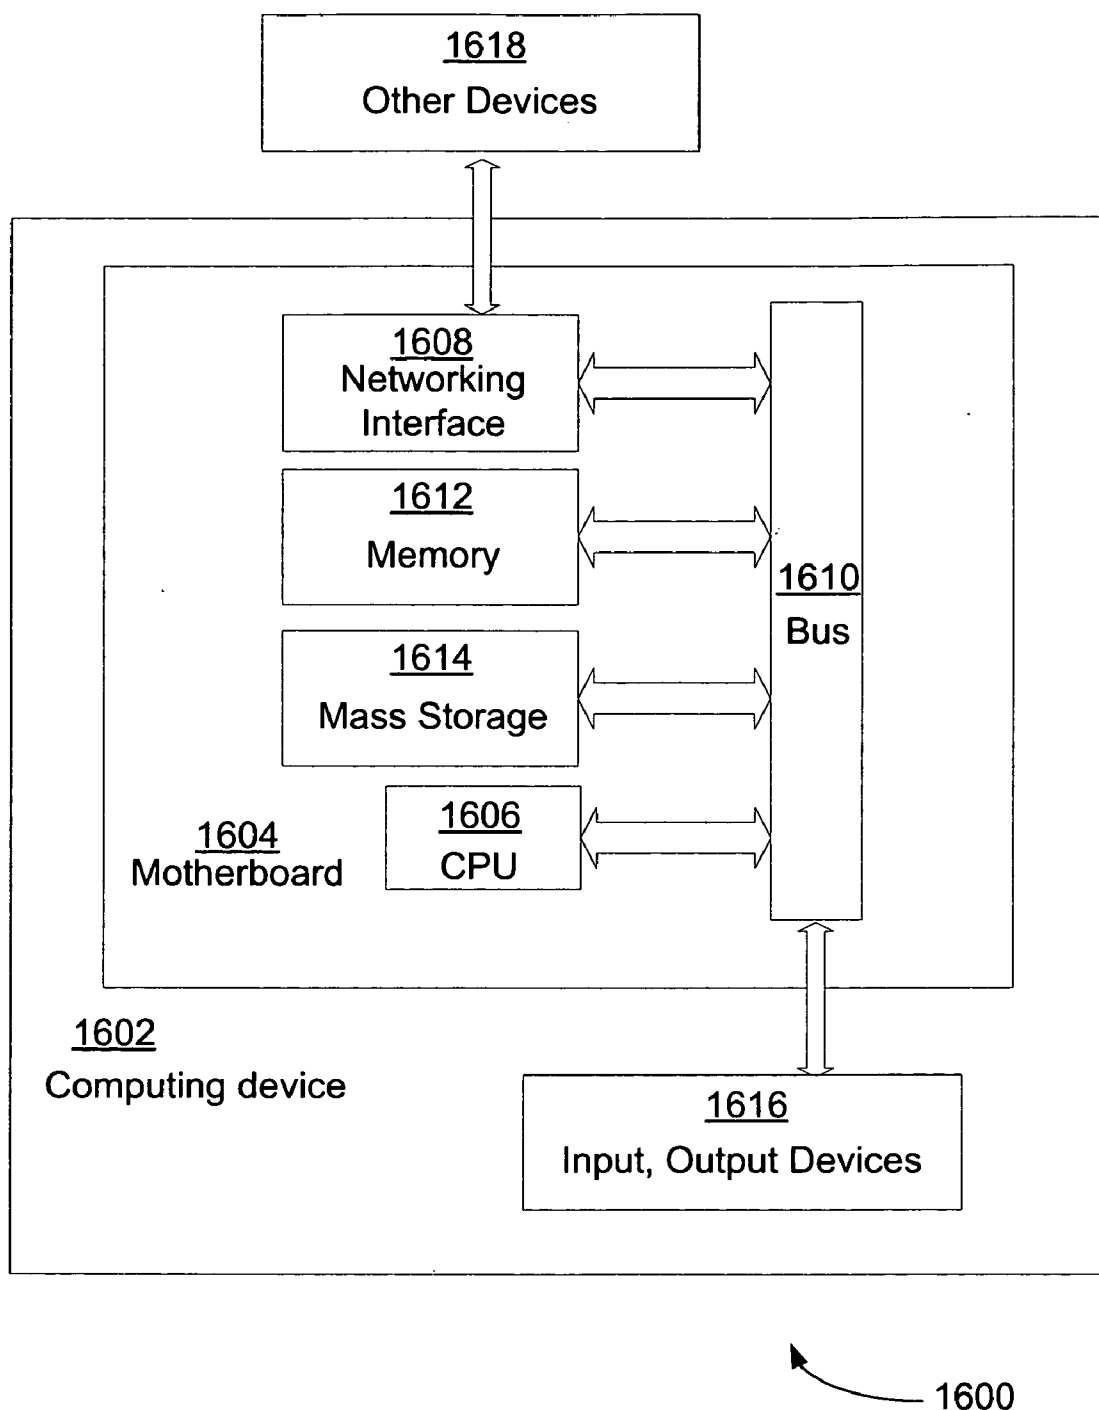


Figure 16

ANGLED IMPLANTATION FOR REMOVAL OF THIN FILM LAYERS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a divisional application of Ser. No. 11/293,753 filed Dec. 1, 2005, entitled “ANGLED IMPLANTATION FOR REMOVAL OF THIN FILM LAYERS”.

BACKGROUND OF THE INVENTION

[0002] Dry etching using tools such as plasma provide directional etching. However, such etching methods lack selectivity and may etch into materials below those desired to be etched, or the materials desired to be etched may be blocked from the plasma by structures above. Certain wet etchants have high selectivity as paired with substrates and target materials. However, many of these wet etchants etch at the same rate in all directions of material exposure (i.e. are isotropic), and may leave excessively large footings or under-cuttings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] FIGS. 1a through 1e are cross sectional side views that illustrate the semiconductor device of one embodiment of the present invention.

[0004] FIG. 2 is a cross sectional side view that illustrates a substrate from which the device may be formed.

[0005] FIG. 3 is a cross sectional side view that illustrates a blanket dielectric layer formed on the substrate.

[0006] FIG. 4 is a cross-sectional side view that illustrates a blanket gate electrode layer 206 formed on the blanket dielectric layer.

[0007] FIG. 5 is a cross-sectional side view that illustrates a first gate that may be formed by patterning the blanket gate electrode layer.

[0008] FIG. 6 is a cross-sectional side view that illustrates ions being implanted into portions of the blanket dielectric layer.

[0009] FIG. 7 is a cross-sectional side view that illustrates altered regions of the blanket dielectric layer after ion implantation.

[0010] FIG. 8 is a cross-sectional side view that illustrates a second set of ions being implanted into portions of the blanket dielectric layer in a second ion implantation process.

[0011] FIG. 9 is a cross-sectional side view that illustrates altered regions of the blanket dielectric layer after the second ion implantation.

[0012] FIG. 10 is a cross-sectional side view that illustrates the formation of the gate dielectric layer by removal of the damaged region of the blanket dielectric layer.

[0013] FIG. 11 is a cross-sectional side view that illustrates spacers formed adjacent the sidewalls of the gate electrode and source and drain regions formed in the substrate.

[0014] FIG. 12 is a cross-sectional side view that illustrates a first interlayer dielectric layer (ILD layer).

[0015] FIG. 13 is a cross-sectional side view that illustrates a trench formed by removal of the first gate electrode.

[0016] FIG. 14 is a cross-sectional side view that illustrates a first metal gate electrode layer formed in the trench.

[0017] FIG. 15 is a cross-sectional side view that illustrates the second gate electrode layer formed on the first metal gate layer.

[0018] FIG. 16 is a block diagram that illustrates a system in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION

[0019] In various embodiments, an apparatus and method relating to the formation of a semiconductor device are described. In the following description, various embodiments will be described. However, one skilled in the relevant art will recognize that the various embodiments may be practiced without one or more of the specific details, or with other replacement and/or additional methods, materials, or components. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of various embodiments of the invention. Similarly, for purposes of explanation, specific numbers, materials, and configurations are set forth in order to provide a thorough understanding of the invention. Nevertheless, the invention may be practiced without specific details. Furthermore, it is understood that the various embodiments shown in the figures are illustrative representations and are not necessarily drawn to scale.

[0020] Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular feature, structure, material, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention, but do not denote that they are present in every embodiment. Thus, the appearances of the phrases “in one embodiment” or “in an embodiment” in various places throughout this specification are not necessarily referring to the same embodiment of the invention. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments. Various additional layers and/or structures may be included and/or described features may be omitted in other embodiments.

[0021] Various operations will be described as multiple discrete operations in turn, in a manner that is most helpful in understanding the invention. However, the order of description should not be construed as to imply that these operations are necessarily order dependent. In particular, these operations need not be performed in the order of presentation. Operations described may be performed in a different order than the described embodiment. Various additional operations may be performed and/or described operations may be omitted in additional embodiments.

[0022] A device with a reverse-tapered (i.e. wider toward the top than toward the bottom) gate electrode and its method of fabrication is disclosed herein. The device may be a transistor. There is a gate dielectric under the gate electrode. The gate dielectric has a length close to a gate length measured adjacent the gate dielectric. The gate dielectric layer may lack a large footing beyond the gate length and a large undercut beneath the gate electrode. Such large footings and undercuts may decrease transistor performance. The dielectric layer without large footing or undercut may be fabricated by using angled ion implants to alter a blanket dielectric layer, then removing the altered portions.

[0023] FIG. 1a is a cross sectional side view that illustrates the semiconductor device 100 of one embodiment of the present invention. In the cross-sectional side view of FIG. 1a, a Z-axis is perpendicular to a top surface of a substrate 102 and an X-Y plane (X is not shown as it extends into the plane of the Figure) substantially coincides with a top surface of the substrate 102. As used herein, the “length” of portions of the

device **100** is measured in the Y direction and the height in the Z direction. As used herein, angles are measured from the X-Y plane, with an angle perpendicular to the X-Y plane (in the Z-direction) being the maximum possible angle, of ninety degrees. Thus two angles referred to here may be the same number of degrees from the X-Y plane, but may be oriented in a different direction so that they point away from each other.

[0024] The device **100** may be a transistor formed on the substrate **102** in some embodiments. Substrate **102** may comprise any material that may serve as a foundation upon which a semiconductor device may be built. The substrate **102** may be a silicon containing substrate **102**. In an embodiment, the substrate **102** may comprise a semiconductor material such as single crystal silicon, gallium arsenide or another suitable material. In some embodiments, the substrate **102** may be a bulk semiconductor substrate **102**, while in other embodiments, the substrate **102** may be a semiconductor-on-insulator ("SOI") substrate. The substrate **102** may include multiple different layers and structures in some embodiments, while in other embodiments the substrate **102** may just be one layer of material.

[0025] There may be a gate dielectric layer **104** on the substrate **102** in some embodiments. The gate dielectric layer **104** may comprise a material with a high dielectric constant value. Such materials are referred to as high-k materials. The gate dielectric layer **104** may comprise, for example, hafnium oxide, hafnium silicon oxide, lanthanum oxide, lanthanum aluminum oxide, zirconium oxide, zirconium silicon oxide, titanium oxide, tantalum oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide, aluminum oxide, lead scandium tantalum oxide, and lead zinc niobate. Although a few examples of materials that may be used to form a high-k gate dielectric layer **104** are described here, the gate dielectric layer **104** may be made from other materials that serve to reduce gate leakage in other embodiments.

[0026] In embodiments where the gate dielectric layer **104** comprises a high-k material, the gate dielectric layer **104** may have a k-value higher than about 7.5. In other embodiments, the high-k gate dielectric layer **104** may have a k-value higher than about 10. In other embodiments, the high-k gate dielectric layer **104** may comprise a material with a k-value of about 12, or may comprise a material with a higher k-value than that. In other embodiments, the high-k gate dielectric layer **104** may have a k-value between about 15 and about 25, e.g. HfO_2 . In yet other embodiments, the high-k gate dielectric layer **104** may have a k-value even higher.

[0027] There may be a gate electrode **106** on the gate dielectric layer **104** in some embodiments. Only one layer is shown in the gate electrode **106** illustrated in FIG. 1a. However, in other embodiments, the gate electrode **106** may comprise multiple layers of materials. The gate electrode **106** may comprise a metal gate electrode layer or another material, such as polysilicon. In some embodiments, the gate electrode **106** may comprise a metal gate electrode layer as the only layer of the gate electrode **106** or as one of multiple layers in the gate electrode **106**. Such a metal gate electrode layer may be a work function metal layer, which may set a work function of the device **100**.

[0028] The gate electrode **106** may have reverse-tapered sidewalls in some embodiments. "Reverse-tapered" means the sidewalls generally get further apart toward the top, with each sidewall generally trending wider. The sidewalls may have an angle **114** with respect to the top of the substrate **102**.

In an embodiment, the sidewall of the gate electrode **114** may have an angle **114** between about eighty-five degrees and about seventy-five degrees, although the angle **114** may be different in other embodiments. FIG. 1a illustrates the gate electrode **106** as having idealized sidewalls, with the angle **114** consistent all the way along the sidewall. In reality, the sidewalls of the gate electrode may not be so consistent. The angle **114** may be measured by imagining a line through a point at the bottom of the gate electrode **106** sidewall, adjacent to the gate dielectric layer **104**, and through a point on the sidewall about two-thirds of the way up the height of the gate electrode **106**; the angle **114** of this line is considered the angle **114** of the sidewall. As all angles herein are measured from the X-Y plane and none are greater than ninety degrees, both sidewalls may have an angle **114** that is substantially the same, even though they point in different directions. However, as the gate electrode **106** is reverse-tapered rather than tapered, it is clear that the sidewalls generally extend away from each other and each is angled in substantially opposite directions away from the Z-axis.

[0029] The gate dielectric layer **104** may have a length **117** and the gate electrode **104** may have a gate length **116**. As illustrated in FIG. 1a, the length **117** of the gate dielectric layer **104** may be measured adjacent the gate electrode **106**. In some embodiments, the gate length **116** may be substantially the same as the length **117** of the gate dielectric **104**, although in other embodiments these lengths **116**, **117** may differ.

[0030] In an embodiment, the gate length **116** may be between about 18 nanometers and about 22 nanometers. In another embodiment, the gate length **116** may be about twenty-five nanometers or less. In another embodiment, the gate length **116** may be about thirty nanometers or less. In yet other embodiments, the gate length **116** may be greater than thirty nanometers.

[0031] The gate electrode **106** may also have an intermediate length **115** greater than the gate length **116**. The intermediate length **115** may be at a height further from the substrate **102** than the gate length **116**, such as about two-thirds of the way up the gate electrode **106**. As the sidewalls of the gate electrode **106** may be reverse-tapered, in such embodiments, the intermediate length **115** is greater than the gate length **116**. In an embodiment, the intermediate length **115** may be between about 15% and about 50% greater than the gate length **116**. In an embodiment, the intermediate length **115** may be between about 5 nanometers and about 15 nanometers greater than the gate length **116**.

[0032] There may be spacers **108** on either side of the gate electrode **106**. The spacers **108** may comprise any suitable material, such as silicon nitride, aluminum nitride, or another material.

[0033] There may be a source region **110** to one side of the gate electrode **106** and a drain region **112** to the other side of the gate electrode **106** in some embodiments. The source and drain regions **110**, **112** may be doped regions of the substrate **102** in an embodiment. In another embodiment, the source and drain regions **110**, **112** may comprise a source/drain material formed in recesses in the substrate **102**.

[0034] FIGS. 1b and 1c are cross-sectional side views that illustrate embodiments where the dielectric layer length **117** is less than the gate length **116** (FIG. 1b) and greater than the gate length **116** (FIG. 1c).

[0035] FIG. 1b is a cross sectional side view that illustrates an embodiment with a dielectric layer **104** with an undercut **118**. As illustrated, both sides of the dielectric layer **104** have

an undercut 118, although in other embodiments, only one side may have an undercut 118, or one side may have an undercut 118 larger than the other side. In an embodiment, the undercuts 118 of the dielectric layer 104 may be less than about ten angstroms. In an embodiment, the undercuts 118 of the dielectric layer 104 may be less than about three angstroms. In an embodiment, each undercut 118 of the dielectric layer 104 may have a size smaller than about 8% of the gate length 116. In an embodiment, each undercut 118 of the dielectric layer 104 may have a size smaller than about 4% of the gate length 116. In an embodiment, each undercut 118 of the dielectric layer 104 may have a size about 1% of the gate length 116 or smaller. In an embodiment, the combined sizes of undercuts 118 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 85% the gate length 116. In an embodiment, the combined sizes of undercuts 118 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 95% the gate length 116. In an embodiment, the combined sizes of undercuts 118 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 97% the gate length 116. In an embodiment, the combined sizes of undercuts 118 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 98% the gate length 116. Some embodiments may lack undercuts 118 altogether.

[0036] FIG. 1c is a cross sectional side view that illustrates an embodiment with a dielectric layer 104 with a footing 120. As illustrated, both sides of the dielectric layer 104 have footings 120, although in other embodiments, only one side may have a footing 120, or one side may have a footing 120 larger than the other side. In an embodiment, the footings 120 of the dielectric layer 104 may be less than about twenty angstroms. In an embodiment, the footings 120 of the dielectric layer 104 may be less than about six angstroms. In an embodiment, each footing 120 of the dielectric layer 104 may have a size smaller than about 10% of the gate length 116. In an embodiment, each footing 120 of the dielectric layer 104 may have a size smaller than about 5% of the gate length 116. In an embodiment, each footing 120 of the dielectric layer 104 may have a size about 2% of the gate length 116 or smaller. In an embodiment, the combined sizes of footings 120 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 120% the gate length 116. In an embodiment, the combined sizes of footings 120 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 110% the gate length 116. In an embodiment, the combined sizes of footings 120 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 105% the gate length 116. In an embodiment, the combined sizes of footings 120 of the dielectric layer 104 may result in the dielectric layer 104 having a length 117 between about 100% the gate length 116 and about 104% the gate length 116. Some embodiments may lack footings 120 altogether.

[0037] FIGS. 1d and 1e are cross-sectional side views that illustrate two embodiments where the gate electrode 106 comprises multiple layers.

[0038] There may be a first gate electrode layer 122 on the dielectric layer 104. The first gate electrode layer 122 may be

a metal gate electrode layer 122, although other suitable materials may be used as the first gate electrode layer 122 in other embodiments. The first gate electrode layer 122 may be a work function metal gate layer 122.

[0039] The metal work function layer 122 may be an n-type metal gate electrode. Materials that may be used to form n-type metal gate electrodes include: hafnium, zirconium, titanium, tantalum, aluminum, their alloys (e.g., metal carbides that include these elements, i.e., hafnium carbide, zirconium carbide, titanium carbide, tantalum carbide, and aluminum carbide), and aluminides (e.g., an aluminide that comprises hafnium, zirconium, titanium, tantalum, or tungsten).

[0040] The metal work function layer 122 may be a p-type metal gate electrode. Materials for forming p-type metal gate electrodes include: ruthenium, palladium, platinum, cobalt, nickel, and conductive metal oxides, e.g., ruthenium oxide.

[0041] Rather than n- or p-type, the metal work function layer 122 may be a mid-gap metal gate electrode. In such embodiments, the work function layer 122 may comprise stoichiometric titanium nitride, tantalum nitride, or another mid-gap material.

[0042] The device 100 may be a transistor, such as an NMOS, PMOS, or mid-gap transistor. In some embodiments, metal work function layers 122 for NMOS transistor devices 100 may have a workfunction that is between about 3.9 eV and about 4.2 eV. In some embodiments, metal work function layers 122 for PMOS devices 100 may have a workfunction that is between about 4.9 eV and about 5.2 eV. In some embodiments, metal work function layers 122 for semiconductor on insulator (SOI) mid-gap transistor devices 100 may have a workfunction that is between the workfunctions of NMOS and PMOS gate electrode materials. Although a few examples of materials for forming a metal work function layer 122 are identified here, such a component may be made from many other materials, as will be apparent to those skilled in the art.

[0043] The work function layer 122 may have a thickness. The thickness of the work function layer 122 may be chosen to provide a desired work function and threshold voltage (V_{th}) of the gate of the device 100. In an embodiment, the thickness may be between about 50 angstroms and about 200 angstroms. In an embodiment, the thickness may be between about 50 angstroms and about 100 angstroms. In other embodiments, the thickness may be greater than about 75 angstroms. In yet other embodiments, the thickness may be different.

[0044] There may be a second gate electrode layer 124 on the first gate electrode layer 122. This second gate electrode layer 124 may comprise another metal or metals, e.g., a metal that may be easily polished like tungsten, aluminum, titanium, or titanium nitride, or a metal with a low resistance. The second gate electrode layer 124 may comprise polysilicon, which may be doped, in other embodiments. The second gate electrode layer 124 may comprise a fill material in some embodiments, to fill some or all of the rest of the volume of the gate electrode 106. Such a material may make up the remainder of the gate electrode 106, or additional layers may be part of the gate electrode 106 as well, below the first gate electrode layer 122, between the first and second gate electrode layers 122, 124, or on the second gate electrode layer 124.

[0045] In the embodiment of FIG. 1d, the first gate electrode layer 122 is present only up to a certain height of the gate

electrode **106**. The second gate electrode layer **124** is on top of the first gate electrode layer **122** and is adjacent the sidewalls. Such a gate electrode **106** may be formed by forming blanket layers of electrode layer **122**, **124** material, then removing portions of the blanket layers, leaving gate electrode layers **122**, **124**, and forming spacers adjacent to the gate electrode **106**.

[0046] In the embodiment of FIG. 1e, the first gate electrode layer **122** is conformal to the dielectric layer **104** and spacers **108**, and extends up substantially to the top of the gate electrode **106**. The second gate electrode layer **124** is within the first gate electrode layer **122**. However, as used here, the second gate electrode layer **124** is still “on” the first gate electrode layer **122**.

[0047] FIGS. 2 through 15 illustrate stages in the formation of the device **100** of FIG. 1, according to one embodiment.

[0048] FIG. 2 is a cross sectional side view that illustrates a substrate **102** from which the device **100** may be formed according to one embodiment. The substrate **102** may comprise any suitable material from which devices **100** may be formed. In an embodiment, the substrate **102** may be a bulk single crystal silicon material. In other embodiments, other semiconductor materials, such as gallium arsenide, or other materials, may be used for the substrate **102**. The substrate **102** may also be a semiconductor-on-insulator (“SOI”) substrate **102**, with a buried insulator layer. In some embodiments, the substrate **102** may comprise additional layers and/or structures that are not shown in the Figures.

[0049] FIG. 3 is a cross-sectional side view that illustrates a blanket dielectric layer **204** formed on the substrate, according to one embodiment. The blanket dielectric layer **204** may comprise a high-k material in some embodiments. The blanket dielectric layer **204** may comprise, for example, hafnium oxide, hafnium silicon oxide, lanthanum oxide, lanthanum aluminum oxide, zirconium oxide, zirconium silicon oxide, titanium oxide, tantalum oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide, aluminum oxide, lead scandium tantalum oxide, and lead zinc niobate. In other embodiments, the blanket dielectric layer **204** (and the dielectric layer **104**) may comprise a non-high-k material, such as silicon dioxide. Although a few examples of materials that may be used to form a blanket dielectric layer **204** are described here, the blanket dielectric layer **204** may comprise any suitable material.

[0050] FIG. 4 is a cross-sectional side view that illustrates a blanket gate electrode layer **206** formed on the blanket dielectric layer **204**, according to one embodiment. The blanket gate electrode layer **206** may be a sacrificial blanket gate electrode layer **206** in some embodiments, although in other embodiments it may not be. The blanket gate electrode layer **206** may comprise more than one layer in some embodiments, even though only one layer is illustrated in FIG. 4. For example, the blanket gate electrode layer **206** may include a first layer that comprises a metal, such as Ti or TaN, and a second polysilicon layer on the first layer. The first layer may be about twenty to fifty angstroms thick in some embodiments, although it may have a different thickness. The first layer may keep the polysilicon from contacting the dielectric layer **204** in such embodiments. Other materials may also be used.

[0051] FIG. 5 is a cross-sectional side view that illustrates a first gate **208** that may be formed by patterning the blanket gate electrode layer **206**. In an embodiment, a hard mask layer **210** may be formed on the blanket gate electrode layer **206**.

The hard mask layer **210** may be patterned, and used to pattern the blanket gate electrode layer **206**. The first gate **208** may have reverse-tapered sidewalls with a sidewall angle **114** and a gate length **116** as described above with respect to the gate electrode **106**. In an embodiment, the reverse-tapered sidewalls may be formed by using a dry etch process to remove portions of the blanket gate electrode layer **206**, increasing the bias during the etch to remove more of the blanket gate electrode layer **206** closer to the substrate **102** than further from the substrate **102**. Blanket dielectric layer **204** may be electrically charged, which may promote a slightly faster etch rate at the lower part of blanket gate electrode layer **206** than occurs at the upper part of blanket gate electrode layer **206**. In other embodiments, other suitable processes may be used. In some embodiments, the first gate electrode **208** may be sacrificial, and removed and replaced with gate electrode **106**. In other embodiments, the first gate electrode **208** may remain in place and also be the gate electrode **106**. Other embodiments may be a hybrid between these two processes, with part of the first gate electrode **208** being removed and part of the first gate electrode **208** remaining in place to become part of gate electrode **106**.

[0052] FIG. 6 is a cross-sectional side view that illustrates ions **302** being implanted into portions of the blanket dielectric layer **204** to alter those portions of the blanket dielectric layer **204** and make them more susceptible to removal, according to one embodiment. The hard mask layer **210** and first gate electrode **208** protect other portions of the blanket dielectric layer **204** from being altered by the ion **302** implantation. Any suitable method may be used to implant ions **302** into portions of the blanket dielectric layer **204**. In an embodiment, the blanket dielectric layer **204** may comprise HfO_2 with a thickness between about 0.5 nanometers and about 2 nanometers. In an embodiment, the substrate **102** comprises silicon, and silicon ions **302** are selected for implantation to facilitate a subsequent annealing and recrystallization of the substrate **102**, to mitigate structural alteration of the substrate **102** resulting from ion **302** bombardment. The silicon ions may be supplied to an ion implanter by a silicon source, such as silicon fluoride (SiF_4). The implantation energy may be between about 200 eV and about 35 keV and the dosage may be between about $2 \times 10^{14} \text{ cm}^{-2}$ and about $5 \times 10^{15} \text{ cm}^{-2}$ to implant silicon ions into and through the HfO_2 blanket dielectric layer **204**. In other embodiments, silicon, germanium, arsenic or other ions may be used. In an embodiment, germanium ions may be implanted at a dosage of about $2 \times 10^{15} \text{ cm}^{-2}$ and an implantation energy of about 2 keV. In an embodiment, silicon ions may be implanted at a dosage of about $3 \times 10^{15} \text{ cm}^{-2}$ and an implantation energy of about 2 keV. Rather than a single ion **302** implantation, a series of multiple relatively small implantations may be substituted. In other embodiments, other suitable non-silicon ions **302** may be implanted, ions **302** of multiple elements may be implanted, and different implantation energies may be used.

[0053] The ions **302** may be implanted at an angle **304** of ion implantation similar to the angle of one of the sidewalls of the gate electrode **208**. For example, in FIG. 6, the ions **302** are implanted at an angle **304** similar to the angle **114** of the right-hand sidewall of the gate electrode **208** and angle **304** may be oriented in substantially the same direction as angle **114**. In an embodiment, the angle **304** of ion implantation is within about five degrees of the sidewall angle **114**. In an embodiment, the angle **304** of ion implantation is within about two degrees of the sidewall angle **114**. In an embodi-

ment, the angle **304** of ion implantation is between about equal to the sidewall angle **114** and about five degrees less than the sidewall angle **114** (e.g., if there is 85 degrees between the sidewall and the X-Y plane, the angle **304** is between about 85 degrees and about 80 degrees in such an embodiment). In an embodiment, the angle **304** of ion implantation is between about equal to the sidewall angle **114** and about two degrees less than the sidewall angle **114**. In some embodiments, by having the angle **304** of the ion **302** implantation similar to that of the side wall angle **114**, the portion **306** of the blanket dielectric layer **204** adjacent where the sidewall of the first gate electrode **208** may be altered by the ions **302**. Were the ions **302** implanted perpendicular to the substrate **102**, the larger width toward the top of the first gate electrode **208** would shadow portion **306** and prevent it from being altered by the ions **302**. Such a scheme may result in portions of the blanket dielectric layer **204** adjacent the sidewalls of first gate electrode **208** remaining in place so the footings **118** of the dielectric layer **104** are large, thereby reducing the performance of the device **100**, or causing other problems with device **100** operation.

[0054] FIG. 7 is a cross-sectional side view that illustrates altered regions **212** of the blanket dielectric layer **204** after ion **302** implantation, according to one embodiment. The altered regions **212** may also be referred to as damaged regions **212**. The ions **302** may have structurally altered or damaged the portions of the blanket dielectric layer **204** to result in the altered regions **212**. These altered regions **212** may be amorphized or modified by the ions **302**, resulting in structural disruption or alteration of the blanket dielectric layer **204**, such as bond breakage and/or chemically or physically induced crystal disorganization, which is associated with decreased resistance to outside chemistry. In other words, the implantation causes "structural alteration" of exposed portions of the blanket dielectric layer **204**, which makes the altered portion **212** more susceptible to a selected wet etchant than unaltered (also referred to as undamaged) regions **214** of the blanket dielectric layer **204**, which may have been protected from the ions **302** by the first gate electrode **208** and hard mask **210**.

[0055] FIG. 8 is a cross-sectional side view that illustrates a second set of ions **312** being implanted into portions of the blanket dielectric layer **204** in a second ion implantation process. The second set of ions **312** may alter some of the blanket dielectric layer **204** that remained unaltered **214** after the first ion implantation **302**. The ions **312** of the second ion implantation may be implanted similarly to the first ions **302** of the first ion implantation.

[0056] The ions **304** may be implanted at an angle **314** of ion implantation similar to the angle of the other sidewall of the gate electrode **208**. For example, in FIG. 6, the ions **302** are implanted at an angle **304** similar to the angle **114** of the right-hand sidewall of the gate electrode **208**. In FIG. 8, the ions **312** are therefore implanted at an angle **314** similar to the angle **114** of the left-hand sidewall, and angle **314** is oriented in substantially the same direction as angle **114** of the left-hand sidewall. In other words, if both sidewalls of the gate electrode **208** are at an angle of eighty five degrees from the plane of the top surface of the substrate **102**, ions **302**, **312** of both ion implantations may be implanted at angles **304**, **314** similar to eighty five degrees; if both implantations are at eighty-five degrees, there is a ten degree difference between the two implantation angles **304**, **314**. In an embodiment, the angle **314** of ion implantation is within about five degrees of

the left sidewall angle **114**. In an embodiment, the angle **314** of ion implantation is within about two degrees of the sidewall angle **114**. In an embodiment, the angle **314** of ion implantation is between about equal to the sidewall angle **114** and about five degrees less than the sidewall angle **114** (e.g., if there is 85 degrees between the sidewall and the X-Y plane, the angle **314** is between about 85 degrees and about 80 degrees in such an embodiment). In an embodiment, the angle **314** of ion implantation is between about equal to the sidewall angle **114** and about two degrees less than the sidewall angle **114**. This second ion **312** implantation may occur after the first ion **302** implantation, or may occur substantially simultaneously.

[0057] FIG. 9 is a cross-sectional side view that illustrates altered regions **212** of the blanket dielectric layer **204** after the second ion **312** implantation, according to one embodiment. As seen in FIG. 9, much or all of the exposed portion of the blanket dielectric layer **204** (the portion not covered by the gate electrode **208**) has been converted to an altered region **212**. The second ion **312** implantation has altered much or all of the blanket dielectric layer **204** that had been shadowed by the gate electrode **208** during the first ion **302** implantation. Thus, after the second ion **312** implantation, much or all of the exposed portion of the blanket dielectric layer **204** has been altered or damaged by ion implantation, making the damaged region **212** more susceptible to a selected wet etchant.

[0058] FIG. 10 is a cross-sectional side view that illustrates the formation of the gate dielectric layer **104** by removal of the damaged region **212** of the blanket dielectric layer **204**, according to one embodiment. Because the angled ion implantations may provide a highly anisotropic alteration of the blanket dielectric layer **204**, and the etchant may be highly selective to the altered portions **212** of the blanket dielectric layer **204**, the gate dielectric layer **104** may be formed that has little or no footings **120** or undercuts **118**, as described above with respect to FIGS. 1b and 1c, which may result in a device **100** that performs better than it would with a gate dielectric layer **104** with large footings **120** or undercuts **118**. Suitable etchants that may be used to remove the altered regions **212** of the blanket dielectric layer **204** include but are not limited to phosphoric acid (H_3PO_4), hydrofluoric acid (HF), buffered HF, hydrochloric acid (HCl), sulfuric acid (H_2SO_4), nitric acid (HNO_3), acetic acid (CH_3COOH), sodium hydroxide (NaOH), potassium hydroxide (KOH), ammonium hydroxide (NH_4OH), alcohols, potassium permanganate (KMnO_4), ammonium fluoride (NH_4F), tetramethyl ammonium hydroxide (TMAH), and others. In an embodiment, a buffered hydrofluoric acid with a pH of about 4 may be used.

[0059] FIG. 11 is a cross-sectional side view that illustrates spacers **108** formed adjacent the sidewalls of the gate electrode **208** and source and drain regions **110**, **112** formed in the substrate, according to an embodiment. The source and drain regions **110**, **112** may be formed by doping regions of the substrate **102** in an embodiment. In another embodiment, the source and drain regions **110**, **112** may be formed by removing portions of the substrate **102** to form recesses **130**, **132**, then filling the recesses **130**, **132** with a source/drain material. Such a material may extend beyond the top surface of the substrate **102**, and may be doped during formation or after formation. Other suitable methods to make source and drain regions **110**, **112** may also be used. Any suitable method may be used to make the spacers **108**.

[0060] FIG. 12 is a cross-sectional side view that illustrates a first interlayer dielectric layer (ILD layer) **140**, according to

an embodiment. Note that the first ILD layer **140** may be present in the device **100** shown in FIG. **1a**; it was left out of the Figure for simplicity. Any suitable material may be used as the ILD layer **140**. Excess material of the ILD layer **140** may have been placed on the substrate **102** and gate electrode **208**. The excess material above the top surface of the gate electrode **208** may be removed to expose the top surface of the first gate electrode **208**, as is illustrated in FIG. **12**.

[0061] FIG. **13** is a cross-sectional side view that illustrates a trench **220** formed by removal of the first gate electrode **208**, according to one embodiment. The first gate electrode **208** may be removed by any suitable method. Note that while FIG. **13** shows the first gate electrode **208** completely removed, in some embodiments, a portion of the first gate electrode **208** may remain in place. For example, if the first gate electrode **208** comprises a polysilicon layer and an intermediate layer between the polysilicon layer and the gate dielectric **104**, the intermediate layer may be left behind in some embodiments. Further, FIGS. **13** through **15** only illustrate embodiments where all or part of the first gate electrode **208** is removed and replaced with a replacement gate electrode comprising one or more gate electrode layers, which may also be referred to as “replacement gate electrode layers.” In other embodiments, the first gate electrode **208** may be left in place and used as the gate electrode **106** of the device **100** after fabrication.

[0062] FIG. **14** is a cross-sectional side view that illustrates a first metal gate electrode layer **122** formed in the trench **220**, according to one embodiment. As illustrated in FIG. **14**, the first metal gate layer **122** is conformal to the trench bottom and sidewalls, similar to the embodiment discussed with respect to FIG. **1e**. Any suitable method may be used to form the first metal gate layer **122**. The first gate electrode layer **122** may comprise other suitable materials besides metal.

[0063] FIG. **15** is a cross-sectional side view that illustrates the second gate electrode layer **124** formed on the first metal gate layer **122**, according to one embodiment. In an embodiment, the second gate electrode layer **124** may fill remaining portions of the trench **220** not filled by the first gate electrode layer **122** and other layers, to result in the gate electrode **106**. The second gate electrode layer **124** may comprise a metal, polysilicon, or another material.

[0064] Additional gate electrode layers beyond the first and second gate electrode layers **122**, **124** may also be formed in the trench **220** and form part of the final gate electrode **106**. Alternatively, only one layer may be formed in the trench **220**, and that one layer may make up the gate electrode **106**.

[0065] While FIGS. **14** and **15** illustrate the first gate electrode layer **122** being conformal to the trench **220** and the second gate electrode layer **124** being on the first gate electrode layer **122**, the first gate electrode layer **122** may be formed within the trench **220** in a less or non-conformal manner and the second gate electrode layer **124** formed on the first gate electrode layer **122** and adjacent the trench **220** sidewalls, to result in the gate electrode **106** illustrated in FIG. **1d**.

[0066] As the trench **220** is wider towards the top than at the bottom because of the reverse-tapered shape of gate electrode **208**, it is easier to form the layer or layers that form the gate electrode **106** than if the trench had straight walls or was tapered. Such a reverse-tapered shape helps avoid the formation of voids, such as when a material being deposited bridges the gap at the top of the trench **220** prior to lower volumes of the trench **220** being filled.

[0067] Additional process steps may be performed to complete the device **100**, as will be appreciated by those of skill in the art.

[0068] FIG. **16** is a block diagram that illustrates a system **1600** in accordance with one embodiment of the present invention. One or more devices **100** with reverse-tapered gate electrodes **106** and dielectric layers **104** with little to no footings **120** or undercuts **118** as described above may be included in the system **1600** of FIG. **16**. As illustrated, for the embodiment, system **1600** includes a computing device **1602** for processing data. Computing device **1602** may include a motherboard **1604**. Coupled to or part of the motherboard **1604** may be in particular a processor **1606**, and a networking interface **1608** coupled to a bus **1610**. A chipset may form part or all of the bus **1610**. The processor **1606**, chipset, and/or other parts of the system **1606** may include one or more devices **100** as described above.

[0069] Depending on the applications, system **1600** may include other components, including but are not limited to volatile and non-volatile memory **1612**, a graphics processor (integrated with the motherboard **1604** or connected to the motherboard as a separate removable component such as an AGP or PCI-E graphics processor), a digital signal processor, a crypto processor, mass storage **1614** (such as hard disk, compact disk (CD), digital versatile disk (DVD) and so forth), input and/or output devices **1616**, and so forth.

[0070] In various embodiments, system **1600** may be a personal digital assistant (PDA), a mobile phone, a tablet computing device, a laptop computing device, a desktop computing device, a set-top box, an entertainment control unit, a digital camera, a digital video recorder, a CD player, a DVD player, or other digital device of the like.

[0071] Any of one or more of the components **1606**, **1614**, etc. in FIG. **16** may include one or more device **100** as described herein. For example, a transistor **100** may be part of the CPU **1606**, motherboard **1604**, graphics processor, digital signal processor, or other devices.

[0072] The foregoing description of the embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. This description and the claims following include terms, such as left, right, top, bottom, over, under, upper, lower, first, second, etc. that are used for descriptive purposes only and are not to be construed as limiting. For example, terms designating relative vertical position refer to a situation where a device side (or active surface) of a substrate or integrated circuit is the “top” surface of that substrate; the substrate may actually be in any orientation so that a “top” side of a substrate may be lower than the “bottom” side in a standard terrestrial frame of reference and still fall within the meaning of the term “top.” The term “on” as used herein (including in the claims) does not indicate that a first layer “on” a second layer is directly on and in immediate contact with the second layer unless such is specifically stated; there may be a third layer or other structure between the first layer and the second layer on the first layer. The embodiments of a device or article described herein can be manufactured, used, or shipped in a number of positions and orientations. Persons skilled in the relevant art can appreciate that many modifications and variations are possible in light of the above teaching. Persons skilled in the art will recognize various equivalent combinations and substitutions for various components shown in the Figures. It is

therefore intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto.

I claim:

1. A semiconductor device, comprising:

a substrate;

a gate dielectric layer on the substrate, the gate dielectric layer having a length;

a gate electrode on the gate dielectric layer, the gate electrode having a gate length adjacent the gate dielectric layer, the gate electrode having reverse-tapered sidewalls so the gate electrode has an intermediate length further from the gate dielectric layer than the gate length, the intermediate length being greater than the gate length; and

wherein the length of the gate dielectric layer is between about 120% and about 85% of the gate length.

2. The device of claim 1, wherein at least a portion of the gate electrode sidewalls has a sidewall angle between the gate electrode sidewalls and a top surface of the substrate, the sidewall angle being between about eighty-five degrees and about seventy-five degrees.

3. The device of claim 1, wherein the gate electrode includes a work function metal gate layer comprising a first metal and a second metal gate layer comprising a second metal different than the first metal on the work function metal gate layer.

4. The device of claim 3, wherein the work function metal gate layer is conformal to the bottom and sidewalls and has a thickness between about 50 angstroms and about 100 angstroms.

5. The device of claim 1, wherein the length of the gate dielectric layer is between about 105% and about 97% of the gate length.

6. The device of claim 1, wherein the gate length is between about 18 nanometers and about 22 nanometers and the length of the gate dielectric layer is between about 23.2 nanometers and about 17.4 nanometers.

7. The device of claim 1, wherein the gate dielectric layer has a footing less than or equal to about six angstroms on each side.

8. The device of claim 1, wherein the gate dielectric layer has an undercut less than or equal to about three angstroms on each side.

* * * * *