




(86) Date de dépôt PCT/PCT Filing Date: 2014/01/16
(87) Date publication PCT/PCT Publication Date: 2014/07/24
(45) Date de délivrance/Issue Date: 2023/09/26
(85) Entrée phase nationale/National Entry: 2015/07/09
(86) N° demande PCT/PCT Application No.: ES 2014/070023
(87) N° publication PCT/PCT Publication No.: 2014/111610
(30) Priorités/Priorities: 2013/01/17 (ES P 201330046);
2013/10/31 (ES P 201331602)

(51) Cl.Int./Int.Cl. *B65D 19/00* (2006.01)
(72) Inventeurs/Inventors:
MARCONEL CARPIO, JOSE LUIS, ES;
GARCIA GUILLEN, TOMAS ANDRES, ES
(73) Propriétaire/Owner:
LOGICPALET WORLD S.L., ES
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : STRUCTURE AUTO-MONTABLE DEMONTABLE
(54) Title: DISMANTLABLE SELF-ASSEMBLY STRUCTURE

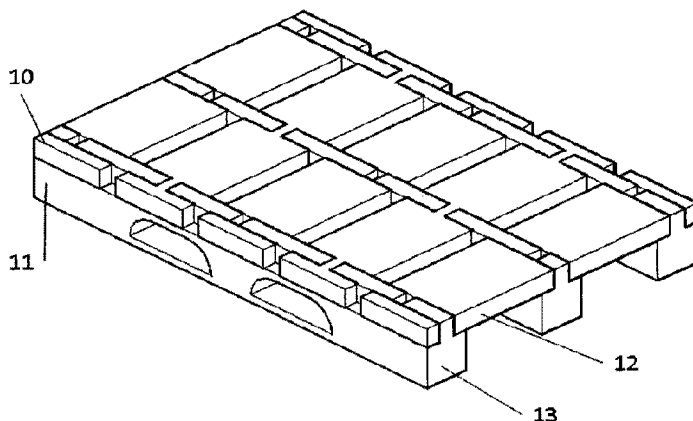

(57) **Abbrégé/Abstract:**

The invention relates to a self-assembly formed by a series of longitudinal members and cross members, all of the longitudinal members being identical to one another and all of the cross members being identical to one another, such that only two types of parts are required to construct the structure. Owing to the shape of the parts, they can be assembled to one another to create a solid structure, without requiring any other connecting materials or elements. The longitudinal members comprise a series of slots into which narrowed segments of the cross members are inserted. Once the cross members have been inserted into the slots they are trapped therein by moving the longitudinal members and, in order to prevent this movement occurring in the opposite direction, other cross members are inserted into slots provided in the longitudinal members for this purpose.

ABSTRACT

The invention relates to a self-assembly formed by a series of longitudinal members and
5 cross members, all of the longitudinal members being identical to one other and all of
the cross members being identical to one other, such that only two types of parts are
required to construct the structure. Owing to the shape of the parts, they can be
assembled to one another to create a solid structure without requiring any other
connecting materials or elements. The longitudinal members comprise a series of slots
10 into which narrowed segments of the cross members are inserted. Once the cross
members have been inserted into the slots they are trapped therein by moving the
longitudinal members and, in order to prevent this movement occurring in the opposite
direction, other cross members are inserted into slots provided in the longitudinal
members for this purpose.

DISMANTLABLE SELF-ASSEMBLY STRUCTURE

The present invention, as indicated by its name, relates to a self-assembly structure consisting of a series of longitudinal and cross members which, due to their shape, can
5 be assembled to each other generating a solid structure without requiring any additional connecting element or material.

The construction and assembly of the structure requires only two types of parts which, arranged differently depending on the intended purpose thereof, manage to compose
10 and provide solidity to the structure.

The field of the art to which it belongs is that of transportable structures.

BACKGROUND OF THE INVENTION

15 Although the type of structure disclosed can have many uses and applications, it is optimal for use as a transportation pallet; in fact, this is a sector in which the closest prior art documents, discussed below, have been found.

20 Pallets have been used for a long time to transport loads. However, said pallets must make several trips without a load.

In long-distance hauls the cost of returning the pallets due to their bulk makes the recovery thereof uneconomical.

25 It is also not easy to sell new pallets to distant locations as the trip between the manufacturer and the first user is also performed without a load.

In order to favour the transport of many pallets in a single transport unit, such as a truck
30 or container, dismantlable pallets have been conceived which, after they are used with a load in a transport, can be dismantled to optimise space.

Dismantlable pallets also favour the replacement of broken parts, as in non-dismantlable pellets a broken part often makes the pallet unusable, with the ensuing
35 economic and environment cost.

Among the antecedents of dismantlable pallets are the following:

Utility model ES245986 relates to a dismantlable pallet, which requires for rigidity of the assembly that the longitudinal members be attached to each other both on the top and
5 bottom, increasing the number of parts used in the assembling process.

Utility model ES1018770U relates to a dismantlable pallet the various elements of which are joined to each other by a series of lugs crossed by rods, thus requiring said union elements as well as the longitudinal and cross members that form the structure itself.

10

Utility model ES1033284U relates to dismantlable pallet the parts of which are attached to each other by a sandwich arrangement wherein protrusions have been added to the central part allowing assembly with orifices made in the outer parts. This solution presents some manufacturing drawbacks mainly resulting from the protrusions that must
15 be attached to the slat at a later stage, as well as transportation problems as the protrusions prevent optimising space in the transport when the pallet is transported dismantled.

Utility model ES1018770U relates to a self-assembly pallet configured on the basis of a
20 horizontal platform provided with tab-like incuts such that these tabs must be able to deform in order to assume a vertical position, thereby limiting the materials that can be used with this technical solution.

Patent EP0516681 published in Spain as ES2093698 relates to a dismantlable pallet
25 consisting of two hollow metal longitudinal members facing one another, the sides facing each other having a number of orifices in which can be inserted cross members provided on the bottom face thereof with slots with the appropriate arrangement and shape to rest on the inner vertical walls of said longitudinal members. This technical solution requires the longitudinal members to be metallic.

30

Patent US2007/0221537 relates to a three-dimensional structure made from several parts that assemble on each other wherein said parts are made or at least filled with several layers of cardboard and corrugated paper. This patent requires several different types of parts for the execution thereof. In addition, the assemblies produce protrusions
35 in the structure that hinder the handling and storage thereof.

Patent US8113129 relates to a pallet formed by different parts, longitudinal and cross members, that are assembled to each other, each on of these longitudinal and cross members consisting of two parts which when joined trap the part on which they cross
5 and are in turn trapped in the same. The assembly thus obtained produces protrusions that hinder the storage and handling of the pallet.

Patent US2009/0298015 relates to a dismantlable pallet formed by a number of parts, longitudinal and cross members, which cross to form the pallet and are joined by clips,
10 the union being reinforced by rods that cross the members longitudinally after the pallet has been assembled. This patent requires several different parts and rods and due to the union method protrusions are created that hinder the handling and storage of the pallet.

15 DESCRIPTION OF THE INVENTION

To overcome the aforementioned drawbacks a dismantlable structure is proposed that can be used as a pallet, for which reason most of the prior art relates to pallets and the explanation and examples of embodiments also relate to pallets, as this is the field that
20 appears optimal for exploitation thereof. For this reason, the term pallet will be used, although it is meant to include all other structures.

The pallet does not require screws or any additional elements to secure its unions, which is advantageous particularly for recycling purposes as it does not require the step
25 of dismantlable and separating materials.

This pallet can be made of any sufficiently rigid material; tests have been conducted with wood, plastic and even cardboard with outstanding results.

30 In addition, the simplicity of the unions thereof allows assembling the structure with only two types of parts.

The self-assembly structure is made from a specific number of two types of parts which, arranged differently, fulfil different functions in the structure. These parts are:

35

- Longitudinal member part which presents on the top part thereof a number of slots. These slots are prolonged on the bottom and, at some point in their path, move toward or away from the vertical axis of the longitudinal member. These longitudinal members are provided, also on their top part, with slots preferably arranged symmetrically with respect to the vertical axis of the member, and, at their bottom, with at least one cut-out, preferably two, in which can be inserted the skids of a forklift, these two cut-outs preferably arranged symmetrically with respect to the vertical axis of the member.
- Cross member presenting a number of narrowed segments. The narrowed segments are preferably made in both thickness and width. Thickness narrowed segments do not affect the two faces of the member identically. Instead, a narrowed segment is made on one of the faces and in the other the narrowed part remains flush with the surface of the member.

As indicated the slots at some point in their path lose their vertical position with respect to the opening, moving towards the vertical axis of the member or away from the vertical axis of the member.

Said loss of vertical position at some point of the path includes all slot shapes other than strictly vertical slots that remain in their entire path at a right angle to the surface of the part.

Such slots can adopt many possible shapes, such as L, J or C shapes.

The tests performed have led to selecting an L-shaped slot, although other options are not ruled out.

The longitudinal members have a greater thickness in the bottom part than in the top part thereof, with a cut-out determining the difference in thickness.

To assemble the pallet the longitudinal members are placed parallel to each other, at least one of them in the opposite direction to the others, that is, parallel but with a 180° rotation about the vertical axis.

In a preferred embodiment the longitudinal members alternate in direction, with one in one direction and the next in the opposite direction and so on.

5 To assemble the pallet the longitudinal members must be arranged such that the openings of their corresponding slots are aligned.

The cross members are introduced in the slots at the narrow ends thereof.

10 With the cross members inserted in the slots, the longitudinal members are displaced longitudinally, each one in the appropriate direction, until the slots thereof are aligned.

Once the longitudinal member slots have been aligned, additional cross members are placed in said slots.

15 In a preferred embodiment the cross members are inserted in the slots with the recessed part of the narrowed segment facing up and inserted in the slots with the recessed part of the narrowed segment facing down.

20 The pallet configured in this manner is strong, solid, does not have any protrusions on the sides thereof as the end of the cross members, needed to act as a stop and prevent the longitudinal members from coming out, is flush with the thickest part of the cross members.

25 In a preferred embodiment the cross members have a considerable width in order to provide a large support surface for the goods placed on the pallet, also allowing the sides of the cross members to be flush with the ends of the longitudinal members, thereby preventing protrusions that hinder the handling and storage of assembled pallets.

30 The longitudinal members present cut-outs on the bottom part thereof allowing the skids of a forklift to be introduced therein.

These cut-outs, present in one way or another in many pallets, make it impossible to transport the parts or the assembled pallets with a roller system, such that in a preferred

embodiment of the invention these cut-outs have been provided with a tie rod that is flush with the bottom surface of the longitudinal members.

BRIEF DESCRIPTION OF THE DRAWINGS

5

FIGURE 1 shows an exploded view of the part of a pallet, showing the longitudinal members (1) with the sides (11) provided with a recess (7), the central longitudinal member being in the opposite position to the other two; the cross members (2); the ends (10) and the sides (12) of the cross members (2); the cross members being arranged alternately having the recess of the narrowed segment (3) on the top and the next with the recess of the narrowed segment on the bottom.

FIGURE 2 shows the pallet assembled, showing that there are no protruding elements on the periphery thereof as the ends (10) of the cross members are flush with the sides (11) of the longitudinal members and the sides (12) of the cross members are flush with the ends (13) of the longitudinal members.

FIGURE 3 shows two identical cross members arranged in different ways, showing the ends (10) and the sides (12) thereof, in one of which the recess of the narrowed segment (3) is facing up and in the other the recess of the narrowed segment is facing down.

FIGURE 4 shows a longitudinal member (1) with the slots (4), in this case with an L shape, the slots (5), the thickening (6) of the bottom part of the longitudinal member, the recesses (7), the cut-outs (8) with the tie rod (9) flush against the bottom surface of the longitudinal member.

FIGURE 5 shows, for greater clarity, the plan, elevation and side views of the longitudinal member.

30

FIGURE 6 shows the plan, elevation and side views of the cross member, showing the reduction (3) in the narrowed segment on only one of the faces thereof, while the side narrowed segment (14) is made symmetrically on both sides.

35

DESCRIPTION OF A PREFERRED EMBODIMENT OF HTE INVENTION

As indicated above, the invention relates to a dismantlable self-assembly structure applicable in several sectors, although the tests performed show that it is ideal for use in the transportation sector, specifically to make pallets; this example is used to explain an embodiment of the invention represented in FIGURES 1 and 2, which is not the only one possible.

The pallet according to the proposed embodiment comprises three longitudinal members (1) and five cross members (2).

Each one of the longitudinal members comprises an elongated parallelepiped body with the lower part thereof thicker than the upper part thereof, a recess (7) determining the difference in thickness between the lower and upper parts.

At the top part the longitudinal member has a number of slots (4) that prolong downward to form an "L".

Said slots are suitable for inserting therein the cross members (2) at the narrowed area thereof.

To do so it is necessary to arrange the longitudinal members parallel to each other with the openings of the slots (4) aligned.

At least one of the longitudinal members must be placed in the opposite direction to the others, that is, with a rotation about the vertical axis thereof; in the proposed embodiment the central longitudinal member is placed in the opposite direction to the other two.

After the cross members (2) have been inserted in the longitudinal members (1) it is necessary to align the slots (5) in the longitudinal members.

Due to the L shape of the slots, and since at least one of the cross members is placed in the opposite direction to the others, when the slots are aligned the cross member is trapped in the horizontal part of the L-shaped slots such that it cannot come out.

To fix the position of the longitudinal members an additional set of cross members are inserted in the slots (5), blocking the movement thereof and thereby preventing the cross members inserted in the slots from coming out, resulting in a compact and solid pallet.

5

With the pallet configured in this manner the ends (10) of the cross members rest on the recess (7) flush with the thickening (6) of the bottom part of the longitudinal members present at the ends of the pallet.

10 In addition, the sides (12) of the cross members are flush with the ends (13) of the longitudinal members.

The periphery of the pallet is therefore lacking protruding elements thereby facilitating handling operations.

15

Additionally, the pallet according to the proposed construction has reductions (8) at the bottom part closed on the bottom thereof by a tie rod (9).

20 Said reductions allow introducing the skids of a forklift to facilitate the handling of the pallets.

To increase the strength of the assembly said reductions are closed by tie rods (9) placed flush with the bottom surface of the longitudinal member.

25 Said tie rods allow transporting the pallets or the longitudinal members along a roller system by providing smooth and recess-free bottom planes.

CLAIMS:

1. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE comprising a number of longitudinal members and cross members, wherein:

5 the longitudinal members are identical and are arranged in parallel for the assembly thereof, at least one of said members being arranged in the opposite direction to the others, each longitudinal member comprising:

10 a) a number of first slots located on a top surface of the longitudinal member having a vertical portion running parallel to a vertical axis of the longitudinal member, the vertical axis being an axis perpendicular to the top surface of the longitudinal member, and prolonged by a horizontal portion not running parallel to said vertical axis, thus moving towards or away from said vertical axis, wherein the horizontal portion of each of the first slots extend in a same direction towards or away from said vertical axis;

15 b) at least one second slot located on the top part of the longitudinal member running transversely across the top surface of the longitudinal member;

20 c) a portion with a narrow thickness at an upper part as compared to a lower part, with shoulders on either side of said portion with the narrow thickness; and

 d) said shoulders being determined by a difference in thickness between the upper part and the lower part;

25 the cross members are identical and each comprise a series of narrowed segments, ends and sides;

 the first slots and the at least one second slot of the longitudinal members are configured to engage with the narrowed segments of the cross members so as to be rigidly fixed with respect to one another; and
 once the structure is assembled,

30 the longitudinal members are arranged in parallel with the at least one of said members being arranged in the opposite direction to the others, that is, the at least one of said members being arranged with a 180° rotation about the vertical axis in respect of the others,

35 the ends of the cross members rest on the shoulders of the longitudinal members,

the narrowed segments engage with the first slots or the second slots,
and

since the at least one of the longitudinal members is placed in the
opposite direction to the other longitudinal members, the cross members
are trapped in the horizontal portion of the first slots such that the cross
members cannot come out.

2. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE according to claim 1, wherein
the longitudinal members have at least one cut-out in the lower part of the longitudinal
member.


3. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE according to claim 2, wherein
the at least one cut-out made in the lower part of the longitudinal members is closed on
a bottom by a tie-rod that is flush with a bottom surface of the longitudinal member.

4. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE according to claim 1, wherein
the narrowed segments provide a thickness reduction in the cross members, the
thickness reduction made only on one face of the cross members.

5. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE according to claim 1, wherein
once the structure is assembled, the ends of the cross members rest on the shoulders
and are flush with the lower part of the longitudinal members.


6. A DISMANTLABLE SELF-ASSEMBLY STRUCTURE according to claim 1, wherein
once the structure is assembled, the sides of the cross members placed at edges of the
assembled structure are flush with the ends of the longitudinal members.

1/6

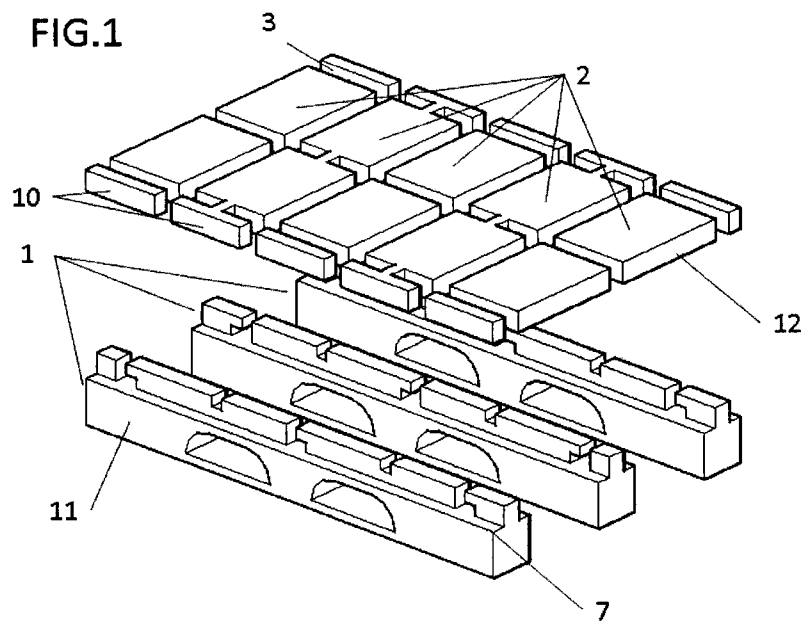


2/6

FIG.2

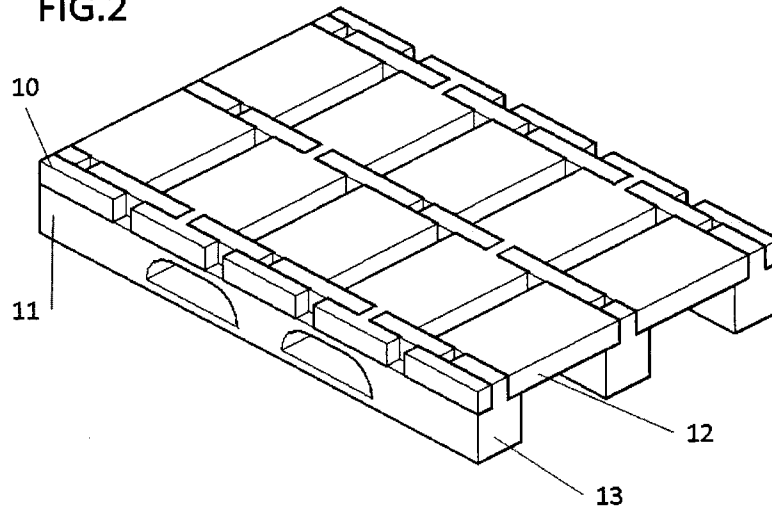

3/6

FIG.3

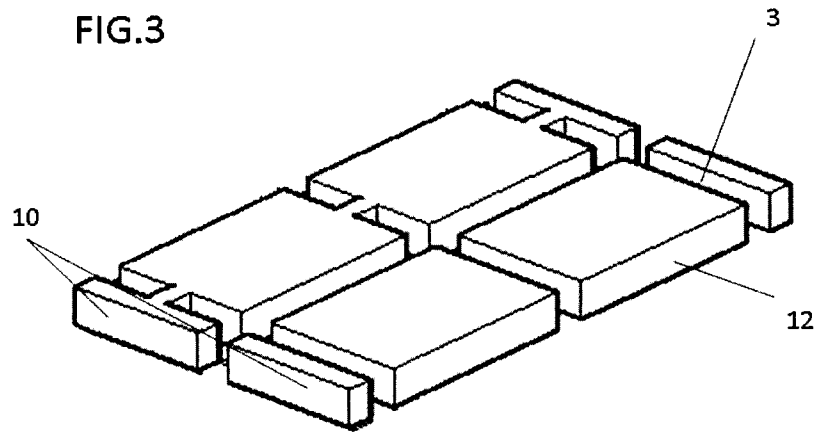

4/6

FIG.4


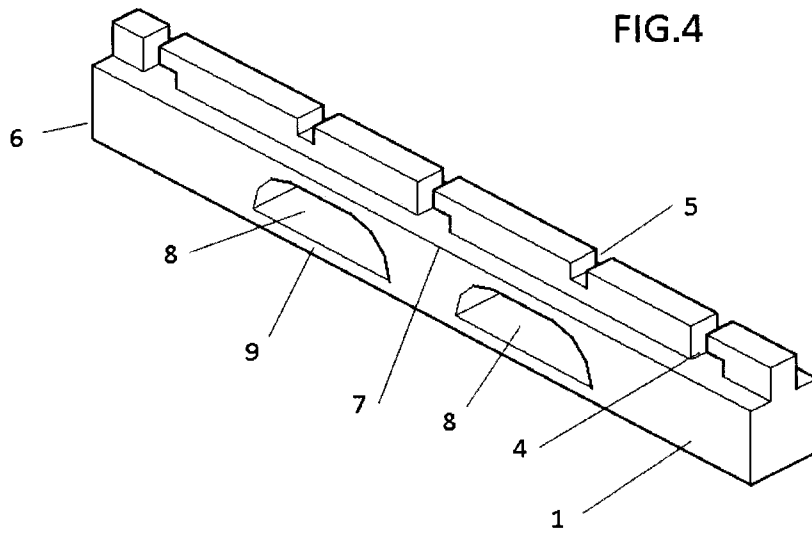


FIG.5



6/6

FIG.6

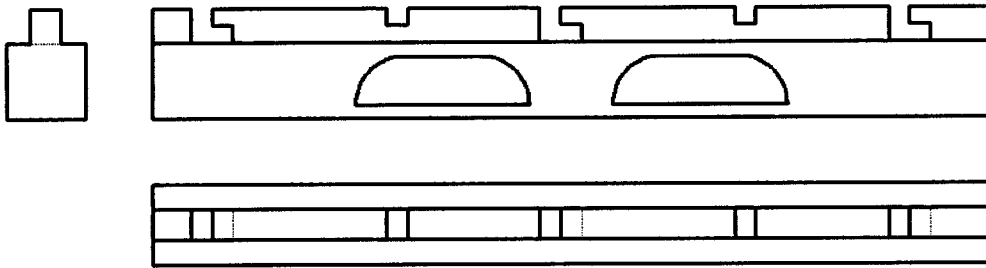