

(12) **United States Patent**
Dehe

(10) **Patent No.:** **US 10,263,542 B2**
(45) **Date of Patent:** ***Apr. 16, 2019**

(54) **PLATE, TRANSDUCER AND METHODS FOR MAKING AND OPERATING A TRANSDUCER**

(71) Applicant: **Infineon Technologies AG**, Neubiberg (DE)

(72) Inventor: **Alfons Dehe**, Reutlingen (DE)

(73) Assignee: **INFINEON TECHNOLOGIES AG**, Neubiberg (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/842,148**

(22) Filed: **Dec. 14, 2017**

(65) **Prior Publication Data**

US 2018/0109206 A1 Apr. 19, 2018

Related U.S. Application Data

(62) Division of application No. 14/962,949, filed on Dec. 8, 2015, now Pat. No. 9,876,446, which is a division (Continued)

(51) **Int. Cl.**
H01L 21/00 (2006.01)
H02N 99/00 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H02N 99/00** (2013.01); **G01N 21/956** (2013.01); **H01J 37/26** (2013.01); **H02N 1/08** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H02N 99/00; H02N 1/08; H04R 19/04
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,573,399 A 4/1971 Schroeder et al.
3,772,133 A 11/1973 Schmitt
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101222792 A 7/2008
CN 101347040 A 1/2009
(Continued)

OTHER PUBLICATIONS

4-Note Snail Design Log Drum, <http://www.amazon.com/4-Note-Snail-Design-Log-Drum/dp/B0002KMTSE>, downloaded for reference Apr. 22, 2015, 3 pages.

(Continued)


Primary Examiner — Laura M Menz

(74) *Attorney, Agent, or Firm* — Slater Matsil, LLP

(57) **ABSTRACT**

A plate, a transducer, a method for making a transducer, and a method for operating a transducer are disclosed. An embodiment comprises a plate comprising a first material layer comprising a first stress, a second material layer arranged beneath the first material layer, the second material layer comprising a second stress, an opening arranged in the first material layer and the second material layer, and an extension extending into opening, wherein the extension comprises a portion of the first material layer and a portion of the second material layer, and wherein the extension is curved away from a top surface of the plate based on a difference in the first stress and the second stress.

20 Claims, 8 Drawing Sheets

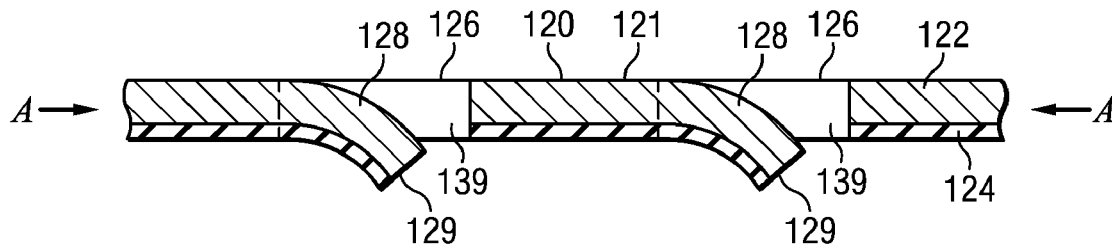

Related U.S. Application Data

of application No. 13/902,462, filed on May 24, 2013, now Pat. No. 9,362,853, which is a division of application No. 13/150,972, filed on Jun. 1, 2011, now Pat. No. 8,503,699.

(51) **Int. Cl.**

H04R 7/10 (2006.01)

H04R 31/00 (2006.01)

G01N 21/956 (2006.01)

H01J 37/26 (2006.01)

H02N 1/08 (2006.01)

H04R 19/04 (2006.01)

(52) **U.S. Cl.**

CPC **H04R 7/10** (2013.01); **H04R 19/04** (2013.01); **H04R 31/003** (2013.01); **Y10T** 428/24281 (2015.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

RE28,420 E 5/1975 Murphy
4,249,043 A 2/1981 Morgan et al.
4,442,324 A 4/1984 Blanchard et al.
4,567,382 A 1/1986 van Halteren
4,982,647 A 1/1991 Hertzberg et al.
5,490,220 A 2/1996 Loeppert
5,870,482 A 2/1999 Loeppert et al.
6,647,766 B2 11/2003 Despont et al.
6,775,388 B1 8/2004 Pompei
6,862,925 B2 3/2005 Desponet et al.
6,866,255 B2 3/2005 Fork et al.
7,082,684 B2 8/2006 Hantschel et al.
7,172,707 B2 2/2007 Fork et al.
7,190,038 B2 3/2007 Dehe et al.
7,253,016 B2 8/2007 Barzen et al.
7,348,646 B2 3/2008 Barzen et al.
7,372,348 B2 5/2008 Xu et al.
7,473,572 B2 1/2009 Dehe et al.
7,522,029 B1 4/2009 Lantz
RE40,781 E 6/2009 Johannsen et al.
7,545,252 B1 6/2009 Lantz
7,687,108 B2 3/2010 Xu et al.
7,820,458 B2 * 10/2010 Marokkey G03F 1/44
438/14
7,898,048 B2 3/2011 Nakatani
7,912,236 B2 3/2011 Dehe et al.
7,961,897 B2 6/2011 Weigold
8,265,309 B2 9/2012 Zhang
8,358,793 B2 1/2013 Weigold
8,450,122 B2 * 5/2013 Marokkey G03F 1/44
438/14
8,503,699 B2 * 8/2013 Dehe H04R 7/10
381/150
8,737,171 B2 * 5/2014 Jenkins B81B 3/0021
367/181
8,833,171 B2 * 9/2014 Besling G01L 9/0042
73/702
8,841,737 B2 * 9/2014 Laming B81B 3/0072
257/416
8,921,957 B1 * 12/2014 Zhang H04R 1/04
257/416
8,981,500 B2 * 3/2015 Pinter B81C 1/00103
257/415
9,148,726 B2 * 9/2015 Dehe G01L 9/0016
9,362,853 B2 * 6/2016 Dehe H04R 7/10
9,369,808 B2 * 6/2016 Chen H04R 19/005
9,510,110 B2 * 11/2016 Lee H04R 31/003
9,516,428 B2 * 12/2016 Dehe B81B 3/0018
9,641,949 B2 * 5/2017 Massoner B81C 1/00658
9,668,056 B2 * 5/2017 Dehe H04R 19/005
9,695,038 B2 * 7/2017 Cargill H04R 19/005
9,756,429 B2 * 9/2017 Jenkins B81B 3/0021

9,876,446 B2 * 1/2018 Dehe H04R 7/10
10,009,692 B2 * 6/2018 Tomar H04R 7/26
2001/0038598 A1 11/2001 Depont et al.
2004/0107770 A1 6/2004 Despont et al.
2004/0259286 A1 12/2004 Dehe et al.
2005/0002536 A1 1/2005 Gorelik et al.
2005/0179100 A1 8/2005 Barzen et al.
2006/0030066 A1 2/2006 Hantschel et al.
2006/0038643 A1 2/2006 Xu et al.
2006/0141656 A1 6/2006 Dehe et al.
2006/0177083 A1 8/2006 Sjursen et al.
2006/0228917 A1 10/2006 Hantschel et al.
2007/0023851 A1 2/2007 Hartzell et al.
2007/0034976 A1 2/2007 Barzen et al.
2007/0201710 A1 8/2007 Suzuki et al.
2008/0104825 A1 5/2008 Dehe et al.
2008/0115586 A1 5/2008 Low et al.
2008/0192962 A1 8/2008 Halteren
2008/0247572 A1 10/2008 Langereis et al.
2009/0169035 A1 7/2009 Rombach et al.
2009/0200546 A1 * 8/2009 Marokkey G03F 1/44
257/48
2009/0303839 A1 12/2009 Narayanan et al.
2009/0320992 A1 12/2009 Xu et al.
2010/0096714 A1 4/2010 Nakatani
2010/0239964 A1 * 9/2010 Marokkey G03F 1/44
430/5
2010/0285700 A1 11/2010 Chow et al.
2010/0330469 A1 * 12/2010 Marokkey G03F 7/70566
430/5
2011/0170735 A1 7/2011 Dehe et al.
2011/0216922 A1 9/2011 Li et al.
2011/0255716 A1 10/2011 Ge et al.
2012/0049095 A1 * 3/2012 Yamasaki F16K 31/02
251/129.01
2012/0148071 A1 6/2012 Dehe
2012/0207332 A1 8/2012 Dehe
2012/0208341 A1 * 8/2012 Marokkey G03F 7/70633
438/400
2012/0248554 A1 10/2012 Klein et al.
2012/0308053 A1 12/2012 Dehe
2012/0328132 A1 12/2012 Wang
2013/0056840 A1 3/2013 Bominaar-Silkens et al.
2013/0062710 A1 * 3/2013 Dehe G01L 9/0016
257/415
2013/0257218 A1 * 10/2013 Dehe H04R 7/10
310/300
2013/0258301 A1 * 10/2013 Dehe G03F 1/44
355/55
2014/0079277 A1 3/2014 Dehe et al.
2016/0094155 A1 * 3/2016 Dehe H04R 7/10
310/300
2018/0109206 A1 * 4/2018 Dehe H04R 7/10
2018/0164215 A1 * 6/2018 Glacier G01N 21/6404

FOREIGN PATENT DOCUMENTS

CN 101353151 A 1/2009
CN 102811413 A * 12/2012 H04R 7/10
CN 102811413 A * 12/2012 H04R 7/10
CN 102811413 B 12/2012
CN 102811413 B * 8/2015 H04R 7/10
CN 102811413 B * 8/2015 H04R 7/10
DE 102006055147 A1 5/2008
EP 2039957 A2 3/2009
EP 2530954 A2 * 12/2012 H04R 7/10
EP 2530954 A2 * 12/2012 H04R 7/10
EP 2530954 A3 12/2012
EP 2530954 A3 * 6/2015 H04R 7/10
EP 2530954 A3 * 6/2015 H04R 7/10
EP 3029957 A1 * 6/2016 H04R 7/10
EP 3029957 A1 * 6/2016 H04R 7/10
EP 2530954 B1 * 12/2016 H04R 7/10
EP 2530954 B1 * 12/2016 H04R 7/10
JP 2006295245 A 10/2006
JP 2007049473 A 2/2007
JP 2011010132 A 1/2011
KR 101401247 B1 12/2012

(56)

References Cited

FOREIGN PATENT DOCUMENTS




KR	20120135068	A	*	12/2012		H04R 7/10
KR	20120135068	A	*	12/2012		H04R 7/10
KR	101401247	B1	*	5/2014		H04R 7/10
KR	101401247	B1	*	5/2014		H04R 7/10
WO	03098969	A2		11/2003		
WO	2007097520	A1		8/2007		



OTHER PUBLICATIONS

Golden Bridge Log Drum, Sku #473078000000000, <http://www.music123.com/classroom-kids/golden-bridge-log-drum>, downloaded for reference Apr. 22, 2015, 1 page.

"Slit Drum," <http://de.wikipedia.org/wiki/Schlitztrommel>, downloaded for reference on Apr. 22, 2015, 4 pages.

* cited by examiner

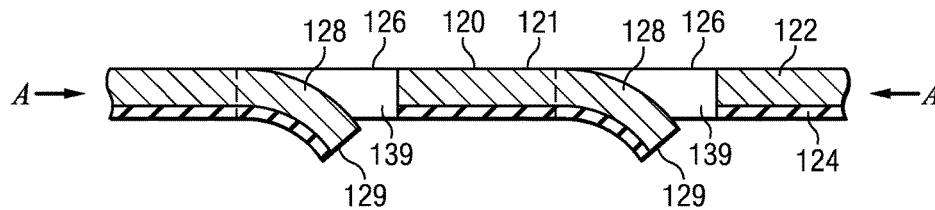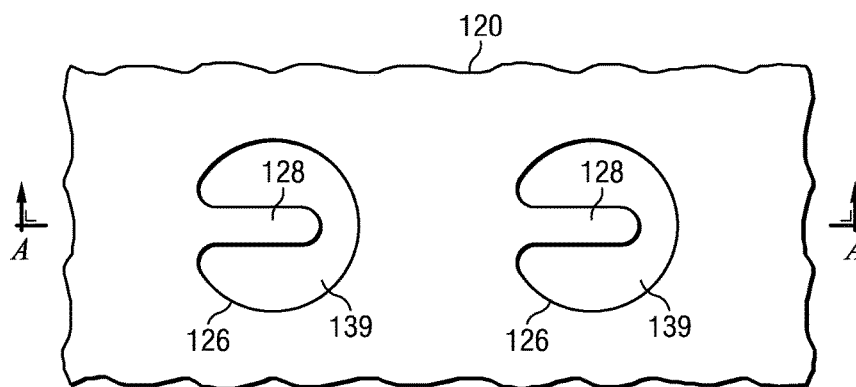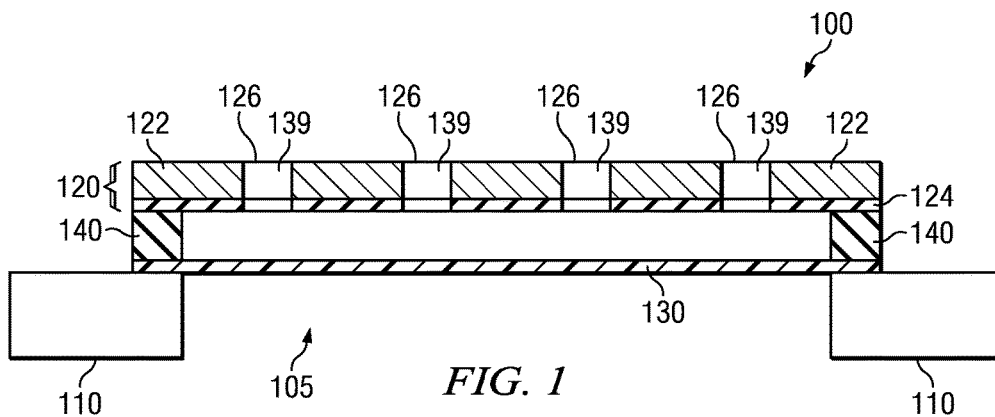

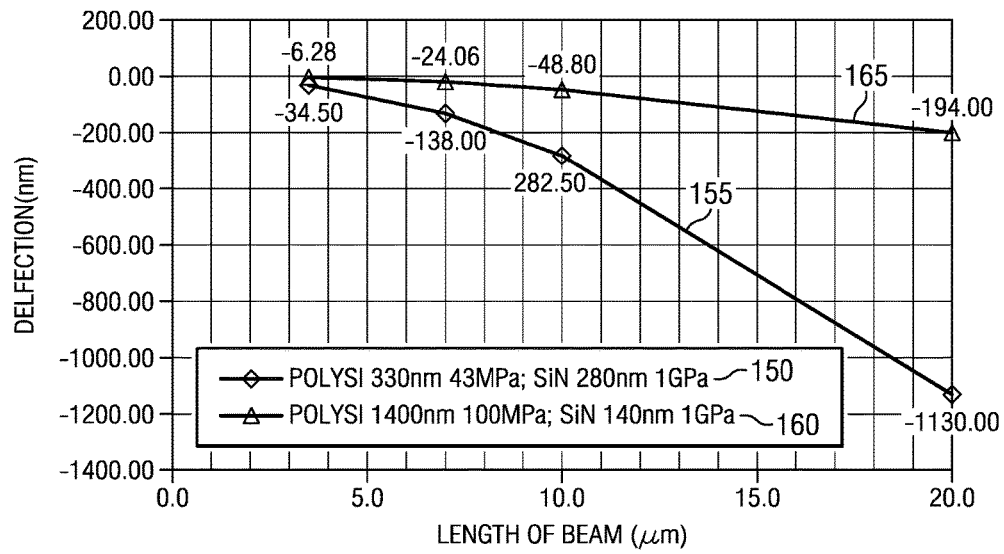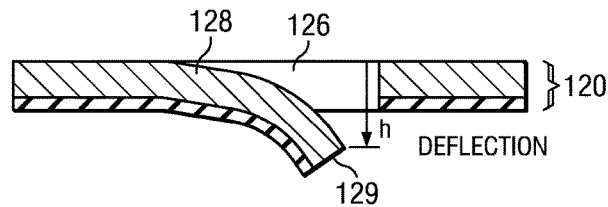*FIG. 2c**FIG. 2d*

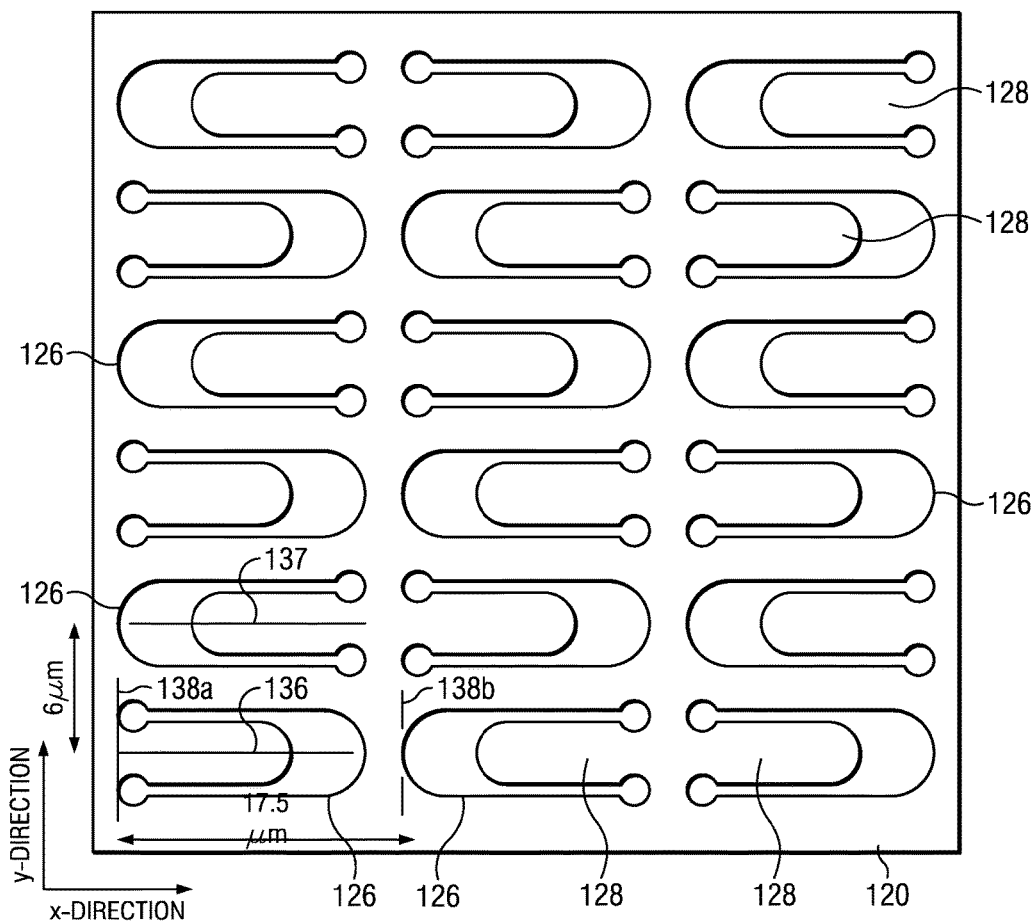


FIG. 3a

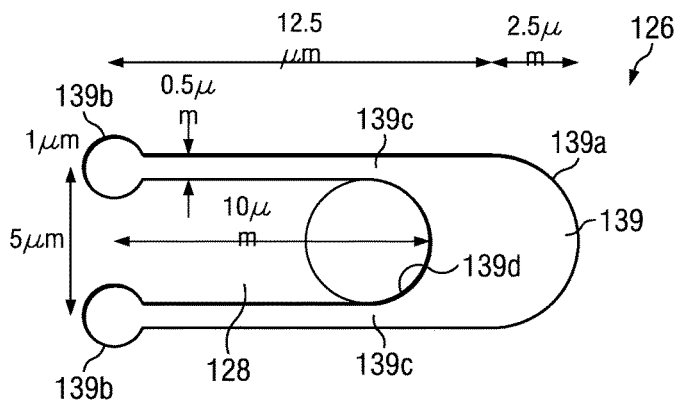
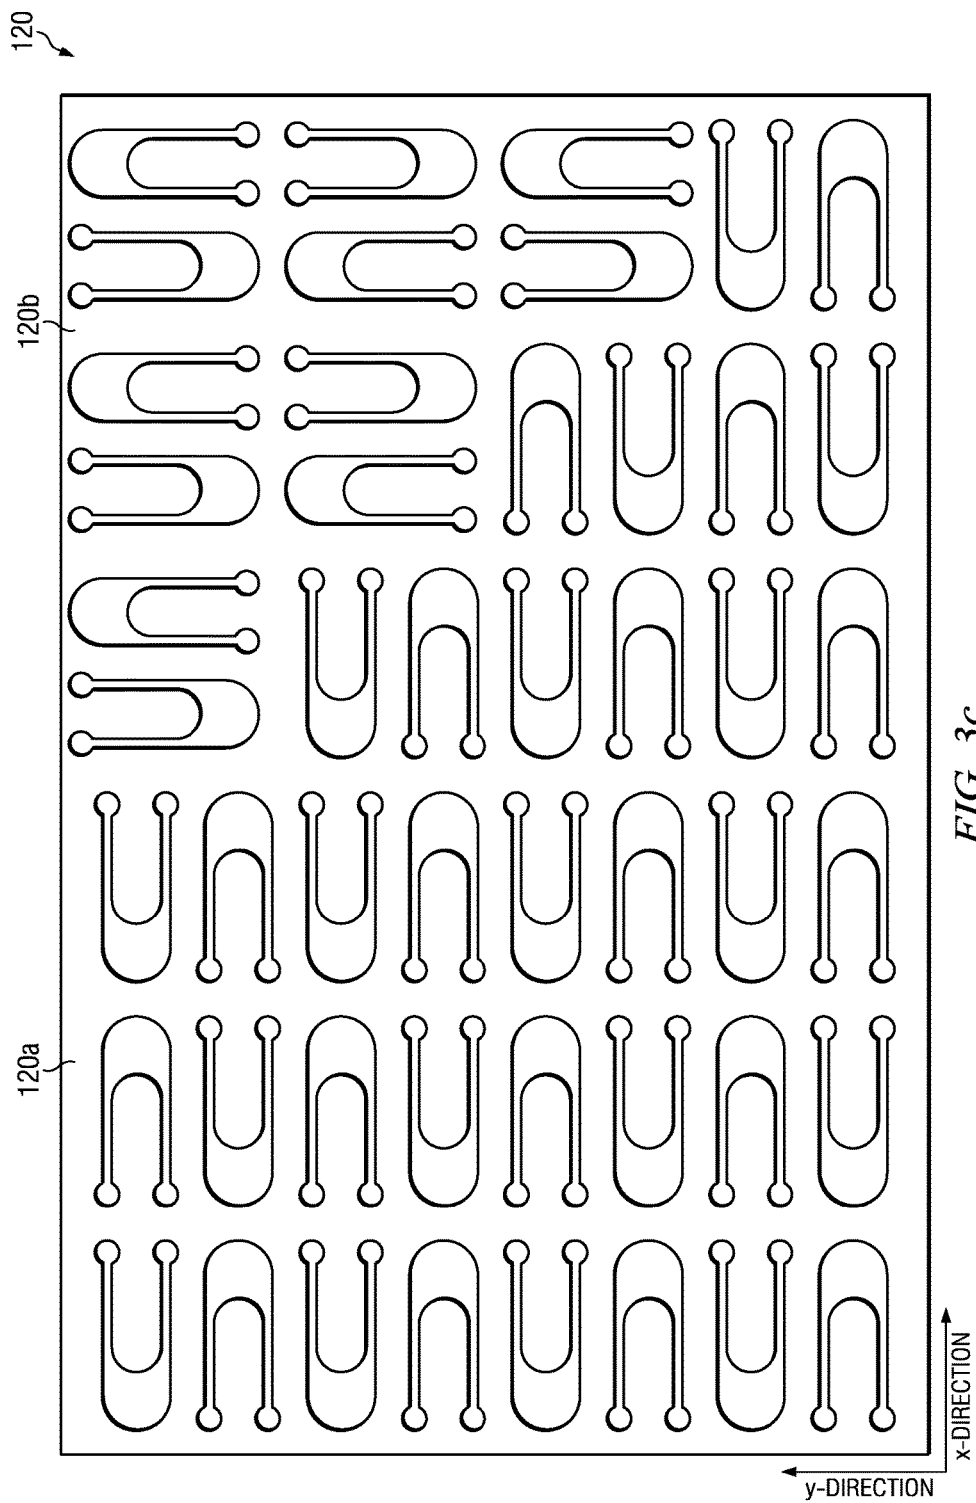


FIG. 3b



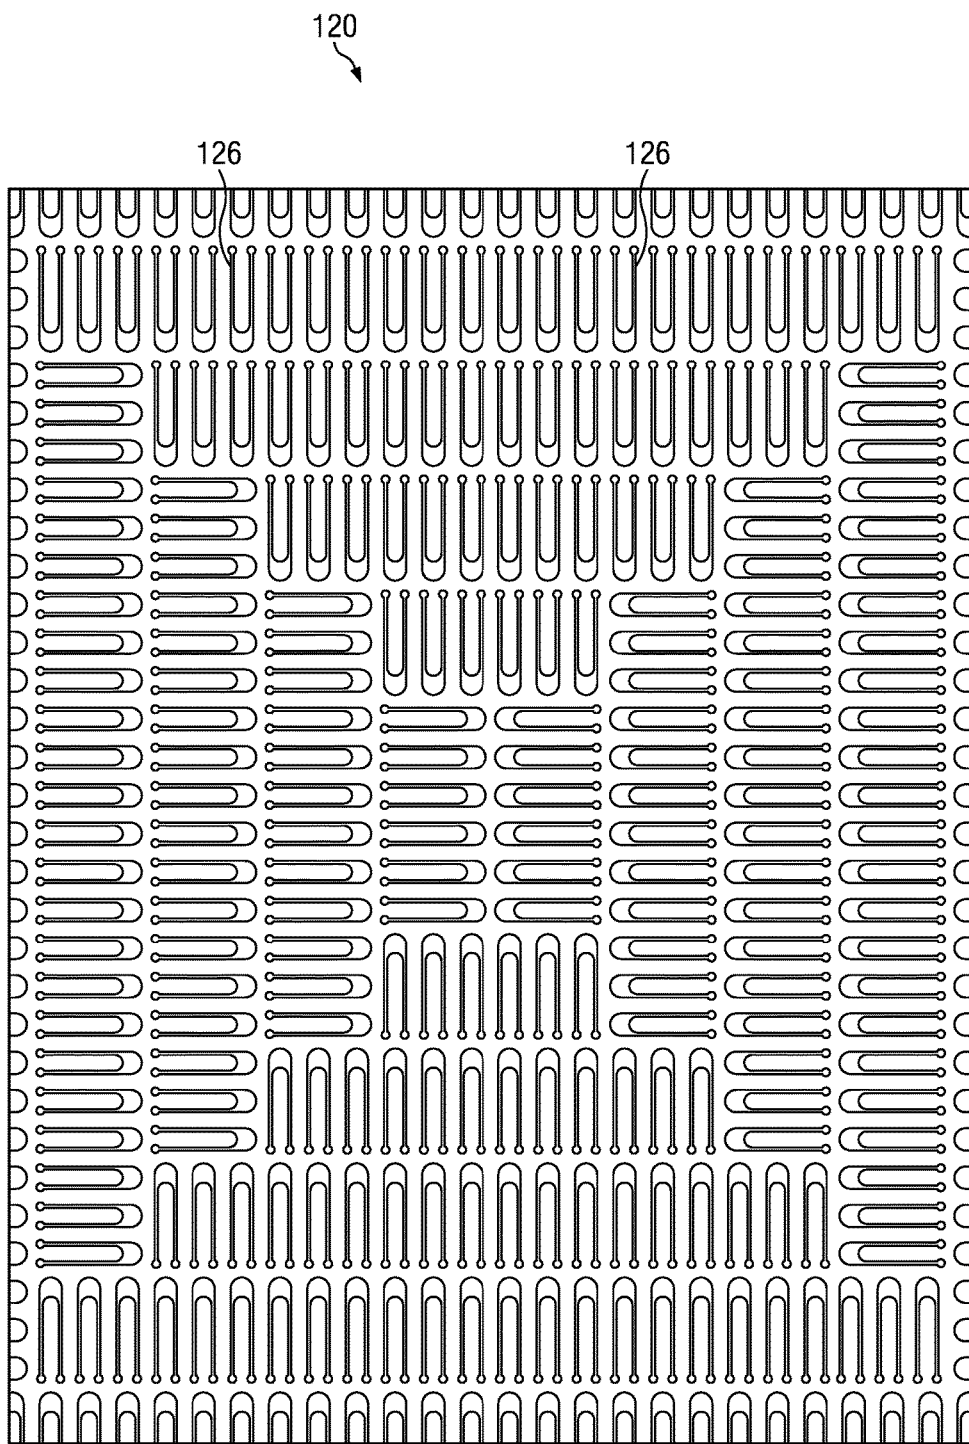


FIG. 3d

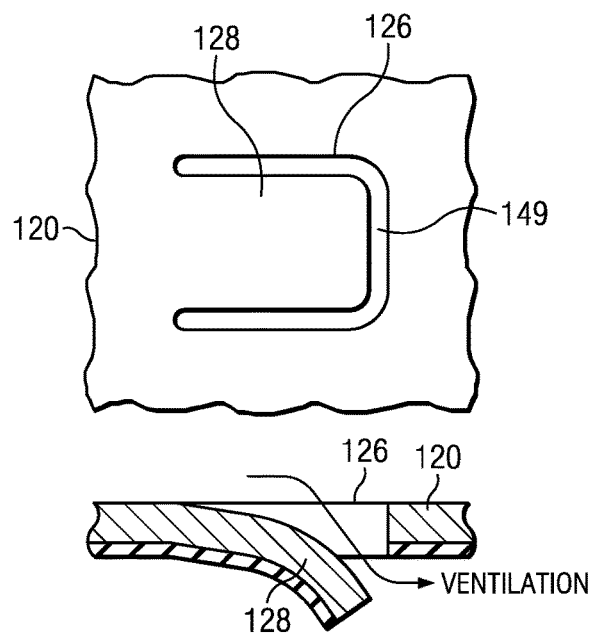


FIG. 4a

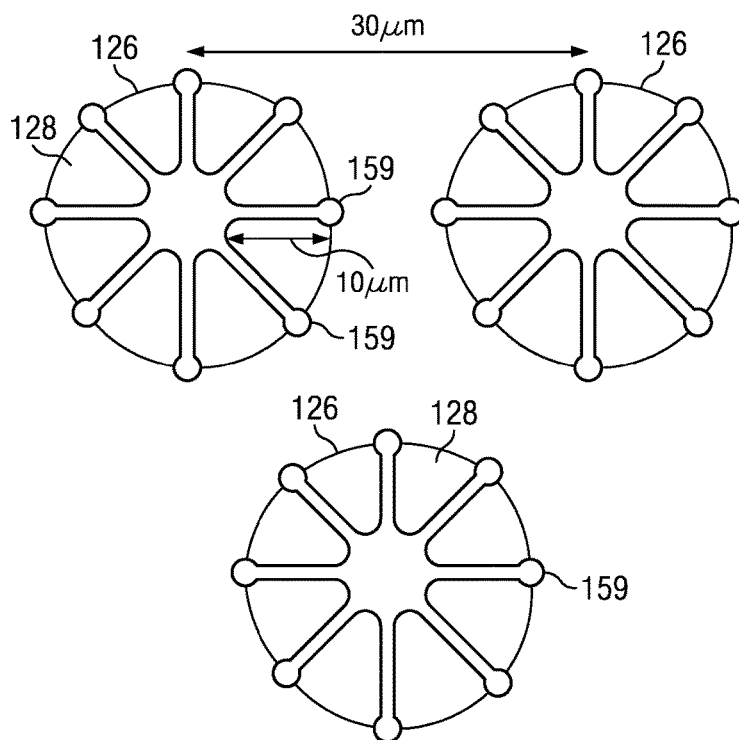


FIG. 4b

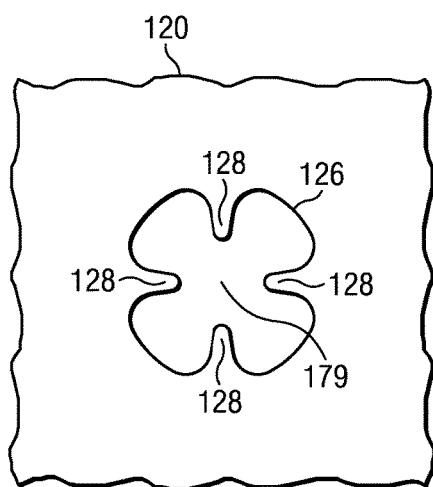
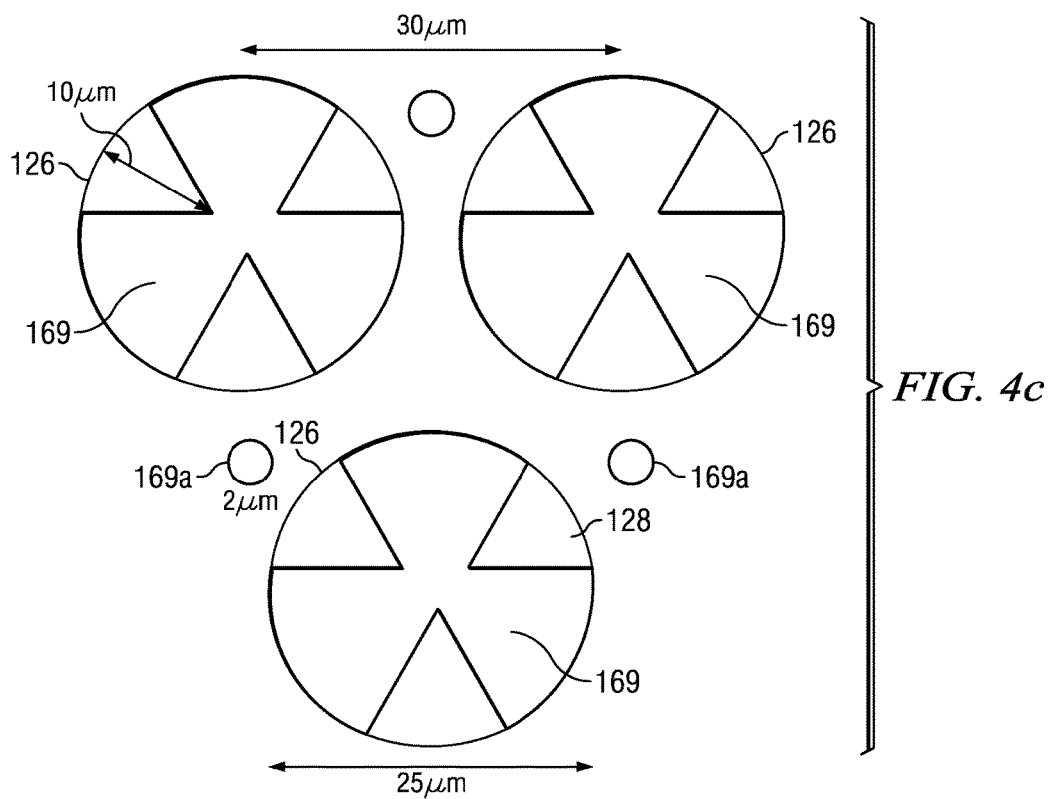


FIG. 4d

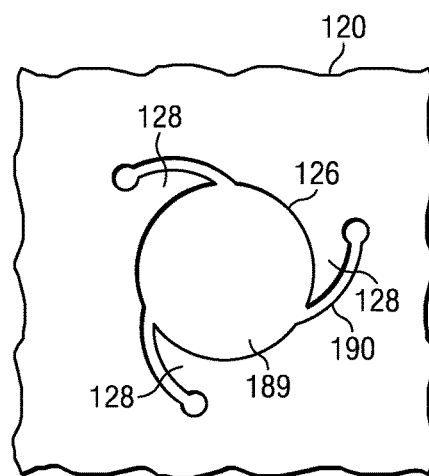
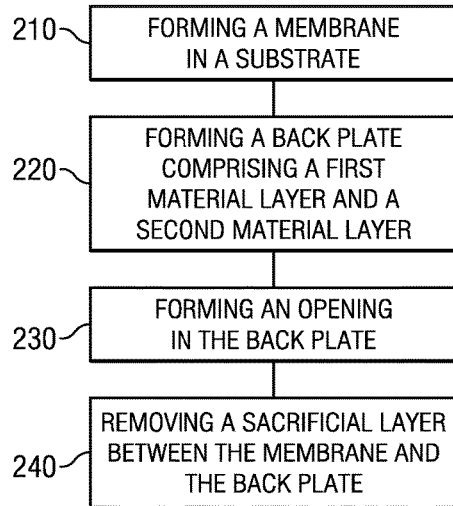
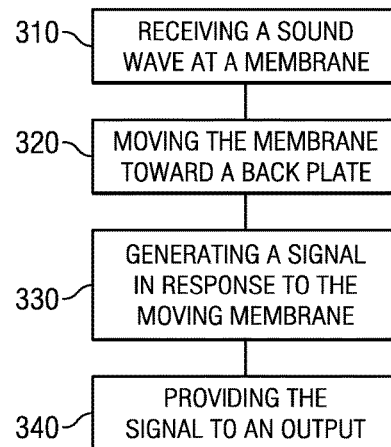
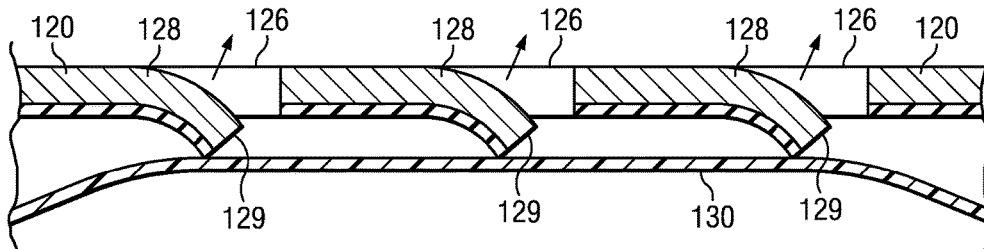


FIG. 4e

*FIG. 5**FIG. 6**FIG. 7*

PLATE, TRANSDUCER AND METHODS FOR MAKING AND OPERATING A TRANSDUCER

This is a divisional application of U.S. application Ser. No. 14/962,949, entitled "Plate, Transducer and Methods for Making and Operating a Transducer" filed on Dec. 8, 2015, which is a divisional application of U.S. application Ser. No. 13/902,462, entitled "Plate, Transducer and Methods for Making and Operating a Transducer" filed on May 24, 2013, now issued as U.S. Pat. No. 9,362,853, which is a divisional application of U.S. application Ser. No. 13/150,972, entitled "Plate, Transducer and Methods for Making and Operating a Transducer" filed on Jun. 1, 2011, now issued as U.S. Pat. No. 8,503,699, all of which are incorporated herein by reference in their entirety.

TECHNICAL FIELD

The present invention relates generally to a plate, a transducer and methods of making and operating a transducer.

BACKGROUND

Generally, a transducer is a device that converts one type of energy to another. The conversion can be to/from electrical, electro-mechanical, electromagnetic, photonic, photovoltaic, or any other form of energy. While the term transducer commonly implies use as a sensor/detector, any device which converts energy can be considered as a transducer.

SUMMARY

In accordance with an embodiment of the present invention, a plate comprises a first material layer comprising a first stress and a second material layer arranged beneath the first material layer, the second material layer comprising a second stress. The plate further comprises an opening arranged in the first material layer and the second material layer and an extension shaping the opening, wherein the extension comprises a portion of the first material layer and a portion of the second material layer, and wherein the extension is curved away from a top surface of the plate based on a difference between the first stress and the second stress.

In accordance with an embodiment of the present invention, a transducer comprises a membrane, a back-plate comprising an opening, the opening comprising a convex portion, wherein the convex portion is curved toward the membrane, and a spacer between the membrane and the back-plate.

In accordance with an embodiment of the present invention, a method for operating a transducer comprises receiving a sound wave at a membrane, moving the membrane toward a back-plate, wherein the back-plate comprises an opening, wherein an extension extends into the opening, and wherein the extension is curved toward the membrane, and generating a signal in response to the moving membrane.

In accordance with an embodiment of the present invention, a method for manufacturing a transducer comprises forming a membrane in a substrate and forming a back-plate comprising a first material layer and a second material layer, the first material layer comprising a different stress than the second material layer. The method further comprises forming an opening in the back-plate, the opening comprising an extension extending into the opening, wherein forming the

opening comprises etching the opening in the first material layer using a first etch process, and etching the opening in the second material layer using a second etch process.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIG. 1 illustrates a cross sectional view of a microphone;

FIG. 2a illustrates a top view of an embodiment of an opening in the back-plate;

FIG. 2b illustrates a cross sectional view of the back-plate;

FIG. 2c illustrates a chart with graphs for different back-plate material compositions;

FIG. 2d illustrates the deflection of the extension relative to the back-plate;

FIG. 3a illustrates an embodiment of a layout of a back-plate;

FIG. 3b illustrates a top view of an embodiment of an elongated opening;

FIG. 3c illustrates an embodiment of a layout of a back-plate;

FIG. 3d illustrates an embodiment of a layout of a back-plate;

FIGS. 4a-e illustrate embodiments of layouts of a back-plate;

FIG. 5 illustrates a method for manufacturing a transducer;

FIG. 6 illustrates a method for operating a transducer; and

FIG. 7 illustrates a membrane pushing against the back-plate.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The making and using of the presently preferred embodiments are discussed in detail below. It should be appreciated, however, that the present invention provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative of specific ways to make and use the invention, and do not limit the scope of the invention.

The present invention will be described with respect to embodiments in a specific context, namely a membrane. The invention may also be applied, however, to other devices having a movable element and a fixed element, wherein the movable element moves relative to the fixed element.

Transducers may convert electrical, electro-mechanical, electromagnetic, photonic, photovoltaic energy to another type of energy. For example, a transducer can be a capacitor with a movable electrode. The movable electrode may move against a fixed electrode resulting in a change of capacity between the two electrodes. The change in capacity is provided to an output. The transducer is typically operated by a bias voltage, i.e. a potential which may be adjusted freely to the respective circumstances, that is applied between the membrane and the counter electrode.

The transducer may be a stand alone device or may be connected to a simple application specific integrated circuit (ASIC). Alternatively, the transducer may be integrated in an integrated circuit (IC).

One example of a transducer is a microphone. A microphone converts sound energy of a sound wave into electrical energy. The movable membrane or electrode may be

mechanically connected to a substrate and has a volume of air surrounding it. Pressure changes of the sound waves deform or deflect the membrane. A back-plate or counter-electrode may comprise openings so that air between the back-plate and the membrane can freely displace and the movement of the membrane is not dampened.

A challenge in manufacturing and/or operating a microphone is that the movable membrane should not adhere or stick to the back-plate. To prevent that, conventional devices may have a coating layer on the movable membrane and/or the back-plate or arrange anti-sticking bumps on the back-plate to minimize or avoid stiction.

An advantage of an embodiment of the present invention is that stiction in the micro structure is prevented. Another advantage of an embodiment is that the contact area between the membrane and the back-plate is reduced. A further advantage of an embodiment is that the membrane is not pierced or damaged by bent extensions.

In one embodiment an extension is formed in an opening of the back-plate. The extension may be bent towards the movable membrane reducing the potential contact area between the movable membrane and the back-plate. The extension may be in its equilibrium position if not touched by the membrane and may be displaced from its equilibrium position if touched by the membrane.

FIG. 1 shows a microphone 100 arranged in or on a support substrate no. The microphone 100 comprises a back-plate 120 and a membrane 130. The back-plate 120 is spaced apart from the membrane 130 by a spacer 140. The space between the back-plate 120 and the membrane 130 may be filled with free air, i.e. with air which does not dampen the movement of the membrane 130. The air is free because openings 139 at opening locations 126 in the back-plate 120 let the air exhaust if the membrane 130 moves towards the back-plate 120 and an opening 105 in the support substrate no let the air exhaust if the membrane 130 moves in the other direction, away from the back-plate 120. The back-plate 120 and the membrane 130 may be electrodes. While the back-plate 120 may be a fixed electrode, the membrane 130 may be a movable electrode.

The back-plate 120 may comprise a first material layer 122 and a second material layer 124. The first material layer 122 may be a conductive layer comprising doped polysilicon, a metal, or other conductive materials. The second material layer 124 may comprise an insulating material such as a nitride, an oxide or the like. Alternatively, the second material layer 124 may comprise a conductive material. The first material layer 122 may be relatively thick while the second material layer 124 may be relatively thin. For example, the first material layer 122 may be about 300 nm to about 3000 nm thick, and the second material layer 124 may be about 30 nm to about 300 nm thick.

The back-plate 120 may comprise a plurality of openings 139. Conventional back-plates may have perfectly round perforations. Embodiments of the invention provide openings which may not be perfectly round, which may comprise a convex portion and/or which may comprise one or more extensions shaping the openings. Layouts of embodiments of these openings are disclosed and discussed in FIGS. 2a-2b, 3a-3d and 4a-4e. In one embodiment a first opening of the back-plate may feature one type of opening while a second opening may feature another type of opening.

The plurality of the openings 139 and extensions 128 may be formed by a double lithography/etch process. In a first step the first material layer 122 may be structured and material may be removed where the openings are located and in a second step the second material layer 124 may be

structured and material may be removed in order to finalize the openings. The extensions 128 may bend automatically when the openings are formed because of the bimorph character of the combination of the first and second material layers 122, 124, e.g., the difference in stress in the first and second material layers 122, 124.

The membrane 130 may be as thin as possible so that it will deform significantly with slight changes in pressure, e.g., small sound pressure levels. However, the thickness reduction of the membrane 130 may be limited because of stability requirements (destruction with too high a sound pressure or too high a voltage) and the requirement that stiction to the back-plate 120 should be prevented. In one example, the membrane 130 may be about 1 mm in diameter and about 3 μ m thick.

The membrane 130 may comprise a conductive material such as doped or undoped polysilicon, or the like. The membrane 130 may be arranged to be movable relative to the back-plate 120. The membrane 130 may be mechanically connected along its circumference to the substrate no and may be electrically contacted to contact pads. The contact pads may be arranged on the substrate no.

The spacer 140 may comprise an insulating material such as an oxide or a nitride. The spacer 140 may comprise a thickness of about 2 μ m or less as an example. The substrate no may be a semiconductor substrate such as bulk silicon, SiGe or the like.

FIG. 2a shows a layout of an embodiment of the opening locations 126 in the back-plate 120. An extension 128 extends into the opening 139 shaping the opening 139. The extension 128 has the form of a cantilever or beam. FIG. 2b shows a cross-sectional view along the line A-A. As can be seen from FIG. 2b, the extension 128 is bent away in a direction normal to a top surface 121 of the back-plate 120.

In an embodiment the material of the first material layer 122 may comprise a different stress than the material of the second material layer 124. For example, the first material layer 122 may have a lower tensile stress than the second material layer 124. Alternatively, the first material layer 122 may have a higher compressive stress than the second material layer 124. The different stress material layers may cause the extension 128 to bend. The extension 128 may bend towards movable membrane 130.

FIG. 2c shows two different graphs 155/165 for two different material compositions 150/160 for the two material layers 122, 124. The two graphs 155/165 show bending relative to length of the extension 128. In a first material composition 150 the first material layer 122 is 330 nm thick, has a stress of 43 MPa, and comprises polysilicon, and the second material layer 124 is 280 nm thick, has a stress of 1 GPa and comprises silicon nitride. The first material composition 150 results in graph 155. As can be seen from this graph 155, the deflection h for the extension 128 shown in FIG. 2d is -1130 nm for a beam of 20 μ m length. In a second material composition 160 the first material layer 122 is 1400 nm thick, has a stress of 100 MPa, and comprises polysilicon, and the second material layer 124 is 140 nm thick, has a stress of 1 GPa, and comprises silicon nitride. The first material composition 160 results in graph 165. As can be seen from this graph 165, the deflection h for extension 128 is -194 nm for a beam of 20 μ m length.

The deflection or bending height h is the difference between the tip 129 of the extension 128 and the upper surface of the back-plate 120 as can be seen from FIG. 2d. The bending height h is controlled by the materials of the first and second material layers 122, 124, by the stress of these materials and/or by the length of the extension 128. As

5

can be seen from FIG. 2c any deflection h can be designed by choosing the correct material composition, stress relations and extension length.

FIG. 3a shows an embodiment of a layout of a back-plate 120. The back-plate 120 comprises elongated opening locations 126 arranged alternately in x-direction and in y-direction. Each elongated opening location 126 comprises a beam or cantilever 128 extending into the elongated opening 139. A distance in y-direction from a first center line 136 of a first elongated opening location 126 to a second center line 137 of a second elongated opening location 126 is 6 μm . A distance in x-direction from a first end 138 of a first elongated opening location 126 to a first end 139 of a second elongated opening location 126 is 17.5 μm . The embodiment of FIG. 3a may allow an easy scaling of the elongated opening locations 126 and the cantilever 128. A desired deflection h may be defined by the length of the cantilever 128. The longer the cantilever 128 the higher may be the deflection h . For example, a low air damping may be achieved when a deflection h of the cantilever 128 is wider than the thickness of the back-plate 120. Such an arrangement may be used for microphones 100 in high sensitivity applications or in high signal to noise ratios applications.

FIG. 3b shows a top view of an elongated opening location 126 having a beam 128 forming the opening 139. In this example, the beam 128 is 10 μm long and 5 μm wide. The elongated opening location 126 may be 15 μm long and 6 μm wide. As can be seen from FIG. 3b the elongated opening location 126 has an opening 139. The area of the extension 128 and the area of the opening 139 together form the area of the opening location 126. The plurality of openings 139 generates an effective open area of 26% when placed in the back-plate 120 as shown in FIG. 3a. The effective open area is a parameter when calculating the damping of air flowing through these openings 139. The opening 139 comprises a concave portion 139a having a radius of 2.5 μm and a convex portion 139d. The opening 139 also comprises two holes 139b having a diameter of 1 μm . The two holes 139b are connected to the concave portion 139a via elongated gaps 139c, the gaps being 0.5 μm wide. The holes 139b at the end of the 0.5 μm slot may reduce the stress concentration in adjacent regions surrounding the holes 139b. Without the holes 139b there would be an increased notching effect.

FIG. 3c shows another embodiment of a layout of the back-plate 120. The back-plate 120 comprises a first region 120a where a plurality of first elongated opening locations 126 is aligned in x-direction and a second region 120b where a plurality of elongated opening locations 126 is aligned in y-direction. The first region 120a may comprise at least 2 elongated opening locations 126 and the second region 120b may comprise at least 2 elongated opening locations 126.

The alignment of the extensions 128 in different directions may be advantageous in rotational symmetric microphone applications wherein the membrane 130 is round, for example. The membrane 130 typically shows a balloon type bowing when displaced extensively. In the event that the membrane 130 touches the back-plate 120 the curved cantilevers 128 in the middle of the back-plate 120 are touched first and the curved cantilevers 128 near the round edge are touched later. The curved beams 128 are arranged in radial direction so that in case of a contact between the membrane 130 and the curved beams 128 the beams 128 may experience no or almost no movement perpendicular to its elongation.

FIG. 3d shows another embodiment of a layout of the back-plate 120. The back-plate 120 comprises a symmetric

6

arrangement of elongated opening locations 126. The elongated opening locations 126 are all facing toward a center point P. In this particular example, the combined distance of three neighboring elongated openings 126 (e.g., measured as the distance in y-direction of FIG. 3a) is the same as the length of one elongated opening 126.

FIG. 3a-3d show specific examples of how elongated opening locations 126 can be arranged in the back-plate 120. However, there are many other possible arrangements. For example, the elongated opening locations 126 may all be arranged facing in the same direction, e.g., the concave portions 139a of the openings 139 are arranged on the left side of the elongated opening locations 126. The elongated opening locations 126 of two rows may be parallel shifted or staggered relative to one other. In a further example, the elongated opening locations 126 may not be arranged in a preferred direction (x- or y-direction) but may be randomly oriented.

FIG. 4a shows a further embodiment of a layout of an opening location 126 in the back-plate 120. The opening location 126 is almost completely covered by the extension 128. There is only a small opening 149 forming a U. A layout with such a small opening 149 may still provide excellent ventilation because the extension 128 is bent and air still can circulate easily through the opening 149.

The layout of FIG. 4 may be used for applications that need minimum ventilation or high air damping. For example, the layout may be used for microphones for high sound pressure levels. In one embodiment the extension 128 may be relatively short and may bend less than the thickness of the back-plate 120.

FIG. 4b shows another embodiment of a layout of opening locations 126 in the back-plate 120. A top view of the opening location 126 may comprise an opening 159 of a star. The area of the extensions 128 and the area of the opening 159 form the area of the opening location 126. In this example, eight extensions 128 shape the opening 159 forming the star. Each extension 128 may be a triangular cantilever with a round tip. The gap between two sides of two neighboring extensions 128 is 0.5 μm and the length of the gap is 10 μm . An effective open area of approximately 13% of the back-plate 120 is formed when the opening locations 126 are placed in a trigonal grid of 30 μm . Each of the eight extensions 128 may be bent away from the back-plate 120. In one embodiment the layout of FIG. 4 may be used in an application where large damping is desired.

FIG. 4c shows another embodiment of a layout of an opening location 126 arrangement in the back-plate 120. A top view of the opening location 126 may comprise an opening 169 of a star. The area of the extensions 128 and the area of the opening 169 form the area of the opening location 126. Three extensions 128 shape the opening locations 126 forming the star opening 169. Each extension 128 may approximate a triangle with an angle tip. The length from the tip of the triangle to the circumferential line is 10 μm . The effective open area of openings 169 is approximately 37% of the overall back-plate 120 area when the opening locations 126 are placed in a trigonal grid of 30 μm . Compared to the situation shown in FIG. 4b this gives a much lower air damping since the opening 169 is much wider. Additional holes 169a between the opening locations 126 may reduce the release etching time of a sacrificial layer that is etched away when the membrane 130 and the back-plate 120 are formed.

FIG. 4d shows another embodiment of a layout of an opening location 126 in the back-plate 120. The opening 179 of the opening location 126 has a form of a cloverleaf. The

opening location **126** comprises four extensions **128** all with the same dimension. The extensions **128** form beams with round tips.

FIG. **4e** shows yet another embodiment of a layout of an opening location **126** in the back-plate **120**. The central aperture **189** forms a circle. Extensions **128** are created by cutting elongated aperture extension **190** into the back-plate material so that the extensions **128** form fins of a fish. The layout of FIG. **4e** may be advantageous for layouts where there is less lateral space so that a spiral like design may help winding one or several extensions **128** around the central aperture **189**.

For embodiments of opening locations **126** with more than one extension **128**, the extensions **128** may all be bent, or alternatively, only some of the extensions **128** may be bent. Moreover, the number of extensions **128** for each of the embodiments of the opening locations shown in FIG. **4a-4e** may vary between one and eight, for example.

The effective open area of openings in the back-plate **120** in FIGS. **3a-3d** and **4a-4e** depends on density of the placement of these opening locations relative to each other.

FIG. **5** shows a method for manufacturing a transducer. In a first step **210** a membrane is formed in the support substrate. In a second step **220** a back-plate is formed. In one embodiment, the back-plate may be formed over the support substrate and the membrane. The back-plate may comprise a first material layer and a second material layer. The back-plate may be formed in a distance from the membrane. In one embodiment, an area between the back-plate and the membrane may be filled with a sacrificial layer and spacers.

In a third step **230**, an opening is formed in the back-plate. An extension may extend into the opening. The extension and the opening may comprise an embodiment of a layout shown in FIGS. **3a-3d** and **4a-4e**. The opening may be formed by etching first the first material layer and then the second material layer. In one embodiment, the opening may be formed by two different etching steps using different etch chemistries. The form of the opening may be defined by a photoresist. After the etching of the opening is complete, a sacrificial layer may be removed between the membrane and the back-plate. This is shown in step **240**. The sacrificial layer may be removed applying a wet-etch chemistry or a dry etch chemistry. The sacrificial layer may be removed through the opening and through additional holes also formed in the back-plate.

The extension of the opening may bend as soon as the opening is formed due to different stress properties of the first material layer and the second material layer.

The steps **210-240** in FIG. **5** may be performed in a different order than described in the previous paragraphs. For example, the sacrificial layer may be removed before the opening is formed.

FIG. **6** shows a method for operating a transducer. In a first step **310** the method comprises receiving a sound wave at a membrane. In a second step **320** the membrane moves toward a back-plate. The back-plate may comprise an opening and an extension may shape the opening. The extension may be curved toward the membrane. The extension and the opening may comprise an embodiment of a layout shown in FIGS. **3a-3d** and **4a-4e**. In a third step **330** a signal is generated in response to the movement of the membrane. In one embodiment, in a fourth step **340** the signal may be provided to an output.

The procedures described in connection with FIGS. **5** and **6** may be realized utilizing the previously described implementations.

FIG. **7** shows an operational mode where the movable membrane **130** is pressed against the back-plate **120**. Under normal operating conditions the membrane **130** may not touch the back-plate **120** or the bent extensions **128** of the back-plate **120**. However, the operational mode of FIG. **7** may occur, for example, in the event of an over pressure, a huge static air pressure change, a shock or drop event, or an electrostatic over voltage causing a pull-in. The movable membrane **130** may be pressed first against the tips **129** of the extensions **128**. At a certain predetermined pressure, the extensions **128** may yield to the pressing membrane **130**. The extensions **128** may flatten, moving into their respective openings **199**. Under extreme conditions, the extensions **128** may completely move into the openings **199** so that the top surfaces of the extensions **128** are coplanar with the top surface **121** of the back-plate **120**. The extensions **128** may not pierce or destroy the membrane **130**.

It is noted that the extensions **128** have a bending height h as described with regard to FIG. **2d**. The bending height h may be the result of the two different stresses in the first and second material layers **122**, **124** of the back-plate **120**. The extensions **128** having the bending height h may be formed automatically or at the same time when the openings **199** are formed. The extensions **128** find an equilibrium height based on the stress combination in the back-plate **120**. The extensions **128** may be temporarily displaced by exerting a force against them, e.g., when the membrane **130** presses against them. They may not break but rather yield relative to the pressing force. As soon as the force is removed the extensions return to their old equilibrium position.

Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims.

Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed, that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

What is claimed is:

1. A transducer comprising:
 - a movable electrode; and
 - a fixed electrode spaced apart from the movable electrode, the fixed electrode comprising an opening, the opening comprising a convex portion, wherein the convex portion is curved towards the movable electrode.
2. The transducer according to claim 1, wherein the movable electrode comprises a membrane and the fixed electrode comprises a backplate.
3. The transducer according to claim 1, wherein the fixed electrode comprises a first conductive material layer and an insulating material layer, the movable electrode comprises a second conductive material layer, and

9

the insulating material layer is arranged between the first conductive material layer of the fixed electrode and the second conductive material layer of the movable electrode.

4. The transducer according to claim 3, wherein the first conductive material layer of the fixed electrode is thicker than the insulating material layer of the fixed electrode.

5. The transducer according to claim 4, wherein the first conductive material layer is between about 300 nm and about 3000 nm thick, and wherein the insulating material layer is between about 30 nm to about 300 nm thick.

6. The transducer according to claim 3, wherein the first conductive material layer comprises a lower tensile stress than the insulating material layer.

7. The transducer according to claim 3, wherein the first conductive material layer comprises a higher compressive stress than the insulating material layer.

8. The transducer according to claim 1, wherein the opening comprises a "C" form.

9. The transducer according to claim 1, wherein the opening further comprises an additional convex portion, wherein the additional convex portion is curved towards the movable electrode.

10. The transducer according to claim 1, wherein the opening further comprises a plurality of additional convex portions, wherein each of the plurality of additional convex portions is curved towards the movable electrode.

11. The transducer according to claim 10, wherein the opening comprises a star form.

12. The transducer according to claim 10, wherein the opening comprises a spiral form.

13. The transducer according to claim 1, wherein the convex portion extends into the opening.

14. The transducer according to claim 1, wherein the convex portion comprises a first length measured in a first direction, the opening comprises a second length measured in the first direction, and a ratio of the first length to the second length is about 5:6.

10

15. A transducer comprising:

a movable electrode;

a fixed electrode spaced apart from the movable electrode, the fixed electrode comprising a planar portion; and a convex portion of the fixed electrode, the convex portion being curved towards the movable electrode.

16. The transducer according to claim 15, wherein the fixed electrode comprises a first conductive material layer and an insulating material layer,

the movable electrode comprises a second conductive material layer, and

the insulating material layer is arranged between the first conductive material layer of the fixed electrode and the second conductive material layer of the movable electrode.

17. The transducer according to claim 15, wherein the convex portion of the fixed electrode forms an opening extending through the fixed electrode.

18. A transducer comprising:

a movable electrode; and

a fixed electrode spaced apart from the movable electrode, the fixed electrode comprising a plurality of openings extending there through, each of the plurality of openings being defined by a main portion of the fixed electrode and a convex portion of the fixed electrode, wherein each convex portion is curved towards the movable electrode.

19. The transducer according to claim 18, wherein the fixed electrode comprises a first conductive material layer and an insulating material layer,

the movable electrode comprises a second conductive material layer, and

the insulating material layer is arranged between the first conductive material layer of the fixed electrode and the second material conductive layer of the movable electrode.

20. The transducer according to claim 18, wherein each of the plurality of openings comprises a "C" form.

* * * * *