



(86) Date de dépôt PCT/PCT Filing Date: 2011/07/21
(87) Date publication PCT/PCT Publication Date: 2012/04/05
(85) Entrée phase nationale/National Entry: 2013/03/21
(86) N° demande PCT/PCT Application No.: JP 2011/004122
(87) N° publication PCT/PCT Publication No.: 2012/042720
(30) Priorité/Priority: 2010/09/30 (JP2010-221471)

(51) Cl.Int./Int.Cl. *H04N 7/32* (2006.01)
(71) Demandeur/Applicant:
MITSUBISHI ELECTRIC CORPORATION, JP
(72) Inventeurs/Inventors:
MINEZAWA, AKIRA, JP;
SEKIGUCHI, SHUNICHI, JP;
SUGIMOTO, KAZUO, JP
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : APPAREIL DE CODAGE DE VIDEO ANIMEE, APPAREIL DE DECODAGE DE VIDEO ANIMEE, PROCEDE DE CODAGE DE VIDEO ANIMEE ET PROCEDE DE DECODAGE DE VIDEO ANIMEE
(54) Title: MOVING IMAGE ENCODING DEVICE, MOVING IMAGE DECODING DEVICE, MOVING IMAGE CODING METHOD, AND MOVING IMAGE DECODING METHOD

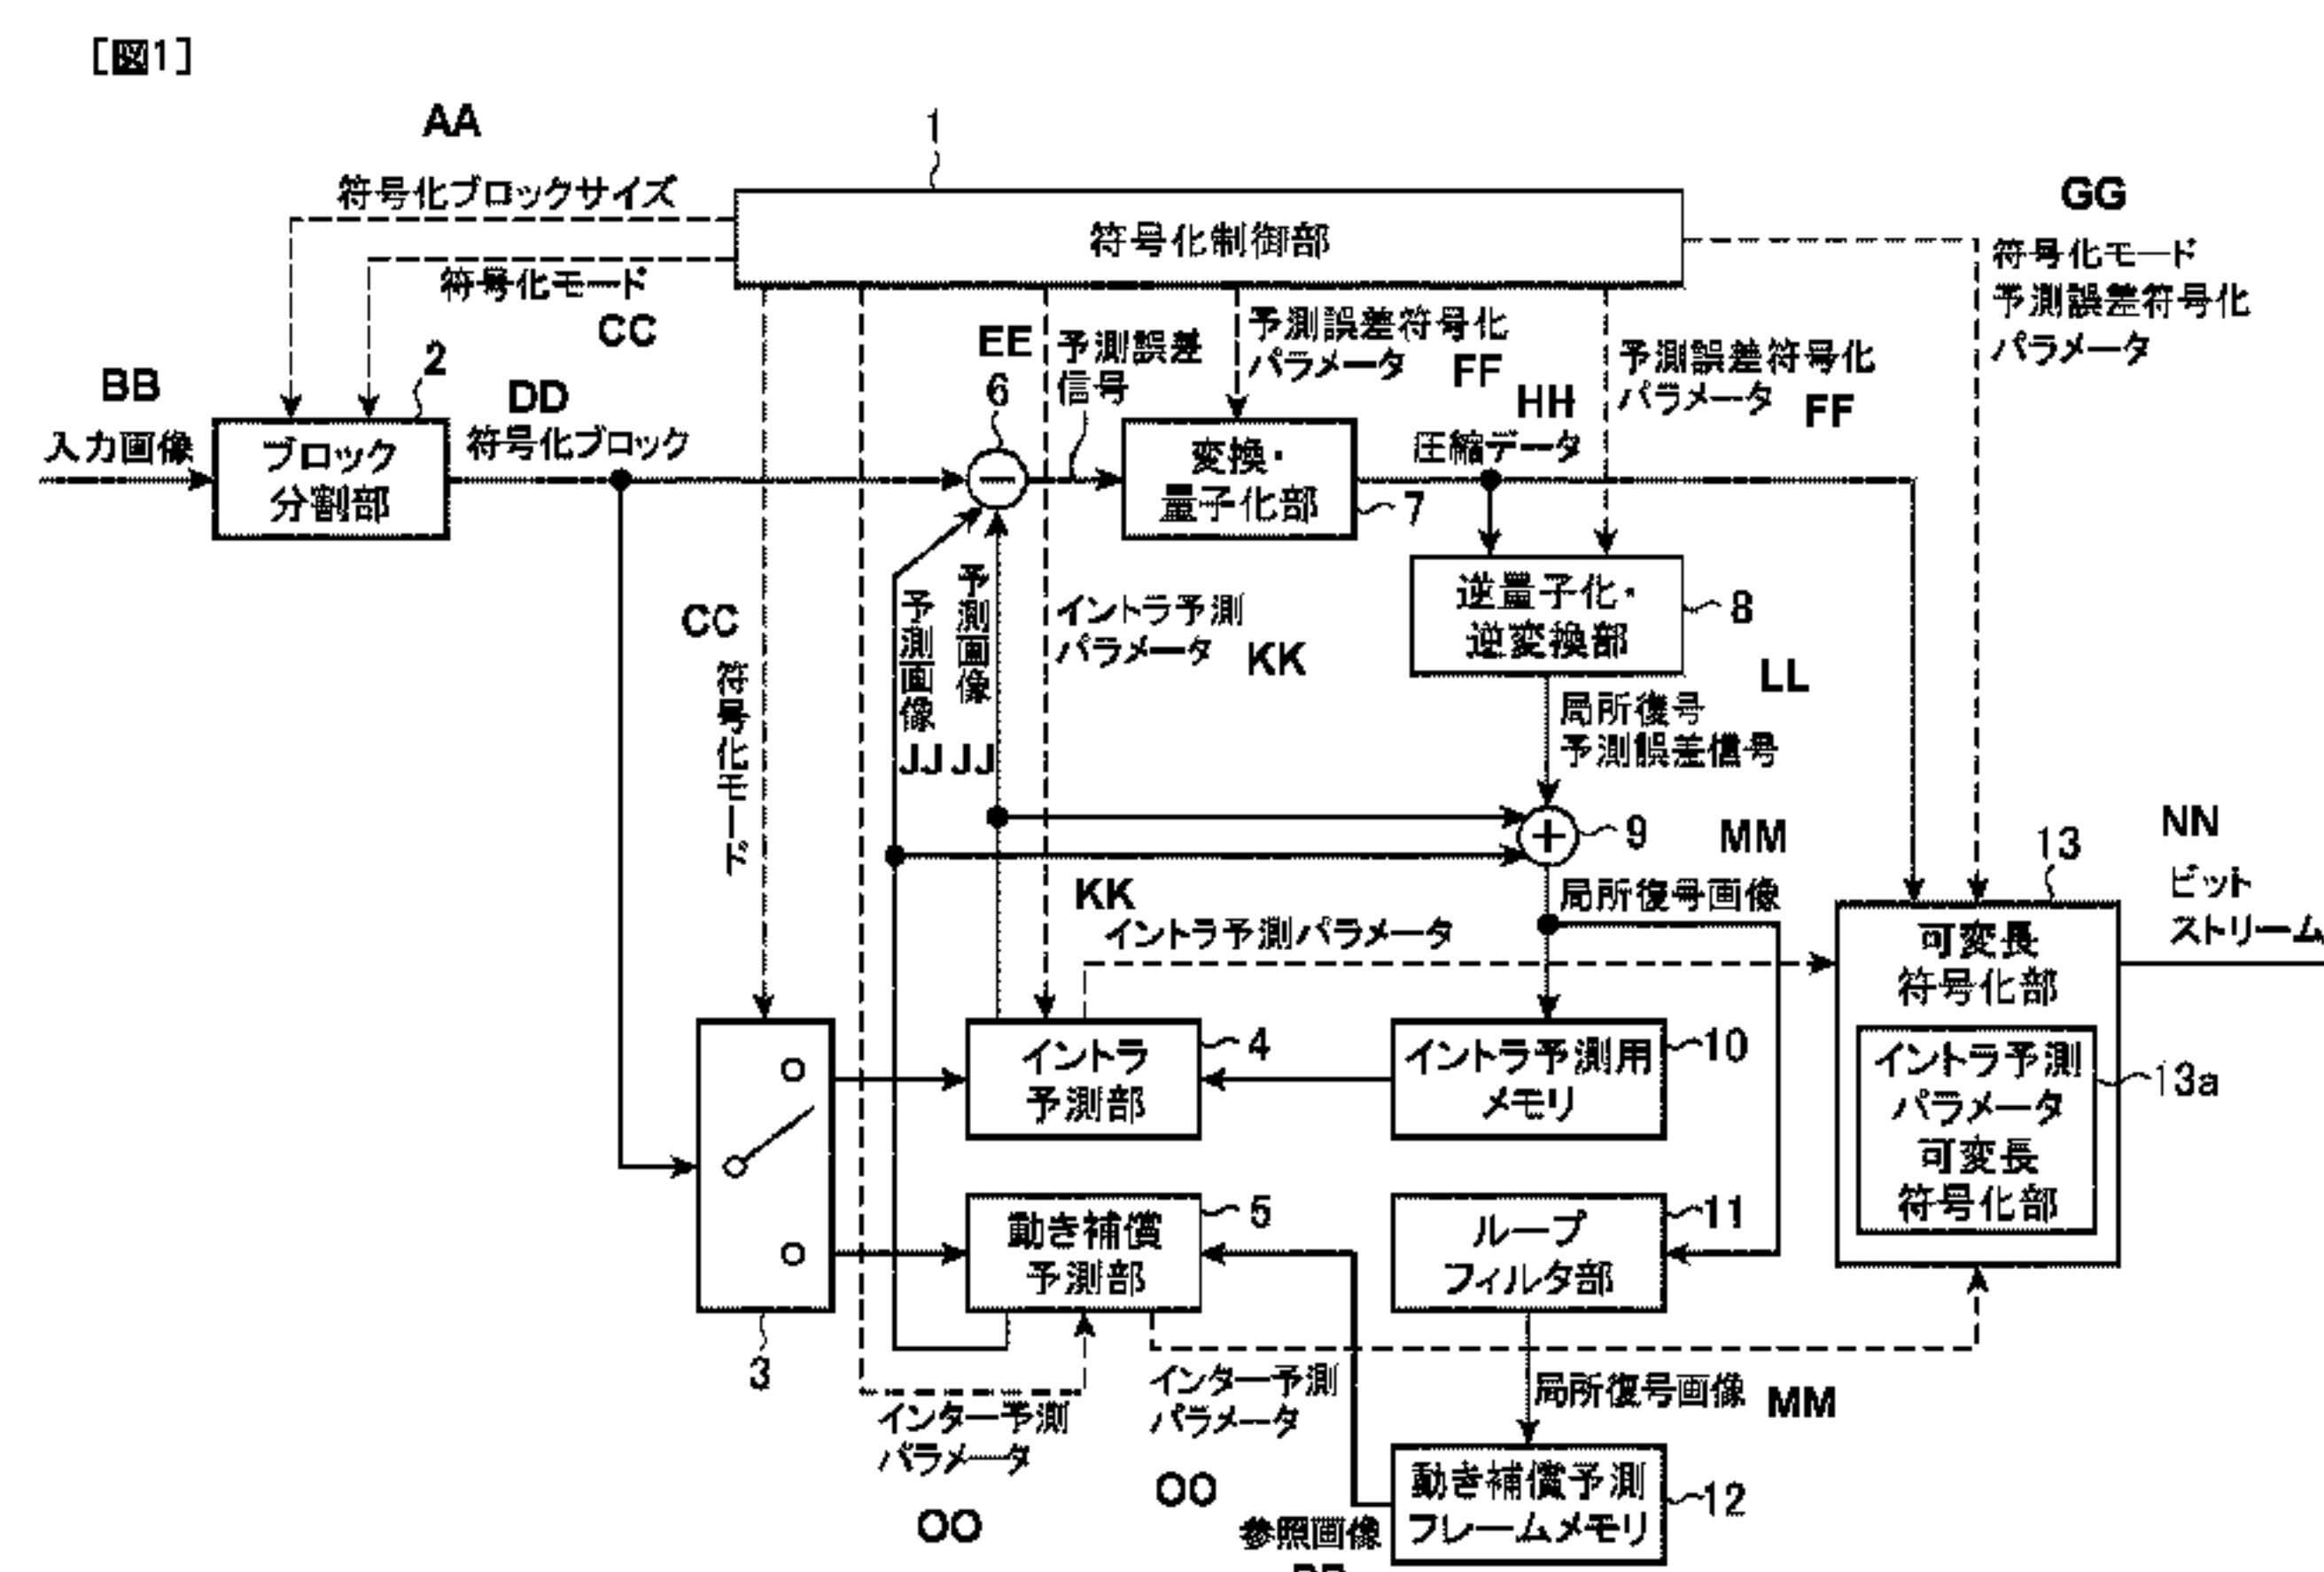


FIG. 1:
1 ENCODING CONTROL UNIT
2 BLOCK DIVIDING UNIT
4 INTRA PREDICTION UNIT
5 MOTION COMPENSATION PREDICTION UNIT
7 TRANSFORMATION/QUANTIZATION UNIT
8 INVERSE-QUANTIZATION / INVERSE-TRANSFORMATION UNIT
10 INTRA PREDICTION MEMORY
11 LOOP FILTER UNIT
12 MOTION-COMPENSATION PREDICTION FRAME MEMORY
13 VARIABLE-LENGTH ENCODING UNIT
13a INTRA-PREDICTION PARAMETER VARIABLE-LENGTH ENCODING UNIT
AA ENCODING BLOCK SIZE
BB INPUT IMAGE
CC ENCODING MODE
DD ENCODING BLOCK
EE PREDICTION ERROR SIGNAL
FF PREDICTION ERROR ENCODING PARAMETER
GG ENCODING-MODE PREDICTION-ERROR ENCODING PARAMETER
HH COMPRESSED DATA
JJ PREDICTION IMAGE
KK INTRA-PREDICTION PARAMETER
LL LOCAL DECODING PREDICTION-ERROR SIGNAL
MM LOCAL DECODING IMAGE
NN BIT STREAM
OO INTER-PREDICTION PARAMETER
PP REFERENCE IMAGE

(57) Abrégé/Abstract:

Provided is a motion-video encoding method, wherein, when an intra prediction unit (4) is to generate an intra prediction image by implementing intra-frame prediction using an encoded image signal within a frame, the intra prediction unit (4) selects a filter from



(57) **Abrégé(suite)/Abstract(continued):**

among one or more filters prepared in advance, in accordance with the states of various parameters related to the encoding of the block to be filtered, and implements filtering of the prediction image using the filter. In such a way, prediction errors to be generated locally can be reduced, to improve image quality.

ABSTRACT

When carrying out an intra-frame prediction process to generate an intra prediction image by using an already-encoded
5 image signal in a frame, an intra prediction part 4 selects a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the encoding of a target block to be filtered, and carries out a filtering process on a prediction image by using the filter.
10 As a result, prediction errors which occur locally can be reduced, and the image quality can be improved.

SPECIFICATION

TITLE OF THE INVENTION

MOVING IMAGE ENCODING DEVICE, MOVING IMAGE DECODING DEVICE,
MOVING IMAGE CODING METHOD, AND MOVING IMAGE DECODING METHOD

5 FIELD OF THE INVENTION

[0001]

The present invention relates to a moving image encoding device for and a moving image encoding method of encoding a moving image with a high degree of efficiency, and a moving image
10 decoding device for and a moving image decoding method of decoding an encoded moving image with a high degree of efficiency.

BACKBROUND OF THE INVENTION

[0002]

15 For example, in accordance with an international standard video encoding method, such as MPEG (Moving Picture Experts Group) or "ITU-T H.26x", an inputted video frame is divided into rectangular blocks (encoding target blocks), a prediction process using an already-encoded image signal is carried out
20 on each encoding target block to generate a prediction image, and orthogonal transformation and a quantization process is carried out on a prediction error signal which is the difference between the encoding target block and the prediction image in units of a block, so that information compression is carried
25 out on the inputted video frame.

[0003]

For example, in the case of AVC/H.264 (ISO/IEC 14496-10|ITU-T H.264) which is an international standard method, an intra prediction process from already-encoded adjacent
30 pixels or a motion-compensated prediction process between

adjacent frames is carried out (for example, refer to nonpatent reference 1). In the case of MPEG-4 AVC/H.264, one prediction mode can be selected from a plurality of prediction modes for each block in an intra prediction mode of luminance. Fig. 10
5 is an explanatory drawing showing intra prediction modes in the case of a 4×4 pixel block size for luminance. In Fig. 10, each white circle shows a pixel in a coding block, and each black circle shows a pixel that is used for prediction, and that exists in an already-encoded adjacent block.

10 [0004]

In the example shown in Fig. 10, nine modes 0 to 8 are prepared as intra prediction modes, and the mode 2 is the one in which an average prediction is carried out in such a way that each pixel in the target coding block is predicted by using the
15 average of adjacent pixels existing in the upper and left blocks. The modes other than the mode 2 are intra prediction modes in each of which a directional prediction is carried out. The mode 0 is the one in which a vertical prediction is carried out in such a way that adjacent pixels in the upper block are repeatedly
20 replicated to create plural rows of pixels along a vertical direction to generate a prediction image. For example, the mode 0 is selected when the target coding block is a vertically striped pattern. The mode 1 is the one in which a horizontal prediction is carried out in such a way that adjacent pixels
25 in the left block are repeatedly replicated to create plural columns of pixels along a horizontal direction to generate a prediction image. For example, the mode 1 is selected when the target coding block is a horizontally striped pattern. In each of the modes 3 to 8, interpolation pixels running in a
30 predetermined direction (i.e., a direction shown by arrows) are

generated by using the adjacent pixels in the upper block or the left block to generate a prediction image.

[0005]

In this case, the block size for luminance to which an intra prediction is applied can be selected from 4×4 pixels, 8×8 pixels, and 16×16 pixels. In the case of 8×8 pixels, nine intra prediction modes are defined, like in the case of 4×4 pixels. In contrast with this, in the case of 16×16 pixels, four intra prediction modes which are called plane predictions are defined in addition to intra prediction modes associated with an average prediction, a vertical prediction, and a horizontal prediction. Each intra prediction associated with a plane prediction is a mode in which pixels created by carrying out an interpolation in a diagonal direction on the adjacent pixels in the upper block and the adjacent pixels in the left block are provided as predicted values.

[0006]

In a directional prediction mode in the case of a block size of 4×4 pixels or 8×8 pixels, because predicted values are generated along a direction predetermined according to the mode, e.g., a direction of 45 degrees, the prediction efficiency increases and the code amount can be reduced when the direction of a boundary (edge) of an object in a block matches the direction shown by the prediction mode. However, a slight displacement may occur between the direction of an edge and the direction shown by the prediction mode, and, even if the direction of an edge in the encoding target block does not match the direction shown by the prediction mode, a large prediction error may occur locally for the simple reason that the edge is slightly distorted (swung, bent, or the like). As a result, the

prediction efficiency may drop extremely. In order to prevent such a reduction in the prediction efficiency, when performing an 8×8-pixel directional prediction, a smoothed prediction image is generated by setting encoded adjacent pixels which are
5 filtered by a smoothing filter as reference images which are used at the time of generating a prediction image, thereby reducing any slight displacement in the prediction direction and prediction errors which occur when a slight distortion occurs in an edge.

10 Related art document

Nonpatent reference

[0007]

Nonpatent reference 1: MPEG-4 AVC (ISO/IEC 14496-10)/H.ITU-T
264 standards

15 SUMMARY OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

[0008]

Because the conventional image encoding device is constructed as above, carrying out a filtering process to
20 generate a smoothed prediction image can reduce prediction errors occurring even if a slight displacement occurs in the prediction direction or a slight distortion occurs in an edge. However, according to the technique disclosed in nonpatent reference 1, no filtering process is carried out on blocks other
25 than 8×8-pixel blocks, and only one possible filter used for 8×8-pixel blocks is provided. A problem is that also in a block having a size other than 8×8 pixels, a large prediction error actually occurs locally due to a slight mismatch in an edge even when the prediction image has a pattern similar to that of the
30 image to be encoded, and therefore a large reduction occurs in

the prediction efficiency. A further problem is that when a quantization parameter which is used when quantizing a prediction error signal, the position of each pixel, or the like differs between blocks having the same size, a filter suitable
5 for reducing local prediction errors differs between the blocks, but only one possible filter is prepared, and therefore prediction errors cannot be sufficiently reduced.

[0009]

The present invention is made in order to solve the
10 above-mentioned problems, and it is therefore an object of the present invention to provide a moving image encoding device, a moving image decoding device, a moving image encoding method, and a moving image decoding method capable of reducing prediction errors which occur locally, thereby being able to
15 improve the image quality.

MEANS FOR SOLVING THE PROBLEM

[0010]

In accordance with the present invention, there is provided a moving image encoding device in which when carrying
20 out an intra-frame prediction process to generate a prediction image by using an already-encoded image signal in a frame, an intra prediction unit selects a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the encoding of a target block to
25 be filtered, carries a filtering process on a prediction image by using the filter, and outputs the prediction image which the intra prediction unit has carried out the filtering process to a difference image generating unit.

ADVANTAGES OF THE INVENTION

30 [0011]

Because the moving image encoding device in accordance with the present invention is constructed in such a way that when carrying out an intra-frame prediction process to generate a prediction image by using an already-encoded image signal in a frame, the intra prediction unit selects a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the encoding of a target block to be filtered, carries a filtering process on a prediction image by using the filter, and outputs the prediction image which the intra prediction unit has carried out the filtering process to the difference image generating unit, there is provided an advantage of being able to reduce prediction errors which occur locally, thereby being able to improve the image quality.

15 BRIEF DESCRIPTION OF THE FIGURES

[0012]

[Fig. 1] Fig. 1 is a block diagram showing a moving image encoding device in accordance with Embodiment 1 of the present invention;

[Fig. 2] Fig. 2 is a block diagram showing a moving image decoding device in accordance with Embodiment 1 of the present invention;

[Fig. 3] Fig. 3 is a flow chart showing processing carried out by the moving image encoding device in accordance with Embodiment 1 of the present invention;

[Fig. 4] Fig. 4 is a flow chart showing processing carried out by the moving image decoding device in accordance with Embodiment 1 of the present invention;

[Fig. 5] Fig. 5 is an explanatory drawing showing a state in which each coding block having a maximum size is hierarchically divided into a plurality of coding blocks;

30 [Fig. 6] Fig. 6(a) is an explanatory drawing showing a

distribution of partitions into which a block to encoded is divided, and Fig. 6(b) is an explanatory drawing showing a state in which an encoding mode $m(B^n)$ is assigned to each of the partitions after a hierarchical layer division is performed by
5 using a quadtree graph;

[Fig. 7] Fig. 7 is an explanatory drawing showing an example of intra prediction parameters (intra prediction mode) which can be selected for each partition P_i^n in a coding block B^n ;

[Fig. 8] Fig. 8 is an explanatory drawing showing an example
10 of pixels which are used when generating a predicted value of each pixel in a partition P_i^n in the case of $l_i^n=m_i^n=4$;

[Fig. 9] Fig. 9 is an explanatory drawing showing an example of the arrangement of reference pixels in the case of $N=5$; and

[Fig. 10] Fig. 10 is an explanatory drawing showing intra
15 prediction modes in the case of a 4×4 pixel block size for luminance.

EMBODIMENTS OF THE INVENTION

[0013]

Hereafter, in order to explain this invention in greater
20 detail, the preferred embodiments of the present invention will be described with reference to the accompanying drawings.
Embodiment 1.

In this Embodiment 1, a moving image encoding device that inputs each frame image of a video, carries out an intra
25 prediction process from already-encoded adjacent pixels or a motion-compensated prediction process between adjacent frames to generate a prediction image, carries out a compression process according to orthogonal transformation and quantization on a prediction error signal which is a difference
30 image between the prediction image and a frame image, and, after

that, carries out variable length encoding to generate a bitstream, and a moving image decoding device that decodes the bitstream outputted from the moving image encoding device will be explained.

5 [0014]

The moving image encoding device in accordance with this Embodiment 1 is characterized in that the moving image encoding device adapts itself to a local change of a video signal in space and time directions to divide the video signal into regions of various sizes, and carries out intra-frame and inter-frame adaptive encoding. In general, a video signal has a characteristic of its complexity varying locally in space and time. There can be a case in which a pattern having a uniform signal characteristic in a relatively large image area, such as a sky image or a wall image, or a pattern having a complicated texture pattern in a small image area, such as a person image or a picture including a fine texture, also coexists on a certain video frame from the viewpoint of space. Also from the viewpoint of time, a relatively large image area, such as a sky image or a wall image, has a small local change in a time direction in its pattern, while an image of a moving person or object has a larger temporal change because its outline has a movement of a rigid body and a movement of a non-rigid body with respect to time.

25 [0015]

Although a process of generating a prediction error signal having small signal power and small entropy by using a temporal and spatial prediction, thereby reducing the whole code amount, is carried out in the encoding process, the code amount of parameters used for the prediction can be reduced as

30

long as the parameters can be applied uniformly to as large an image signal region as possible. On the other hand, because the amount of errors occurring in the prediction increases when the same prediction parameters are applied to an image signal pattern having a large change in time and space, the code amount of the prediction error signal cannot be reduced. Therefore, it is desirable to reduce the size of a region which is subjected to the prediction process when performing the prediction process on an image signal pattern having a large change in time and space, thereby reducing the electric power and entropy of the prediction error signal even though the data volume of the parameters which are used for the prediction is increased. In order to carry out encoding which is adapted for such the typical characteristics of a video signal, the moving image encoding device in accordance with this Embodiment 1 hierarchically divides each region having a predetermined maximum block size of the video signal into blocks, and carries out the prediction process and the encoding process of encoding a prediction error on each of the blocks into which each region is divided.

20 [0016]

A video signal which is to be processed by the moving image encoding device in accordance with this Embodiment 1 can be an arbitrary video signal in which each video frame consists of a series of digital samples (pixels) in two dimensions, horizontal and vertical, such as a YUV signal which consists of a luminance signal and two color difference signals, a color video image signal in arbitrary color space, such as an RGB signal, outputted from a digital image sensor, a monochrome image signal, or an infrared image signal. The gradation of each pixel can be an 8-bit, 10-bit, or 12-bit one. In the

following explanation, the inputted video signal is a YUV signal unless otherwise specified. It is further assumed that the two color difference components U and V are signals having a 4:2:0 format which are subsampled with respect to the luminance component Y. A data unit to be processed which corresponds to each frame of the video signal is referred to as a "picture." In this Embodiment 1, a "picture" is explained as a video frame signal on which progressive scanning has been carried out. When the video signal is an interlaced signal, a "picture" can be alternatively a field image signal which is a unit which constructs a video frame.

[0017]

Fig. 1 is a block diagram showing a moving image encoding device in accordance with Embodiment 1 of the present invention. Referring to Fig. 1, an encoding controlling part 1 carries out a process of determining a maximum size of each of coding blocks which is a unit to be processed at a time when an intra prediction process (intra-frame prediction process) or a motion-compensated prediction process (inter-frame prediction process) is carried out, and also determining an upper limit on the number of hierarchical layers in a hierarchy in which each of the coding blocks having the maximum size is hierarchically divided into blocks. The encoding controlling part 1 also carries out a process of selecting an encoding mode suitable for each of the coding blocks into which each coding block having the maximum size is divided hierarchically from one or more available encoding modes (one or more intra encoding modes and one or more inter encoding modes). The encoding controlling part 1 further carries out a process of determining a quantization parameter and a transformation block size which

are used when a difference image is compressed for each coding block, and also determining intra prediction parameters or inter prediction parameters which are used when a prediction process is carried out for each coding block. The quantization parameter and the transformation block size are included in prediction error encoding parameters, and these prediction error encoding parameters are outputted to a transformation/quantization part 7, an inverse quantization/inverse transformation part 8, a variable length encoding part 13, and so on. The encoding controlling part 1 constructs an encoding controlling unit.

[0018]

A block dividing part 2 carries out a process of, when receiving a video signal showing an inputted image, dividing the inputted image shown by the video signal into coding blocks each having the maximum size determined by the encoding controlling part 1, and also dividing each of the coding blocks into blocks hierarchically until the number of hierarchical layers reaches the upper limit on the number of hierarchical layers which is determined by the encoding controlling part 1. The block dividing part 2 constructs a block dividing unit. A selection switch 3 carries out a process of, when the encoding mode selected by the encoding controlling part 1 for the coding block, which is generated through the division by the block dividing part 2, is an intra encoding mode, outputting the coding block to an intra prediction part 4, and, when the encoding mode selected by the encoding controlling part 1 for the coding block, which is generated through the division by the block dividing part 2, is an inter encoding mode, outputting the coding block to a motion-compensated prediction part 5.

[0019]

The intra prediction part 4 carries out a process of, when receiving the coding block, which is generated through the division by the block dividing part 2, from the selection switch 3, carrying out an intra prediction process on the coding block to generate a prediction image by using an already-encoded image signal in the frame on the basis of the intra prediction parameters outputted thereto from the encoding controlling part 1. After generating the above-mentioned prediction image, the intra prediction part 4 selects a filter from one or more filters which are prepared in advance according to the states of the various parameters associated with the encoding of the target block to be filtered, carries out a filtering process on the above-mentioned prediction image by using the filter, and outputs the prediction image on which the intra prediction part has carried out the filtering process to a subtracting part 6 and an adding part 9. The intra prediction part selects the above-mentioned filter in consideration of at least one of the following four parameters:

· Parameter (1)

The block size of the above-mentioned prediction image

· Parameter (2)

The quantization parameter determined by the encoding controlling part 1

· Parameter (3)

The distance between the already-encoded image signal in the frame which is used when generating the prediction image and a target pixel to be filtered

· Parameter (4)

The intra prediction parameters determined by the

encoding controlling part 1

An intra prediction unit is comprised of the selection switch 3 and the intra prediction part 4.

[0020]

5 The motion-compensated prediction part 5 carries out a process of, when an inter encoding mode is selected by the encoding controlling part 1 as an encoding mode suitable for the coding block, which is generated through the division by the block dividing part 2, performing a motion-compensated
10 prediction process on the coding block to generate a prediction image by using one or more frames of reference images stored in a motion-compensated prediction frame memory 12 on the basis of the inter prediction parameters outputted thereto from the encoding controlling part 1. A motion-compensated prediction
15 unit is comprised of the selection switch 3 and the motion-compensated prediction part 5.

[0021]

 The subtracting part 6 carries out a process of subtracting the prediction image generated by the intra
20 prediction part 4 or the motion-compensated prediction part 5 from the coding block, which is generated through the division by the block dividing part 2, to generate a difference image (= the coding block - the prediction image). The subtracting part 6 constructs a difference image generating unit. The
25 transformation/quantization part 7 carries out a process of performing a transformation process (e.g., a DCT (discrete cosine transform) or an orthogonal transformation process, such as a KL transform, in which bases are designed for a specific learning sequence in advance) on the difference signal
30 generated by the subtracting part 6 in units of a block having

a transformation block size included in the prediction error encoding parameters outputted thereto from the encoding controlling part 1, and also quantizing the transform coefficients of the difference image by using a quantization
5 parameter included in the prediction error encoding parameters to output the transform coefficients quantized thereby as compressed data of the difference image. The transformation/quantization part 7 constructs an image compression unit.

10 [0022]

The inverse quantization/inverse transformation part 8 carries out a process of inverse-quantizing the compressed data outputted thereto from the transformation/quantization part 7 by using the quantization parameter included in the prediction
15 error encoding parameters outputted thereto from the encoding controlling part 1, and performing an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized
20 thereby in units of a block having the transformation block size included in the prediction error encoding parameters to output the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process as a local decoded prediction error signal.

25 [0023]

The adding part 9 carries out a process of adding the local decoded prediction error signal outputted thereto from the inverse quantization/inverse transformation part 8 and the prediction signal showing the prediction image generated by the
30 intra prediction part 4 or the motion-compensated prediction

part 5 to generate a local decoded image signal showing a local decoded image. A memory 10 for intra prediction is a recording medium, such as a RAM, for storing the local decoded image shown by the local decoded image signal generated by the adding part 5 9 as an image which the intra prediction part 4 will use when performing the intra prediction process the next time.

[0024]

A loop filter part 11 carries out a process of compensating for an encoding distortion included in the local decoded image signal generated by the adding part 9, and outputting the local decoded image shown by the local decoded image signal on which the loop filter part has carried out the encoding distortion compensation to a motion-compensated prediction frame memory 12 as a reference image. The motion-compensated prediction frame memory 12 is a recording medium, such as a RAM, for storing the local decoded image on which the loop filter part 11 has carried out the filtering process as a reference image which the motion-compensated prediction part 5 will use when performing the motion-compensated prediction process the next 20 time.

[0025]

The variable length encoding part 13 carries out a process of variable-length-encoding the compressed data outputted thereto from the transformation/quantization part 7, the encoding mode and the prediction error encoding parameters 25 which are outputted thereto from the encoding controlling part 1, and the intra prediction parameters outputted thereto from the intra prediction part 4 or the inter prediction parameters outputted thereto from the motion-compensated prediction part 5 to generate a bitstream into which encoded data of the 30

compressed data, encoded data of the encoding mode, encoded data of the prediction error encoding parameters, and encoded data of the intra prediction parameters or the inter prediction parameters are multiplexed. The variable length encoding part
5 13 constructs a variable length encoding unit.
[0026]

Fig. 2 is a block diagram showing the moving image decoding device in accordance with Embodiment 1 of the present invention. Referring to Fig. 2, a variable length decoding part 51 carries
10 out a process of variable-length-decoding the encoded data multiplexed into the bitstream to obtain the compressed data, the encoding mode, the prediction error encoding parameters, and the intra prediction parameters or the inter prediction parameters, which are associated with each coding block into
15 which each frame of the video is hierarchically divided, and outputting the compressed data and the prediction error encoding parameters to an inverse quantization/inverse transformation part 55, and also outputting the encoding mode and the intra prediction parameters or the inter prediction
20 parameters to a selection switch 52. The variable length decoding part 51 constructs a variable length decoding unit.
[0027]

The selection switch 52 carries out a process of, when the encoding mode associated with the coding block, which is
25 outputted from the variable length decoding part 51, is an intra encoding mode, outputting the intra prediction parameters outputted thereto from the variable length decoding part 51 to an intra prediction part 53, and, when the encoding mode is an inter encoding mode, outputting the inter prediction parameters
30 outputted thereto from the variable length decoding part 51 to

a motion-compensated prediction part 54.

[0028]

The intra prediction part 53 carries out a process of performing an intra-frame prediction process on the coding
5 block to generate a prediction image by using an already-decoded image signal in the frame on the basis of the intra prediction parameters outputted thereto from the selection switch 52. After generating the above-mentioned prediction image, the intra prediction part 53 selects a filter from one or more
10 filters which are prepared in advance according to the states of the various parameters associated with the decoding of the target block to be filtered, carries out a filtering process on the above-mentioned prediction image by using the filter, and outputs the prediction image on which the intra prediction
15 part has carried out the filtering process to an adding part 56. The intra prediction part selects the above-mentioned filter in consideration of at least one of the following four parameters:

- Parameter (1)

20 The block size of the above-mentioned prediction image

- Parameter (2)

 The quantization parameter variable-length-decoded by the variable length decoding part 51

- Parameter (3)

25 The distance between the already-decoded image signal in the frame which is used when generating the prediction image and a target pixel to be filtered

- Parameter (4)

 The intra prediction parameters variable-length-decoded
30 by the variable length decoding part 51

An intra prediction unit is comprised of the selection switch 52 and the intra prediction part 53.

[0029]

The motion-compensated prediction part 54 carries out a process of performing a motion-compensated prediction process on the coding block to generate a prediction image by using one or more frames of reference images stored in a motion-compensated prediction frame memory 59 on the basis of the inter prediction parameters outputted thereto from the selection switch 52. A motion-compensated prediction unit is comprised of the selection switch 52 and the motion-compensated prediction part 54.

[0030]

The inverse quantization/inverse transformation part 55 carries out a process of inverse-quantizing the compressed data associated with the coding block, which is outputted thereto from the variable length decoding part 51, by using the quantization parameter included in the prediction error encoding parameters outputted thereto from the variable length decoding part 51, and performing an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction error encoding parameters, and outputting the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process as a decoded prediction error signal (signal showing a pre-compressed difference image). The inverse quantization/inverse transformation part 55

constructs a difference image generating unit.

[0031]

The adding part 56 carries out a process of adding the decoded prediction error signal outputted thereto from the inverse quantization/inverse transformation part 55 and the prediction signal showing the prediction image generated by the intra prediction part 53 or the motion-compensated prediction part 54 to generate a decoded image signal showing a decoded image. The adding part 56 constructs a decoded image generating unit. A memory 57 for intra prediction is a recording medium, such as a RAM, for storing the decoded image shown by the decoded image signal generated by the adding part 56 as an image which the intra prediction part 53 will use when performing the intra prediction process the next time.

15 [0032]

A loop filter part 58 carries out a process of compensating for an encoding distortion included in the decoded image signal generated by the adding part 56, and outputting the decoded image shown by the decoded image signal on which the loop filter part performs the encoding distortion compensation to a motion-compensated prediction frame memory 59 as a reference image. The motion-compensated prediction frame memory 59 is a recording medium, such as a RAM, for storing the decoded image on which the loop filter part 58 performs the filtering process as a reference image which the motion-compensated prediction part 54 will use when performing the motion-compensated prediction process the next time.

[0033]

In the example shown in Fig. 1, the encoding controlling part 1, the block dividing part 2, the selection switch 3, the

intra prediction part 4, the motion-compensated prediction part 5, the subtracting part 6, the transformation/quantization part 7, the inverse quantization/inverse transformation part 8, the adding part 9, the loop filter part 11, and the variable length encoding part 13, which are the components of the moving image encoding device, can consist of pieces of hardware for exclusive use (e.g., integrated circuits in each of which a CPU is mounted, one chip microcomputers, or the like), respectively. As an alternative, the moving image encoding device can consist of a computer, and a program in which the processes carried out by the encoding controlling part 1, the block dividing part 2, the selection switch 3, the intra prediction part 4, the motion-compensated prediction part 5, the subtracting part 6, the transformation/quantization part 7, the inverse quantization/inverse transformation part 8, the adding part 9, the loop filter part 11, and the variable length encoding part 13 are described can be stored in a memory of the computer and the CPU of the computer can be made to execute the program stored in the memory. Fig. 3 is a flow chart showing the processing carried out by the moving image encoding device in accordance with Embodiment 1 of the present invention.

[0034]

In the example shown in Fig. 2, the variable length decoding part 51, the selection switch 52, the intra prediction part 53, the motion-compensated prediction part 54, the inverse quantization/inverse transformation part 55, the adding part 56, and the loop filter part 58, which are the components of the moving image decoding device, can consist of pieces of hardware for exclusive use (e.g., integrated circuits in each of which a CPU is mounted, one chip microcomputers, or the like),

respectively. As an alternative, the moving image decoding device can consist of a computer, and a program in which the processes carried out by the variable length decoding part 51, the selection switch 52, the intra prediction part 53, the
5 motion-compensated prediction part 54, the inverse quantization/inverse transformation part 55, the adding part 56, and the loop filter part 58 are described can be stored in a memory of the computer and the CPU of the computer can be made to execute the program stored in the memory. Fig. 4 is a flow
10 chart showing the processing carried out by the moving image decoding device in accordance with Embodiment 1 of the present invention.

[0035]

Next, the operation of the moving image encoding device
15 and the operation of the moving image decoding device will be explained. First, the processing carried out by the moving image encoding device shown in Fig. 1 will be explained. First, the encoding controlling part 1 determines a maximum size of each of coding blocks which is a unit to be processed at a time
20 when an intra prediction process (intra-frame prediction process) or a motion-compensated prediction process (inter-frame prediction process) is carried out, and also determines an upper limit on the number of hierarchical layers in a hierarchy in which each of the coding blocks having the
25 maximum size is hierarchically divided into blocks (step ST1 of Fig. 3).

[0036]

As a method of determining the maximum size of each of coding blocks, for example, there is considered a method of
30 determining a maximum size for all the pictures according to

the resolution of the inputted image. Further, there can be considered a method of quantifying a variation in the complexity of a local movement of the inputted image as a parameter and then determining a small size for a picture having a large and
5 vigorous movement while determining a large size for a picture having a small movement. As a method of determining the upper limit on the number of hierarchical layers, for example, there can be considered a method of increasing the depth of the hierarchy, i.e., the number of hierarchical layers to make it
10 possible to detect a finer movement as the inputted image has a larger and more vigorous movement, or decreasing the depth of the hierarchy, i.e., the number of hierarchical layers as the inputted image has a smaller movement.

[0037]

15 The encoding controlling part 1 also selects an encoding mode suitable for each of the coding blocks into which each coding block having the maximum size is divided hierarchically from one or more available encoding modes (M intra encoding modes and N inter encoding modes) (step ST2). Although a
20 detailed explanation of the selection method of selecting an encoding mode for use in the encoding controlling part 1 will be omitted because the selection method is a known technique, there is a method of carrying out an encoding process on the coding block by using an arbitrary available encoding mode to
25 examine the encoding efficiency and select an encoding mode having the highest level of encoding efficiency from among a plurality of available encoding modes, for example.

[0038]

The encoding controlling part 1 further determines a
30 quantization parameter and a transformation block size which

are used when a difference image is compressed for each coding block, and also determines intra prediction parameters or inter prediction parameters which are used when a prediction process is carried out. The encoding controlling part 1 outputs
5 prediction error encoding parameters including the quantization parameter and the transformation block size to the transformation/quantization part 7, the inverse quantization/inverse transformation part 8, and the variable length encoding part 13. The encoding controlling part also
10 outputs the prediction error encoding parameters to the intra prediction part 4 as needed.

[0039]

When receiving the video signal showing the inputted image, the block dividing part 2 divides the inputted image
15 shown by the video signal into coding blocks each having the maximum size determined by the encoding controlling part 1, and also divides each of the coding blocks into blocks hierarchically until the number of hierarchical layers reaches the upper limit on the number of hierarchical layers which is
20 determined by the encoding controlling part 1. Fig. 5 is an explanatory drawing showing a state in which each coding block having the maximum size is hierarchically divided into a plurality of coding blocks. In the example of Fig. 5, each coding block having the maximum size is a coding block B_0 in
25 the 0th hierarchical layer, and its luminance component has a size of (L^0, M^0) . Further, in the example of Fig. 5, by carrying out the hierarchical division with this coding block B_0 having the maximum size being set as a starting point until the depth of the hierarchy reaches a predetermined depth which is set
30 separately according to a quadtree structure, coding blocks B^n

can be obtained.

[0040]

At the depth of n , each coding block B^n is an image area having a size of (L^n, M^n) . Although L^n can be the same as or
5 differ from M^n , the case of $L^n=M^n$ is shown in the example of Fig. 5. Hereafter, the size of each coding block B^n is defined as the size of (L^n, M^n) in the luminance component of the coding block B^n .

[0041]

10 Because the block dividing part 2 carries out a quadtree division, $(L^{n+1}, M^{n+1})=(L^n/2, M^n/2)$ is always established. In the case of a color video image signal (4:4:4 format) in which all the color components have the same sample number, such as an RGB signal, all the color components have a size of (L^n, M^n) ,
15 while in the case of handling a 4:2:0 format, a corresponding color difference component has an encoding block size of $(L^n/2, M^n/2)$. Hereafter, an encoding mode selectable for each coding block B^n in the n th hierarchical layer is expressed as $m(B^n)$.

[0042]

20 In the case of a color video signal which consists of a plurality of color components, the encoding mode $m(B^n)$ can be formed in such a way that an individual mode is used for each color component. Hereafter, an explanation will be made by assuming that the encoding mode $m(B^n)$ indicates the one for the
25 luminance component of each coding block having a 4:2:0 format in a YUV signal unless otherwise specified. The encoding mode $m(B^n)$ can be one of one or more intra encoding modes (generically referred to as "INTRA") or one or more inter encoding modes (generically referred to as "INTER"), and the encoding
30 controlling part 1 selects, as the encoding mode $m(B^n)$, an

encoding mode with the highest degree of encoding efficiency for each coding block B^n from among all the encoding modes available in the picture currently being processed or a subset of these encoding modes, as mentioned above.

5 [0043]

Each coding block B^n is further divided into one or more prediction units (partitions) by the block dividing part, as shown in Fig. 5. Hereafter, each partition belonging to each coding block B^n is expressed as P_i^n (i shows a partition number in the n th hierarchical layer). How the division of each coding block B^n into partitions P_i^n belonging to the coding block B^n is carried out is included as information in the encoding mode $m(B^n)$. While the prediction process is carried out on each of all the partitions P_i^n according to the encoding mode $m(B^n)$, an individual prediction parameter can be selected for each partition P_i^n .

[0044]

The encoding controlling part 1 produces such a block division state as shown in, for example, Fig. 6 for a coding block having the maximum size, and then determines coding blocks B^n . Hatched portions shown in Fig. 6(a) show a distribution of partitions into which the coding block having the maximum size is divided, and Fig. 6(b) shows a situation in which encoding modes $m(B^n)$ are respectively assigned to the partitions generated through the hierarchical layer division by using a quadtree graph. Each node enclosed by $\square$ shown in Fig. 6(b) is a node (coding block B^n) to which an encoding mode $m(B^n)$ is assigned.

[0045]

30 When the encoding controlling part 1 selects an optimal

encoding mode $m(B^n)$ for each partition P_i^n of each coding block B^n , and the encoding mode $m(B^n)$ is an intra encoding mode (step ST3), the selection switch 3 outputs the partition P_i^n of the coding block B^n , which is generated through the division by the block dividing part 2, to the intra prediction part 4. In contrast, when the encoding mode $m(B^n)$ is an inter encoding mode (step ST3), the selection switch outputs the partition P_i^n of the coding block B^n , which is generated through the division by the block dividing part 2, to the motion-compensated prediction part 5.

[0046]

When receiving the partition P_i^n of the coding block B^n from the selection switch 3, the intra prediction part 4 carries out an intra prediction process on the partition P_i^n of the coding block B^n to generate an intra prediction image P_i^n by using an already-encoded image signal in the frame on the basis of the intra prediction parameters outputted thereto from the encoding controlling part 1 (step ST4). After generating the above-mentioned intra prediction image P_i^n , the intra prediction part 4 selects a filter from one or more filters which are prepared in advance according to the states of the various parameters associated with the encoding of the target block to be filtered, and carries out a filtering process on the intra prediction image P_i^n by using the filter. After carrying out the filtering process on the intra prediction image P_i^n , the intra prediction part 4 outputs the intra prediction image P_i^n on which the intra prediction part has carried out the filtering process to the subtracting part 6 and the adding part 9. In order to enable the moving image decoding device shown in Fig. 2 to also be able to generate the same intra prediction image

P_i^n , the intra prediction part outputs the intra prediction parameters to the variable length encoding part 13. The outline of the process carried out by the intra prediction part 4 is as mentioned above, and the details of this process will be mentioned below.

[0047]

When receiving the partition P_i^n of the coding block B^n from the selection switch 3, the motion-compensated prediction part 5 carries out a motion-compensated prediction process on the partition P_i^n of the coding block B^n to generate an inter prediction image P_i^n by using one or more frames of reference images stored in the motion-compensated prediction frame memory 12 on the basis of the inter prediction parameters outputted thereto from the encoding controlling part 1 (step ST5). Because a technology of carrying out a motion-compensated prediction process to generate a prediction image is known, the detailed explanation of this technology will be omitted hereafter.

[0048]

After the intra prediction part 4 or the motion-compensated prediction part 5 generates the prediction image (an intra prediction image P_i^n or an inter prediction image P_i^n), the subtracting part 6 subtracts the prediction image (the intra prediction image P_i^n or the inter prediction image P_i^n) generated by the intra prediction part 4 or the motion-compensated prediction part 5 from the partition P_i^n of the coding block B^n , which is generated through the division by the block dividing part 2, to generate a difference image, and outputs a prediction error signal e_i^n showing the difference image to the transformation/quantization part 7 (step ST6).

[0049]

When receiving the prediction error signal e_i^n showing the difference image from the subtracting part 6, the transformation/quantization part 7 carries out a transformation process (e.g., a DCT (discrete cosine transform) or an orthogonal transformation process, such as a KL transform, in which bases are designed for a specific learning sequence in advance) on the difference image in units of a block having the transformation block size included in the prediction error encoding parameters outputted thereto from the encoding controlling part 1, and quantizes the transform coefficients of the difference image by using the quantization parameter included in the prediction error encoding parameters and outputs the transform coefficients quantized thereby to the inverse quantization/inverse transformation part 8 and the variable length encoding part 13 as compressed data of the difference image (step ST7).

[0050]

When receiving the compressed data of the difference image from the transformation/quantization part 7, the inverse quantization/inverse transformation part 8 inverse-quantizes the compressed data of the difference image by using the quantization parameter included in the prediction error encoding parameters outputted thereto from the encoding controlling part 1, performs an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction error encoding parameters, and outputs the

compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process to the adding part 9 as a local decoded prediction error signal $\hat{e}_i^n$ ("^" attached to an alphabetical letter is expressed by hat for reasons of the restrictions on electronic applications) (step ST8).

[0051]

When receiving the local decoded prediction error signal $\hat{e}_i^n$ from the inverse quantization/inverse transformation part 8, the adding part 9 adds the local decoded prediction error signal $\hat{e}_i^n$ and the prediction signal showing the prediction image (the intra prediction image P_i^n or the inter prediction image P_i^n) generated by the intra prediction part 4 or the motion-compensated prediction part 5 to generate a local decoded image which is a local decoded partition image $\hat{P}_i^n$ or a local decoded coding block image which is a group of local decoded partition images (step ST9). After generating the local decoded image, the adding part 9 stores a local decoded image signal showing the local decoded image in the memory 10 for intra prediction and also outputs the local decoded image signal to the loop filter part 11.

[0052]

The moving image encoding device repeatedly carries out the processes of steps ST3 to ST9 until the moving image encoding device completes the processing on all the coding blocks B^n into which the inputted image is divided hierarchically, and, when completing the processing on all the coding blocks B^n , shifts to a process of step ST12 (steps ST10 and ST11).

[0053]

The variable length encoding part 13 entropy-encodes the

compressed data outputted thereto from the transformation/quantization part 7, the encoding mode (including the information showing the state of the division into the coding blocks) and the prediction error encoding
5 parameters, which are outputted thereto from the encoding controlling part 1, and the intra prediction parameters outputted thereto from the intra prediction part 4 or the inter prediction parameters outputted thereto from the motion-compensated prediction part 5. The variable length
10 encoding part 13 multiplexes encoded data which are the encoded results of the entropy encoding of the compressed data, the encoding mode, the prediction error encoding parameters, and the intra prediction parameters or the inter prediction parameters to generate a bitstream (step ST12).

15 [0054]

When receiving the local decoded image signal from the adding part 9, the loop filter part 11 compensates for an encoding distortion included in the local decoded image signal, and stores the local decoded image shown by the local decoded
20 image signal on which the loop filter part performs the encoding distortion compensation in the motion-compensated prediction frame memory 12 as a reference image (step ST13). The loop filter part 11 can carry out the filtering process for each coding block having the maximum size of the local decoded image
25 signal outputted thereto from the adding part 9 or for each coding block of the local decoded image signal, or for each unit which is a combination of a plurality of coding blocks each having the maximum size. As an alternative, after one picture of local decoded image signals is outputted, the loop filter
30 part can carry out the filtering process on the picture of local

decoded image signals at a time.

[0055]

Next, the process carried out by the intra prediction unit 4 will be explained in detail. Fig. 7 is an explanatory drawing showing an example of the intra prediction parameters (intra prediction mode) which can be selected for each partition P_i^n in the coding block B^n . In the example shown in Fig. 7, intra prediction modes and prediction direction vectors represented by each of the intra prediction modes are shown, and it is designed that a relative angle between prediction direction vectors becomes small with increase in the number of selectable intra prediction modes.

[0056]

The intra prediction part 4 carries out an intra prediction process on the partition P_i^n on the basis of the intra prediction parameters for the partition P_i^n and a selection parameter for a filter which the intra prediction part uses for the generation of an intra prediction image P_i^n . Hereafter, an intra process of generating an intra prediction signal of the luminance signal on the basis of the intra prediction parameters (intra prediction mode) for the luminance signal of the partition P_i^n will be explained.

[0057]

Hereafter, the partition P_i^n is assumed to have a size of $l_i^n \times m_i^n$ pixels. Fig. 8 is an explanatory drawing showing an example of pixels which are used when generating a predicted value of each pixel in the partition P_i^n in the case of $l_i^n = m_i^n = 4$. Although the $(2 \times l_i^n + 1)$ pixels in the already-encoded upper partition which is adjacent to the partition P_i^n and the $(2 \times m_i^n)$ pixels in the already-encoded left partition which is

adjacent to the partition P_i^n are set as the pixels used for prediction in the example of Fig. 8, a larger or smaller number of pixels than the pixels shown in Fig. 8 can be used for prediction. Further, although one row or column of pixels adjacent to the partition are used for prediction in the example shown in Fig. 8, two or more rows or columns of pixels adjacent to the partition can be alternatively used for prediction.

[0058]

When the index value indicating the intra prediction mode for the partition P_i^n is 2 (average prediction), the intra prediction part generates an intermediate prediction image by using the average of the adjacent pixels in the upper partition and the adjacent pixels in the left partition as the predicted value of each pixel in the partition P_i^n . When the index value indicating the intra prediction mode is other than 2 (average prediction), the intra prediction part generates the predicted value of each pixel in the partition P_i^n on the basis of a prediction direction vector $v_p=(dx, dy)$ shown by the index value. In this case, the relative coordinate of the pixel (the pixel at the upper left corner of the partition is set as the point of origin) for which the predicted value is to be generated (target pixel for prediction) in the partition P_i^n is expressed as (x, y) . Each reference pixel which is used for prediction is located at a point of intersection of A shown below and an adjacent pixel.

$$L = \begin{pmatrix} x \\ y \end{pmatrix} + kv_p$$

where k is a positive scalar value.

[0059]

When a reference pixel is located at an integer pixel

position, the integer pixel is set as the predicted value of the target pixel for prediction. In contrast, when a reference pixel is not located at an integer pixel position, an interpolation pixel which is generated from an integer pixel adjacent to the reference pixel is set as the predicted value of the target pixel for prediction. In the example shown in Fig. 8, because a reference pixel is not located at an integer pixel position, the predicted value is interpolated from the values of two pixels adjacent to the reference pixel. However, the interpolation of the predicted value is not limited to the one from the values of two adjacent pixels, and an interpolation pixel can be generated from two or more adjacent pixels and the value of this interpolation pixel can be set as the predicted value.

15 [0060]

Next, the intra prediction part obtains a final prediction image by carrying out a filtering process on the intermediate prediction image (predicted value) generated according to the above-mentioned procedure. Hereafter, the filtering process will be explained concretely.

[0061]

The intra prediction part selects a filter to be used from one or more filters which are prepared in advance by using a method which will be mentioned below, and carries out a filtering process on each pixel of the intermediate prediction image according to the following equation (1).

$$\hat{s}(p_0) = a_0 s(p_0) + a_1 s(p_1) + \cdots + a_{N-1} s(p_{N-1}) + a_N \quad (1)$$

[0062]

In the equation (1), a_n ($n=0, 1, \dots, N$) is filter

coefficients which consist of coefficients ($a_0, a_1, \dots, a_{N-1}$) associated with the reference pixels, and an offset coefficient a_N . p_n ($n=0, 1, \dots, N-1$) shows the reference pixels of the filter including the target pixel p_0 to be filtered. $s(p_n)$ shows the
 5 luminance value of each reference pixel, and $\hat{s}(p_0)$ shows the luminance value of the target pixel p_0 to be filtered on which the filtering process has been carried out. The filter coefficients can be formed so as not to include the offset coefficient a_N . Further, N is an arbitrary number of reference
 10 pixels. Fig. 9 is an explanatory drawing showing an example of the arrangement of the reference pixels in the case of $N=5$.
 [0063]

When carrying out the above-mentioned filtering process, a nonlinear edge or the like occurs in the inputted image more easily and hence a displacement from the prediction direction
 15 of the intermediate prediction image occurs more easily with increase in the size ($l_i^n \times m_i^n$) of the partition P_i^n . Therefore, it is preferable to smooth the intermediate prediction image. In addition, the larger quantized value a prediction error has,
 20 the larger quantization distortion occurs in the decoded image and hence the lower degree of prediction accuracy the intermediate prediction image generated from already-encoded pixels which are adjacent to the partition P_i^n has. Therefore, it is preferable to prepare a smoothed prediction image which
 25 roughly expresses the partition P_i^n . Further, even a pixel in the same partition P_i^n has a displacement, such as an edge, occurring between the intermediate prediction image and the inputted image more easily with distance from the already-encoded pixels adjacent to the partition P_i^n which are
 30 used for the generation of the intermediate prediction image.

Therefore, it is preferable to smooth the prediction image to suppress the rapid increase in the prediction error which is caused when a displacement occurs. In addition, it is necessary to not only change the intensity of the filter, but also arrange
5 the reference pixels of the filter appropriately according to the prediction direction of the intermediate prediction image, thereby preventing a pattern, such as an edge of the intermediate prediction image, from being distorted unnaturally.

10 [0064]

Therefore, the filter selecting process is configured in such a way as to select a filter in consideration of the four following parameters (1) to (4).

- (1) The size of the partition P_i^n ($l_i^n \times m_i^n$)
 - 15 (2) The quantization parameter included in the prediction error encoding parameters
 - (3) The distance between the group of already-encoded pixels ("pixels which are used for prediction" shown in Fig. 8) which are used at the time of generating the intermediate prediction
20 image, and the target pixel to be filtered
 - (4) The index value indicating the intra prediction mode at the time of generating the intermediate prediction image
- [0065]

More specifically, the filter selecting process is
25 configured in such a way that a filter having a higher degree of smoothing intensity is used with increase in the size ($l_i^n \times m_i^n$) of the partition P_i^n , with increase in the quantized value determined by the quantization parameter, and with distance between the target pixel to be filtered and the group of
30 already-encoded pixels which are located on the left side and

on the upper side of the partition P_i^n and which are used at the time of generating the intermediate prediction image, and the filter has a degree of filter intensity which is determined in consideration of the prediction direction in the intra prediction mode and the reference pixels are arranged in consideration of the prediction direction in the intra prediction mode. More specifically, an adaptive selection of a filter according to the above-mentioned parameters is implemented by bringing an appropriate filter selected from among the group of filters which are prepared in advance into correspondence with each of combinations of the above-mentioned parameters. However, any number of selectable degrees of filter intensity can be provided as long as the number is two or more, and a filtering process equivalent to no filtering can be defined as an expression of a filter having the lowest degree of smoothing intensity. Therefore, the filtering process can be configured in such a way that the filtering process is carried out only on specific pixels in the intermediate prediction image, but a filtering process having the lowest degree of smoothing intensity, i.e., no filtering is carried out on any other pixels. Although the above explanation is made on the assumption that a necessary number of filters are prepared in advance, a filter can be alternatively defined as a function of the above-mentioned filter selection parameters in such a way that the filter is determined according to the values of the above-mentioned filter selection parameters.

[0066]

Although the example of selecting a filter in consideration of the four parameters (1) to (4) is shown in the above explanation, a filter can be alternatively selected in

consideration of at least one of the four parameters (1) to (4).
In a case of taking into consideration (3) and (4) of the
above-mentioned four parameters as an example, there can be
provided a structure of selecting a filter having a higher
5 degree of intensity with distance from a pixel used for
prediction of each target pixel to be filtered according to the
prediction direction in the intra prediction mode (distance
from a "reference pixel" which is adjacent to the upper end of
the block in the example shown in Fig. 8). Further, because
10 the four parameters (1) to (4) are known in the moving image
decoding device, carrying out the above-mentioned filtering
process causes no additional information to be encoded.

[0067]

The intra prediction part generates a prediction pixel
15 for each of all the pixels of the luminance signal in the
partition P_i^n according to the same procedure to generate an
intra prediction image P_i^n , and outputs the intra prediction
image P_i^n generated thereby. The intra prediction part outputs
the intra prediction parameters used for the generation of the
20 intra prediction image P_i to the variable length encoding part
13 in order to multiplex them into a bitstream. The intra
prediction part also carries out an intra prediction process
based on the intra prediction parameters (intra prediction
mode) on each of the color difference signals of the partition
25 P_i^n according to the same procedure as that according to which
the intra prediction part carries out the intra prediction
process on the luminance signal, and outputs the intra
prediction parameters used for the generation of the intra
prediction image to the variable length encoding part 13. The
30 intra prediction part can be constructed in such a way as to

carry out the above-explained filtering process for the intra prediction of each of the color difference signals in the same way that the intra prediction part does for the luminance signal, or not to carry out the above-explained filtering process for the intra prediction of each of the color difference signals.
[0068]

Next, the processing carried out by the moving image decoding device shown in Fig. 2 will be explained. When receiving the bitstream outputted thereto from the image encoding device of Fig. 1, the variable length decoding part 51 carries out a variable length decoding process on the bitstream to decode information having a frame size in units of a sequence which consists of one or more frames of pictures or in units of a picture (step ST21 of Fig. 4). The variable length decoding part 51 determines a maximum size of each of coding blocks which is a unit to be processed at a time when an intra prediction process (intra-frame prediction process) or a motion-compensated prediction process (inter-frame prediction process) is carried out according to the same procedure as that which the encoding controlling part 1 shown in Fig. 1 uses, and also determines an upper limit on the number of hierarchical layers in a hierarchy in which each of the coding blocks having the maximum size is hierarchically divided into blocks (step ST22). For example, when the maximum size of each of coding blocks is determined according to the resolution of the inputted image in the image encoding device, the variable length decoding part determines the maximum size of each of the coding blocks on the basis of the frame size information which the variable length decoding part has decoded previously. When information showing both the maximum size of each of the coding

blocks and the upper limit on the number of hierarchical layers is multiplexed into the bitstream, the variable length decoding part refers to the information which is obtained by decoding the bitstream.

5 [0069]

Because the information showing the state of the division of each of the coding blocks B_0 having the maximum size is included in the encoding mode $m(B_0)$ of the coding block B_0 having the maximum size which is multiplexed into the bitstream, the
10 variable length decoding part 51 specifies each of the coding blocks B^n into which the image is divided hierarchically by decoding the bitstream to obtain the encoding mode $m(B_0)$ of the coding block B_0 having the maximum size which is multiplexed into the bitstream (step ST23). After specifying each of the
15 coding blocks B^n , the variable length decoding part 51 decodes the bitstream to obtain the encoding mode $m(B^n)$ of the coding block B^n to specify each partition P_i^n belonging to the coding block B^n on the basis of the information about the partition P_i^n belonging to the encoding mode $m(B^n)$. After specifying each
20 partition P_i^n belonging to the coding block B^n , the variable length decoding part 51 decodes the encoded data to obtain the compressed data, the encoding mode, the prediction error encoding parameters, and the intra prediction parameters/inter prediction parameters for each partition P_i^n (step ST24).

25 [0070]

More specifically, when the encoding mode $m(B^n)$ assigned to the coding block B^n is an intra encoding mode, the variable length decoding part decodes the encoded data to obtain the intra prediction parameters for each partition P_i^n belonging
30 to the coding block. In contrast, when the encoding mode $m(B^n)$

assigned to the coding block B^n is an inter encoding mode, the variable length decoding part decodes the encoded data to obtain the inter prediction parameters for each partition P_i^n belonging to the coding block. The variable length decoding part further
5 divides each partition which is a prediction unit into one or more partitions which is a transformation process unit on the basis of the transformation block size information included in the prediction error encoding parameters, and decodes the encoded data of each of the one or more partitions which is a
10 transformation process unit to obtain the compressed data (transform coefficients on which transformation and quantization are carried out) of the partition.

[0071]

When the encoding mode $m(B^n)$ of the partition P_i^n belonging
15 to the coding block B^n , which is specified by the variable length decoding part 51, is an intra encoding mode (step ST25), the selection switch 52 outputs the intra prediction parameters outputted thereto from the variable length decoding part 51 to the intra prediction part 53. In contrast, when the encoding
20 mode $m(B^n)$ of the partition P_i^n is an inter encoding mode (step ST25), the selection switch outputs the inter prediction parameters outputted thereto from the variable length decoding part 51 to the motion-compensated prediction part 54.

[0072]

25 When receiving the intra prediction parameters from the selection switch 52, the intra prediction part 53 carries out an intra-frame prediction process on the partition P_i^n of the coding block B^n to generate an intra prediction image P_i^n by using an already-decoded image signal in the frame on the basis of
30 the intra prediction parameters (step ST26), like the intra

prediction part 4 shown in Fig. 1. When generating an intra prediction image P_i^n , the intra prediction part 53 selects a filter from one or more filters, which are prepared in advance by using the same method as that the intra prediction part 4 shown in Fig. 1 uses, according to the states of the various parameters associated with the decoding of the target block to be filtered, and carries out a filtering process on the intra prediction image P_i^n by using the filter and sets the intra prediction image P_i^n on which the intra prediction part has carried out the filtering process as a final intra prediction image. Although the above explanation is made on the assumption that a necessary number of filters are prepared in advance, in the case in which a filter is defined as a function of the above-mentioned parameters in such a way that the filter is determined according to the states of the parameters used for the filter selection in the intra prediction part 4 shown in Fig. 1, a filter can be defined as a function of the above-mentioned parameters also in the intra prediction part 53 in such a way that the filter is determined according to the states of the various parameters associated with the decoding of the target block to be filtered.

[0073]

When receiving the inter prediction parameters from the selection switch 52, the motion-compensated prediction part 54 carries out an motion-compensated prediction process on the partition P_i^n of the coding block B^n to generate an inter prediction image P_i^n by using one or more frames of reference images stored in the motion-compensated prediction frame memory 59 on the basis of the inter prediction parameters (step ST27).

30 [0074]

The inverse quantization/inverse transformation part 55 inverse-quantizes the compressed data associated with the coding block, which are outputted thereto from the variable length decoding part 51, by using the quantization parameter included in the prediction error encoding parameters outputted thereto from the variable length decoding part 51, and carries out an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction error encoding parameters, and outputs the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process to the adding part 56 as a decoded prediction error signal (signal showing a pre-compressed difference image) (step ST28).

[0075]

When receiving the decoded prediction error signal from the inverse quantization/inverse transformation part 55, the adding part 56 generates a decoded image by adding the decoded prediction error signal and the prediction signal showing the prediction image generated by the intra prediction part 53 or the motion-compensated prediction part 54 and stores a decoded image signal showing the decoded image in the memory 57 for intra prediction, and also outputs the decoded image signal to the loop filter part 58 (step ST29).

[0076]

The moving image decoding device repeatedly carries out the processes of steps ST23 to ST29 until the moving image decoding device completes the processing on all the coding

blocks B^n into which the image is divided hierarchically (step ST30). When receiving the decoded image signal from the adding part 56, the loop filter part 58 compensates for an encoding distortion included in the decoded image signal, and stores the
5 decoded image shown by the decoded image signal on which the loop filter part performs the encoding distortion compensation in the motion-compensated prediction frame memory 59 as a reference image (step ST31). The loop filter part 58 can carry out the filtering process for each coding block having the
10 maximum size of the local decoded image signal outputted thereto from the adding part 56 or each coding block. As an alternative, after the local decoded image signal corresponding to all the macroblocks of one screen is outputted, the loop filter part can carry out the filtering process on all the macroblocks of
15 the one screen at a time.

[0077]

As can be seen from the above description, because the intra prediction part 4 of the moving image encoding device in accordance with this Embodiment 1 is constructed in such a way
20 as to, when carrying out an intra-frame prediction process to generate an intra prediction image by using an already-encoded image signal in a frame, select a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the encoding of a target block to
25 be filtered, and carry out a filtering process on a prediction image by using the filter, there is provided an advantage of being able to reduce prediction errors which occur locally, thereby being able to improve the image quality.

[0078]

30 Further, because the intra prediction part 4 in

accordance with this Embodiment 1 is constructed in such a way as to select a filter in consideration of at least one of the following parameters: (1) the size of the partition P_i^n ($l_i^n \times m_i^n$); (2) the quantization parameter included in the prediction error encoding parameters; (3) the distance between the group of already-encoded pixels which are used at the time of generating the intermediate prediction image, and the target pixel to be filtered; and (4) the index value indicating the intra prediction mode at the time of generating the intermediate prediction image, there is provided an advantage of preventing a local prediction error from occurring when a slight displacement occurs between the direction of an edge in the image to be encoded and the prediction direction or a slight distortion exists in an edge in the intermediate prediction image having a high correlation with the image to be encoded, thereby being able to improve the prediction efficiency.

[0079]

Because the intra prediction part 53 of the moving image decoding device in accordance with this Embodiment 1 is constructed in such a way as to, when carrying out an intra-frame prediction process to generate an intra prediction image by using an already-decoded image signal in a frame, select a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the decoding of a target block to be filtered, and carry out a filtering process on a prediction image by using the filter, there is provided an advantage of reducing prediction errors which occur locally while making it possible for the moving image decoding device to also generate the same intra prediction image as that generated by the moving image encoding device.

[0080]

Further, because the intra prediction part 53 in accordance with this Embodiment 1 is constructed in such a way as to select a filter in consideration of at least one of the following parameters: (1) the size of the partition P_i^n ($l_i^n \times m_i^n$); (2) the quantization parameter included in the prediction error encoding parameters; (3) the distance between the group of already-encoded pixels which are used at the time of generating the intermediate prediction image, and the target pixel to be filtered; and (4) the index value indicating the intra prediction mode at the time of generating the intermediate prediction image, there are provided an advantage of preventing a local prediction error from occurring when a slight displacement occurs between the direction of an edge in the image to be encoded and the prediction direction or a slight distortion exists in an edge in the intermediate prediction image having a high correlation with the image to be encoded, and another advantage of making it possible for the moving image decoding device to also generate the same intra prediction image as that generated by the moving image encoding device.

[0081]

Embodiment 2.

Although the example in which the intra prediction part 4 selects a filter according to the states of various parameters associated with the encoding of a target block to be filtered from one or more filters which are prepared in advance, and carries out a filtering process on a prediction image by using the filter when carrying out an intra-frame prediction process to generate an intra prediction image by using an already-encoded image signal in a frame is shown in

above-mentioned Embodiment 1, as an alternative, a Wiener filter which minimizes the sum of squared errors between a coding block and a prediction image can be designed, and, when the use of this Wiener filter increases the degree of reduction
5 in prediction errors as compared with the use of the filter which has been selected from the one or more filters which are prepared in advance, the filtering process can be carried out on the prediction image by using the above-mentioned Wiener filter, instead of the filter which has been selected. Hereafter,
10 processes will be explained concretely.

[0082]

Each of the intra prediction parts 4 and 53 in accordance with above-mentioned Embodiment 1 is constructed in such a way as to select a filter from one or more filters which are prepared
15 in advance according to the states of various parameters associated with the encoding of a target block to be filtered. While each of the intra prediction parts can select an appropriate filter from the one or more selection candidates in consideration of the four parameters (1) to (4), each of the
20 intra prediction parts cannot carry out "optimal filtering" when an optimal filter other than the one or more selection candidates exists. This Embodiment 2 is characterized in that while a moving image encoding device designs an optimal filter on a per picture basis and carries out a filtering process, and
25 also encodes the filter coefficients of the filter, and so on, a moving image decoding device decodes the filter coefficients and so on, and carries out a filtering process by using the filter.

[0083]

30 An intra prediction part 4 of the moving image encoding

device carries out an intra-frame prediction process on each partition P_i^n of each coding block B^n to generate an intra prediction image P_i^n , like that according to above-mentioned Embodiment 1. The intra prediction part 4 also selects a filter from one or more filters which are prepared in advance according to the states of various parameters associated with the encoding of a target block to be filtered by using the same method as that the intra prediction part according to above-mentioned Embodiment 1 uses, and carries out a filtering process on the intra prediction image P_i^n by using this filter. After determining intra prediction parameters for each of all coding blocks B^n in the picture, for each area in which an identical filter is used within the picture (each area having the same filter index), the intra prediction part 4 designs a Wiener filter which minimizes the sum of squared errors between the inputted image in the area and the intra prediction image (mean squared error in the target area).

[0084]

The filter coefficients w of the Wiener filter can be determined from an autocorrelation matrix $R_{s's'}$ of an intermediate prediction image signal s' , and a cross correlation matrix $R_{ss'}$ of the inputted image signal s and the intermediate prediction image signal s' according to the following equation (4). The size of the matrices $R_{s's'}$ and $R_{ss'}$ corresponds to the number of filter taps determined.

$$w = R_{s's'}^{-1} \cdot R_{ss'} \quad (4)$$

[0085]

After designing the Wiener filter, the intra prediction part 4 expresses the sum of squared errors in the target area

for filter design in the case of carrying out a filtering process using the Wiener filter as D1, the code amount at the time of encoding information (e.g., filter coefficients) associated with the Wiener filter as R1, and the sum of squared errors in the target area for filter design in the case of carrying out a filtering process using a filter which is selected by using the same method as that shown in above-mentioned Embodiment 1 as D2, and then checks to see whether or not the following equation (5) is established.

$$10 \quad D1 + \lambda \cdot R1 < D2 \quad (5)$$

where λ is a constant.

[0086]

When the equation (5) is established, the intra prediction part 4 carries out a filtering process by using the Wiener filter instead of a filter which is selected by using the same method as that shown in above-mentioned Embodiment 1. In contrast, when the equation (5) is not established, the intra prediction part carries out a filtering process by using a filter which the intra prediction part selects by using the same method as that shown in above-mentioned Embodiment 1. Although the intra prediction part carries out the evaluation by using the sums of squared errors D1 and D2, this embodiment is not limited to this example. The intra prediction part can alternatively carry out the evaluation by using measures showing other prediction distortion values, such as the sums of the absolute values of errors, instead of the sums of squared errors D1 and D2.

[0087]

When carrying out a filtering process by using the Wiener filter, the intra prediction part 4 requires filter update

information showing the filter coefficients of the Wiener filter and indexes each indicating a corresponding filter which is replaced by the Wiener filter. More specifically, when the number of filters selectable in the filtering process using
5 filter selection parameters is expressed as L, and indexes ranging from zero to L-1 are assigned to the filters, respectively, when the designed Wiener filter is used for each index, a value of "1" needs to be encoded for the index as the filter update information, whereas when a prepared filter is
10 used for each index, a value of "0" needs to be encoded for the index as the filter update information. A variable length encoding part 13 variable-length-encodes the filter update information outputted thereto from the intra prediction part 4, and multiplexes encoded data of the filter update information
15 into a bitstream.

[0088]

Although the example of designing a Wiener filter which minimizes the mean squared error between the inputted image and a prediction image in each area for which an identical filter
20 is used within a picture for the area is shown in this embodiment, a Wiener filter which minimizes the mean squared error between the inputted image and a prediction image in each area for which an identical filter is used can be designed for each of other specific areas each of which is not a picture. For example,
25 the above-mentioned design of a Wiener filter can be carried out only for a certain specific picture or only when a specific condition is satisfied (e.g., only for a picture to which a scene change detection function is added and in which a scene change is detected).

30 [0089]

A variable length decoding part 51 of a moving image decoding device variable-length-decodes the encoded data multiplexed into the bitstream to obtain the filter update information. An intra prediction part 53 carries out an intra-frame prediction process on each partition P_i^n of each coding block B^n to generate an intra prediction image P_i^n , like that according to above-mentioned Embodiment 1. When receiving the filter update information from the variable length decoding part 51, the intra prediction part 53 refers to the filter update information to check to see whether or not there is an update to the filter indicated by the corresponding index.

[0090]

When determining from the result of the check that the filter for a certain area is replaced by a Wiener filter, the intra prediction part 53 reads the filter coefficients of the Wiener filter which are included in the filter update information to specify the Wiener filter, and carries out a filtering process on the intra prediction image P_i^n by using the Wiener filter. In contrast, for an area in which no filter is replaced by a Wiener filter, the intra prediction part selects a filter by using the same method as that which the intra prediction part according to above-mentioned Embodiment 1 uses, and carries out a filtering process on the intra prediction image P_i^n by using the filter.

[0091]

As can be seen from the above description, because the moving image encoding device in accordance with this Embodiment 2 is constructed in such a way as to design a Wiener filter which minimizes the sum of squared errors between a coding block and

a prediction image, and, when the use of this Wiener filter increases the degree of reduction in prediction errors as compared with the use of a filter which is selected from one or more filters which are prepared in advance, carry out a
5 filtering process on the prediction image by using the Wiener filter, instead of the selected filter, there is provided an advantage of being able to further reduce prediction errors which occur locally as compared with above-mentioned Embodiment 1.

10 [0092]

While the invention has been described in its preferred embodiments, it is to be understood that an arbitrary combination of two or more of the above-mentioned embodiments can be made, various changes can be made in an arbitrary
15 component according to any one of the above-mentioned embodiments, and an arbitrary component according to any one of the above-mentioned embodiments can be omitted within the scope of the invention.

INDUSTRIAL APPLICABILITY

20 [0093]

As mentioned above, because the moving image encoding device, the moving image decoding device, the moving image encoding method, and the moving image decoding method in accordance with the present invention are configured in such
25 a way as to, when an intra prediction unit carries out an intra-frame prediction process to generate a prediction image by using an already-encoded image signal in a frame, select a filter from one or more filters which are prepared in advance according to the state of various parameters associated with
30 the encoding of a target block to be filtered, and carry out

a filtering process on a prediction image by using the filter, and output the prediction image on which the filtering process has been carried out to a difference image generating unit, the moving image encoding device and the moving image encoding method are suitable for use as a moving image encoding device for and a moving image encoding method of encoding a moving image with a high degree of efficiency, and the moving image decoding device and the moving image decoding method are suitable for use as a moving image decoding device for and a moving image decoding method of decoding an encoded moving image with a high degree of efficiency.

EXPLANATIONS OF REFERENCE NUMERALS

[0094]

1 encoding controlling part (encoding controlling unit), 2 block dividing part (block dividing unit), 3 selection switch (intra prediction unit and motion-compensated prediction unit), 4 intra prediction part (intra prediction unit), 5 motion-compensated prediction part (motion-compensated prediction unit), 6 subtracting part (difference image generating unit), 7 transformation/quantization part (image compression unit), 8 inverse quantization/inverse transformation part, 9 adding part, 10 memory for intra prediction, 11 loop filtering part, 12 motion-compensated prediction frame memory, 13 Variable length encoding unit (variable length encoding unit), 31 variable length decoding part (variable length decoding unit), 52 selection switch (intra prediction unit and motion-compensated prediction unit), 53 intra prediction part (intra prediction unit), 54 motion-compensated prediction part (motion-compensated prediction unit), 55 inverse quantization/inverse

transformation part (difference image generating unit), 56
adding part (decoded image generating unit), 57 memory for intra
prediction, 58 loop filtering part, 59 motion-compensated
prediction frame memory.

CLAIMS

[1] A moving image encoding device comprising:

an encoding controlling unit for determining a maximum
5 size of a coding block which is a unit to be processed at a time
when a prediction process is carried out, and also determining
a hierarchy number upper limit at a time when a coding block
having the maximum size is divided hierarchically, and for
selecting an encoding mode which determines an encoding method
10 of encoding each coding block from one or more available
encoding modes;

a block dividing unit for dividing an inputted image into
coding blocks each having a predetermined size, and also
dividing each of said coding blocks hierarchically until its
15 hierarchy number reaches the hierarchy number upper limit
determined by said encoding controlling unit;

an intra prediction unit for, when an inter encoding mode
is selected by said encoding controlling unit as an encoding
mode corresponding to one of the coding blocks into which the
20 inputted image is divided by said block dividing unit, carrying
out an intra-frame prediction process to generate a prediction
image by using an already-encoded image signal in a frame;

a difference image generating unit for generating a
difference image between the one of the coding blocks into which
25 the inputted image is divided by said block dividing unit, and
the prediction image generated by said intra prediction unit;

an image compression unit for compressing the difference
image generated by said difference image generating unit, and
outputting compressed data of said difference image; and

30 a variable length encoding unit for

variable-length-encoding the compressed data outputted from said image compression unit and the encoding mode selected by said encoding controlling unit to generate a bitstream into which encoded data of said compressed data and encoded data of
5 said encoding mode are multiplexed, wherein

when generating the prediction image, said intra prediction unit selects a predetermined filter from one or more filters which are prepared in advance, carries out a filtering process on said prediction image by using said filter, and
10 outputs the prediction image on which said intra prediction unit has carried out the filtering process to said difference image generating unit.

[2] The moving image encoding device according to claim 1, wherein said moving image encoding device includes a
15 motion-compensated prediction unit for, when an inter encoding mode is selected by said encoding controlling unit as an encoding mode corresponding to the one of the coding blocks into which the inputted image is divided by said block dividing unit, carrying out a motion-compensated prediction process on said
20 coding block to generate a prediction image by using a reference image, and the difference image generating unit generates a difference image between the one of the coding blocks into which the inputted image is divided by said block dividing unit, and the prediction image generated by said intra prediction unit
25 or said motion-compensated prediction unit.

[3] The moving image encoding device according to claim 2, wherein the encoding controlling unit determines a quantization parameter and a transformation block size which are used when the difference image is compressed for each of the coding blocks,
30 and also determines intra prediction parameters or inter

prediction parameters which are used when the prediction process is carried out for each of the coding blocks, the image compression unit carries out a transformation process on the difference image generated by the difference image generating unit in units of a block having the transformation block size determined by said encoding controlling unit and also quantizes transform coefficients of said difference image by using the quantization parameter determined by said encoding controlling unit to output the transform coefficients quantized thereby as the compressed data of said difference image, and, when variable-length-encoding the compressed data outputted from said image compression unit and the encoding mode selected by said encoding controlling unit, the variable length encoding unit variable-length-encodes the intra prediction parameters or the inter prediction parameters which are determined by said encoding controlling unit, and the quantization parameter and the transformation block size to generate a bitstream into which the encoded data of said compressed data, the encoded data of said encoding mode, encoded data of said intra prediction parameters or said inter prediction parameters, encoded data of said quantization parameter, and encoded data of said transformation block size are multiplexed.

[4] The moving image encoding device according to claim 3, wherein the intra prediction unit selects a filter which is used for the filtering process in consideration of at least one of a size of the block on which the intra prediction unit carries out the intra prediction, the quantization parameter determined by said encoding controlling unit, a distance between the already-encoded image signal in the frame which is used when generating the prediction image and a target pixel to be

filtered, and the intra prediction parameters determined by said encoding controlling unit.

[5] The moving image encoding device according to claim 1, wherein the intra prediction unit designs a Wiener filter which
5 minimizes a sum of squared errors between the one of the coding blocks into which the inputted image is divided by said block dividing unit, and the prediction image, and, when use of said Wiener filter increases a degree of reduction in prediction errors as compared with use of the filter selected from the one
10 or more filters which are prepared in advance, carries out the filtering process on the prediction image by using said Wiener filter, instead of the filter which the intra prediction unit has selected, and outputs the prediction image on which said intra prediction unit has carried out the filtering process to
15 the difference image generating unit, and the variable length encoding unit variable-length-encodes filter coefficients of the Wiener filter designed by said intra prediction unit and multiplexes encoded data of said filter coefficients into the bitstream.

20 [6] A moving image decoding device comprising:
a variable length decoding unit for variable-length-decoding encoded data multiplexed into a bitstream to obtain compressed data and an encoding mode which are associated with each of coding blocks into which an image
25 is hierarchically divided;

an intra prediction unit for, when an encoding mode associated with a coding block which is variable-length-decoded by said variable length decoding unit is an intra encoding mode, carrying out an intra-frame prediction process to generate a
30 prediction image by using an already-decoded image signal in

a frame;

a difference image generating unit for generating a pre-compressed difference image from the compressed data associated with the coding block variable-length-decoded by
5 said variable length decoding unit; and

a decoded image generating unit for adding the difference image generated by said difference image generating unit and the prediction image generated by said intra prediction unit to generate a decoded image, wherein

10 when generating the prediction image, said intra prediction unit selects a predetermined filter from one or more filters which are prepared in advance, carries out a filtering process on said prediction image by using said filter, and outputs the prediction image on which said intra prediction unit
15 has carried out the filtering process to said decoded image generating unit.

[7] The moving image decoding device according to claim 6, wherein said moving image encoding device includes a motion-compensated prediction unit for, when the encoding mode
20 associated with the coding block, which is variable-length-decoded by the variable length decoding unit, is an inter encoding mode, carrying out a motion-compensated prediction process on said coding block to generate a prediction image by using a reference image, and the decoded image
25 generating unit adds the difference image generated by the difference image generating unit and the prediction image generated by the intra prediction unit or said motion-compensated prediction unit to generate a decoded image.

[8] The moving image decoding device according to claim 7,
30 wherein the variable length decoding unit

variable-length-decodes the encoded data multiplexed into the bitstream to obtain compressed data, an encoding mode, intra prediction parameters or inter prediction parameters, a quantization parameter, and a transformation block size which
5 are associated with each of the coding blocks, and the difference image generating unit inverse-quantizes the compressed data associated with the coding block which is variable-length-decoded by said variable length decoding unit by using the quantization parameter associated with said coding
10 block and carries out an inverse transformation process on the compressed data inverse-quantized thereby in units of a block having said transformation block size to generate a pre-compressed difference image.

[9] The moving image decoding device according to claim 8,
15 wherein the intra prediction unit selects a filter which is used for the filtering process in consideration of at least one of a size of the block on which the intra prediction unit carries out the intra prediction, the quantization parameter variable-length-decoded by said variable length decoding unit,
20 a distance between the already-decoded image signal in the frame which is used when generating the prediction image and a target pixel to be filtered, and the intra prediction parameters variable-length-decoded by said variable length decoding unit.

[10] The moving image decoding device according to claim 6,
25 wherein when the variable length decoding unit variable-length-decodes the encoded data multiplexed into the bitstream to obtain filter coefficients of a Wiener filter, the intra prediction unit carries out the filtering process on the prediction image by using said Wiener filter instead of the
30 filter which the intra prediction unit has selected from the

one or more filters which are prepared in advance, and outputs the prediction image on which the intra prediction unit has carried out the filtering process to the decoded image generating unit.

5 [11] An moving image encoding method comprising:

an encoding control processing step of an encoding controlling unit determining a maximum size of a coding block which is a unit to be processed at a time when a prediction process is carried out and also determining a hierarchy number
10 upper limit at a time when a coding block having the maximum size is divided hierarchically, and selecting an encoding mode which determines an encoding method of encoding each coding block from one or more available encoding modes;

a block division processing step of a block dividing unit
15 dividing an inputted image into coding blocks each having a predetermined size, and also dividing each of said coding blocks hierarchically until its hierarchy number reaches the hierarchy number upper limit determined in said encoding control processing step;

20 an intra prediction processing step of, when an inter encoding mode is selected in said encoding control processing step as an encoding mode corresponding to one of the coding blocks into which the inputted image is divided in said block division processing step, an intra prediction unit carrying out
25 an intra-frame prediction process to generate a prediction image by using an already-encoded image signal in a frame;

a difference image generation processing step of a difference image generating unit generating a difference image between the one of the coding blocks into which the inputted
30 image is divided in said block division processing step, and

the prediction image generated in said intra prediction processing step;

an image compression processing step of an image compression unit compressing the difference image generated in said difference image generation processing step, and outputting compressed data of said difference image; and

a variable length coding process step of a variable length encoding unit variable-length-encoding the compressed data outputted in said image compression processing step and the encoding mode selected in said encoding control processing step to generate a bitstream into which encoded data of said compressed data and encoded data of said encoding mode are multiplexed, wherein

when generating the prediction image in said intra prediction process step, a predetermined filter is selected from one or more filters which are prepared in advance, a filtering process is carried out on said prediction image by using said filter, and the prediction image on which the filtering process has been carried out is outputted to said difference image generating unit.

[12] A moving image decoding device comprising:

a variable length decode processing step of a variable length decoding unit variable-length-decoding encoded data multiplexed into a bitstream to obtain compressed data and an encoding mode which are associated with each of coding blocks into which an image is hierarchically divided;

an intra prediction processing step of, when an encoding mode associated with a coding block which is variable-length-decoded in said variable length decode processing step is an intra encoding mode, an intra prediction

unit carrying out an intra-frame prediction process to generate a prediction image by using an already-decoded image signal in a frame;

a difference image generation processing step of a
5 difference image generating unit generating a pre-compressed difference image from the compressed data associated with the coding block variable-length-decoded in said variable length decode processing step; and

a decoded image generating process step of a decoded image
10 generating unit adding the difference image generated in said difference image generation processing step and the prediction image generated in said intra prediction processing step to generate a decoded image, wherein

when generating the prediction image in said intra
15 prediction processing step, a predetermined filter is selected from one or more filters which are prepared in advance, a filtering process is carried out on said prediction image by using said filter, and the prediction image on which the filtering process has been carried out is outputted to said
20 decoded image generating unit.

FIG.2

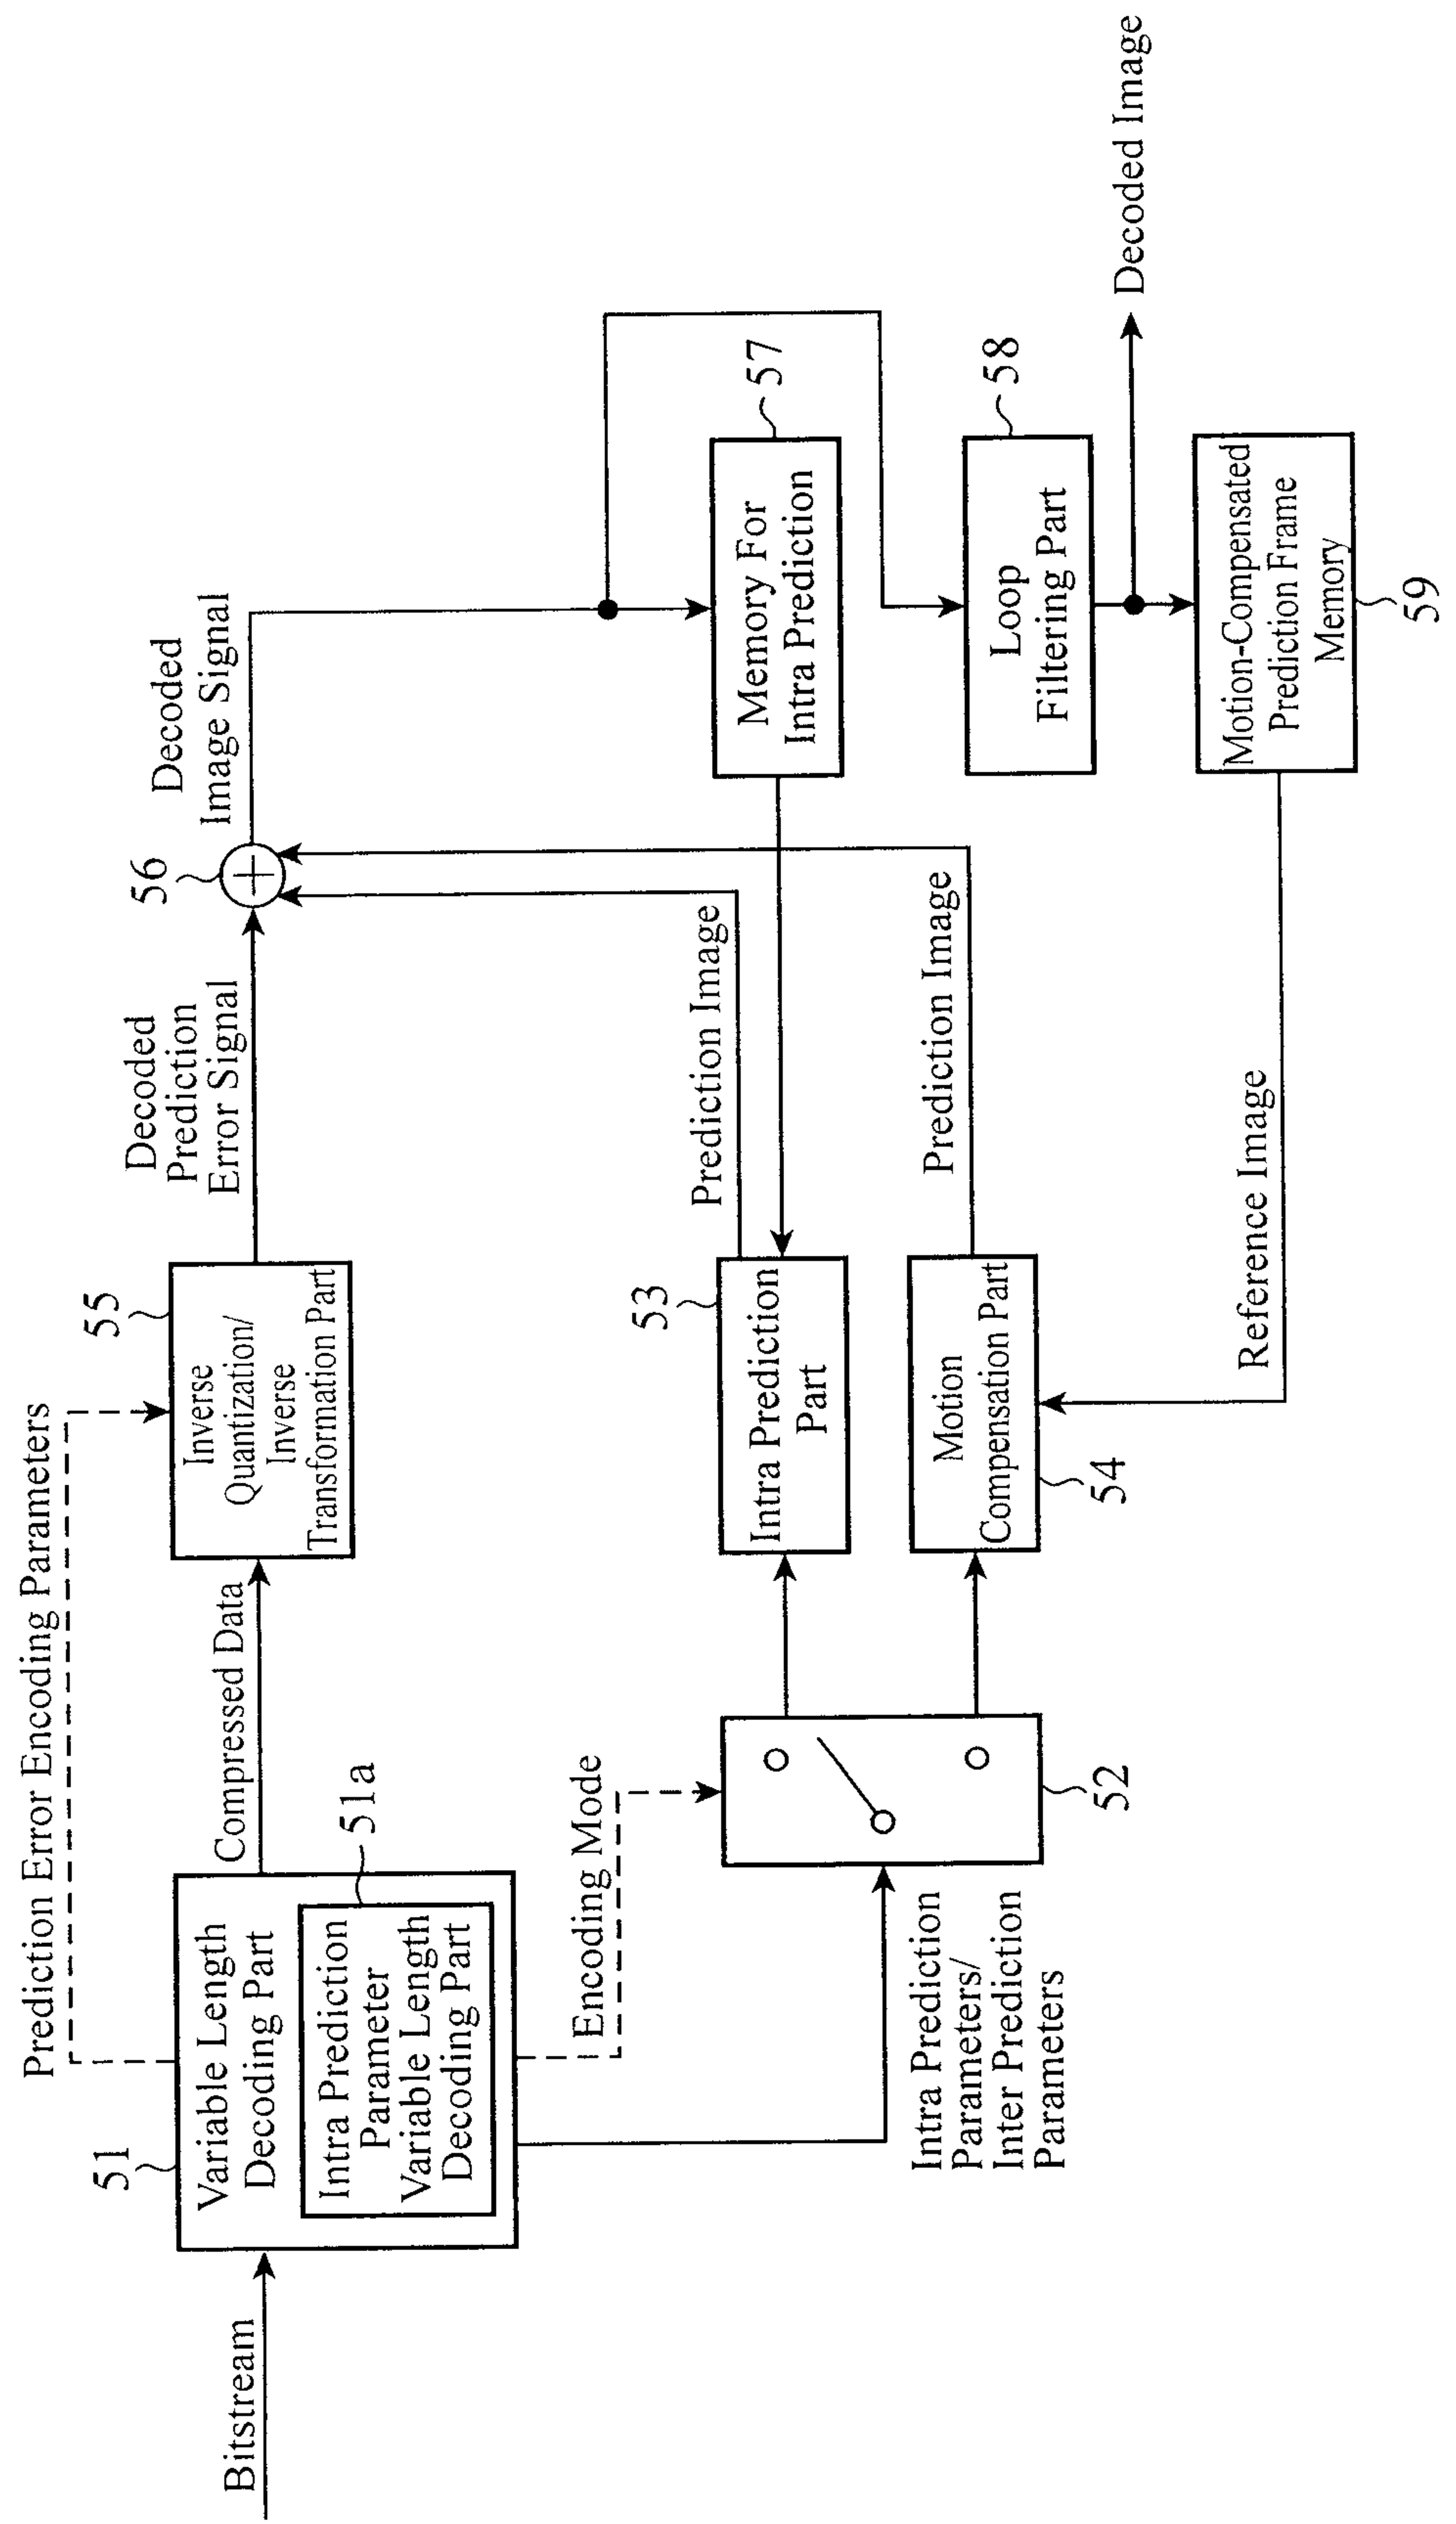


FIG.3

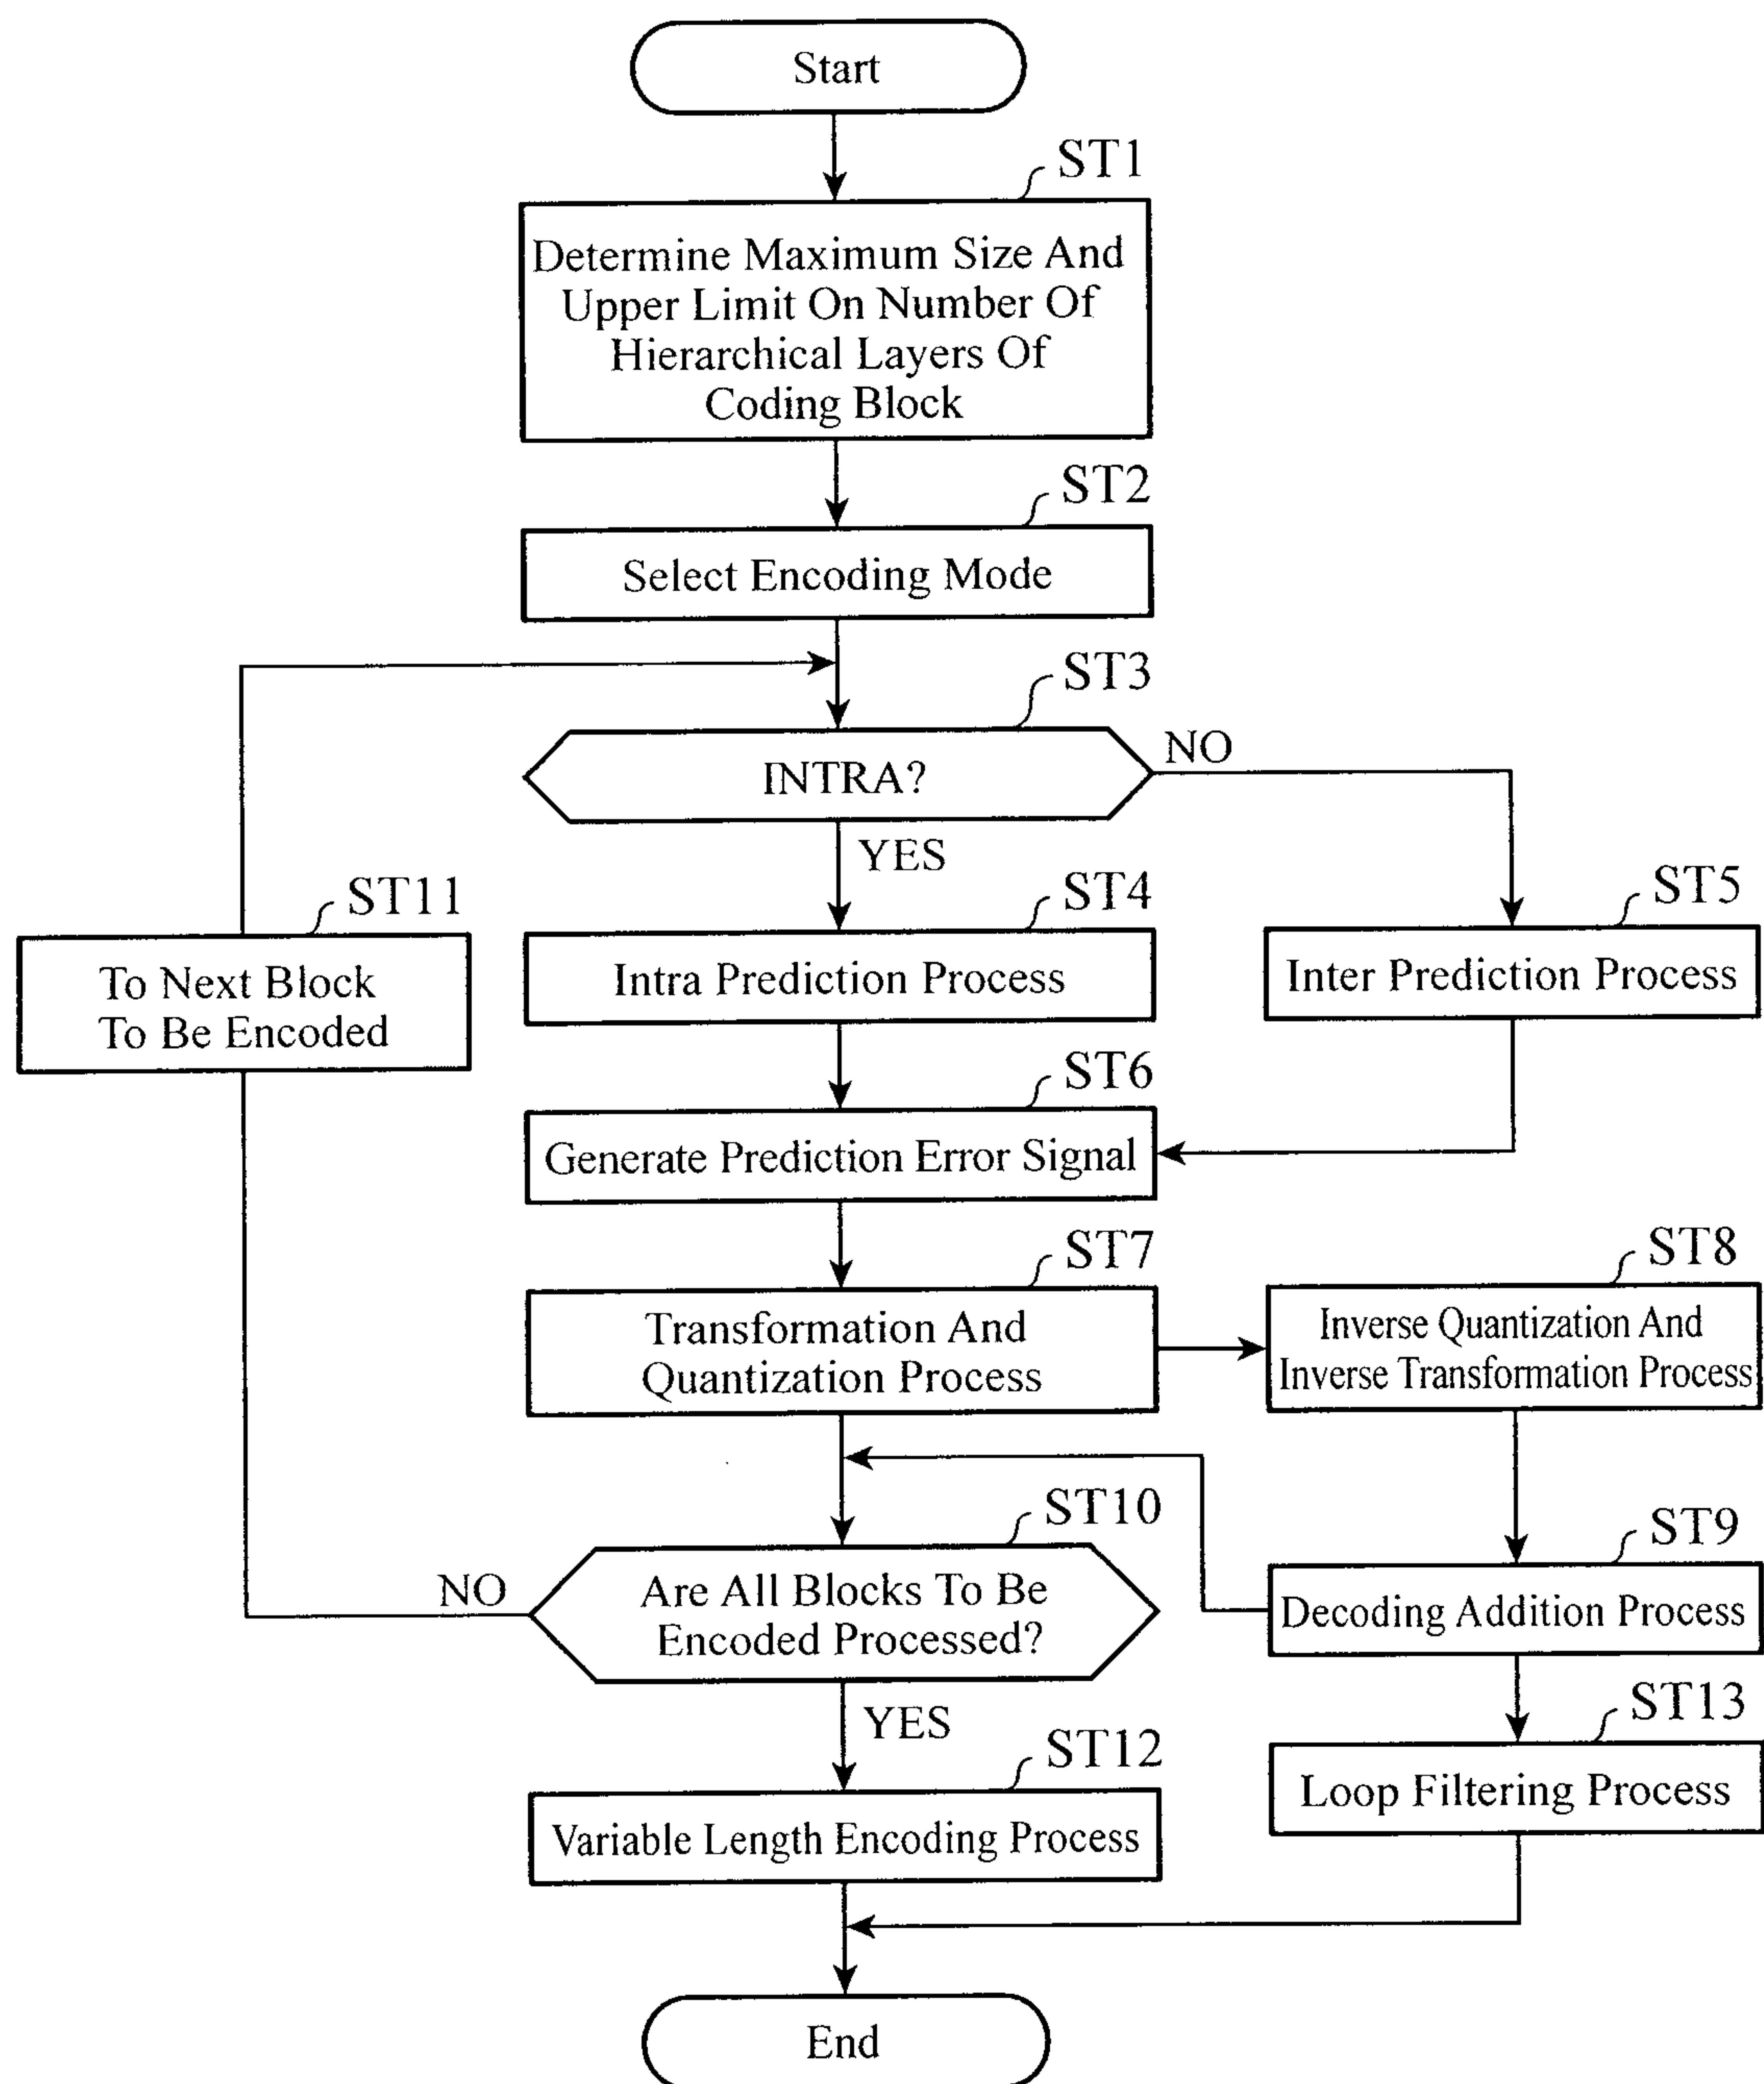


FIG.4

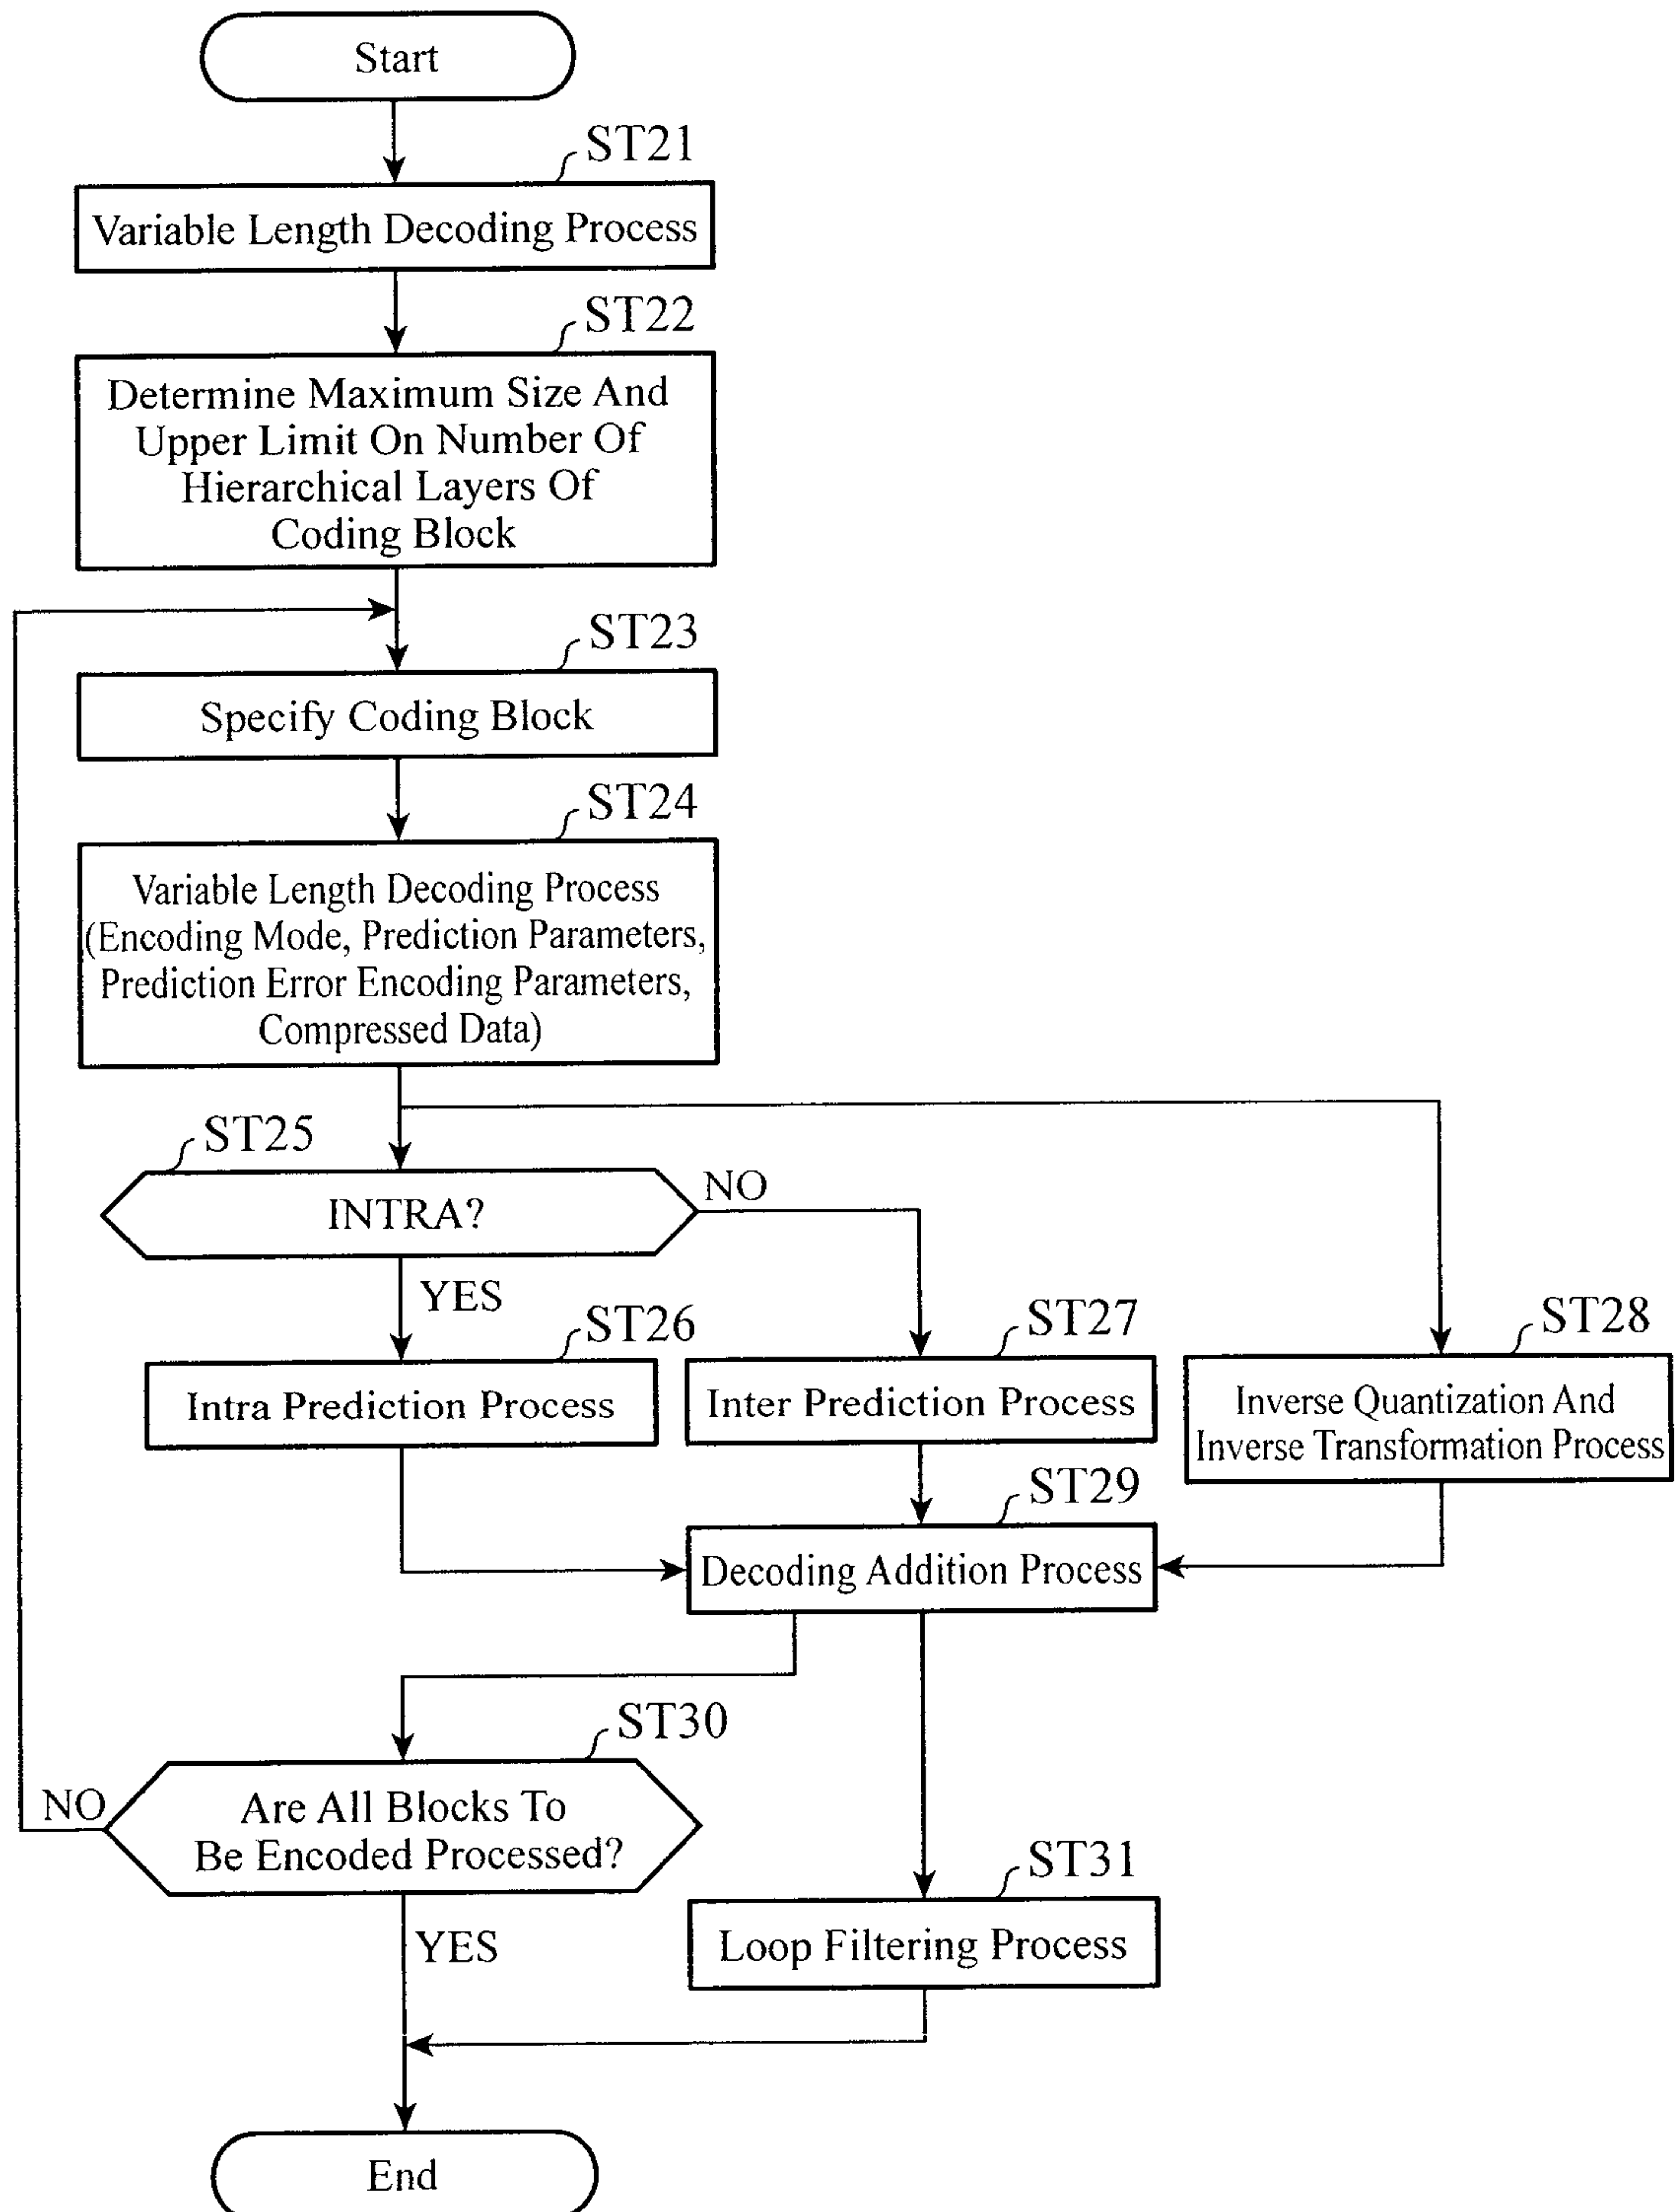


FIG.5

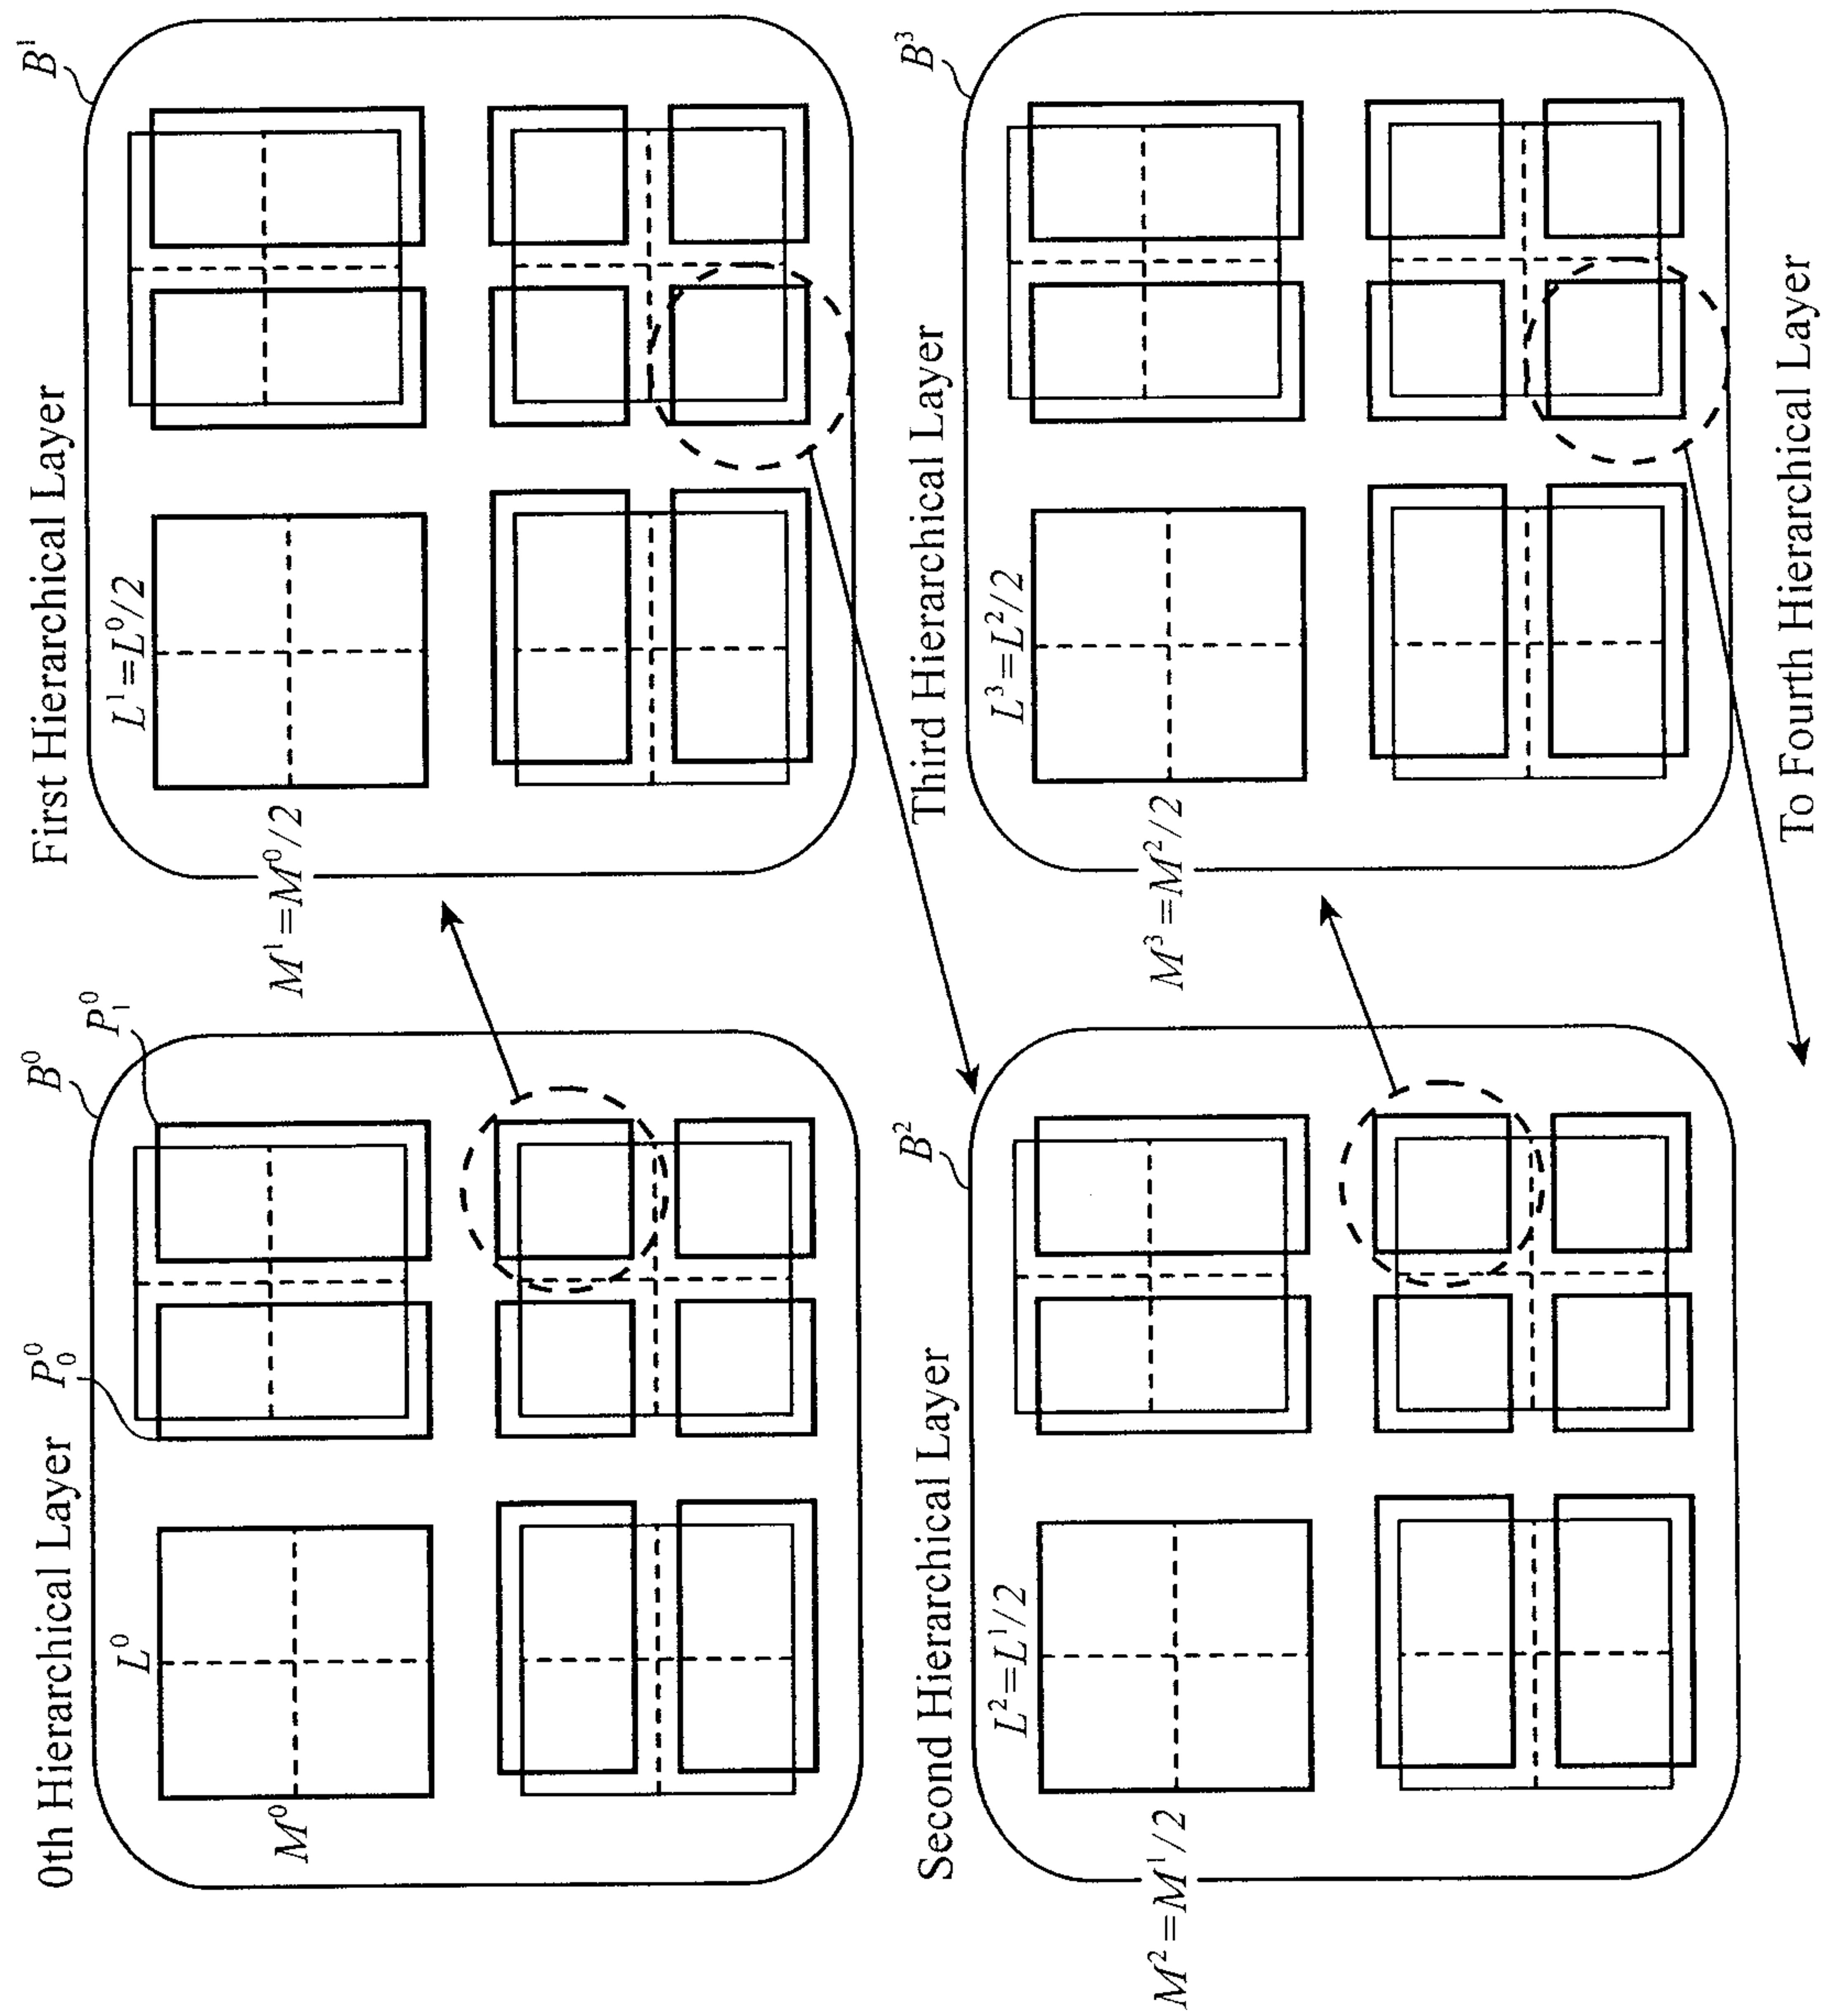


FIG.6


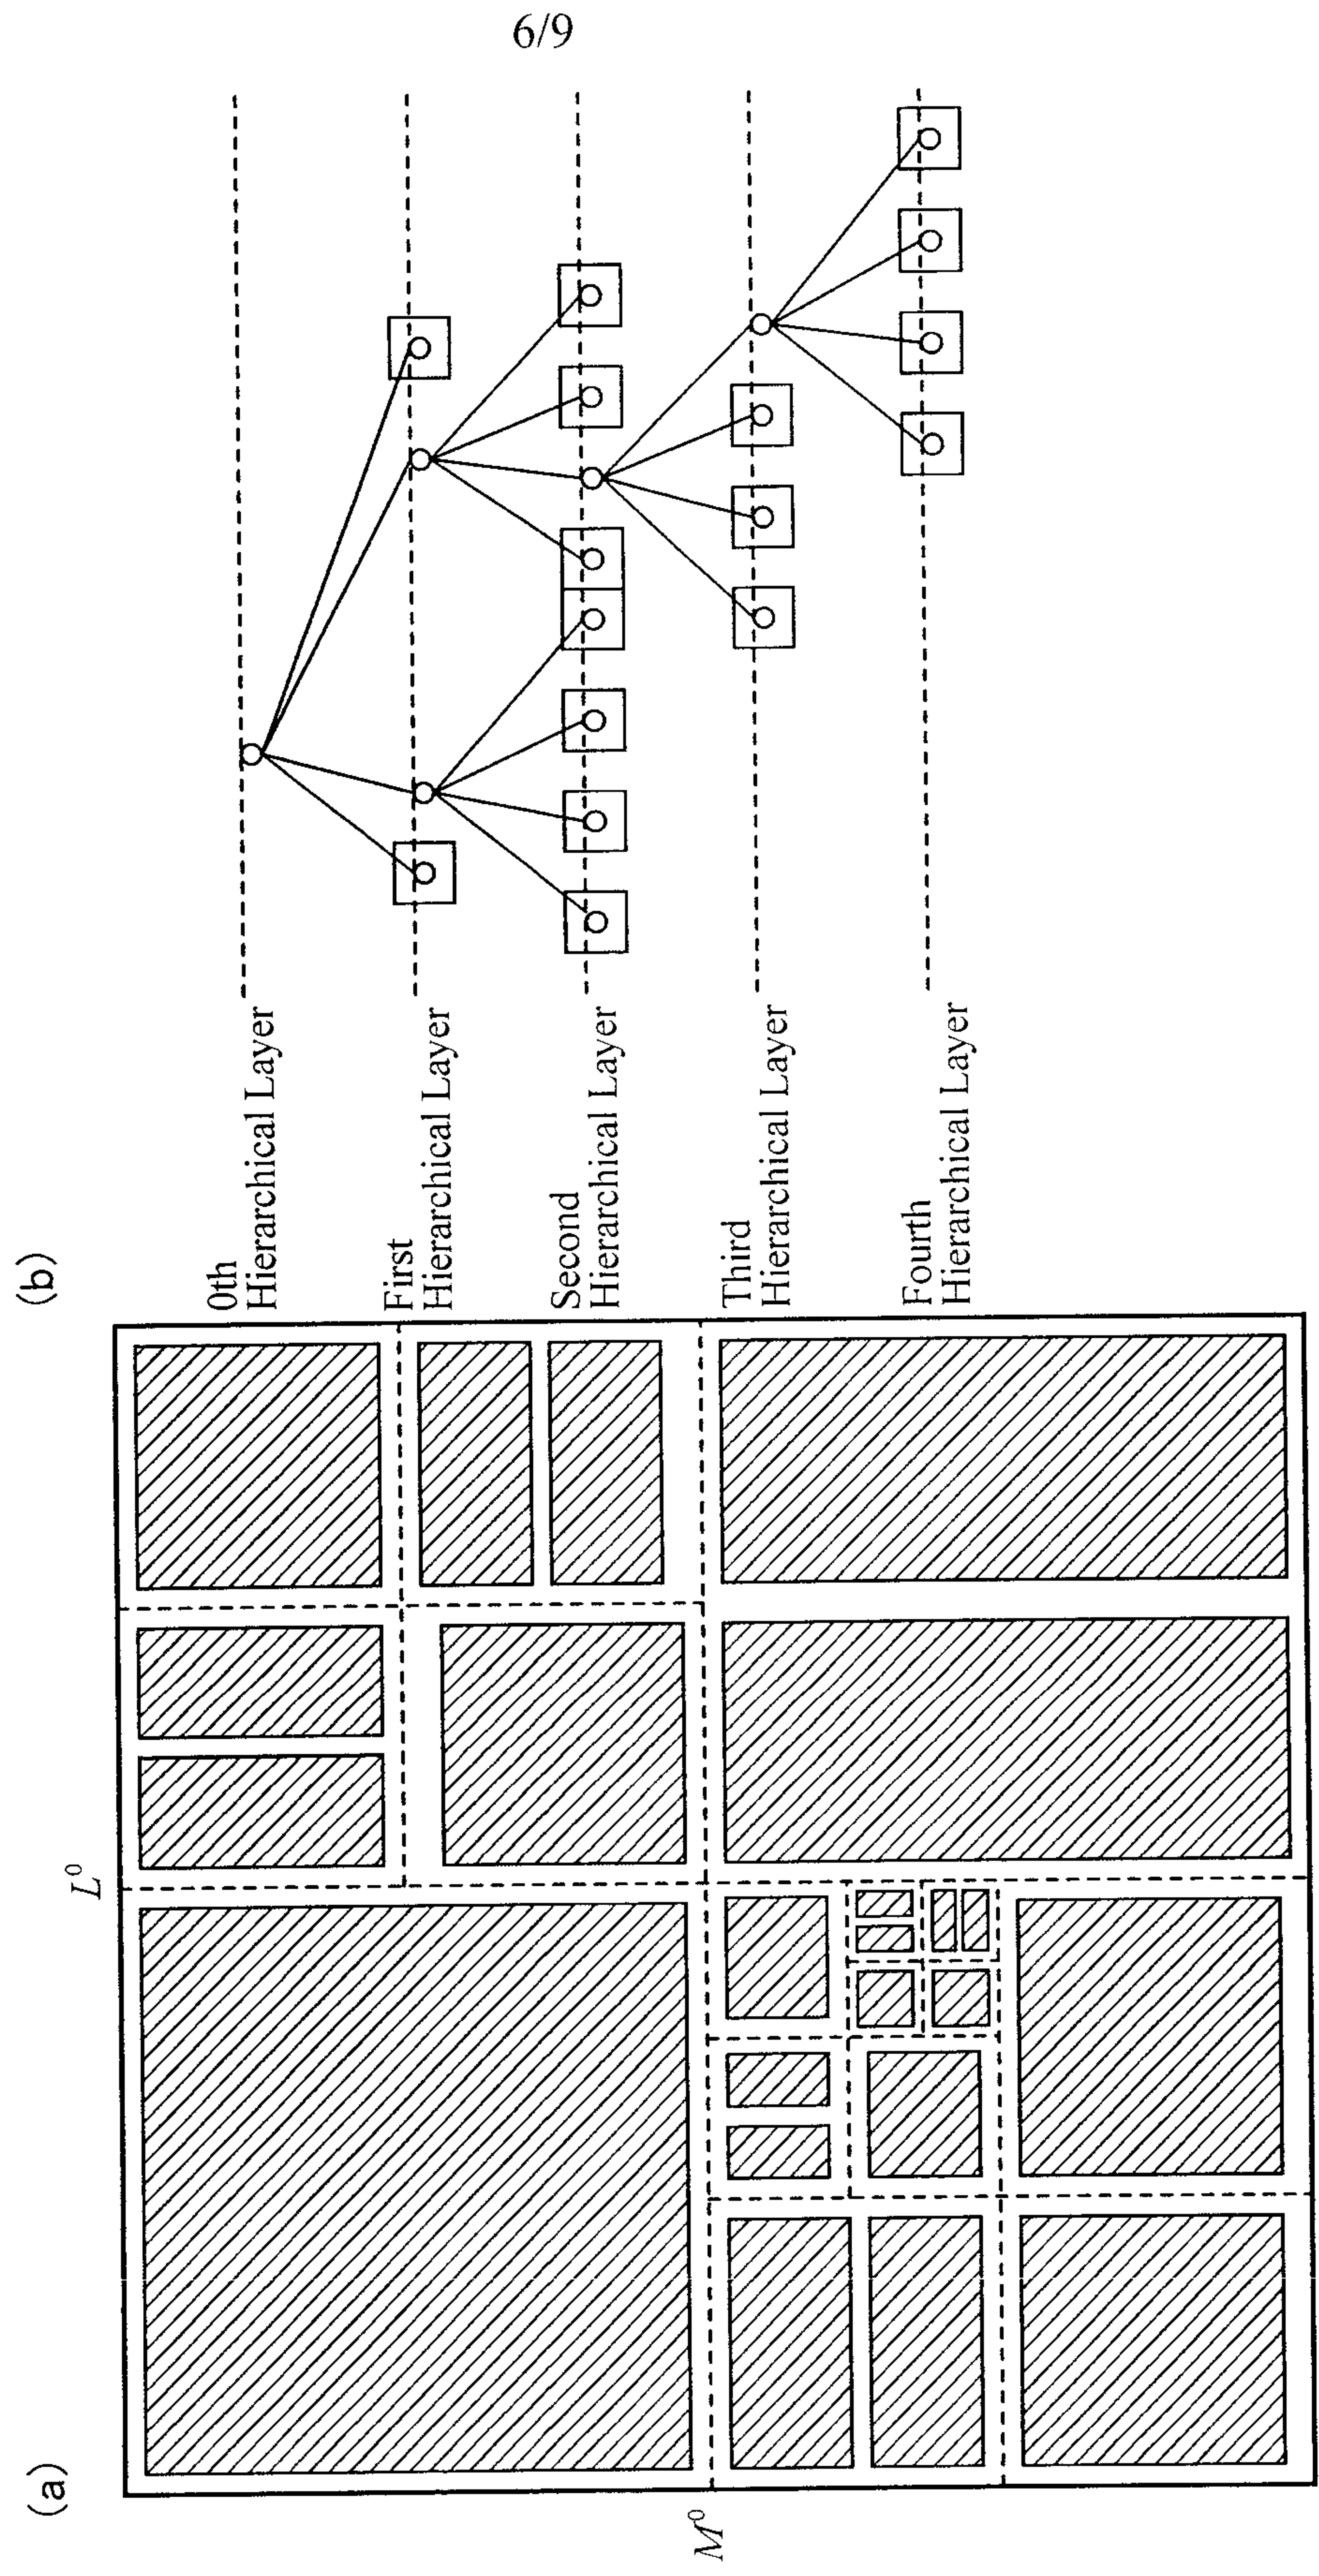


FIG.7


Intra Prediction Mode Index	Intra Prediction Mode
0	Vertical Prediction
1	Horizontal Prediction
2	Average Prediction
3~N-1	Diagonal Prediction

N: Number Of Intra Prediction Modes


Directional Predictions in Case of N=9
(8 Modes)

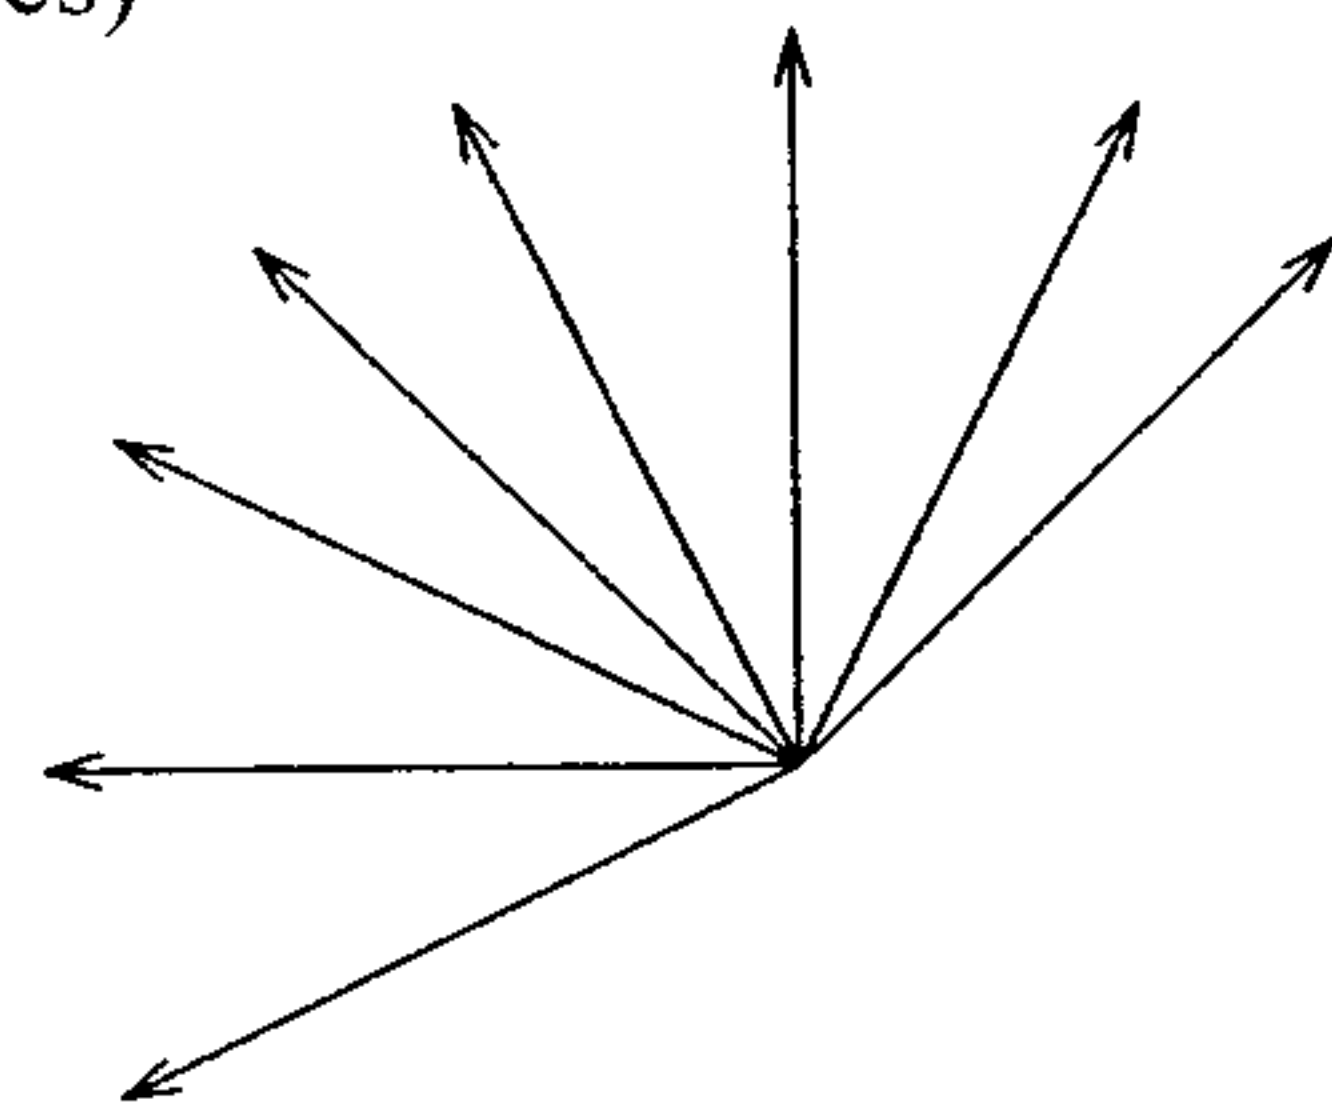

Directional Predictions in Case of N=17
(16 Modes)

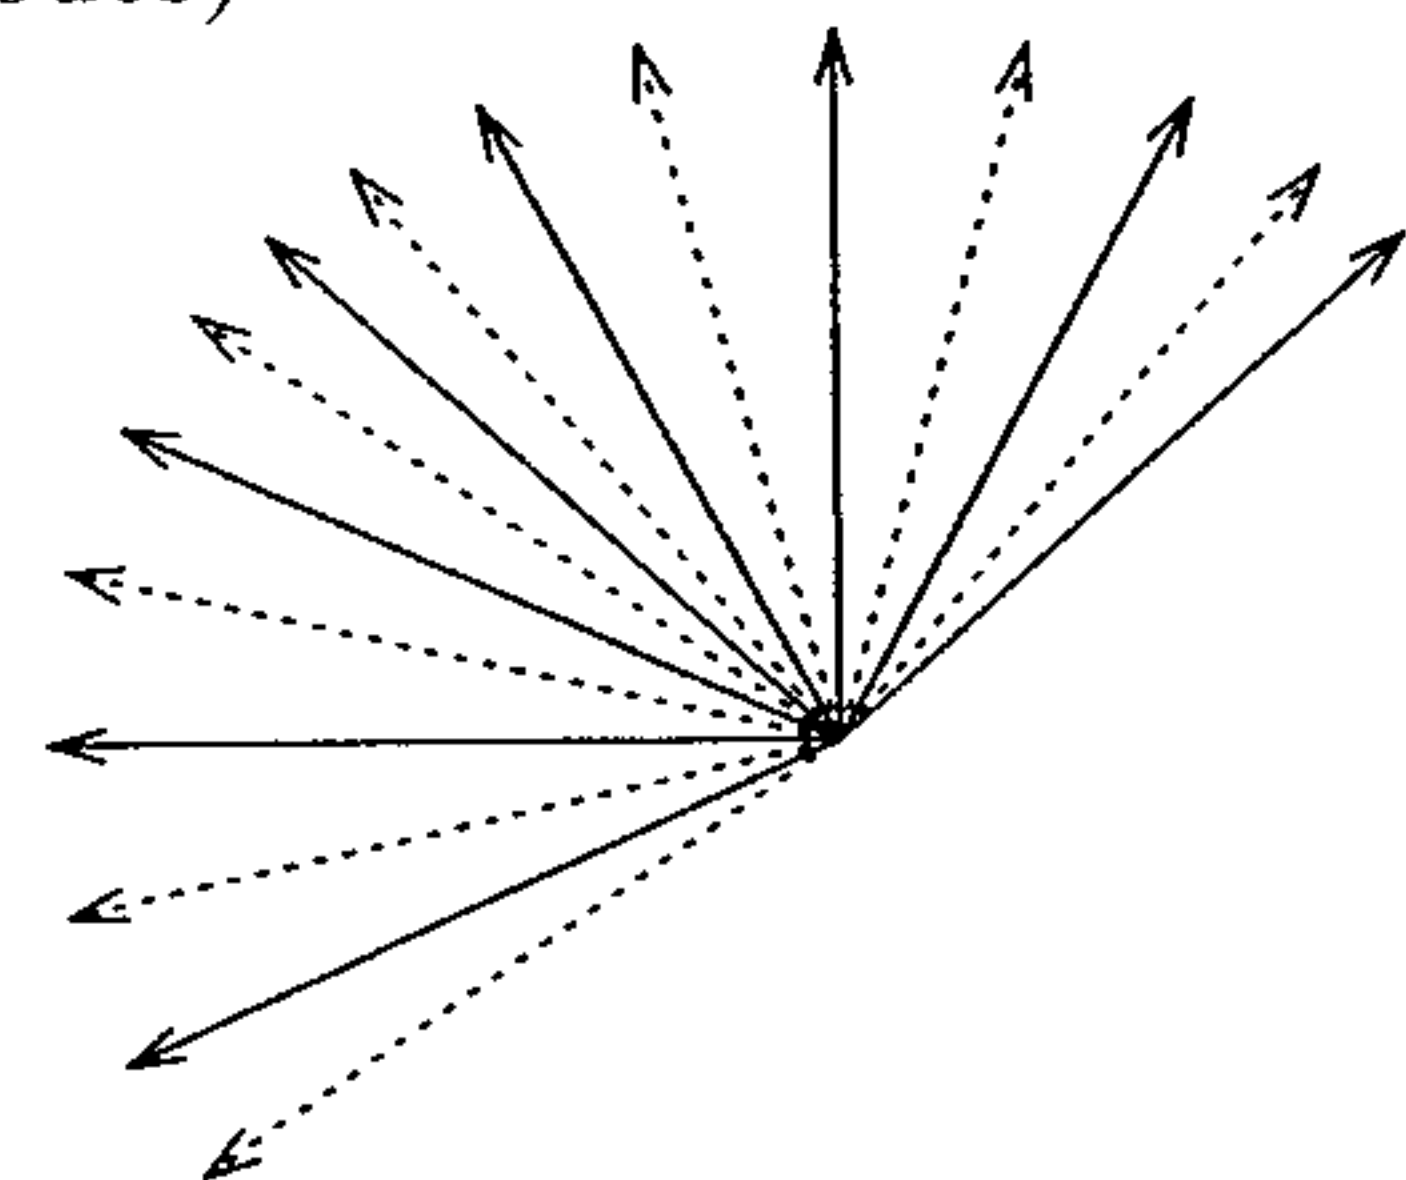

Directional Prediction in Case of N=33
(32 Modes)

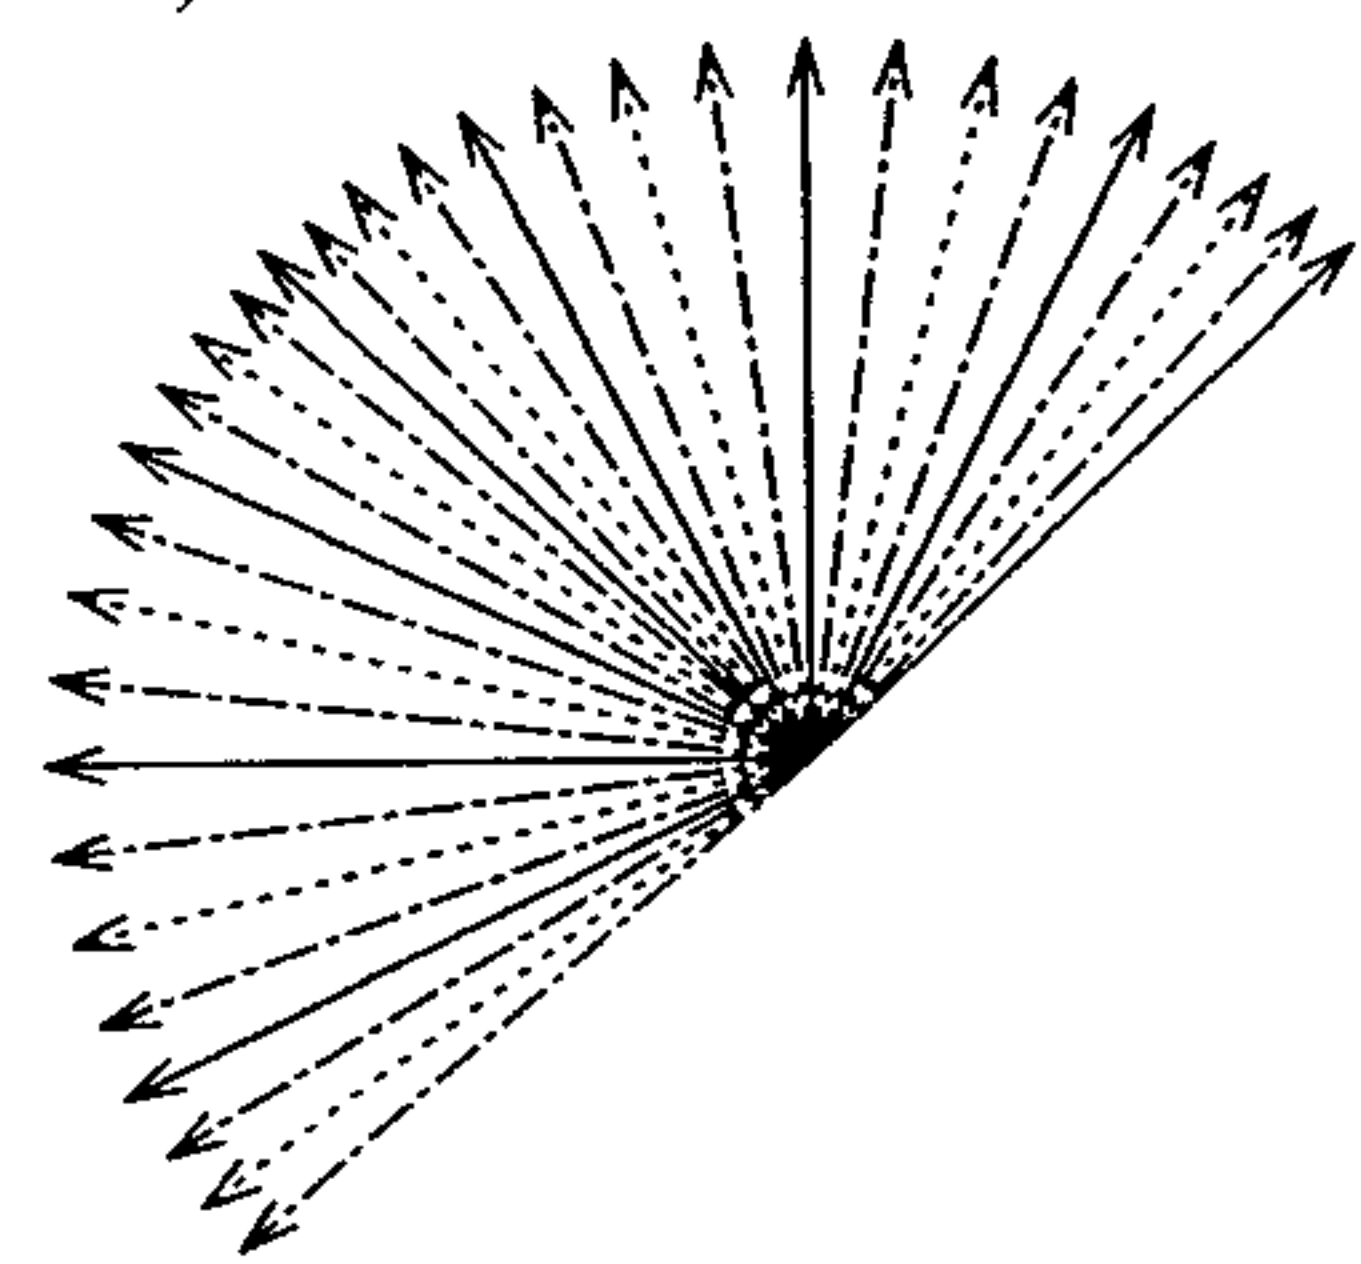

8/9

FIG.8

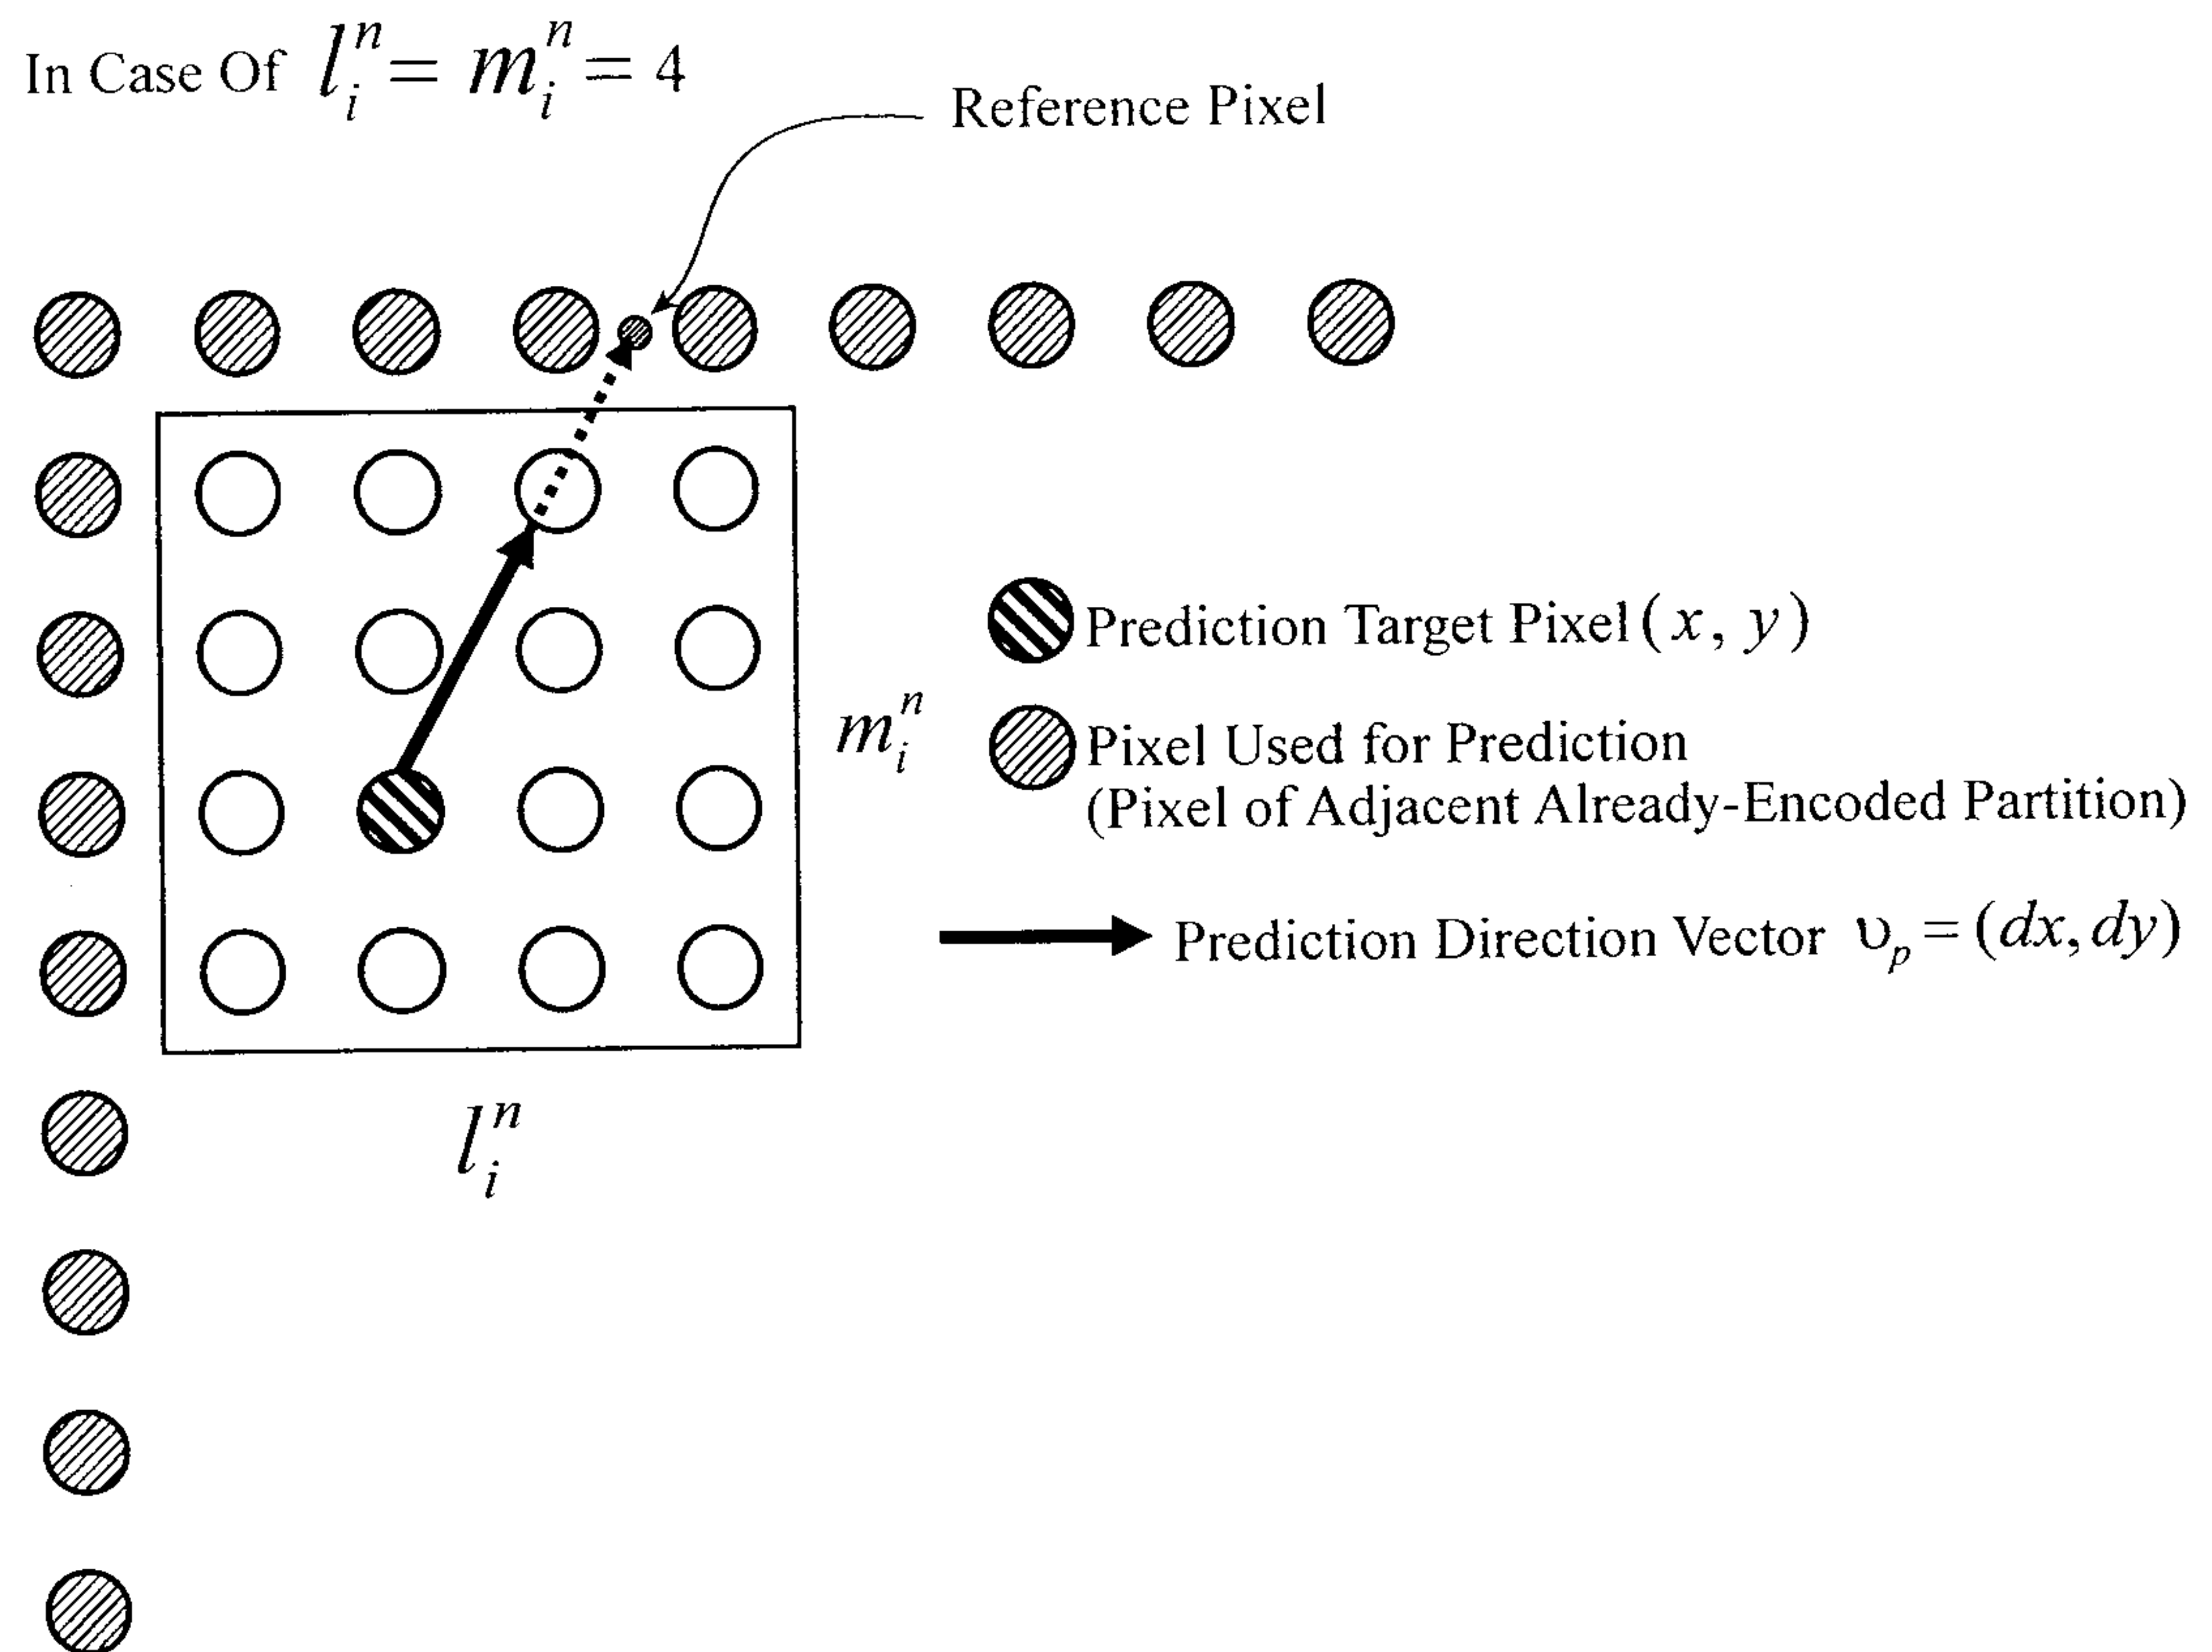


FIG.9


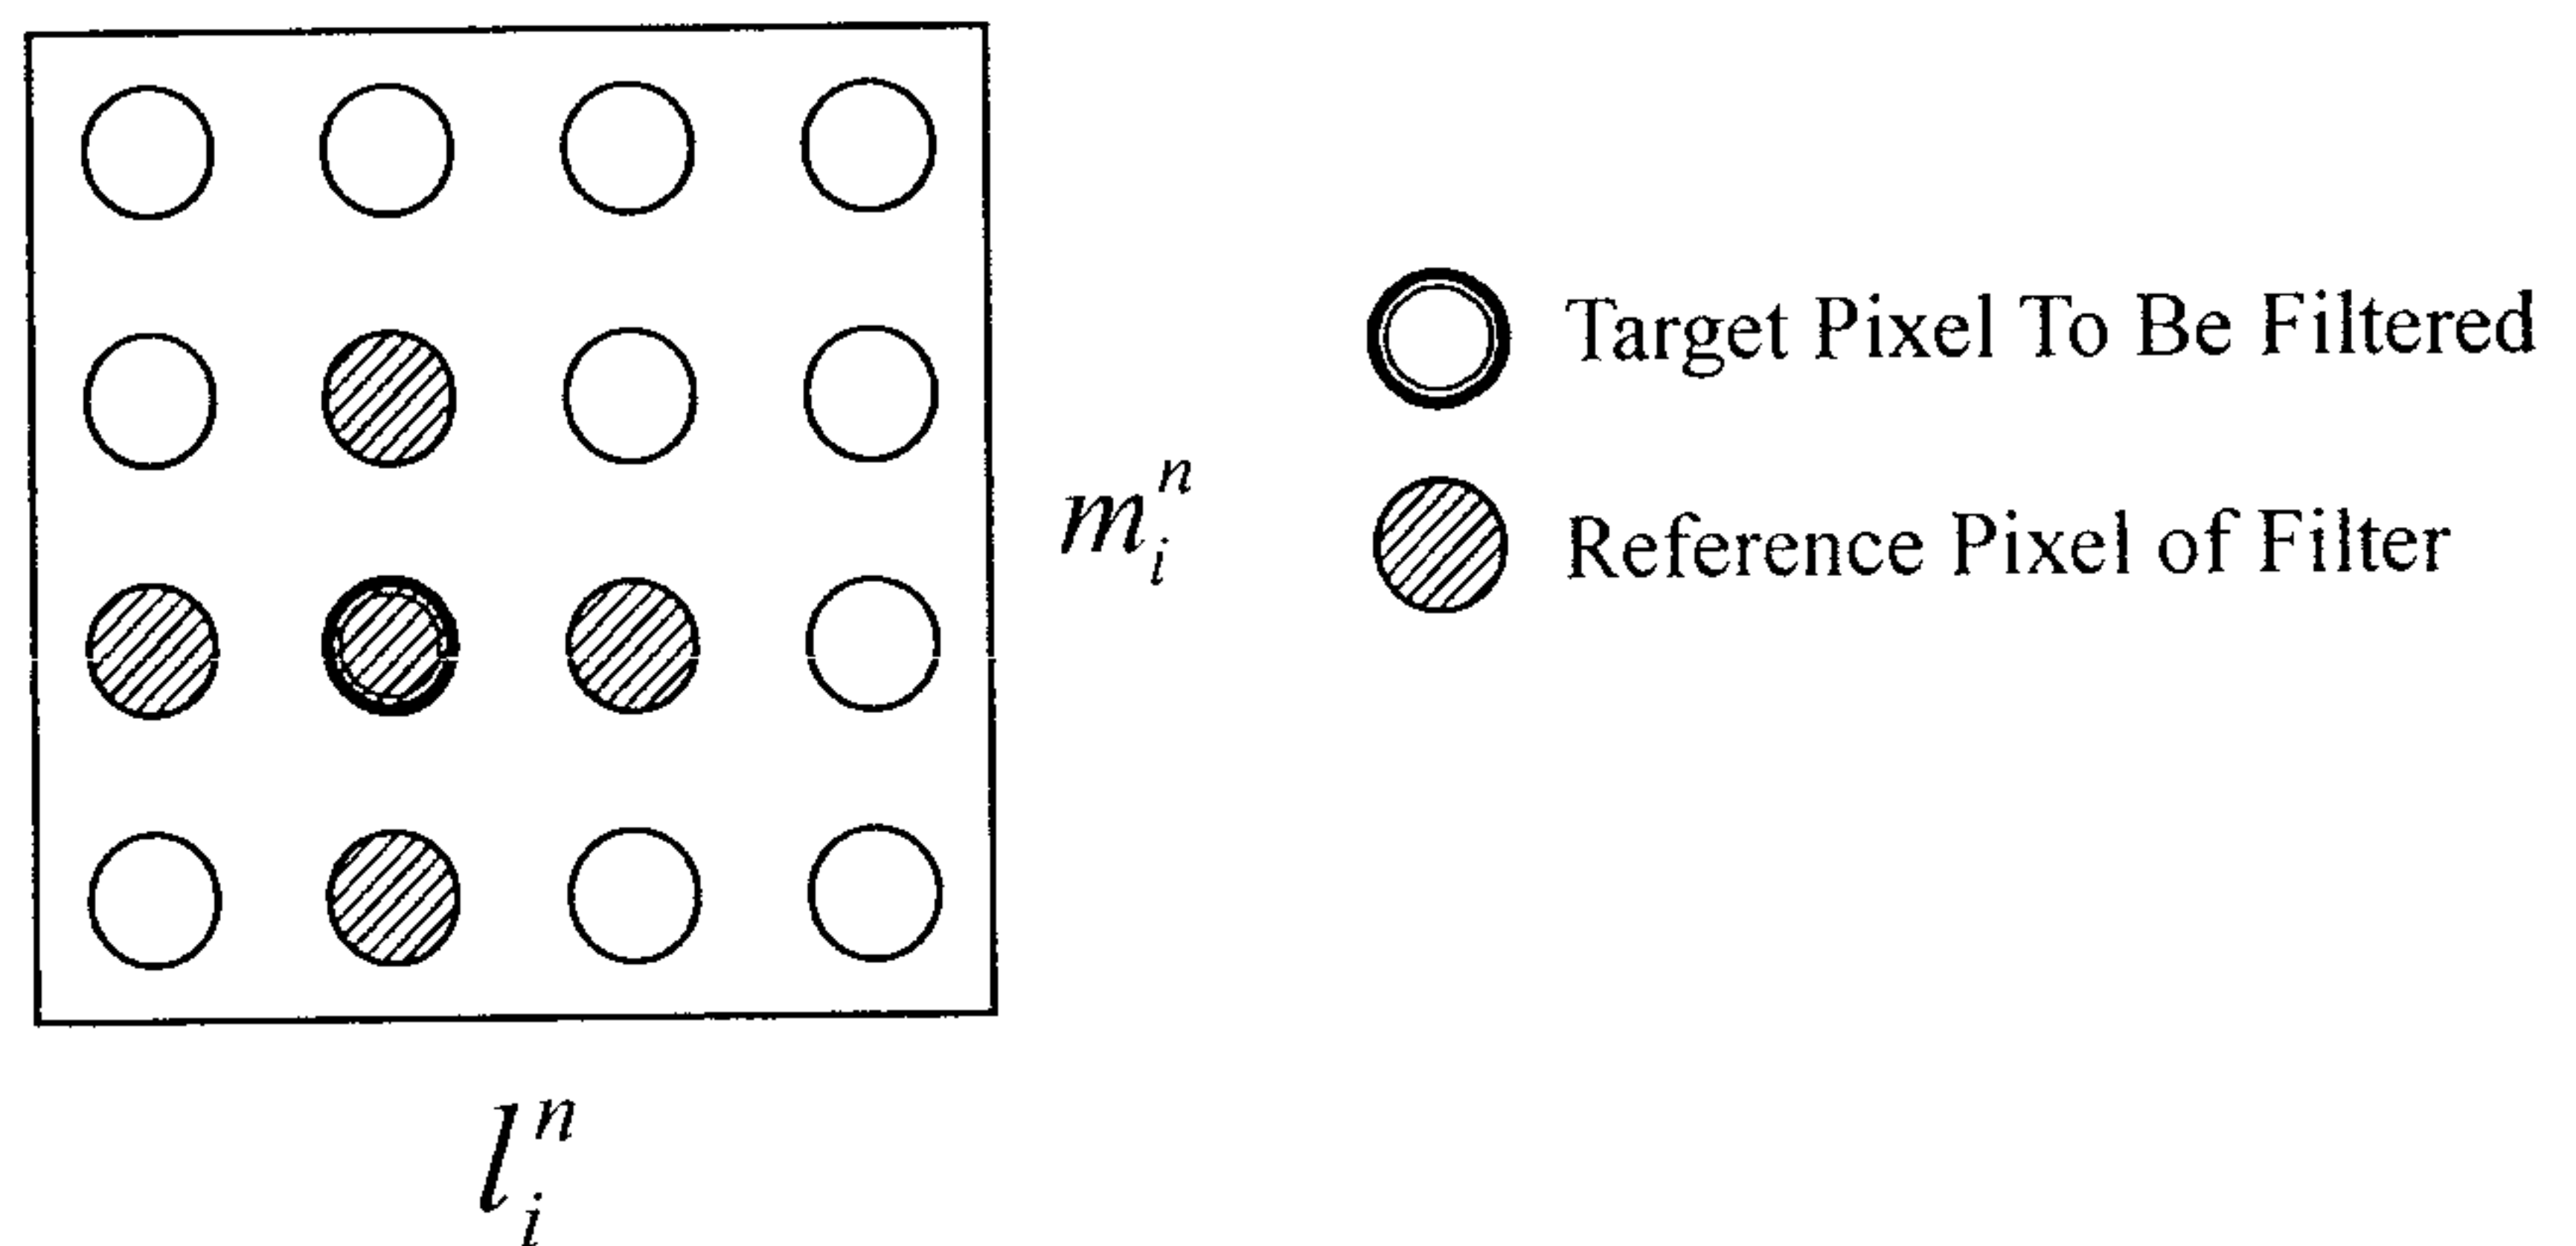
In Case Of $l_i^n = m_i^n = 4$ 

FIG.10

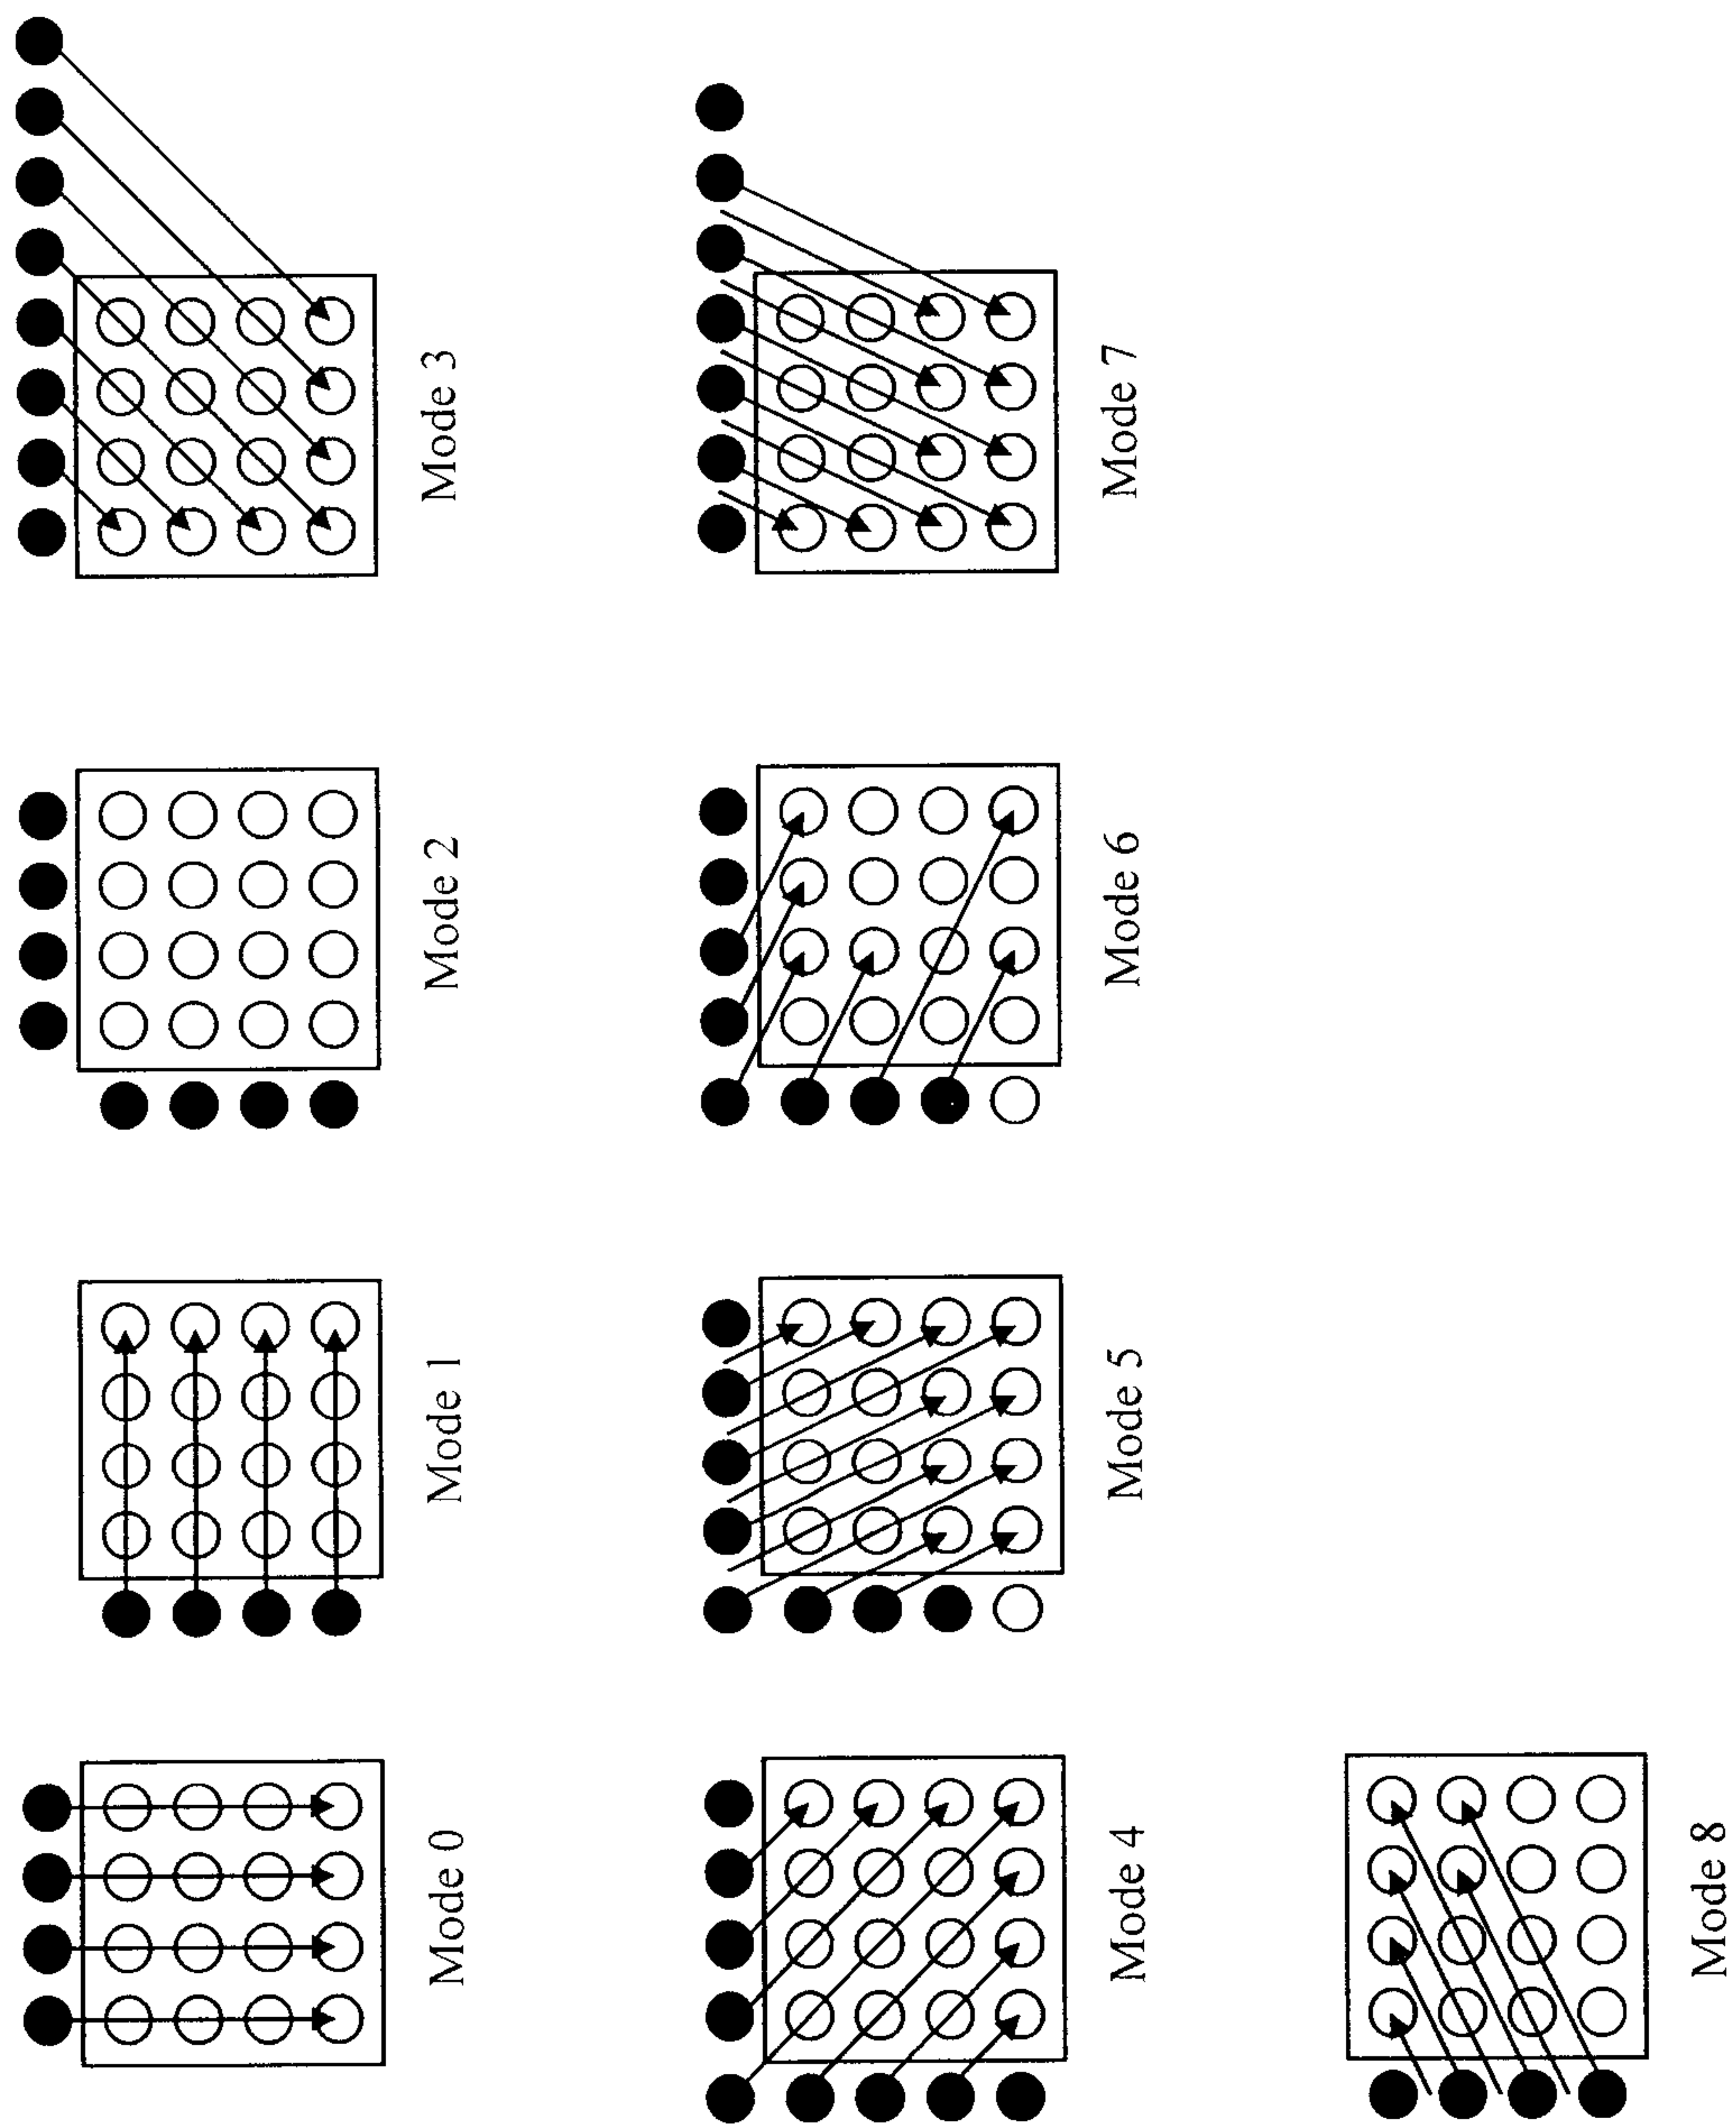

[図1]

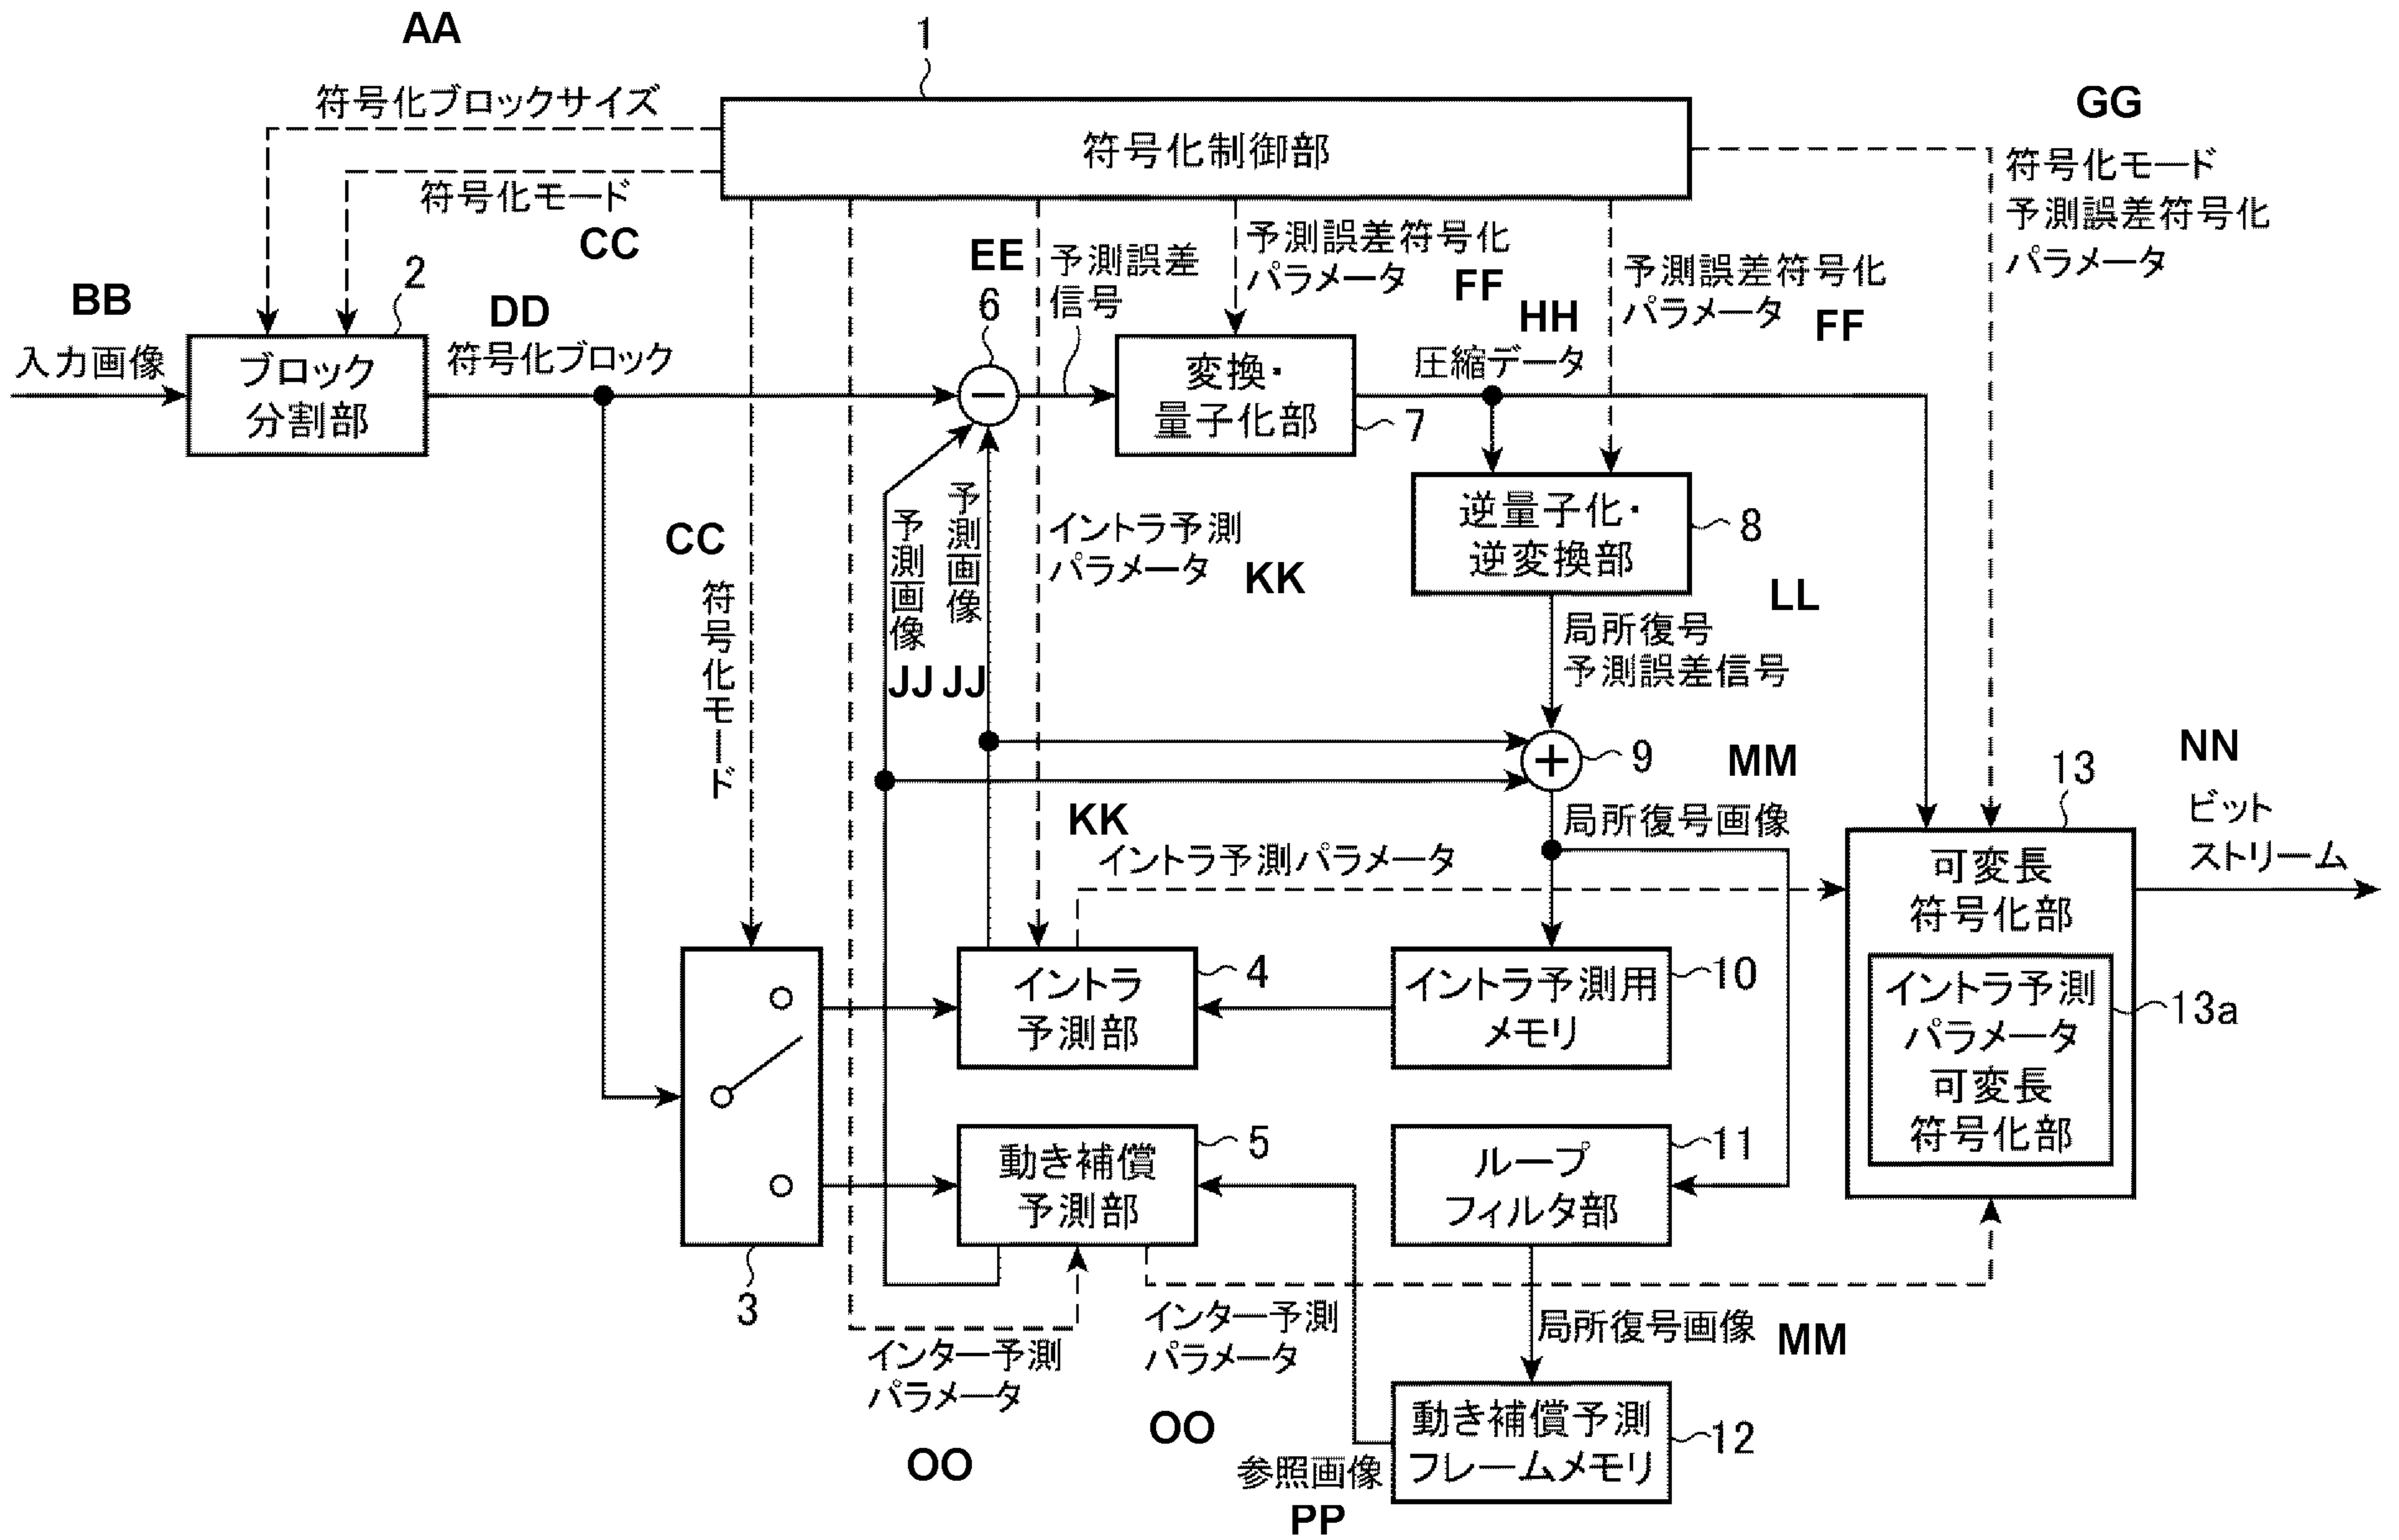


FIG. 1:

- | | |
|-----|--|
| 1 | ENCODING CONTROL UNIT |
| 2 | BLOCK DIVIDING UNIT |
| 4 | INTRA PREDICTION UNIT |
| 5 | MOTION COMPENSATION PREDICTION UNIT |
| 7 | TRANSFORMATION/QUANTIZATION UNIT |
| 8 | INVERSE-QUANTIZATION / INVERSE-TRANSFORMATION UNIT |
| 10 | INTRA PREDICTION MEMORY |
| 11 | LOOP FILTER UNIT |
| 12 | MOTION-COMPENSATION PREDICTION FRAME MEMORY |
| 13 | VARIABLE-LENGTH ENCODING UNIT |
| 13a | INTRA-PREDICTION PARAMETER VARIABLE-LENGTH ENCODING UNIT |
| AA | ENCODING BLOCK SIZE |
| BB | INPUT IMAGE |
| CC | ENCODING MODE |
| DD | ENCODING BLOCK |
| EE | PREDICTION ERROR SIGNAL |
| FF | PREDICTION ERROR ENCODING PARAMETER |
| GG | ENCODING-MODE PREDICTION-ERROR ENCODING PARAMETER |
| HH | COMPRESSED DATA |
| JJ | PREDICTION IMAGE |
| KK | INTRA-PREDICTION PARAMETER |
| LL | LOCAL DECODING PREDICTION-ERROR SIGNAL |
| MM | LOCAL DECODING IMAGE |
| NN | BIT STREAM |
| OO | INTER-PREDICTION PARAMETER |
| PP | REFERENCE IMAGE |