



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2307005 C 2008/06/17

(11)(21) **2 307 005**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 2000/04/27
(41) Mise à la disp. pub./Open to Public Insp.: 2000/10/30
(45) Date de délivrance/Issue Date: 2008/06/17
(30) Priorité/Priority: 1999/04/30 (US09/302,785)

(51) Cl.Int./Int.Cl. *C01B 3/56* (2006.01),
B01D 53/22 (2006.01), *B01D 53/32* (2006.01)

(72) Inventeurs/Inventors:
WACHSMAN, ERIC D., US;
JIANG, NAIXIONG, US

(73) Propriétaire/Owner:
HER MAJESTY IN RIGHT OF CANADA AS
REPRESENTED BY THE MINISTER OF NATURAL
RESOURCES CANADA, CA

(74) Agent: KIRBY EADES GALE BAKER

**SECTION 8 CORRECTION
SEE CERTIFICATE
CORRECTION ARTICLE 8
VOIR CERTIFICAT**

(54) Titre : PERMEATION D'HYDROGENE DANS DES MATERIAUX CONDUCTEURS MIXTES PROTONIQUES-
ELECTRONIQUES

(54) Title: HYDROGEN PERMEATION THROUGH MIXED PROTONIC-ELECTRONIC CONDUCTING MATERIALS

(57) Abrégé/Abstract:

An ionic conductor has been developed which exhibits both hydrogen ion conductivity and electronic conductivity. The conductor is a perovskite-type oxide represented by the general formula: ABO_3 where A consists of at least one element selected from the group consisting of Ba, Ca, Mg and Sr and B is $Ce_{1-x}M_x$ where M is a multivalent dopant metal, preferably Eu or Tb, and x is greater than 0 and less than 1. It is particularly useful in processes in which hydrogen is separated from a hydrogen-containing gas, e.g. in conversion of natural gas, operation of hydrogen fuel cells, etc.

Canada

<http://opic.gc.ca> • Ottawa-Hull K1A 0C9 • <http://cipo.gc.ca>

OPIC • CIPO 191

OPIC



CIPO



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

*Bureau canadien
des brevets
Certificat de correction*

*Canadian Patent
Office
Certificate of Correction*

Canadian Patent No. 2,307,005
Granted: June 17, 2008

Les corrections suivantes sont faites en
raison de l'article 8 de la *Loi sur les
brevets* et le document doit être lu tel
que corrigé.

The following corrections are made
pursuant to section 8 of the *Patent Act*
and the document should read as
corrected.

In the Patent Grant:

1. The name of the patentee has been corrected to read:

**HER MAJESTY IN RIGHT OF CANADA AS REPRESENTED
BY THE MINISTER OF NATURAL RESOURCES CANADA**


Agent certificateur / Certifying Officer

December 17, 2008

Date

Canada

(CIPO 25)
01/04/03

OPIC  CIPO

Abstract of the Disclosure

An ionic conductor has been developed which exhibits both hydrogen ion conductivity and electronic conductivity. The conductor is a perovskite-type oxide represented by the general formula: ABO_3 , where A consists of at least one element selected from the group consisting of Ba, Ca, Mg and Sr and B is $Ce_{1-x}M_x$, where M is a multivalent dopant metal, preferably Eu or Tb, and x is greater than 0 and less than 1. It is particularly useful in processes in which hydrogen is separated from a hydrogen-containing gas, e.g. in conversion of natural gas, operation of hydrogen fuel cells, etc.

Hydrogen Permeation Through Mixed Protonic-Electronic Conducting Materials

Background of the Invention

1. Field of the Invention

5 This invention relates to mixed protonic-electronic
conducting material useful as H₂ permeation membrane material
or electrode material.

2. Prior Art

10 Compressed natural gas (CNG) is an economically
competitive, widely distributed energy and chemical resource.
The natural gas is converted to hydrogen more easily and
efficiently than are liquid hydrocarbons and is less expensive
per mole H₂ produced than any other fuel. Systems for the
15 production of hydrogen from natural gas could be enhanced
through the use of thermally efficient, compact, catalytic
membrane reactors.

Advances in membrane reactor technology allow economic
production of high purity hydrogen from natural gas by
coupling steam reforming and hydrogen transport in one step.
20 Removal of product hydrogen continuously through the membrane
shifts the equilibrium toward increased hydrogen production.
Although palladium metal alloy membranes have been available
for several decades, they are expensive and require large
areas for adequate fluxes in commercial applications.


25 Recently, a series of perovskite-type oxides (e.g.
BaCe_{1-x}M_xO₃, where M is a metal dopant) have been shown to have
a high proton conductivity at elevated temperature. These
mixed ionic conductors are receiving considerable attention
because of their numerous applications as electrolytes in fuel
30 cells, hydrogen pumps, electrolyzers, and gas sensors, and are
described for instance in Taniguchi et al. U.S. Patent
5,387,330.

With the above perovskite-type oxides protonic
conductivities have been measured on the order of 10⁻² Ω⁻¹ cm⁻¹
35 at 600°C. This ionic conductivity is comparable to that

observed for oxygen-ion conduction in $\text{La}_{1-y}\text{Sr}_y\text{Co}_{1-x}\text{M}_x\text{O}_3$ perovskite-type oxides. $\text{La}_{1-y}\text{Sr}_y\text{Co}_{1-x}\text{M}_x\text{O}_3$ oxides are mixed conductors in that they conduct both oxygen ions and electrons, and they have received considerable attention for application as oxygen permeation membranes. Because of their significant electronic conductivity, they have an internal electrical short and O_2 will selectively permeate through the material under a differential oxygen partial pressure (P_{O_2}). The potential permeation flux rates of these materials are extremely high. For example, calculations based on the results of Teraoka et al. "Influence of Constituent Metal Cations in Substituted LaCoO_3 on Mixed Conductivity and Oxygen Permeability," *Solid State Ionics*, **48** (1991) 207-212, show O_2 flux rates through a 50- μm -thick membrane of $\text{La}_{0.6}\text{Sr}_{0.4}\text{Co}_{0.8}\text{Cu}_{0.2}\text{O}_3$ at 600°C to be 22400 L (STP) $\text{h}^{-1} \cdot \text{m}^{-2}$ of membrane surface area under a 0.21 atm P_{O_2} gradient.

$\text{BaCe}_{1-x}\text{M}_x\text{O}_3$ -type protonic conductors have sufficient ionic conductivity to obtain comparable flux rates. However, they have insufficient electronic conductivity. The electronic conductivity is necessary to balance the transport of charge through the material. If comparable electronic conduction could be obtained with the $\text{BaCe}_{1-x}\text{M}_x\text{O}_3$ -type protonic conductors, they could be excellent H_2 permeation membrane materials, equivalent to palladium alloy films.

A second potential application of solid-state high temperature protonic electrolytes is the production of higher hydrocarbons such as C_6H_6 and C_7H_8 from CH_4 :



The decomposition and conversion of methane into benzene (C_6H_6 and C_7H_8) is thermodynamically favoured at moderate temperatures (500°C) and moderate pressures (1 to 10 atm) when hydrogen is continuously removed to low levels (< 0.05 atm). A suitable dehydrogenation catalyst with low coking tendency (Pt or Pd), combined with a small pore zeolite for hydrodecyclization of C_2 intermediates (such as C_2H_4), could give high yields of aromatics. Electrochemical pumping, by application of a voltage across an H^+ electrolyte is essential

to increase the rate of H₂ removal, since little driving force for H diffusion exists with low H₂ partial pressures on both sides of the membrane.

Electrocatalytic conversion of methane to higher hydrocarbons and to syn gas has been reported in the literature. They are described in D.Eng and M. Stoukides, "The Catalytic and Electrocatalytic Coupling of Methane Over Yttria-Stabilized Zirconia," *Catalysis Letters*, 9 (1991) 47-54 and U.Balachandran et al., "Fabrication of Ceramic-Membrane Tubes for Direct Conversion of Natural Gas," Paper presented at the 1992 International Gas Research Conference. Both of these approaches used solid, oxygen-ion conducting ceramics. Under these conditions, both approaches are partial oxidation routes. At high conversions, partial oxidation runs the risk of producing undesirable, deep oxidation products (CO₂ and H₂O), thus limiting H₂ yield. A preferable route is to electrocatalytically abstract an H from CH₄ by using a protonic conductor. The resulting CH₃ fragments then form higher hydrocarbons in the reacting gas stream, and pure H₂ is produced on the other side of the membrane.

For both of these applications, mixed protonic-electronic conducting materials are required. For electrocatalytic conversion the mixed conducting material is necessary for the electrodes, and for H₂ permeation membranes it is the membrane material itself.

Galuszka et al. U.S. Patent 5,637,259 describes a process for producing syngas and hydrogen from natural gas using a membrane reactor. This used a hydrogen permeable membrane wall in the form of a porous alumina tube having a palladium film superimposed on the inner wall thereof.

A process for steam reforming of a hydrocarbon to produce H₂, Co and CO₂ is described in Minet et al. U.S. Patent 4,981,676. That process also utilizes a hydrogen permeable membrane wall for separating hydrogen from the reaction zone.

It is an object of the present invention to provide a process for separating hydrogen from a hydrogen-containing gas

by means of a membrane formed of a material that is both hydrogen ion conductive and electronic conductive.

Summary of the Invention

The present invention in its broadest aspect relates to mixed protonic-electronic conducting materials that have been synthesized from $\text{BaCe}_{1-x}\text{M}_x\text{O}_3$ -type protonic conductors. Thus, it was found that by judicious substitution of multivalent transition metal and lanthanide cations (M), electronic conduction in $\text{BaCe}_{1-x}\text{M}_x\text{O}_3$ could become appreciable and the resultant H_2 be comparable to the O_2 flux of $\text{La}_{1-y}\text{Sr}_y\text{Co}_{1-x}\text{M}_x\text{O}_3$.

In particular, it was found that excellent results were obtained with perovskite-type oxides of the formula $\text{BaCe}_{1-x}\text{M}_x\text{O}_3$ where M is a multivalent dopant metal. Particularly preferred multivalent metals for this purpose are $\text{Eu}^{3+/2+}$ and $\text{Tb}^{3+/2+}$.

Other multivalent metals that may be used include Lanthanides such as $\text{Pr}^{4+/+3}$, $\text{Sm}^{3+/+2}$, $\text{Tm}^{3+/+2}$, $\text{Yb}^{3+/+2}$, and Transition metals such as $\text{Ti}^{4+/+3}$, $\text{V}^{4+/+3}$, $\text{Cr}^{3+/+2}$, $\text{Mn}^{4+/+3/+2}$, $\text{Fe}^{3+/+2}$, $\text{Co}^{3+/+2}$, $\text{Ni}^{3+/+2}$, $\text{Mo}^{4+/+3}$, $\text{W}^{4+/+3/+2}$. The Gd doped compound has been known to have the highest ionic conductivity in this class of materials and Eu and Tb were found to have the appropriate ionic radii to substitute for Gd. This is important in being able to synthesize a single-phase compound and because the ionic conductivity is dependent on the cation radius with a maximum near that of Gd.


Thus, the mixed protonic-electronic conducting material of the present invention comprises a perovskite-type oxide represented by the general formula:



where A consists of at least one element selected from the group consisting of Ba, Ca, Mg and Sr and B is $\text{Ce}_{1-x}\text{M}_x$ where M is a multivalent dopant metal, preferably, Eu or Tb, and x is greater than 0 and less than 1. Preferred compounds are those where x is between 0.05 and 0.40.

The invention also preferably relates to a process for hydrogen separation from a hydrogen-containing gas comprising contacting a first side of a gas impermeable mixed hydrogen

ion and electronic conducting membrane with said hydrogen containing gas at an elevated pressure concurrently with contacting a second opposite side of said membrane with gas at a lower pressure than said hydrogen containing gas and withdrawing hydrogen ions from said second opposite side of said membrane, said mixed hydrogen ion and electronic conducting membrane comprising a perovskite-type oxide represented by the general formula:



where x is between 0.05 and 0.40.

The hydrogen separation process may comprise a variety of processes, such as reforming light hydrocarbons to produce synthesis gas (CO and H₂), separating H₂ from synthesis gas, converting natural gas (CH₄) to H₂ and higher hydrocarbons, such as benzene, operation of a hydrogen fuel cell, etc.

Brief Description of the Drawings

These and other objects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, in which:

Fig. 1 is a schematic illustration of the hydrogen permeation according to the invention;

Fig. 2 is a graph showing the differences in conductivity between H₂ and O₂ environments, for BaCe_{0.85}Gd_{0.15}O₃;

Fig. 3 is a graph showing the differences in conductivity between H₂ and O₂ environments, for BaCe_{0.85}Eu_{0.15}O₃;

Fig. 4 is a graph showing the differences in conductivity between H₂ and O₂ environments for BaCe_{0.85}Tb_{0.15}O₃;

Fig. 5 is a graph showing comparative conductivities for different materials in an H₂ environment; and

Fig. 6 is a graph showing H₂ permeation through a membrane of the invention as a function of temperature for BaCe_{0.85}Eu_{0.15}O₃ and BaCe_{0.85}Gd_{0.15}O₃.

Description of the Preferred Embodiments

Figure 1 shows conceptually how H₂ permeation takes place according to the invention. This shows a membrane reactor 10 in which the wall 11 is formed of the material of this invention. The wall 11 may be either a H₂ permeation membrane 12 or an electrode 13.

Natural gas or synthesis gas is fed through the reactor 10. The natural gas is converted to H₂ and C₂, with in situ H₂ separation by way of the electrode 13 or H₂ is separated from the syn gas by means of the H₂ permeation membrane 12.

Example 1

A series of single-phase compounds were successfully synthesized using Gd, Eu and Tb as dopants. The conductivities of BaCe_{0.85}Gd_{0.15}O₃, BaCe_{0.85}Eu_{0.15}O₃, and BaCe_{0.85}Tb_{0.15}O₃ were measured using AC impedance spectroscopy, from 175°C to 725°C in a H₂/N₂ atmosphere (forming gas) and air. For BaCe_{0.85}Gd_{0.15}O₃ (Figure 2) the conductivities were consistent with previously known results, and since electronic conductivity is negligible there was no apparent difference in conductivity between the H₂ and O₂ environments. In contrast, the difference in conductivity between H₂ and O₂ environments is apparent for BaCe_{0.85}Eu_{0.15}O₃ (Figure 3) and dramatic for BaCe_{0.85}Tb_{0.15}O₃ (Figure 4). This difference in conductivity between oxidizing and reducing environments is indicative of the electronic character desired according to the invention. While the Tb substituted material exhibits the greatest effect of gaseous environment on conductivity, it also has the lowest overall conductivity.

A comparison of the conductivities of BaCe_{0.85}Gd_{0.15}O₃ and BaCe_{0.85}Eu_{0.15}O₃ in an H₂ environment is shown in Figure 5. The Eu doped compound exhibits greater conductivity than the Gd compound. At the lower temperatures, the conductivity of BaCe_{0.85}Eu_{0.15}O₃ is greater than that of BaCe_{0.85}Gd_{0.15}O₃ by almost a factor of 2. Therefore, this new compound has the highest conductivity of any protonic conductor in this class of materials.

Example 2

A series of permeation tests were conducted to determine the hydrogen permeability of the products of the invention. The base materials for the permeation samples were synthesized from BaCO₃ and Eu₂O₃ or Gd₂O₃ (Alfa Aesar) and CeO₂ (Nippon Yttrium). Powders were made from these samples containing 15 mol% Eu and 15 mol% Gd (BaCe_{0.85}Eu_{0.15}O₃ and BaCe_{0.85}Gd_{0.15}O₃). The powder was ball milled with zirconia media in acetone for 10 hours and then the dried powder was calcined at 1350°C for 10 hours. X-ray diffraction showed these powders to be single-phase. The samples were pressed in a 2.86 cm die and sintered at 1550°C for 10 hours, then carefully polished to a thickness of about 2 mm with 240, 320, and 600 grit SiC paper. The density of the samples was determined to be 5.7 g/cc corresponding to 89% of theoretical density.

The 2 mm thick BaCe_{0.85}Eu_{0.15}O₃ and BaCe_{0.85}Gd_{0.15}O₃ ceramic discs were tested for hydrogen permeation. The discs were sealed between two glass O-rings. The average inner and outer diameters of the O-rings were 2.38 and 2.54 cm respectively, leaving an effective permeation area ~2.2 cm². The furnace was initially ramped to 950°C, held for 10 hours and then cooled to 700°C at 3°C/min with a He flow on the sweep side so that the status of the glass seals could be measured as a function of time. In this configuration, an H₂-N₂ (4%-96%) mixture was fed through the fuel side tubing at 30 cm³/min while on the sweep side He was flowed at a similar rate. The gas effluent in the He sweep was analyzed using an on-line mass spectrometer. The flux was determined as a function of time and temperature from the H₂ partial pressure in the sweep gas, the He flow-rate, and the effective permeation area, assuming the ideal gas law.

The H₂ permeation flux through BaCe_{0.85}Eu_{0.15}O₃ was measured while cooling from 700°C at 3°C/min, with a 30 minute hold at each 50 degree increment to allow for standardization of the flux. The H₂ permeation flux as a function of temperature is plotted in Figure 6. The maximum flux measured, at about 600°C, is about 0.42 cm³/min cm².

A corresponding H₂ permeation flux as a function of temperature was also obtained for BaCe_{0.85}Gd_{0.15}O₃ and plotted in Figure 6. It provided a maximum flux of only about 0.05 cm³/min cm² due to lack of electronic conductivity.

5 Example 3

Using the same general procedure as in Example 2, a series of further oxides of the invention were synthesized having the compositions BaCe_{0.95}Eu_{0.05}O₃, BaCe_{0.90}Eu_{0.10}O₃, BaCe_{0.85}Eu_{0.15}O₃, BaCe_{0.80}Eu_{0.20}O₃, BaCe_{0.75}Eu_{0.25}O₃, BaCe_{0.85}Eu_{0.15}O₃. The
10 powders obtained were characterized by x-ray diffraction and all were found to be single-phase perovskite, consistent with the BaCeO₃ structure.

Although the present invention has been fully described in connection with the preferred embodiments thereof, it is to
15 be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims.

Claims:

1. A process for hydrogen separation from a hydrogen-containing gas comprising contacting a first side of
5 a gas impermeable mixed hydrogen ion and electronic conducting membrane with said hydrogen containing gas at an elevated pressure concurrently with contacting a second opposite side of said membrane with gas at a lower pressure than said hydrogen containing gas and withdrawing hydrogen
10 ions emerging from said second opposite side of said membrane, said mixed hydrogen ion and electronic conducting membrane comprising a perovskite oxide represented by the general formula:

15 ABO_3


where A consists of at least one element selected from the group consisting of Ba, Ca, Mg and Sr and B is $Ce_{1-x}M_x$ where M is a multivalent dopant metal selected from the group
20 consisting of Eu and Tb and x has a value between 0.05 and 0.40.

2. The process according to claim 1 wherein M is Eu.

25 3. The process according to claim 1 or 2 which comprises reforming light hydrocarbon to produce synthesis gas with separation of hydrogen.

30 4. The process according to claim 1, 2 or 3 which comprises converting natural gas to H_2 and higher hydrocarbons with separation of hydrogen.

5. A process for hydrogen separation from a hydrogen-containing gas comprising contacting a first side of a gas impermeable mixed hydrogen ion and electronic conducting membrane with said hydrogen containing gas at an elevated pressure concurrently with contacting a second opposite side of said membrane with gas at a lower pressure than said hydrogen containing gas and withdrawing hydrogen ions emerging from said second opposite side of said membrane, said mixed hydrogen ion and electronic conducting membrane comprising a perovskite oxide represented by the general formula:



15 where x has a value between 0.05 and 0.40.

6. The process according to claim 5 wherein x has a value between 0.05 and 0.20.

20 7. The process according to claim 5 wherein x has the value of 0.15.

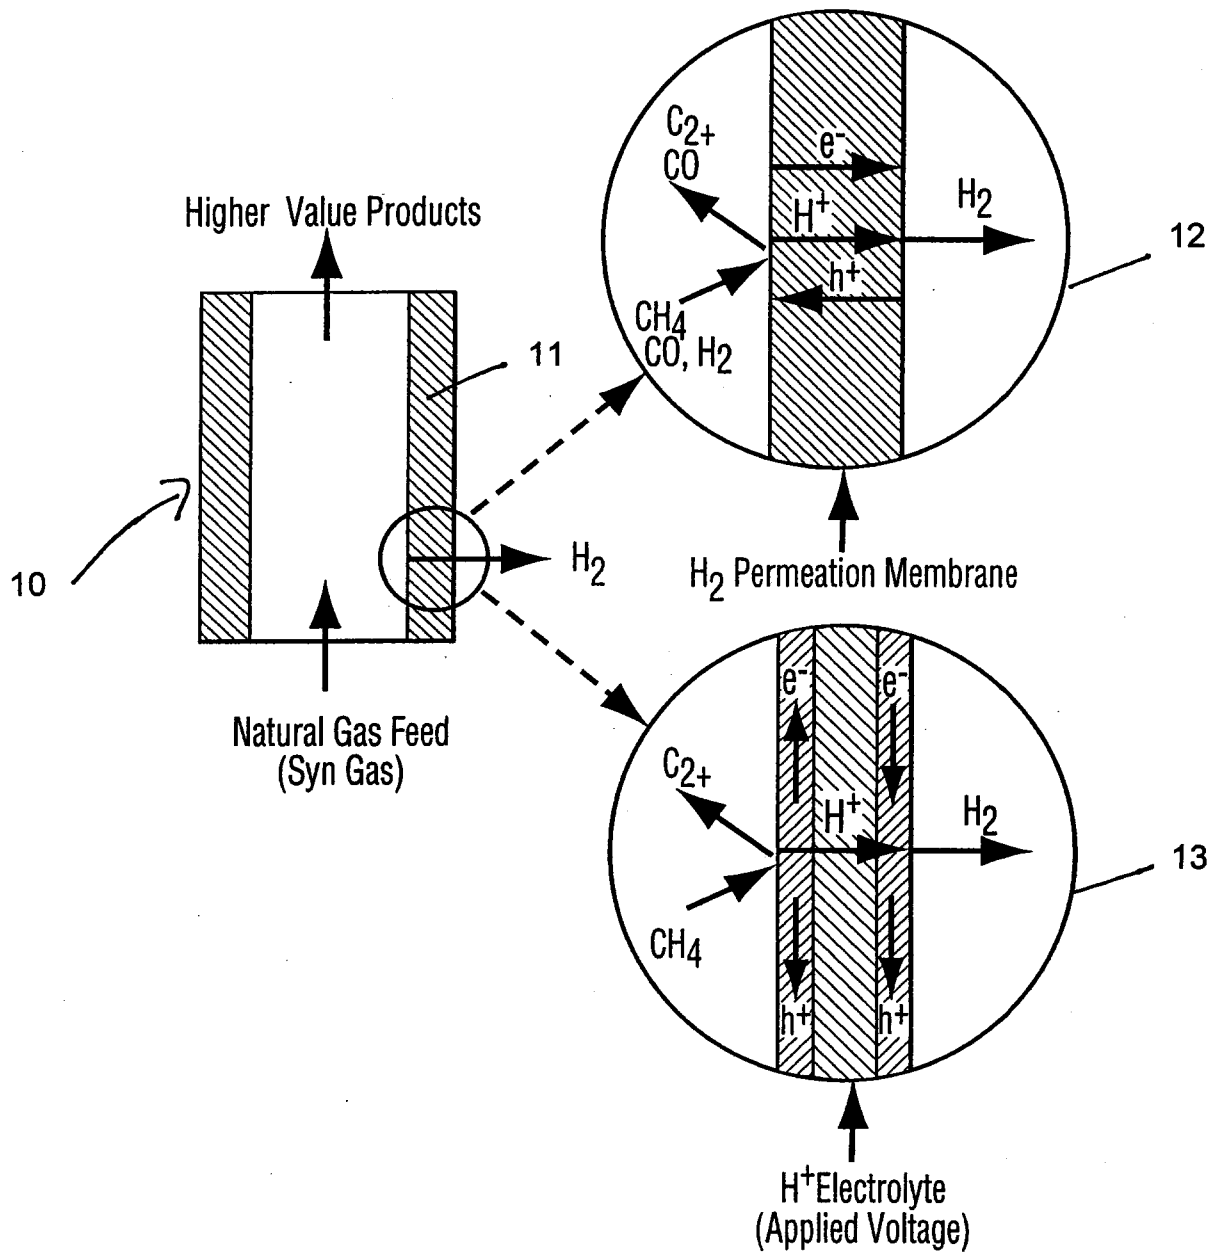
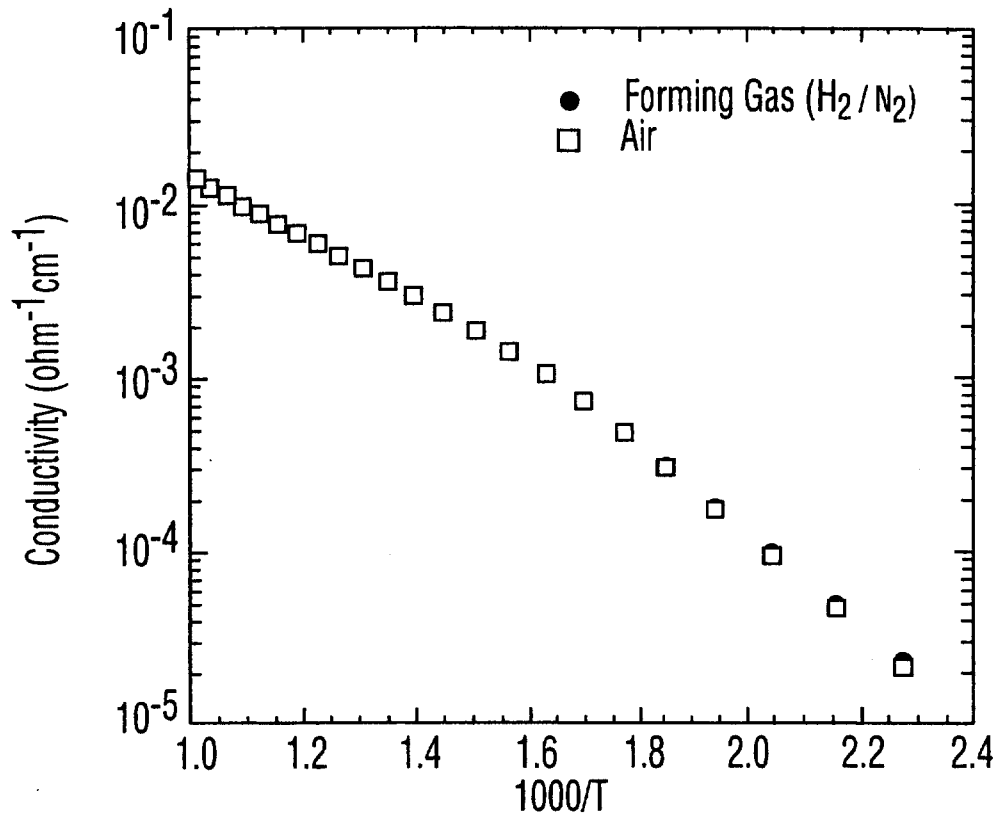
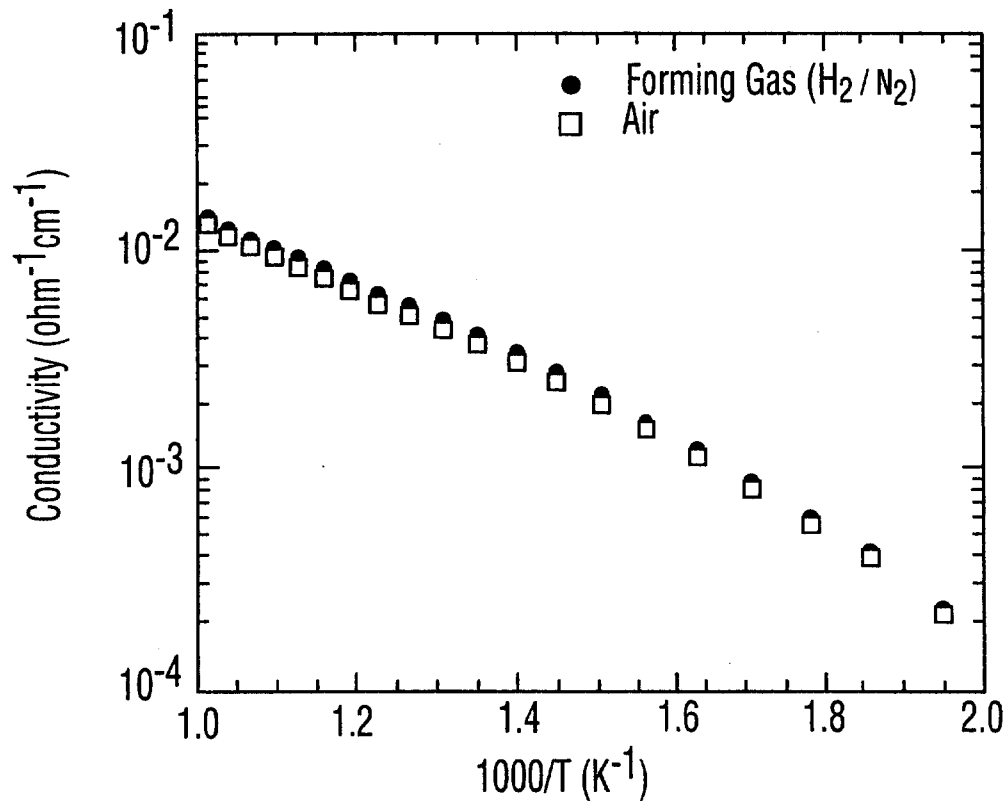
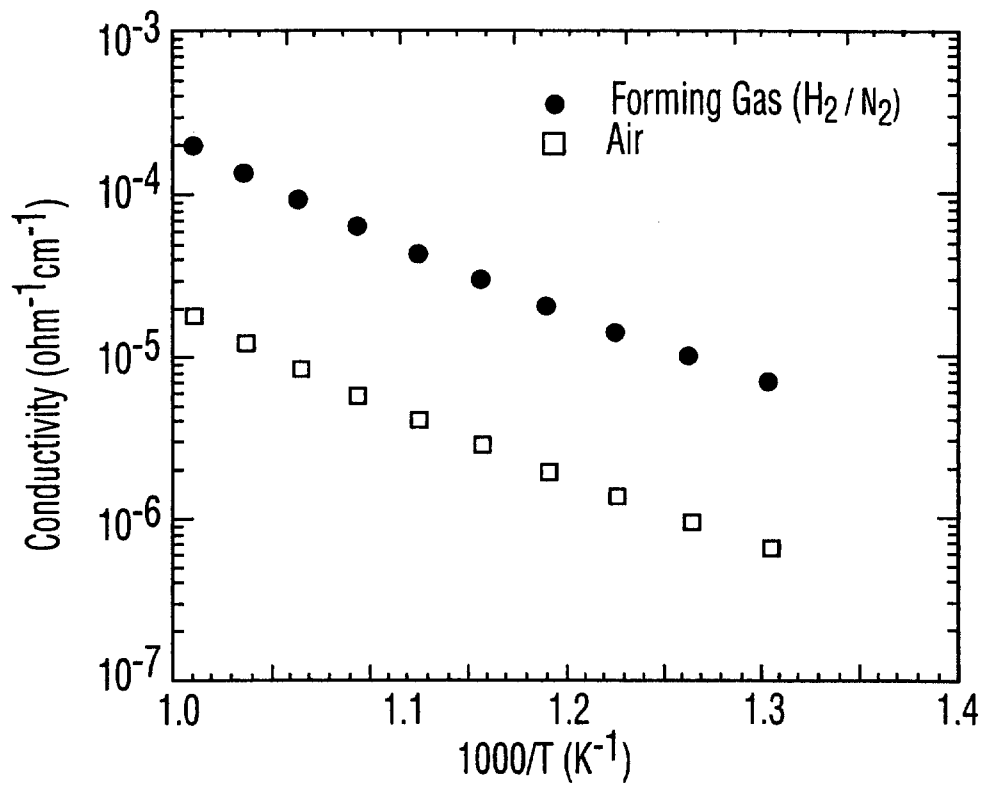
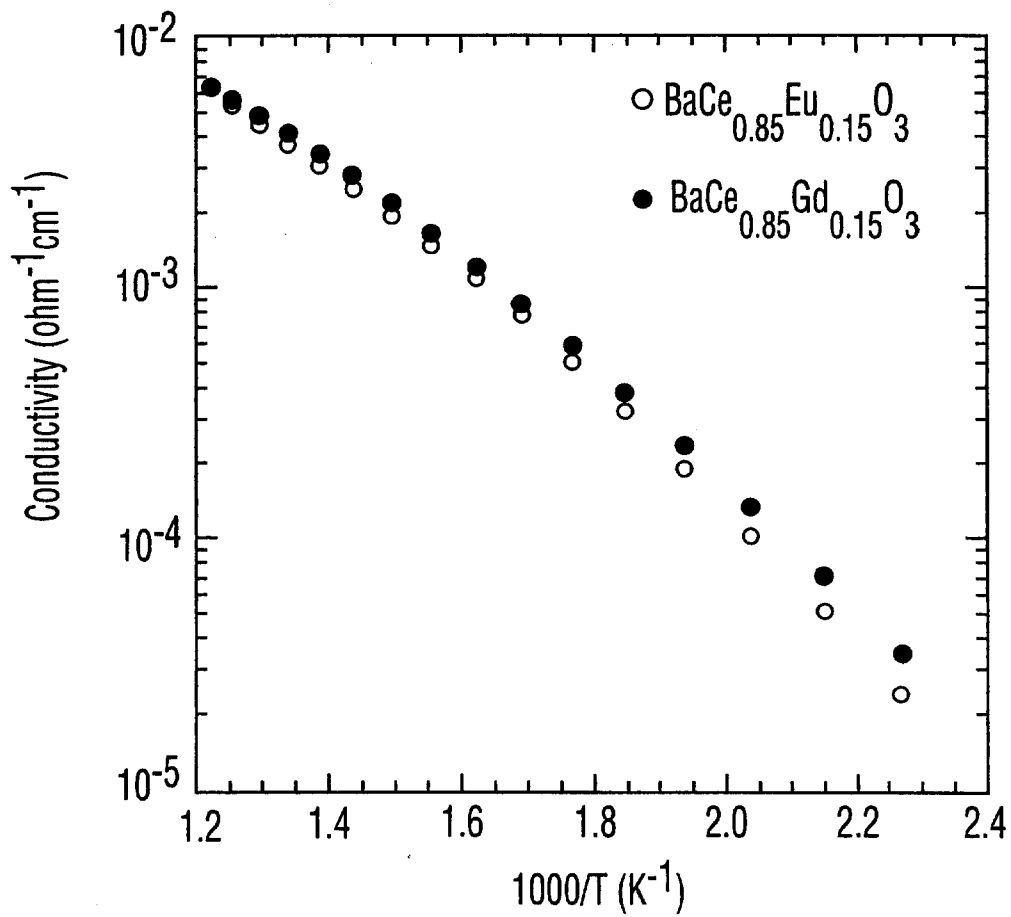
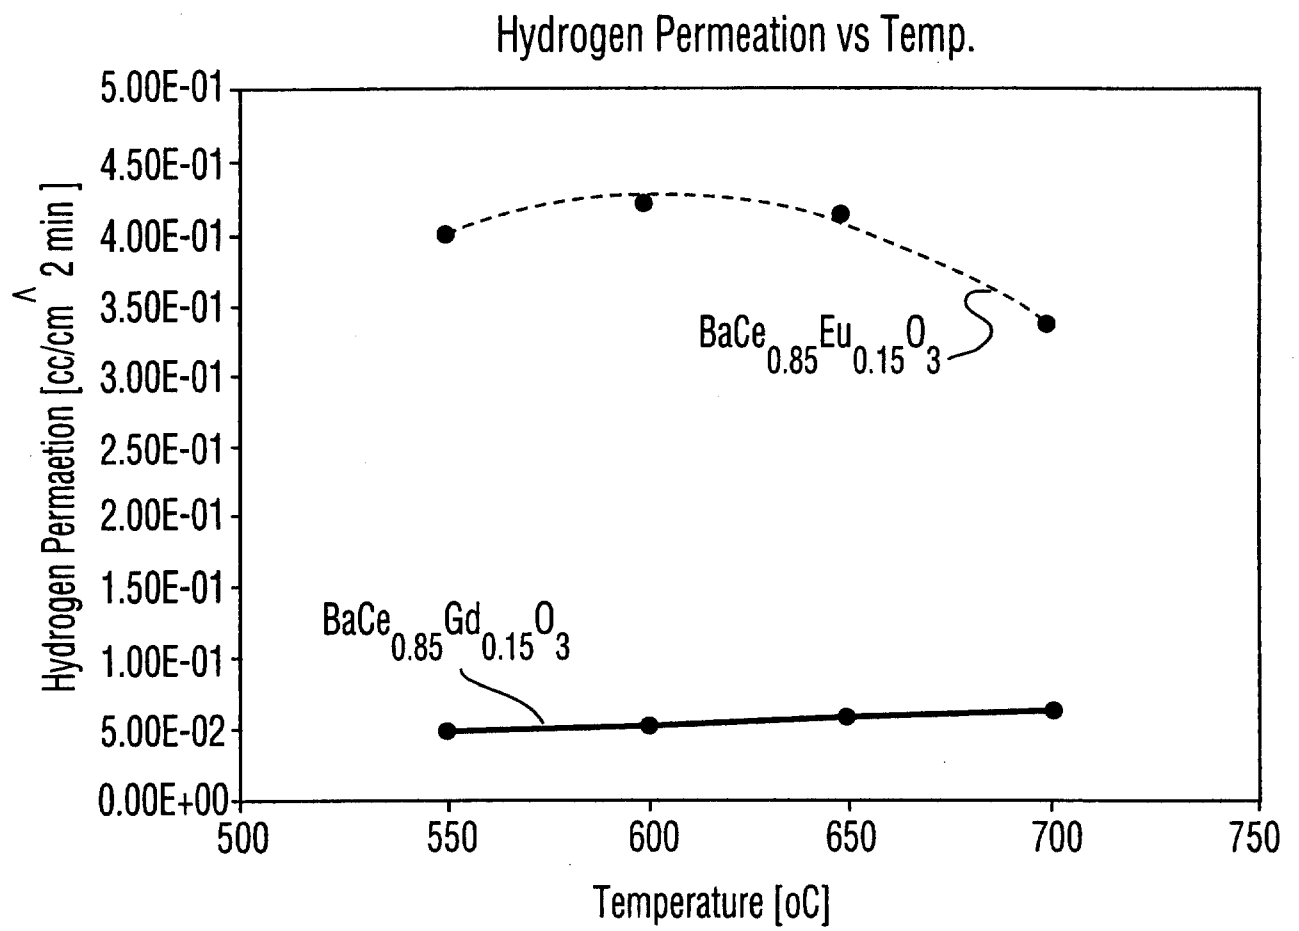


FIG. 1

**FIG. 2****FIG. 3**

**FIG. 4****FIG. 5**

**FIG. 6**