Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2638149 A1 2007/09/07

(21) 2 638 149

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2007/02/26
(87) Date publication PCT/PCT Publication Date: 2007/09/07
(85) Entrée phase nationale/National Entry: 2008/08/22
(86) N° demande PCT/PCT Application No.: US 2007/005128
(87) N° publication PCT/PCT Publication No.: 2007/100842
(30) Priorités/Priorities: 2006/02/24 (US60/776,476);
2007/02/23 (US11/678,559)

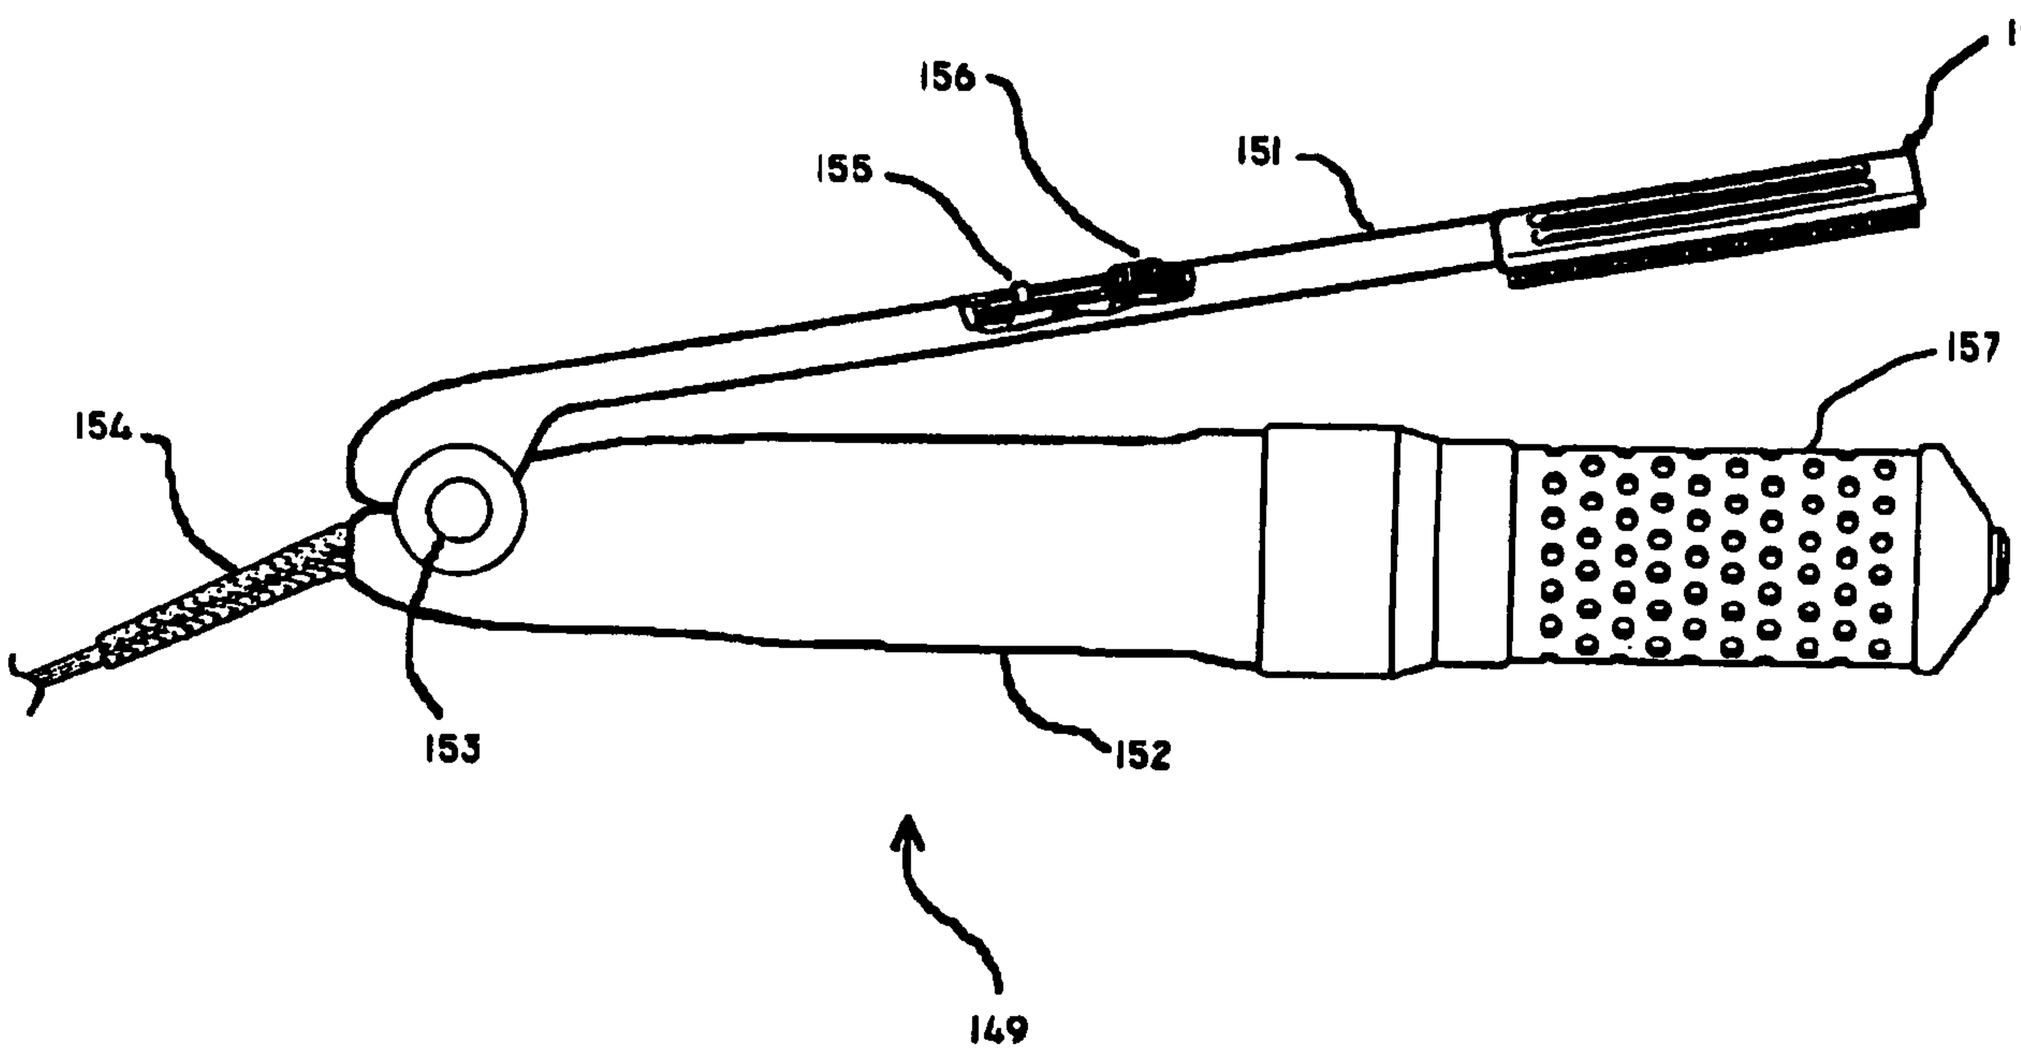
(51) Cl.Int./Int.Cl. *A45D 1/04* (2006.01)

(71) Demandeur/Applicant:
M.M. & R. PRODUCTS, INC., US

(72) Inventeurs/Inventors:
RAGOSTA, MICHAEL A., US;
MEGLIO, BRUNO, US;
MARINO, CLAUDIO, US;
RICHMOND, DAVID J., US;
RICHMOND, HOWARD C., US

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : OUTIL DE COIFFURE MUNI D'UN CYLINDRE ROTATIF
(54) Title: HAIR STYLING TOOL WITH ROTATABLE CYLINDER



(57) Abrégé/Abstract:
A hair styling tool includes a body, a cylinder extending from the body, the cylinder rotatable relative to the body, a motor for rotating the cylinder, a heater to heat the cylinder, and a styling arm pivotally attached to the body. The hair styling tool may have a generally clam shell configuration, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder. The styling arm may also include a brush head with fixed or retractable bristles and/or a smoothing plate.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

REVISED VERSION

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
7 September 2007 (07.09.2007)

PCT

(10) International Publication Number
WO 2007/100842 A3

(51) International Patent Classification:
A45D 1/04 (2006.01)

(21) International Application Number:
PCT/US2007/005128

(22) International Filing Date:
26 February 2007 (26.02.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/776,476	24 February 2006 (24.02.2006)	US
11/678,559	23 February 2007 (23.02.2007)	US

(71) Applicant *(for all designated States except US)*: **M. M. & R. PRODUCTS, INC.** [US/US]; 5010 N. Parkway Calabasas, Suite 205, Calabasas, CA 91302 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **RAGOSTA, Michael, A.** [US/US]; 5010 N. Parkway Calabasas, Suite 205, Calabasas, CA 91302 (US). **MEGLIO, Bruno** [US/US]; 404 N. Canon Drive, Beverly Hills, CA 90210 (US). **MARINO, Claudio** [US/US]; 20929 Ventura Boulevard, Unit 46, Woodland Hills, CA 91364 (US). **RICHMOND, David** [US/US]; 5826 Uplander Way, Culver City, CA 90230 (US). **RICHMOND, Howard** [US/US]; 2804 Medil Place, Los Angeles, CA 90064 (US).

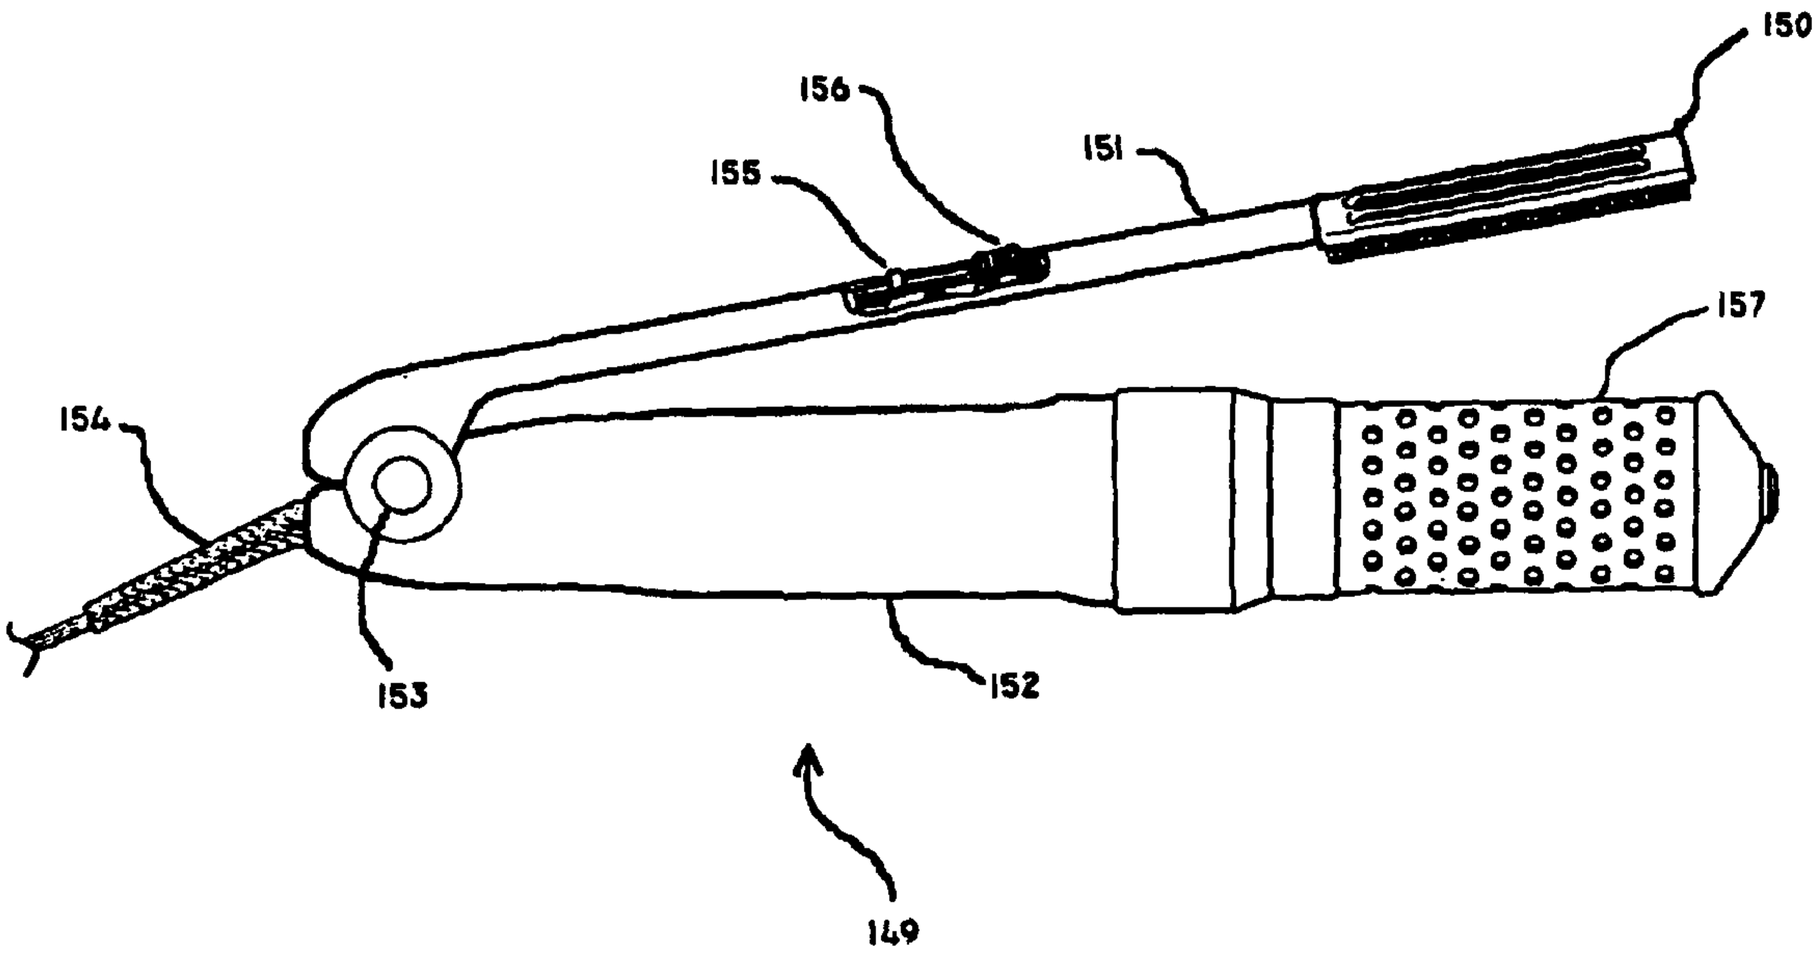
(74) Agent: **BAJRACHARYA, Oliver, S.**; Christie, Parker & Hale, LLP, Post Office Box 7068, Pasadena, CA 91109-7068 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HAIR STYLING TOOL WITH ROTATABLE CYLINDER



(57) Abstract: A hair styling tool includes a body, a cylinder extending from the body, the cylinder rotatable relative to the body, a motor for rotating the cylinder, a heater to heat the cylinder, and a styling arm pivotally attached to the body. The hair styling tool may have a generally clam shell configuration, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder. The styling arm may also include a brush head with fixed or retractable bristles and/or a smoothing plate.

WO 2007/100842 A3

WO 2007/100842 A3

Published:
— *with international search report*

(88) Date of publication of the international search report:
29 November 2007

Date of publication of the revised international search report:
13 March 2008

(15) Information about Correction:
see Notice of 13 March 2008

HAIR STYLING TOOL WITH ROTATABLE CYLINDER

FIELD OF THE INVENTION

[0001] This invention relates to a hair styling tool, and more specifically, to a hair styling tool allowing a user to more efficiently and more effectively brush hair and also to more effectively style hair.

BACKGROUND OF THE INVENTION

[0002] Brushing hair pulls oil from the scalp region and spreads it throughout the hair, adding body and sheen to the hair and keeping the hair healthy. To add even more body or to style hair in particular shapes, many people blow dry their hair as they brush it. When simultaneously blow drying and brushing hair, desirable results are achieved by pulling the bristles of a hair brush through the hair while heat, such as in the form of hot air, is applied directly to the hair. One method of brushing involves partially rotating the brush so that the bristles move through the hair. A user can usually rotate a brush about one half turn manually and, after each half turn, the user pulls the brush from the hair. The brush is then replaced in a new location, usually adjacent to the preceding location, and the process is repeated. Various brushes have been developed as an improved hair brushing means. Exemplary embodiments of such a brush are described in U.S. Patent No. 6,098,635 to Marino, the entire content of which is incorporated herein by reference.

[0003] Accomplishing rotation evenly over all regions of the scalp is difficult because it is unnatural for a user to rotate his or her hand to the necessary positions. Specifically, blow drying one's own hair requires reaching around the head with the arms raised and providing the proper twist or rotation to the brush is very difficult in that position. Coordinating brush movement while aiming the dryer adds to the difficulty. Barbers and hair stylists can accomplish these positions more easily because they can move relative to a person's head.

[0004] In addition to brushing hair, it is often desirable to style one's hair in a particular manner, such as curling straight hair or straightening curly hair. Usually, a separate apparatus in addition to a brush is necessary to curl, straighten, or otherwise style the hair.

SUMMARY OF THE INVENTION

[0005] In one exemplary embodiment, a hair styling tool is provided including a body, a cylinder extending from the body, the cylinder rotatable relative to the body, a motor for rotating the cylinder, and a styling arm attached to the body. The styling arm may be adapted to make contact with the cylinder and the styling arm may be movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder. The styling arm may include a brush head and/or a

smoothing plate. In one exemplary embodiment, the hair styling tool may have a hinged or clam shell configuration.

[0006] A brush head of the hair styling tool may include a brush head housing, a smoothing plate housed within the brush head housing and a blade on which bristles are formed, the blade located between the housing and the smoothing plate. The bristles may be movable between an extended position in which the bristles protrude past the smoothing plate and a collapsed position in which the bristles are retracted with respect to the smoothing plate. The brush head housing may also include a bristle release knob, wherein the bristle release knob is adapted to contact the blade to maintain the blade in the extended position and wherein the bristle release knob is movable to be spaced from the blade to permit the blade to be placed in the collapsed position with the bristles retracted.

[0007] The hair styling tool may further include a heater adapted to heat the cylinder. The cylinder may have surface holes to dissipate heat and may include grooves or other types of indentations to provide additional friction between the cylinder and the brush head or smoothing plate.

[0008] In one exemplary embodiment, the blade is removable from the brush head and replaceable with one of a plurality of different blades having, for example, varying bristle patterns, densities and lengths or having no bristles at all. Additionally, in another exemplary embodiment, the brush head is removable and replaceable with one of a plurality of different brush heads.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a partial cross-section, side elevation view of an exemplary hair styling tool of the present invention having a rotatable cylinder and a movable styling arm.

[0010] FIG. 2 is a semi-schematic perspective view of an exemplary hair styling tool of the present invention with the rotating cylinder removed.

[0011] FIGs. 3A, 3B, 3C and 3D are schematic side views of exemplary smoothing plates and cylinders of the present invention.

[0012] FIG. 4 is a semi-schematic perspective view of an exemplary distal end of the hair styling tool of FIG. 1.

[0013] FIG. 5 is a side view of an exemplary hair styling tool of the present invention with a styling arm in the closed position.

[0014] FIG. 6 is a semi-schematic, partial cross-section, side elevation view of another exemplary hair styling tool of the present invention.

[0015] FIG. 7 is a side elevation view of yet another exemplary hair styling tool of the present invention.

[0016] FIG. 8A is a partially schematic front view of the distal end of an exemplary hair styling tool of the present invention with compressible bristles in an extended position.

[0017] FIG. 8B is a semi-schematic front view of the distal end of FIG. 8A with the bristles in a collapsed position.

[0018] FIG. 8C is a side view of a styling arm and a cylinder of a hair styling tool of the present invention.

[0019] FIG. 8D is a semi-schematic front view of a distal end of a hair styling tool of the present invention having a smoothing plate without bristles.

[0020] FIG. 9A is a semi-schematic front view of a distal end of a hair styling tool of the present invention with retractable bristles in the extended position.

[0021] FIG. 9B is a semi-schematic front view of the distal end of FIG. 9A with retractable bristles in the collapsed position.

[0022] FIG. 9C is a side view of a brush head and a cylinder of a hair styling tool of the present invention.

[0023] FIG. 10 is a partial cross-section, side elevation view of yet another exemplary hair styling tool of the present invention.

[0024] FIG. 11 is a semi-schematic side view of yet another exemplary embodiment of a hair styling tool of the present invention.

[0025] FIG. 12 is a front view of a distal end of an exemplary hair brush of the present invention having a fixed bristles brush head incorporating an integral smoothing plate.

DETAILED DESCRIPTION

[0026] Referring to **FIG. 1**, a hair styling tool **20** includes an elongated body **22**. The specific dimensions of the body are not critical, but the body should generally allow a user to comfortably hold the hair styling tool during use. In one exemplary embodiment, the body **22** may be adapted to house other mechanical and electrical components of the hair styling tool **20**, as described in more detail below.

[0027] With reference also to **FIG. 2**, in one exemplary embodiment of the hair styling tool **20**, a mounting channel **72** extends from a distal end of the body **22**. As used herein, "distal" shall generally refer to a position or direction away from a base of the body **22** or towards a tip of the mounting channel **72**. Conversely, "proximal" shall generally refer to a position or direction toward the base of the body **22** or away from the tip of the hot air channel **72**. As described in more detail below, the mounting channel **72** serves to provide additional support to a cylinder **24** rotatably mounted on the mounting channel.

[0028] Referring again to **FIG. 1**, in one exemplary embodiment, a hot air channel **71** may be connected to a hot air fan assembly **44** housed in the body **22** such that hot air provided by the hot air fan assembly travels through the body via the hot air channel. Intake ports **70** in the body **22** admit outside air to an inlet of the hot air fan assembly **44**. An opening **82** at a distal end of the hot air channel **71** allows the air to escape the body **22** and enter, for example, a cylinder attached to a distal end of the body as described below. A hot

air switch **42** electrically connected to the hot air fan assembly **44** allows a user to control the hot air supply provided by the hot air fan assembly.

[0029] An elongated hollow cylinder **24** may be rotatably mounted over the mounting channel **72**. The mounting channel **72** may include a groove **81** into which teeth **83** protruding from a cap **27** of the cylinder **24** may be snapped to mount the cylinder to the mounting channel. A base **25** of the cylinder may be adapted to be connected to a distal portion of the body **22**. In one exemplary embodiment, the base **25** of the cylinder **24** is connected to the body **22** by a slip fit. In one exemplary embodiment, teeth (not shown) on an inner circumference of the base **25** mesh with teeth on a cylinder drive gear **50** at a distal end of the body **22** to align the cylinder **24** to the body. A distal end of the cylinder **24** may include the cap **27** to seal the distal end of the cylinder and prevent, for example, hot air provided through the hot air channel **71** from escaping from the distal end of the cylinder. The cap **27** may contain teeth **83** to allow the cylinder to be mounted and secured by an interference fit to the mounting channel **72** as described above. The specific shape or dimensions of the cap **27** are not critical as long as the cap substantially covers the distal end of the cylinder **24** and prevents a significant amount of air from escaping from the distal end.

[0030] In one exemplary embodiment, the cylinder **24** includes a plurality of holes **30** which allow a flow of hot air from the hot air channel **72** to an exterior of the hair styling tool **20** and to contact hair adjacent the cylinder. In one exemplary embodiment, the holes **30** are circular and arranged in rows, evenly spaced throughout the cylinder **24**. The even spacing of the holes **30** throughout the cylinder **24** allows for even distribution of hot air throughout the cylinder and also for uniform heating of the cylinder, thus providing uniform drying when the cylinder is applied to hair, as described in more detail below. Although one configuration of the holes **30** is described herein, the specific configuration of the holes is not critical, and the holes may be arranged in any configuration allowing hot air to travel from the hot air channel **72** through the cylinder **24**. Additionally, although the described holes **30** are circular, the shape of the holes is not critical. The holes 30 also serve to increase the friction between the brush head housing and the cylinder, increasing the brushing effectiveness on the hair.

[0031] With reference to **FIGs. 3A-3D**, alternate exemplary surface patterns of the cylinder **24** are shown. The alternate surface patterns, which are generally wave-shaped grooves **54a, 54b, 54c, 54d**, allow for varying friction along the cylinder's surface to provide different styling options when hair is placed between the cylinder **24** and a smoothing plate **108** as described in more detail below. The grooves may also be used on a cylinder **24** having holes **30** (holes not shown for clarity). With reference to **FIG. 3D**, the smoothing plate **108** adapted to contact the cylinder **24** may include grooves **55** to further increase the friction between the brush head housing and the cylinder.

[0032] The rotation assembly of the hair styling tool **20** will now be described with further reference to **FIG. 1**. An electric motor **39** may be housed within the body **22**, the

motor being adapted to rotate the cylinder **24**. In one exemplary embodiment, the motor powers a drive shaft **46** which extends along a length of the body **22**. A drive gear **48** may be located at a distal end of the drive shaft **46**, the drive gear adapted to interact with the cylinder gear drive **50** such when the drive gear **48** is rotated by the drive shaft, the cylinder gear drive **50** rotates as well. When the cylinder **24** interfaces with the cylinder gear drive **50**, the cylinder rotates in the same direction and at the same rate as the cylinder gear driver. In one exemplary embodiment, the electric motor **39** is adapted to power the drive shaft **46** at different rates, depending on a setting adjusted by a user.

[0033] In one exemplary embodiment, the electric motor **39** is reversible such that it can rotate the drive shaft **48** in either direction. A rotation direction switch **41** may be electrically connected to the motor **39** to allow the direction of the motor to be set by a user. The motor **39** may be powered by, for example, electricity from an electrical power cord **40**, a rechargeable battery, or by other means sufficient to generate enough energy to power the motor. An activation switch **38** may be used to activate the motor **39** to drive rotation of the cylinder **24**. The activation switch **38** may be located anywhere on the brush, but in exemplary embodiment, the rotation switch is located in a position such that it is activated when a pivot handle **36** is in a closed position, as described in more detail below. Although a specific system including gears is described to allow the motor **39** to rotate the cylinder **24**, one of ordinary skill in the art will appreciate that many other similar configurations of the driving system will achieve the same result in substantially the same way.

[0034] An elongated styling arm may be attached to the body **22** of the hair styling tool **20**. In one exemplary embodiment, the styling arm may be a brush head **26**. The brush head **26** may include an array of bristles **28** mounted on a surface of the brush head and protruding toward an outer surface of the cylinder **24**. The brush head **26** may also include vent holes **32** to allow hot air to enter or hot air and/or steam to escape to prevent the brush head from becoming dangerously hot. An exemplary brush head **26** venting pattern is shown in **FIG. 4**.

[0035] In one exemplary embodiment, as shown in **FIG. 4**, the brush head **26** has a concave structure such that the brush head generally conforms to the curvature of the cylinder **24**, maximizing the effective brushing surface. In a further exemplary embodiment, the brush head **26** may have a width such that it extends around part of the cylinder circumference to subtend an angle between about 20° and about 45°. The brush head **26** may be adapted to receive and secure an interchangeable bristle blade **31**, allowing users to choose from a variety of blades having, for example, different widths, different bristle densities and different bristle textures. The brush head **26** may include a groove **29** located along each interior side of the brush head, the grooves **29** adapted to slidingly receive and secure the interchangeable bristle blade **31**.

[0036] With reference again to **FIG. 1**, the brush head **26** may be pivotally or otherwise movably attached to the body **22**. More specifically, the brush head **26** may be attached to a

distal end of a lever arm **34**, the lever arm being pivotally attached to the body **22** by, for example, a transverse brush head pivot pin **35**. The brush head **26** may have an open position wherein the brush head **26** is spaced from the cylinder **24**, and a closed position (**FIG. 5**) wherein the brush head **26**, and specifically, the bristles **28**, are in contact with the cylinder. A bias means **84**, such as a spring, may bias the brush head **26** into an open position. The pivot handle **36** may be provided to allow a user to move the brush head **26** from the open position to the close position, the pivot handle being pivotally attached to the body **22** by a pivot handle pivot pin **37**. In one exemplary embodiment, a pivot handle gear **50** rotatably connected to the pivot handle pivot pin **37** is coupled with a brush head gear **52** rotatably coupled to the brush head pivot pin **35**. The pivot handle **36** is oriented such that the pivot handle is in an open position (i.e., a proximal end of the pivot handle is spaced from the body **22**) when the brush head **26** is in an open position and the pivot handle is in a closed position (i.e., a proximal end of the pivot handle is in contact or substantially in contact with the body) (**FIG. 5**) when the brush head is in a closed position. Accordingly, when the brush head **26** is biased to be in the open position, the pivot handle **36** is also biased to be in the open position. Due to the interaction of the pivot handle gear **50** and the brush head gear **52**, when the pivot handle **26** is moved from the open position to the closed position, the brush head **26** simultaneous moves from the open position to the closed position.

[0037] Referring now to **FIG. 6**, another exemplary embodiment of a hair styling tool **120** includes a heating element such as a heating rod **60** which is adapted to provide heat to a cylinder **124** rotatably attached to a mounting channel similarly to the previous embodiment. The heating rod **60** may be electrically connected to a power source, such as the power cord **40**, which provides the heating rod **60** with the ability to generate heat. A heating element switch **62** located on a body **122** allows a user to activate and deactivate the heating rod **60**.

[0038] The cylinder **124** includes a heat transfer assembly **64** attached to an inner circumferential surface of the cylinder and adapted to allow the cylinder to slide over and make contact with the heating rod **60**. The heat transfer assembly **64** may be any suitable heat transfer material, for example, plastic, metal, ceramic, or any combination thereof. Accordingly, when the heating rod **60** is heated, the heat is transferred by conduction from the heating rod to the heat transfer assembly **64** and to an exterior surface of the cylinder **124**. The cylinder **124** includes holes **66**, for example, concave indentations or convex protrusions, which enhance hair engagement as the cylinder rotates. In one exemplary embodiment, an exterior surface of the cylinder **124** is slightly corrugated to increase the friction between the hair and the cylinder as the cylinder rotates. Although a specific heating system, including a heat transfer assembly **64** is described to allow the heating rod **60** to conduct heat to the rotating cylinder **124**, one of ordinary skill in the art will appreciate that many other similar configurations of the heating system will achieve the same result in substantially the same

way, including using a radiant heating element instead of heating rod **60**, which may eliminate the need for a heat transfer assembly such as **64**.

[0039] Referring to **FIG. 7**, the styling arm includes a brush head **100** having a collapsible bristle assembly. With reference also to **FIGs. 8A, 8B, and 8C**, the brush head **100** includes a brush head housing **104** adapted to slidingly receive the smoothing plate **108** into grooves **121** extending longitudinally along both sides of the brush head housing. The smoothing plate is heatable and in one exemplary embodiment the brush head housing may include an integrated plug electrically connected to the smoothing plate **108**. When power is supplied to the plug, the plug heats the smoothing plate **108** allowing the smoothing plate to act similar to a curling iron or a straightening iron, as described in more detail below.

[0040] With further reference to **FIGs. 8A-8C**, the brush head housing **104** is also adapted to slidingly receive a blade **105** including bristle clusters **106** and rigid posts **107**. In one exemplary embodiment, the blade **105** includes a plurality of collapsible members **123** extending longitudinally along the blade and having a generally concave cross-section. The collapsible members **123** have an extended position in which they provide for the bristles **106** to protrude from the smoothing plate **108 (FIG. 8A)** and a collapsed position in which they provide for the bristles to be retracted with respect to the smoothing plate, i.e., recessed within or substantially flush with the smoothing plate **(FIG. 8B)**. The collapsible members **123** are biased into the extended position, but may be transformed into the collapsed position by a force to overcome the bias. Specifically, when a sufficient compression force as indicated by the arrow in **FIG. 8A** is applied to the rigid posts **107** generally perpendicular to a planar surface of the blade **105**, the collapsible members **123** bend to allow the bristles **106** and posts **107** to be recessed within the brush head housing **104** and to allow the smoothing plate **108** to have a relatively smooth surface. As such, the hair brush may also serve as a straightening iron or a curling iron.

[0041] Another exemplary embodiment of the hair styling tool is shown with respect to **FIG. 8D**. A styling arm **200** includes a housing **223** adapted to slidingly receive a smoothing plate **208** into grooves **221** extending longitudinally along both sides of the housing. The smoothing plate **208** does not include bristles and is heatable, and in one exemplary embodiment, the housing **223** may include an integrated plug to electrically heat the smoothing plate. When power is supplied to the plug, the heater heats the smoothing plate 208 allowing the smoothing plate to be used to more effectively style hair.

[0042] Yet another exemplary embodiment of a brush head **110** is shown with reference to **FIGs. 9A, 9B and 9C**. Similarly to the brush head **100**, brush head **110** includes a brush head housing **112** adapted to slidingly receive a heatable smoothing plate **115** into grooves **131** extending longitudinally along both sides of the brush head housing. The brush head housing **112** may include an integrated plug **103** electrically connected to the smoothing plate **108**.

[0043] The brush head housing **112** is also adapted to slidingly receive a blade **113** including bristles **114**. The brush head housing **112** includes a bristle release knob **111a/11b** adapted to be received into a release knob slot **133** located on a planar surface of the brush head housing. Specifically, with reference to **FIG. 9C**, a hull **116** of the release knob **111a** contacts a spine **134** of the blade **113** to place the blade in an extended position such that the bristles **114** protrude through the smoothing plate **115.** The spine **134** may extend along only a portion of the blade **113**. When the release knob **111b** is slid distally along the release knob slot **133** to a release position, (i.e., a position along the blade portion absent a spine), a compression force applied generally perpendicular to a planar surface of the blade allows the bristles **114** to be recessed into the brush head housing **112** (**FIG. 9B**). As such, the hair brush may also be used as a curling iron or a straightening iron.

[0044] Still another exemplary embodiment of a brush head **400** of the present invention is shown with respect to **FIG. 12**. The brush head **400** is directed to a brush head which incorporates a brush and an integrated smoothing plate without changing a configuration of the brush head. More specifically, the brush head **400** includes a plurality of brush head housing sections **402**, each housing section adapted to slidingly receive a blade **404** including bristles **408** into grooves **410** extending longitudinally along the housing section. In one exemplary embodiment, the brush head **400** includes two housing sections **404**, but the specific number of housing sections is not critical. The brush head **400** may further include a smoothing plate section **412** disposed between adjacent housing sections **404**, the smoothing plate section configured to provide a planar surface contact with the cylinder **24** when the brush head is in a closed configuration as shown in **FIG. 12**. In one exemplary embodiment, the smoothing plate section **412** has a concave surface curved to substantially the same degree as the cylinder such that the smoothing plate section makes substantially complete contact with the cylinder when the brush head is in the closed position. The brush head **400** may further include an integrated plug and heating element enabling the brush head to be electrically heated.

[0045] Another exemplary embodiment of the present invention is shown with reference to **FIG. 10**. A hair styling tool **320** substantially similar to the previously described hair styling tools is provided. The hair styling tool **320** includes a one-piece movable brush head assembly **330**. The brush head assembly **330** includes a brush head **326** attached to a distal end of a lever arm **390**. The lever arm **390** is generally in the shape of an "S" or an upside down "Z." The lever arm **390** is rotatably connected to the hair styling tool **310** by a transverse pivot pin **391**. A pivot preload spring **392** biases the lever arm **390** into an open position such that the brush head **326** is spaced from a cylinder **324**. When a force to overcome the spring bias is applied to the lever arm **390**, the lever arm is movable from the open position to a closed position wherein the brush head **326** contacts the cylinder **324**. The body **322** of the hair styling tool **320** may include slots **323** which permit the lever arm **390** to

be moved between the open position and the closed position. A cylinder rotation switch **338** may be located such that it is activated when the lever arm is in the closed position and deactivated when the lever arm is in the open position.

[0046] As will understood by those of ordinary skill in the art, the "S" shaped lever arm configuration may also be used with any of the exemplary styling arms described above.

[0047] Yet another exemplary embodiment of the present invention is shown with reference to **FIG. 11**. A hair styling tool **149** has a hinged or "clam-shell" configuration including a body **152** and a styling arm **151** pivotally or otherwise movably attached to the body. In one exemplary embodiment, the styling arm **151** may be attached by a pivot pin **153**. The pivot pin **153** may be designed so as to allow only a limited degree of rotation between the styling arm **151** and the body **152**. For example, the maximum amount of rotation may about 60 degrees. Similarly to the previously described hair styling tool embodiments, the body **152** includes a rotatable cylinder **157** and the styling arm **151** includes a brush head **150**. In one exemplary embodiment, a heating element switch **155** to control heating of the cylinder **157** and the brush head **150**, and a rotation switch **156** to control rotation of the cylinder are located on the styling arm **151**. However, the location of such switches is not critical, and the switches may be located anywhere that is convenient for user access. The hair styling tool **149** may be electrically powered through a power cord **154**.

[0048] In one exemplary embodiment, the styling arm **151** may be biased, for example, by a spring, into an open position such that the styling arm is not in contact with the cylinder **24**. A force to overcome the bias may be applied to the styling arm **151** to place the styling arm in a closed position wherein the styling arm contacts the cylinder.

[0049] The operation and use of the hair styling tool **20** will now be described with reference to **FIGs. 1 and 5**. The hair styling tool may be used by placing a selected portion of hair between the brush head **26** and the cylinder **24** when the brush head is in the open position (**FIG. 1**). The pivot handle **36** may then be moved from the open position to the closed position, resulting in the simultaneous movement of the brush head **26** from its open position to its closed position. Placing the brush head **26** in the closed position allows the brush head to clamp the selection portion of hair between the cylinder **24** and the bristles **28** of the brush head. Additionally, in one exemplary embodiment, placing the pivot handle **36** in the closed position triggers the rotation switch **38** to activate rotation of the cylinder **24**. Accordingly, almost any length of hair may be brushed, shaped and styled without significant tangling in this manner. As is apparent, the various other exemplary embodiments of the hair styling tools described may be used in a similar manner. Namely, hair may be placed between the styling arm and the cylinder when the styling arm is in the open position. Once the hair is in place, the styling arm may be moved to the closed position to capture and style the hair. In an exemplary embodiment where the rotation direction of the cylinder is

reversible, a user can use the brush with either hand or from either side of the head while having the cylinder rotate in the same general direction with respect to the hair.

[0050] The brushing, shaping and styling effects may be enhanced by using the heat apparatus associated with exemplary embodiments of the brush. Specifically, the hot air fan assembly **44** or the heating rod may be activated to heat the cylinder **24** as it rotates. Additionally or alternatively, the heatable smoothing plates **108, 115, 208** or **412** of the brush heads **100, 110, 200** or **400** may be heated. The heat applied to the hair by the cylinder **24** and/or the brush heads **100, 110, 200** or **400** not only allows the hair to dry more quickly, but also provides the hair with smoothing volume and a healthy shine.

[0051] With reference to **FIGs. 8A-8C**, if a user wants to use the device as a curling iron or a flat iron, a compression force generally perpendicularly to the smoothing plate **108** may be applied to the blade **105** to place the bristles **106** in the collapsed position. In the collapsed position, the bristles **106** of the brush head are retracted with respect to the smoothing plate **108**, i.e. recessed within or flush with the smoothing plate. Accordingly, the smoothing plate will have a smooth surface which, along with heat provided through the cylinder **24** and/or through the brush head, allows the device to be used as a smoothing, straightening or curling iron. In an alternate embodiment with reference to **FIGs. 9A-9C**, the user slides the release knob **111** distally along the slot **133** from position **111a** to position **111b** such that the spine **134** of the blade **113** does not make contact with the hull **116** of the release knob **111.** Then, the user can apply a compression force to the blade **113** to cause ends of the bristles **114** to be retracted with respect to the smoothing plate.

[0052] With reference to **FIGs. 11 and 12**, the combination of bristle clusters **408** fixed in relationship to the heated flat iron section **412** allows the user to simultaneously brush and smooth, straighten or curl hair without having to change a configuration of the brush head **400**.

[0053] Various embodiments of brush heads, cylinders, and configurations of the hair brush have been described herein and, as will be appreciated by one of ordinary skill in the art, different brush heads and/or blades may be used with the different hair styling tools. Moreover, additional interchangeable brush heads or blades may be provided as a kit along with the base hair styling tool. Additionally, although specific means and configurations have been described, it will be appreciated that modifications may be made to such means and configurations while still remaining within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A hair styling tool comprising:

a body;

a cylinder extending from the body, the cylinder rotatable relative to the body;

a motor adapted to rotate the cylinder; and

a styling arm attached to the body, the styling arm adapted to make contact with the cylinder, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder.

2. The hair styling tool of claim 1, wherein the styling arm includes a smoothing plate.

3. The hair styling tool of claim 1, wherein the styling arm includes a brush head.

4. The hair styling tool of claim 3, the brush head further comprising:

a smoothing plate; and

a plurality of bristles movable between an extended position in which the bristles protrude past the smoothing plate and a collapsed position in which the bristles are retracted with respect to the smoothing plate.

5. The hair styling tool of claim 4 wherein the brush head further comprises a blade from which the plurality of bristles extend.

6. The hair styling tool of claim 1, further comprising a heater adapted to heat the cylinder.

7. A hair styling tool comprising:

a body;

a cylinder extending from the body, the cylinder rotatable relative to the body;

a motor adapted to rotate the cylinder;

a styling arm pivotally attached to the body such that the hair styling tool has a generally hinged configuration, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder, the styling arm including a brush head.

8. The hair styling tool of claim 7, further comprising a heater to heat the cylinder.

9. The hair styling tool of claim 8, wherein the cylinder has surface holes to dissipate heat.

10. The hair styling tool of claim 7, wherein the brush head includes a smoothing plate and bristles, the bristles movable between an extended position in which the bristles protrude past the smoothing plate and a collapsed position in which the bristles are retracted with respect to the smoothing plate.

11. The hair styling tool of claim 10, the brush head further comprising a blade from which the bristles extend.

12. The hair styling tool of claim 11, wherein the brush head further comprises a bristle release knob having first and second knob positions, wherein the bristle release knob is adapted to contact the blade and move the bristles into the extended position when in the first knob position, and move the bristles into the collapsed position when in the second knob position.

13. The hair styling tool of claim 7, wherein the cylinder has grooves.

14. A hair styling tool comprising:
a body;
a cylinder extending from the body, the cylinder rotatable relative to the body;
a motor adapted to rotate the cylinder;
a heater to heat the cylinder; and
a styling arm pivotally attached to the body, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder, the styling arm including a smoothing plate.

15. The hair styling tool of claim 14, wherein the cylinder has grooves.

16. The hair styling tool of claim 14, wherein the cylinder has surface holes to dissipate heat.

17. The hair styling tool of claim 14, wherein the smoothing plate is removable.

18. The hair styling tool of claim 14, the smoothing plate further including a plurality of bristles.

19. The hair styling tool of claim 18 wherein the bristles are retractable with respect to the smoothing plate.

20. A hair styling tool comprising:
a body;
a cylinder extending from the body, the cylinder rotatable relative to the body;
a motor adapted to rotate the cylinder;
a heater to heat the cylinder; and
a styling arm pivotally attached to the body such that the hair styling tool has a generally hinged configuration, wherein the styling arm is movable between an open position in which the styling arm does not contact the cylinder and a closed position in which the styling arm contacts the cylinder, the styling arm including a brush head having:
a smoothing plate; and
a plurality of bristles, movable between an extended position in which the bristles protrude past the smoothing plate and a collapsed position in which the bristles are retracted with respect to the smoothing plate.

21. The hair styling tool of claim 20, the brush head further comprising a blade from which the bristles extend.

22. The hair styling tool of claim 21 wherein the blade is removable from the brush head.

23. The hair styling tool of claim 22, further comprising a plurality of interchangeable blades, each with a different bristle configuration.

24. The hair styling tool of claim 20, further comprising a plurality of interchangeable brush heads.



27
83
30
28
20
30
32
48
24
30
25
34
50
35
52
41
50
57
42
84
38
71
36
44
22
70
46
39
20
40

FIG. 1

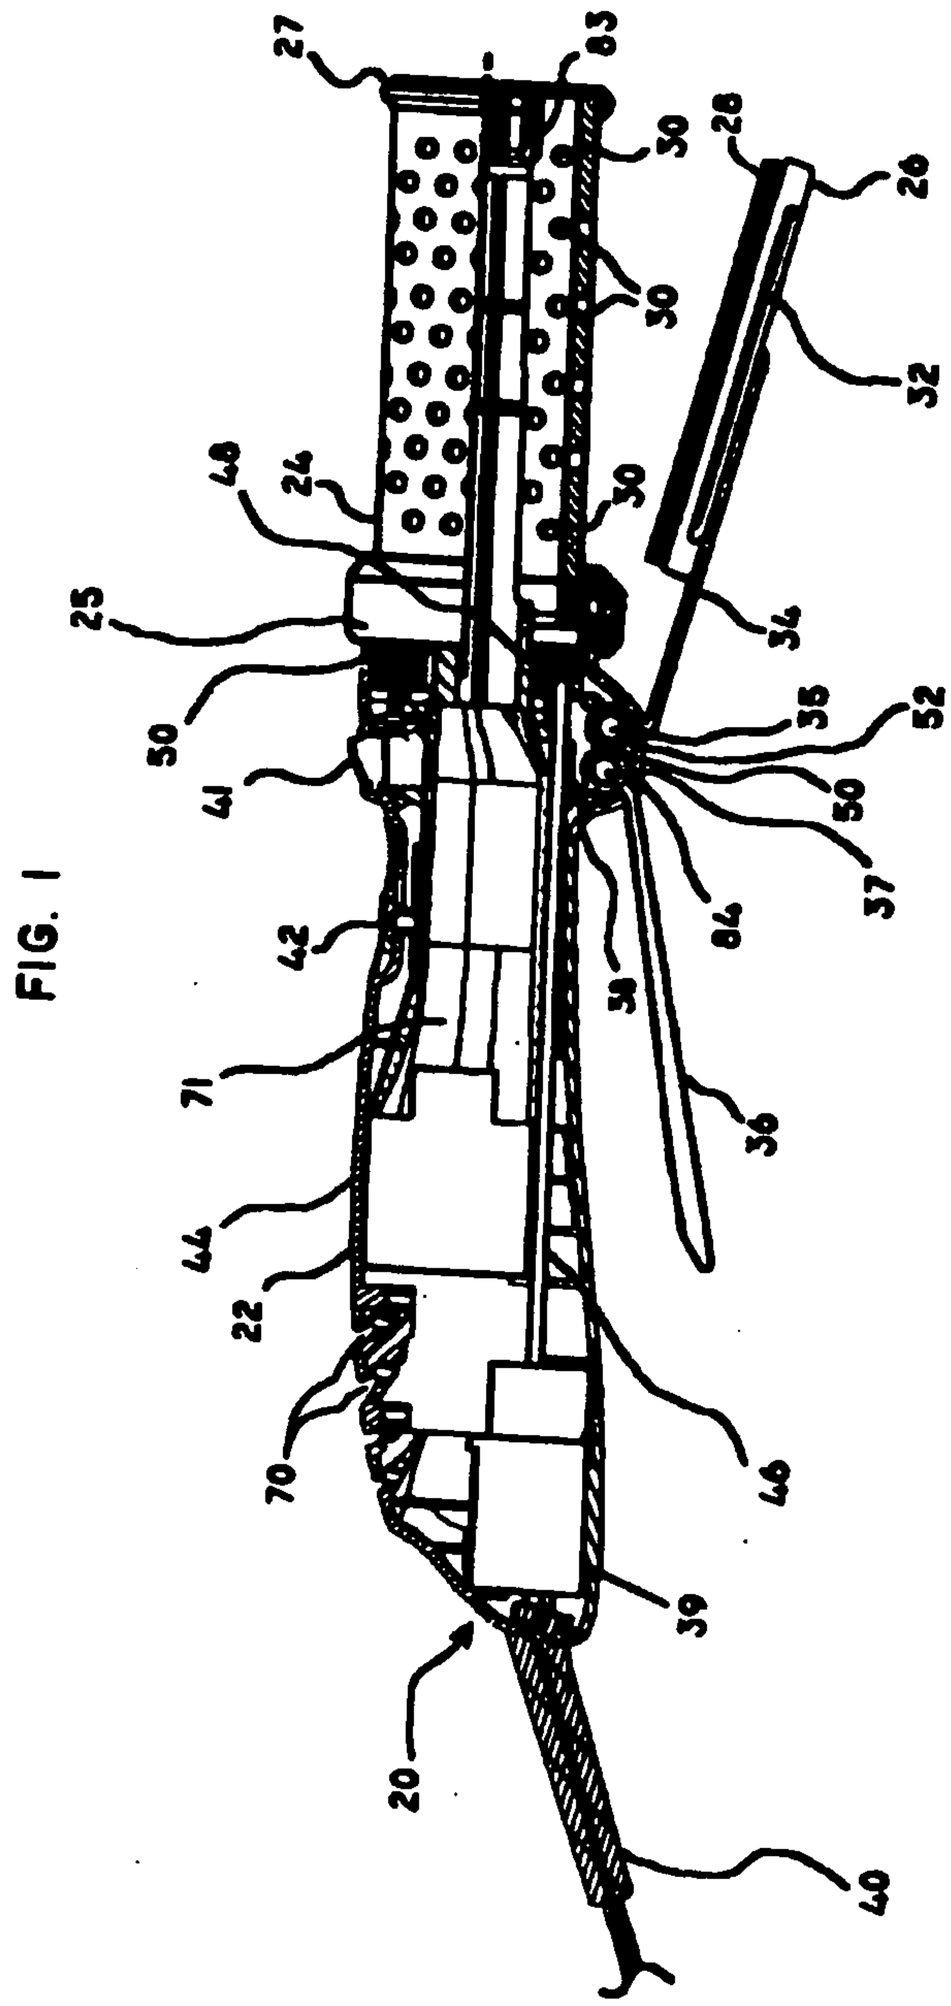FIG. 2

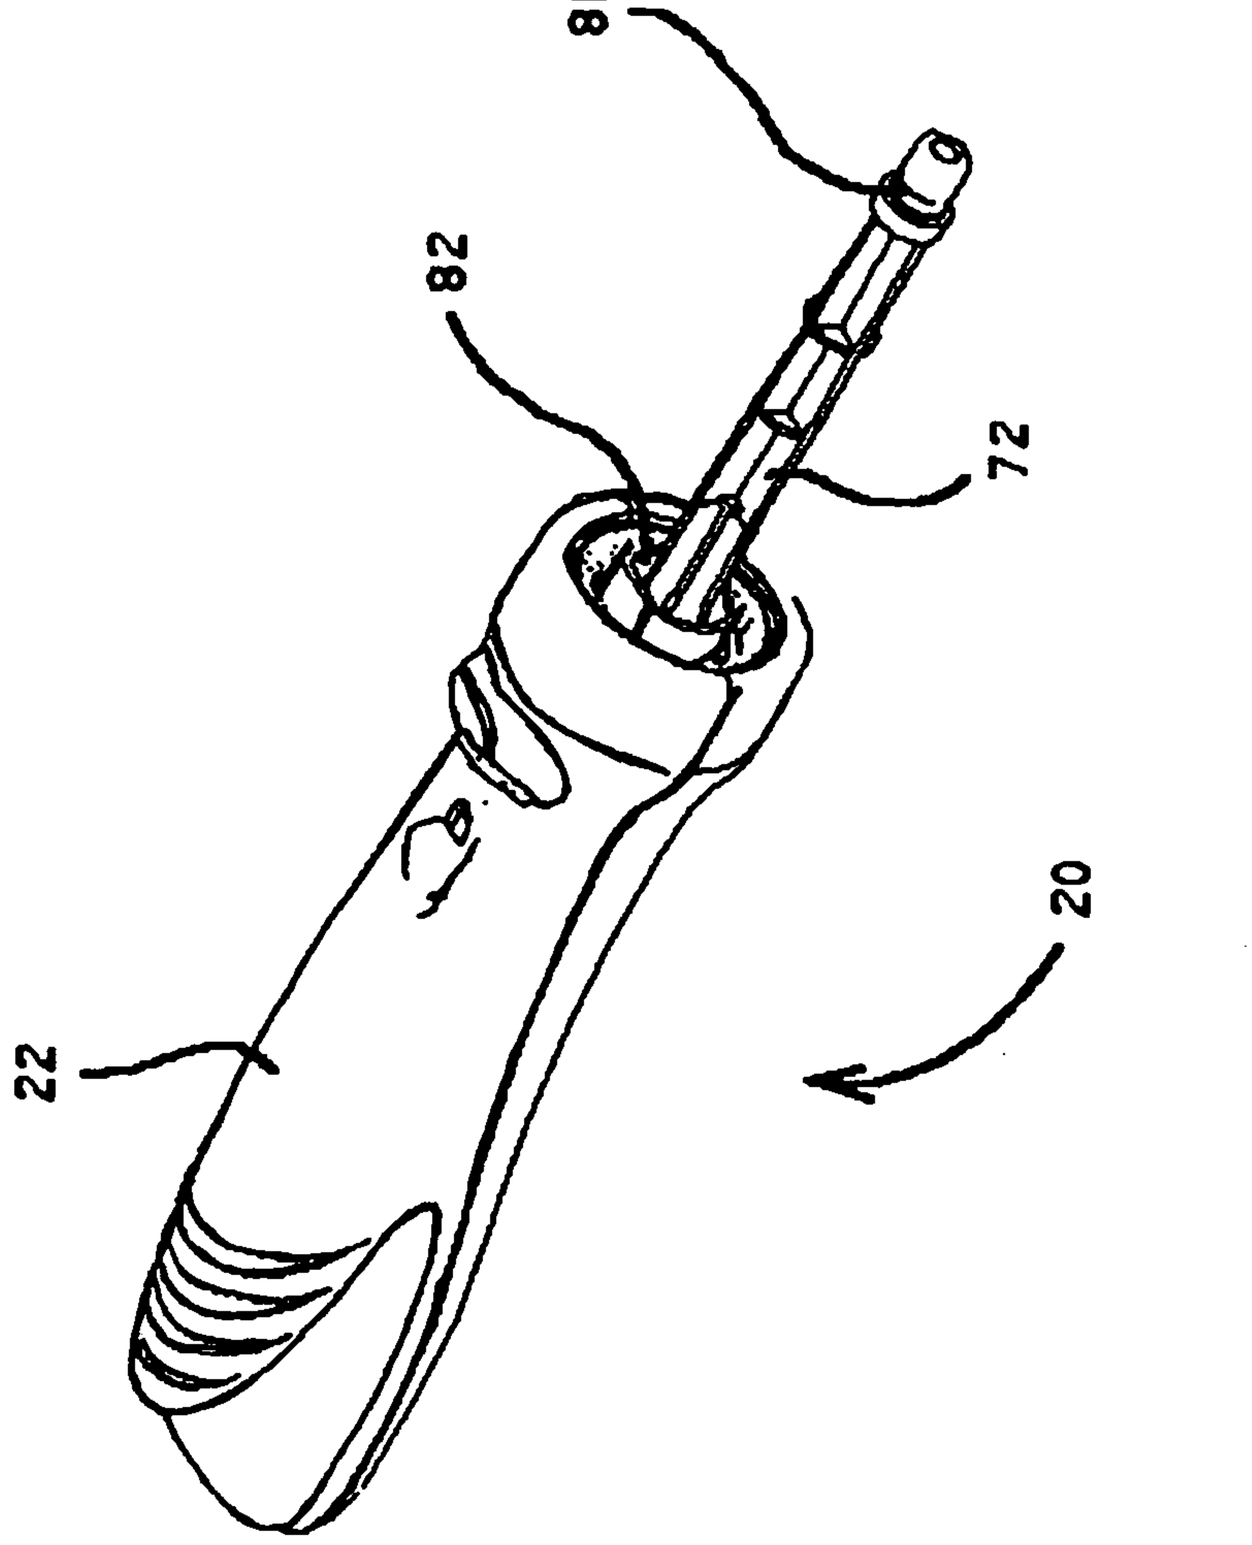


FIG. 3A

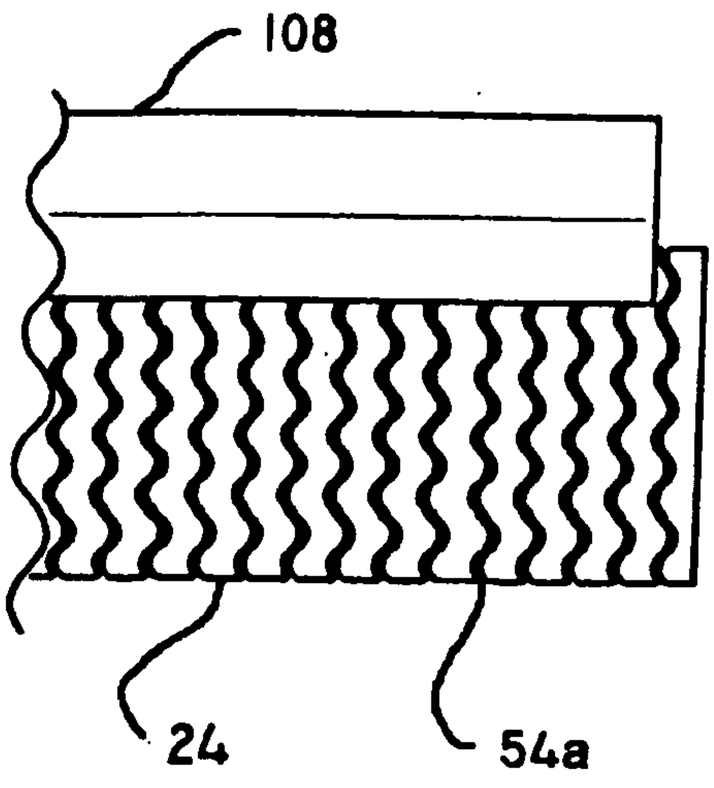


FIG. 3B

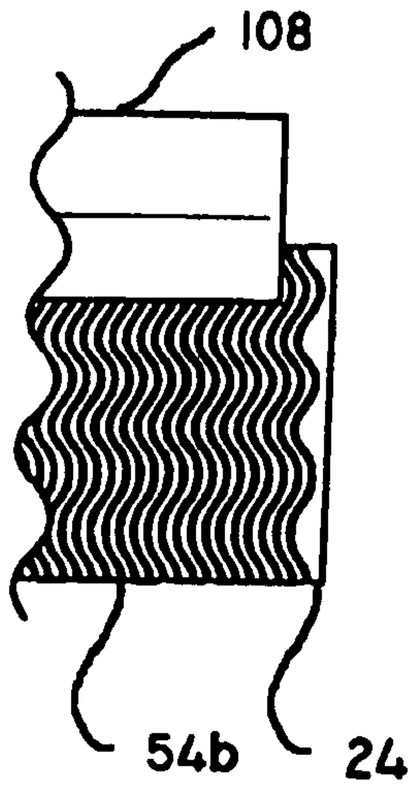


FIG. 3C

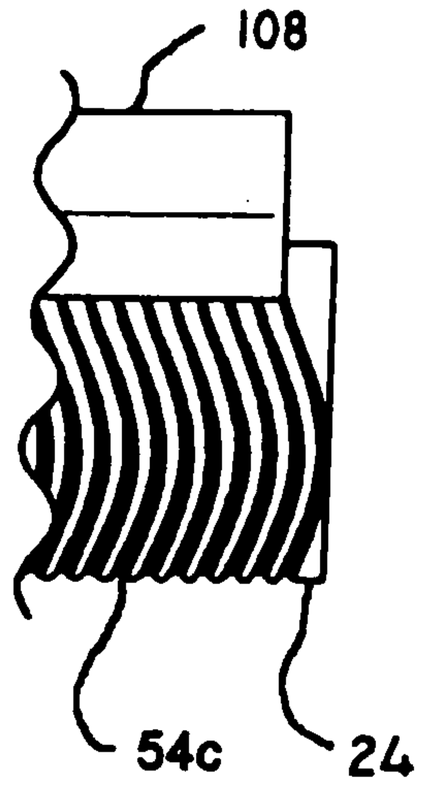


FIG. 3D


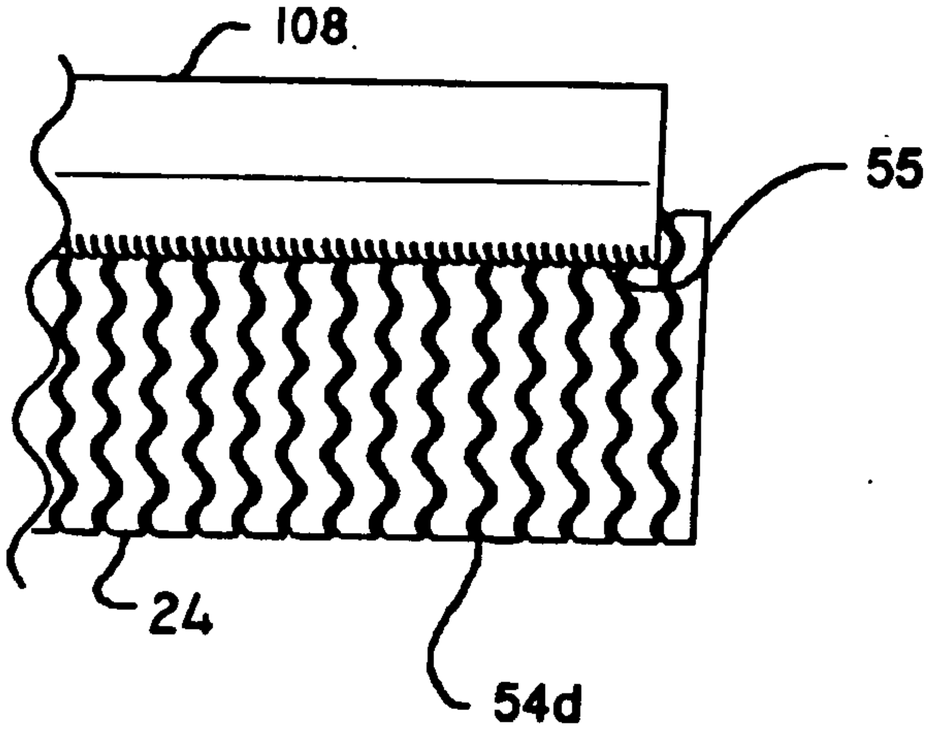


FIG. 4

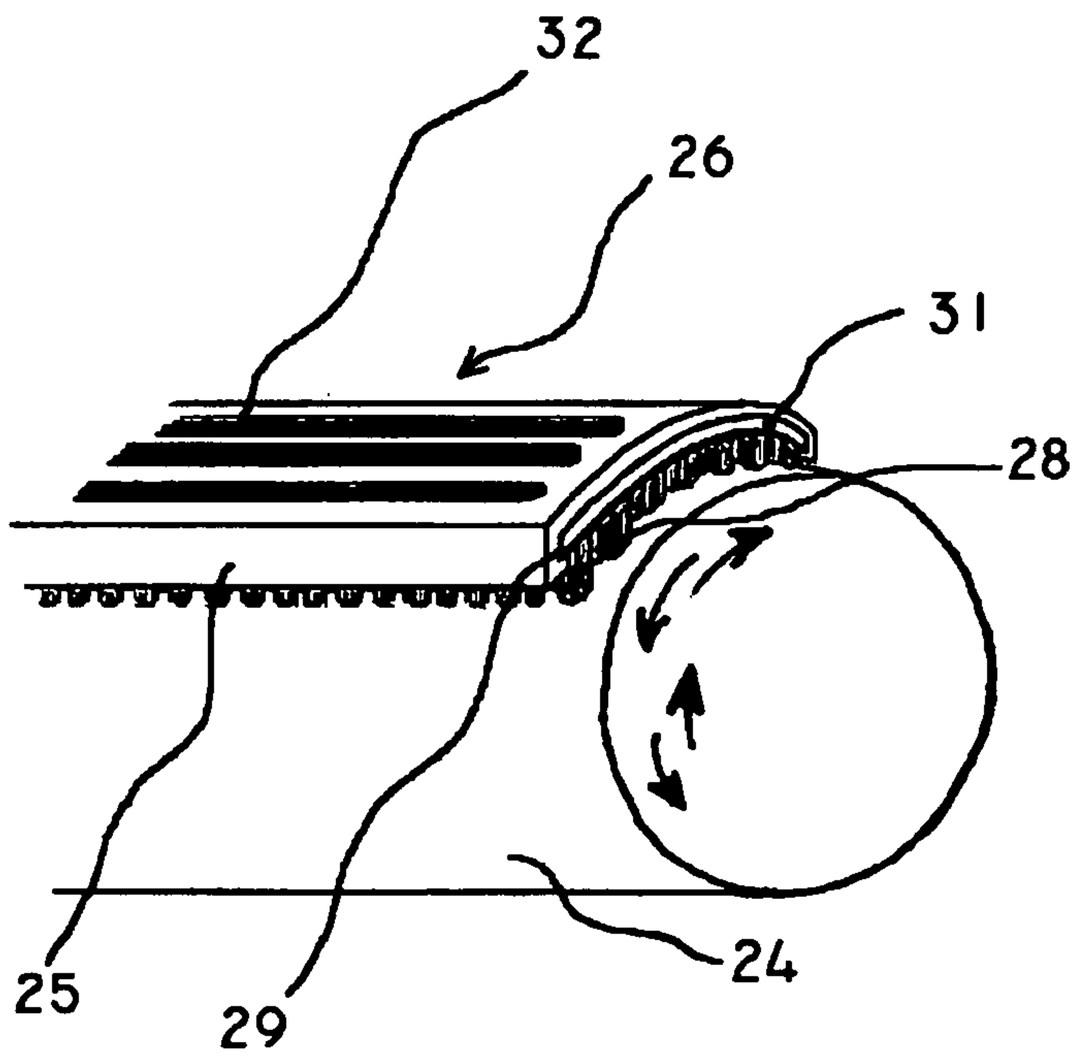

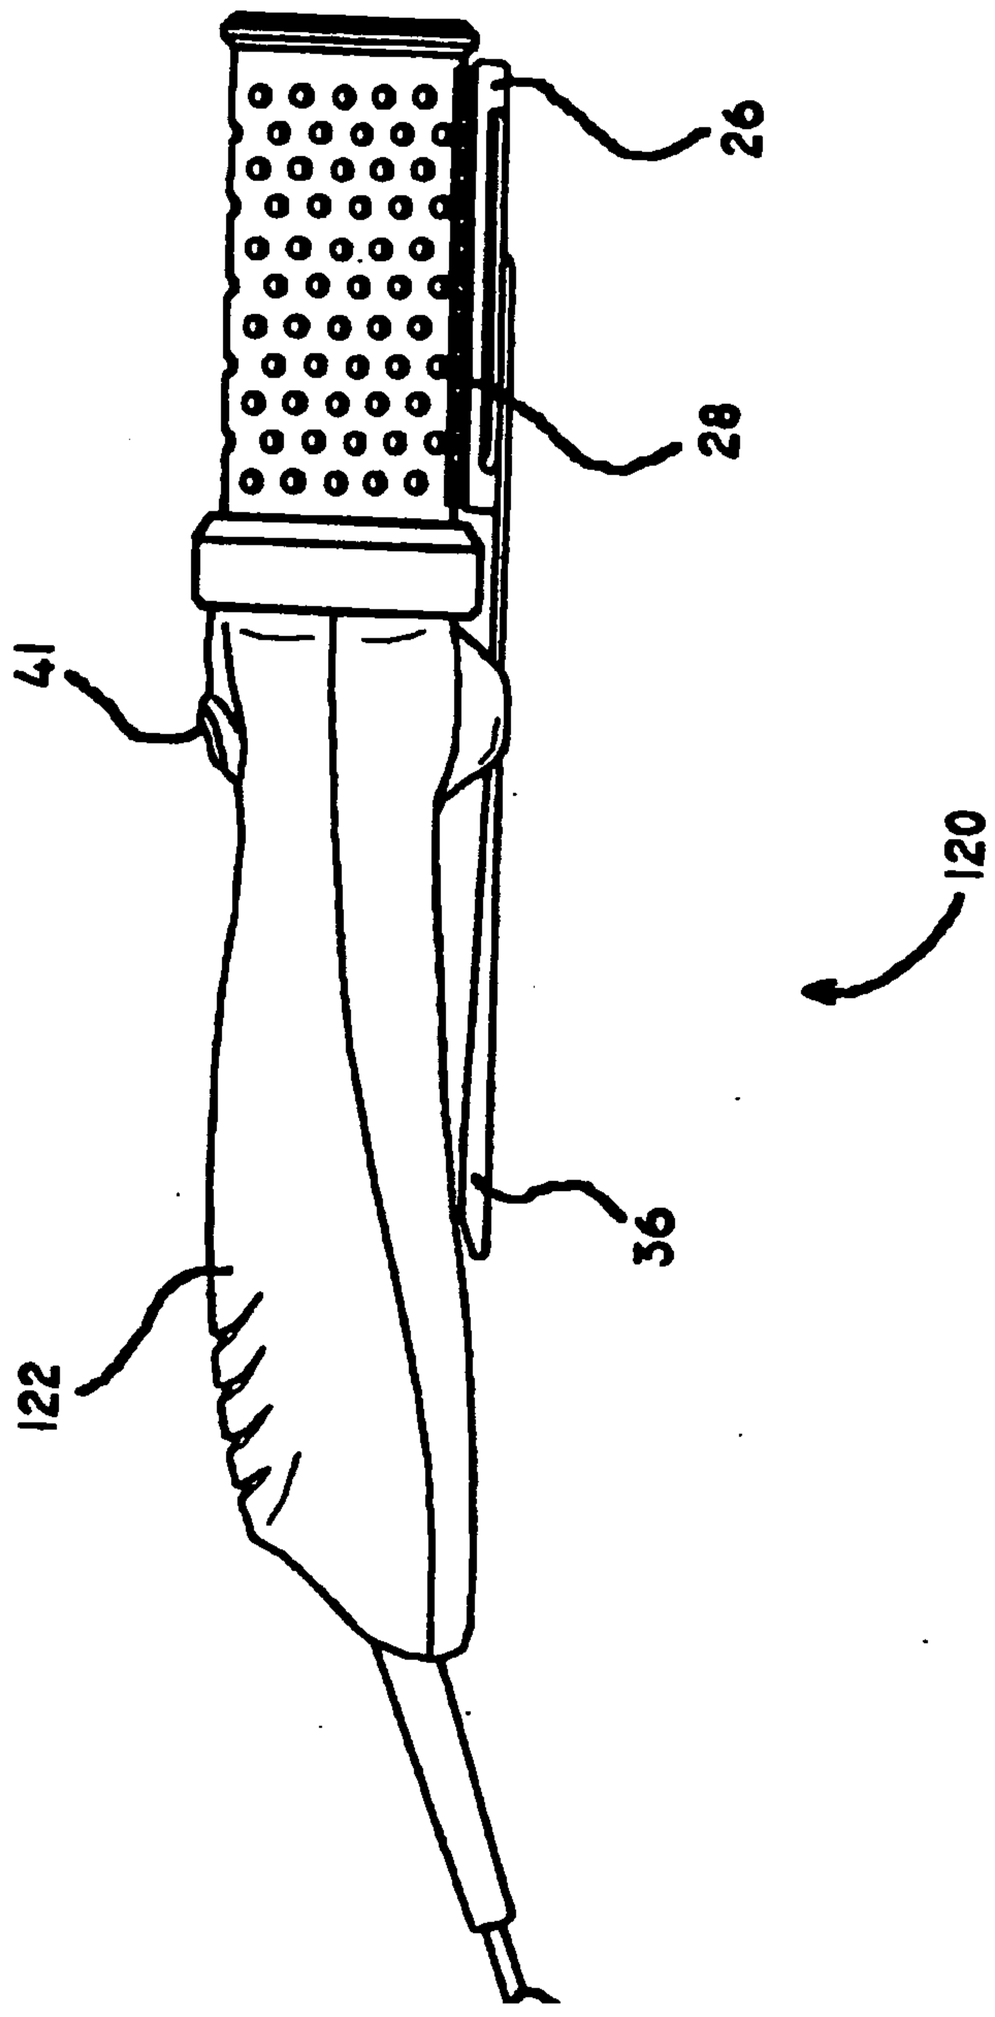


FIG. 5

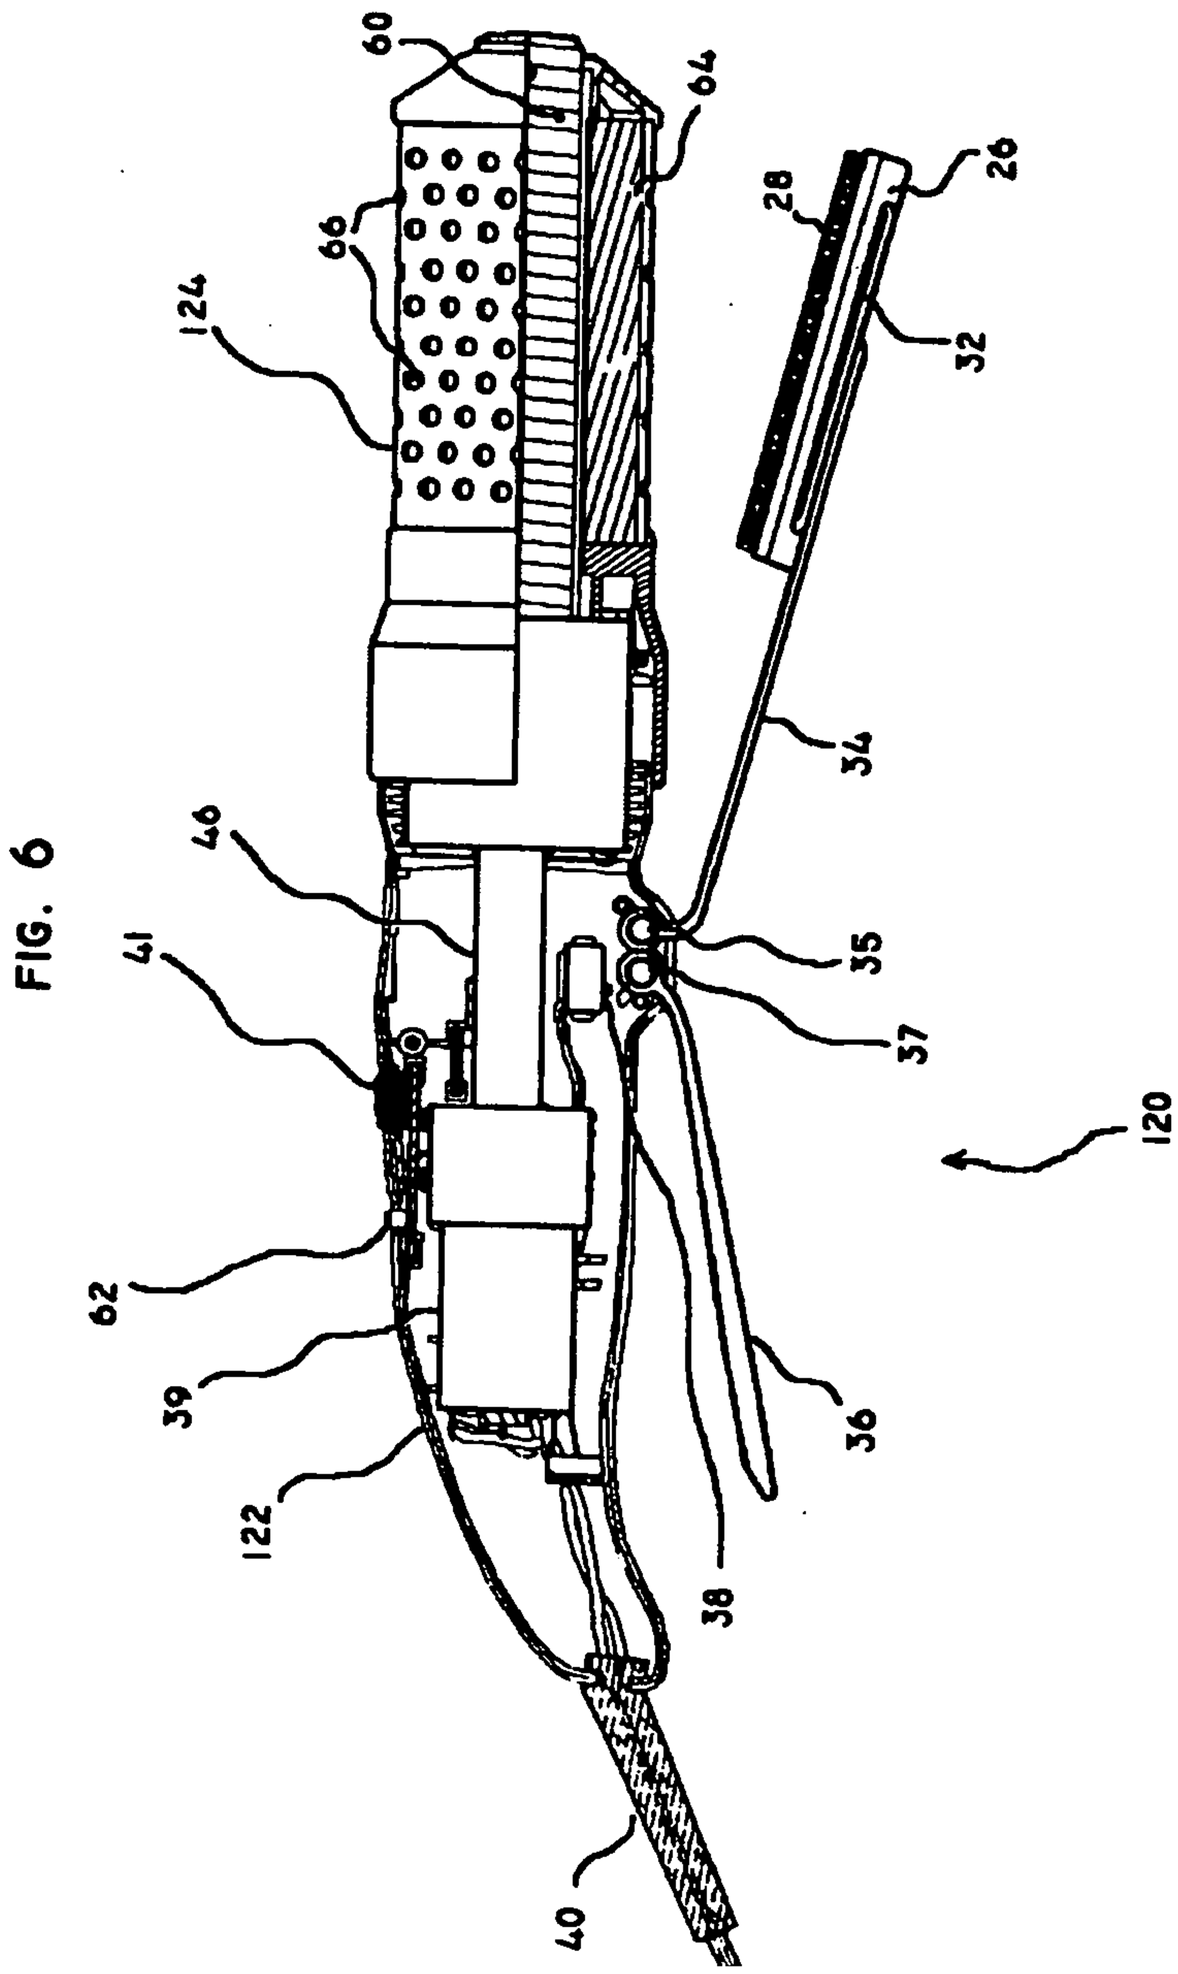


FIG. 6

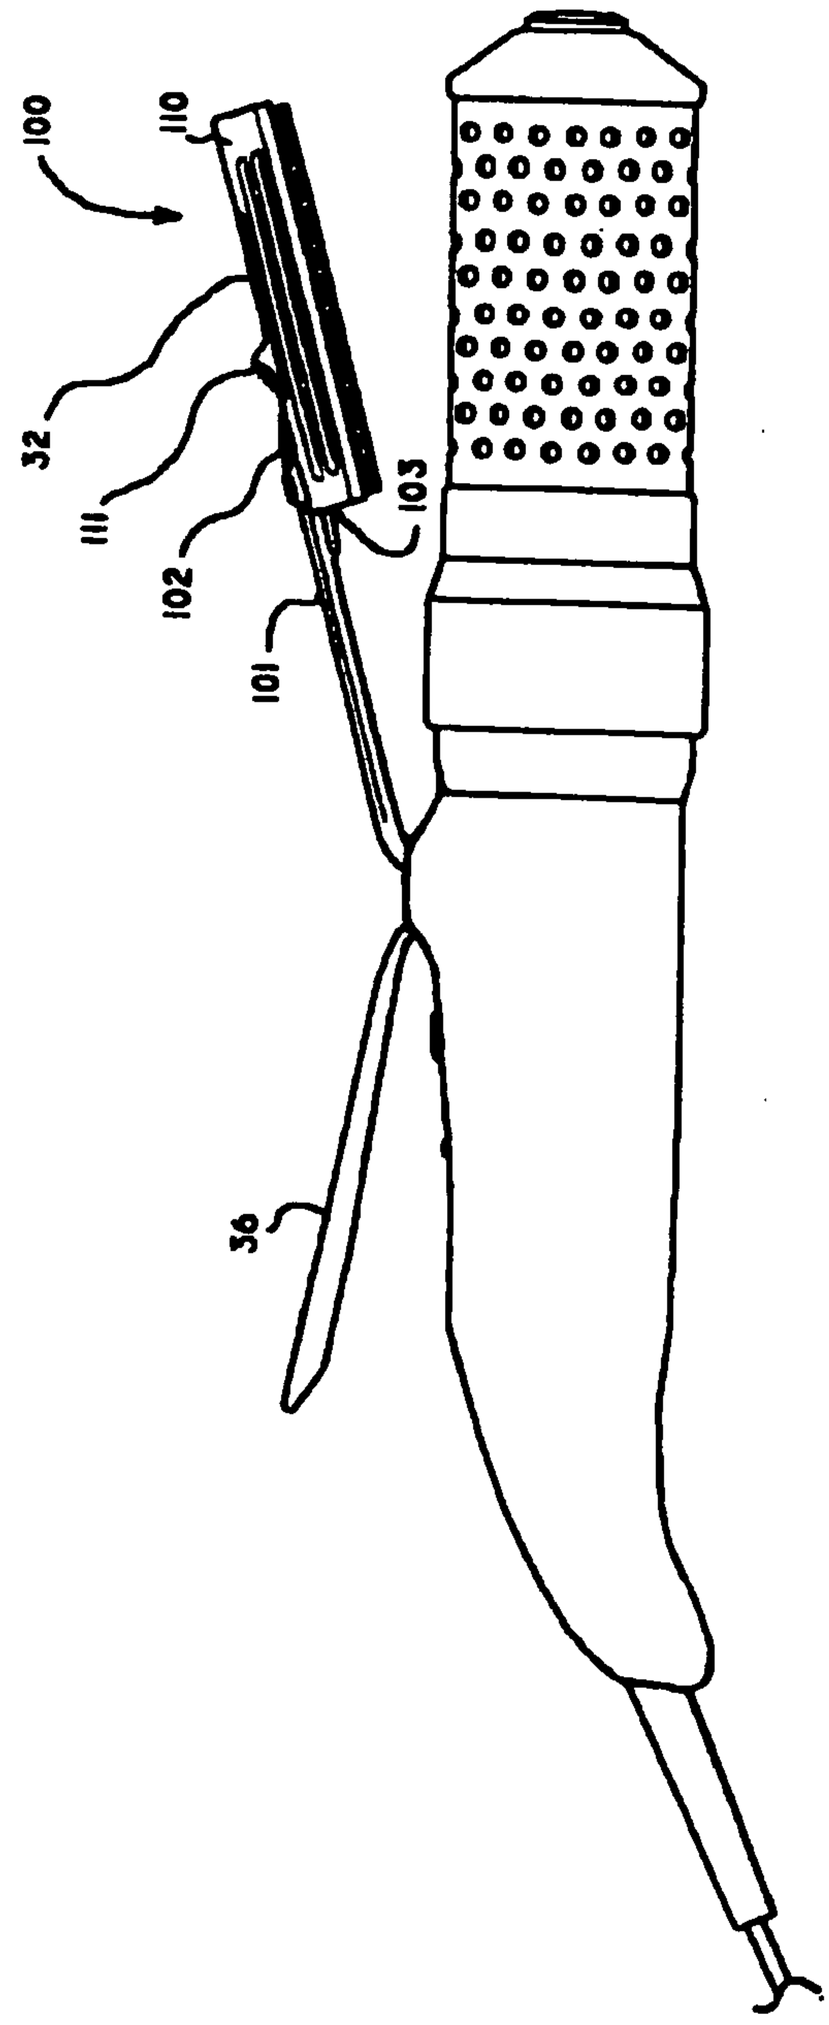


FIG. 7

FIG. 8A

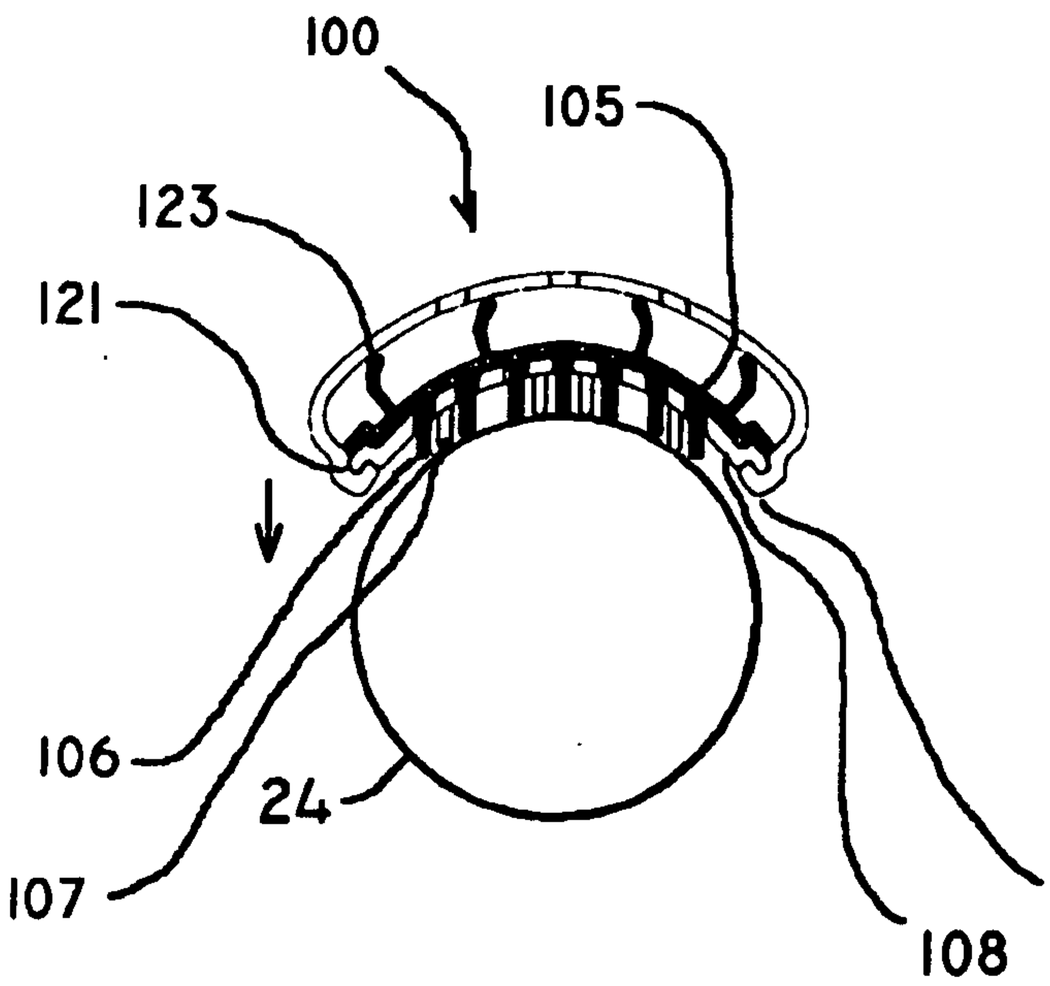


FIG. 8B

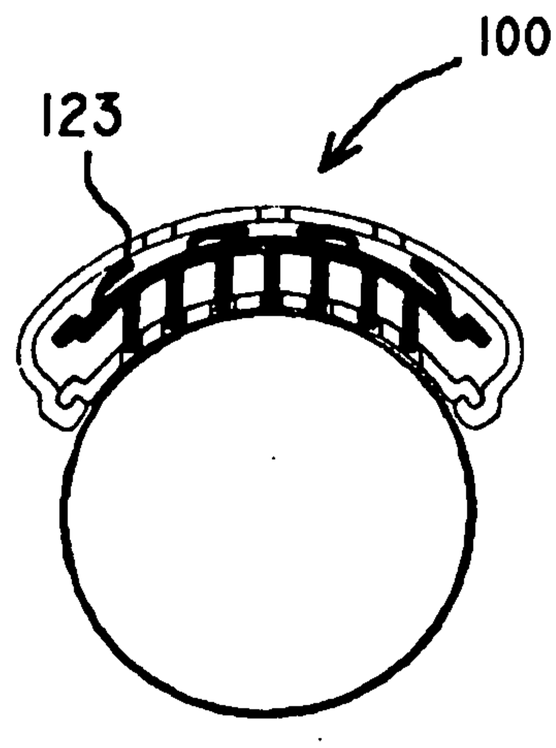


FIG. 8C

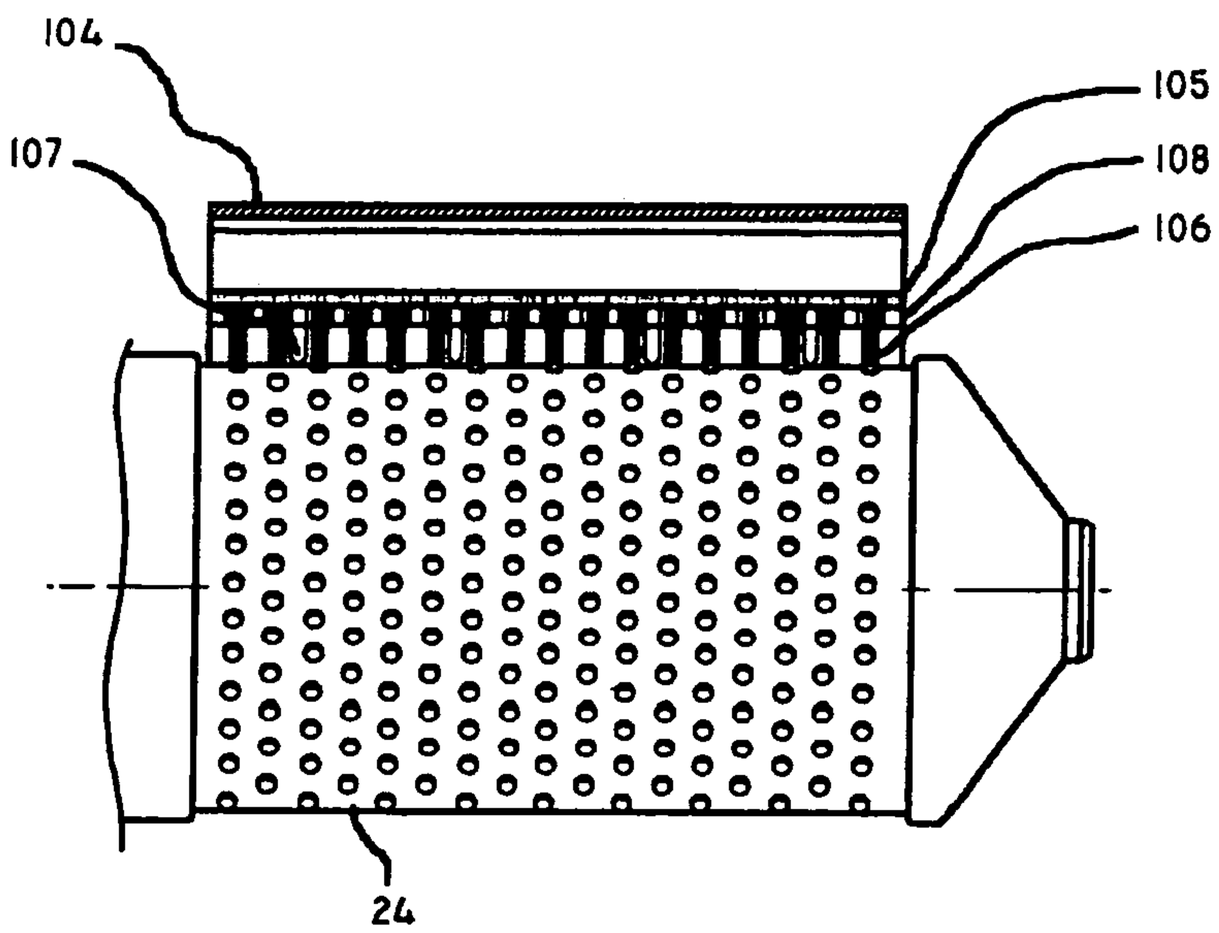


FIG. 8D

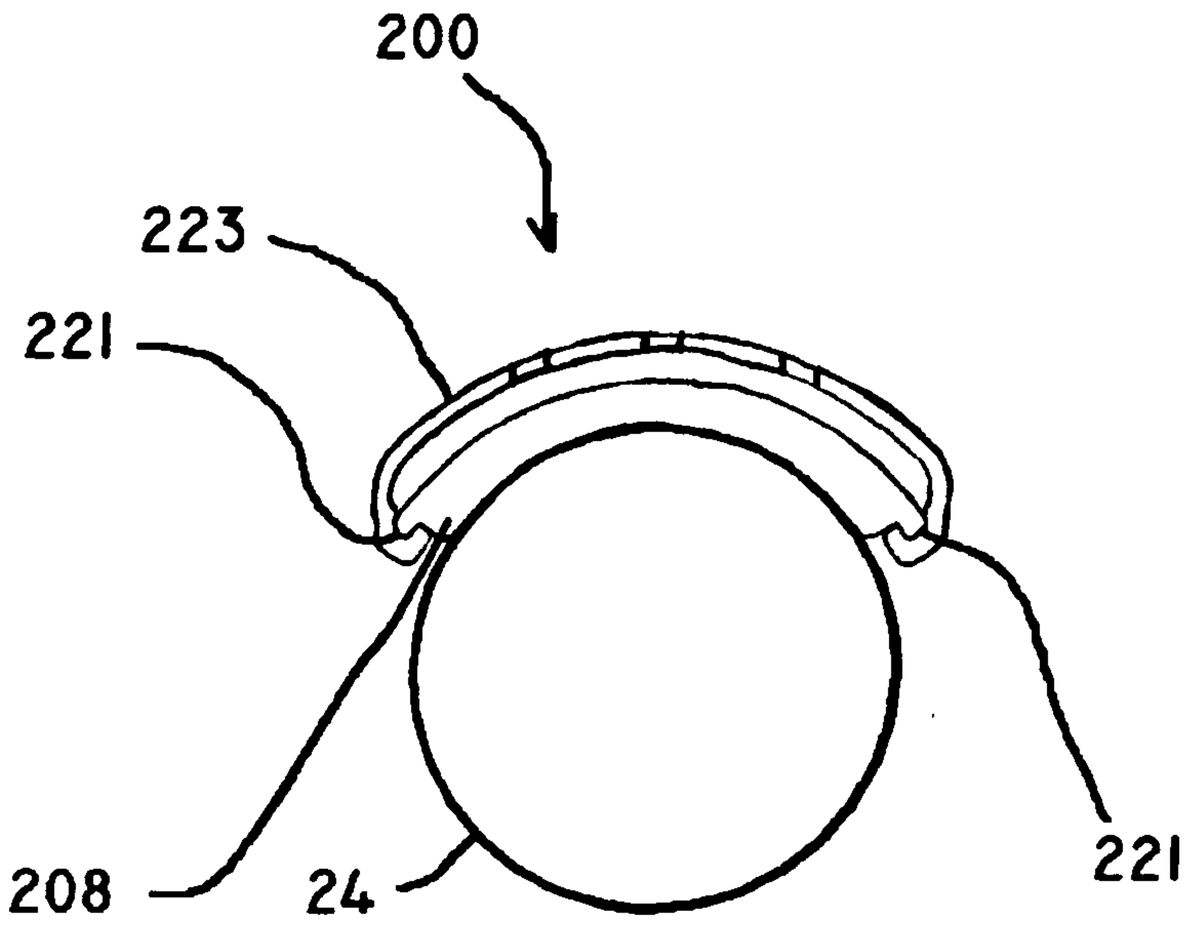


FIG. 9A

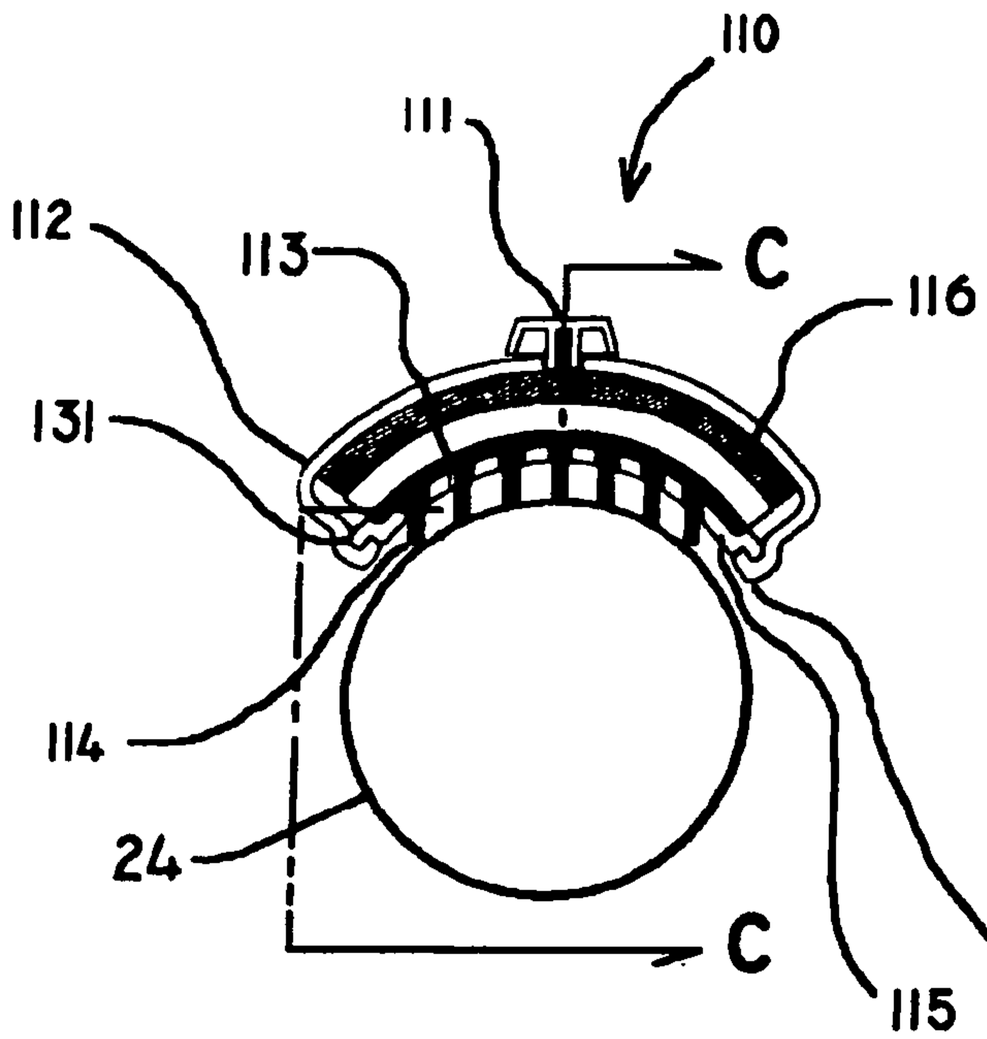


FIG. 9B


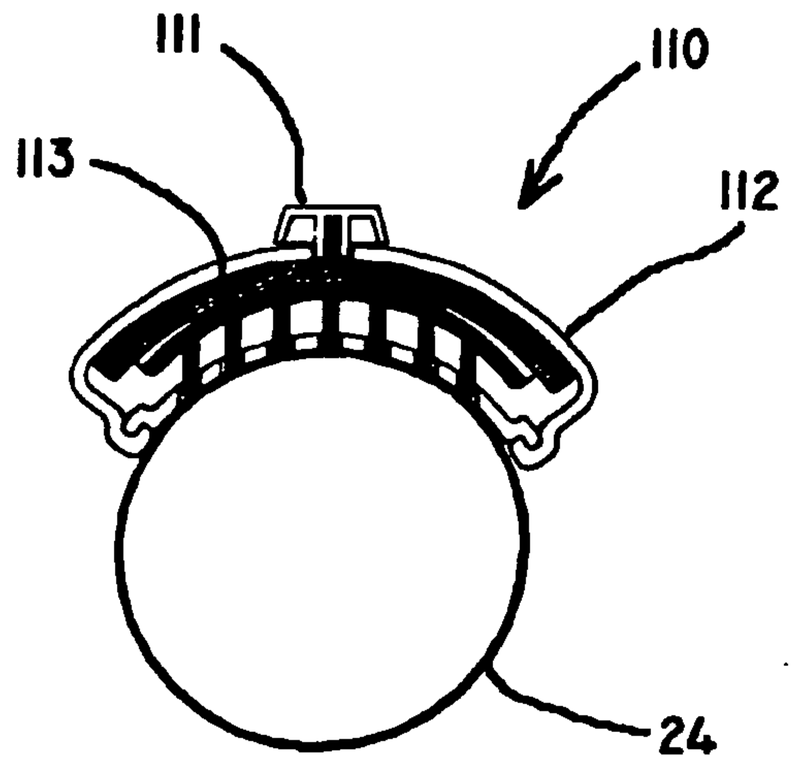


FIG. 9C

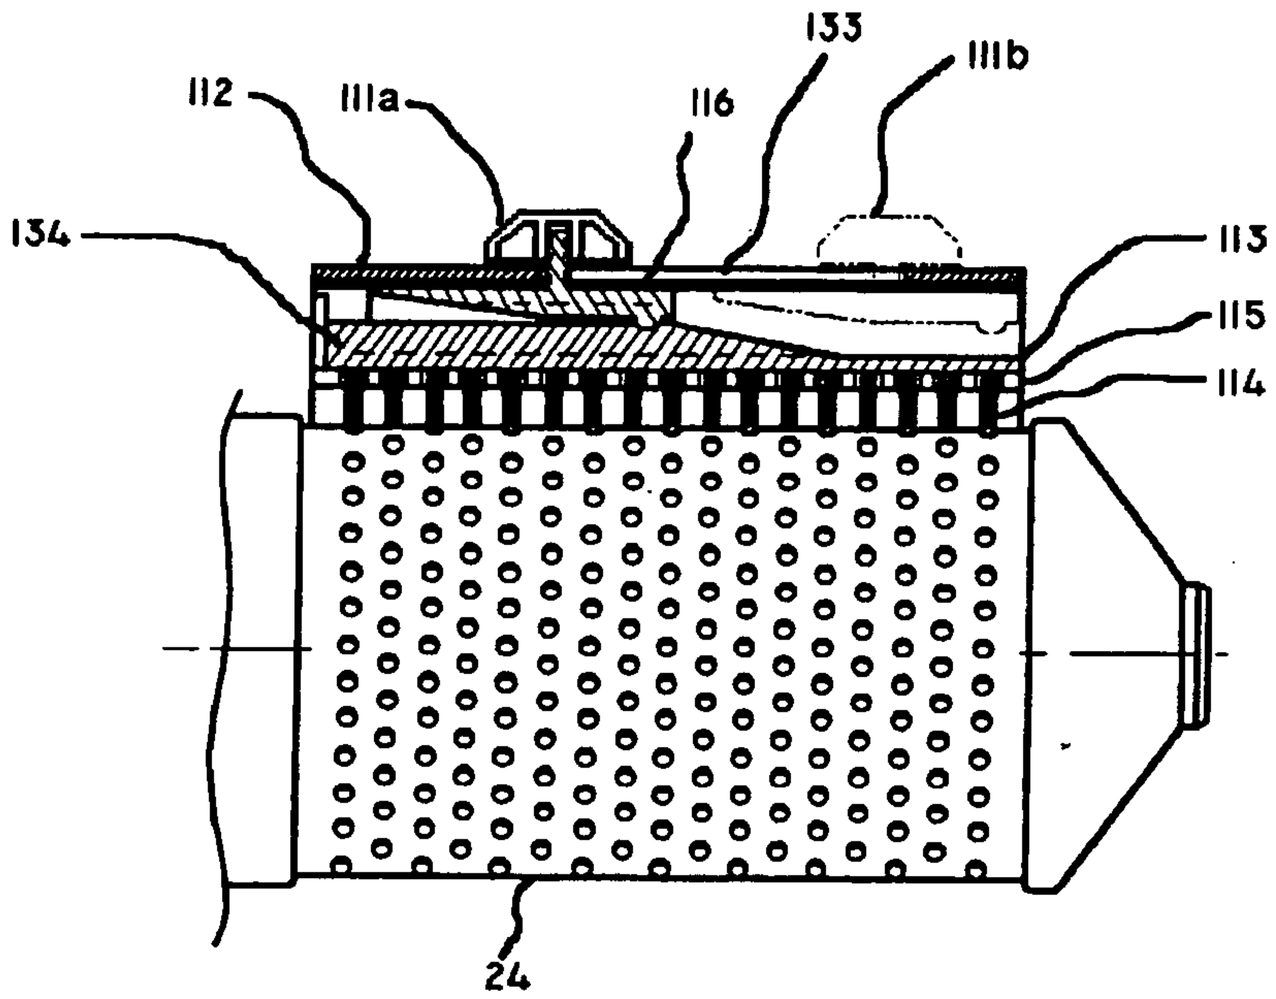

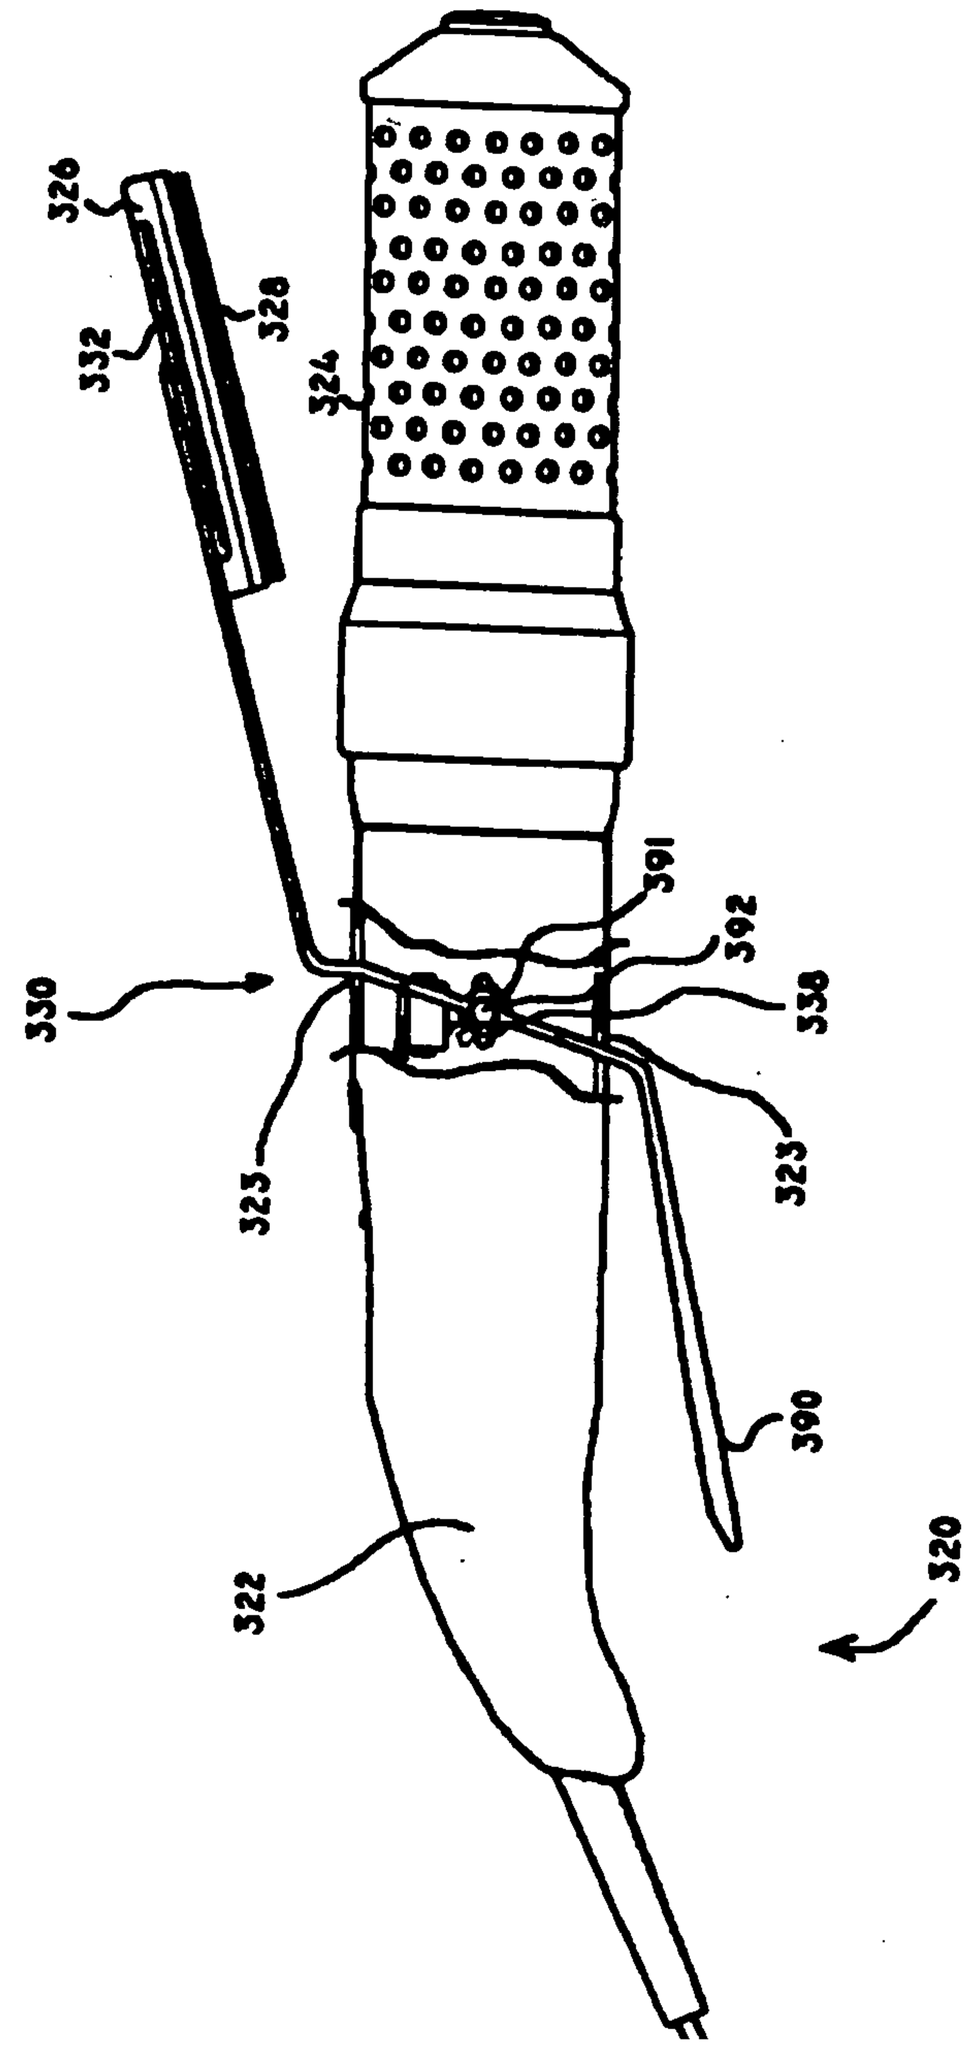


FIG. 10


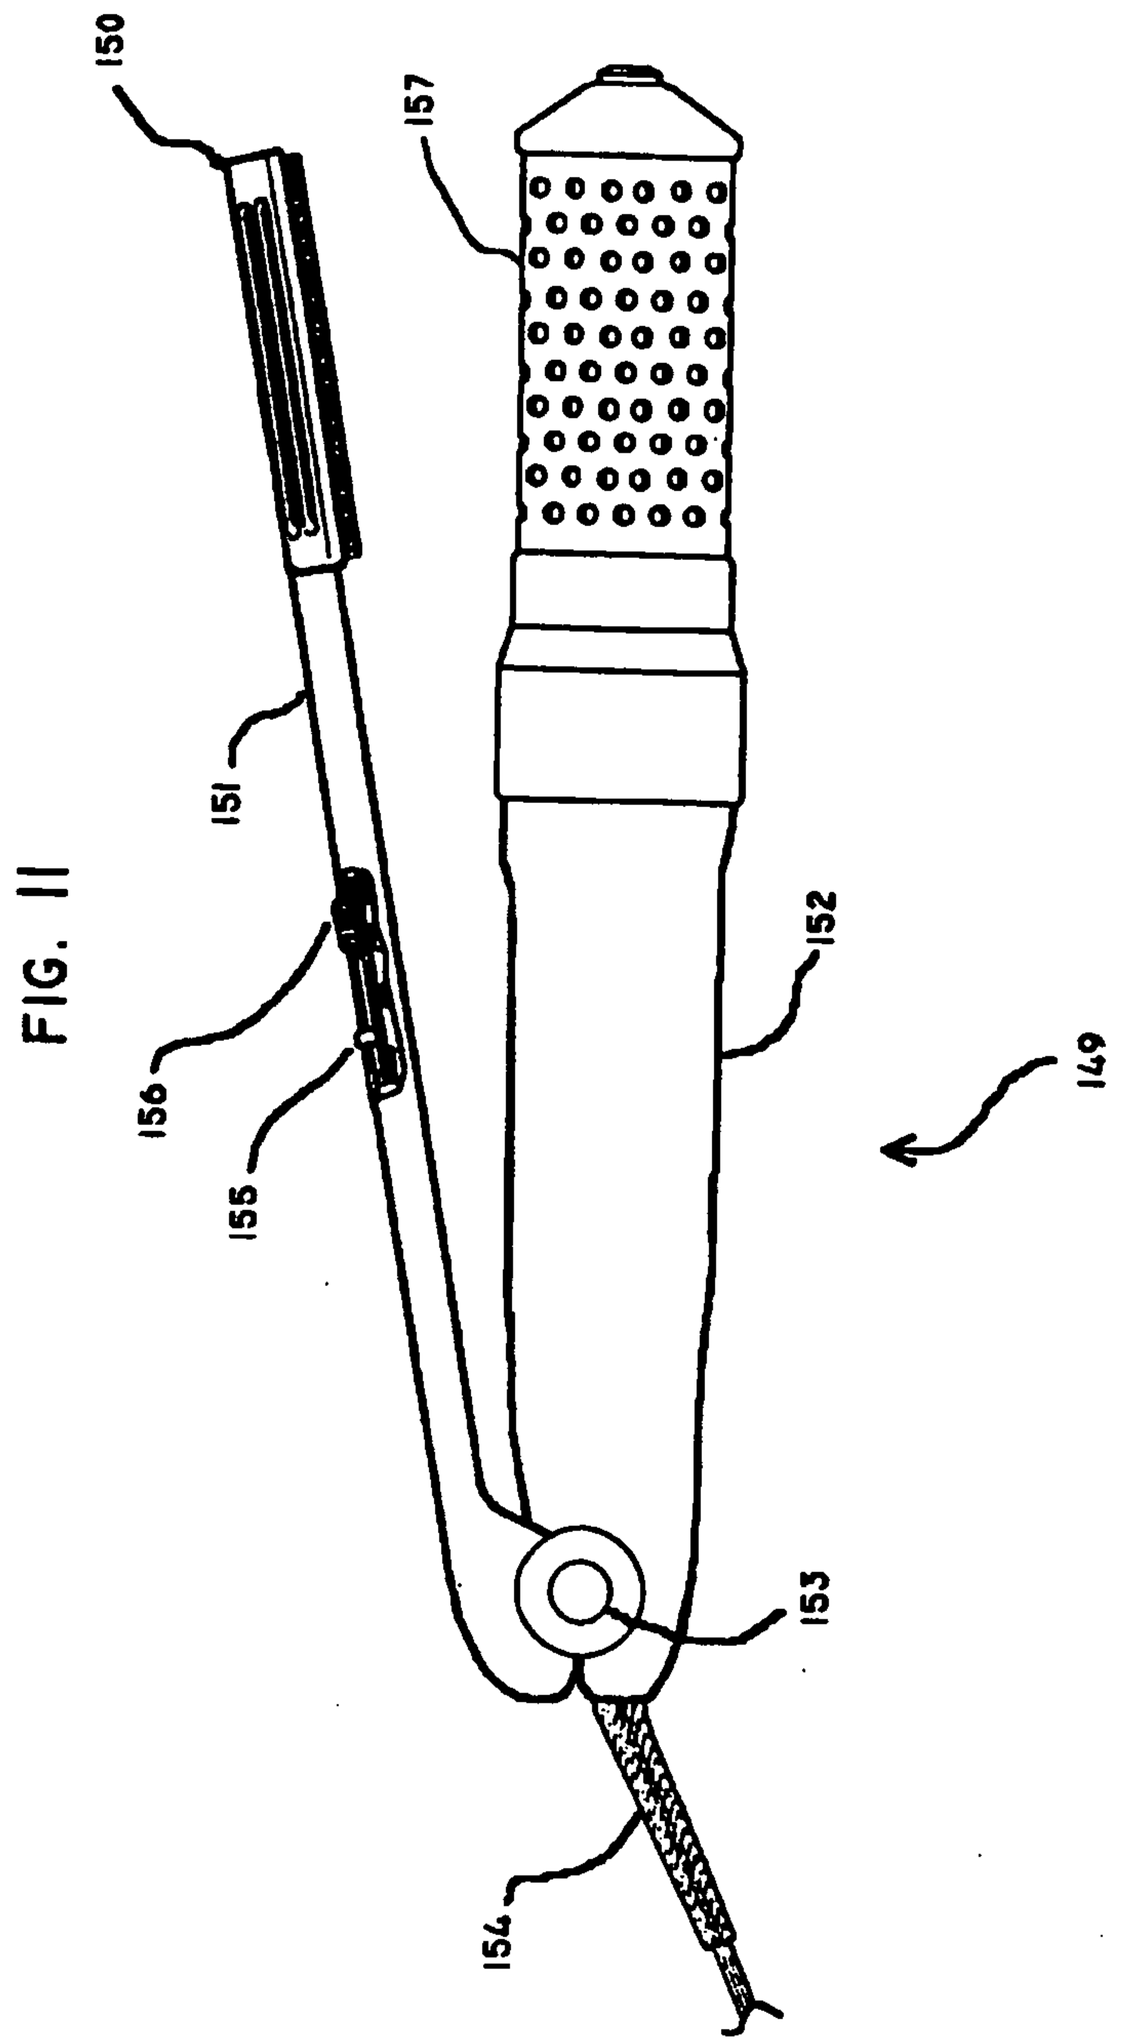
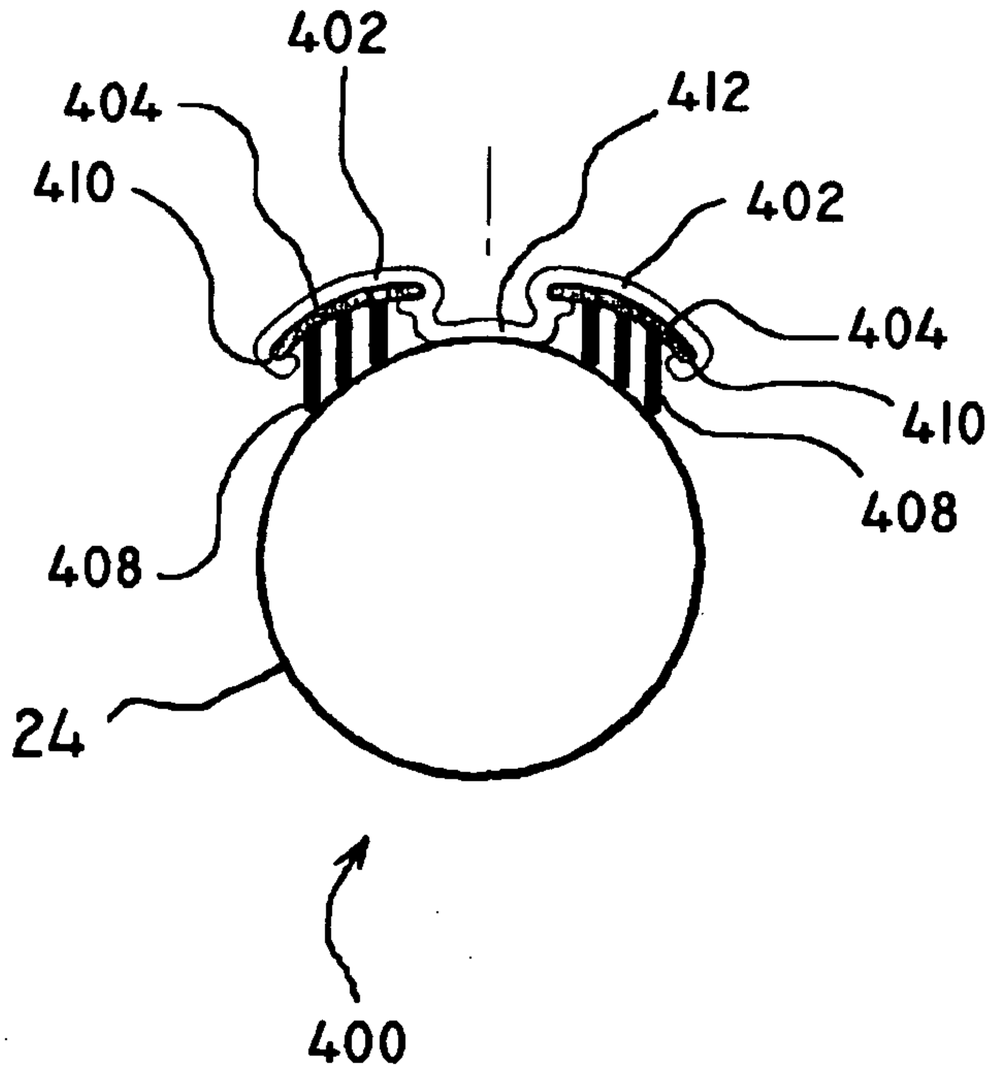


FIG. 11

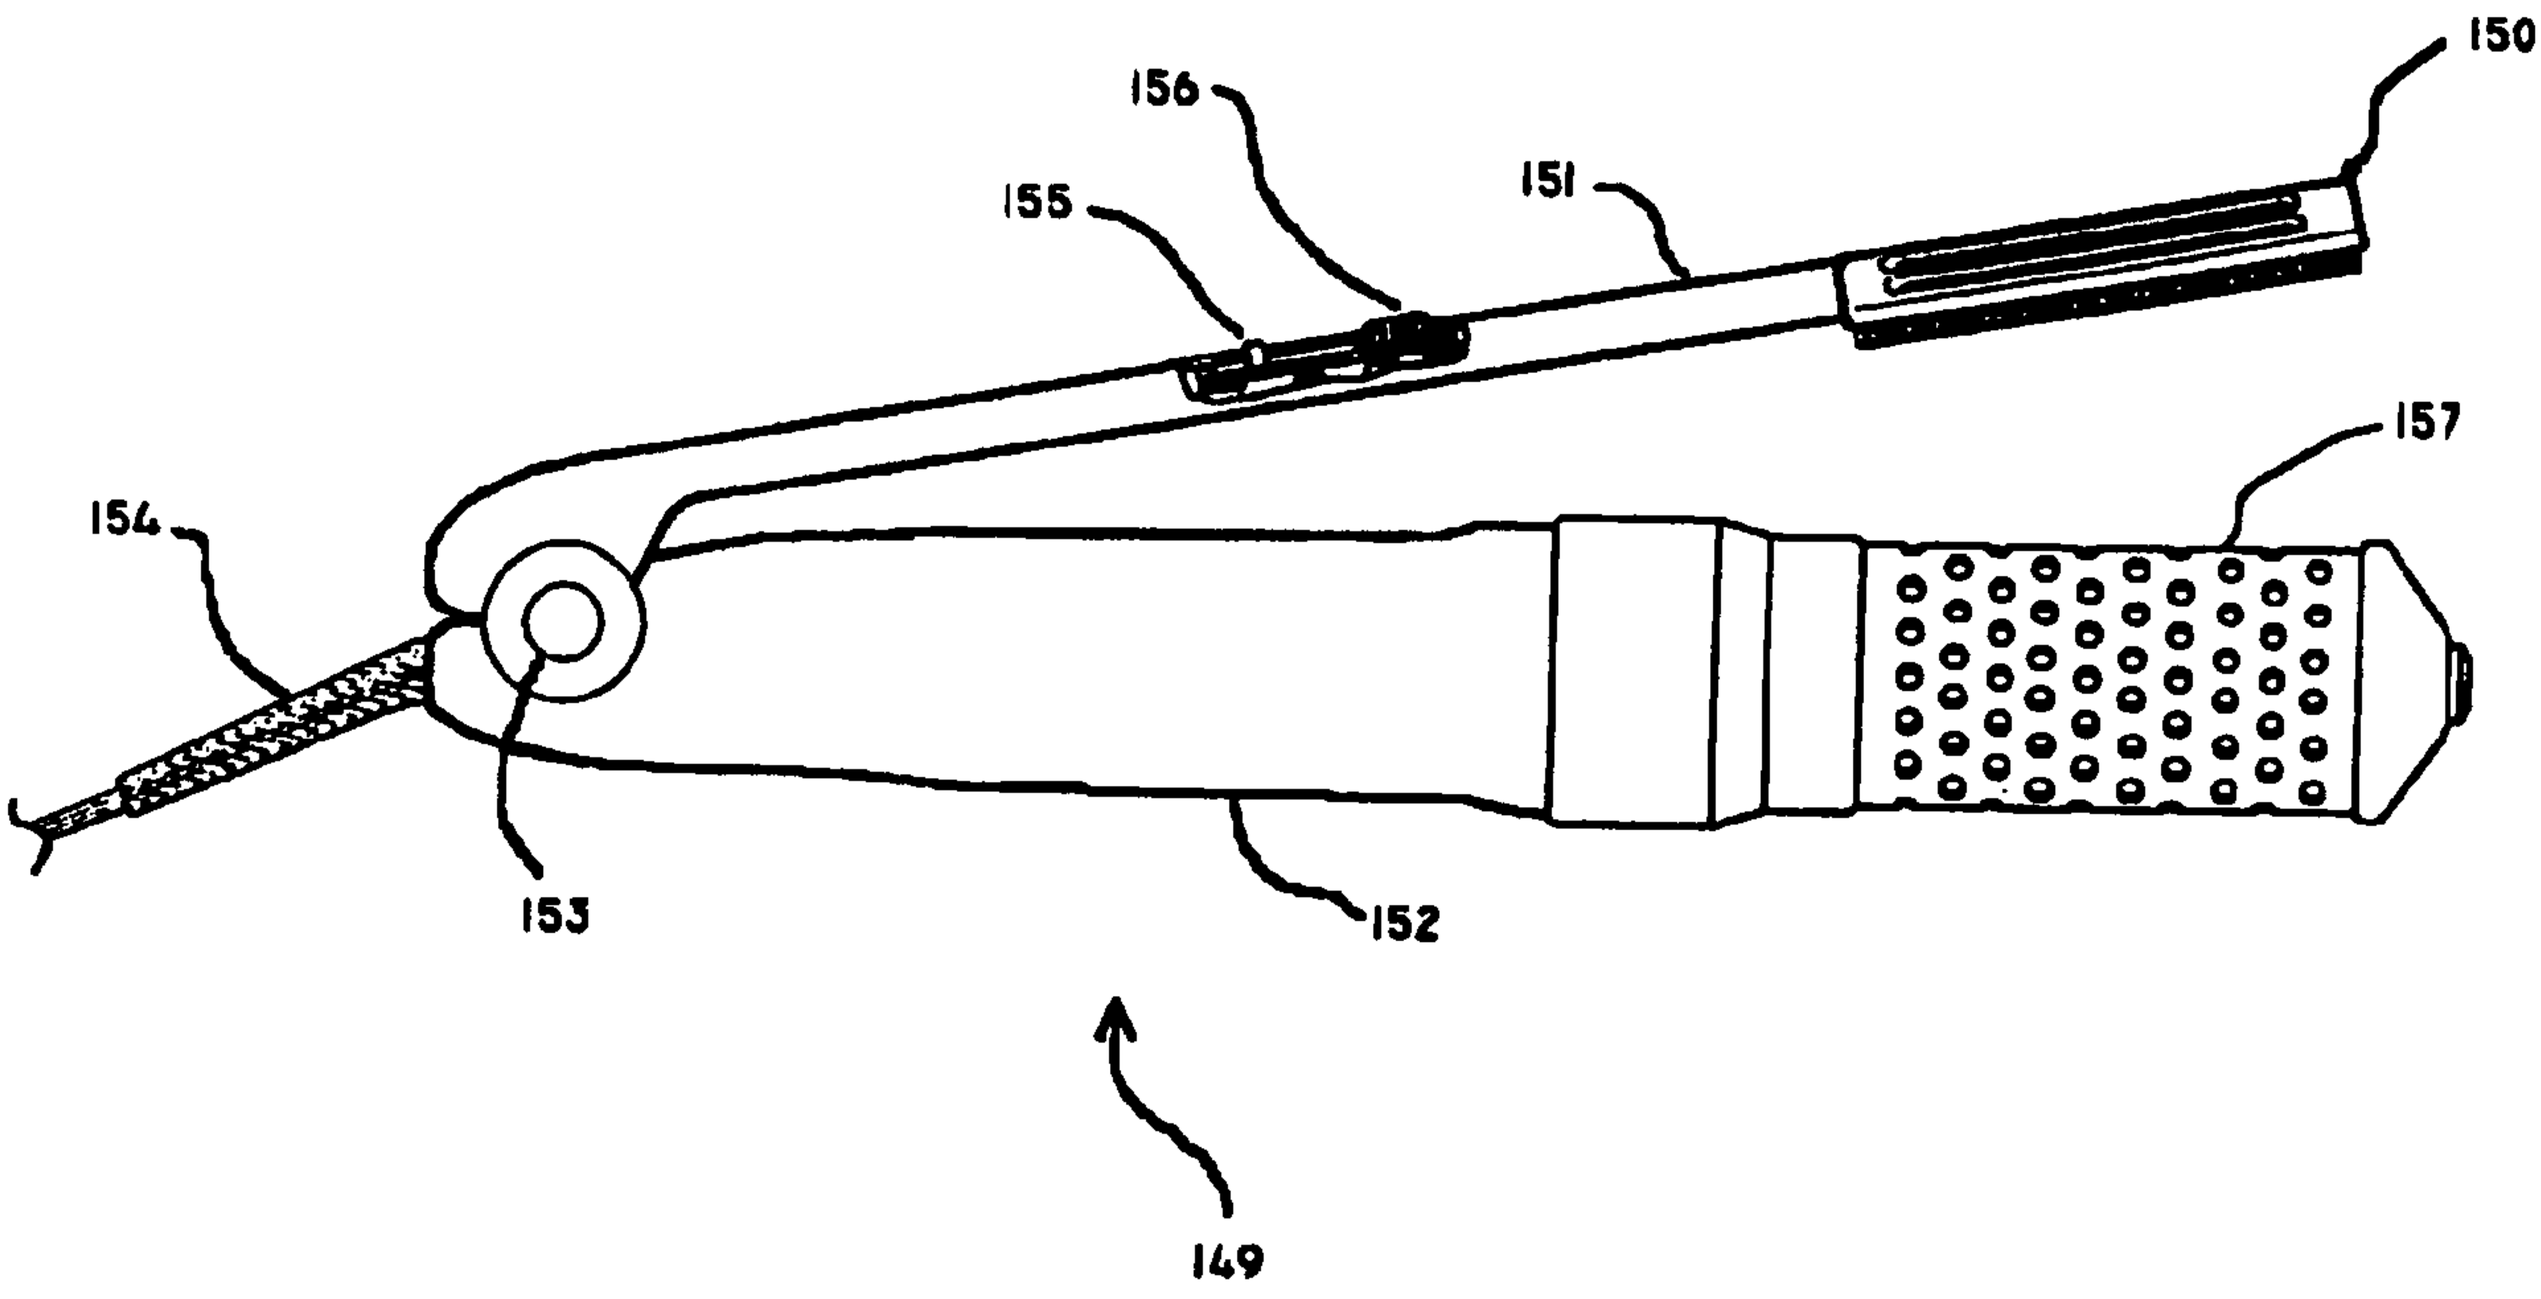FIG. 12




150
156
155
151
157
154
153
152
149