



US009497728B2

(12) **United States Patent Hill**

(10) **Patent No.:** US 9,497,728 B2
(45) **Date of Patent:** Nov. 15, 2016

(54) **WIRELESS RELAY STATION FOR RADIO FREQUENCY-BASED TRACKING SYSTEM**

(71) Applicant: **Position Imaging, Inc.**, Portsmouth, NH (US)
(72) Inventor: **Edward L. Hill**, Portsmouth, NH (US)
(73) Assignee: **Position Imaging, Inc.**, Portsmouth, NH (US)

5,600,330 A 2/1997 Blood
5,657,026 A 8/1997 Culpepper et al.
5,923,286 A 7/1999 Divakaruni
5,953,683 A 9/1999 Hansen et al.
6,167,347 A 12/2000 Lin
6,292,750 B1 9/2001 Lin
6,409,687 B1 6/2002 Foxlin
6,417,802 B1 7/2002 Diesel
6,496,778 B1 12/2002 Lin
6,512,748 B1* 1/2003 Mizuki H04W 88/187 370/314
6,593,885 B2 7/2003 Wisherd et al.
6,630,904 B2 10/2003 Gustafson et al.
6,683,568 B1 1/2004 James et al.
6,697,736 B2 2/2004 Lin

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 8 days.

(Continued)

(21) Appl. No.: **14/597,360**

(22) Filed: **Jan. 15, 2015**

(65) **Prior Publication Data**

US 2015/0208374 A1 Jul. 23, 2015

Related U.S. Application Data

(60) Provisional application No. 61/928,496, filed on Jan. 17, 2014.

(51) **Int. Cl.**
H04W 64/00 (2009.01)
H04W 84/04 (2009.01)

(52) **U.S. Cl.**
CPC **H04W 64/00** (2013.01); **H04W 64/003** (2013.01); **H04W 84/047** (2013.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,940,700 A 2/1976 Fischer
5,010,343 A 4/1991 Andersson
5,426,438 A 6/1995 Peavey et al.
5,574,468 A 11/1996 Rose

OTHER PUBLICATIONS

Schmidt & Phillips, "INS/GPS Integration Architectures", NATO RTO Lecture Series, First Presented Oct. 20-21, 2003; 24 pages.


(Continued)

Primary Examiner — Diane Mizrahi
(74) *Attorney, Agent, or Firm* — Schmeiser, Olsen & Watts LLP

(57) **ABSTRACT**

System and methods of tracking a position of a mobile device with an electromagnetic signal-transmitting antenna include receiving electromagnetic signals from the transmitting antenna of the mobile device by a plurality of receiver antennae of a base station and by one or more receiver antennae of a relay station. The relay station transmits to the base station timing information associated with the electromagnetic signals received by the one or more receiver antennae of the relay station. The base station computes a position of the transmitting antenna of the mobile device based on timing information computed from the electromagnetic signals received by the plurality of receiver antennae of the base station and on the timing information received from the relay station.

12 Claims, 5 Drawing Sheets

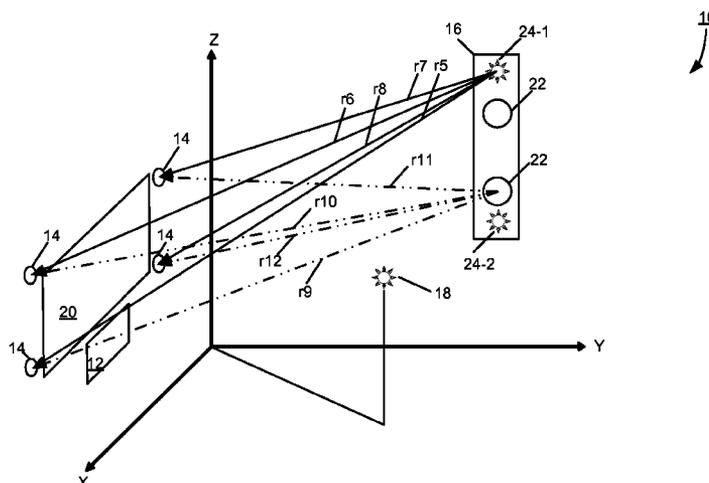

(56)

References Cited

U.S. PATENT DOCUMENTS

6,721,657	B2	4/2004	Ford et al.
6,750,816	B1	6/2004	Kunysz
7,143,004	B2	11/2006	Townsend et al.
7,190,309	B2	3/2007	Hill
7,193,559	B2	3/2007	Ford et al.
7,236,091	B2	6/2007	Kiang et al.
7,295,925	B2	11/2007	Breed et al.
7,409,290	B2	8/2008	Lin
7,443,342	B2	10/2008	Shirai et al.
7,533,569	B2	5/2009	Sheynblat
7,646,330	B2	1/2010	Karr
7,876,268	B2	1/2011	Jacobs
8,457,655	B2	6/2013	Zhang et al.
8,749,433	B2	6/2014	Hill
8,957,812	B1	2/2015	Hill et al.
2002/0021277	A1	2/2002	Kramer et al.
2003/0053492	A1	3/2003	Matsunaga
2004/0095907	A1	5/2004	Agee et al.
2004/0176102	A1	9/2004	Lawrence et al.
2005/0275626	A1	12/2005	Mueller et al.
2006/0013070	A1	1/2006	Holm et al.
2006/0061469	A1	3/2006	Jaeger et al.
2006/0066485	A1	3/2006	Min
2007/0060384	A1	3/2007	Dohta
2008/0048913	A1	2/2008	Macias et al.
2008/0204322	A1	8/2008	Oswald et al.
2009/0149202	A1	6/2009	Hill et al.
2009/0243932	A1	10/2009	Moshfeghi
2010/0103989	A1	4/2010	Smith et al.
2010/0123664	A1	5/2010	Shin et al.
2011/0006774	A1	1/2011	Baiden
2011/0187600	A1	8/2011	Landt
2011/0210843	A1	9/2011	Kummetz
2011/0241942	A1	10/2011	Hill
2011/0256882	A1	10/2011	Markhovsky
2012/0184285	A1	7/2012	Sampath et al.
2013/0021417	A1*	1/2013	Ota B41J 11/001 347/85
2013/0036043	A1	2/2013	Faith
2014/0300516	A1	10/2014	Min et al.

OTHER PUBLICATIONS

Farrell & Barth, "The Global Positioning System & Inertial Navigation", 1999, McGraw-Hill; pp. 245-252.
 Grewal & Andrews, "Global Positioning Systems, Inertial Navigation, and Integration", 2001, John Wiley and Sons, pp. 252-256.

Jianchen Gao, "Development of a Precise GPS/INS/On-Board Vehicle Sensors Integrated Vehicular Positioning System", Jun. 2007, UCGE Reports No. 20555; 245 pages.
 Yong Yang, "Tightly Coupled MEMS INS/GPS Integration with INS Aided Receiver Tracking Loops", Jun. 2008, UCGE Reports No. 20270; 205 pages.
 Goodall, Christopher L., "Improving Usability of Low-Cost INS/GPS Navigation Systems using Intelligent Techniques", Jan. 2009, UCGE Reports No. 20276; 234 pages.
 Debo Sun, "Ultra-Tight GPS/Reduced IMU for Land Vehicle Navigation", Mar. 2010, UCGE Reports No. 20305; 254 pages.
 Sun, et al., "Analysis of the Kalman Filter With Different INS Error Models for GPS/INS Integration in Aerial Remote Sensing Applications", Beijing, 2008, The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences vol. XXXVII, Part B5.; 8 pages.
 Adrian Schumacher, "Integration of a GPS aided Strapdown Inertial Navigation System for Land Vehicles", Master of Science Thesis, KTH Electrical Engineering, 2006; 67 pages.
 Vikas Numar N., "Integration of Inertial Navigation System and Global Positioning System Using Kalman Filtering", M.Tech Dissertation, Indian Institute of Technology, Bombay, Mumbai, Jul. 2004; 69 pages.
 Jennifer Denise Gautier, "GPS/INS Generalized Evaluation Tool (GIGET) for the Design and Testing of Integrated Navigation Systems", Dissertation, Stanford University, Jun. 2003; 160 pages.
 Farrell, et al., "Real-Time Differential Carrier Phase GPS-Aided INS", Jul. 2000, IEEE Transactions on Control Systems Technology, vol. 8, No. 4; 13 pages.
 Filho, et al., "Integrated GPS/INS Navigation System Based on a Gyroscope-Free IMU", DINCON Brazilian Conference on Dynamics, Control, and Their Applications, May 22-26, 2006; 6 pages.
 Santiago Alban, "Design and Performance of a Robust GPS/INS Attitude System for Automobile Applications", Dissertation, Stanford University, Jun. 2004; 218 pages.
 International Search Report and Written Opinion in related International Patent Application No. PCT/US12/64860, mailed on Feb. 28, 2013; 8 pages.
 U.S. Appl. No. 13/918,295, filed Jun. 14, 2013, entitled, "RF Tracking with Active Sensory Feedback"; 31 pages.
 U.S. Appl. No. 13/975,724, filed Aug. 26, 2013, entitled, "Radio Frequency Communication System" 22 pages.
 Proakis, John G. and Masoud Salehi, "Communication Systems Engineering", Second Edition, Prentice-Hall, Inc., Upper Saddle River, New Jersey, 2002; 815 pages.

* cited by examiner

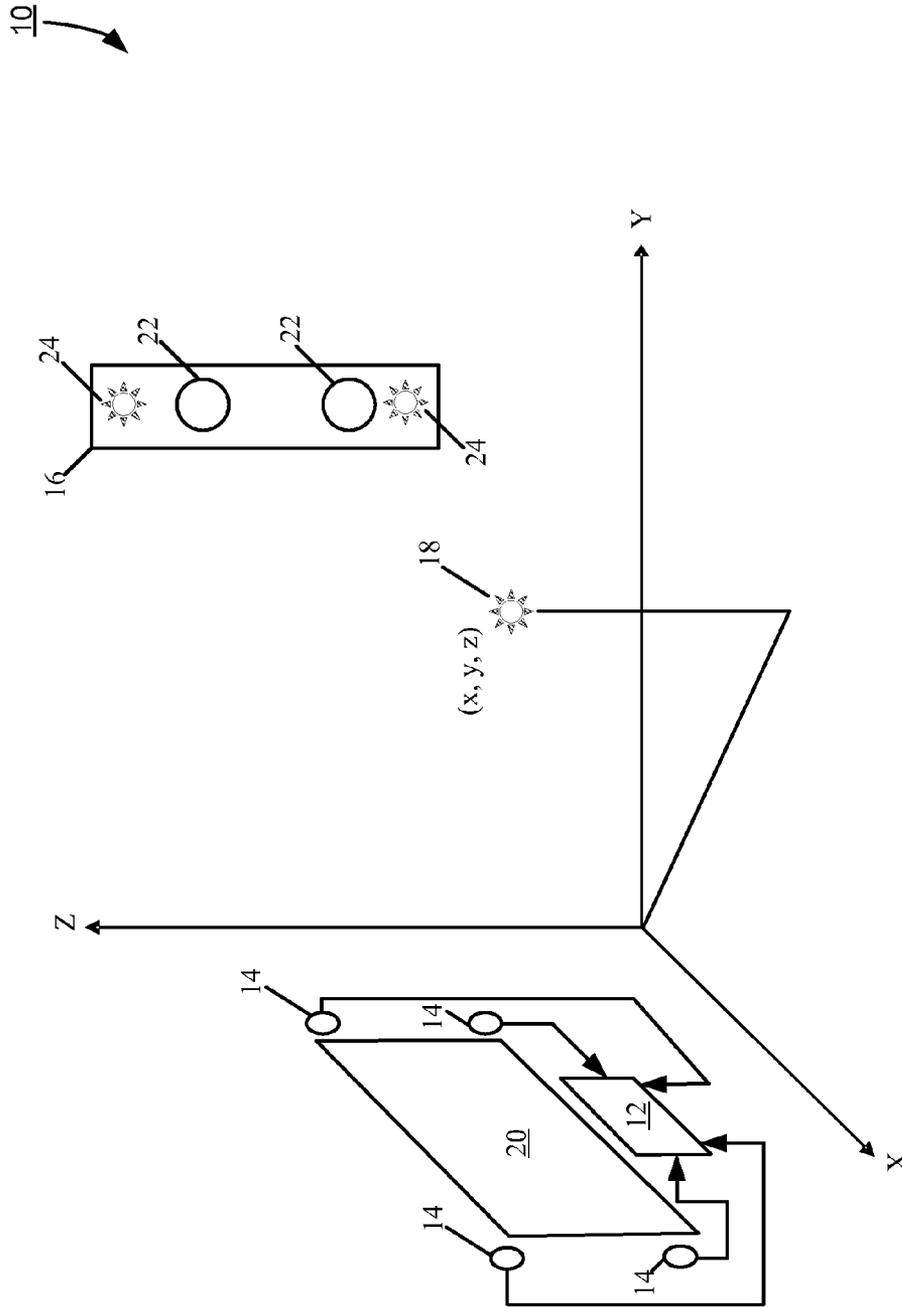


FIG. 1

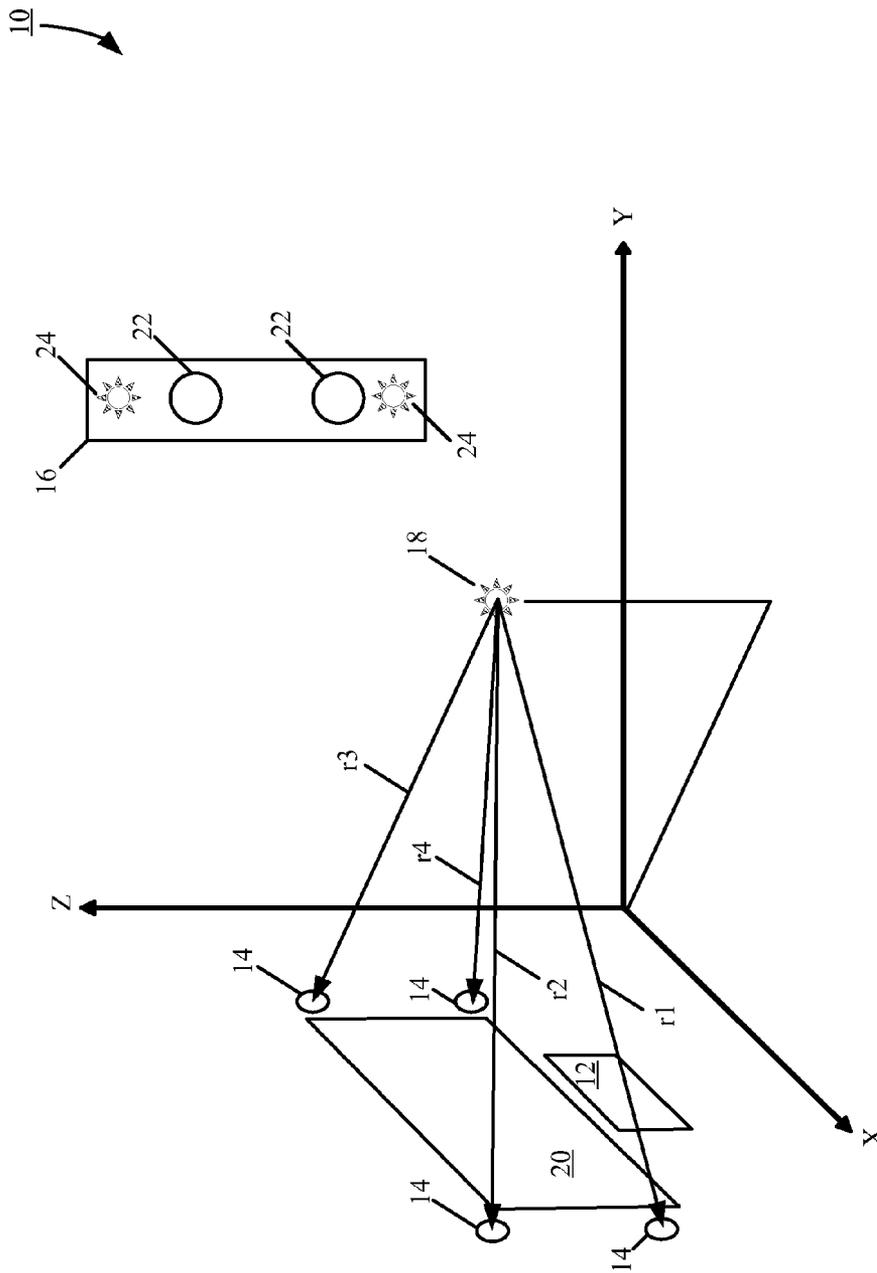


FIG. 2

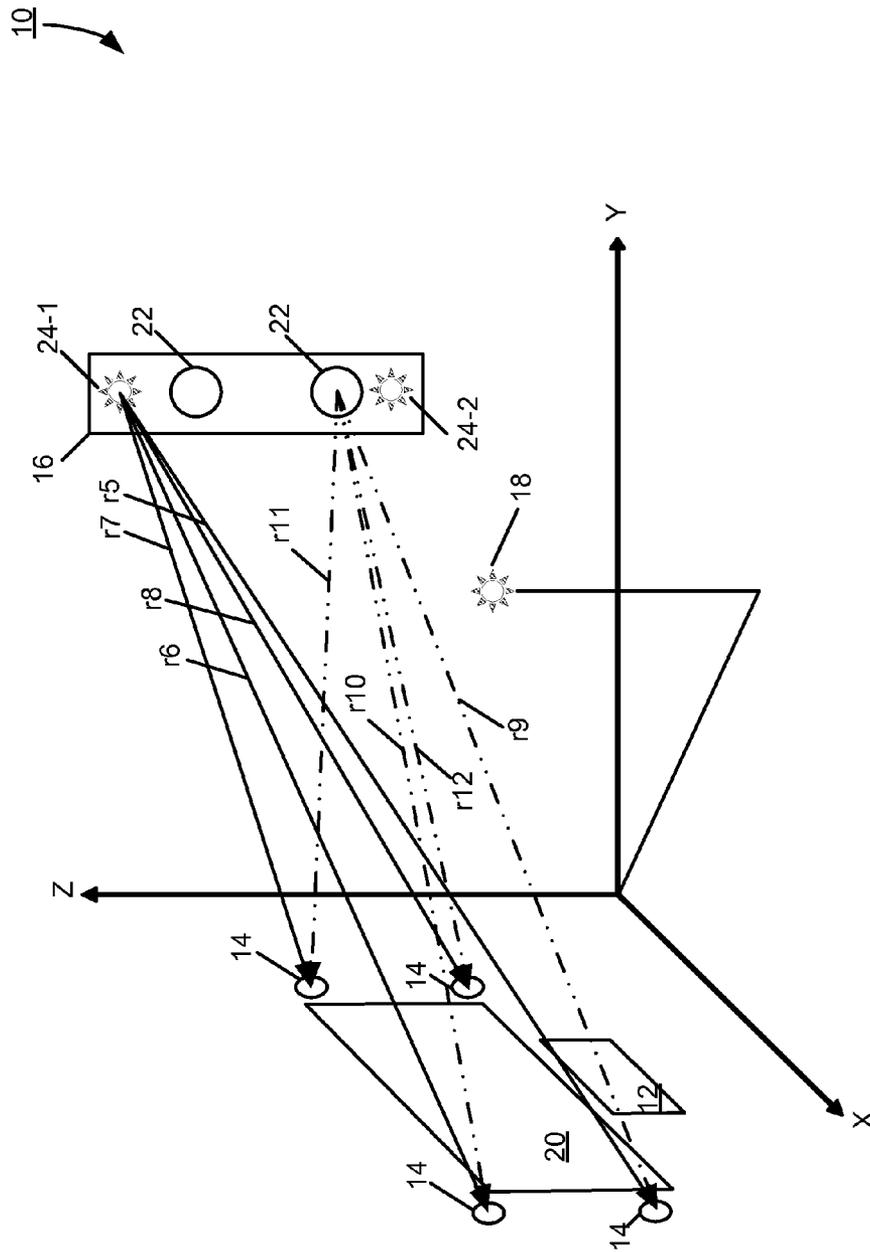


FIG. 3

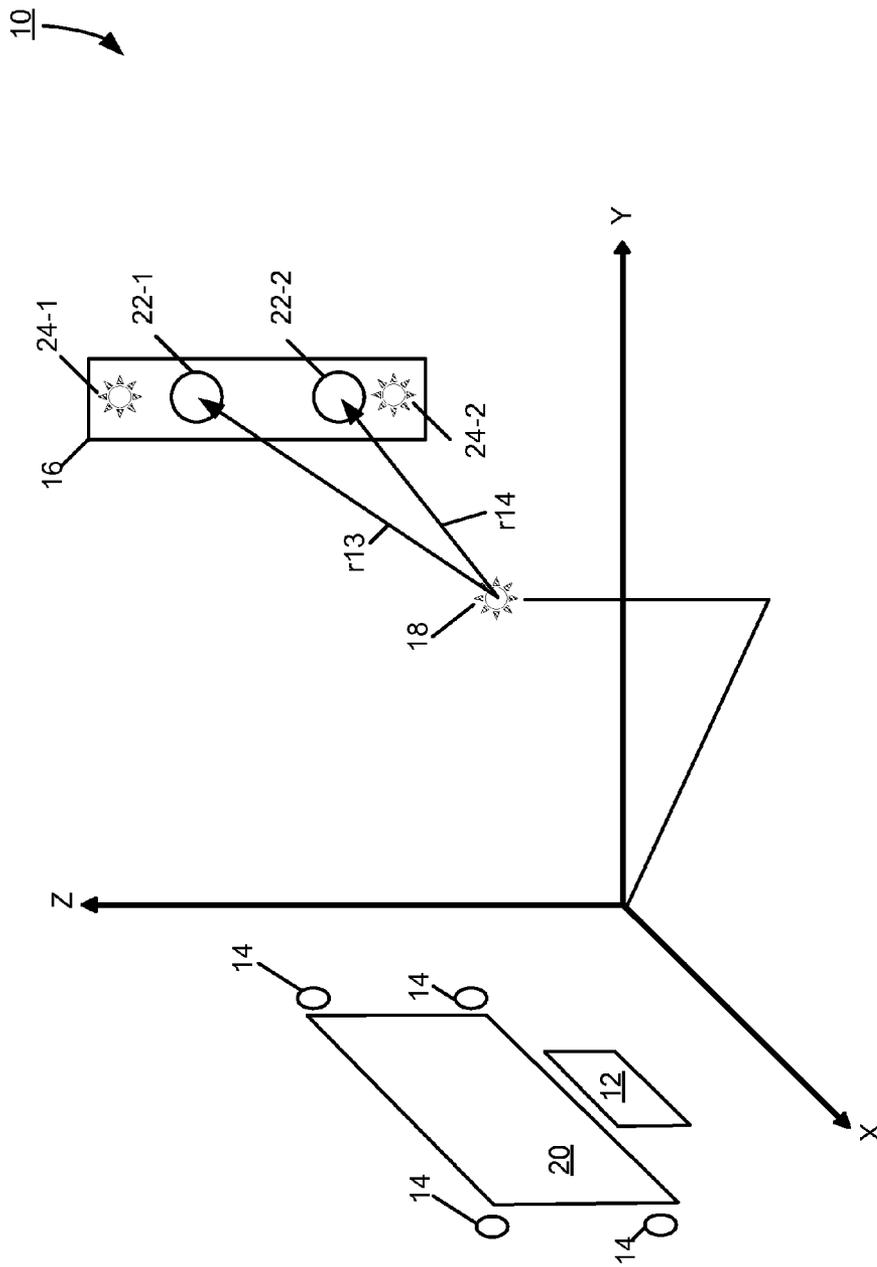


FIG. 4

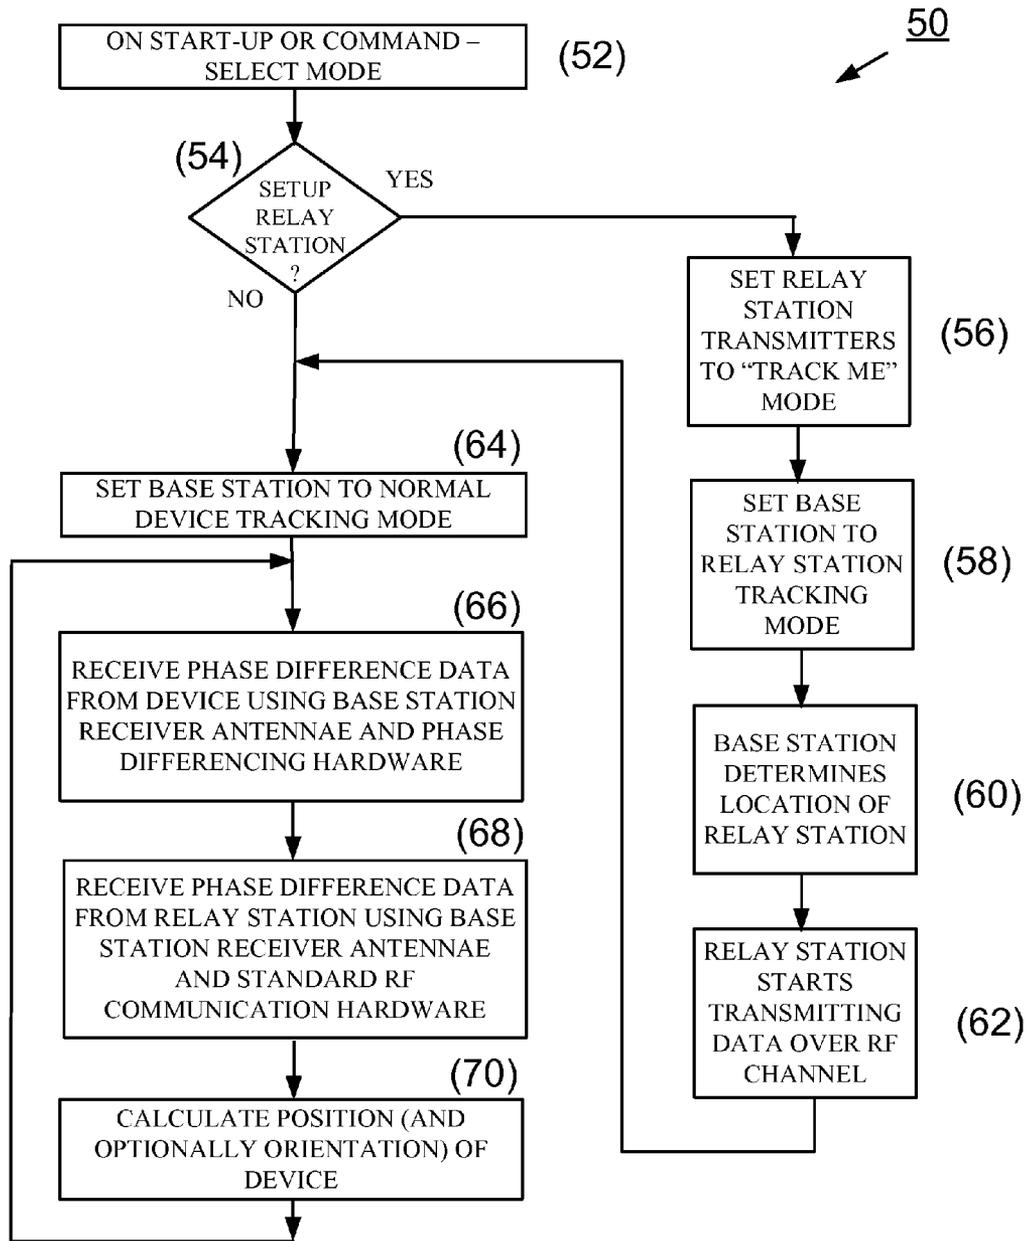


FIG. 5

WIRELESS RELAY STATION FOR RADIO FREQUENCY-BASED TRACKING SYSTEM

RELATED APPLICATION

This application claims the benefit of and priority to U.S. provisional application No. 61/928,496, filed Jan. 17, 2014, titled "Wireless Relay Station for Radio Frequency-Based Tracking System," the entirety of which provisional application is incorporated by reference herein.

FIELD OF THE INVENTION

The invention relates generally to systems and methods for tracking the position of electromagnetic signal transmitting devices. In particular, the invention relates to radio frequency (RF)-based wireless position tracking systems that use one or more wireless relay stations.

BACKGROUND

Position tracking systems can use a variety of configurations for tracking the two- or three-dimensional position of a wireless device. In many arrangements, a system may require three or more base receivers (or three or more base antennae connected to a single base receiver) to receive some form of data from a wireless device and use that data to calculate the position of the device. The data can be timing information, signal strength, or angle of arrival measurements of the signal transmitted by the device and received at the base receiver(s) antennae of the system. In all arrangements, the position of the base receiver antennae of the system is important for calculating the position of the device and often these antennae are wired to the system for computing the position of the device.

Over the years, several different forms of tracking systems have evolved with the most notable being Global Positioning System or GPS. For GPS, the mobile receiver uses timing information sent from satellites and then calculates the position of the GPS receiver with the mobile receiver doing the position computation using the timing information from the satellite signals.

SUMMARY

All examples and features mentioned below can be combined in any technically feasible way.

Embodiments of position-tracking systems described herein, unlike GPS, perform position calculation using signals sent from the wireless device being tracked. This allows the device to be simple, but does add some complexity to the position-tracking system. The position-tracking systems use one or more wireless relay stations communicating with a base station which uses multiple receive locations of the wireless relay stations as coordinate references for performing timing and positioning calculations on a wireless device communicating with the base station and the wireless relay stations. By incorporating one or more wireless relay stations, the system can improve setup options, improve accuracy and provide a larger working volume for the wireless device.

One example design for a position-tracking system for three-dimensional tracking comprises at least four base receivers (or one base receiver with four base antennae) wired to the base station. These base receivers receive the wireless signals sent from the mobile wireless device being tracked and send that information to the base station for

position computation. In one embodiment, the base receivers are fixed in position in space and wired to the base station. However, this design can be limiting as the wired base receivers can reduce the working volume and increase cost because they are tethered to the base station, making spacing of their antennae more difficult and expensive to setup. For example, a wireless mouse tracked in three dimensions for interaction with games or other interactive software programs can only be tracked within the working area defined by the spacing of the base receivers of the base station. If these base receivers or receiver antennae are placed around a television, the working volume is defined by the position of the base receivers, and accuracy may diminish as the device being tracked moves away from the central point of the positions of the base receivers. If the position-tracking system uses a device signal of arrival time differential compared at each receiver (or antenna) for making position calculations, this limited base receiver or receiver antenna spacing caused by a wired connection can be especially limiting.

A position-tracking system that incorporates one or more wireless relay stations to add additional measurements used for tracking by the position-tracking system can significantly improve over position-tracking systems requiring fully wired or tethered base receivers together with their corresponding antennae. Receiving timing information from the device being tracked, each relay station can expand the working volume or tracked area of the device and provide more options for product integration and position-tracking system set up. Also, by expanding the distances between total receivers or receiver antennae, the position-tracking system can improve position accuracy, allowing more precise measurements.

Each relay station communicates wirelessly with both the device being tracked and a base station performing the position tracking function. Alternatively, one or more relay stations can be wired to the base station, with wires replacing the wireless communication channel. In that embodiment, each relay station is in a fixed position, such as plugged into an electrical outlet, or be battery powered. During installation, each transmitter of each relay station acts like one or more "devices" communicating with the base station, and the base station determines the position of that transmitter. This information locates the relay station with respect to the receiver antennae of the base station. The base station also locates the position of each receiver antenna of a relay station with respect to the transmitter antennae of that relay station. Alternatively, relay stations can be placed at fixed known positions to provide the base station with the known coordinates for making position calculations.

During normal (tracking) operation, the device being tracked transmits the signal used to generate timing information, this signal being received at both the wired base antennae connected to the base station and the wireless relay station(s) receiving antenna(e). The relay station can be equipped with at least two receivers or receiver antennae and uses the multiple receive points provided by these separate receivers or antennae to compare timing differences in the device signal arrival at each receiver or receiver antenna. As the signal is received at the relay station, the time difference of arrival (or, equivalently, the phase difference of arrival) is calculated between both (or more) receivers or receiver antennae in the relay station. Because phase (θ) and time (t) are related by $\theta = \omega t$, where ω is a scalar, phase and time are equivalent systems and subsequent descriptions may be denoted by time or time differences, as appropriate.

This timing data calculated by the relay station is sent to the base station, preferably in a wireless manner, where the base station can use that timing data from each relay station receiver or receiver antenna as additional equations for calculating the position of the device. By doing timing comparisons and calculations at the relay station, the position-tracking system can avoid a timing path error from the relay station to the base station, thereby allowing the relay station to send data that is unaffected by radio propagation and interference instability, such as multipath on the round trip. Because interference like multipath is additive, removing one of the paths for this timing data significantly improves system performance through the reduction of multipath effects. If the relay station is configured with a single transceiver and antenna, techniques can reduce the effects of interference, such as implementing a duplex system whereby the receiver portion of the relay station transceiver receives at one spectrum, for example, 2.4 GHz, and the return transmission from the same relay station is at a different spectrum, for example, 5.8 GHz.

Whereas using the same antenna for both receiving and transmitting is optimal, it may not be trivial or cost effective to multiplex the circuitry attached to this antenna to achieve both functions in a real-time manner. Another technique is to place the receiver and transmitter antenna concentrically, so that they share the same origin. Designs for concentric antenna, however, may be difficult to implement.

In one embodiment, the relay station is equipped with at least two receivers, or receiver antennae, and uses two transmitters to retransmit the phase information of the device, properly coded and correlated to its signal arrival at the relay station receivers or receiver antennae. The relay station sends this phase/timing information to the position-tracking system using any of a variety of means. This transmission can be accomplished directly with common or additional wireless signal channels. These signal channels can communicate wirelessly on a different frequency channel, for example, by using different encoding. This transmission can also be sent using powerline communication. Preferably, the transmission is sent at a compatible frequency over one or both transmitter channels employed by the transmitter(s) of the relay station.

In one aspect, a method of tracking a position of a mobile device with an electromagnetic signal-transmitting antenna include receiving electromagnetic signals from the transmitting antenna of the mobile device by a plurality of receiver antennae of a base station and by one or more receiver antennae of a relay station. The relay station transmits to the base station timing information associated with the electromagnetic signals received by the one or more receiver antennae of the relay station. The base station computes a position of the transmitting antenna of the mobile device based on timing information computed from the electromagnetic signals received by the plurality of receiver antennae of the base station and on the timing information received from the relay station.

In another aspect, a position-tracking system comprises a base station with a processor, at least three spatially separated receiver antennae disposed at locations known to the processor of the base station. Each of the at least three receiver antennae receive electromagnetic signals transmitted by a transmitting antenna of a mobile device. The position-tracking system further comprises one or more relay stations in communication with the base station and with the transmitting antenna of the mobile device. Each relay station is disposed at a distance from the base station known to the processor of the base station. Each relay station

comprises a processor, one or more receiving antennae that receive the electromagnetic signals transmitted by the transmitting antenna of the mobile device, and one or more transmitter antennae. The transmitter antennae of each relay station send timing information to the base station associated with the electromagnetic signals received by the one or more receiver antennae of the relay station. The processor of the base station uses the timing information received from the one or more relay stations and the timing information associated with the electromagnetic signals received by the at least three receiver antennae of the base station to compute the position of the transmitting antenna.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and further advantages of this invention may be better understood by referring to the following description in conjunction with the accompanying drawings, in which like numerals indicate like structural elements and features in various figures. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

FIG. 1 is a block diagram of an embodiment of a position-tracking system, including a base station in communication with a relay station, for tracking the position of an electromagnetic signal transmitting device.

FIG. 2 is a diagram for illustrating position measurements based on device transmitter to base station receiver transmissions.

FIG. 3 is a diagram for illustrating position measurements based on relay station transmitter to base station receiver transmissions.

FIG. 4 is a diagram for illustrating position measurements based on device transmitter to relay station receiver transmissions.

FIG. 5 is a flow diagram detailing embodiments of modes of the relay station.

DETAILED DESCRIPTION

FIG. 1 shows an embodiment of a position-tracking system 10 comprising base station hardware (or simply base station) 12 in communication with multiple base receivers or receiver antennae 14 (herein referred to, interchangeably, as receiver, receiving antenna, or receiver antenna 14) and with one or more relay stations 16 (only one shown), for tracking the position of an electromagnetic signal (e.g., radio frequency) emitting transmitter or transmitter antenna 18 (herein referred to, interchangeably, as transmitter, transmitting antenna, or transmitter antenna 18). The transmitter antenna 18 is carried by, attached to, or embedded in a tracked object. Although only one transmitter antenna 18 is shown, the object can have more than one tracked transmitter antenna 18, to allow the orientation of the object to be calculated based on geometric principles. For example, two transmitter antennae, separated by a distance d , yield a pointer, because the two transmitter antennae form a line with known direction. Three transmitter antennae provide enough information to calculate a three-dimensional orientation.

To track the position of a single transmitter antenna 18 in three dimensions (x , y , z), one embodiment of the position-tracking system 10 has at least four receiver antennae 14. For two-dimensional position tracking, the position-tracking system 10 may have as few as three base receiver antennae 14. The base receiver antennae 14 are distinct and fixed in space, and provide a reference frame within which the

5

transmitter antennae **18** is tracked. In this example, the base receiver antennae **14** are disposed around a monitor **20**. Additional base receiver antennae can provide better coverage and more accuracy, at the expense of complexity and cost.

The configuration of the position-tracking system can be reversed, with the base receiver antennae **14** being tracked and the transmitter antennae **18** providing the reference frame. Alternatively, inertial sensors could be integrated in the object with the wireless transmitter antenna **18** being tracked to provide orientation.

The relay station **16** has two or more receivers or receiver antennae **22** (herein referred to, interchangeably, as receiver, receiving antenna, or receiver antenna **22**) and two or more transmitters or transmitting antenna **24** (herein referred to, interchangeably, as transmitter, transmitter antenna, or transmitting antenna **24**). The two or more receiver antennae **22** are at known distances apart from each other and from the transmitting antenna **24**. The position-tracking system **10** can have multiple of such relay stations, with each relay station thus adding at least two additional receiver antennae **22** to the system. As noted above, additional receiver antennae provide better accuracy and coverage. The relay station receivers **22** provide the additional coverage for the position-tracking system to minimize multipath and to increase range.

The relay station **16** is effectively a transceiver that, when acting as a receiver, provides additional information for a tracking algorithm used by the base station **12** to compute the position of the transmitter antenna **18**. The signal received by the relay station **16** are processed at the relay station **16** (by the hardware portion of the relay station—not shown—that is part of the receiver) and re-transmitted to the base receiver antennae **14**. This transmission can be done by cables or wirelessly. The relay station **16** can function similarly to the base station **12**, whose operation is described below, to analyze a time of arrival difference at the multiple receiver antennae **22** that are part of the relay station **16**.

Alternatively, the relay station **16** can operate with a single receiver antenna **22**, in which case the received signal from the wireless transmitter antenna **18** being tracked can either be instantaneously re-transmitted by the relay station **16** (MIMO) to maintain a time relationship (provided the distance path between the relay station **16** and each base receiver antenna **14** is fixed and known) or converted to a different frequency to avoid frequency collision or interference. MIMO (Multiple-Input Multiple-Output) systems use more than one transmit antenna to send a signal on the same frequency to more than one receive antenna.

The relay station can be any one of a variety of mobile devices used for other functions, such as smart phones, tablets, or laptops, provided the position of the relay station **16** is known or remains fixed in space during position-tracking operation (i.e., when communicating with the base station **12** and the mobile transmitter antenna **18**).

FIG. 2 shows an example of operation of the position-tracking system **10** using phase for timing comparisons. The base station **12** has a processor (not shown), such as a central processing unit or CPU, programmed to perform a position-tracking algorithm. The position-tracking algorithm is based on a best-fit of the time of flight measurements between the transmitter antenna **18** with the object and the base receiver antennae **14**. An example implementation of the position-tracking algorithm is described in U.S. application Ser. No. 14/354,833, filed on Apr. 28, 2014, titled "Systems and Methods of Wireless Position Tracking," the entirety of which application is incorporated by reference herein.

6

In this phase-based embodiment of the position-tracking system **10**, the phase of the RF signal transmitted by the transmitter **18** is used to measure distance. A phase shift of 360° corresponds to one wavelength, and, by measuring the phase differences of the transmitter signal recorded at two base receiver antennae **14**, the distance is calculated. In the following equations (Eq. 1-Eq. 4), r_1 , r_2 , r_3 , and r_4 represent distances between the positions of the base receiver antennae **14** and the position of the transmitter **18**, and are represented by the phases. Receiver positions are denoted as $rcvpos_{receiver\ number-position\ coordinate}$, and are fixed, known quantities. Position coordinate 1, 2, 3 represent x, y, z, respectively.

$$r_1 = \sqrt{(rcvpos_{s,1-x_1})^2 + (rcvpos_{s,2-x_2})^2 + (rcvpos_{s,3-x_3})^2} \quad (\text{Eq. 1})$$

$$r_2 = \sqrt{(rcvpos_{s,2,1-x_1})^2 + (rcvpos_{s,2,2-x_2})^2 + (rcvpos_{s,2,3-x_3})^2} \quad (\text{Eq. 2})$$

$$r_3 = \sqrt{(rcvpos_{s,3,1-x_1})^2 + (rcvpos_{s,3,2-x_2})^2 + (rcvpos_{s,3,3-x_3})^2} \quad (\text{Eq. 3})$$

$$r_4 = \sqrt{(rcvpos_{s,4,1-x_1})^2 + (rcvpos_{s,4,2-x_2})^2 + (rcvpos_{s,4,3-x_3})^2} \quad (\text{Eq. 4})$$

$$\delta_{1,2} = r_1 - r_2 \quad (\text{Eq. 5})$$

$$\delta_{1,3} = r_1 - r_3 \quad (\text{Eq. 6})$$

$$\delta_{1,4} = r_1 - r_4 \quad (\text{Eq. 7})$$

The differences between the phase measurements (δ 's, Eq. 5-Eq. 7), which are calculated by the base station hardware, are used to solve for x_1 , x_2 and x_3 , which represents the x, y, z positions of the device transmitter antenna **18**, respectively. As is known in the art, this can be solved in a least squares algorithm, such as Levenberg-Marquardt or in a Kalman filter. Also known in the art is that more range measurements can be used to form an overdetermined solution, and also allows other methods to be used, such as weighted solutions, selecting a subset of equations, etc. These additional range measurements can be provided for by the relay station **16**.

FIG. 3 shows an example of transmissions from the relay station **16** to the base receiver antennae **14**. The relay station **16** resides at a location where the relay station can improve in tracking the transmitter **18**. For example, this location may be on a wall, behind the user, on a ceiling. Before data from the relay station **16** can be used to improve performance, the position of the relay station **16** relative to the base station **12** needs to be determined. Specifically, the positions of the receiver antennae **22** of the relay station **16** need to be determined; this information can reside at the base station **12**.

To determine the positions of the receiver antennae **22**, the transmitters **24-1** and **24-2** are utilized in a first manner. These transmitters **24-1**, **24-2** operate like transmitter antenna **18**, except that the transmitters **24-1**, **24-2** transmit at different frequencies from each other so that they can be differentiated from one another. The positions of the transmitters **24-1**, **24-2** are computed just like that of the transmitter antenna **18**. The equations to compute these positions are similar to Eq. 1-Eq. 7. The equations (Eq. 8-Eq. 14) for transmitter **24-1**, which use ranges r_5 , r_6 , r_7 , and r_8 , are:

$$r_5 = \sqrt{(rptrpos_{s,1-x_1})^2 + (rptrpos_{s,2-x_2})^2 + (rptrpos_{s,3-x_3})^2} \quad (\text{Eq. 8})$$

7

$$r6 = \sqrt{(rptrpos_{6,1}-x_1)^2 + (rptrpos_{6,2}-x_2)^2 + (rptrpos_{6,3}-x_3)^2} \quad (\text{Eq. 9})$$

$$r7 = \sqrt{(rptrpos_{7,1}-x_1)^2 + (rptrpos_{7,2}-x_2)^2 + (rptrpos_{7,3}-x_3)^2} \quad (\text{Eq. 10})$$

$$r8 = \sqrt{(rptrpos_{8,1}-x_1)^2 + (rptrpos_{8,2}-x_2)^2 + (rptrpos_{8,3}-x_3)^2} \quad (\text{Eq. 11})$$

$$\delta_{5,6} = r5 - r6 \quad (\text{Eq. 12})$$

$$\delta_{5,7} = r5 - r7 \quad (\text{Eq. 13})$$

$$\delta_{5,8} = r5 - r8 \quad (\text{Eq. 14})$$

And the equations (Eq. 15-Eq. 21) for transmitter **24-2**, which uses ranges **r9**, **r10**, **r11**, and **r12**, are:

$$r9 = \sqrt{(rptrpos_{9,1}-x_1)^2 + (rptrpos_{9,2}-x_2)^2 + (rptrpos_{9,3}-x_3)^2} \quad (\text{Eq. 15})$$

$$r10 = \sqrt{(rptrpos_{10,1}-x_1)^2 + (rptrpos_{10,2}-x_2)^2 + (rptrpos_{10,3}-x_3)^2} \quad (\text{Eq. 16})$$

$$r11 = \sqrt{(rptrpos_{11,1}-x_1)^2 + (rptrpos_{11,2}-x_2)^2 + (rptrpos_{11,3}-x_3)^2} \quad (\text{Eq. 17})$$

$$r12 = \sqrt{(rptrpos_{12,1}-x_1)^2 + (rptrpos_{12,2}-x_2)^2 + (rptrpos_{12,3}-x_3)^2} \quad (\text{Eq. 18})$$

$$\delta_{9,10} = r9 - r10 \quad (\text{Eq. 19})$$

$$\delta_{9,11} = r9 - r11 \quad (\text{Eq. 20})$$

$$\delta_{9,12} = r9 - r12 \quad (\text{Eq. 21})$$

These two sets of equations, (Eq. 8-Eq. 14) and (Eq. 15-Eq. 21) are used separately to solve for x_1 , x_2 and x_3 , which represents the x, y, z, position, of each transmitter antenna **24-1** and **24-2**, respectively.

After the positions of transmitters **24-1** and **24-2** are known, it is straightforward to determine the positions of the receiver antennae **22**. The two computed locations of the transmitter antennae **24-1** and **24-2** provide reference points for determining the locations of the receiver antennae **22**. Geometry and knowledge of the antennae layout provides the locations of the receiver antennae **22**. An example is to place receiver antenna **22** in a line between transmitter antenna **24-1** and **24-2**. This provides exact knowledge of where each receiver antenna **22** is positioned. This calculation can be performed at the relay station **16** or at the base station **12**. After these positions are determined, the second means of use of transmitter antennae **24-1**, **24-2** occurs. The relay station **16** transmits this position information using the same transmitter antennae **24-1**, **24-2** using standard information transmission methods, such as used for cellular communication, Wi-Fi, etc., as is known in the art. Both the base station **12** and the relay station **16** contain standard circuitry for performing this operation and is multiplexed in at the appropriate setup time while the position-tracking system **10** is in a setup mode.

In one alternative embodiment, the receiver antennae **22** and transmitter antennae **24** of the relay station **16** may be embodied in a single antennae and transmission/receipt of signals can be separated by time or frequency. In another alternative embodiment, the position of the transmitter antennae **24** and receiver antennae **22** may be fixed using another device, such as a GPS or mobile phone with locating ability. For example, a user might determine the position of antennae **22** and **24** as derived from another device (GPS)

8

and this information would be transmitted to the base station **12**. Subsequently, as described above, the relay station **16** can provide tracking information for the device transmitter **18**.

FIG. 4 illustrates the additional receiver paths between the transmitter antenna **18** and the relay station receiver antennae **22-1** and **22-2**. Path **r13** and path **r14** correspond to the distances between the transmitter **18** and the receiver antennae **22-1** and **22-2**, respectively. Relay station receiver positions are denoted as $rptrpos_{receiver\ number, position\ coordinate}$ and are fixed, known quantities, as determined above in connection with FIG. 3. Position coordinates 1, 2, 3 represent x, y, z, respectively. The measurements of the two ranges **r13** and **r14** are performed in a similar manner to the equations used by the base station **12** to compute the position of the transmitter **18**.

$$r13 = \sqrt{(rptrpos_{13,1}-x_1)^2 + (rptrpos_{13,2}-x_2)^2 + (rptrpos_{13,3}-x_3)^2} \quad (\text{Eq. 22})$$

$$r14 = \sqrt{(rptrpos_{14,1}-x_1)^2 + (rptrpos_{14,2}-x_2)^2 + (rptrpos_{14,3}-x_3)^2} \quad (\text{Eq. 23})$$

$$\delta_{13,14} = r13 - r14 \quad (\text{Eq. 24})$$

The difference between the phase measurements ($\delta_{13,14}$, Eq. 24), which is calculated in the hardware (e.g., processor) of the relay station **16** in a similar method to those determined at the base station **12**, is used by the base station **12** together with Eq. 5, Eq. 6, and Eq. 7 to solve for x_1 , x_2 and x_3 , which represents the x, y, z, position of the transmitter **18**, respectively.

Before the base station **12** can use the computed value for $\delta_{13,14}$, from equation (Eq. 24), the relay station **16** needs to send the value to the base station **12**. This information is transmitted using the same transmitter antennae **24-1**, **24-2** using standard information transmission methods such as used for cellular communication, Wi-Fi, etc., as is known in the art. Both the base station **12** and the relay station **16** contain standard circuitry for performing this operation, which is multiplexed in at the appropriate setup time while the position-tracking system **10** is in a tracking mode.

The relay station **16** is then placed in a mode that allows its two transmitters **24-1** and **24-2** to transmit distinguishable signals and to the base receiver antennae **14**. As is known in the art, this can take the form of frequency or time multiplexing. Similarly to how the transmitter antenna **18** is located using equations (Eq. 1-Eq. 7), the transmitters **24-1** and **24-2** are located using the same equations, but with ranges **r5-r8** (FIGS. 3) and **r9-r12** (FIG. 3), respectively, substituting for ranges **r1-r4**. This provides an x, y, z, position of each transmitter **24-1** and **24-2**. From the positions of the transmitters **24-1** and **24-2**, the locations of the receiver antennae **22-1**, **22-2** can be determined as described in connection with FIG. 3.

FIG. 5 is an embodiment of a process **50** illustrating operating modes of the position tracking system **10**. When position tracking system **10** is started, or when commanded, it enters the selection mode **52**. In the selection mode, a mode is selected either to enter normal device tracking or to set up the relay station **16**. If, at step **54**, normal tracking is selected, the program enters normal tracking mode **64**. If instead, at step **54**, the selected mode is to set up the relay station **16**, the process **50** proceeds to block **56**. At block **56**, the transmitting antennae **24-1**, **24-2** turn on such that transmitting antennae **24-1**, **24-2** are transmitting on different frequencies from each, as if transmitting antennae **24-1**, **24-2** were separate devices being tracked (like a device with transmitter **18**).

In addition, the base station **12** is set (step **58**) to track the transmitting antennae **24-1**, **24-2**, and, thus, to determine (step **60**) their positions using equations Eq. 8-Eq. 21. The positions of the transmitting antennae **24-1**, **24-2** are saved at the base station **12** so that equations Eq. 22-Eq. 24 can be utilized to improve tracking performance. At step **62**, the relay station **16** switches over from generating device signatures to transmitting phase difference data produced by calculating equations Eq. 22-Eq. 24.

After step **62** completes, or if normal tracking mode has already been entered, the position-tracking system **10** starts tracking the device (i.e., the device transmitting antenna **18**). This tracking is accomplished by using the base station **12** to obtain (step **66**) phase difference data from signals received by the base receiver antennae **10**, processed by phase differencing hardware, and computing phase differences as described by equations Eq. 5-Eq. 7. The base station **12** also has channels (which may be multiplexed from the base receiver antennae **14**, or in parallel) for receiving (step **68**) the digital RF encoded data that is coming from the relay station **16**, which represents the phase difference ($\delta_{1,3,14}=r13-r14$) measured at the relay station **16**.

Equations for device position computation (for example, Eq. 1-7 and Eq. 22-24) are performed in step **70** and another computation cycle repeats, starting at step **66**.

In one embodiment, a wireless relay station **16** is disclosed. The wireless relay station can be powered by battery or electrical outlet, but the encoded data connection to the base station **12** is completely wireless. In the general embodiment, a single multiplexed antenna or separate transmit and receive antennae are incorporated at the relay station. The range of each transmit antenna **24** in the relay station **16** is first determined as if it were a normal tracked device. This determines the range between the relay station **16** and the base station **12**. For non-concentric transmit/receive antennae, a simple hook and appropriate weight can place the relay station **16**, and, therefore, the physical antennae placement, into a known relationship. More elaborate schemes are detailed in the discussion of FIG. **3**. This is all performed in a setup mode, as described previously in the process **50** described in FIG. **5**.

After the locations of the relay stations transmitters **24** are determined, the range from the transmit antenna **24** of the relay station **16** to the base station antennae **14** can be converted to phase measurements δ_i and used to offset the total range from the device to the relay station and then to the base station antennae. This provides another set of equations, as illustrated in equations Eq. 25-Eq. 33.

$$r1 = \sqrt{(rcvrpos_{1,1}-x_1)^2 + (rcvrpos_{1,2}-x_2)^2 + (rcvrpos_{1,3}-x_3)^2} \quad (\text{Eq. 25})$$

$$r2 = \sqrt{(rcvrpos_{2,1}-x_1)^2 + (rcvrpos_{2,2}-x_2)^2 + (rcvrpos_{2,3}-x_3)^2} \quad (\text{Eq. 26})$$

$$r3 = \sqrt{(rcvrpos_{3,1}-x_1)^2 + (rcvrpos_{3,2}-x_2)^2 + (rcvrpos_{3,3}-x_3)^2} \quad (\text{Eq. 27})$$

$$r4 = \sqrt{(rcvrpos_{4,1}-x_1)^2 + (rcvrpos_{4,2}-x_2)^2 + (rcvrpos_{4,3}-x_3)^2} \quad (\text{Eq. 28})$$

$$r_{relystation} = \frac{\sqrt{(rcvrpos_{relystation,1}-x_1)^2 + (rcvrpos_{relystation,2}-x_2)^2 + (rcvrpos_{relystation,3}-x_3)^2}}{\quad} \quad (\text{Eq. 29})$$

$$\delta_{1,relystation} = r1 - r_{relystation} - \Theta_1 \quad (\text{Eq. 30})$$

$$\delta_{2,relystation} = r2 - r_{relystation} - \Theta_2 \quad (\text{Eq. 31})$$

$$\delta_{3,relystation} = r3 - r_{relystation} - \Theta_3 \quad (\text{Eq. 32})$$

$$\delta_{4,relystation} = r4 - r_{relystation} - \Theta_4 \quad (\text{Eq. 33})$$

Here, $r1-r4$ are again the equations for the base station antennae ranges to the device transmitter **18**; $r_{relystation}$ is the range between the relay station **16** to the device transmitter **18**. Additional equations Eq. 30-Eq. 33 are now available for incorporating into the tracking solution. In Eq. 30-Eq. 33, Θ_i corresponds to wave cycles to prevent cycle ambiguity, an example use of which is described in U.S. patent application Ser. No. 13/975,724, filed Aug. 26, 2013, and titled "Radio Frequency Communication System," the entirety of which application is incorporated by reference herein. One way to provide phase measurement or related timing data (calculated from Eq. 30-33) to the base station **12** is for the relay station **16** to transmit it on a separate frequency. Additional circuitry at the base station **12** can provide filtering means to separate this data from direct transmission from the device transmitter **18**. Other techniques such as spread spectrum encoding and decoding can be used to allow multiple devices to share limited bandwidth without interference. Ultra wideband or similar wide spectrum transmission techniques, comparing time stamped pulsed signals sent from the device transmitter to the relay and/or base station, can also determine range and therefore provide Θ or cycle wave count between device transmitter to the relay station and/or base station receiver antennae.

One of ordinary skill in the art will recognize that labeling the base station and the relay station is a designer choice. Further, processing of signal data (i.e., the equations above) and consolidation of the results from different receivers to track an object may be split among processors at the base and relay stations.

As will be appreciated by one skilled in the art, aspects of the present invention may be embodied as a system, method, and computer program product. Thus, aspects of the present invention may be embodied entirely in hardware, entirely in software (including, but not limited to, firmware, program code, resident software, microcode), or in a combination of hardware and software. All such embodiments may generally be referred to herein as a circuit, a module, or a system. In addition, aspects of the present invention may be in the form of a computer program product embodied in one or more computer readable media having computer readable program code embodied thereon.

The computer readable medium may be a computer readable storage medium, examples of which include, but are not limited to, an electronic, magnetic, optical, electro-magnetic, infrared, or semiconductor system, apparatus, or device, or any suitable combination thereof. As used herein, a computer readable storage medium may be any tangible medium that can contain or store a program for use by or in connection with an instruction execution system, apparatus, device, computer, computing system, computer system, or any programmable machine or device that inputs, processes, and outputs instructions, commands, or data. A non-exhaustive list of specific examples of a computer readable storage medium include an electrical connection having one or more wires, a portable computer diskette, a floppy disk, a hard disk, a random access memory (RAM), a read-only memory (ROM), a USB flash drive, a non-volatile RAM (NVRAM or NOVRAM), an erasable programmable read-only memory (EPROM or Flash memory), a flash memory card, an electrically erasable programmable read-only memory (EEPROM), an optical fiber, a portable compact disc read-

only memory (CD-ROM), a DVD-ROM, an optical storage device, a magnetic storage device, or any suitable combination thereof.

Program code may be embodied as computer-readable instructions stored on or in a computer readable storage medium as, for example, source code, object code, interpretive code, executable code, or combinations thereof. Any standard or proprietary, programming or interpretive language can be used to produce the computer-executable instructions. Examples of such languages include C, C++, Pascal, JAVA, BASIC, Smalltalk, Visual Basic, and Visual C++.

Transmission of program code embodied on a computer readable medium can occur using any appropriate medium including, but not limited to, wireless, wired, optical fiber cable, radio frequency (RF), or any suitable combination thereof.

The program code may execute entirely on a user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on a remote computer or server. Any such remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

In addition, the described methods can be implemented using ultrawideband for direct range measurement between the device and the base and relay stations, on an image processing device and/or infrared ranging at either the mobile device or at the base and/or relay stations, or the like, or on a separate programmed general purpose computer. Additionally, the methods of this invention can be implemented on a special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit element(s), an ASIC or other integrated circuit, a digital signal processor, a hard-wired electronic or logic circuit such as discrete element circuit, a programmable logic device such as PLD, PLA, FPGA, PAL, or the like. In general, any device capable of implementing a state machine that is in turn capable of implementing the proposed methods herein can be used to implement the image processing system according to this invention.

Furthermore, the disclosed methods may be readily implemented in software using object or object-oriented software development environments that provide portable source code that can be used on a variety of computer or workstation platforms. Alternatively, the disclosed system may be implemented partially or fully in hardware using standard logic circuits or a VLSI design. Whether software or hardware is used to implement the systems in accordance with this invention is dependent on the speed and/or efficiency requirements of the system, the particular function, and the particular software or hardware systems or microprocessor or microcomputer systems being utilized. The methods illustrated herein however can be readily implemented in hardware and/or software using any known or later developed systems or structures, devices and/or software by those of ordinary skill in the applicable art from the functional description provided herein and with a general basic knowledge of the computer and image processing arts.

Moreover, the disclosed methods may be readily implemented in software executed on programmed general purpose computer, a special purpose computer, a microprocessor, or the like. In these instances, the systems and methods of this invention can be implemented as program embedded

on personal computer such as JAVA® or CGI script, as a resource residing on a server or graphics workstation, as a routine embedded in a dedicated fingerprint processing system, as a plug-in, or the like. The system can also be implemented by physically incorporating the system and method into a software and/or hardware system.

Relative terms used herein, such as top, bottom, front, back, side, left, right, above, below, upper, and lower, refer to how features of the apparatus appear in the figures, and serve to facilitate the description of the invention, and are not meant to be interpreted as limitations.

While this invention has been described in conjunction with a number of embodiments, it is evident that many alternatives, modifications and variations would be or are apparent to those of ordinary skill in the applicable arts. Accordingly, it is intended to embrace all such alternatives, modifications, equivalents, and variations that are within the spirit and scope of this invention.

What is claimed is:

1. A position tracking system, comprising:
 - a base station with a processor;
 - at least three spatially separated receiver antennae disposed at locations known to the processor of the base station, each of the at least three receiver antennae receiving electromagnetic signals transmitted by a transmitting antenna of a mobile device; and
 - one or more relay stations in communication with the base station and with the transmitting antenna of the mobile device, each relay station being disposed at a distance from the base station known to the processor of the base station, each relay station comprising a processor, one or more receiver antennae that receive the electromagnetic signals transmitted by the transmitting antenna of the mobile device, and one or more transmitter antennae, the one or more transmitter antennae of each relay station sending timing information associated with the electromagnetic signals received by the one or more receiver antennae of that relay station to the base station;
 wherein the processor of the base station uses the timing information associated with the electromagnetic signals received by and sent from the one or more relay stations to the base station and timing information associated with the electromagnetic signals received by the at least three spatially separated receiver antennae to compute the position of the transmitting antenna of the mobile device.
2. The position tracking system of claim 1, wherein the processor of a given one of the one or more relay stations computes phase difference data based on the electromagnetic signals received by the one or more receiver antenna of the given relay station, and the timing information transmitted from the given relay station to the base station includes the phase difference data.
3. The position tracking system of claim 1, wherein each of the one or more transmitter antennae of a given one of the one or more relay stations retransmits time of arrival information associated with the electromagnetic signals received by the one or more receiver antennae of the given relay station, and the timing information transmitted from the given relay station to the base station includes the retransmitted time of arrival information.
4. The position tracking system of claim 3, wherein the processor of the base station subtracts time taken for the retransmitted time of arrival information associated with the electromagnetic signals received by the one or more receiver antennae of the given relay station from an aggregate timing

13

information for those electromagnetic signals to reach the base station by way of the given relay station, to isolate a path between the mobile device and the given relay station.

5 5. The position tracking system of claim 3, wherein each of the one or more transmitter antennae of the given relay station uses a different frequency from a frequency at which the electromagnetic signals are received by the one or more receiver antennae of the given relay station.

10 6. The position tracking system of claim 1, wherein the processor of the base station computes a location of each of the one or more transmitter antennae of a given one of the one or more relay stations relative to the at least three spatially separated receiver antennae.

15 7. The position tracking system of claim 1, wherein one of the processors determines a position of each of the one or more receiver antennae of a given one of the one or more relay stations with respect to each of the one or more transmitter antennae of the given relay station.

14

8. The position tracking system of claim 1, wherein two or more receiver antennae of a given one of the one or more relay stations are at known distances apart.

9. The position tracking system of claim 1, wherein at least one of the one or more relay stations is in communication with the base station over at least one wireless communication channel.

10 10. The position tracking system of claim 1, wherein the base station offsets the timing information associated with the electromagnetic signals received by and sent from a given one of the one or more relay stations to the base station by timing information associated with a distance of the given relay station from the base station.

15 11. The position tracking system of claim 1, wherein at least one of the one or more relay stations is disposed on a different side of the transmitting antenna of the mobile device from the base station.

12. The position tracking system of claim 1, wherein the base station computes orientation of the mobile device.

* * * * *