

(19)



(11)

EP 3 145 739 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

28.08.2024 Bulletin 2024/35

(21) Application number: **15793333.4**

(22) Date of filing: **15.05.2015**

(51) International Patent Classification (IPC):

B60J 3/00 ^(2006.01) **F21S 8/06** ^(2006.01)
F21V 21/34 ^(2006.01) **E04F 10/06** ^(2006.01)
E04H 15/06 ^(2006.01) **H01R 25/14** ^(2006.01)

(52) Cooperative Patent Classification (CPC):

E04F 10/0614; E04F 10/0625; E04F 10/0659;
E04F 10/0666; E04F 10/0696; H01R 25/142;
E04F 10/0651

(86) International application number:

PCT/US2015/031175

(87) International publication number:

WO 2015/175990 (19.11.2015 Gazette 2015/46)

(54) **POWER TRACK AWNING ASSEMBLY**

STROMSCHIENENMARKISENSYSTEM

ENSEMBLE AUVENT À RAIL ÉLECTRIQUE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **15.05.2014 US 201414278180**

25.11.2014 US 201462084226 P

(43) Date of publication of application:

29.03.2017 Bulletin 2017/13

(73) Proprietor: **Dometic Corporation**

Louisville, Kentucky 40223 (US)

(72) Inventors:

- **TAYLOR, Brent Alan**
Auburn, Indiana 46706-1011 (US)

- **MEYERS, Clayton Hendry**
Middlebury, Indiana 46540-9272 (US)
- **BECKER, Kent A.**
Huntertown, Indiana 46748-9788 (US)

(74) Representative: **Grosse Schumacher Knauer von Hirschhausen**

Patent- und Rechtsanwälte
Nymphenburger Strasse 14
80335 München (DE)

(56) References cited:

EP-A1- 0 859 350 EP-A1- 1 484 459
EP-A1- 1 484 459 ES-U- 1 103 311
US-A- 4 190 309 US-A- 5 148 849
US-A1- 2009 180 301 US-A1- 2011 048 651
US-A1- 2013 235 558

EP 3 145 739 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**CLAIM TO PRIORITY**

[0001] This application claims the benefit of co-pending U.S. Non-Provisional Patent Application Serial Number 14/278,180 filed May 15, 2014 and entitled "Power Track Awning Assembly" and Provisional Patent Application Serial Number 62/084,226 filed November 25, 2014 under the same title.

BACKGROUND**Field of the Invention**

[0002] Present embodiments generally pertain to an awning assembly with powered service for electrical accessories. More particularly, present embodiments relate to, without limitation, a rotatable awning assembly with a power track formed in the assembly for connection of various electrically powered accessories.

Description of the Related Art

[0003] The use of awnings on recreational vehicles and fixed structures, for example on homes, has increased in part due to a desire to increase the functionality of outdoor living spaces beneath and around these awnings. Various attempts have been made to improve functionality of outdoor living spaces created in part by outdoor awnings. In doing so, a host of problems have arisen.

[0004] For example, it would be desirable to use powered accessories in the outdoor living space. However, use of electrically powered accessories has been difficult for a multitude of reasons. One problem has been related to the use of electrical wiring or power cords for the accessories. Some prior art devices have utilized awning hems to conceal wiring from the RV to the extended end of the awning. Other prior art or solutions have utilized separate joist-like structures within the awning framework to position lights once the awning has been extended. Other solutions have involved multiple power cords running to accessories. However, it may not be desirable to run a multitude of wires which may be a tripping hazard or delay storing of the awning for example, if windy conditions or weather changes rapidly.

[0005] Additional problems have involved pathways for the wires while accommodating the extension and retraction of the awning assembly. While some attempts have been made to conceal the wire in the awning hem, the rolling of the awning and wire therein may cause undesirable thickening of the awning edges when rolled.

[0006] Accordingly, it would be desirable to overcome these and other deficiencies to provide an awning assembly which allows the use of powered accessories to increase the functionality of the outdoor living space provided in part by the awning. It would also be desirable to

provide additional function under and around the shaded area of the awning.

[0007] The information included in this Background section of the specification, including any references cited herein and any description or discussion thereof, is included for technical reference purposes only and is not to be regarded subject matter by which the scope of the invention is to be bound.

[0008] An example of a device for illuminating a translucent surface and illuminated panel using the same is disclosed in EP 0 859 350 A1. EP 0 859 350 A1 shows a power track awning assembly according to the preambles of claims 1, 6 and 22. The device includes attachments for the surface and a supporting, insulating, protective hood. Its profiled sections are end to end. Each forms a pair of wings diverging from the top. The profiled, electrically-conductive, sections are internally concave and fit within the wings to form light reflectors. At the top these butt against a projection where the wings join. Each conductive section is at a different electrical polarity, and can supply electrical energy over the entire length of the support. An example of a structure of articulated arms for awning with integrated lighting is disclosed in ES 1 103 311 U.

SUMMARY

[0009] According to some embodiments, which are not part of the invention, an awning roller assembly is provided. The structure provides an awning roller tube having a first end and a second end with a powered groove extending between the ends, in full or in part. The powered groove includes a plurality of tracks having at least one electrical conductor in each track. An accessory base is provided for connection with a plurality of powered accessories, including but not limited to, lights, fans or audio-video equipment. The accessory base provides electrical connection between the powered groove and the accessory to provide improved function in the outdoor living space beneath and around the awning.

[0010] According to some embodiments, which are not part of the invention, the power track awning assembly comprises an awning roller tube and awning canopy which is capable of being wrapped about the awning roller tube as the awning roller tube moves between a first position and a second position, the awning roller tube having a first end and a second end, a power groove extending between the first end and the second end, at least one track having first and second conductors disposed in the power groove, an accessory base disposed in the power groove, the accessory base having a first contact in electrical communication with the at least one track and a second contact in electrical communication with the at least one track.

[0011] Optionally, still not part of the invention, the power track awning assembly further comprising a third contact on the accessory base. An electrical strip may be located in said powered groove and in electrical com-

munication with the third contact. The contact between the third contact and said electrical strip may preclude movement of the awning roller tube. The third contact being one of a spring and a solid contact. The power groove may further have at least one first retainer rib for retaining the at least one track. The power groove may have at least one second retainer rib for retaining a second track. The power track awning assembly may further comprise at least one third locating rib for locating an electrical strip. The at least one track may be formed of co-extruded materials wherein one of the co-extruded materials is electrically conductive. The at least one track may alternatively be formed by adding the conductors to at least one track body during formation of the at least one track body. As a further alternative, the at least one track may be formed by independently forming at least one body and the conductors and subsequently joining said at least one body with said conductors. The power track awning assembly may further comprise an opening extending into the power groove. The accessory base may have a power head. The power head may have a first dimension which is less than a dimension of the opening. The power head may have a second dimension which is greater than a dimension of the opening. The power track awning assembly may further comprise a powered accessory connected to the accessory base. The powered accessory may be at least one of a light, a fan and a speaker. The power track awning assembly may further comprise a rotating conductor allowing electrical wiring to pass between a fixed structure to a rotating structure of the powered awning roller assembly. The power track awning assembly further comprises at least one circuit for providing power to the at least one track of the power groove. The power groove may not be powered when the awning is retracted. Alternatively, the power groove may be powered when the awning is extended.

[0012] According to a first embodiment of the invention, a power track awning assembly comprises the features of claim 1.

[0013] Optionally, the power track awning assembly may further comprise wiring extending between a power source and the extrusion through the plurality of arms. The extrusion having at least one retaining channel. The retaining channel may be capable of mounting the extrusion to the awning bar. The power track awning assembly may further comprise at least one control circuit.

[0014] According to a second embodiment of the invention, a power track awning assembly comprises the features of claim 6.

[0015] Optionally, the accessory base is in electrical communication with the first and second conductors. The accessory base may be positioned in the power groove. The power track awning assembly may further comprise an accessory in electrical communication with said accessory base. The accessory may be one of a light, a fan, an audio accessory and a video accessory. The power groove may be formed on an extended arm. The power groove may have a plurality of locating ribs. The plurality

of locating ribs may engage the at least one track. The at least one track may be two tracks. The power groove may be formed in one of a top arm and a base arm. The hardware component may be an awning arm. The awning arm may be a channel shaped structure. The hardware component may be connected to an awning roller tube. The power track awning assembly may further comprise a power-in feed cover in electrical communication with the at least one track. The awning assembly may comprise a roller tube. The awning assembly may comprise a cassette type awning.

[0016] According to a third embodiment of the invention, a power track awning assembly comprises the features of claim 22.

[0017] Optionally, the accessory base is positioned in the power groove. The power track awning assembly may further comprise an accessory in electrical communication with the accessory base. The accessory may be one of a light, a fan, an audio accessory and a video accessory. The power groove may be formed on an extended arm. The power groove may have a plurality of locating ribs. The plurality of locating ribs may engage the at least one track. The at least one track may be two tracks. The power groove may be formed in one of a top arm and a base arm. The hardware component may be an awning arm. The awning arm being a channel shaped structure. The hardware component may be connected to an awning roller tube. The power track awning assembly may further comprise a power-in feed cover in electrical communication with the at least one track. The awning assembly may comprise a roller tube. The awning assembly may comprise a cassette type awning.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] In order that the embodiments may be better understood, embodiments of the power track awning assembly will now be described by way of examples. These embodiments are not to limit the scope of the claims as other embodiments of the power track awning assembly will become apparent to one having ordinary skill in the art upon reading the instant description. Non-limiting examples of the present embodiments are shown in figures wherein:

FIG. 1 is an isometric view of an exemplary recreational vehicle having a power track awning assembly not part of the invention and having various accessories located therein;

FIG. 2 is an isometric view of an assembled power track awning assembly, which is not part of the invention;

FIG. 3 is an exploded isometric view of the power track awning assembly, which is not part of the invention;

FIG. 4 is an isometric view of a power-in feed cover shown in FIG. 3;

FIG. 5 is a section view of the power track awning

roller assembly, which is not part of the invention; FIG. 5A is a detailed section view of the power track awning roller tube assembly, which is not part of the invention;

FIG. 6 is an isometric view of the first and second tracks of the assembly of FIG. 2;

FIG. 7 is an isometric view of the assembled accessory base including the power head;

FIG. 8 is an exploded isometric view of the embodiment of FIG. 7;

FIG. 9 is a side view of a power track awning assembly according to a first embodiment of the invention, and a cassette awning assembly.

FIG. 9A is a side detail view of an extrusion utilized with the cassette awning of FIG. 9;

FIG. 10 is a side view of an exemplary wire routing through a hardware assembly;

FIG. 11 is an exemplary control logic flow chart for use of the power track awning;

FIG. 12 is an isometric view of a power track awning assembly according to a second embodiment of the invention;

FIG. 13 is an isometric view of an exemplary hardware component of an exemplary hardware assembly having a power track;

FIG. 14 is an isometric view of one component of the hardware assembly of FIG. 13;

FIG. 15 is a section view of the exemplary hardware component having a power groove;

FIG. 16 is a section view of FIG. 15 further comprising at least one power track; and,

FIG. 17 is an additional section view of FIG. 16 further comprising an accessory base for powering an accessory disposed in the power groove.

DETAILED DESCRIPTION

[0019] It is to be understood that the power track awning assembly is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways within the scope of the appended claims.

[0020] Referring now in detail to the drawings, wherein like numerals indicate like elements throughout several views, there are shown in FIGS. 1-17 various embodiments of the power track awning assemblies, with some of them being part of the invention, some others not being part of the invention. The assemblies may include an awning roller tube having a power groove extending axially between a first end and a second end of the tube, either in full or in part. The power groove includes at least one track having first and second conductors which are in electrical communication with an accessory mount or base. The accessory base provides electricity to each of various electrically powered accessories which may be utilized with the power track awning assembly. The power

track awning assembly allows for rotation of the awning tube despite the tube being rotatable between fixed ends of the assembly. Alternatively, the power track awning assembly may include an awning bar wherein an extrusion has a power groove including at least one track and conductors for electrical communication with an accessory base powering an accessory, for example for use in a cassette-type awning. In still further embodiments, a hardware assembly is provided with a power groove for powering accessories from the awning assembly hardware.

[0021] Referring now to FIG. 1, which is not part of the invention, a perspective view of a recreational vehicle (RV) 10 is depicted. The exemplary RV includes a drive and a transmission, not shown, as well as at least one sidewall 12 and a roof 14. It should be understood that although an RV is referred to in the exemplary embodiments, one skilled in the art should understand that the use of the awning with a power track is not limited to these drivable vehicles. The term "RV" is also meant to include towable structures, sometimes called campers, homes and other stationary structures as well as boats or other marine applications for example which use canopy structures which may or may not be retractable, commercial vehicles, agricultural vehicles, horse trailers, and temporary structures such as those used at sports events, (tailgating), flea markets. All of these structures are considered to be usable with the power track awning assemblies of the present embodiments.

[0022] An awning assembly 20 is connected to the sidewall 12 and/or the roof 14 of the vehicle 10. In further embodiments, the awning assembly 20 may be retractable within the sidewall 12 so as to reduce the airflow interference of the assembly while the vehicle 10 is being operated.

[0023] The awning assembly 20 includes an awning or canopy 22 and hardware assembly 28 defined by at least one first arm 24 and at least one second arm 26. The awning hardware assembly 28 is utilized, according to the instant embodiment, to connect the awning assembly 20 to the sidewall 12 of the vehicle 10. The hardware assembly 28 allows for support of the canopy 22 in an extended position (shown) or in a retracted position. The hardware assembly 28 also provides a pathway for wiring from a power source to the awning roller tube to power an accessory or power the awning motor. The awning assembly 20 is exemplary and other variations may be utilized. Also, the roller tube assembly may be movable as shown, or may be fixed to the sidewall 12. Further, for example, according to some embodiments, a cassette style awning may be utilized.

[0024] The depicted awning assembly 20 further includes a power track awning assembly 30 which moves inwardly and outwardly with corresponding retraction or extension of the canopy 22 to provide the sheltered or shaded area beneath the awning assembly 20. The awning assembly 20 may be a manually operated assembly requiring manual rotation to extend or retract the canopy

22. Alternatively, the awning assembly 20 may be an automated system such as by electrical, air, hydraulic or other fluid power systems to cause extension or retraction of the canopy 22.

[0025] The power track awning assembly 30 is shown in extended position with various accessories 32 located therein. For example, the power track awning assembly 30 depicts a pair of pendant track lights 32 depending from the awning roller tube which provide illumination for the area beneath the awning assembly 20. While pendants are shown, other types of lights may be utilized and this description should not be considered limiting. Additionally, a fan accessory 34 is shown spaced from the pendant lights 32. The fan accessory 34 creates an air flow beneath the awning assembly 20 which aids to provide a cool feeling in the area and move air so as to reduce the amount of insects in the area beneath the awning. These accessories 32, 34 are merely examples and not limiting as various other accessories may be utilized such as audio-video equipment for example, wireless speakers, television 36, or the like, all of which may be powered by the power track awning assembly 30 and all of which are collectively referred to as accessories.

[0026] Referring now to FIG. 2, which is not part of the invention, the power track awning assembly 30 is shown in isometric view removed from the awning canopy 22 (FIG. 1) and hardware assembly 28. The power track awning assembly 30 includes an awning roller tube 50 having a first end 40 and a second end 42. Rotation of the roller tube 50 is provided between fixed top castings 44, 46 and bushing structures which allow for rotation of end caps 48, 49 and the roller tube 50. A rotatable conductor 60 (FIG. 3) is provided at one of the first and second ends 40, 42 of the power track awning assembly 30 to provide electrical power for a power groove 52. The power groove 52 extends between the first end 40 and the second end 42 of the power track awning assembly 30 and may extend continuously through the entire roller tube 50 or may extend partially between the first end 40 and the second end 42. Additionally, a single power groove 52 is depicted however, multiple grooves may be utilized in alternate embodiments. For example, multiple grooves may be used which are axially aligned. Also, multiple grooves may be used which are spaced apart circumferentially about the awning roller tube.

[0027] An accessory base 54 is depicted in the groove 52 and makes powered connection for various accessories. The accessories may be connected to the base 54, to provide power from the groove 52 to any of the accessories for example, 32, 34, 36 (FIG. 1).

[0028] At the first end 40 of the power track awning assembly 30 is a power wire 41 with a connector. The wire 41 in the exemplary embodiment provides power to a motor which causes rotation of the roller tube 50 and end caps 48, 49. At the opposite end, a second wire 43 is depicted extending from the second top casting 46 and provides power for the power groove 52 and accessories connected to the accessory base 54. The wires 41, 43

are connected to additional wiring which runs through the hardware 28 and therefore, remains substantially hidden from view and from possibility of entangling with other structures or during the use of the awning assembly 20 (FIG. 1). For example, with brief reference to FIG. 10, an exemplary routing is shown wherein the wiring is shown passing through the hardware assembly. The wiring is depicted as a broken line and raised from the hardware assembly 28, but in actual use is positioned within the hardware assembly 28. Specifically, in the depicted arrangement, the hardware 28 includes a first arm 24 which mounts to a sidewall 12 of an RV 10 or fixed structure. A second arm 26 is pivotally connected to the first arm 24 and a third arm 27 is pivotally connected to the second arm 26. The hardware assembly 28 may further comprise a strut 29 or alternatively may comprise an adjustable arm assembly 31 which allows height adjustment of the ends of roller tube 50 and awning 22. The wiring extends through the third arm 27, through the second arm 26 and to the first arm 24 where it may extend upwardly or downwardly. The arms 24, 26 and 27 of the hardware assembly 28 may be closed cross-section structures or may be open or a combination thereof.

[0029] Referring now to FIG. 3, which is not part of the invention, an exploded isometric view of the power track awning assembly 30 is depicted. The awning tube 50 has a rod 51 with a torsion spring 53 wrapped thereabout which extends coaxially through the tube 50. This torsion spring 53 serves to assist the motor in closing the canopy 22, and helps to control awning extension. The rod 51 is connected to a rotating conductor 60 which extends through the end cap 49. The rotating conductor 60 allows for transmission of electrical voltage and current from the fixed part of the assembly 30, which is the top casting 46, into the rotating portion of the assembly 30, including the roller tube 50 and to the tracks 70, 72. This precludes wrapping or binding of electrical wires. The end cap 49 is connected at a second end 42 of the power track awning assembly 30. The first end 40 of the assembly 30 includes the end cap 48 and top casting 44 which are connected to a motor assembly that extends into the tube 50.

[0030] In this view, the tube 50 is shown with the power groove 52 extending axially through the tube 50 from the first end 40 toward the second end 42. As previously described, the groove 52 may extend completely through the tube 50 in the axial direction or may extend partially. Further, while one groove 52 is shown, multiple grooves 52 may be utilized in extending from a first end 40 toward a second end 42. Additionally or alternatively, multiple grooves 52 may be spaced circumferentially about the tube 50.

[0031] Exploded from the power groove 52 are first and second tracks 70, 72. The tracks provide conductors 84, 85 (FIG. 5A) which are engaged by the accessory base 54 to provide power to an accessory attached to the roller tube 50. Two tracks 70, 72 are shown but the tracks may be formed as a single structure and located within groove

52.

[0032] According to the instant embodiment, the power groove 52 extends completely through the roller tube 50. The groove 52 is covered at ends by the covers 61, 63. One of covers 61, 63 may be cosmetic in function serving to create a symmetrical appearance with the opposite cover 61, 63. The other of covers 61, 63 may be a power-in feed cover which transfers power from the rotating conductor 60, and functions as a plug to power the track conductors 84, 85 within the tracks 70, 72. Additionally, the exemplary rotating conductor 60 is further shown and described in co-pending U.S. non-provisional patent application 14/278,036, titled "Rotatable Awning with Illumination", filed May 15, 2014 by Taylor, all of which is incorporated herewith.

[0033] With reference now to FIG. 4, which is not part of the invention, an isometric view of a power-in feed cover 63 is shown. For purpose of orientation, the depicted side of the cover 63 faces the interior of the roller tube 50 (FIG. 3) and groove 52 (FIG. 3) and is positioned within the groove 52 of the awning roller tube 50. The cover 63 is positioned at an end of the groove 52 adjacent to roller cap 49, for example, on one side and the tracks 70, 72 (FIG. 3) on the other side, in an axial direction. The cover 63 includes a housing 64 which may be formed of various materials which are molded, cast or otherwise formed of non-conductive materials. Extending from the housing 64 is first and second cover conductors 65, 66. The conductors 65, 66 define portions of a circuit which provides electrical communication between the rotating conductor 60 and the tracks 70, 72 having conductors 84, 85 (FIG. 5A) therein. Thus, the cover 63 functions to provide a power-in feed to the tracks 70, 72. Also, located on the housing 64 is a third cover conductor 67 (see also FIG. 5A) which provides a sensor for detecting the presence of accessories. The conductor 67 comes in contact with third conductor strip 89 (Fig 5A). When conductor 67 comes in contact with strip 89 it completes a circuit to ground. This grounding action communicates to an awning controller or other circuit for purpose of decision making chart 200 (FIG. 11) that an accessory 32 is installed in the power groove 52. If an accessory is not present, then the ground circuit is open and the awning is allowed to roll up. If the ground circuit is closed, the awning is not allowed to roll up. Thus, the system functions as a safety device. The conductors 65, 66, 67 may be formed of various materials including, but not limited to, copper, brass or other electrically conductive material types.

[0034] Referring now to FIG. 5, which is not part of the invention, a section view of the power track awning assembly 30 is depicted. In this view, the roller tube 50 is shown. Additionally, a plurality of axial grooves 55 are shown in the tube 50 for connection of the canopy 22 (FIG. 1) to the roller tube 50. The tube 50 includes the power groove 52 formed integrally with the tube 50. The tube 50 may be extruded of various materials including, but not limited to, aluminum which has lightweight but high strength characteristics.

[0035] With additional reference to FIG. 5A, which is not part of the invention, within the power groove 52 are the first and second tracks 70, 72. The tracks 70, 72 are retained in position by a plurality of locating ribs 74, 76.

5 The ribs 74, 76 locate the tracks in desired positions within the groove 52 and inhibit undesirable movement. Specifically, the first track 70 is retained by at least one first locating rib 74. In the exemplary embodiment, there are two ribs 74, 75 which locate the first track 70 in a desired position within the groove 52. Similarly, with regard to the second track 72, at least one retaining rib 76 is utilized to locate the track 72. In the exemplary embodiment, the track 72 is positioned with two retaining ribs 76, 77.

10 **[0036]** With reference still to the detailed section view of FIG. 5A, of the roller tube assembly 30, accessory base 54 is disposed within the groove 52. The accessory base 54 includes a power head 95 which extends into the groove 52. The power head 95 includes a pair of contacts 93, 94 which also engage conductors 84, 85 in the tracks 70, 72 to complete a circuit and any of the exemplary power accessories 32, 34, 36 which are mounted to the accessory base 54.

20 **[0037]** Also shown in this view is a conductor or electrical strip 89. As with the tracks, 70, 72, the electrical strip 89 is located with a rib 75a, adjacent to rib 75. The electrical strip 89 is engaged by a third contact 96 extending from power head 95, as well as third cover conductor 67 and provides a safety feature. According to some embodiments, the third contact 96 may be a spring contact while according to other embodiments, the contact 96 may be a solid contact. Since the canopy 22 (FIG. 1) wraps about the roller tube 50 when the assembly 20 is stowed, the accessory base 54, including any accessory, should be removed from the power groove 52 before the canopy 22 is wrapped. The electrical strip 89 and third contact 96 inhibit operation of the awning motor when the accessory base 54 is disposed in the groove 52. As a result, the awning assembly 20 cannot be stowed when an accessory is located in the power groove 52, inhibiting damage to the awning assembly 20 or the accessory.

30 **[0038]** Referring now to FIG. 6, the first and second tracks 70, 72 are depicted removed from the power groove 52. Each track 70, 72 has an extrusion body 71, 73 which is generally U-shaped. Extending from near one end of the U-shaped extrusion bodies 71, 73 are ribs 78, 79 and 81, 82. The extrusion bodies 71, 73 further comprise arms 80 which, when viewed in FIG. 5A, limit vertical movement by engaging the ribs 74, 76. Each of the extrusion bodies 71, 73 further defines a cavity 83 wherein conductors 84, 85 are located. The conductors 84, 85 provide power to the accessory base 54 (FIG. 5A) when the base is moved to a preselected position. The extrusion bodies 71, 73 further comprise a plurality of laterally extending ribs 86, 87 which space the tracks 70, 72 from the walls of the power groove 52.

45 **[0039]** One skilled in the art should be aware that while two tracks 70, 72 are shown, the instant embodiment

should not be limited. For example, a single track structure may be formed which houses and separates both conductors 84, 85 and therefore such embodiment is also considered within the scope of the instant disclosure. Further the at least one track, or two tracks 70, 72, may be formed in a plurality of manners. In one embodiment, the extrusion bodies 71, 73 may be coextruded with a metal defining the conductors 84, 85. The conductors 84, 85 may be formed of copper, brass or other conductors according to the non-limiting description. The extrusion bodies 71, 73 are generally non-conductive so as to insulate the conductors 84, 85 from touching other components of the groove 52 or any part of the roller tube 50. For example, the extrusion bodies 71, 73 may be formed of polymeric or plastimerics including but not limited to vinyl, polyethylene, HDPE, LDPE and like materials. It is desirable that these materials be non-conductive. According to a second embodiment, the conductors 84, 85 may be pre-formed and added to the extrusion bodies 71, 73 when the bodies are formed, such as by extrusion, molding, casting or other forming process. According to a third embodiment, the conductors 84, 85 may be joined in manual or automated fashion after the extrusion bodies 71, 73 are formed independently.

[0040] As with the description of the power groove 52, the tracks 70, 72 may be formed of various lengths. The length may depend upon the length of the groove 52 and may extend for the entire length of the roller tube 50 or may extend some length less than the length of the roller tube 50. Additionally, more than one groove 52 may be formed in the tube 50 and therefore, more than one pair of tracks 70, 72 may be formed to be positioned in the tube 50.

[0041] Referring now to FIG. 7 an isometric view of an accessory base 54 is depicted. The base 54 comprises a flange 90 including at least one aperture 92 for connection of the accessory base 54 to an accessory, such as the accessories 32, 34, 36 previously depicted in FIG. 1. The base 54 may be formed to be interchangeable with various accessories. The flange 90 is shown as a square shape with two apertures 92. However, the flange 90 may be formed of various shapes corresponding to the shapes utilized for the corresponding shapes of the accessories and therefore, this depicted embodiment is not limiting. Extending through a lower surface of the flange 90 are first and second contacts 93, 94 which extend into a power head 95 and turn so as to extend outwardly from the power head 95. The power head 95 has a first dimension d_1 and a second dimension d_2 . The first dimension d_1 is less than an opening dimension in the power groove 52 so that the head may be inserted into the groove 52. The second dimension d_2 extends between the first and second contacts 93, 94 and is greater than d_1 . The second dimension d_2 is greater than the opening dimension of the power groove 52 so that when rotated, the power head 95 and accessory base 54 are locked into position within the power groove 52. Further, when the rotation of the power head 95 and accessory

base 54 occurs, the first and second contacts 93, 94 engage the conductors 84, 85 of the tracks 70, 72. Thus, with reference again to FIGS. 5-7, one skilled in the art will understand that the various ribs 74, 75, 75a, 76, 77 of the power groove 52 and the extrusions 71, 73 provide a locating functionality for the tracks 70, 72 and more importantly, the conductors 84, 85 so that the contacts 93, 94 may be reliably installed into the power grooves 52 and engage the conductors 84, 85. Extending from the power head 95 is a third contact 96. The third contact 96 engages an electrical strip 89 (FIG. 5A) extending through the power groove 52. When the contact 96 engages the electrical strip 89, a circuit is defined such that the motor of the awning assembly 20 cannot rotate the awning roller tube 50. Thus, any accessory that is installed, for example accessory 32, should not be damaged due to inadvertent starting of the awning roller 50. However, when the accessory base 54, and necessarily accessory connected to the base 54, is removed and the third contact 96 disengages the electrical strip 89 (FIG. 5A), the awning assembly 20 may be rotated from the extended position shown in FIG. 1 to a closed and stowed position without risk of damaging any accessories.

[0042] Referring now to FIG. 8, an exploded isometric view of the accessory base 54 is depicted. The flange 90 is exploded from the first and second contacts 93, 94. It should be clear to one skilled in the art that the contacts 93, 94 extend through the flange structure 90 and depend outwardly so as to pass from the flange 90 and out from the power head 95. The power head 95 is also shown to be formed of two pieces 95a, 95b which are fastened together and allow for ease of assembly of the right angle contacts 93, 94. Additionally, the third contact 96 is shown which extends from a hole in the power head cover 95b so that the spring contact 96 may engage the electrical strip 89 (FIG. 5A) within the power groove 52 (FIG. 5A) and complete the safety portion of the circuit previously described.

[0043] Referring now to FIG. 9, a side isometric view of an alternate cassette awning assembly 120 according to a first embodiment of the invention, is depicted. One skilled in the art will understand that cassette awnings differ from that of the previous embodiments wherein the roller about which a canopy 122 wraps is located at a fixed end of the roller assembly 130, for example against a wall of a stationary structure such as a house or commercial building or alternatively, a side wall of the RV 10 (FIG. 1). The roller assembly 130 is generally fixed in the instant embodiment and at an opposite end is defined by an extending bar 131 which moves toward or away from the fixed rotating awning assembly 130. Between the bar 131 and the roller assembly 130, is a hardware assembly 128 which comprises pairs of first and second foldable arms 124, 126. These arms 124, 126, defining the hardware assembly 128, provide support for the awning or canopy 122 extending from the roller assembly 130 to the bar 131. This is a general description of a cassette awning and other constructions may differ, and therefore

this should be considered a non-limiting description of merely one embodiment which may be utilized in combination with an extrusion 151.

[0044] With further reference now to the detail view of FIG. 9A, the extrusion body 151 is formed of an arm which may be tapered or angled relative to the bar 131 or may depend vertically, downwardly from the bar 131. According to other embodiments, the extrusion 151 may be formed to extend outwardly and generally parallel or at a slight descending angle relative to the ground. The extrusion 151 may have a plurality of retaining channels 157 for either retaining portions of the awning 122 or other accessory products which may be desirably used with the cassette awning 120. Toward a lower end of the extrusion 151 is a power groove 152 which comprises an opening as in the previous embodiment for retaining at least one track having at least first and second conductors 184, 185. According to instant embodiments, two tracks 170, 172 are shown wherein the power groove 152 further comprises ribs 174, 175 and 176, 177 to retain the tracks 170, 172 in position and properly locate the tracks 170, 172 therein.

[0045] The tracks 170, 172 comprise bodies as previously described with ribs which also aid to locate the tracks 170, 172 within the power groove 152. The tracks 170, 172 further comprise conductors 184, 185 which are engaged by an accessory base as with the previous embodiment. Thus, the extrusion 151 provides a system for providing power through the awning assembly 120 and to the power groove 152 such that powered accessories may be utilized when the awning 120 is in an extended position.

[0046] As with the previous embodiment, it would be desirable to route wiring which extends between the extrusion 151 and the RV 10 (FIG. 1) or fixed structure through the hardware assembly 128. Accordingly, wiring may run through the arms 124, 126 to the bar 131 wherein the wiring may be routed from the bar 131 to the power groove 152 and through a power head (not shown) to an accessory.

[0047] Referring now to FIG. 11, a control logic flow chart 200 for use of the power track awning is depicted. The use of the awning by itself is controlled in part by an awning switch 210 which is in electrical communication with a controller, circuit or other arrangement which allows for input and output based on preselected criteria to determine whether or not to supply power to the power track for powering an accessory 32. The awning switch 210, according to one embodiment, may be a three position switch, for example with a neutral center position and first and second temporary positions meaning the switch must be held to either extend or retract the awning. The awning may also be retracted with the switch 210. When the switch 210 is disposed in a manner to retract 212 the awning, the awning motor 214 is powered to retract the awning at 215. When the awning is retracted, the power groove 52 is disabled. That is, the tracks 70, 72 are not powered.

[0048] Alternatively, if the awning switch 210 is moved to a position so as to extend the awning, the awning motor 214 rotates and causes the awning to extend 216. As the awning extends, the system 200 is continually determining whether the awning is fully retracted. A determination is made as to whether the motor amperage exceeds a preselected level. When the amperage exceeds the preselected amount, this represents a condition wherein the awning is fully extended causing the motor 214 amperage to rise above a desirable range. If the answer is no, the motor 214 continues to extend the awning. If the amperage exceeds the preselected amount 218, the motor 214 backs the roller up some amount or reverses from some preselected time period at 220. At this time, power is supplied to the track of the groove 52 at 226.

[0049] Once the awning is extended, the power track may be enabled for operation. This means that power is provided to the power groove 52 and may be controlled by a second switch 230. The second switch 230 controls power to the accessory 232. In one position, the power switch 220 may provide power to the accessory at 232. In a second position, power is not provided to the accessory at 234 but instead is available once the power switch 220 is actuated.

[0050] Referring now to Fig. 12, a power track awning assembly 30 according to a second embodiment of the invention, is provided. Similar to the previous embodiment, the awning assembly 20 is connected to a side wall 12 of a recreational vehicle (RV) 10. The side wall 12 is connected to a vehicle roof 14 so that the awning assemblies may be extended, as shown in the figure, or retracted. In this embodiment, the hardware assembly 328 utilizes a power groove in order to power various accessory devices as distinguished from the roller tube having the power groove in the previous embodiments. The power groove of the instant embodiment may be located along various components of the hardware assembly.

[0051] The awning assembly 20 includes an awning or canopy 22 and first and second hardware assemblies 328 which connects the awning assembly 20 to the side wall 12 of vehicle 10. The hardware assembly 328 supports the canopy 22 in the extended position (shown) and collapses to a compact, nested stack arrangement when the awning assembly 20 is retracted for road travel or when weather conditions preclude extended use of the awning assembly 20. In the retracted position, the hardware assemblies 328 are generally positioned in a vertical arrangement at lateral edges of the canopy 22 and along sidewall 12 of the RV 10. In the extended position depicted, portions of the hardware assemblies 328 extend outwardly from the RV sidewall 12.

[0052] The hardware assembly 328 also provides a path for wiring from a power source within the RV 10 to power the awning roller tube or to power an accessory which may be utilized with the awning assembly 20, as depicted in FIG. 10 for routing power to the power groove 352 (FIG. 14).

[0053] The hardware assembly 328 includes a plurality of arms wherein at least one of the arms includes the power groove 352 (FIG. 14). The hardware assemblies 328 form a four bar linkage comprising a first base arm 324, a second top arm 326, a third extending arm 327 and a fourth arm assembly 331 which may allow for pitch adjustment. While the present embodiment is depicted, one skilled in the art will realize that the power groove 352 may be utilized with other types of awning hardware and therefore, the instant embodiment is merely descriptive and not to be considered limiting.

[0054] The first base arm 324 is connected to the RV sidewall 12 and is channel-shaped having an open top which is capable of receiving a nested storage of the additional arms described in the following description of the hardware assembly. The first base arm 324 may be of a length so as to receive the additional arms in a compact nested arrangement so that those additional linkage arms do not extend from the bottom end of the first base arm 324. The channel shape is generally u-shaped and may have squared corners or rounded corners. Other shapes however may be utilized.

[0055] The first base arm 324 is straight and elongated and may be formed in various manners, including but not limited to an extrusion process. The first base arm 324 may be formed of a high strength lightweight material such as aluminum or aluminum alloy, among other materials. The channel shape comprises a main wall, a first side wall, and a second side wall defining the channel. The channel opening is outwardly facing so that the channel may receive the additional assembly arms when the awning assembly 20 is retracted.

[0056] The hardware assembly 328 further comprises a second top arm 326 which is pivotally connected to the first base arm 324 and extends at a second end to a third extended arm 327. The top arm 326 may also be formed of a high strength lightweight material such as aluminum alloy and may be formed in various fashions including, but not limited to, an extrusion process. Extending outwardly from the first base arm 324 is the adjustable arm assembly 331 which may allow adjustment of awning pitch, and the third extended arm 327. The third extended arm 327 may also be formed in various shapes including, but not limited to, a channel shape and provides for connection of various accessories such as the fan accessory 34 or a light accessory 32. Other audio or audio video accessories may be utilized in addition to the accessories depicted where such accessories may or may not need electrical communication for powering the device.

[0057] The adjustable arm assembly 331 extends from the base arm 324 and provides the capability to raise or lower corners of the awning assembly 20 disposed away from the RV sidewall 12. This adjustment of the corners allows independent raising or lowering of either end of the roller tube 50. Each adjustable arm assembly 331 includes a first member 333 and a second member 335 which slide relative to one another. Therefore, each adjustable arm assembly 331 may be adjusted to move and

may be adjusted between an extended position and a collapsed position. Although the depicted embodiment provides for manual adjustment, it is contemplated that other mechanisms may be provided to provide automated adjustment. A lock or clamp may be provided to limit relative motion between the members 333, 335 when the adjustable arm assembly 331 is set at a desired configuration. The locked or secure position may be engaged, for example when extended, collapsed, or any position therebetween. Additionally, the unlocked position allows for manual adjustment to a desired configuration, at which time the lock may be engaged. The lock may be embodied by a lock knob, clamp, fastener-nut, latch, other movement limiting structure or combinations thereof. While an adjustment arm assembly 331 is described which is shown to have pitch adjustment capability for the awning roller tube, one of ordinary skill in the art may recognize that various other adjustable functions may be provided by adjustable arm assembly. Therefore, the adjustment arm assembly 331 should not be considered solely limited to pitch adjustment.

[0058] The hardware assembly 328 may further comprise a strut 329 which extends between the first base arm 324 and a second top arm 326. The strut 329 supports the second top arm 326 when the awning is in an extended or deployed position. The strut 329 further provides damping force for example, in windy conditions or during heavy rains. The strut 329 may be a gas strut, fluid strut or other suitable structure wherein the inner end of the strut 329 is connected to the base arm 324 and the outer end connects to the second top arm 326. The strut 329 may be provided with pivoting joints, such as pivotable ball end joints, or other connectors so that the strut 329 pivots and may be received within the base arm 324 when the awning assembly 20 is retracted. The joints or ends of the strut 329 may connect to a mounting bracket or other similar structure which is connected to the base arm 324 by various types of fasteners including, but not limited to, rivets or screws.

[0059] The strut 329 applies a force on the assembly 20 to provide an opposed force to any force which may be applied by water collecting on the canopy 22 or alternatively wind blowing against the canopy 22. For example, the strut 329 may also allow a corner of the awning assembly 320 to lower if the adjustable arm assembly 331 is unlocked or unsecured. Alternatively, when the loading of the water or wind is gone, the strut 329 allows the awning assembly 20 to return the lowered corner into the desired position.

[0060] Referring now to FIG. 13, an isometric detail view of the hardware 328 is depicted. The hardware assembly 328 is shown in more detail to aid in understanding. While one specific embodiment is shown for purpose of description, one skilled in the art should realize that the specific hardware assembly shown is not limiting and that other assemblies may be utilized with a power groove 352 (FIG. 14) described further herein.

[0061] The hardware assembly 328 includes the base

arm 324 which connects the assembly 328 to a building or the RV sidewall 12 (FIG. 12). Further, the base arm 324 is shaped in a channel form to receive other components of the hardware assembly 328. At the upper end of the base arm 324 is the pivotally connected second top arm 326. The second top arm 326 pivots between the extended position shown corresponding to an extending awning canopy 22 and a retracted position wherein the top arm 326 is located within the base arm 324 and the canopy 22 is retracted.

[0062] Extending from a lower portion of the base arm 324 is the arm assembly 331 including a first member 333 and a second member 335. The end of the second member 335 farthest from the base arm 324 is connected to a third extended arm 327. In the instant embodiment, the third extended arm 327 includes the power groove 352 (FIG. 14) wherein the accessories 32, 34, 36 (FIG. 1) may be positioned. The third arm 327 is also channel shaped so that an open upper end of the arm 327 pivots toward the base arm 324 as the awning assembly 20 is retracted. As this occurs, the top arm 326 is hidden between the third arm 327 and the base arm 324.

[0063] The first and second members 333, 335 are slidable in an axial direction of the members relative to one another. When the arm assembly 331 is extended, the position of the end of the power track awning assembly 30 may be varied relative to the opposite end (not shown) of the power track awning assembly 30. Similarly, the members 333, 335 may be retracted to vary the pitch of the power track awning assembly 30 and the canopy 22. This functionality may also be provided at the opposite hardware assembly 328 so that the pitch of the canopy 22 may be changed to allow for drainage, for example, or allow of uneven deployment or retraction of the awning assembly 20. Once a desired position is achieved, in the extended configuration, the arm assembly 331 may be locked in various manners, for example a knob-lock assembly or other fastening structure.

[0064] Referring now to Fig. 14, an isometric view of the third extended arm 327 is depicted. A power groove 352 is shown formed with the extended arm 327 in the instant embodiment, as opposed to within the roller tube as in previous embodiments. The extended arm 327 includes a first end 351 and a second end 353. The cross-sectional shape of the arm 327 is channel-shaped having an open top 355 and side walls 356, 357 which meet at a base 359. One skilled in the art should realize that the power groove 352 may be formed on various of the arms 324, 326, 327, 331. The description of extended arms 327 is merely exemplary and should not be considered limiting.

[0065] Extending along the bottom surface of the base 359 is the power groove 352. The power groove 352 extends along the longitudinal length of the extended arm 327 between the first and second ends 351, 353. The power groove 352 is depicted as extending the entire length between the first and second ends 351, 353 but in alternative embodiments, may extend a partial length

or in still further embodiments, may extend the entire length of the extended arm 327 but be formed in a discontinuous manner so that multiple power grooves 352 are located along the arm 327. Additionally, while the power groove 352 is shown on the third extended arm 327, the groove 352 may also be located on other components of the hardware assembly 328 or alternatively, may be located on other forms of awning assemblies for example the cassette style of FIGS 9, 9A. For example, the power groove may be added to arms 124, 126.

[0066] Referring now to Fig. 15, an end view of the extended arm 327 is depicted. The arm 327 comprises the first side wall 356 and second side wall 357 as well as the base 359, as previously described. The base 359 may be curved as depicted, or may be a substantially flat structure, according to other embodiments. The first and second side walls 356, 357 may have a flat or curved surface and may also be stepped as shown.

[0067] Additionally, the power groove 352 is shown depending from the lower surface of the base 359. The power groove 352 is comprised of a first L-shaped wall 354 and a second reverse L-shaped wall 358 providing a gap between lower most ends of the walls 351, 353 wherein a hand accessory base may be positioned.

[0068] As with the previous embodiment, the power groove 352 includes a plurality of locating ribs 374, 375, 376, 377. These locating ribs are utilized to locate and retain the first and second tracks 70, 72 (Figs. 6, 16) which may be positioned within the power groove 352. The tracks 70, 72 may be formed as separate tracks or may alternatively be formed as a single track having multiple conductors as previously described. The additional locating rib 375a may be used to locate an electrical conductor strip 89 (FIG. 5A) in the same manner as previously described.

[0069] Referring now to FIG. 16, the section view of FIG. 15 is shown with the tracks 70, 72. The tracks 70, 72 are inserted in the power groove 352 at lateral sides and adjacent to the inner surfaces of the sidewalls 354, 358. As with the previous embodiments, the tracks 70, 72 have a plurality of locating ribs which interact with the walls 354, 358 and the locating ribs 374, 375, 376, 377 of the power groove 352.

[0070] Referring now to FIG. 17, an additional section view is depicted of the power groove 352 and the extended arm 327. An accessory base 54 is shown disposed within the power groove 352. As in the previous embodiment, the base 54 fits within the power groove 352 in one orientation and when rotated, for example 90 degrees, the base 54 is precluded from removal. In the depicted arrangement, the base 54 is rotated so as to engage the conductors within the tracks 70, 72 (FIG. 16). The base 54 may be used to power various accessories depicted.

Claims

1. A power track awning assembly, comprising:

an awning roller (130) having an awning canopy (122) extending to an awning bar (131); a plurality of arms (124, 126) capable of extending and retracting, said plurality of arms mounted adjacent to said awning roller at a first end (40) and to said awning bar at a second end (42); and an extrusion (151) connected to said awning bar and having a power groove (152) formed therein;

wherein

said power groove receives at least one track (170, 172) having a first conductor (184) and a second conductor (185);

said power track awning assembly comprises an accessory base (54);

said power groove may receive said accessory base (54) being in electrical communication with said first and second conductors (184, 185),

characterized in that

said accessory base (54) is provided for connection with a plurality of powered accessories (32, 34, 36) to form an electrical connection between the power groove (152) and the accessory (32, 34, 36); and **in that**

the accessory base (54) comprises a flange (90), wherein extending through a lower surface of the flange (90) are first and second contacts (93, 94) which extend into a power head (95) and turn so as to extend outwardly from the power head (95), wherein said power head (95) has a first dimension (d_1) and a second dimension (d_2), the first dimension (d_1) being less than an opening dimension in the power groove (152), the second dimension (d_2) extending between the first and second contacts (93, 94) and being greater than the first dimension (d_1), wherein the second dimension (d_2) is greater than the opening dimension of the power groove (152) so that when rotated, the power head (95) and the accessory base (54) are locked into position within the power groove (152), the first and second contacts (93, 94) engaging the conductors (184, 185) of the tracks (170, 172).

2. The power track awning assembly of claim 1, further comprising wiring extending between a power source and said extrusion through said plurality of arms.

3. The power track awning assembly of claim 2, said extrusion having at least one retaining channel (157).

4. The power track awning assembly of claim 3, said retaining channel capable of mounting said extrusion

to said awning bar.

5. The power track awning assembly of any one of the preceding claims, further comprising at least one control circuit (200).

6. A power track awning assembly, comprising:

an awning roller tube (50) and a canopy (22); said canopy connected to said roller tube at one end;

a first hardware assembly (328) and a second hardware assembly adjacent to lateral edges of said canopy;

wherein said power track awning assembly comprises an accessory base (54);

characterized in that

at least one of said first hardware assembly (328) and said second hardware assembly having a plurality of arms, wherein at least one of the arms includes a power groove (352);

said power groove including at least one track (70, 72) having a first conductor and a second conductor extending through said at least one track wherein said power groove may receive said accessory base (54) being in electrical communication with said first and second conductors, said accessory base (54) provided for connection with a plurality of powered accessories (32, 34, 36) to form an electrical connection between the power groove (352) and the accessory (32, 34, 36); and **in that**

the accessory base (54) comprises a flange (90), wherein extending through a lower surface of the flange (90) are first and second contacts (93, 94) which extend into a power head (95) and turn so as to extend outwardly from the power head (95), wherein said power head (95) has a first dimension (d_1) and a second dimension (d_2), the first dimension (d_1) being less than an opening dimension in the power groove (352), the second dimension (d_2) extending between the first and second contacts (93, 94) and being greater than the first dimension (d_1), wherein the second dimension (d_2) is greater than the opening dimension of the power groove (352) so that when rotated, the power head (95) and the accessory base (54) are locked into position within the power groove (352), the first and second contacts (93, 94) engaging the conductors of the tracks (70, 72).

7. The power track awning assembly of claim 6, said accessory base being in electrical communication with said first and second conductors.

8. The power track awning assembly of claim 6 or 7, said accessory base positioned in said power

groove.

9. The power track awning assembly of claim 7 further comprising an accessory (32, 34, 36) in electrical communication with said accessory base. 5
10. The power track awning assembly of claim 9, said accessory being one of a light, a fan, an audio accessory and a video accessory. 10
11. The power track awning assembly of any one of claims 6 to 10, said power groove formed on an extended arm (327). 15
12. The power track awning assembly of claim 11, said power groove having a plurality of locating ribs (374, 375, 376, 377). 20
13. The power track awning assembly of claim 12, said plurality of locating ribs engaging said at least one track. 25
14. The power track awning assembly of claim 13, said at least one track being two tracks. 30
15. The power track awning assembly of any one of claims 6 to 14, said power groove formed in one of a top arm (326) and a base arm (324). 35
16. The power track awning assembly of any one of claims 6 to 15, said hardware assembly having an awning arm (327, 124, 126). 40
17. The power track awning assembly of claim 16, said awning arm being a channel shaped structure. 45
18. The power track awning assembly of claim 16 or 17, said hardware assembly being connected to an awning roller tube. 50
19. The power track awning assembly of any one of claims 16 to 18 further comprising a power-in feed cover (63) in electrical communication with said at least one track. 55
20. The power track awning assembly of any one of claims 16 to 19 wherein said awning assembly comprises a roller-type awning assembly (20).
21. The power track awning assembly of any one of claims 16 to 20 wherein said awning assembly comprises a cassette type awning (120).
22. A power track awning assembly, comprising
 an awning which is extendably and retractably supported by an awning hardware assembly comprising a plurality of arms;

at least one of said arms having a power groove (352) located thereon:

at least one track (70, 72) having first and second conductors extending through said power groove wherein the power track awning assembly comprises an accessory base (54), said power groove may receive said accessory base (54) being in electrical communication with said first and second conductors **characterized in that** said accessory base (54) provided for connection with a plurality of powered accessories (32, 34, 36) to form an electrical connection between the power groove (352) and the accessory (32, 34, 36); and **in that** the accessory base (54) comprises a flange (90), wherein extending through a lower surface of the flange (90) are first and second contacts (93, 94) which extend into a power head (95) and turn so as to extend outwardly from the power head (95), wherein said power head (95) has a first dimension (d_1) and a second dimension (d_2), the first dimension (d_1) being less than an opening dimension in the power groove (352), the second dimension (d_2) extending between the first and second contacts (93, 94) and being greater than the first dimension (d_1), wherein the second dimension (d_2) is greater than the opening dimension (d_2) of the power groove (352) so that when rotated, the power head (95) and the accessory base (54) are locked into position within the power groove (352), the first and second contacts (93, 94) engaging the conductors of the tracks (70, 72).

Patentansprüche

1. Stromschienen-Markisen-Baueinheit, umfassend

eine Markisenrolle (130) mit einem Markisendach (122), das sich bis zu einer Markisenstange (131) erstreckt;
 eine Vielzahl von Armen (124, 126), die ausfahren und einfahren können, wobei die Vielzahl von Armen angrenzend an der Markisenrolle an einem ersten Ende (40) und an der Markisenstange an einem zweiten Ende (42) angebracht ist; und
 ein Extrusionsprofil (151), das mit der Markisenstange verbunden ist und eine darin gebildete stromführende Nut (152) aufweist;
 wobei diese stromführende Nut mindestens ei-

- ne Schiene (170, 172) mit einem ersten Leiter (184) und einem zweiten Leiter (185) aufnimmt; die Stromschienen-Markisen-Baueinheit ein Zubehör-Basisteil (54) umfasst;
- die stromführende Nut kann das Zubehör-Basisteil (54) aufnehmen, das in elektrischer Verbindung mit dem ersten und zweiten Leiter (184, 185) steht,
- dadurch gekennzeichnet, dass**
- das Zubehör-Basisteil (54) zur Verbindung mit einer Vielzahl von mit Strom versorgten Zubehörteilen (32, 34, 36) vorgesehen ist, um eine elektrische Verbindung zwischen der stromführenden Nut (152) und dem Zubehörteil (32, 34, 36) zu bilden; und dass
- das Zubehör-Basisteil (54) einen Flansch (90) umfasst, wobei sich durch eine untere Fläche des Flansches (90) ein erster und ein zweiter Kontakt (93, 94) erstrecken, die sich in einen Stromversorgungskopf (95) erstrecken und sich so drehen, dass sie sich von dem Stromversorgungskopf (95) nach außen erstrecken, wobei der Stromversorgungskopf (95) eine erste Abmessung (d_1) und eine zweite Abmessung (d_2) aufweist, wobei die erste Abmessung (d_1) kleiner als eine Öffnungsabmessung in der stromführenden Nut (152) ist, die zweite Abmessung (d_2) sich zwischen dem ersten und dem zweiten Basisteil (93, 94) erstreckt und größer ist als die erste Abmessung (d_1), wobei die zweite Abmessung (d_2) größer ist als die Öffnungsabmessung der stromführenden Nut (152), so dass der Stromversorgungskopf (95) und das Zubehör-Basisteil (54) in der stromführenden Nut (152) in ihrer Position verriegelt werden, wenn sie gedreht werden, wobei der erste und der zweite Kontakt (93, 94) mit den Leitern (184, 185) der Schienen (170, 172) im Eingriff stehen.
2. Stromschienen-Markisen-Baueinheit nach Anspruch 1, ferner umfassen Drähte, die sich zwischen einer Energiequelle und dem Extrusionsprofil durch die Vielzahl der Arme erstrecken.
3. Stromschienen-Markisen-Baueinheit nach Anspruch 2, wobei das Extrusionsprofil mindestens einen Haltekanal (157) aufweist.
4. Stromschienen-Markisen-Baueinheit nach Anspruch 3, wobei der Haltekanal zur Befestigung des Extrusionsprofils an der Markisenstange geeignet ist.
5. Stromschienen-Markisen-Baueinheit nach einem der vorhergehenden Ansprüche ferner umfassend mindestens einen Steuerkreis (200).
6. Stromschienen-Markisen-Baueinheit, umfassend:
- ein Markisenrollenrohr (50) und ein Vordach (22);
- wobei das Vordach an einem Ende mit dem Rollenrohr verbunden ist;
- eine erste Beschlagbaugruppe (328) und eine zweite Beschlagbaugruppe angrenzend an die Seitenränder des Vordachs;
- wobei die Stromschienen-Markisen-Baueinheit ein Zubehör-Basisteil (54) umfasst;
- dadurch gekennzeichnet, dass**
- mindestens eine der ersten Beschlags-Baugruppe (328) und der zweiten Beschlags-Baugruppe eine Vielzahl von Armen aufweist, wobei mindestens einer der Arme eine stromführende Nut (352) beinhaltet;
- wobei die stromführende Nut mindestens eine Schiene (70, 72) mit einem ersten Leiter und einem zweiten Leiter enthält, die sich durch die mindestens eine Schiene erstrecken,
- wobei die stromführende Nut das Zubehör-Basisteil (54) aufnehmen kann, das in elektrischer Verbindung mit den ersten und zweiten Leitern steht,
- das Zubehör-Basisteil (54) zur Verbindung mit einer Vielzahl von mit Strom versorgten Zubehörteilen (32, 34, 36) vorgesehen ist, um eine elektrische Verbindung zwischen der stromführenden Nut (352) und dem Zubehörteil (32, 34, 36) zu bilden; und dadurch, dass
- das Zubehör-Basisteil (54) einen Flansch (90) umfasst, wobei sich durch eine untere Fläche des Flansches (90) ein erster und ein zweiter Kontakt (93, 94) erstrecken, die sich in einen Stromversorgungskopf (95) erstrecken und sich so drehen, dass sie sich von dem Stromversorgungskopf (95) nach außen erstrecken, wobei der Stromversorgungskopf (95) eine erste Abmessung (d_1) und eine zweite Abmessung (d_2) aufweist, wobei die erste Abmessung (d_1) kleiner als eine Öffnungsabmessung in der stromführenden Nut (352) ist, die zweite Abmessung (d_2) sich zwischen dem ersten und dem zweiten Basisteil (93, 94) erstreckt und größer ist als die erste Abmessung (d_1), wobei die zweite Abmessung (d_2) größer ist als die Öffnungsabmessung der stromführenden Nut (352), so dass der Stromversorgungskopf (95) und das Zubehör-Basisteil (54) in der stromführenden Nut (352) in ihrer Position verriegelt werden, wenn sie gedreht werden, wobei der erste und der zweite Kontakt (93, 94) mit den Leitern der Schienen (70, 72) im Eingriff stehen.
7. Stromschienen-Markisen-Baueinheit nach Anspruch 6, wobei das Zubehör-Basisteil mit dem ersten und zweiten Leiter in elektrischer Verbindung steht.

8. Stromschienen-Markisen-Baueinheit nach Anspruch 6 oder 7, wobei das Zubehör-Basisteil in der stromführenden Nut positioniert ist.
9. Stromschienen-Markisen-Baueinheit nach Anspruch 7, ferner umfassend ein Zubehöerteil (32, 34, 36), das mit dem Zubehör-Basisteil elektrisch verbunden ist. 5
10. Stromschienen-Markisen-Baueinheit nach Anspruch 9, wobei das Zubehör eines von einer Leuchte, einem Gebläse, einem Audiozubehör oder einem Videozubehör ist. 10
11. Stromschienen-Markisen-Baueinheit nach einem der Ansprüche 6 bis 10, wobei die stromführende Nut an einem verlängerten Arm (327) gebildet ist. 15
12. Stromschienen-Markisen-Baueinheit nach Anspruch 11, wobei die stromführende Nut eine Vielzahl von Fixierrippen (374, 375, 376, 377) aufweist. 20
13. Stromschienen-Markisen-Baueinheit nach Anspruch 12, wobei die Vielzahl von Fixierrippen in die mindestens eine Schiene eingreift. 25
14. Stromschienen-Markisen-Baueinheit nach Anspruch 13, wobei die mindestens eine Schiene aus zwei Schienen besteht. 30
15. Stromschienen-Markisen-Baueinheit nach einem der Ansprüche 6 bis 14, wobei die stromführende Nut entweder in einem oberen Arm (326) oder in einem Basisteil (324) gebildet ist. 35
16. Stromschienen-Markisen-Baueinheit nach einem der Ansprüche 6 bis 15, wobei die Beschlagsbaugruppe einen Markisenarm (327, 124, 126) aufweist. 40
17. Stromschienen-Markisen-Baueinheit nach Anspruch 16, wobei der Markisenarm eine rinnenförmige Struktur ist. 45
18. Stromschienen-Markisen-Baueinheit nach Anspruch 16 oder 17, wobei die Beschlagsbaugruppe mit einem Markisenrollenrohr verbunden ist. 50
19. Stromschienen-Markisen-Baueinheit nach einem der Ansprüche 16 bis 18, ferner umfassend eine Einspeiseabdeckung (63), die mit der mindestens einen Schiene elektrisch verbunden ist.
20. Stromschienen-Markisen-Baueinheit nach einem der Ansprüche 16 bis 19, wobei die Markisenbaueinheit eine Markisenbaueinheit mit Rollen (20) umfasst.
21. Stromschienen-Markisen-Baueinheit nach einem

der Ansprüche 16 bis 20, wobei die Markisenbaueinheit eine kassettenartige Markise (120) umfasst.

22. Stromschienen-Markisen-Baueinheit, umfassend

eine Markise, die von einer Markisenbeschlagsanordnung, die eine Vielzahl von Armen umfasst, ausfahrbar und einziehbar gehalten wird;

wobei mindestens einer der Arme eine darauf befindliche stromführende Nut (352) aufweist; mindestens eine Schiene (70, 72) mit ersten und zweiten Leitern, die sich durch die stromführende Nut erstrecken;

wobei die Stromschienen-Markisen-Baueinheit ein Zubehör-Basisteil (54) umfasst, wobei die stromführende Nut das Zubehör-Basisteil (54) aufnehmen kann, das in elektrischer Verbindung mit den ersten und zweiten Leitern steht,

dadurch gekennzeichnet, dass

das Zubehör-Basisteil (54) zur Verbindung mit einer Vielzahl von mit Strom versorgten Zubehöerteilen (32, 34, 36) vorgesehen ist, um eine elektrische Verbindung zwischen der stromführenden Nut (152) und dem Zubehöerteil (32, 34, 36) zu bilden; und dadurch, dass

das Zubehör-Basisteil (54) einen Flansch (90) umfasst, wobei sich durch eine untere Fläche des Flansches (90) ein erster und ein zweiter Kontakt (93, 94) erstrecken, die sich in einen Stromversorgungskopf (95) erstrecken und sich so drehen, dass sie sich von dem Kraftkopf (95) nach außen erstrecken, wobei der Stromversorgungskopf (95) eine erste Abmessung (d_1) und eine zweite Abmessung (d_2) aufweist, wobei die erste Abmessung (d_1) kleiner ist als eine Öffnungsabmessung in der stromführenden Nut (352), die zweite Abmessung (d_2) sich zwischen den ersten und zweiten Kontakten (93, 94) erstreckt und größer ist als die erste Abmessung (d_1), wobei die zweite Abmessung (d_2) größer ist als die Öffnungsabmessung (d_2) der stromführenden Nut (352), so dass, wenn sie gedreht werden, der Stromversorgungskopf (95) und das Zubehör-Basisteil (54) in der stromführenden Nut (352) in ihrer Position verriegelt werden, wobei die ersten und zweiten Kontakte (93, 94) mit den Leitern der Schienen (70, 72) im Eingriff stehen.

Revendications

1. Ensemble auvent à rail électrique, comprenant :

un rouleau d'auvent (130) comprenant un store d'auvent (122) s'étendant vers une barre

- d'auvent (131) ;
 une pluralité de bras (124, 126) apte à étendre et rétracter, ladite pluralité de bras étant montés adjacents audit rouleau d'auvent à une première extrémité (40) et à ladite barre d'auvent à une deuxième extrémité (42) ; et
 un corps d'extrusion (151) connecté à ladite barre d'auvent et comprenant une rainure d'alimentation électrique (152) formée dans celui-ci ; ladite rainure d'alimentation électrique recevant au moins un rail (170, 172) comprenant un premier conducteur (184) et un deuxième conducteur (185) ;
 ledit ensemble auvent à rail électrique comprenant une base d'accessoire (54) ;
 ladite rainure d'alimentation électrique étant apte à recevoir ladite base d'accessoire (54) qui est en communication électrique avec lesdits premier et deuxième conducteurs (184, 185),
caractérisé en ce que
 ladite base d'accessoire (54) est prévue pour une connexion avec une pluralité d'accessoires à fonctionnement électrique (32, 34, 36) pour former une connexion électrique entre la rainure d'alimentation électrique (152) et l'accessoire (32, 34, 36) ; et **en ce que**
 ladite base d'accessoire (54) comprend une flasque (90), à travers une surface inférieure dudit flasque s'étendant des premier et deuxième contacts (93, 94) qui s'étendent vers l'intérieur d'une tête électrique (95) et se tournent de façon à s'étendre vers l'extérieur de la tête électrique (95), ladite tête électrique (95) présentant une première dimension (d_1) et une deuxième dimension (d_2), la première dimension (d_1) étant inférieure à la dimension d'ouverture dans la rainure d'alimentation électrique (152), la deuxième dimension (d_2) s'étendant entre les premier et deuxième contacts (93, 94) et étant supérieure à la première dimension (d_1), la deuxième dimension (d_2) étant supérieure à la dimension d'ouverture de ladite rainure d'alimentation électrique (152) de façon que, lors d'une rotation, la tête électrique (95) et la base d'accessoire (54) sont verrouillés en position à l'intérieur de la rainure d'alimentation électrique (152), les premier et deuxième contacts (93, 94) étant en engagement avec les conducteurs (184, 185) des rails (170, 172).
2. Ensemble auvent à rail électrique selon la revendication 1, comprenant en outre un câblage s'étendant entre une source électrique et ledit corps d'extrusion à travers ladite pluralité de bras.
3. Ensemble auvent à rail électrique selon la revendication 2, dans lequel ledit corps d'extrusion comprend au moins un canal de rétention (157).
4. Ensemble auvent à rail électrique selon la revendication 3, dans lequel ledit canal de rétention est apte à attacher ledit corps d'extrusion à ladite barre d'auvent.
5. Ensemble auvent à rail électrique selon l'une quelconque des revendications précédentes, comprenant en outre au moins un circuit de commande (200).
6. Ensemble auvent à rail électrique, comprenant :
- un tube de rouleau d'auvent (50) et un store (22) ;
 ledit store étant connecté audit tube de rouleau d'auvent à l'une des extrémités ;
 un premier ensemble d'armature (328) et un deuxième ensemble d'armature adjacents à des bords latéraux dudit store ;
 ledit ensemble auvent à rail électrique comprenant une base d'accessoire (54) ;
caractérisé en ce que
 au moins un dudit premier ensemble d'armature (328) et dudit deuxième ensemble d'armature comprenant une pluralité de bras, au moins un des bras comprenant une rainure d'alimentation électrique (352) ;
 ladite rainure d'alimentation électrique comprenant au moins un rail (70, 72) comprenant un premier conducteur et un deuxième conducteur s'étendant à travers ledit au moins un rail ladite rainure d'alimentation électrique étant apte à recevoir ladite base d'accessoire (54) qui est en communication électrique avec lesdits premier et deuxième conducteurs,
 ladite base d'accessoire (54) étant prévue pour une connexion avec une pluralité d'accessoires à fonctionnement électrique (32, 34, 36) pour former une connexion électrique entre la rainure d'alimentation électrique (352) et l'accessoire (32, 34, 36) ; et **en ce que**
 ladite base d'accessoire (54) comprend une flasque (90), à travers une surface inférieure dudit flasque s'étendant des premier et deuxième contacts (93, 94) qui s'étendent vers l'intérieur d'une tête électrique (95) et se tournent de façon à s'étendre vers l'extérieur de la tête électrique (95), ladite tête électrique (95) présentant une première dimension (d_1) et une deuxième dimension (d_2), la première dimension (d_1) étant inférieure à la dimension d'ouverture dans la rainure d'alimentation électrique (352), la deuxième dimension (d_2) s'étendant entre les premier et deuxième contacts (93, 94) et étant supérieure à la première dimension (d_1), la deuxième dimension (d_2) étant supérieure à la dimension d'ouverture de ladite rainure d'alimentation électrique (352) de façon que, lors d'une rotation, la

- tête électrique (95) et la base d'accessoire (54) sont verrouillés en position à l'intérieur de la rainure d'alimentation électrique (352), les premier et deuxième contacts (93, 94) étant en engagement avec les conducteurs des rails (70, 72).
7. Ensemble auvent à rail électrique selon la revendication 6, dans lequel ladite base d'accessoire est en communication électrique avec lesdits premier et deuxième conducteurs.
8. Ensemble auvent à rail électrique selon la revendication 6 ou 7, dans lequel ladite base d'accessoire est positionnée dans ladite rainure d'alimentation électrique.
9. Ensemble auvent à rail électrique selon la revendication 7, comprenant en outre un accessoire (32, 34, 36) qui est en communication électrique avec ladite base d'accessoire.
10. Ensemble auvent à rail électrique selon la revendication 9, dans lequel ledit accessoire est un d'une lampe, d'un ventilateur, d'un accessoire d'audio ou d'un accessoire de vidéo.
11. Ensemble auvent à rail électrique selon l'une quelconque des revendications 6 à 10, dans lequel ladite rainure d'alimentation électrique est formée sur un bras étendu (327).
12. Ensemble auvent à rail électrique selon la revendication 11, dans lequel ladite rainure d'alimentation électrique comprend une pluralité de nervures de positionnement (374, 375, 376, 377).
13. Ensemble auvent à rail électrique selon la revendication 12, dans lequel ladite pluralité de nervures de positionnement sont engagées dans ledit au moins un rail.
14. Ensemble auvent à rail électrique selon la revendication 13, dans lequel ledit au moins un rail est deux rails.
15. Ensemble auvent à rail électrique selon l'une quelconque des revendications 6 à 14, dans lequel ladite rainure d'alimentation électrique est formée dans un d'un bras supérieur (326) et d'un bras de base (324).
16. Ensemble auvent à rail électrique selon l'une quelconque des revendications 6 à 15, dans lequel ledit ensemble d'armature comprend un bras d'auvent (327, 124, 126).
17. Ensemble auvent à rail électrique selon la revendication 16, dans lequel ledit bras d'auvent est une structure en forme de canal.
18. Ensemble auvent à rail électrique selon la revendication 16 ou 17, dans lequel ledit ensemble d'armature est connecté à un tube de rouleau d'auvent.
19. Ensemble auvent à rail électrique selon l'une quelconque des revendications 16 à 18, comprenant en outre un couvercle d'alimentation (63) qui est en communication électrique avec ledit au moins un rail.
20. Ensemble auvent à rail électrique selon l'une quelconque des revendications 16 à 19, dans lequel ledit ensemble auvent comprend un ensemble auvent de type rouleau.
21. Ensemble auvent à rail électrique selon l'une quelconque des revendications 16 à 20, dans lequel ledit ensemble auvent comprend un auvent de type casette (120).
22. Ensemble auvent à rail électrique, comprenant :
- un auvent qui est supporté de façon extensible et rétractable par un ensemble d'armature d'auvent comprenant une pluralité de bras ;
- au moins un desdits bras comprenant une rainure d'alimentation électrique (352) située sur celui-ci ;
- au moins un rail (70, 72) comprenant des premier et deuxième conducteurs s'étendant à travers ladite rainure d'alimentation électrique
- ledit ensemble auvent à rail électrique comprenant une base d'accessoire (54) ;
- ladite rainure d'alimentation électrique étant apte à recevoir ladite base d'accessoire (54) qui est en communication électrique avec lesdits premier et deuxième conducteurs (184, 185),
- caractérisé en ce que**
- ladite base d'accessoire (54) est prévue pour une connexion avec une pluralité d'accessoires à fonctionnement électrique (32, 34, 36) pour former une connexion électrique entre la rainure d'alimentation électrique (352) et l'accessoire (32, 34, 36) ; et **en ce que**
- ladite base d'accessoire (54) comprend une flasque (90), à travers une surface inférieure dudit flasque s'étendant des premier et deuxième contacts (93, 94) qui s'étendent vers l'intérieur d'une tête électrique (95) et se tournent de façon à s'étendre vers l'extérieur de la tête électrique (95), ladite tête électrique (95) présentant une première dimension (d_1) et une deuxième dimension (d_2), la première dimension (d_1) étant inférieure à la dimension d'ouverture dans la rainure d'alimentation électrique (352), la deuxième dimension (d_2) s'étendant entre les premier et deuxième contacts (93, 94) et étant supérieure à la première dimension (d_1), la deuxième dimension (d_2) étant supérieure à la dimension

d'ouverture (d_2) de ladite rainure d'alimentation électrique (352) de façon que, lors d'une rotation, la tête électrique (95) et la base d'accessoire (54) sont verrouillés en position à l'intérieur de la rainure d'alimentation électrique (352), les premier et deuxième contacts (93, 94) étant en engagement avec les conducteurs des rails (70, 72).

5

10

15

20

25

30

35

40

45

50

55

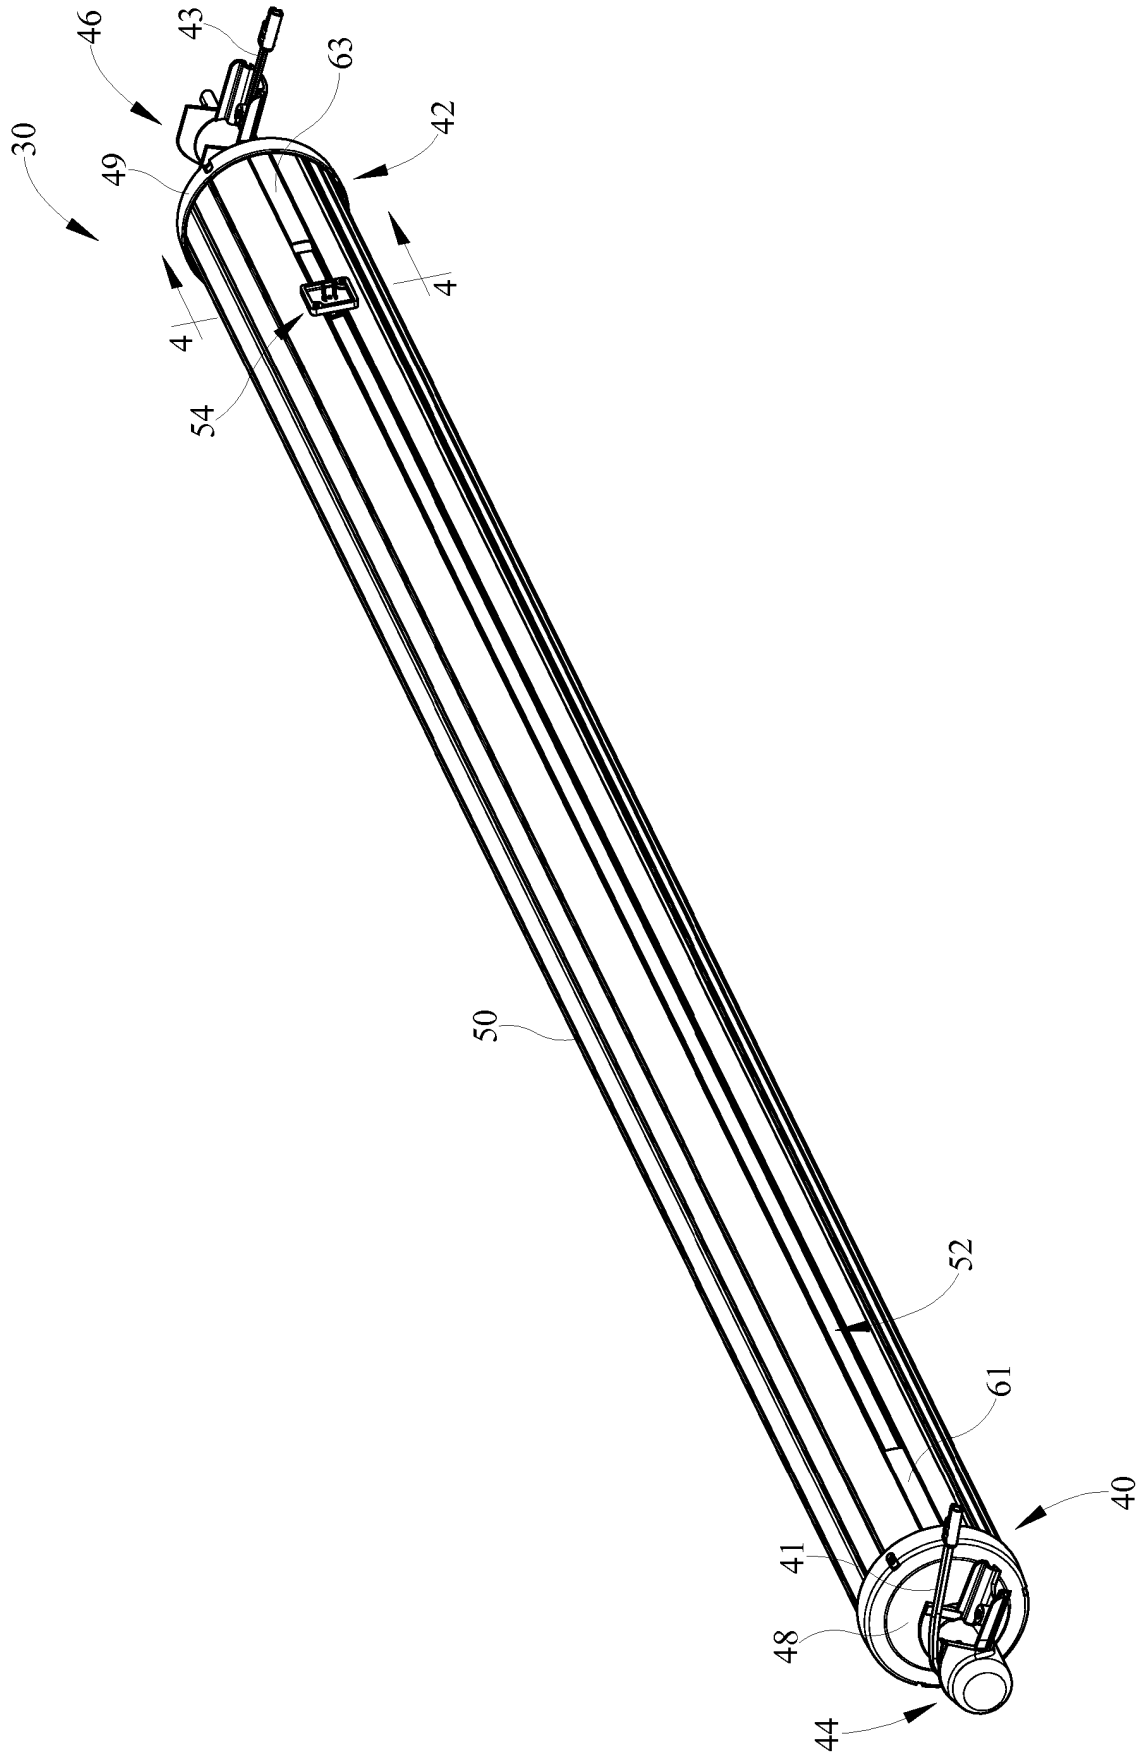


FIG. 2

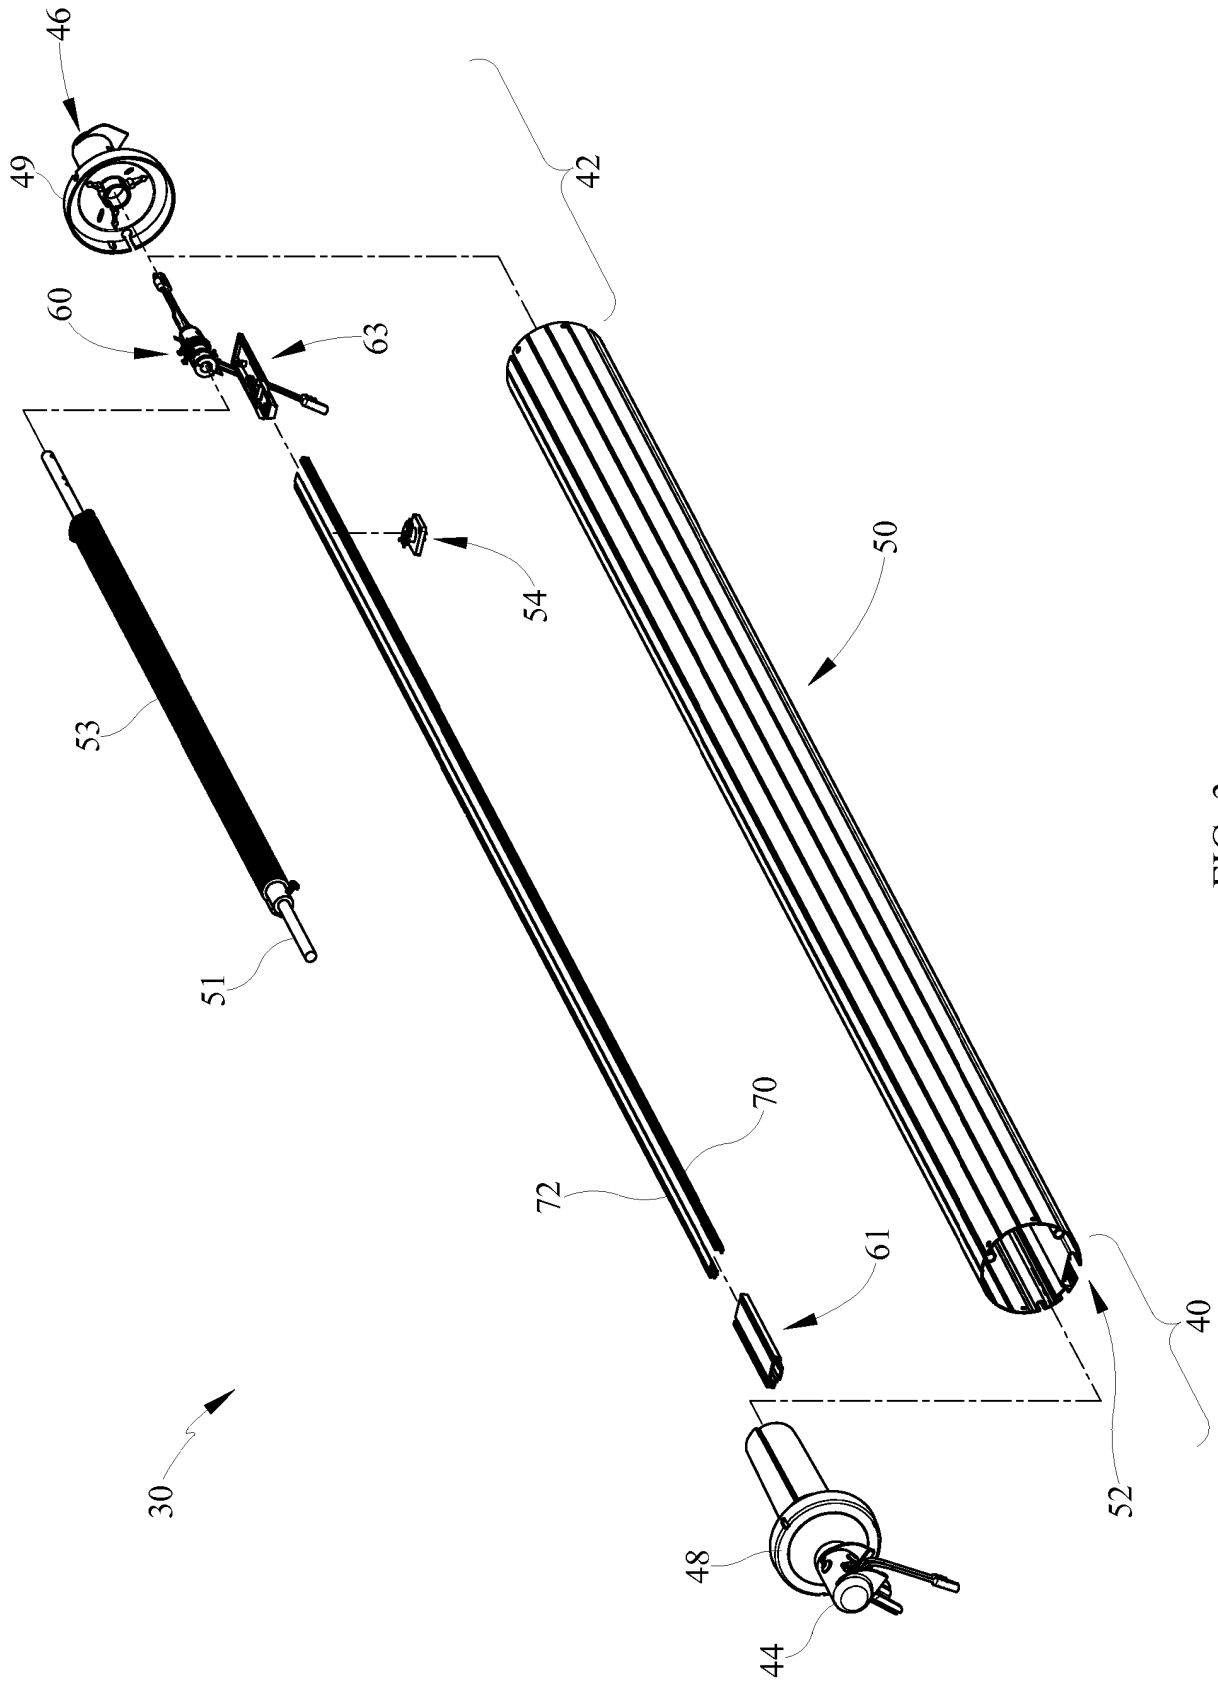


FIG. 3

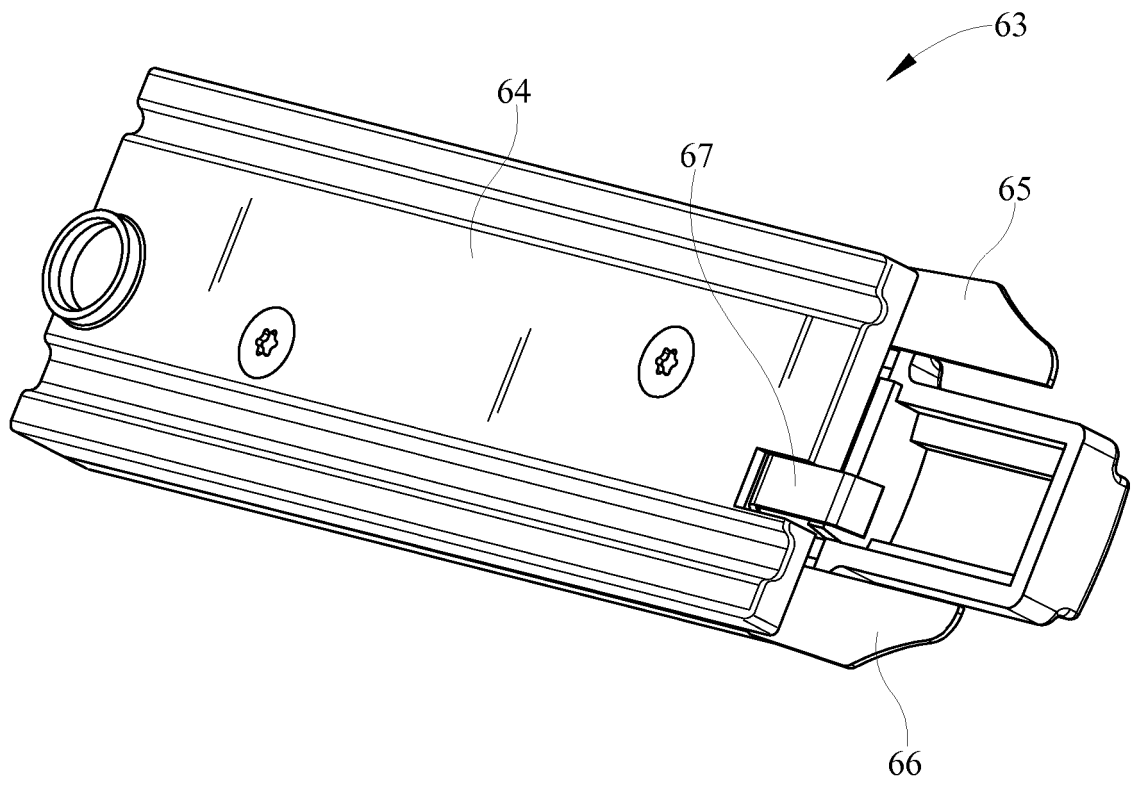


FIG. 4

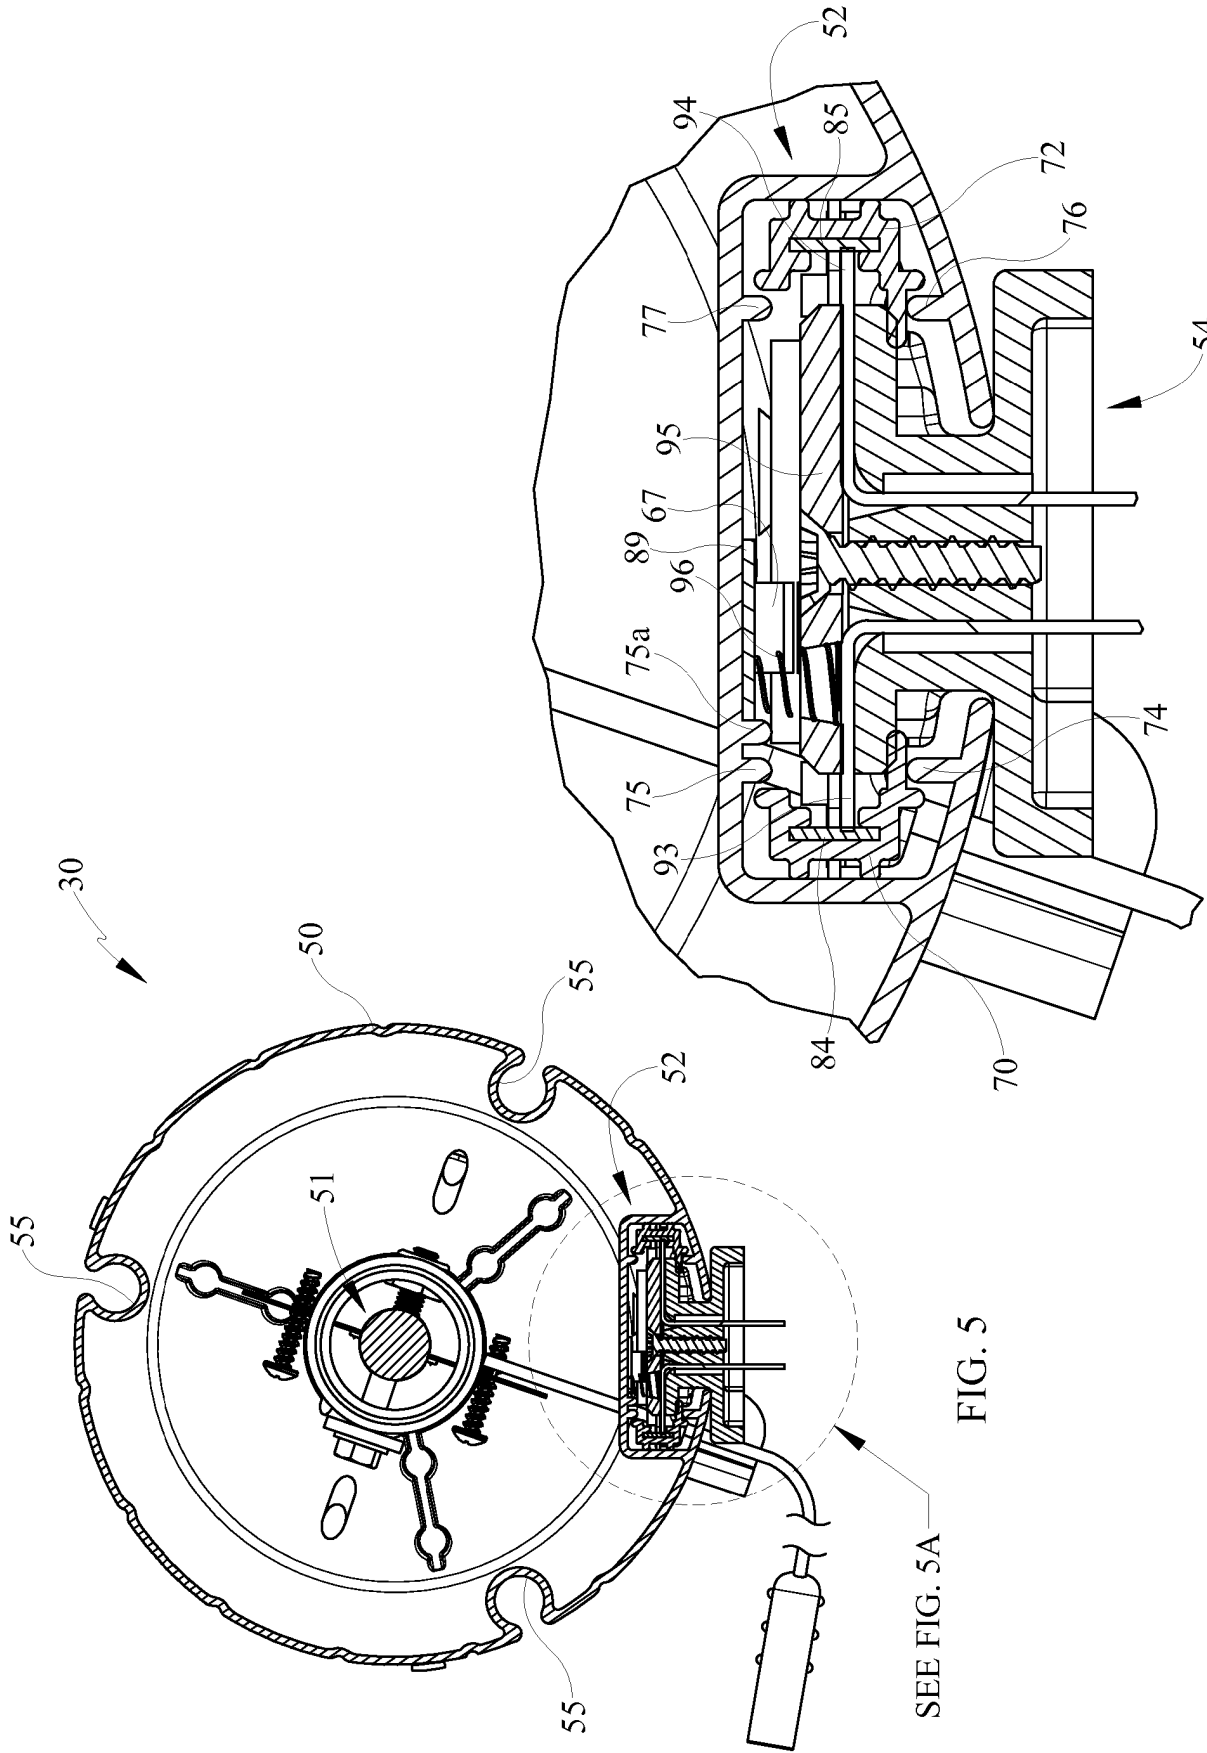


FIG. 5

FIG. 5A

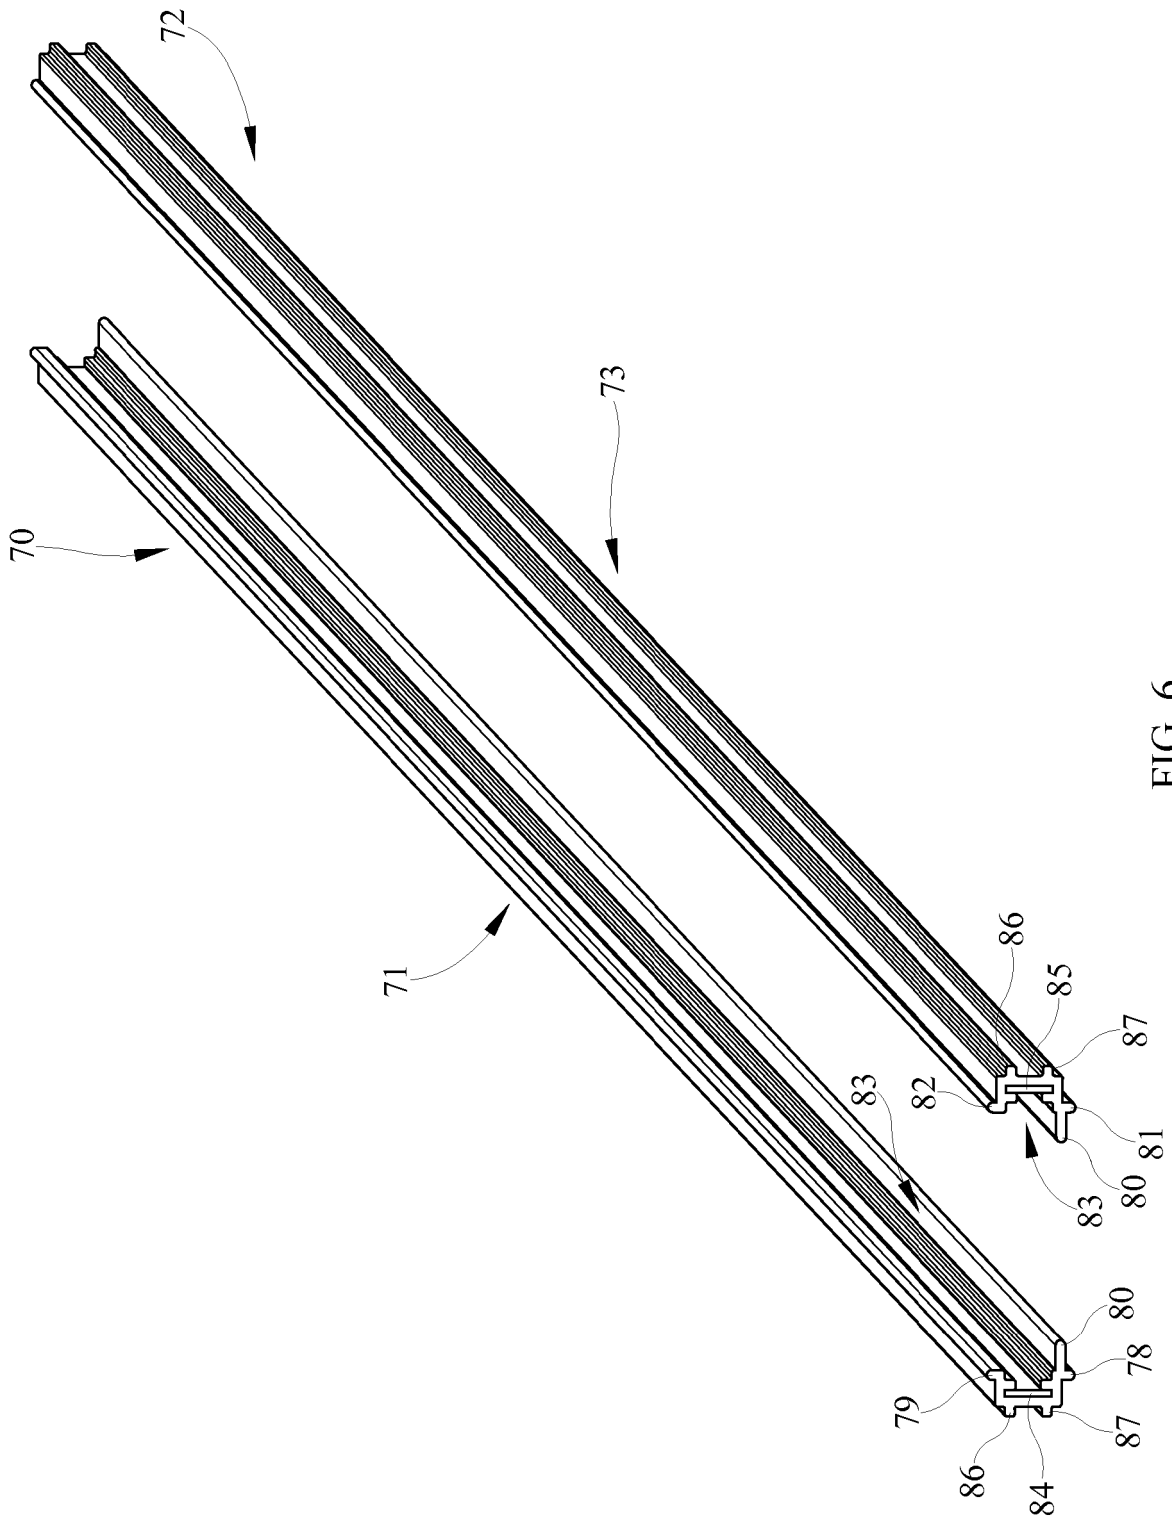


FIG. 6

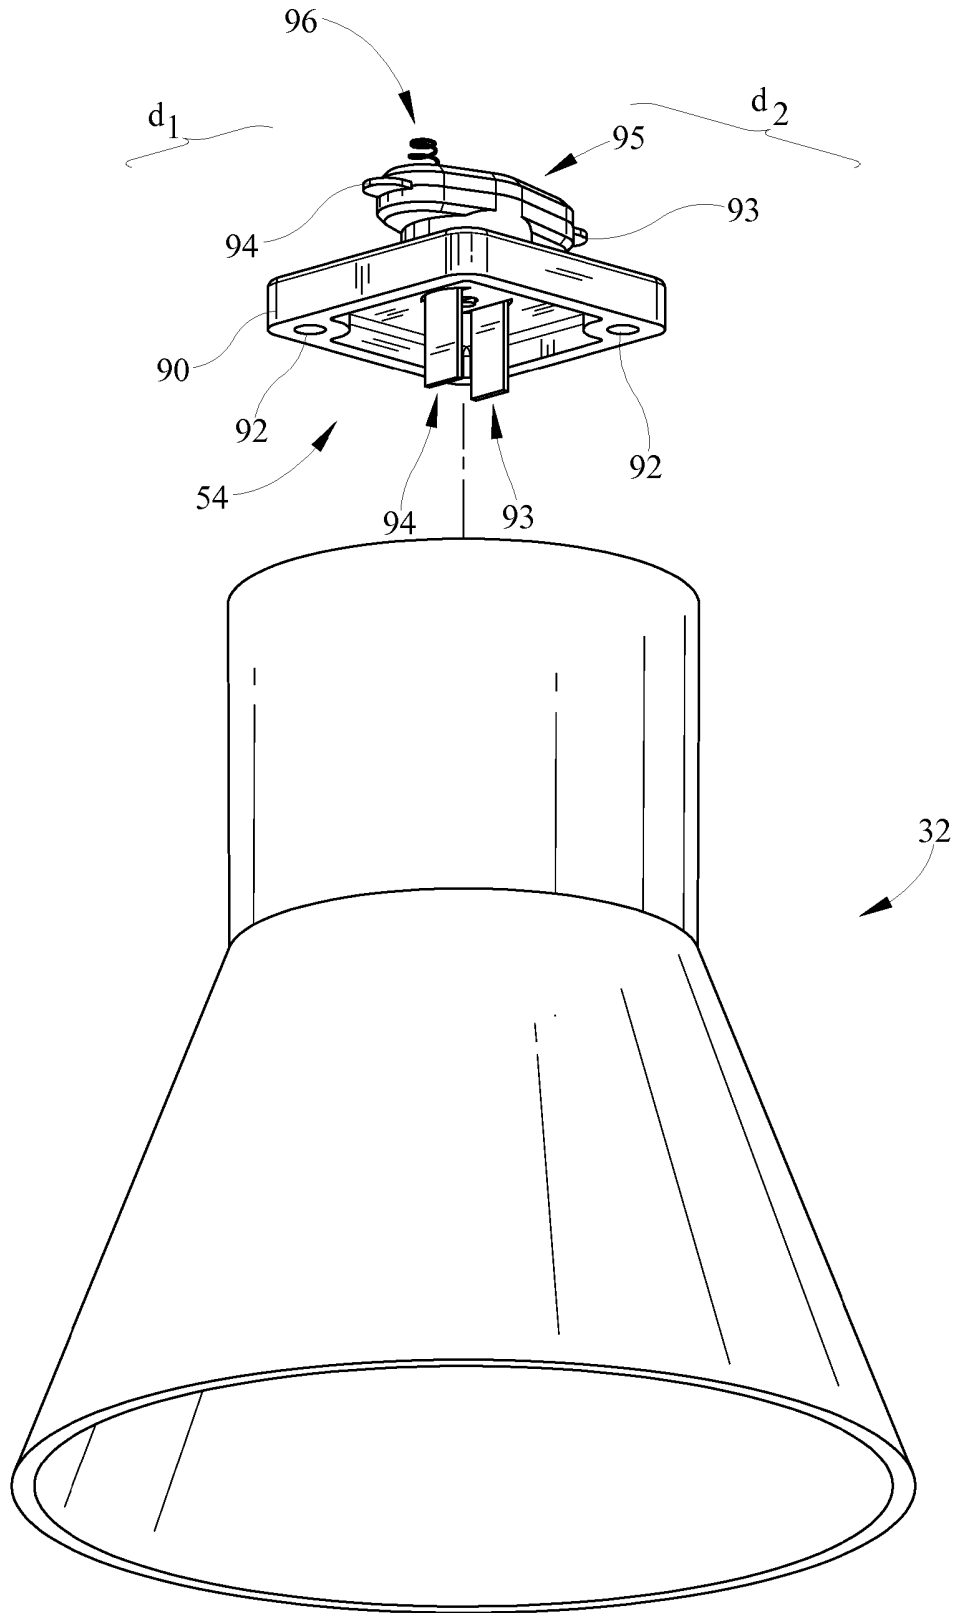


FIG. 7

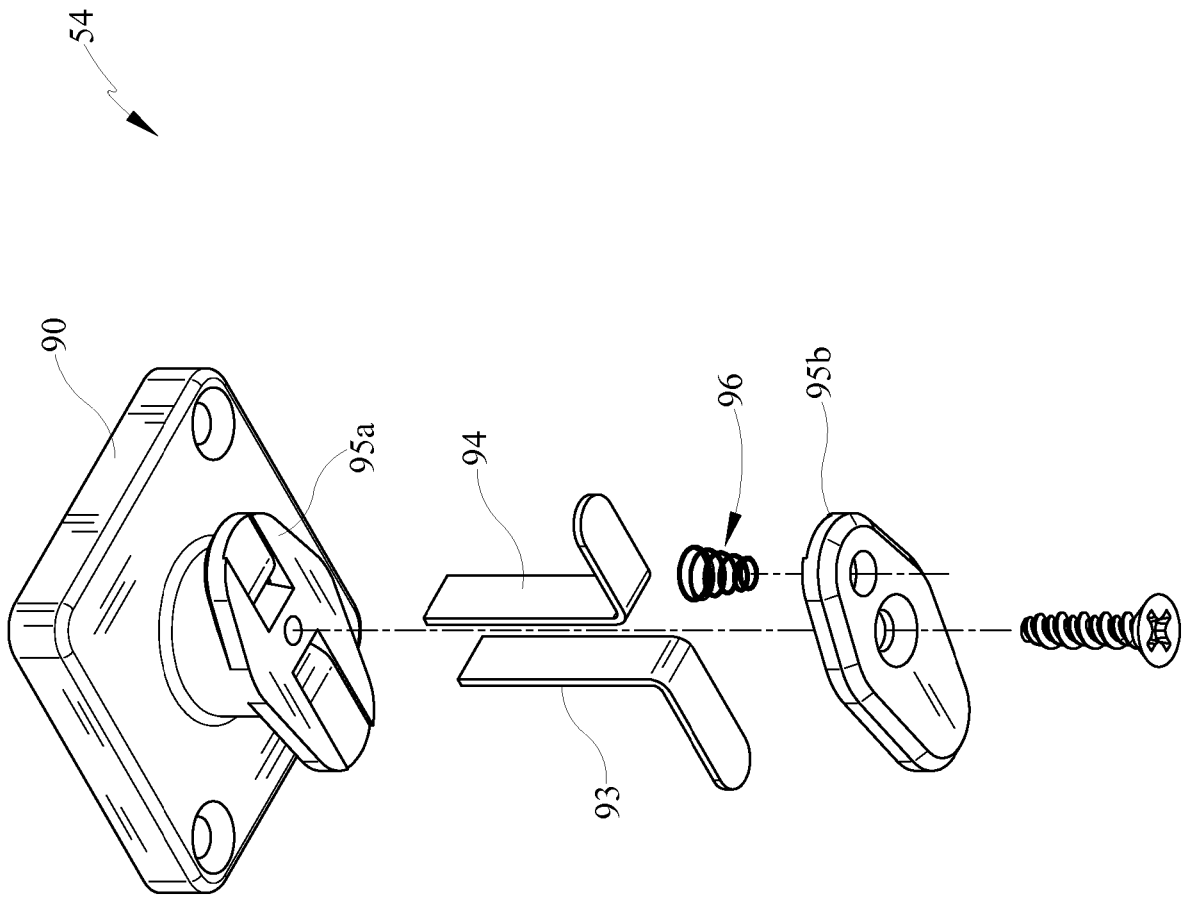
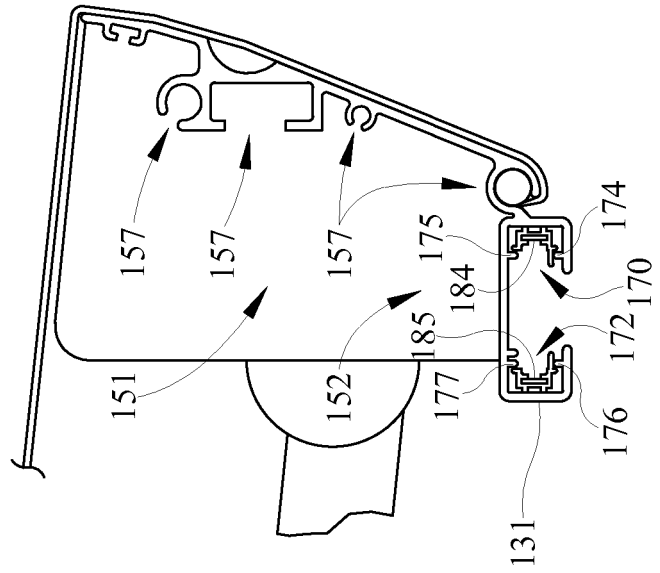
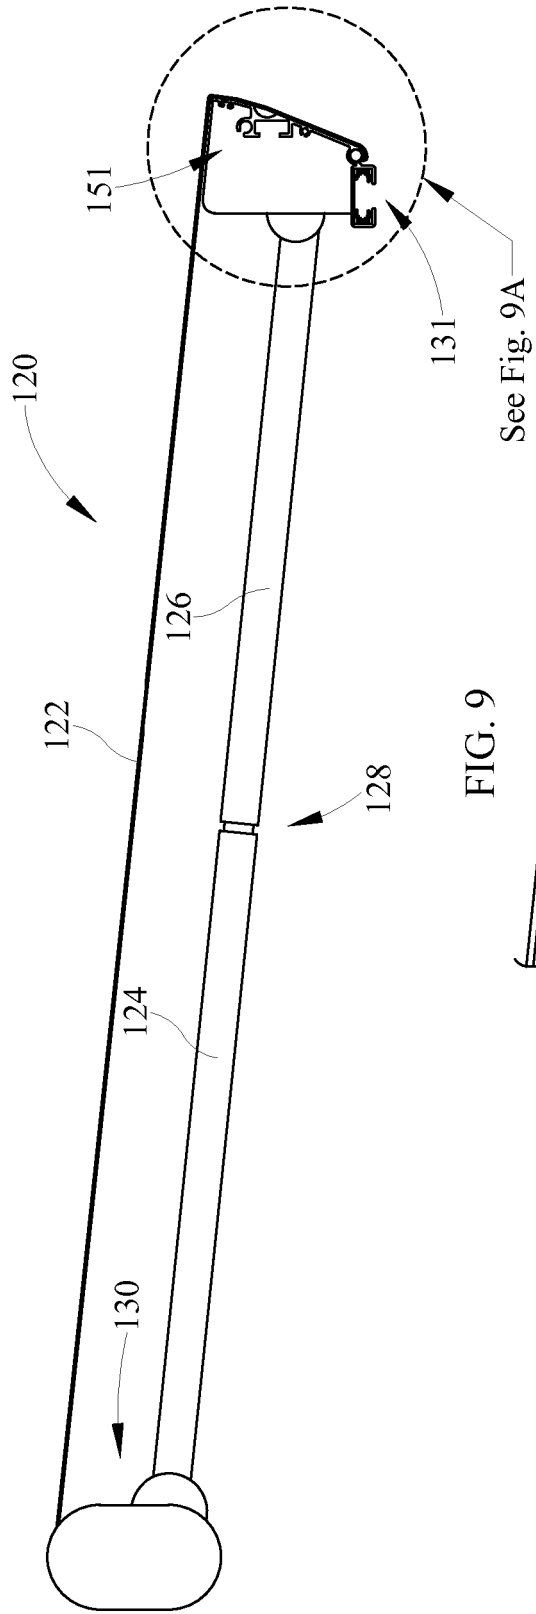


FIG. 8



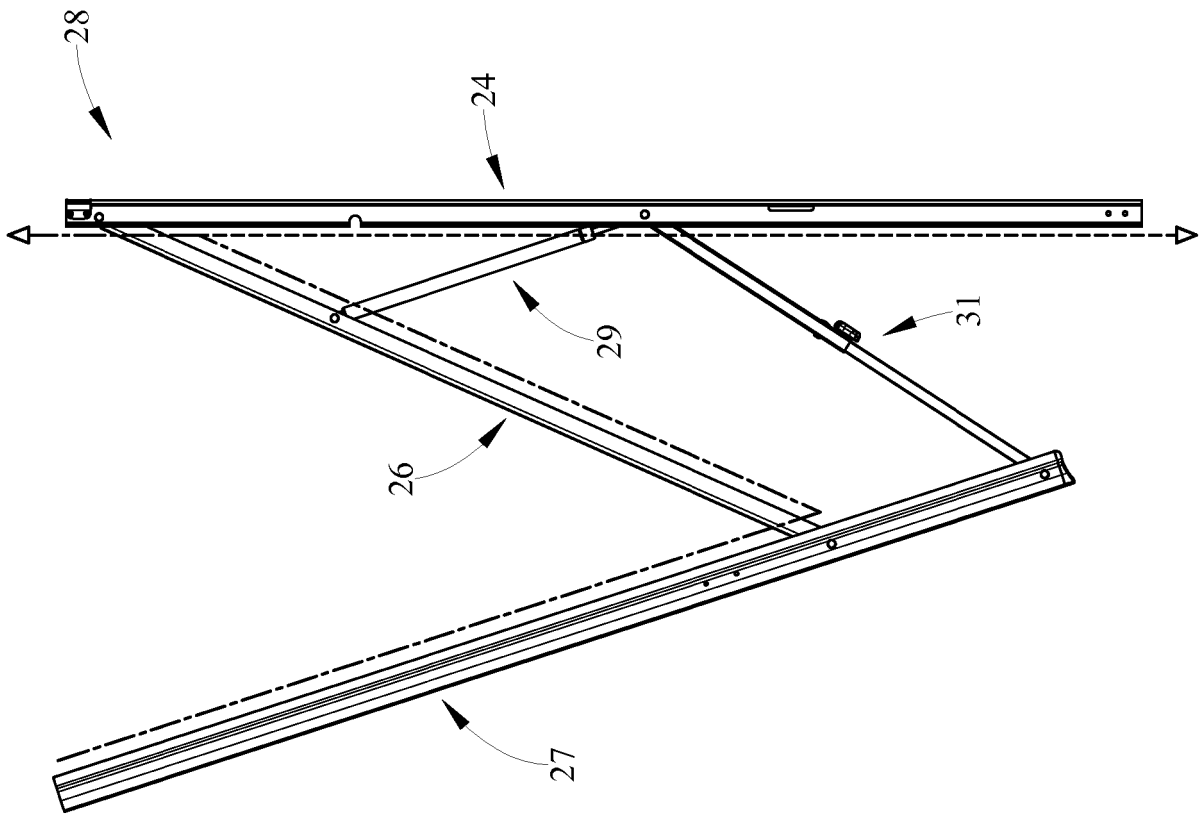


FIG. 10

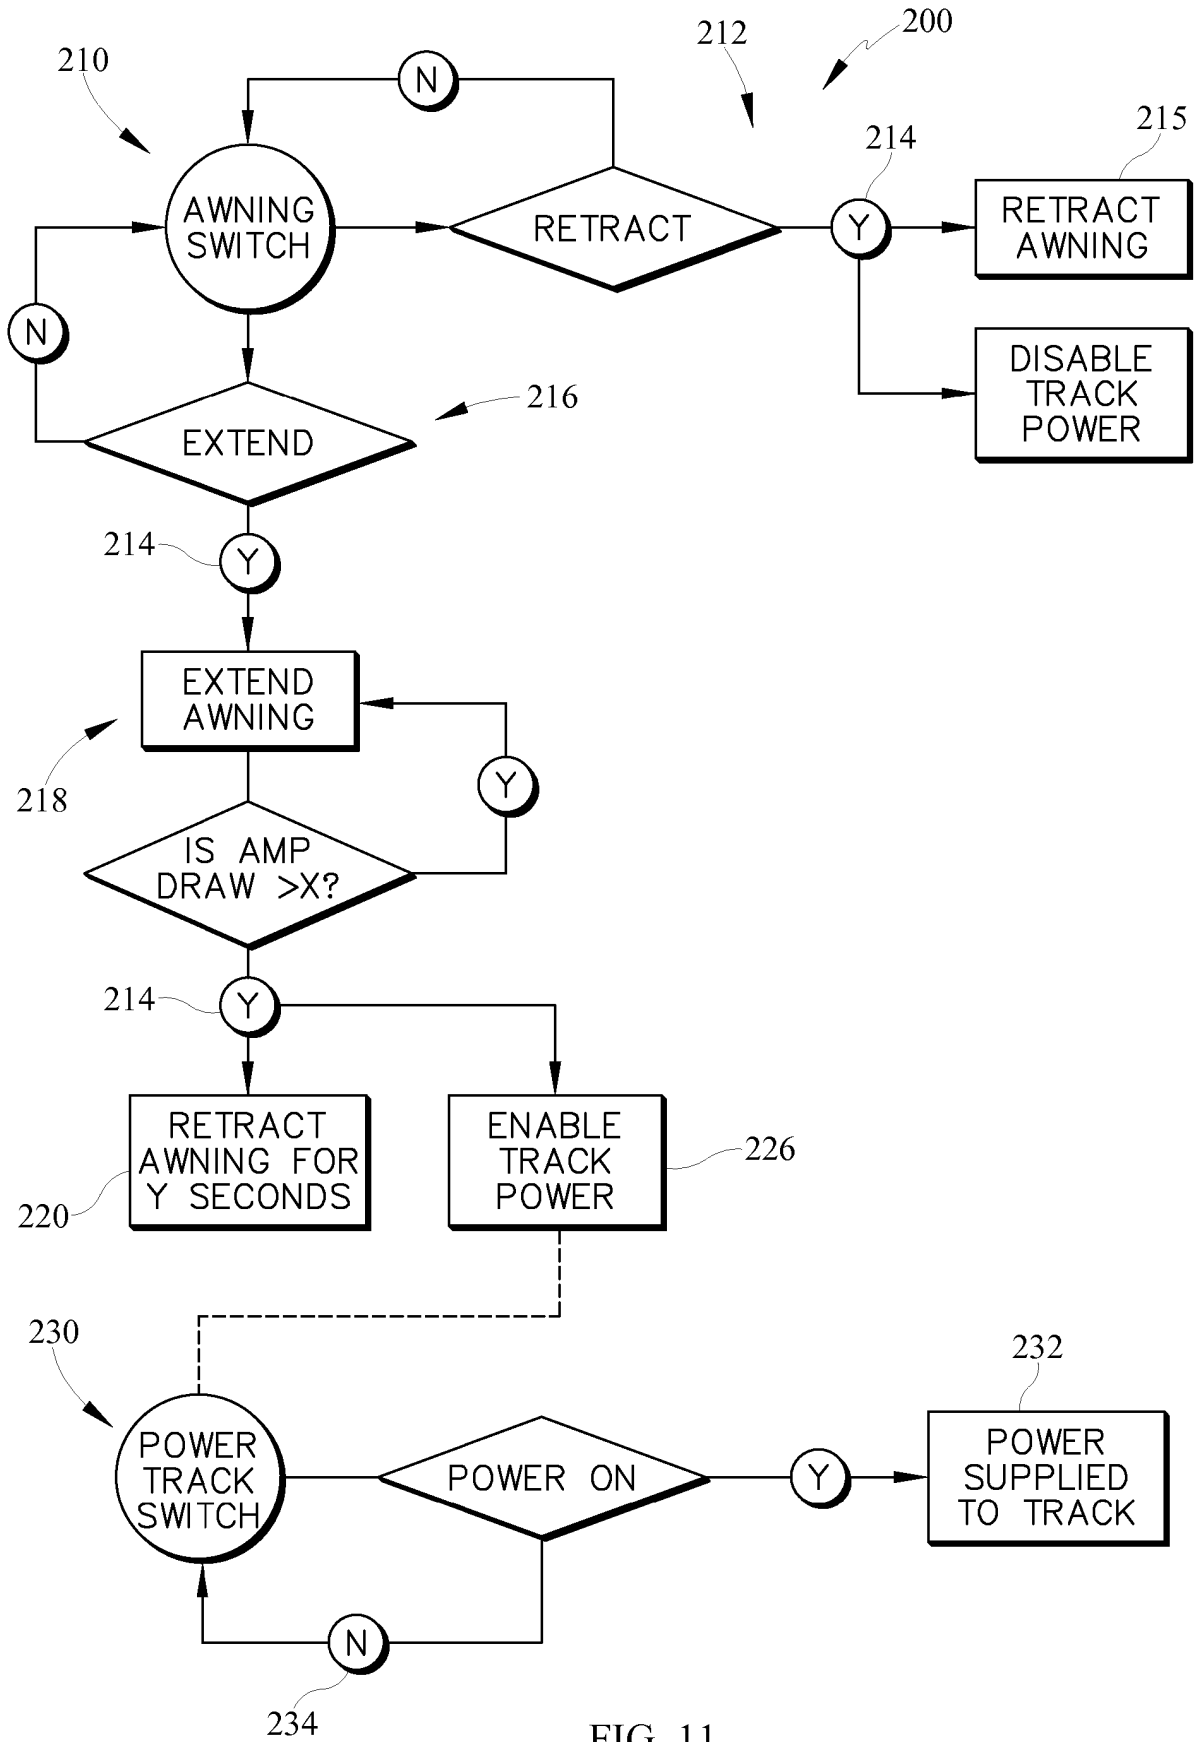


FIG. 11

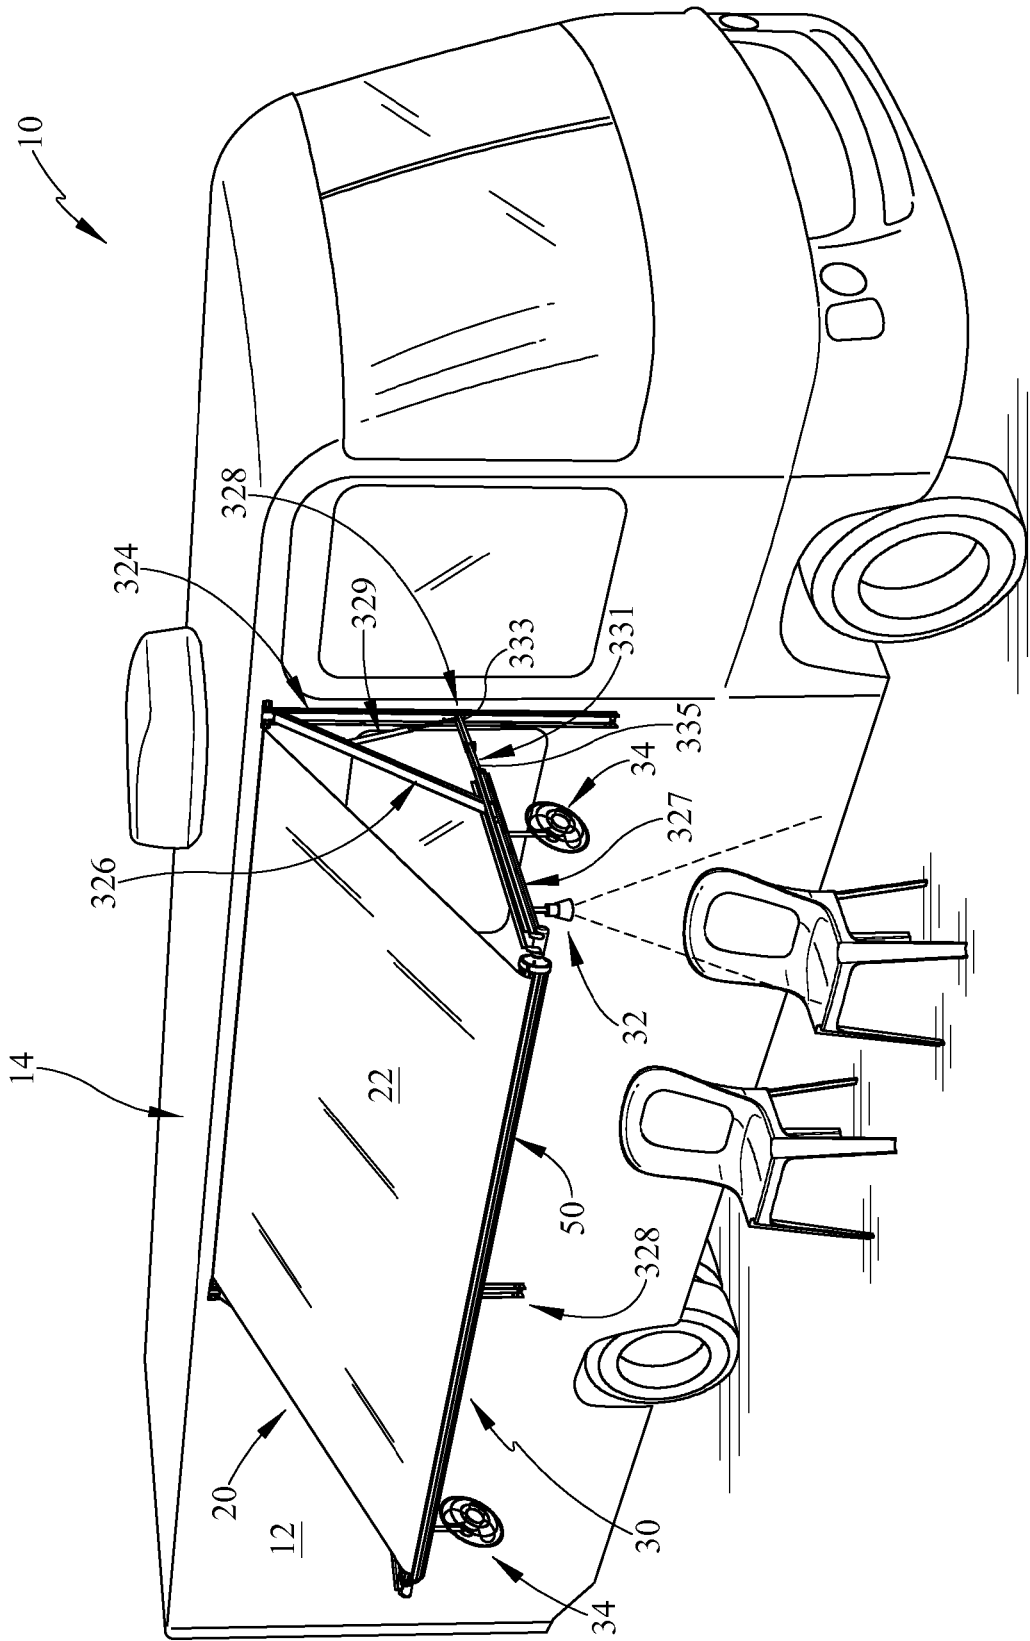


FIG. 12

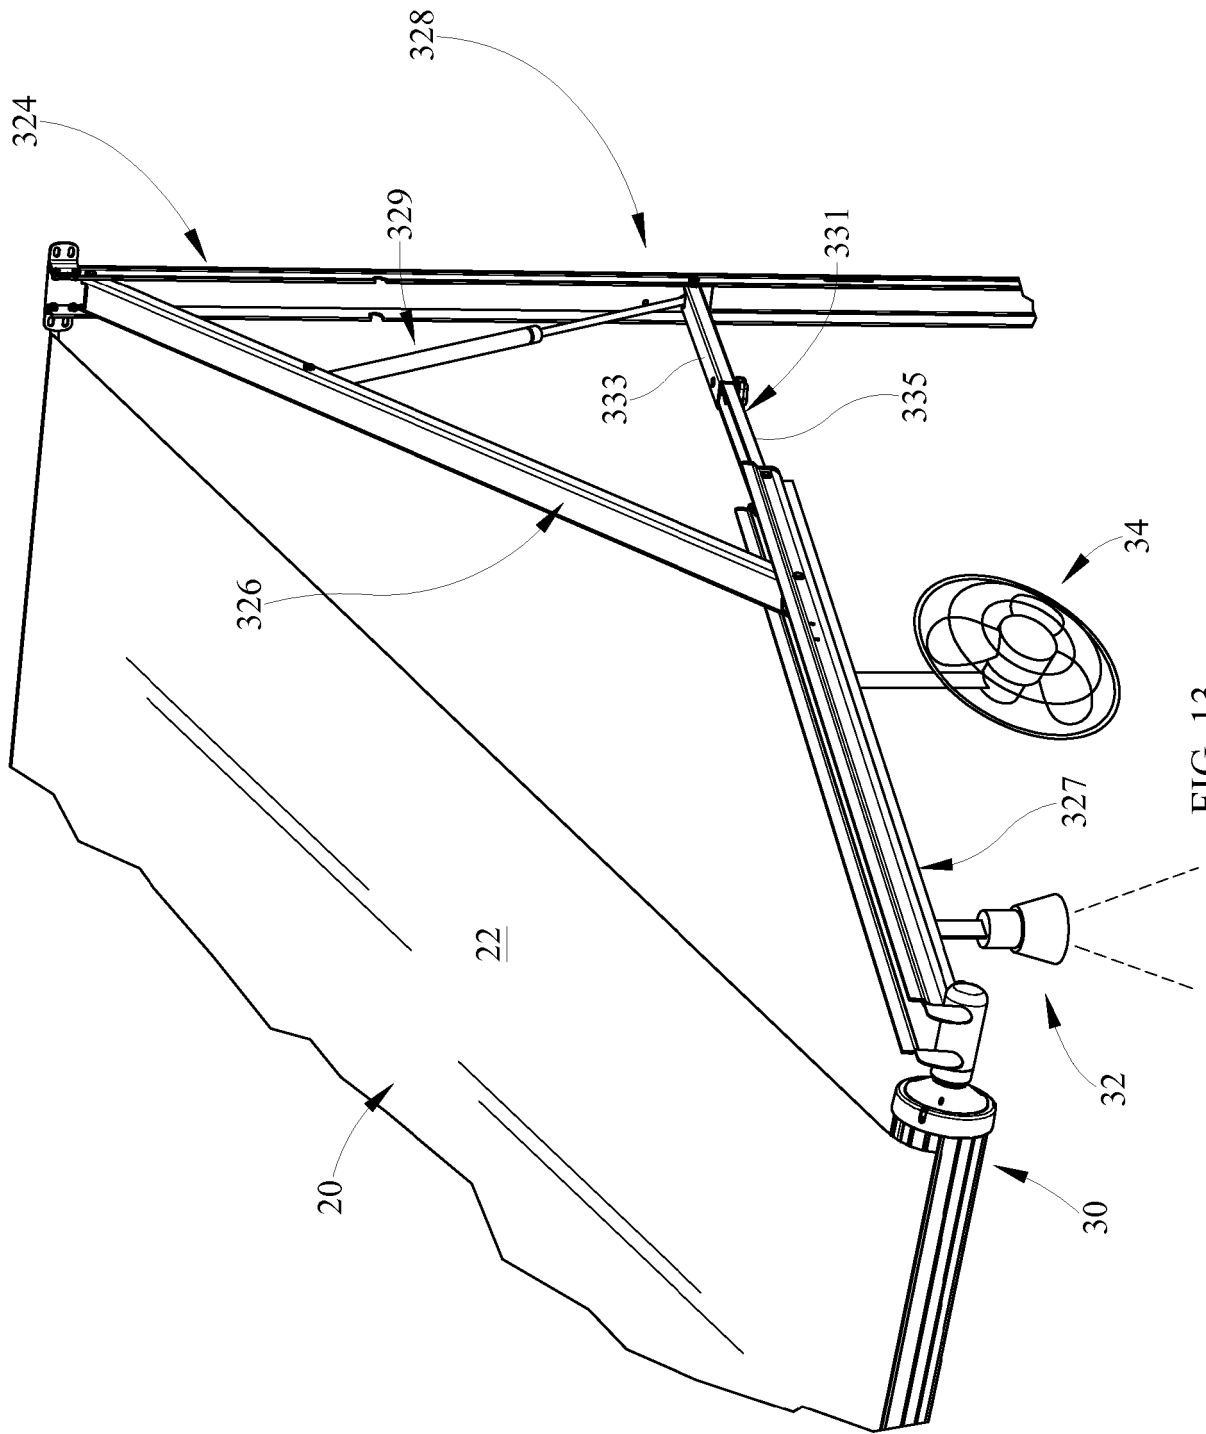


FIG. 13

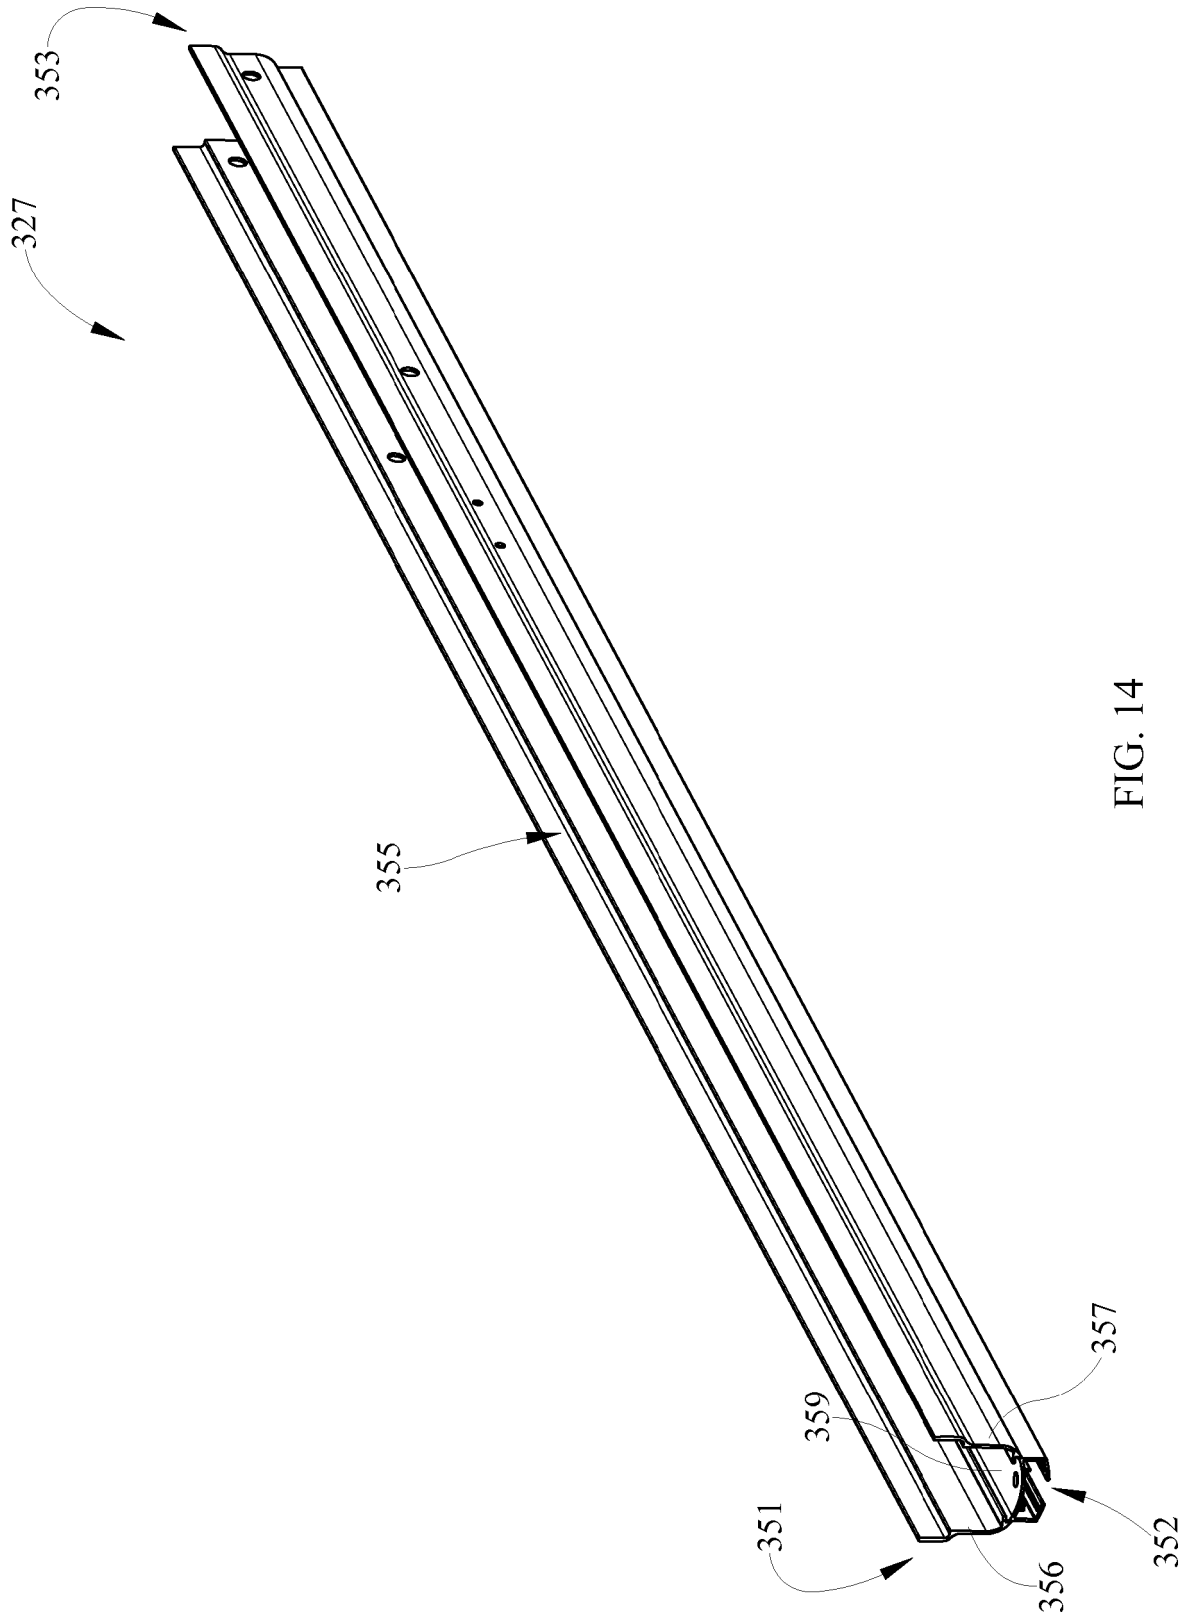


FIG. 14

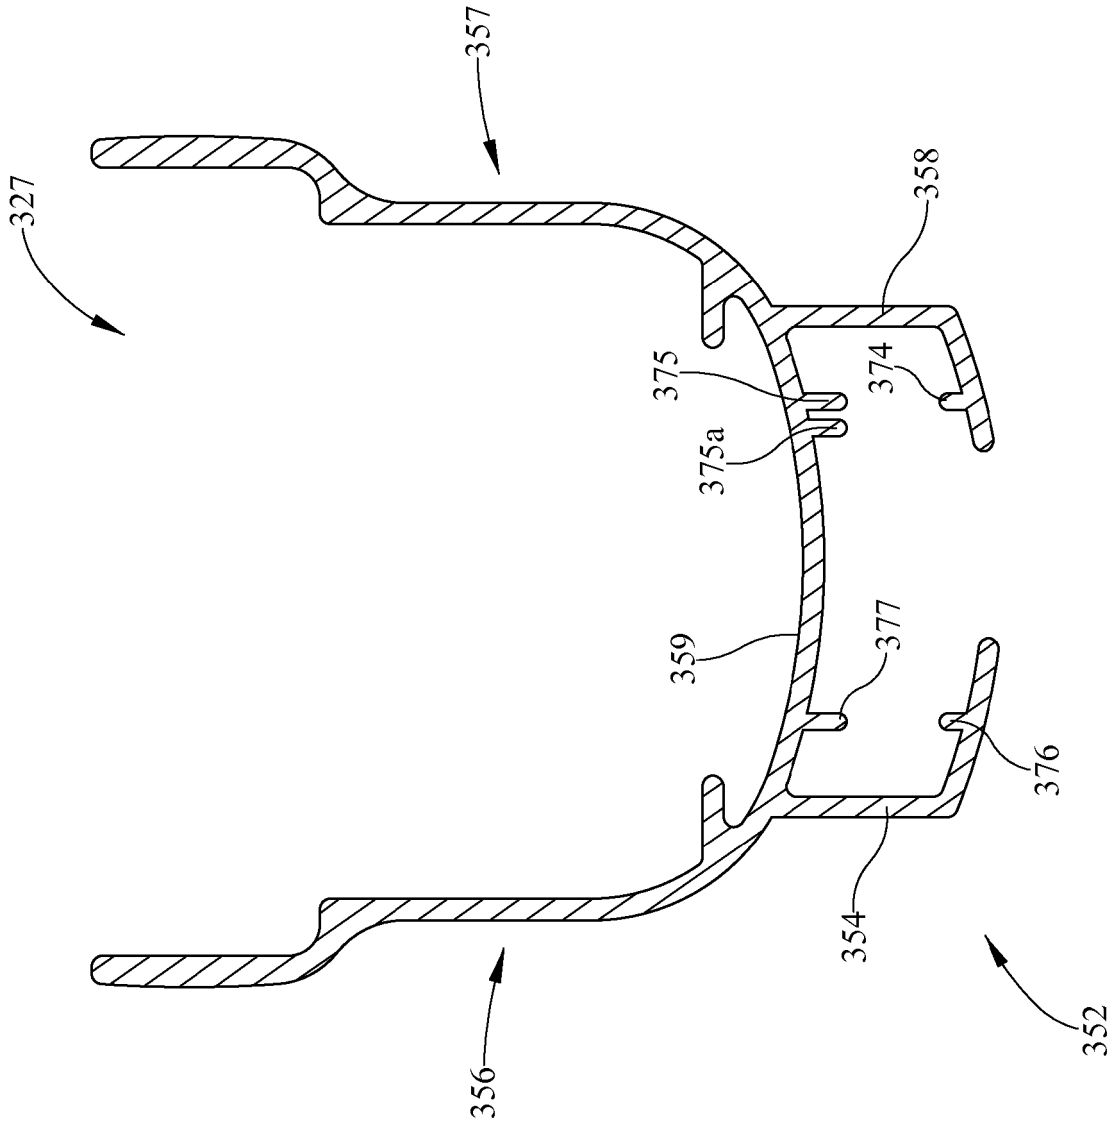


FIG. 15

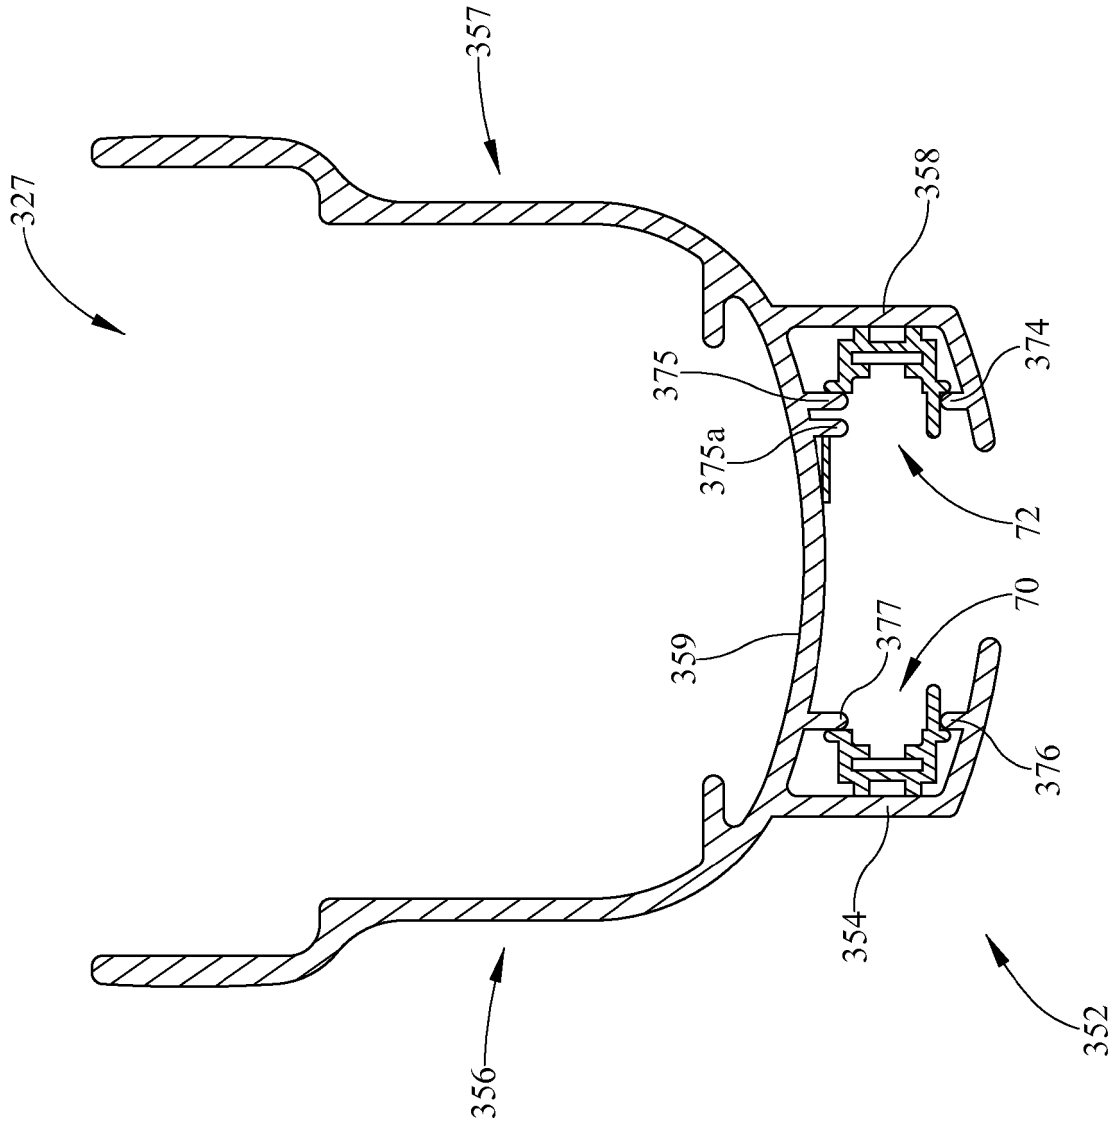


FIG. 16

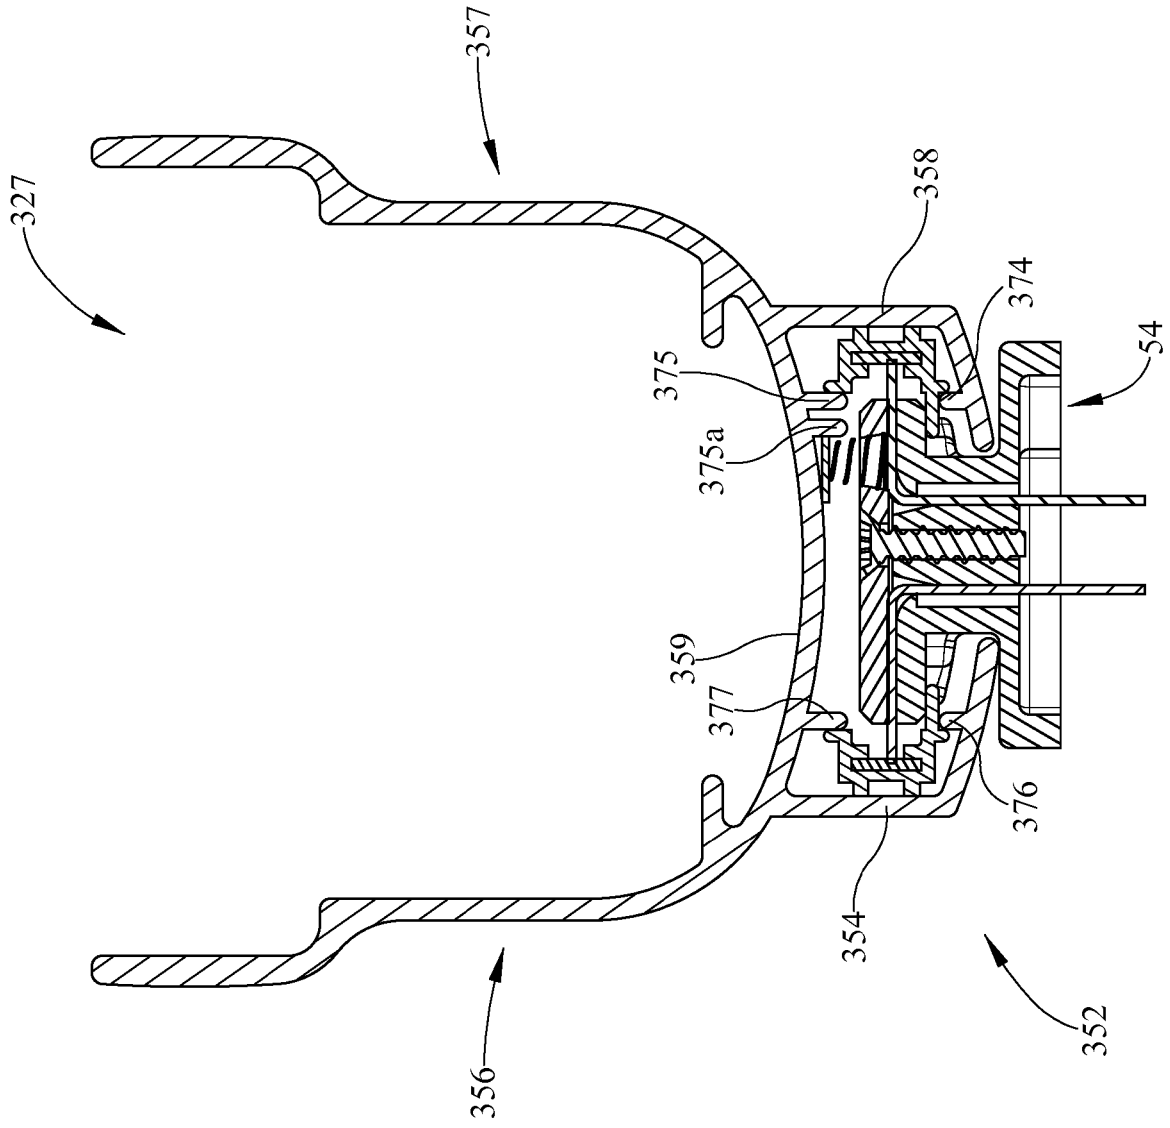


FIG. 17

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 27818014 [0001]
- US 62084226 B [0001]
- EP 0859350 A1 [0008]
- ES 1103311 U [0008]
- US 27803614, Taylor [0032]