



US009890961B1

(12) **United States Patent**
Sheldon

(10) **Patent No.:** **US 9,890,961 B1**
(45) **Date of Patent:** **Feb. 13, 2018**

- (54) **AC WINDOW SECURITY DEVICE**
- (71) Applicant: **Ronald S. Sheldon**, Tolland, CT (US)
- (72) Inventor: **Ronald S. Sheldon**, Tolland, CT (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- (21) Appl. No.: **15/142,289**
- (22) Filed: **Apr. 29, 2016**

Related U.S. Application Data

- (60) Provisional application No. 62/174,947, filed on Jun. 12, 2015.

- (51) **Int. Cl.**
A47F 5/00 (2006.01)
F24F 1/02 (2011.01)
F16M 13/02 (2006.01)
F24F 13/32 (2006.01)

- (52) **U.S. Cl.**
CPC *F24F 1/027* (2013.01); *F16M 13/02* (2013.01); *F24F 13/32* (2013.01)

- (58) **Field of Classification Search**
CPC .. F24F 1/027; F24F 13/32; F24F 13/18; F24F 2221/20; E04G 3/18
USPC 248/208, 209, 236; 454/196, 204
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 1,214,057 A * 1/1917 Moore E06B 7/28 454/196
- 2,978,973 A * 4/1961 Sweedyk F24F 1/04 248/208
- 4,445,459 A * 5/1984 Julie A01K 1/0236 119/28.5

- 4,498,374 A * 2/1985 Gibson F24F 13/32 454/204
- 4,510,852 A * 4/1985 Sorrentino F24F 13/32 454/204
- 4,691,477 A * 9/1987 Governale E06L 37/00 206/325
- 5,609,002 A 3/1997 Fernandez
- 5,967,478 A * 10/1999 Tynes A47B 45/00 248/208
- 6,460,820 B1 * 10/2002 Kopp F16M 7/00 248/500
- 7,207,141 B2 4/2007 Sullivan
- 7,350,759 B1 * 4/2008 Gray F24F 1/027 248/644
- 8,443,550 B1 5/2013 Burns
- 8,584,998 B1 * 11/2013 Peterson F24F 13/32 182/62
- 8,998,690 B1 * 4/2015 Virag F24F 13/32 248/208


(Continued)

Primary Examiner — Christopher Garfit
(74) *Attorney, Agent, or Firm* — Shifrin Patent Law; Dan Shifrin

(57) **ABSTRACT**

An AC window security device is provided, comprising: a sill plate bracket, a cross-bar, a pair of U-brackets, and a pair of J-brackets. The sill plate bracket is configured to be secured to a window sill under a window AC unit in an at least partially open window. The lower end of each U-bracket hooks into an opening in one end of the sill plate bracket and extend vertically along a side of the AC unit. The upper end of each J-bracket fits over an upper frame of the at least partially open window. The upper end of each U-bracket is removably secured to the lower end of a corresponding J-bracket. The cross-bar is configured to be positioned along a top surface of the AC unit and removably secured to both U-brackets, wherein the at least partially open window is prevented from being opened.

5 Claims, 8 Drawing Sheets

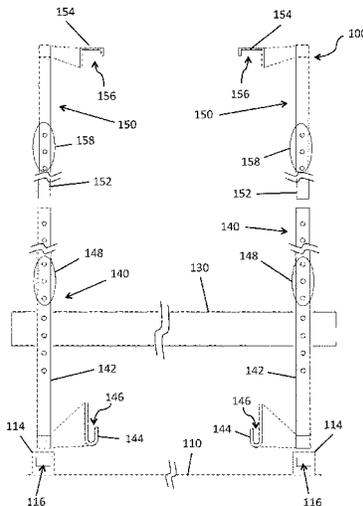

(56)

References Cited

U.S. PATENT DOCUMENTS

9,303,895	B1 *	4/2016	Grant	F24F 13/32
2010/0270448	A1 *	10/2010	Boccia	F24F 1/027
					248/208
2013/0153744	A1 *	6/2013	Jin	F24F 13/32
					248/670
2015/0097096	A1 *	4/2015	Arbucci	E06B 7/28
					248/208
2016/0109150	A1 *	4/2016	De Jesus	E06B 7/28
					49/55

* cited by examiner

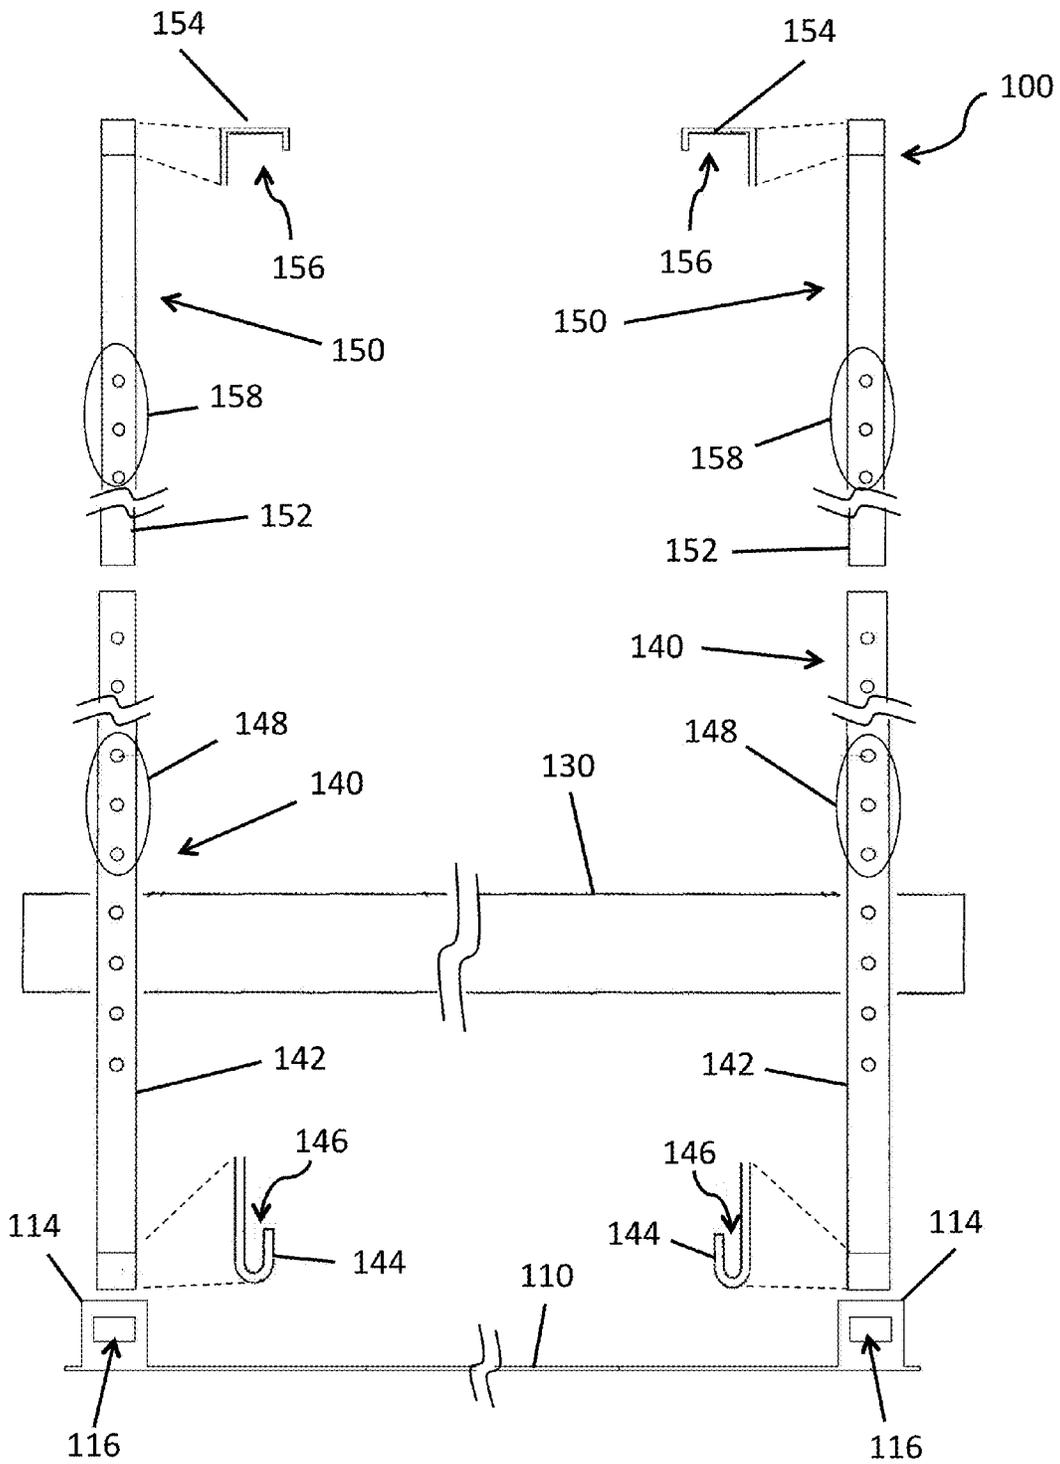


FIG. 1

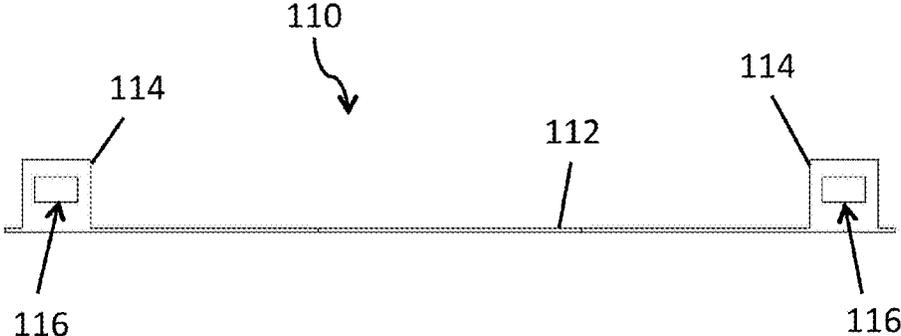


FIG. 2A

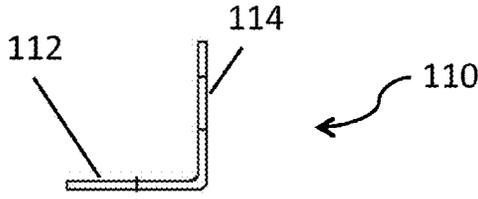


FIG. 2B

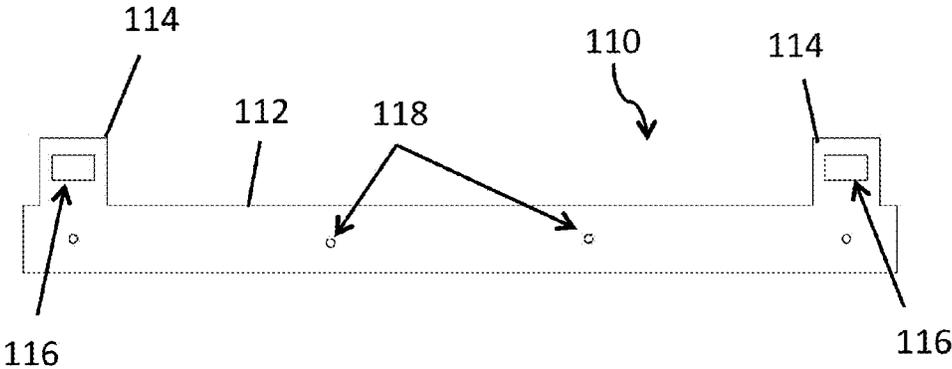


FIG. 2C

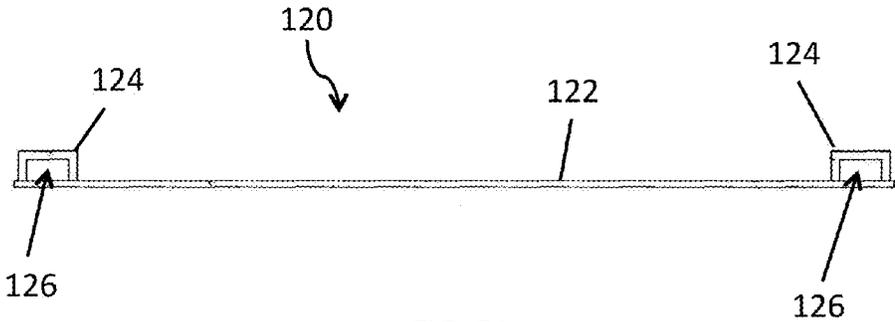


FIG. 3A

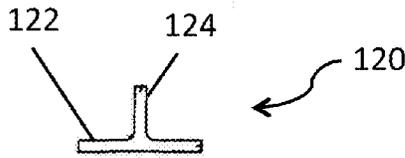


FIG. 3B

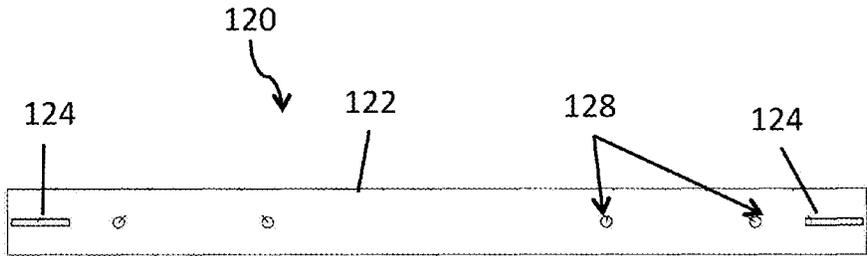


FIG. 3C

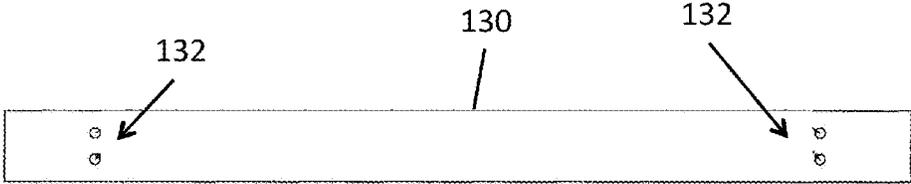


FIG. 4A



FIG. 4B

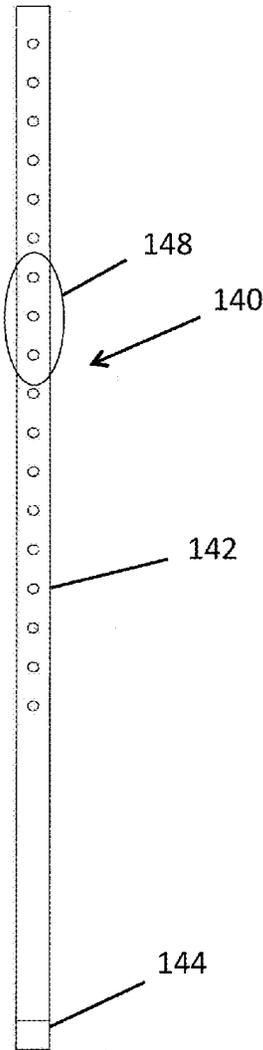


FIG. 5A

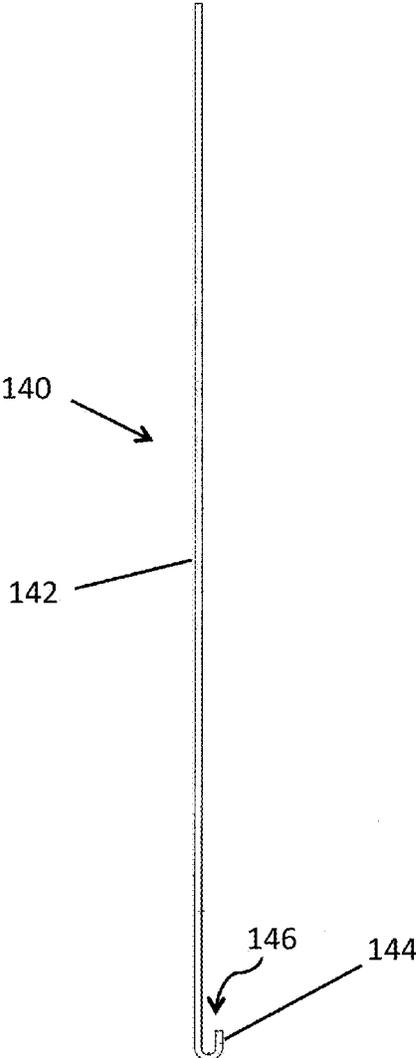


FIG. 5B

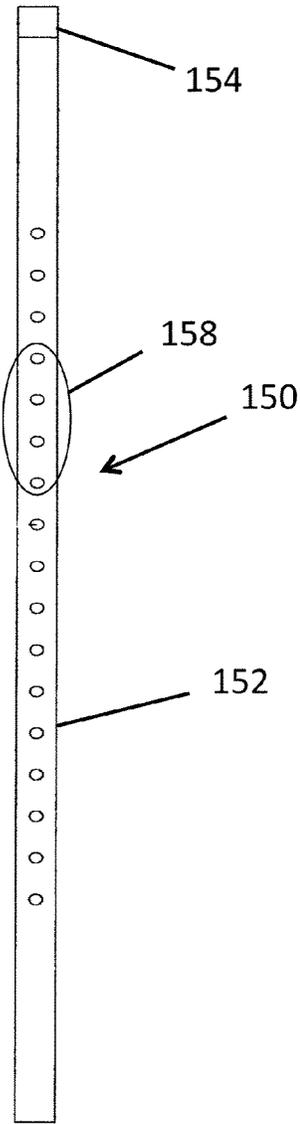


FIG. 6A

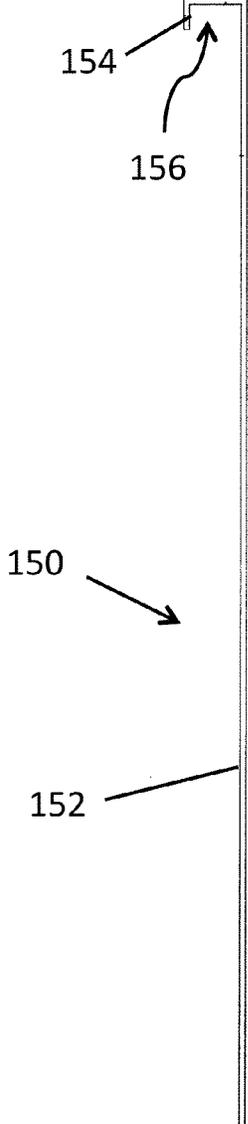


FIG. 6B

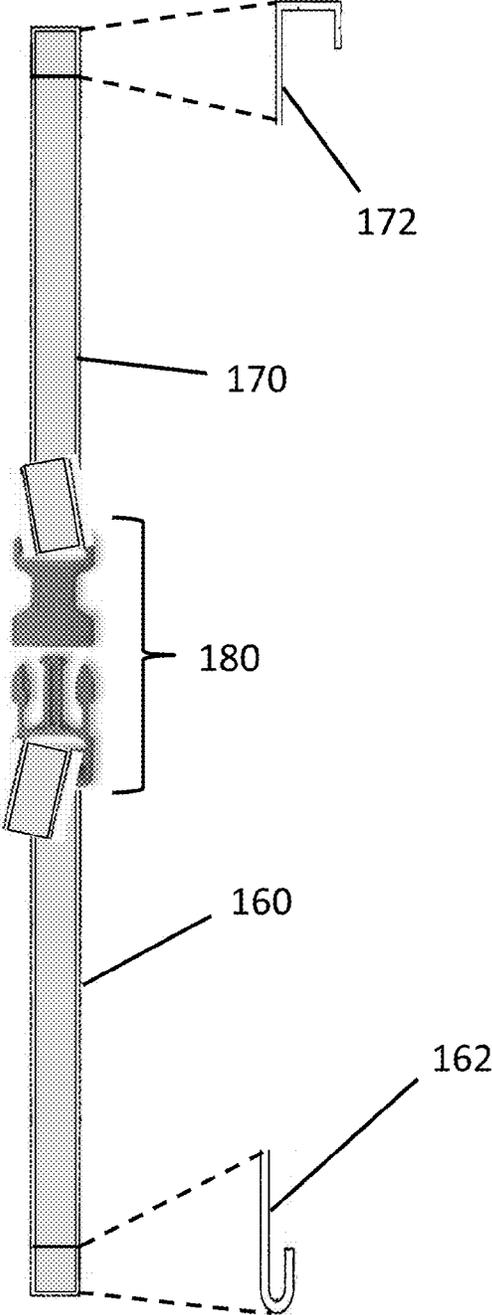


FIG. 8

1

AC WINDOW SECURITY DEVICE

RELATED APPLICATION DATA

The present application is related to commonly-assigned and co-pending U.S. application Ser. No. 62/174,947, entitled AC WINDOW SECURITY DEVICE, filed on Jul. 2, 2015, which application is incorporated herein by reference in its entirety.

TECHNICAL FIELD

The present invention pertains to window air conditioners and, in particular, to a security device to prevent a window in which an air conditioner has been installed from being opened.

BACKGROUND ART

Window air conditioning (AC) units are a relatively inexpensive and convenient way to cool selected rooms or areas. A window is partially opened, the AC unit is installed in the window, and the window is then closed on top of the AC unit. While convenient, window AC units also have some drawbacks, including limited ability to keep the window from being opened, either from someone the outside, such as an intruder trying to break in, or from someone on the inside, such as a child who could fall out.

SUMMARY OF THE INVENTION

Embodiments of the present invention provide an AC window security device, comprising: a sill plate bracket, a cross-bar, a pair of U-brackets, and a pair of J-brackets. The sill plate bracket comprises an elongated flat plate and a bracket on both ends of the flat plate extending substantially perpendicular to the flat plate, each bracket having an opening formed therethrough. The sill plate bracket is configured to be secured to a window sill under a window AC unit in an at least partially open window, the elongated flat plate extending beyond both sides of the AC unit. Each U-bracket comprises a first elongated strip and a narrow hook at a first end. The narrow hook is configured to fit into the opening in one end of the sill plate bracket with the first elongated strip positioned substantially vertically on a side of the AC unit. The J-bracket, comprises a second elongated strip and a wide hook at a first end, configured to fit over an upper frame of the at least partially open window with the second elongated strip positioned substantially vertically on a side of the AC unit. A second end of the U-bracket is removably secured to a second end of the J-bracket. The cross-bar is configured to be positioned along a top surface of the AC unit and removably secured to both U-brackets, wherein the at least partially open window is prevented from being opened.

Embodiments of the present invention also provide a method for securing a window in which an air conditioner (AC) is installed, comprising: securing a sill plate bracket to a window sill under a window AC unit in an at least partially open window, the sill plate bracket extending beyond both sides of the AC unit and having a bracket on both ends extending substantially perpendicular to the window sill, each bracket having an opening formed therethrough; clipping first hooks at lower ends of each of a pair of U-brackets to the openings in the sill plate brackets with a first elongated strip of each U-bracket positioned substantially vertically along the sides of the AC unit; positioning second hooks at

2

upper ends of each of a pair of J-brackets over an upper frame of the at least partially open window with a second elongated strip of each J-bracket positioned substantially vertically on the sides of the AC unit; positioning a cross-bar along a top surface of the AC unit; and securing the first elongated strip of each U-bracket to the second elongated strip of a corresponding J-bracket and securing the cross-bar to both U-brackets, wherein the at least partially open window is prevented from being opened.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an embodiment of an AC window security device of the present invention;

FIG. 2A illustrates a front view an embodiment of a sill plate bracket usable with the security device of FIG. 1;

FIG. 2B illustrates an end view of the sill plate bracket of FIG. 2A;

FIG. 2C illustrates a top view of the sill plate bracket of FIG. 2A before the end brackets are bent down;

FIG. 3A illustrates a front view another embodiment of a sill plate bracket usable with the security device of FIG. 1;

FIG. 3B illustrates an end view of the sill plate bracket of FIG. 3A;

FIG. 3C illustrates a top view of the sill plate bracket of FIG. 3A;

FIG. 4A illustrates a top view of an embodiment of a cross-bar usable with the security device of FIG. 1;

FIG. 4B illustrates a side view of the cross-bar of FIG. 4A;

FIG. 5A illustrates a front view of an embodiment of a U-bracket usable with the security device of FIG. 1;

FIG. 5B illustrates a side view of the U-bracket of FIG. 5A;

FIG. 6A illustrates a front view of an embodiment of a J-bracket usable with the security device of FIG. 1;

FIG. 6B illustrates a side view of the J-bracket of FIG. 6A;

FIG. 7 illustrates the security device of FIG. 1 installed on a window; and

FIG. 8 illustrates another embodiment of a U-bracket and a J-bracket usable with the AC window security device of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The described features, structures, or characteristics of the invention may be combined in any suitable manner in one or more embodiments. In the following description, numerous specific details are provided to provide a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention can be practiced without one or more of the specific details, or with other methods, components and so forth. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.

FIG. 1 illustrates an embodiment of an air conditioner (AC) window security device **100** of the present invention. The device **100** includes a sill plate bracket **110**, a cross-bar **130**, a pair of U-brackets **140**, and a pair of J-brackets **150**.

As illustrated in FIGS. 2A, 2B, the sill plate bracket **110** includes an elongated flat plate **112** with a bracket **114** at each end. Both brackets **114** are perpendicular to the flat plate **112** and have an opening **116** formed therethrough. Thus, when the sill plate bracket **110** is installed on a

window sill, the flat plate **112** is substantially horizontal and the brackets **114** are substantially vertical. The sill plate bracket **110** also has mounting holes **118** formed through the flat plate **112**. In the embodiment illustrated in FIGS. 2A, 2B, the sill plate bracket **110** is cut from a single piece of material and the end brackets **114** are bent about 90° from the flat plate **112** (FIG. 2C). FIGS. 3A-3C illustrate another embodiment of a sill plate bracket **120** having a flat plate **122** with end brackets **124**. Both brackets **124** are formed with a T-shaped cross-section and have an opening **126** formed therethrough. The flat plate **122** and the end brackets **124** are cut separately from a material and the brackets **124** welded onto the top surface of the flat plate **122**. The sill plate bracket **120** also has mounting holes **128** formed through the flat plate **122**.

FIG. 4A and 4B illustrate top and side views, respectively, of an embodiment of a cross-bar **130** usable with the security device **100** of FIG. 1. The cross-bar **130** comprises an elongated flat plate with mounting holes **132** formed through both ends.

FIGS. 5A, 5B illustrate front and side views, respectively, of an embodiment of a U-bracket **140** usable with the security device **100** of FIG. 1. Both U-brackets **140** comprise an elongated strip **142** with a narrow hook **144** at the bottom end, forming an upward-opening channel **146** (best seen in FIG. 5B). Spaced-apart mounting holes **148** are formed along the elongated strip **142**.

FIGS. 6A, 6B illustrate front and side views, respectively, of an embodiment of a J-bracket **150** usable with the security device **100** of FIG. 1. Both J-brackets **150** comprise an elongated strip **152** with a wide top hook **154** at the top end, forming a downward-opening channel **156** (best seen in FIG. 6B). Spaced-apart mounting holes **158** are formed along the elongated strip **152**.

FIG. 7 illustrates the AC window security device **100** installed around an AC unit **10** in a window **20**. The window **20** includes a frame **22**, a sill **24**, an upper window **26** and a lower window **28**. Although FIG. 7 illustrates the security device **100** installed in a double-hung window, it may also be installed in a single-hung window. To install the security device **100**, the sill plate bracket **110** is secured to the top of the window sill **24**, such as by screwing the flat plate **112** into the sill **24** through the holes **118**. The lower window **28** is raised and the AC unit **10** is then mounted in the window **20** with the bottom of the AC unit **10** resting on top of the flat plate **112** of the sill plate bracket **110**. The lower window **28** is lowered onto the top of the AC unit **10**. The top hooks **154** of the J-brackets **150** are positioned so that the top of the lower window **28** fits within the channels **156**. With the U-brackets **140** on either side of the AC unit **10**, the narrow hooks **144** of the U-brackets **140** are inserted into the openings **116** of the brackets **114** of the sill plate bracket **110**. The elongated strips **142**, **152** of the J-brackets **140** and U-brackets **150** are bolted together through the holes **148**, **158**. The cross-bar **130** is then positioned across the top of the AC unit **10** and bolted to the elongated strips **152** of the two U-brackets **150** through the holes **132**, **148**. For additional security, the U-brackets **140** and the cross-bar **130** may also be screwed into the lower frame of the lower window **28**, again through the holes **132**, **148**.

The security device **100** is easily removed by reversing the installation steps, such as for maintenance or during the colder season when the AC unit **10** is removed and stored. The sill plate bracket **110** may be left in place if desired.

The sill plate bracket **110**, cross-bar **130**, U-brackets **140**, and J-brackets **150** may be formed from any appropriate material, such as aluminum, steel, or other metal, and may

be untreated, galvanized, or powdered coated. Although screws, nuts, and bolts are one method of securing the components together and to the window **20**, other fasteners may also be used. Any of the components may have a foam backing to protect the surface of the window sill or frame.

The dimensions of the components are not critical to the practice of the present invention. Moreover, the components of the security device **100** may be manufactured in a variety of sizes to accommodate windows and AC units of different sizes. Thus, the following dimensions are provided as examples only and are not meant to be limiting. For a standard size double-hung window illustrated in the figures, the sill plate bracket **110** may be 26 inches long and two inches wide, and the brackets **114** may be two inches high. The U-brackets **140** may be about 30 inches long or shorter for a small window to about 96 inches or longer for a large window and 1 inch wide. The cross-bar **130** may be about 26 inches long (or longer or shorter) and two inches wide. The J-brackets **150** may be about 33 inches long (or longer or shorter) and 1 inch wide. The cross-bar **10**, U-brackets **140**, and J-brackets may be $\frac{1}{8}$ to $\frac{3}{16}$ inches thick. Again, the components may be manufactured to various dimensions to fit windows of various dimensions.

In another embodiment of the security device **100**, illustrated in FIG. 8, upper and lower straps **160**, **170**, made from a fabric such as nylon, Kevlar, or other like material, may be substituted for the U-brackets **140** and J-brackets **150**. A U-hook **162** secured to the lower end of the lower strap may be hooked into the opening **116** in the bracket **114** and a J-hook **172** secured to the upper end of the upper strap **170** may hook over the top of the lower window **28**. A releasable connector **180**, such as a side-release adjustable buckle or other like connector, may be used to connect and tighten the two straps **160**, **170** when installing the security device **100**.

With the AC window security device **100** installed in the window **20** around the AC unit **10**, the lower window **28** cannot be raised, thereby preventing anyone on the outside gaining entrance through the window **20** and preventing anyone on the inside, such as a child, from accidentally falling out of the window **20**.

The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

What is claimed is:

1. An air conditioner (AC) window security device, comprising:
 - a sill plate bracket, comprising:
 - an elongated flat plate; and
 - a bracket on both ends of the flat plate extending perpendicular to the flat plate, each bracket having an opening formed therethrough;
 - the sill plate bracket configured to be secured to a window sill under a window AC unit in an at least partially open window, the elongated flat plate extending beyond both sides of the AC unit;
 - a pair of U-brackets, each comprising:
 - a first elongated strip; and
 - a narrow hook at a first end;

5

the narrow hook configured to fit into the opening in one end of the sill plate bracket with the first elongated strip positioned vertically along a side of the AC unit;

pair of J-brackets, each comprising:

- a second elongated strip; and
- a wide hook at a first end, configured to fit over an upper frame of the at least partially open window with the second elongated strip positioned vertically on a side of the AC unit, a second end of the first elongated strip being removably secured to a second end of the second elongated strip; and

a cross-bar configured to be positioned along a top surface of the AC unit and removably secured to both U-brackets, wherein cross-bar is configured to prevent the at least partially open window from being opened.

2. The AC window security device of claim 1, wherein the first elongated strip of each U-bracket and the second elongated strip of each J-bracket are formed from metal.

6

3. The AC window security device of claim 1, wherein:

- the first elongated strip of each U-bracket comprises a fabric strap;
- the second elongated strip of each J-bracket comprises a fabric strap; and
- the AC window security device further comprises a connector to releasably connect the second end of the first elongated strip with the second end of the second elongated strip.

4. The AC window security device of claim 1, wherein the brackets of the sill plate bracket comprise a T-shaped bracket welded onto the flat plate.

5. The AC window security device of claim 1, wherein the flat plate and the brackets of the sill plate comprise a single piece of material, the brackets being perpendicular to the flat plate.

* * * * *