

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 185 452 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **26.05.93** (51) Int. Cl.⁵: **C22C 19/00, C22C 30/00**

(21) Application number: **85308079.4**

(22) Date of filing: **06.11.85**

(54) **Nickel/titanium/niobium shape memory alloy and article.**

(30) Priority: **06.11.84 US 668777**

(43) Date of publication of application:
25.06.86 Bulletin 86/26

(45) Publication of the grant of the patent:
26.05.93 Bulletin 93/21

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

(56) References cited:
US-A- 3 662 455

CHEMICAL ABSTRACTS, vol. 100, no. 20, 14
May 1984, Columbus, OH (US); p. 256, no.
160692p&NUM;

METALS ABSTRACTS, vol. 17, 1984;
S.G.FEDOTOV et al., no. 11- 0466&NUM;

SCIENTIFIC AMERICAN, vol. 241, no. 5, No-
vember 1979; pp. 68- 76&NUM;

(73) Proprietor: **Advanced Metal Components, Inc.
(AMCI)**
1374 Willow Road
Menlo Park, CA 94025(US)

(72) Inventor: **Simpson, John A.**
2390 W. Middlefield, 5
Mountain View, CA 94040(US)
Inventor: **Duerig, Tom**
41681 Mission Creek Drive
Fremont, CA 94539(US)
Inventor: **Melton, Keith**
21702 Columbus Avenue
Cupertino, CA 95014(US)

(74) Representative: **Belcher, Simon James et al**
Urquhart-Dykes & Lord Tower House Mer-
ion Way
Leeds LS2 8PA (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 185 452 B1

Description

This invention relates to the field of nickel/titanium-based shape memory alloys and particularly to those alloys containing niobium.

Materials, both organic and metallic, capable of possessing shape memory are well known. An article made of such materials can be deformed from an original, heat-stable configuration to a second, heat-unstable configuration. The article is said to have shape memory for the reason that, upon the application of the heat alone, it can be caused to revert or attempt to revert from its heat-unstable configuration to its original heat-stable configuration, i.e., it "remembers" its original shape.

Among metallic alloys the ability to possess shape memory is a result of the fact that the alloy undergoes a reversible transformation from an austenitic state to a martensitic state with a change of temperature. Also, the alloy is considerably stronger in its austenitic state than in its martensitic state. This transformation is sometimes referred to as a thermoelastic martensitic transformation. An article made from such an alloy, for example, a hollow sleeve, is easily deformed from its original configuration to a new configuration when cooled below the temperature at which the alloy is transformed from the austenitic state to the martensitic state. The temperature at which this transformation begins is usually referred to as M_s and the temperature at which it finishes M_f . When an article thus deformed is warmed to the temperature at which the alloy starts to revert back to austenite, referred to as A_s (A_f being the temperature at which the reversion is complete), the deformed object will begin to return to its original configuration.

Commercially viable alloys of nickel and titanium have been demonstrated to have shape-memory properties which render them highly useful in a variety of applications.

Shape-memory alloys have found use in recent years in, for example, pipe couplings (such as are described in U.S.P. 4,035,007 and 4,198,081 to Harrison and Jervis), electrical connectors (such as are described in U.S.P. 3,740,839 to Otte and Fischer), switches (such as are described in U.S.P. 4,205,293 to Melton and Mercier),.

It is, of course, advantageous to have the alloy austenitic at the service temperature which is often but not necessarily near room temperature, since the austenite phase is stronger than the martensite phase. In fact, it would be desirable to have the alloy remain austenitic over a wide range of service temperatures, for example from substantially below room temperature to substantially above room temperature, so that the alloy has practical utility.

As an illustration, Military Specification MIL-F-85421 requires a product that is functional to about -55°C . If the product comprises a shape memory alloy, then for convenience in shipping the product in the heat-unstable configuration, the product should not recover prior to about 50°C . It is a matter of commercial reality, within and without the military, that the product satisfy these or similar requirements.

It is also desirable that the alloy be martensitic in the vicinity of room temperature so that the article can be fabricated, stored, and shipped at or near room temperature. The reason for this is that in the case of an article made from the alloy, a coupling, for example, the article would not recover prematurely.

Conceptually, one way to achieve these desirable results, to wit, an alloy that is martensitic near room temperature and which is also austenitic over a large range of temperatures including room temperature, is to have an alloy which exhibits a sufficiently wide transformation hysteresis, say, greater than about 125°C . If the hysteresis were sufficiently wide and room temperature could be located near the middle of the hysteresis, then the alloy could be fabricated and conveniently stored while in the martensitic condition. Since the hysteresis is sufficiently wide, the alloy would not transform to austenite until heated Substantially above room temperature. This heating would not be applied until the alloy (in the form of a coupling, for example) was installed in its intended environment. The alloy, which would then be in the austenitic condition, would remain in the austenitic condition after cooling down since the service temperature (which may be above or below room temperature) would be substantially above the martensite transformation temperature. Thus, the above-noted desirable results could be achieved.

Unfortunately, there is believed to be no commercially viable nickel/titanium-based alloy that has a hysteresis sufficiently wide to achieve these desirable results.

For example, the commercially viable near equiatomic binary nickel-titanium alloys can have a hysteresis width of about 30°C . The location of the hysteresis for this alloy is also extremely composition sensitive so that while the hysteresis can be shifted from sub-zero temperatures to above-zero temperatures, the width of the hysteresis does not appreciably change. Thus, if the alloy were martensitic at room temperature, the service temperature must be above room temperature. Similarly, if the service temperature was at room temperature, the alloy would be martensitic below room temperature so that the alloy would require special cold-temperature equipment for fabrication, shipping, and storage. Ideally, as discussed above, room temperature should be located near the middle of the transformation hysteresis.

However, since the width of the hysteresis in the binary alloy is so narrow, the range of service temperatures for any particular alloy is necessarily limited. As a practical matter, the alloy would have to be changed to accommodate any change in service temperatures.

It can be appreciated that the relative lack of commercialization of shape memory alloys must be due, at least in part, to their extreme sensitivity to temperatures as discussed above. Alloying and processing have not solved the problem.

Nickel/titanium/iron alloys, e.g., those in Harrison et al., USP 3,753,700, while having a wide hysteresis, up to about 70°C, are the typical cryogenic alloys which always undergo the martensite/austenite transformation at sub-zero temperatures. It should be noted that in general, the colder shape-memory alloys such as the cryogenic alloys have a wider transformation hysteresis than the warmer shape memory alloys. In the case of the cryogenic alloys, the alloys must be kept very cold, usually in liquid nitrogen, to avoid the transformation from martensite to austenite. This makes the use of shape memory alloys inconvenient, if not uneconomical.

The nickel/titanium/copper alloys of Harrison et al., U.S. Patent Application No. 537,316, filed September 28, 1983, which served to establish a priority date for EP-A-88604, and the nickel/titanium/vanadium vanadium alloys of Quin, U.S. Patent Application Serial No. 541,844, filed October 14, 1983, which served to establish a priority date for EP-A-140621, are not cryogenic but their hysteresis may be extremely narrow (10-20°C) such that their utility is limited for couplings and similar articles.

Nickel/titanium/niobium alloys are largely unexplored. The ternary phase diagram has been determined [see "Ternary Intermetallic Compounds in the System Ni-Ti-Nb", Poroshkovaya Metallurgiya, No. 8(44), pp. 61-69(1966)] but there has been no study of the physical properties in this system. U.S. Naval Ordinance Laboratory Report NOLTR 64-235 (August, 1965) examined the effect upon hardness of ternary additions of from 0.08 to 16 weight percent of eleven different elements (including niobium) to stoichiometric nickel/titanium. A brazing alloy of percentage weight composition Ti 22.8-36.4%, Ni 26.9-42.9%, Nb 20.7-50.3% is described without reference to shape memory effects in US-A-3662455.

The problems experienced with the nickel/titanium-based shape memory alloys have been somewhat overcome by processing in the copper-based shape memory alloys. It is now known that the hysteresis in copper-based shape memory alloys can be temporarily expanded by mechanical preconditioning, austenitic aging and heat treating. In this regard, see Brook et al., USP 4,036,669; 4,067,752; and 4,095,999.

The methods of the Brook et al. patents have been applied to nickel/titanium-based alloys; however, it has been found that these methods have no beneficial effect on nickel/titanium-based alloys.

It is known that under certain conditions the hysteresis of nickel/titanium-based alloys can be shifted as opposed to expanded. It should be understood that shifting of the hysteresis means that the M_s , M_f , A_s , and A_f temperatures have all been translated to M'_s , M'_f , A'_s , and A'_f such that there is substantially no change in the width of the hysteresis. It should be noted that the translated transformation temperatures may be higher or lower than the normal transformation temperatures. On the other hand, expansion of the hysteresis should generally be understood to mean that A_s and A_f have been elevated to A'_s and A'_f while at least M_s and usually also M_f remain essentially constant. Aging, heat treatment, composition, and cold work can all effectively shift the hysteresis. For example, if the stress is applied to the shape memory alloy at room temperature the hysteresis may be shifted so that the martensite phase can exist at a temperature at which there would normally be austenite. Upon removal of the stress, the alloy would isothermally (or nearly isothermally) transform from martensite to austenite.

Miyazaki et al., ("Transformation Pseudoelasticity and Deformation Behavior in a Ti-50.6 at % Ni Alloy", Scripta Metallurgica, vol. 15, no. 3, pp. 287-292, (1981) have studied the deformation behavior of binary nickel-titanium alloys. As implied in Figure 3 of this reference, the austenite transformation temperatures can be elevated when nonrecoverable strain is imparted to the alloy. That is, when the alloy was strained to 8% or higher and the stress then removed, there was some component of the strain which remained at the deformation temperature of 243°K (compared to an A_f of 221°K). This component recovered when heated to 373°K (see dotted lines on Figure 3) although the precise recovery temperature was never measured. It is not clear from this reference whether the hysteresis was shifted or expanded since the binary nickel-rich alloy tested is extremely unstable when rapidly quenched as was done in this reference. In fact, one skilled in the art would have concluded that the hysteresis was shifted and not expanded due to the unstable alloy tested. There is no illustration of the transformation hysteresis to contradict this conclusion.

In the Melton et al. patent previously mentioned, a nickel/titanium/copper alloy was deformed beyond a critical strain so as to impart nonrecoverable strain. However, no expansion of the transformation hysteresis was reported.

While it can be appreciated that it would be desirable to have a nickel/titanium-based shape memory alloy and article with a sufficiently wide transformation hysteresis, the prior art has thus far remained silent on a way to achieve it.

Thus, it is an object of the invention to have a nickel/titanium-based shape memory alloy which is capable of having a wide transformation hysteresis.

Another problem common to nickel/titanium-based shape memory alloys is their notoriously poor machinability. Of course, while nickel/titanium-based shape memory alloys can be machined, it is only with expensive tooling and then only in relatively simple shapes.

It can be appreciated that a free-machining nickel/titanium-based shape memory alloy would be extremely desirable. Unfortunately, the prior art has also remained silent on how to achieve such an alloy.

Thus, it is another object of the invention to have a nickel/titanium-based shape memory alloy that is free-machining.

Still another problem with shape memory alloys is that many alloys transform to an "R" phase at temperatures above the normal martensite transformation temperature. The R phase is a transitional phase between austenite and martensite. Generally, in alloys with M_s temperatures below -70°C , the R phase becomes manifest at significantly higher temperatures. In couplings, the R phase transformation leads to a relaxation of stresses upon cooling before the M_s temperature is reached.

It would be desirable to have an alloy with no deleterious R phase transformation. That is, it is desirable to have an alloy with an R phase transformation at as low a temperature as possible or at least an R phase transformation that does not interfere with the austenite/martensite transformation. Most desirable is no R phase transformation at all.

Thus, it is a further object of the invention to have a nickel/titanium-based shape memory alloy that does not experience a deleterious R phase transformation.

While it is certainly desirable that the shape memory alloy have a wide transformation hysteresis, be free-machining and not exhibit a deleterious R phase transformation, it is important to appreciate and understand that recovery strength, ductility, and stability also remain important considerations when choosing a shape memory alloy.

Thus, it is a still further object of the invention to have a nickel/titanium-based shape memory alloy which is exemplary with respect to recovery strength, ductility, and stability.

These and other objects of the invention will become apparent to those skilled in the art after reference to the following description considered in conjunction with the accompanying drawings.

We have discovered a group of nickel/titanium/niobium alloys that are extremely susceptible to a widening of their transformation hysteresis and that do not exhibit a deleterious R phase transformation. For the most part, these alloys are also free-machining. The disclosed alloys contain about 2.5 to 30 atomic percent niobium.

One aspect of the present invention accordingly provides the use of niobium in a nickel-titanium shape memory alloy to widen the transformation hysteresis ($A_s' - M_s$) of the strained alloy to more than 100°C , (preferably more than 125°C), the alloy consisting essentially of nickel, titanium and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 (preferably 4.5) atomic percent niobium; its second vertex at 37.5 atomic percent titanium, 32.5 atomic percent nickel, and 30 (preferably 20) atomic percent niobium; its third vertex at 33.7 atomic percent titanium, 36.3 atomic percent nickel, and 30 (preferably 20) atomic percent niobium; and its fourth vertex at 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 (preferably 4.5) atomic percent niobium.

A second aspect of the invention provides a shape memory alloy which consists essentially of nickel, titanium, and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 atomic percent niobium; its second vertex at 41.32 atomic percent titanium, 38.68 atomic percent nickel, and 20 atomic percent niobium; its third vertex at 38 atomic percent titanium, 42 atomic percent nickel, and 20 atomic percent niobium; and its fourth vertex at 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 atomic percent niobium.

A third aspect of the invention provides a shape memory alloy which consists essentially of nickel, titanium and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 atomic percent niobium; its second vertex at 37.5 atomic percent titanium, 32.5 atomic percent nickel, and 30 atomic percent niobium; its third vertex at 33.7 atomic percent titanium, 36.3 atomic percent nickel, and 30 atomic percent niobium; and its fourth vertex 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 atomic percent niobium, the alloy having been deformed to impart non-recoverable (at the

deformation temperature) strain thereto, as a result of which the strained alloy has a transformation hysteresis ($As' - Ms$) of at least 100°C .

Alloys according to the invention, as defined by the claims, consist essentially of the stated elements. The term "consist essentially of" is used herein to mean that the alloy may contain other elements but that those other elements do not materially affect the behaviour of the alloy.

Embodiments of the invention will now be described, by the way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a composition diagram illustrating the relationship of M_s temperature to the compositional area claimed according to the invention.

Figure 2 is a composition diagram illustrating the relationship of preconditionability to the compositional area claimed according to the invention.

Figure 3 is a composition diagram illustrating the relationship of microstructure to the compositional area claimed according to the invention.

Figure 4 is a photomicrograph of an alloy outside the scope of the invention.

Figures 5 through 8 are photomicrographs of alloys according to the invention.

Referring to the figures in detail and particularly referring to Figure 1, there is illustrated a composition diagram for the nickel/titanium/niobium system. The titanium composition may be read on the horizontal axis and the niobium composition may be read on the vertical axis. The nickel composition may be obtained by adding the titanium and niobium compositions and subtracting from 100. All compositions are in atomic percent.

The claimed composition in Figure 1 is generally bounded by area ADEH. The composition for each of the vertices is given in Table 1.

Table 1

	Ti(a/o)	Ni(a/o)	Nb(a/o)
A	48	49.5	2.5
D	37.5	32.5	30
E	33.7	36.3	30
H	45.5	52	2.5

Compositions to the left of AD have an M_s temperature that is too high and compositions to the right of EH have an M_s temperature that is too cold (substantially below liquid nitrogen).

As will become clear hereafter, alloys within area ADEH are very susceptible to having their transformation hysteresis enlarged; however, in those compositions below line AH, the enlargement is too small to be of practical utility.

It has been found that compositions with higher niobium contents above line DE have too little shape memory effect to be of practical utility as will become apparent hereafter.

A particularly preferred composition is circumscribed by area BDEG on Figure 1. The composition for each of the vertices is given in Table 2.

Table 2

	Ti(a/o)	Ni(a/o)	Nb(a/o)
B	47.24	48.26	4.5
D	37.5	32.5	30
E	33.7	36.3	30
G	44.64	50.86	4.5

As before, lines BD and EG provide boundaries for compositions having the proper range of M_s temperatures. Similarly, line DE provides the upper limit of the niobium content.

Line BG now provides the lower boundary for the free-machining alloys such that all alloys within BDEG are free-machining. It is expected that alloys with higher niobium contents above line DE would also be free-machining but are excluded from the alloys according to the invention due to the small shape memory effect present, as mentioned above. The fact that the alloys according to the invention are free-

machining was surprising and totally unexpected.

While not wishing to be held to any particular theory, it is believed that the free – machining character of these alloys is due to the presence of a eutectic phase in addition to the primary shape memory phase. With compositions below BG, the eutectic phase is nonexistent or is present in such small quantities as to be of little use. For alloys of greater niobium content than the line CF, the niobium – rich rather than the

shape memory phase becomes the primary phase, and the machinability of these high niobium content alloys although somewhat improved compared to normal nickel/titanium – based alloys, is not as good as within the range BCFG.

Another particularly preferred composition is that circumscribed by area BCFG on Figure 1. The composition for each of the vertices is given in Table 3.

Lines BC and FG, again, mark the boundaries for acceptably high and low M_s values, respectively. Also, BG delineates the lower limit of machinability.

Table 3

	Ti(a/o)	Ni(a/o)	Nb(a/o)
B	47.24	48.26	4.5
C	41.32	38.68	20
F	38	42	20
G	44.64	50.86	4.5

Now, line CF provides a boundary between compositions having different recovery forces as well as different machinabilities, as just discussed. On Figure 1, those compositions below line CF have a higher recovery force than those compositions above line CF. The import of this will become apparent hereafter.

The most preferred compositions are those in area BCIJ. The bounds of this area are given in Table 4.

Table 4

	Ti(a/o)	Ni(a/o)	Nb(a/o)
B	47.24	48.26	4.5
C	41.32	38.68	20
I	39	41	20
J	45.5	50	4.5

Lines CI and BJ have been drawn to optimize recovery force and machinability. Lines BC and IJ have been drawn to optimize the desired M_s temperatures and the expansion of the transformation hysteresis.

It is believed that the most commercially viable alloys will be located in this area.

The advantages of the invention will become more apparent after reference to the following examples.

Examples I

Commercially pure titanium, carbonyl nickel and niobium were weighed in proportions so as to give the compositions in atomic percent listed in Tables 5 and 6. The total mass for test ingots was about 330 grams. These metals were placed in a water – cooled, copper hearth in the chamber of an electron beam melting furnace. The chamber was evacuated to 10^{-5} Torr (0,133 N/m²) and the charges were melted and alloyed by use of the electron beam.

The resulting ingots were hot swaged and hot rolled in air at approximately 850 °C to produce a strip of approximately 0.025 – in. (0.635 mm thickness. Samples were cut from the strip, descaled and vacuum annealed at 850 °C for 30 minutes and furnace cooled.

In the first group of samples, those listed in Table 5, the M_s for each sample was measured at a load of 10 ksi. (68.95 N/mm²) Where the samples had an M_s less than liquid nitrogen (– 196 °C), the M_s was noted as simply less than – 196 °C. The results are tabulated in Table 5 and plotted on Figure 1. The numbers next to each data point in Figure 1 are the alloy numbers and numbers in parentheses are the M_s values.

Referring now to Figure 1, the reasons for the claimed composition range bounded by area ADEH become more apparent. Thus, it can be seen that compositions to the left of line AD have an M_s of about

30° C or higher. Since this M_s is higher than room temperature, the utility of those alloys to the left of line AD is necessarily limited for coupling, fastener, or similar type applications.

Compositions to the right of line EH have an M_s substantially less than -196°C . Of course, it is conceivable that these alloys may have some utility (e.g., as replacement for the Ni/Ti/Fe cryogenic alloys of Harrison, et al. as noted in the Background of the Invention) but for the instant invention, these compositions will not fulfill the objects of the invention.

Line IJ defines a constant M_s of about -80°C . Compositions to the right of line IJ will have a colder M_s and compositions to the left of line IJ will have a warmer M_s . An M_s of -80°C is an important number since this means that the composition will have acceptable strength at about -55°C (there being a strength minimum at M_s) and thus will meet the previously noted Military Specification.

It should be noted then, that those compositions between lines IJ and BC define the most preferred range based on the M_s temperature.

In the second group of samples, those listed in Table 6, each sample was elongated. After elongation the stress was removed and the strip was heated unrestrained so as to effect recovery of the shape memory alloy. The recovery was monitored and plotted as a function of temperature. When the transformation was complete, the sample was cooled and then reheated so as to complete the measurement of the martensite and austenite transformation temperatures before recovery and after recovery.

Table 5

Alloy No.	Ti	Ni	Nb	*M _s , °C
1	45.5	49.5	5	- 69
2	44	48.5	7.5	-102
3	48	49	3	29
4	47	48	5	28
5	43	46	11	-103
6	43	45	12	- 45
7	47	47	6	48
8	45	45	10	31
9	45	43	12	50
10	45	48.5	6.5	- 95
11	47	46	7	33
12	40	40	20	- 16
13	46	46	8	24
14	44	47	9	- 78
15	41.5	46	12.5	-196
16	44.5	50.5	5	-196
18	40.5	43.5	16	-196
19	42.5	41.5	16	17
20	40	42	18	- 92
21	39	43	18	-196
22	39	44	17	-196
23	41	41	18	- 13
24	41.5	43.5	15	- 78
26	40	39	21	9
27	43	48	9	-196
28	44	39	17	30
29	37	41	22	-196
30	39	39	22	- 16
31	40	36	24	30
32	38	38	24	- 25
33	39	35	26	33
34	44	49.5	6.5	-196
35	46	51	3	-196
36	38	34	28	31
37	36	36	28	- 23
38	37	33	30	27
39	38	40	22	-105
40	37	39	24	-110
41	37	37	26	- 11
42	35	30	30	- 38
43	36	38	26	-120

* = M_s measured at 10 ksi load (68.95 N/mm²)

As explained in more detail in our co-pending application, the elongation of the sample will act to expand the transformation hysteresis such that the austenite transformation temperatures, A_s and A_f will be temporarily raised to A_s' and A_f'. For the most part, the martensite transformation temperatures, M_s and M_f, will remain essentially constant. The measure A_s' minus M_s defines an operating range. That is, the M_s value will be indicative of the lower temperature limit of functionality of the sample and A_s' is indicative of the highest temperature the sample may be exposed to before the sample will transform to austenite. After the sample transforms to austenite, the hysteresis will shrink to A_s - M_s. Thus, A_s' - M_s is a useful indicator of the expansion of the hysteresis. For the purposes of this application, A_s' - M_s will also be useful in

indicating the preconditionability of each composition wherein the transformation hysteresis can be temporarily expanded prior to use.

The results are tabulated in Table 6 and plotted on Figure 2. It must be noted that the M_s values in Table 6 were either measured at zero load or were measured at higher loads and then extrapolated to zero load.

Line AH at the bottom of Figure 2 was determined to be the dividing line between those compositions having practical preconditionability and those compositions not having practical preconditionability. The preconditionability number ($A_s' - M_s$) is the top number in parentheses at each data point and M_s is the bottom number. The other number at each data point is the alloy number. The preconditionability does not substantially change until about 2.5% niobium (line AH). Compositions to the left of line AD and above 2.5% niobium have a preconditionability of less than about 100 °C and are unsuitable, in any event, since they have an M_s that is too warm. Compositions to the right of line AD and above 2.5% niobium have a preconditionability over about 100 °C.

Table 6

Alloy No.	Ti	Ni	Nb	$A_s' - M_s$, °C	M_s , °C*
Binary	50	50	0	61	42
44	48.5	49.5	2	75	44
45	48.75	49.75	1.5	78	37
46	44	46	10	145	- 48
1	45.5	49.5	5	145	- 91
2	44	48.5	7.5	227	- 214
3	48	49	3	94	23
6	43	45	12	163	- 55
8	45	45	10	109	18
47	46	50	4	108	30
48	43	47	10	263	- 226
14	44	47	9	169	- 91
49	45	47.5	7.5	163	- 54
20	40	42	18	224	- 56
24	41.5	43.5	15	182	- 56
50	47	50	3	112	- 65

* M_s at zero load.

In general, preconditionability will increase from low niobium content toward higher niobium content for any given constant M_s value. For example, composition 24 (15% niobium) is more preconditionable than composition 6 (12% niobium), even though both have a similar M_s .

Also, in general, preconditionability will increase with decreasing titanium content for any given niobium content. Thus, comparing compositions 8, 46, and 48, all of which have a niobium content of 10 atomic percent, the preconditionability increases from 109 to 263 while titanium content decreases from 45 to 43 atomic percent.

A third group of samples was examined to determine their microstructure. The compositions of the samples examined are listed below in Table 7 and plotted on Figure 3.

Alloys to the left of line BD contain a third, coarse phase in addition to the primary (shape memory) phase and the eutectic. The eutectic structure, if present, tends to be rather coarse, too. In this regard, see Figure 4 (alloy 51).

Table 7

Alloy No.	Ti	Ni	Nb
35	46	51	3
51	49	43	8
30	39	39	22
14	44	47	9
21	39	43	18

Alloys below line BG, exemplified by alloy 35, contain very small amounts of eutectic, usually less than about 5 volume percent. The microstructure can be seen in Figure 5.

Those alloys having a niobium content above line CF, such as alloy 30, contain primarily the eutectic plus a second phase consisting of almost pure niobium (see Figure 6).

The area within BCFG in Figure 3 is exemplified by alloy 14 and alloy 21. The microstructures can be seen in Figures 7 and 8, respectively. The microstructure is characterized by the primary (shape-memory) phase in the form of dendrites plus an interdendritic eutectic network. The eutectic appears to consist of the primary phase plus essentially pure niobium. During working the eutectic network is broken up and the alloy becomes more homogeneous on a microscopic scale. Generally speaking, the volume fraction of eutectic increases with increasing niobium. Compare alloy 14 (Figure 7) with alloy 21 (Figure 8). For a given niobium content, the eutectic appears to coarsen with increasing titanium content. By way of example, alloy 14 has a very fine eutectic.

The presence of the eutectic results in a very fine-grained two-phase microstructure after hot working. Alloys with this microstructure have excellent formability and, for example, may be cold worked at room temperature. By way of illustration, an alloy having the nominal composition of 44 atomic percent titanium, 47 atomic percent nickel, and 9 atomic percent niobium, (the above alloy 14) was cold drawn to 0.025-inch (0,635mm) diameter wire from 0.5-inch (12,7mm) bar with interpass anneals at 850°C. The same alloy could also be hot rolled to form sheet which could then be cold rolled as a finishing operation.

Unexpectedly, it has been found that the alloys having enhanced machinability are located within area BDEG, the area having the greatest amount of the eutectic composition. Even more unexpectedly, the alloys within area BCFG have greatly enhanced machinability for reasons which will become apparent shortly. Generally, it has been found that machinability increases with increasing eutectic.

Again, while not wishing to be held to any particular theory, it is believed that the eutectic in area BCFG is presented as a phase with different mechanical properties much the same way as a free-machining steel or brass. It was found that when the volume percent of eutectic was 5% or greater, improved machinability was observed. With the eutectic less than about 5 volume percent, the desired effect was not observed. In area CDEF, the eutectic is presented as the major constituent, which has better machinability than the primary shape memory phase (as found, e.g., in normal nickel/titanium-based alloys), but not as good as where it surrounds the primary shape memory phase as in area BCFG.

A further manifestation of the improved machinability was a decrease in observed tool wear. A given tool was found to machine more parts before its replacement became necessary.

Example II

Samples were prepared in the same manner as those in Examples I. Each sample was deformed 14% (except where noted), unloaded, heated, and then allowed to freely recover 3%. Each sample was then restrained (strain rate set at zero) so as to build up a stress, which was then measured.

The purpose of this test was to simulate the behavior of a coupling. The 3% free recovery was for the purpose of demonstrating the taking up of tolerances. After the 3% free recovery, the coupling would come up against the substrate (the pipe) which would act as a virtually immovable object. At this point, the coupling would continue to attempt to recover, thereby building up to a maximum stress. The maximum stress (σ_{max}) measured is a reliable indicator of the recovery force of the coupling.

The results are tabulated in Table 8.

Table 8

Alloy No.	Ti(a/o)	Ni(a/o)	Nb(a/o)	$\sigma_{\max}$, ksi
6	43	45	12	52.5
24	41.5	43.5	15	51.8
50	47	50	3	41.7
27	43	48	9	66.9
30	39	39	22	18
36*	38	34	28	—
37	36	36	28	19
38 ⁺	37	33	30	0

*deformed, 11%; sample broke

⁺deformed 12%; free recovery less than 3% (1ksi = 6.89 N/mm²)

The first four samples are located below line CF. The last four samples are above line CF. The comparison of the two sets of samples is most revealing.

Compositions above line CF clearly have less recovery force than those below line CF. Thus, it is expected that the latter compositions will have somewhat greater utility than the former compositions. It should be understood, however, that compositions above line CF (but below line DE) will still have practical utility and will also satisfy the objects of the invention.

Alloy 38 is on the border between the alloys according to the invention and the alloys not within the scope of the invention. The reason for this demarcation can be explained as follows. It is noted that alloy 38 had zero recovery force. This result is due to the fact that the shape memory effect in this particular composition (as well as other compositions having greater than about 30 percent niobium) is so small that there was not enough shape memory recovery to take up the 3 percent simulated tolerance. The small shape memory effect is due, it is believed, to the reduced volume fraction present of the shape memory phase. Accordingly, it is believed that compositions beyond line DE will have little practical utility.

Example III

It has been found that the properties of the alloys according to the invention can be influenced to varying degrees by processing. As will become apparent hereafter, the properties of any particular alloy can be tailored to fit a particular set of requirements by application of the following preferred processing methods.

It is known that processing such as cold working plus warm annealing or warm working plus warm annealing can be used to influence and control the properties of nickel/titanium-based shape memory alloys. In this regard, the disclosure of Serial No. 553,005 (filed November 15, 1983) which served to establish a priority date for the purposes of EP-A 143580 is relevant. These methods can also be applied to the alloys according to the invention and, in fact, result in properties that are distinctly different from the conventional hot working plus hot annealing processing method.

In a first group of samples, the zero load M_s temperature was determined as a function of processing temperature for an alloy consisting essentially of 44 atomic percent titanium, 47 atomic percent nickel, and 9 atomic percent niobium. Three of the samples were warm worked and warm annealed at temperatures ranging from 400–600 °C and three of the samples were hot worked at temperatures between 850 and 900 °C and then hot annealed at temperatures between 850 and 1050 °C. The results are tabulated in Table 9.

Table 9

Sample No.	Working Temperature °C	Annealing Temperature	M _s , °C*
1	400	400	-218
2	500	500	-184
3	600	600	-170
4	850 - 900	850	-94
5	850 - 900	950	-70
6	850 - 900	1050	-62

*extrapolated to zero load

Thus, it can be seen that thermo-mechanical processing can be applied to these alloys to control the temperature of transformation.

In the above samples 2 through 6, the intrinsic width of the transformation hysteresis (defined as A_f minus M_s) was determined at zero load as a function of the processing temperature. The results are tabulated in Table 10.

Table 10

Sample No.	Working Temperature °C	Annealing Temperature °C	A _f - M _s , °C (zero load)
2	500	500	44
3	600	600	66
4	850 - 900	850	45
5	850 - 900	950	40
6	850 - 900	1050	47

It should be noted that these samples were not pre-conditioned as previously described. From Table 10, it can be seen that the intrinsic width of the hysteresis appears to be optimized by warm working plus warm annealing at 600 °C.

Furthermore, preconditionability is also improved by warm working and warm annealing. Rings of the above alloy were enlarged 16% at -50 °C after warm working/warm annealing at 600 °C or hot working/hot annealing at 850 °C. The rings were heated and allowed to freely recover so that A_s' could be measured. The warm worked/warm annealed ring had an A_s' of 40 °C. From Table 9, M_s was -170 °C. Therefore A_s' - M_s is 210 °C. Similarly, the hot worked/hot annealed ring had an A_s' of 52 °C and an M_s of -94 °C so that A_s' - M_s is 146 °C. Thus, the operating range of the alloy, A_s' - M_s, has been increased by 64 °C by optimizing processing conditions.

The effect of processing upon austenitic yield strengths was studied. In this case, two samples were made from an alloy consisting essentially of 45 atomic percent Ti, 47 atomic percent nickel, and 8 atomic percent niobium. One sample was hot worked and hot annealed (for 30 minutes) at 850 °C and the other was warm worked and warm annealed (for 30 minutes) at 500 °C. The M_s at 10 ksi (68,95 N/mm²) and the austenitic yield strengths were measured. The hot worked/hot annealed sample had an M_s of -5 °C and an austenitic yield strength of 82 ksi. (565,4 N/mm²) The warm worked/warm annealed sample had an M_s of -47 °C and an austenitic yield strength of 96 ksi. (661,9 N/mm²)

Thus, processing can be used to control the strength, as well as the transformation temperature, of the disclosed alloys.

In another group of samples, the effect of cold working/warm annealing versus hot working/hot annealing was studied. The samples were made from an alloy consisting essentially of 46 atomic percent nickel, 46 atomic percent titanium, and 8 atomic percent niobium. One sample had a 10 ksi M_s of 24 °C after hot working and hot annealing at 850 °C. Another sample had a 10 ksi M_s of 3 °C after cold rolling and then warm annealing at 500 °C. The room temperature austenitic yield strength was raised from 78 ksi (537,8 N/mm²) hot worked/hot annealed) to 132 ksi (910,11 N/mm²) by cold rolling and warm annealing.

Thus, cold working combined with an appropriate annealing temperature can also be used to control the strength and transformation temperature of the disclosed alloys.

It has also been found that heat treatment alone can affect the transformation temperature. The results are tabulated in Table 11.

Table 11

Alloy (a/o)	M _s at 30 ksi (206,84 N/mm ²), [° C:]	
	850 anneal + water quench	850 anneal water quench + 2 hr @ 400 ° C
44 Ti / 48.5 Ni / 7.5 Nb	-108	-115
43 Ti / 47 Ni / 10 Nb	-93	-128
44 Ti / 47 Ni / 9 Nb	-43	-20

Thus, depending upon composition, M_s can be either raised or lowered by heat treatment.

Claims

1. The use of niobium in a nickel-titanium shape memory alloy to widen the transformation hysteresis (As' - Ms) of the strained alloy to more than 100 ° C, (preferably more than 125 ° C), the alloy consisting essentially of nickel, titanium and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 (preferably 4.5) atomic percent niobium; its second vertex at 37.5 atomic percent titanium, 32.5 atomic percent nickel, and 30 (preferably 20) atomic percent niobium; its third vertex at 33.7 atomic percent titanium, 36.3 atomic percent nickel, and 30 (preferably 20) atomic percent niobium; and its fourth vertex at 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 (preferably 4.5) atomic percent niobium.
2. A shape memory alloy which consists essentially of nickel, titanium, and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 atomic percent niobium; its second vertex at 41.32 atomic percent titanium, 38.68 atomic percent nickel, and 20 atomic percent niobium; its third vertex at 38 atomic percent titanium, 42 atomic percent nickel, and 20 atomic percent niobium; and its fourth vertex at 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 atomic percent niobium.
3. A shape memory alloy which consists essentially of nickel, titanium and niobium within an area defined on a nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 48 atomic percent titanium, 49.5 atomic percent nickel, and 2.5 atomic percent niobium; its second vertex at 37.5 atomic percent titanium, 32.5 atomic percent nickel, and 30 atomic percent niobium; its third vertex at 33.7 atomic percent titanium, 36.3 atomic percent nickel, and 30 atomic percent niobium; and its fourth vertex 45.5 atomic percent titanium, 52 atomic percent nickel, and 2.5 atomic percent niobium, the alloy having been deformed to impart non-recoverable (at the deformation temperature) strain thereto, as a result of which the strained alloy has a transformation hysteresis (As' - Ms) of at least 100 ° C.
4. An alloy according to claim 3, containing not more than 20 atomic percent of niobium.
5. An alloy according to any of claims 2 to 4 containing at least 4.5 atomic percent niobium.
6. A shape memory alloy according to claim 2 or 3, within an area defined on the said nickel, titanium, and niobium pseudo-binary phase diagram by a quadrilateral with its first vertex at 47.24 atomic percent titanium, 48.26 atomic percent nickel, and 4.5 atomic percent niobium; its second vertex at 41.32 atomic percent titanium, 38.68 atomic percent nickel, and 20 atomic percent niobium; its third vertex at 39 atomic percent titanium, 41 atomic percent nickel, and 20 atomic percent niobium; and its fourth vertex at 45.5 atomic percent titanium, 50 atomic percent nickel, and 4.5 atomic percent niobium.
7. An alloy according to any of claims 2 to 6, having Ms not less than -80 ° C.

8. A method of making a nickel-titanium shape memory alloy characterised by (a) the addition of from 2.5 (preferably 4.5) to 30 (preferably 20) atomic percent of niobium to result in a composition according to claim 3 for the purpose of enabling the martensite/austenite transformation hysteresis of the alloy to be widenable to at least 100 °C by straining the alloy, and by (b) the deformation of the alloy to impart non-recoverable (at the deformation temperature) strain thereto, thereby widening the hysteresis to at least 100 °C.
9. An article formed from an alloy according to any of claims 2 to 7.
10. A strip, bar, wire, sheet, or hollow sleeve formed from an alloy according to any of claims 2 to 7.
11. A pipe-coupling, electrical connector or switch incorporating an article according to claim 9 or 10.

Patentansprüche

1. Verwendung von Niob in einer Nickel-Titan-Legierung mit Formgedächtnis, um die Umwandlungshysteresis (As'-Ms) der gedehnten Legierung auf mehr als 100 °C (bevorzugt mehr als 125 °C) auszudehnen, wobei die Legierung im wesentlichen aus Nickel, Titan und Niob innerhalb eines Bereichs besteht, der in einem quasibinären Nickel-Titan-Niob-Phasendiagramm definiert ist durch ein Viereck mit seinem ersten Scheitel bei 48 Atom-% Titan, 49,5 Atom-% Nickel und 2,5 (bevorzugt 4,5) Atom-% Niob; seinem zweiten Scheitel bei 37,5 Atom-% Titan, 32,5 Atom-% Nickel und 30 (bevorzugt 20) Atom-% Niob; seinem dritten Scheitel bei 33,7 Atom-% Titan, 36,3 Atom-% Nickel und 30 (bevorzugt 20) Atom-% Niob; und seinem vierten Scheitel bei 45,5 Atom-% Titan, 52 Atom-% Nickel und 2,5 (bevorzugt 4,5) Atom-% Niob.
2. Legierung mit Formgedächtnis, die im wesentlichen aus Nickel, Titan und Niob innerhalb eines Bereichs besteht, der in einem quasibinären Nickel-Titan-Niob-Phasendiagramm definiert ist durch ein Viereck mit seinem ersten Scheitel bei 48 Atom-% Titan, 49,5 Atom-% Nickel und 2,5 Atom-% Niob; seinem zweiten Scheitel bei 41,32 Atom-% Titan, 38,68 Atom-% Nickel und 20 Atom-% Niob; seinem dritten Scheitel bei 38 Atom-% Titan, 42 Atom-% Nickel und 20 Atom-% Niob; und seinem vierten Scheitel bei 45,5 Atom-% Titan, 52 Atom-% Nickel und 2,5 Atom-% Niob.
3. Legierung mit Formgedächtnis, die im wesentlichen aus Nickel, Titan und Niob innerhalb eines Bereichs besteht, der in einem quasibinären Nickel-Titan-Niob-Phasendiagramm definiert ist durch ein Viereck mit seinem ersten Scheitel bei 48 Atom-% Titan, 49,5 Atom-% Nickel und 2,5 Atom-% Niob; seinem zweiten Scheitel bei 37,5 Atom-% Titan, 32,5 Atom-% Nickel und 30 Atom-% Niob; seinem dritten Scheitel bei 33,7 Atom-% Titan, 36,3 Atom-% Nickel und 30 Atom-% Niob; und seinem vierten Scheitel bei 45,5 Atom-% Titan, 52 Atom-% Nickel und 2,5 Atom-% Niob, wobei die Legierung deformiert worden ist, um ihr eine (bei der Deformierungstemperatur) nichtrückstellbare Dehnung zu erteilen, aufgrund deren die gedehnte Legierung eine Umwandlungshysteresis (As'-Ms) von wenigstens 100 °C hat.
4. Legierung nach Anspruch 3, die nicht mehr als 20 Atom-% Niob enthält.
5. Legierung nach einem der Ansprüche 2 bis 4, die wenigstens 4,5 Atom-% Niob enthält.
6. Legierung mit Formgedächtnis nach Anspruch 2 oder 3 innerhalb eines Bereichs, der in dem genannten quasibinären Nickel-Titan-Niob-Phasendiagramm definiert ist durch ein Viereck mit seinem ersten Scheitel bei 47,24 Atom-% Titan, 48,26 Atom-% Nickel und 4,5 Atom-% Niob; seinem zweiten Scheitel bei 41,32 Atom-% Titan, 38,68 Atom-% Nickel und 20 Atom-% Niob; seinem dritten Scheitel bei 39 Atom-% Titan, 41 Atom-% Nickel und 20 Atom-% Niob; und seinem vierten Scheitel bei 45,5 Atom-% Titan, 50 Atom-% Nickel und 4,5 Atom-% Niob.
7. Legierung nach einem der Ansprüche 2 bis 6 mit Ms nicht weniger als -80 °C.
8. Verfahren zum Herstellen einer Nickel-Titan-Legierung mit Formgedächtnis, gekennzeichnet durch (a) die Zugabe von 2,5 (bevorzugt 4,5) bis 30 (bevorzugt 20) Atom-% Niob, um eine Zusammensetzung nach Anspruch 3 zu erhalten zu dem Zweck, es der Martensit/Austenit-Umwandlungshysteresis

der Legierung zu ermöglichen, durch Dehnung der Legierung auf wenigstens 100 °C ausdehnbar zu sein, und durch (b) das Deformieren der Legierung, um ihr eine (bei der Deformierungstemperatur) nichtrückstellbare Dehnung zu erteilen, wodurch die Hysterese auf wenigstens 100 °C ausgedehnt wird.

9. Gegenstand, der aus einer Legierung nach einem der Ansprüche 2 bis 7 gebildet ist.
10. Band, Stab, Draht, Flächenkörper oder hohle Hülse, die aus einer Legierung nach einem der Ansprüche 2 bis 7 gebildet sind.
11. Rohrkupplung, elektrischer Verbinder oder Schalter, die einen Gegenstand nach Anspruch 9 oder 10 aufweisen.

Revendications

1. Utilisation de niobium dans un alliage nickel-titane à mémoire de forme pour élargir l'hystérésis de transformation ($As' - Ms$) de l'alliage déformé à plus de 100 °C (de préférence plus de 125 °C), alliage consistant essentiellement en nickel, titane et niobium dans une surface définie sur un diagramme de phases pseudo-binaire de nickel, titane et niobium par un quadrilatère ayant son premier sommet à 48 pour cent atomiques de titane, 49,5 pour cent atomiques de nickel et 2,5 (de préférence 4,5) pour cent atomiques de niobium ; son deuxième sommet à 37,5 pour cent atomiques de titane, 32,5 pour cent atomiques de nickel et 30 (de préférence 20) pour cent atomiques de niobium ; son troisième sommet à 33,7 pour cent atomiques de titane, 36,3 pour cent atomiques de nickel et 30 (de préférence 20) pour cent atomiques de niobium ; et son quatrième sommet à 45,5 pour cent atomiques de titane, 52 pour cent atomiques de nickel et 2,5 (de préférence 4,5) pour cent atomiques de niobium.
2. Alliage à mémoire de forme qui consiste essentiellement en nickel, titane et niobium dans une surface définie sur un diagramme de phases pseudo-binaire de nickel, titane et niobium par un quadrilatère ayant son premier sommet à 48 pour cent atomiques de titane, 49,5 pour cent atomiques de nickel et 2,5 pour cent atomiques de niobium ; son deuxième sommet à 41,32 pour cent atomiques de titane, 38,68 pour cent atomiques de nickel et 20 pour cent atomiques de niobium ; son troisième sommet à 38 pour cent atomiques de titane, 42 pour cent atomiques de nickel et 20 pour cent atomiques de niobium ; et son quatrième sommet à 45,5 pour cent atomiques de titane, 52 pour cent atomiques de nickel et 2,5 pour cent atomiques de niobium.
3. Alliage à mémoire de forme qui consiste essentiellement en nickel, titane et niobium dans une surface définie sur un diagramme de phases pseudo-binaire de nickel, titane et niobium par un quadrilatère ayant son premier sommet à 48 pour cent atomiques de titane, 49,5 pour cent atomiques de nickel et 2,5 pour cent atomiques de niobium ; son deuxième sommet à 37,5 pour cent atomiques de titane, 32,5 pour cent atomiques de nickel et 30 pour cent atomiques de niobium ; son troisième sommet à 33,7 pour cent atomiques de titane, 36,3 pour cent atomiques de nickel et 30 pour cent atomiques de niobium ; et son quatrième sommet à 45,5 pour cent atomiques de titane, 52 pour cent atomiques de nickel et 2,5 pour cent atomiques de niobium, alliage ayant été déformé de manière à lui conférer une déformation non apte à reprise dimensionnelle (à la température de déformation), en résultat de laquelle l'alliage déformé possède une hystérésis de transformation ($As' - Ms$) d'au moins 100 °C.
4. Alliage suivant la revendication 3, ne contenant pas plus de 20 pour cent atomiques de niobium.
5. Alliage suivant l'une quelconque des revendications 2 à 4, contenant au moins 4,5 pour cent atomiques de niobium.
6. Alliage à mémoire de forme suivant la revendication 2 ou 3, dans une surface définie sur le diagramme de phases pseudo-binaire de nickel, titane et niobium par un quadrilatère ayant son premier sommet à 47,24 pour cent atomiques de titane, 48,26 pour cent atomiques de nickel et 4,5 pour cent atomiques de niobium ; son deuxième sommet à 41,32 pour cent atomiques de titane, 38,68 pour cent atomiques de nickel et 20 pour cent atomiques de niobium ; son troisième sommet à 39 pour cent atomiques de titane, 41 pour cent atomiques de nickel et 20 pour cent atomiques de niobium ; et son quatrième sommet à 45,5 pour cent atomiques de titane, 50 pour cent atomiques de nickel et 4,5 pour cent

atomiques de niobium.

7. Alliage suivant l'une quelconque des revendications 2 à 6, ayant une valeur de M_s non inférieure à -80°C .

5

8. Procédé de production d'un alliage nickeltitane à mémoire de forme caractérisé par (a) l'addition de 2,5 (de préférence 4,5) à 30 (de préférence 20) pour cent atomiques de niobium pour obtenir une composition suivant la revendication 3 afin de permettre à l'hystérésis de transformation martensite/austénite de l'alliage d'être élargie à au moins 100°C par déformation de l'alliage, et (b) par la déformation de l'alliage pour conférer à cet alliage une déformation non apte à reprise dimensionnelle (à la température de déformation), ce qui permet d'élargir l'hystérésis à au moins 100°C .

10

9. Pièce formée à partir d'un alliage suivant l'une quelconque des revendications 2 à 7.

15

10. Feuillard, barre, fil, tôle ou manchon creux formé à partir d'un alliage suivant l'une quelconque des revendications 2 à 7.

11. Raccord de conduits, connecteur électrique ou commutateur renfermant une pièce suivant la revendication 9 ou 10.

20

25

30

35

40

45

50

55

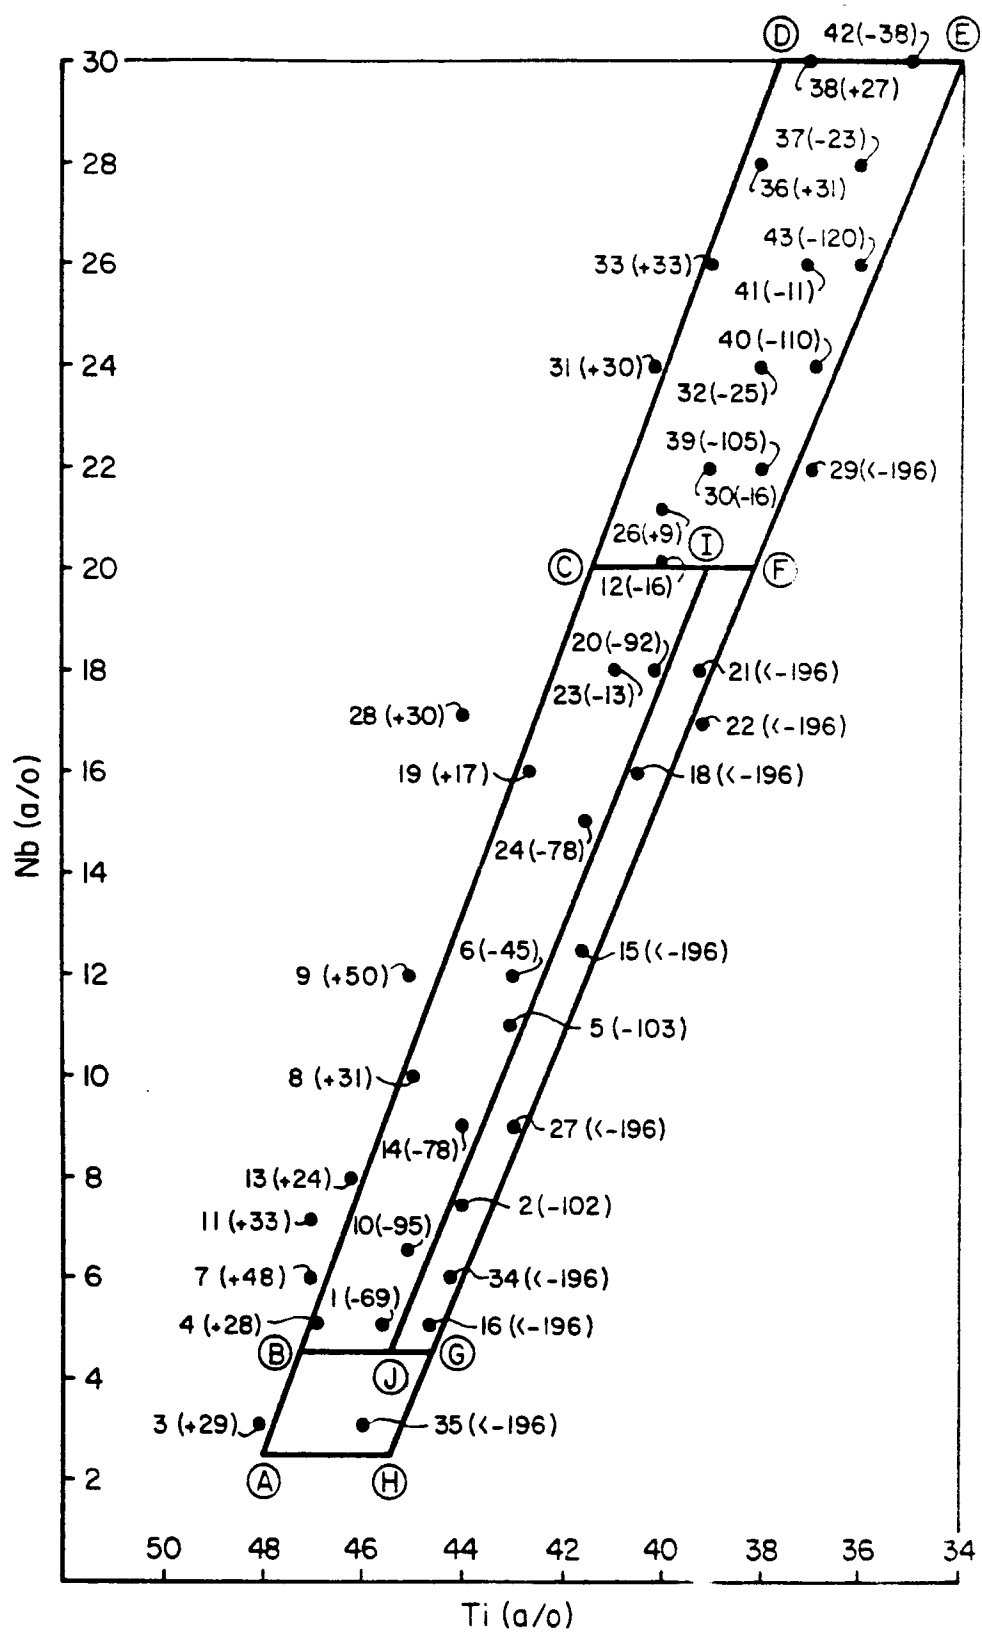
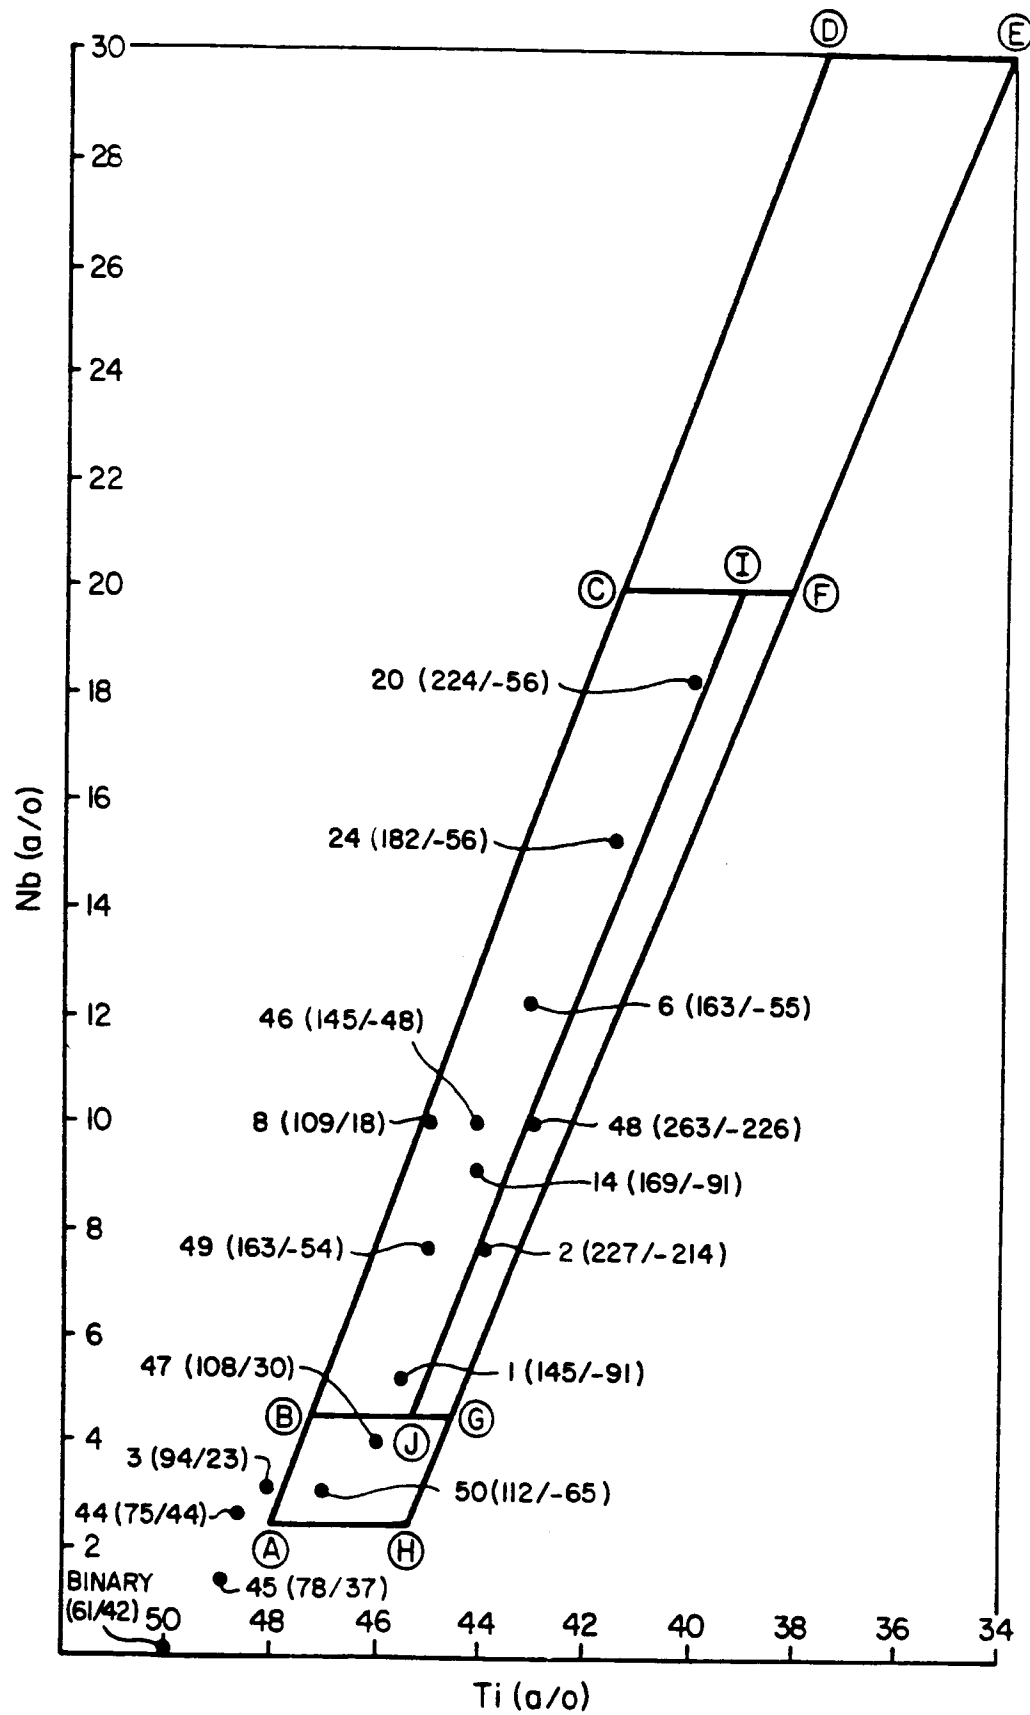
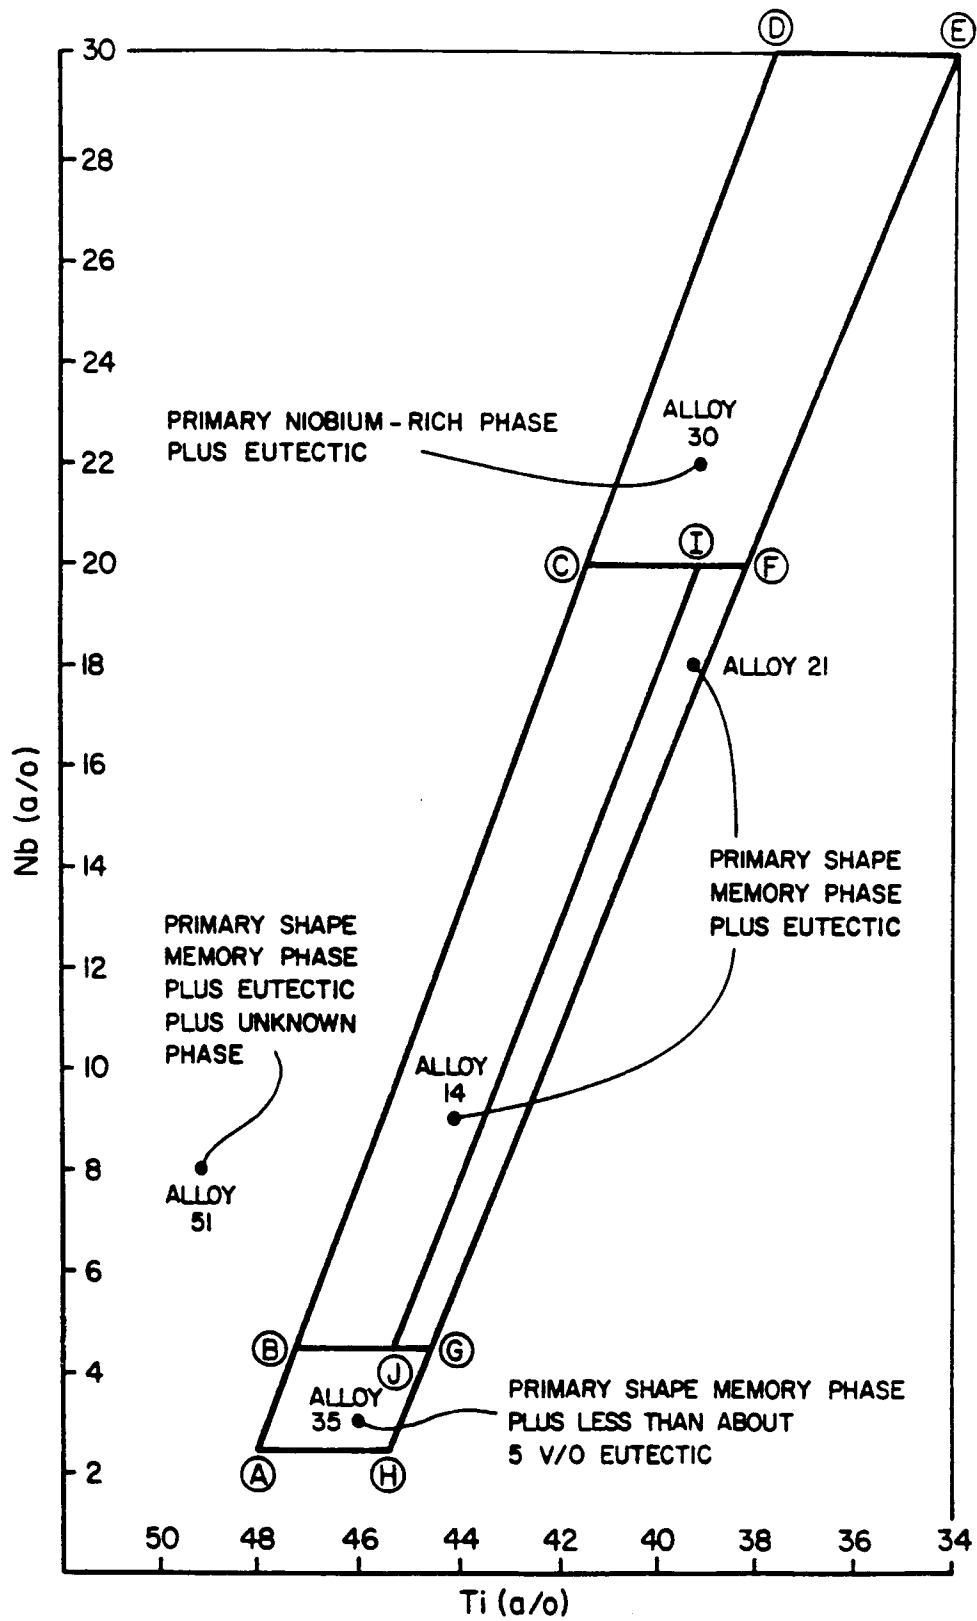


FIG. 1



FIG_2



FIG_3

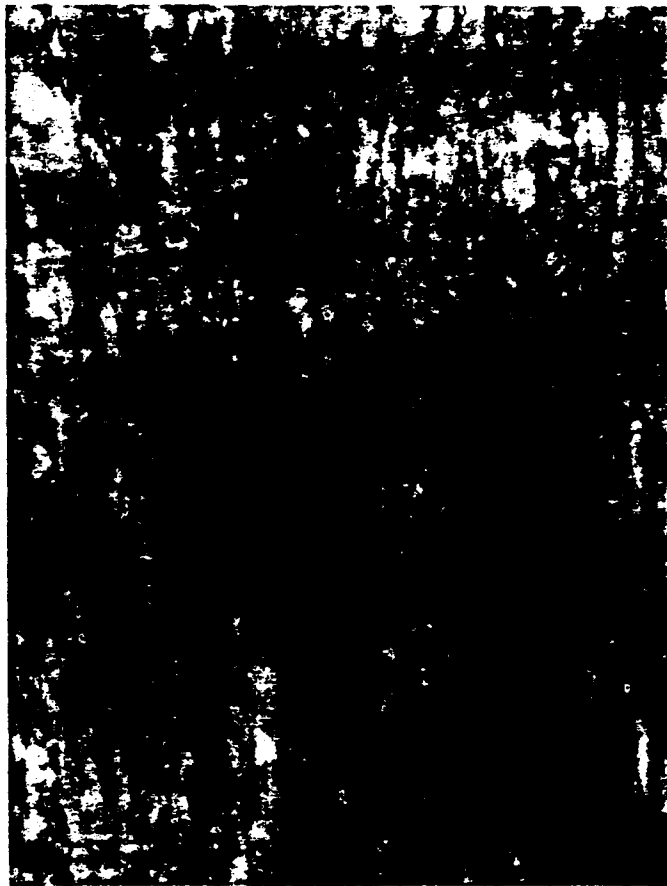


Figure 4

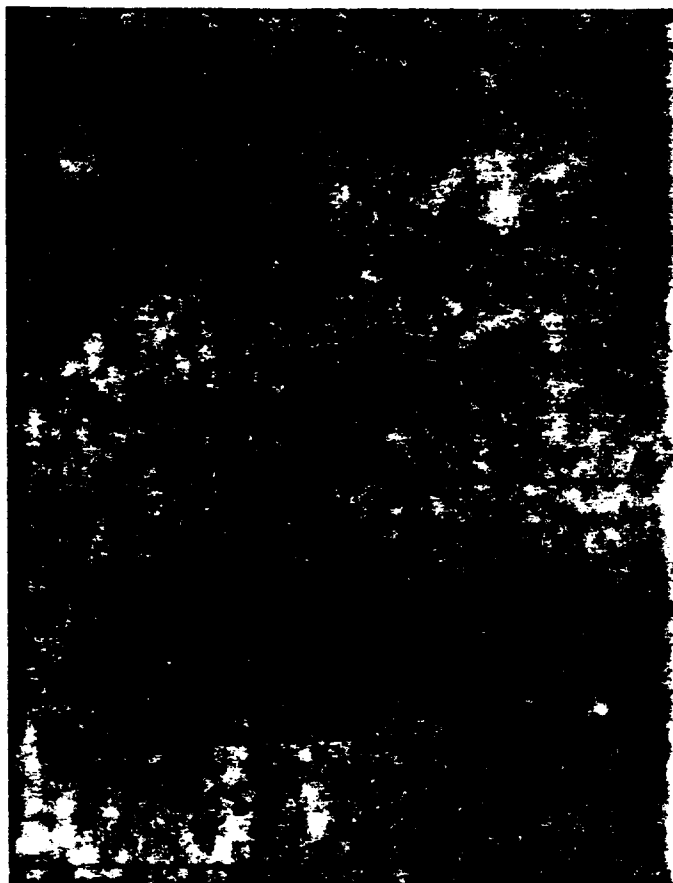


Figure 5



Figure 6



Figure 7



Figure 8