

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 January 2011 (27.01.2011)

PCT

(10) International Publication Number  
**WO 2011/010138 A1**

(51) International Patent Classification:  
A47L 9/12 (2006.01)

(21) International Application Number:  
PCT/GB2010/051184

(22) International Filing Date:  
20 July 2010 (20.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0912936.2 24 July 2009 (24.07.2009) GB

(71) Applicant (for all designated States except US): **DYSON TECHNOLOGY LIMITED** [GB/GB]; Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HORNE, Lucas** [GB/GB]; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(74) Agents: **MACPHERSON, Carolyn** et al.; Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN ELECTROSTATIC FILTER

FIG. 8a

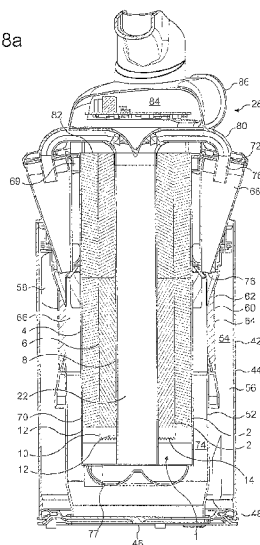

(57) Abstract: The present invention relates to an electrostatic filter. Particularly but not exclusively the invention relates to an electrostatic filter for removing dust particles, for example an electrostatic filter for use in a vacuum cleaner, fan or air conditioner. The electrostatic filter comprises a filter medium located between a first and a second electrode, each at a different voltage during use, such that a potential difference is formed across the filter medium, wherein a property of the filter medium varies along the length of the filter medium.

WO 2011/010138 A1

## AN ELECTROSTATIC FILTER

The present invention relates to an electrostatic filter. Particularly, but not exclusively the invention relates to an electrostatic filter for removing dust particles from an airstream, for example an electrostatic filter for use in a vacuum cleaner, fan or air conditioner.

It is well known to separate particles, such as dirt and dust particles from a fluid flow using mechanical filters, such as foam filters, cyclonic separators and electrostatic separators where dust particles are charged and then attracted to another oppositely charged surface for collection.

Known cyclonic separating apparatus include those used in vacuum cleaners. Such cyclonic separating apparatus are known to comprise a low efficiency cyclone for separating relatively large particles and a high efficiency cyclone located downstream of the low efficiency cyclone for separating the fine particles which remain entrained within the airflow (see, for example, EP 0 042 723B).

Known electrostatic filters include frictional electrostatic filters and electret medium filters. Examples of such filters are described in EP0815788, US7179314 and US6482252.

Such electrostatic filters are relatively cheap to produce but suffer from the disadvantage that their charge dissipates over time resulting in a reduction of their electrostatic properties. This in turn reduces the amount of dust the electrostatic filter can collect which may shorten the life of both the electrostatic filter itself and any further downstream filters.

Known electrostatic filters also include filters where dust particles in an airstream are charged in some way and then passed over or around a charged collector electrode for collection. An example of such a filter is described in JP2007296305 where dust particles in an airstream are charged as they pass a "corona discharge" wire and are then trapped on a conductive filter medium located downstream of the corona discharge wire. A disadvantage with this arrangement is that they are relatively

inefficient, are made from relatively expensive materials and the collector electrodes require constant maintenance in order to keep them free of collected dust. Once the collector electrodes are coated in a layer of dust they are much less efficient.

5 Another example is shown in GB2418163 where the dust particles in an airstream are charged as they pass a corona discharge wire located inside a cyclone. The charged dust particles are then trapped on the walls of the cyclone which are coated in a conductive paint. Whilst this arrangement is compact it suffers from the disadvantage that dust collects on the inside of the cyclones. Not only does this require constant  
10 and difficult maintenance removing dust from the walls of the cyclone, but also any dust trapped inside the cyclone will interfere with the cyclonic airflow decreasing the separation efficiency of the cyclone itself.

Another example is shown in US5593476 where a filter medium is placed between  
15 two permeable electrodes and the airflow is arranged to pass through the electrodes and through the filter media.

It is desirable for the efficiency of an electrostatic filter to be as high as possible (i.e. to separate as high a proportion as possible of very fine dust particles from the  
20 airstream), whilst maintaining a reasonable working life. It is also desirable that the electrostatic filter does not cause too much of a pressure drop across it.

An electrostatic filter which could provide high efficiency along with a long working life would therefore be desirable. In certain applications, for example in domestic  
25 vacuum cleaner applications, it is desirable for the appliance to be made as compact as possible without compromising the performance of the appliance. An electrostatic filter which was simpler in construction allowing easy packaging into an appliance would therefore also be desirable.

30 The invention therefore provides an electrostatic filter comprising a filter medium located between a first and a second electrode, each at a different voltage during use, such that a potential difference is formed across the filter medium, wherein a property of the filter medium varies along the length of the filter medium.

The property which varies may be the average pore size/diameter, the pores per inch, the electrical resistivity and/or the type of filter medium. As used herein the terms “pore size” and “pore diameter” are interchangeable. A method for measuring the average pore size/diameter and calculating the pores per inch is given in the specific  
5 description.

For example the average pore size or the number of pores per inch may decrease or increase in a downstream direction. Such a change in average pore size or number of pores per inch may be a gradual change which occurs in a single filter or a plurality of  
10 sections of filter medium may be brought together to form a filter medium which has a varying average pore size or number of pores per inch across its length. For example, two, three, four or more sections of filter media may be used in the electrostatic filter. Again the average pore size or number of pores per inch may decrease or increase in a downstream direction, or alternatively it may vary in another  
15 random or non random way.

Most preferably, the average pore size/diameter of the filter medium decreases in a downstream direction. Preferably the pores per inch may increase in a downstream  
20 direction.

Such an arrangement may be advantageous because, during use, the upstream end of the filter medium will be exposed to the most dust and a larger pore size will be better able to accommodate this dust without restricting airflow through the filter medium. Further downstream, smaller pore sizes will trap any smaller dust particles which have  
25 passed through the upstream portion of the filter. This arrangement may advantageously help to lower the pressure loss across the electrostatic filter.

The filter medium may be comprised of any suitable material for example glass, polyester, polypropylene, polyurethane or any other suitable plastics material. In a  
30 preferred embodiment the filter medium may comprise an open cell reticulated foam, for example a polyurethane foam. Reticulated foams are formed when the cell windows within the foam are removed to create a completely open cell network. This type of filter medium is particularly advantageous as the foam may hold its structure

in an airflow. The polyurethane foam may be derived from either polyester or polyether.

The filter medium or a section of it may have 3, or 5, or 6, or 8 or, 10, or 15, or 20, or  
5 25, or 30 to 35, or 40, or 45, or 50, or 55, or 60 pores per inch (PPI) with an average  
pore diameter of from 0.4, or 0.5, or 1, or 1.5, or 2, or 2.5, or 3, or 3.5 to 4, or 4.5, or 5,  
or 5.5, or 6, or 6.5, or 7, or 7.5, or 8, 8.5mm (or 400 microns to 8500 microns). In a  
preferred embodiment the filter medium or a section of it may have from 8 to 30 PPI  
with an average pore diameter of from 1.5 mm to 5mm. In another preferred  
10 embodiment the filter medium or a section of it may have from 3 to 30 PPI with an  
average pore diameter of from 1.5 mm to 8mm. Most preferably the PPI may be from  
3 to 10 PPI. In a preferred embodiment an upstream portion/section of the filter  
medium may have a PPI of 3PPI and a downstream portion/section may have a PPI of  
6PPI. In a preferred embodiment an upstream portion/section of the filter medium  
15 may have an average pore diameter of 7200 microns (7.2mm) and a downstream  
portion/section may have an average pore diameter of 4500 microns (4.5mm).

Preferably the first and second electrodes are substantially non porous. Preferably the  
filter medium has a length and the first and second electrodes are non porous along  
20 the length of the filter medium. In a most preferred embodiment the first and second  
electrodes are non porous along their entire length.

As used herein the term “non porous” shall be taken to mean that the first and second  
electrodes have continuous solid surfaces without perforations, apertures or gaps. In a  
25 preferred embodiment the first and second electrodes are non porous such that during  
use an airflow travels along the length of the electrodes through the filter medium.  
Ideally the airflow does not pass through the first or second electrodes.

Such an arrangement where the air does not have to flow through the electrodes  
30 during use may be advantageous because it may reduce the pressure drop across the  
electrostatic filter. In addition because the electrodes are non porous they have a  
larger surface area than they would if the electrodes were porous. This may improve  
the overall performance of the electrostatic filter.

In a preferred embodiment the filter medium may be an electrically resistive filter medium. As used herein the term “electrically resistive filter medium” shall be taken to mean that the filter medium has a resistivity of from  $1 \times 10^7$  to  $1 \times 10^{13}$  ohm-meters at 22°C. In a most preferred embodiment the filter medium may have a resistivity of  
5 from  $2 \times 10^9$  to  $2 \times 10^{11}$  ohm-meters at 22°C. The electrical resistivity of the filter medium may vary along the length of the filter medium. In a particular embodiment the electrical resistivity may decrease in a downstream direction.

10 This electrostatic filter uses the potential difference formed across the filter medium to collect dust in the filter medium itself rather than on collector electrodes. This arrangement is advantageous over previous electrostatic filters because there are no collector electrodes to clean. This may reduce the need for maintenance and increase the life of the filter due to the dust retention capacity of the filter medium.

15 The potential difference occurs because the electrically resistive filter medium provides a load and therefore only a small current flows through it. However the electric field will disturb the distribution of any positive and negative charges, in the fibres of the electrically resistive filter medium, causing them to align with their respective electrode. This process causes the dust to bond to or settle on the fibres of  
20 the filter medium because dust particles in an airstream passing through the filter will be attracted to respective positive and negative ends of the filter medium. This may help to cause the dust particles to be trapped in the filter medium itself without requiring the dust particles to be captured on a charged electrode.

25 In addition because the electrostatic filter is essentially one component i.e. the filter medium is located between the first and the second electrodes, it may be more compact than previous arrangements and may therefore be packaged more easily. It may also be possible to locate the electrostatic filter in any airstream of an appliance. This may help to allow the filter to be utilised in a domestic vacuum cleaner.

30

In an embodiment the filter medium may be in contact with the first and/or the second electrode. In a preferred embodiment the filter medium may be in contact with the first and/or the second electrode along its entire length, for example such that the filter

medium is sandwiched between the first and second electrodes. Preferably there are no gaps between the filter medium and the first and second electrodes.

5 In a particularly preferred embodiment the first and second electrodes form at least a portion of the walls of an air pathway and the filter medium is in contact with the walls along its full length such that during use an airstream containing dust particles must pass through the filter medium along the air pathway.

10 The electrostatic filter may also further comprise at least one corona discharge means, the filter medium being arranged downstream of the corona discharge means. Adding a corona discharge means advantageously may increase the efficiency of the electrostatic filter. This is because the corona discharge means helps to charge any dust particles in the airstream before they pass through the filter medium thus helping to increase dust particle attraction to the filter medium.

15

In a preferred embodiment the corona discharge means may comprise at least one corona discharge electrode of high curvature and at least one electrode of low curvature. This arrangement may be advantageous as it may generate a large source of ions for charging any dust particles in the airstream. These charged dust particles are then more likely to be filtered out by the filter medium which has the potential difference across it during use.

20

The corona discharge electrode may be in any suitable form as long as it is of a higher curvature than the electrode of low curvature. In other words the corona discharge electrode is preferably of a shape which causes the electric field at its surface to be greater than the electric field at the surface of the electrode of low curvature. Examples of suitable arrangements would be where the corona discharge electrode is one or more wires, points, needles or serrations and the electrode of low curvature is a tube which surrounds them. Alternatively the electrode of low curvature may be a flat plate.

30

In a particular embodiment the corona discharge electrode may be formed from a portion of the first or second electrode. In a preferred embodiment the corona discharge electrode is in the form of one or more points formed from or on a

downstream edge of the first or second electrode. The downstream edge may be either a lower or upper edge of the first or second electrode depending on the orientation of the electrostatic filter and the direction from which air enters the electrostatic filter during use. Ideally the lower or upper edge of the second electrode is serrated to form the corona discharge electrode.

The electrode of low curvature may also be formed from a portion of the first or second electrode. In a particular embodiment the electrode of low curvature is formed from or on a downstream portion of the first or second electrode. Again the downstream portion may be either a lower or upper portion of the first or second electrode depending on the orientation of the electrostatic filter and the direction from which air enters the electrostatic filter during use.

In a preferred embodiment the lower edge of the second electrode is serrated to form the corona discharge electrode and a lower portion of the first electrode forms the electrode of low curvature. In an alternative embodiment the upper edge of the second electrode is serrated to form the corona discharge electrode and an upper portion of the first electrode forms the electrode of low curvature.

These arrangements are advantageous as there is no requirement for separate components forming the corona discharge electrode or the electrode of low curvature.

Preferably the corona discharge electrode and/or the electrode of low curvature may project upstream from an upstream surface of the filter medium. Ideally the discharge electrode and/or the electrode of low curvature may project below a lower surface or above an upper surface of the filter medium. In a particular embodiment the electrode of low curvature projects both upstream and downstream from a lower surface of the corona discharge electrode. This is advantageous because it helps to maximize the volume over which the ionizing field is generated to maximize the opportunity for charging dust particles as they pass through the ionizing field.

In a particular embodiment the first electrode may have a higher voltage than the second electrode. Alternatively the second electrode may have a higher voltage than the first electrode. Ideally the first electrode is at 0Volts or +/-2kV. The second



electrode may have either a higher or a lower voltage than the first electrode. In a preferred embodiment the first electrode has a higher voltage than the second electrode. In a particularly preferred embodiment the first electrode is at 0Volts or +/- 2 kV and the second electrode may be at from +/- 2, or 4, or 5, or 6, or 7, or 8, or 9 to 10, or 11, or 12, or 13, or 15 or 15kV. In a most preferred embodiment the second electrode may be at from -2 or -4 to -10kV.

In an alternative embodiment the corona discharge electrode may be remote from the first and second electrodes. In such an embodiment the corona discharge electrode may be in the form of one or more wires, needles, points or serrations. In such an embodiment the electrode of low curvature may still be formed from a portion of the first or second electrode. In a particular embodiment a portion of the second electrode may form the electrode of low curvature.

In another alternative embodiment the corona discharge means i.e. both the corona discharge electrode and the electrode of low curvature may be located remotely from the first and second electrodes.

The first and second electrodes may be of any suitable shape, for example they may be planar and the filter medium may be sandwiched between the layers. The planer electrodes may be of any suitable shape for example square, rectangular, circular or triangular. The electrodes may be of different sizes.

Alternatively the first and/or the second electrodes may be tubular, for example they may be circular, square, triangular or any other suitable shape in cross section. In a particular embodiment the electrodes may be cylindrical with the filter medium located between the electrode cylinders. In a preferred embodiment the first and second electrodes may be located concentrically with the filter medium located concentrically between them.

The electrostatic filter may also further comprise one or more further electrodes. The one or more further electrodes may also be of any suitable shape for example planar or cylindrical. The one or more further electrodes are preferably non porous.

In an embodiment where the first and second electrodes are cylindrical the electrostatic filter may for example further comprise a third electrode. In such an embodiment the second electrode may be located between the first and the third electrodes. In such an embodiment the second electrode may be located  
5 concentrically between the first electrode and the third electrode. In such an embodiment a further filter medium may be located between the second electrode and the third electrode. Again the second electrode and the third electrode are preferably each at a different voltage during use such that a potential difference is formed across the further filter medium.

10

In a particular embodiment the first electrode and the third electrode may be at the same voltage during use. The second electrode may be either positively or negatively charged. Ideally the second electrode is negatively charged. The first electrode and the third electrode may have either a higher or a lower voltage than the second  
15 electrode. In a preferred embodiment the first electrode and the third electrode may have a higher voltage than the second electrode. In a particularly preferred embodiment the first electrode and the third electrode may be at 0Volts or +/-2 kV and the second electrode may be at +/- 2, or 4 or 10kV. In a most preferred embodiment the second electrode may be at -10kV.

20

In an embodiment the electrostatic filter may comprise a plurality of cylindrical electrodes which are arranged concentrically with respect to each other, wherein a filter medium is positioned between adjacent electrodes and wherein adjacent  
25 electrodes are at different voltages during use such that a potential difference is formed across each of the filter media.

In an alternative embodiment the electrostatic filter may comprise a plurality of planar electrodes which are arranged parallel, or substantially parallel to each other, wherein a filter medium is positioned between adjacent electrodes and wherein adjacent  
30 electrodes are at different voltages during use such that a potential difference is formed across each of the filter media.

The electrodes may be formed from any suitable conductive material. Preferably, the second electrode is formed from a conductive metal sheet of from 0.1mm, or 0.25mm,

or 0.5mm, or 1mm, or 1.5mm, or 2mm to 2.5mm, or 3mm, or 4mm. Ideally the first and/or second and/or third electrode is formed from a conductive metal foil of from 0.1mm, or 0.25mm, or 0.5mm, or 1mm, or 1.5mm, or 2mm to 2.5mm, or 3mm, or 4mm

5

Additionally or alternatively the filter medium may be coated with one or more of the electrodes. For example one or more surfaces of the filter medium may be coated with an electrically conductive layer.

10 A second aspect of the present invention provides a vacuum cleaner comprising an electrostatic filter as described above. In a particular embodiment the vacuum cleaner may comprise an air pathway and a conductive metal foil may coat at least a portion of the air pathway to form the electrodes. In a particular embodiment the air pathway is a non cyclonic air pathway.

15

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

20 Figure 1 is a schematic diagram showing a section through an electrostatic filter according to the present invention;

Figure 2a is a schematic diagram of a section through an electrostatic filter according to the present invention;

25 Figure 2b is a side view of the electrostatic filter shown in Figure 2a;

Figure 3 is a schematic diagram of a section though an electrostatic filter according to the present invention;

30 Figure 4 is a schematic diagram of a section though an electrostatic filter according to the present invention;

Figure 5 is a schematic diagram of a section though an electrostatic filter according to the present invention;

Figure 6 is a schematic diagram of a section through an electrostatic filter according to the present invention;

5 Figure 7 is a schematic diagram of a section through an electrostatic filter according to the present invention;

Figure 8a is a longitudinal section through a cyclonic separating apparatus which incorporates an electrostatic vacuum cleaner according to the present invention;

10

Figure 8b is a horizontal section through the cyclonic separating apparatus shown in Figure 8a;

Figure 9 is a section through a cyclonic separating apparatus which incorporates an electrostatic vacuum cleaner according to the present invention;

15

Figure 10a is a longitudinal section through a cyclonic separating apparatus which incorporates an electrostatic vacuum cleaner according to the present invention;

20 Figure 10 b is a horizontal section through the cyclonic separating apparatus shown in Figure 10a;

Figure 11 is a canister vacuum cleaner incorporating the cyclonic separating apparatus shown in Figures 8, 9 or 10;

25

Figure 12 is an upright vacuum cleaner incorporating the cyclonic separating apparatus shown in Figures 8, 9 or 10;

Figure 13a shows a microscopic picture of the filter medium structure taken through a horizontal section;

30 Figure 13b shows the selection of individual pores for measuring pore diameter; and

Figure 13c shows how to measure the diameter of each pore.

Like reference numerals refer to like parts throughout the specification.

With reference to Figure 1 an electrostatic filter is shown and indicated generally by the reference numeral 1.

5

It can be seen that the electrostatic filter 1 comprises an electrically resistive filter medium 2 sandwiched between and in contact with a first non porous electrode 4 and a second non porous electrode 6. In use the first and second electrodes 4, 6 are each at a different voltage such that a potential difference is formed across the electrically resistive filter medium 2. The first electrode 4 is at 0 Volts and the second electrode 6 is at +/- 4 to 10 kV during use. The electrodes 4, 6 are connected to a high voltage power supply (not shown).

10

The first and second electrodes 4, 6 form at least part of an air pathway which is filled by the electrically resistive filter medium 2 such that in use dust laden air (A) must pass through the electrically resistive filter medium 2 along the length of the first and second electrodes 4,6.. The potential difference generated across the electrically resistive filter medium 2 causes any charged dust particles passing through the electrostatic filter 1 to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus causing the dust particles to be trapped. Dust particles in the dust laden air (A) may be charged before they enter the electrostatic filter 1 by friction as they pass through air passages upstream of the electrostatic filter 1.

15

20

A second embodiment of the electrostatic filter 1 is shown in Figures 2a and 2b. In this embodiment the electrostatic filter 1 further comprises a corona discharge means. The corona discharge means comprises a corona discharge electrode of high curvature 10 and an electrode of low curvature 12. The electrode of low curvature 12 may be a flat surface or a curved surface. In this embodiment the corona discharge electrode 10 is in the form of a serrated lower edge 14 of the second electrode 6 which extends below a lower surface 16 of the electrically resistive filter medium 2 and the electrode of low curvature 12 is an extension of the first electrode 4 which projects below a lower surface 16 of the electrically resistive filter medium 2.

25

30

It is preferable that the electrode of low curvature 12 projects both upstream and downstream of the corona discharge electrode 10. This advantageously maximizes the volume over which the ionizing field is generated.

5 In this embodiment the first and second electrodes 4, 6 together with the corona discharge electrode 10 and the electrode of low curvature 12 form at least part of an air pathway which is partially filled by the electrically resistive filter medium 2 such that in use dust laden air (B) must pass the corona discharge means causing dust particles in the dust laden air (B) to become charged. The dust laden air (B)  
10 containing charged dust particles must then pass through the electrically resistive filter medium 2. The potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them within the electrically resistive filter medium 2. In this embodiment the first electrode 4 is at  
15 0 Volts and the second electrode 6 is at - 4 to 10 kV during use. This also means that the corona discharge electrode 10 is at - 4 to 10kV and the electrode of low curvature 12 is at 0Volts. Again the electrodes 4, 6 are connected to a high voltage power supply (not shown).

20 In an alternative embodiment as shown in Figure 3 the corona discharge electrode 10 may be remote from the first and second electrodes 4, 6. In such an embodiment the corona discharge electrode 10 of the corona discharge means may be in the form of one or more wires, needles, points or serrations. In the embodiment shown in Figure 3 the corona discharge electrode 10 is in the form of a wire 20 and the electrode of low  
25 curvature 12 is the second electrode 6. In this embodiment the corona discharge electrode 10 and the second electrode 6 are preferably at different voltages. For example the corona discharge electrode may be at - 4 to 10 kV and the second electrode 4 which forms the electrode of low curvature 12 may be at 0 Volts. In this embodiment the first electrode 4 may also be at a lower or higher voltage than the  
30 second electrode 6, for example the first electrode 4 may be at + or - 4 to 10 kV.

In this embodiment an air passage is formed at least partially by the second electrode 6. Dust laden air (C) travels through this air passage and the dust particles are charged by the corona discharge means. The dust laden air (C) containing charged dust

particles then passes into the air pathway through the electrically resistive filter medium 2 located between the first electrode 4 and the second electrode 6. Again the potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them inside the electrically resistive filter medium 2.

In another alternative embodiment the entire corona discharge means i.e. both the corona discharge electrode 10 and the electrode of low curvature 12 may be located remotely from the first and second electrodes 4, 6. Such an embodiment can be seen in Figure 4.

This embodiment comprises at least one corona discharge electrode 10 and at least one electrode of low curvature 12 arranged upstream of the first and second electrodes 4, 6. Dust laden air (D) travels through an air passage containing the at least one corona discharge electrode 10 and at least one electrode of low curvature 12 and the dust particles are charged by the corona discharge means. The dust laden air (D) containing the charged dust particles then passes into the air pathway through the electrically resistive filter medium 2 which is located between the first electrode 4 and the second electrode 6. Again the potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them within the electrically resistive filter medium 2.

A further embodiment of the present invention is shown in Figure 5. It can be seen that the electrostatic filter 1 further comprises a third electrode 8. In this embodiment a further electrically resistive filter medium 2 is located between the second electrode 6 and the third electrode 8. The second and third electrodes 6, 8 are preferably each at a different voltage during use such that a potential difference is formed across the further electrically resistive filter medium 2. A second electrode of low curvature 12 extends from the third electrode 8 and projects below a lower surface 16 of the second electrically resistive filter medium 2.

It is preferable that this second electrode of low curvature 12 projects both upstream and downstream of the corona discharge electrode 10. Again this maximizes the volume over which the ionizing field is generated.

5 In this embodiment the first, second and third electrodes 4, 6, 8 together with the corona discharge electrode 10 and the electrodes of low curvature 12 form at least part of an air pathway which is partially filled by the electrically resistive filter medium 2 such that in use dust laden air (E) must pass the corona discharge means causing dust particles in the dust laden air (E) to become charged. The dust laden air (E)  
10 containing charged dust particles must then pass through either of the electrically resistive filter media 2. The potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them within the electrically resistive filter medium.

15

In all of the embodiments described above the air pathways may be defined at least in part by the first electrode 4, the second electrode 6 and possibly also the third electrode 8. However, the electrostatic filter 1 may further comprise one or more walls, which together with the electrodes 4, 6, 8 form the air pathways such that dust  
20 laden air (A), (B), (C), (D) or (E) passes through the electrically resistive filter medium 2. The electrodes 4, 6, 8 may be of any suitable shape, for example they may be planar. The planar layers may be of any suitable shape for example square, rectangular, circular or triangular.

25 In an alternative embodiment the first electrode 4, the second electrode 6 and possibly also a third electrode 8 may be tubular. In such an embodiment the first and second electrodes 4, 6 and possibly also the third electrode 8 will define the air pathway through the electrically resistive filter medium 2. In such an embodiment additional walls are not required to form the air pathway. It is possible however that the  
30 electrically resistive filter medium 2 may be longer than the electrodes 4, 6, (8) and therefore some other wall or structure may surround a bottom or top side area of the electrically resistive filter medium 2.



An embodiment comprising first, second and third tubular electrodes 4, 6, 8 is shown in Figures 6, 7, 8a and 8b. In these embodiments the electrodes 4, 6, 8 are tubular with the second electrode 6 arranged concentrically between the first and third electrodes 4, 8. It can be seen that the electrodes 4, 6, 8 are cylindrical although they could be of any suitable shape such as square, rectangular, triangular or irregular in cross section.

In Figure 6 it can be seen that the electrically resistive filter medium 2 is located between both the first and second electrodes 4, 6 and the second and third electrodes 6, 8. It can also be seen that in this embodiment the electrostatic filter 1 comprises two electrodes of low curvature 12 which are also cylindrical since the first is an extension of the first electrode 2 below the lower surface 16 of the electrically resistive filter medium 2 and the second is an extension of the third electrode 8 below the lower surface 16 of the electrically resistive filter medium 2.

The corona discharge electrode 10 is in the form of a serrated lower edge 14 of the second electrode 6 which extends below a lower surface 16 of the electrically resistive filter medium 2 and as such is also cylindrical in shape. The electrodes of low curvature 12 can be seen to project both upstream and downstream of the serrated lower edge 14.

In this embodiment an air passage 22 is formed through the centre of the electrostatic filter 1. This air passage 22 may be used to deliver dust laden air (F) to the corona discharge means. Dust laden air (F) travels through this air passage 22 toward the corona discharge means. The Dust laden air (F) then passes the corona discharge means and the dust particles become charged. The dust laden air (F) containing the charged dust particles then passes through the electrically resistive filter medium 2 located between the first and second electrodes 4, 6 or the electrically resistive filter medium 2 located between the second and third electrodes 6, 8 and the dust particles become trapped in the electrically resistive filter medium 2.

In an alternative embodiment, such as the embodiment shown in Figure 7 the corona discharge electrode 10 is remote from the second electrode 6. In this embodiment the corona discharge electrode 10 is in the form of a wire 20 and the electrode of low

curvature 12 is the third electrode 8 which forms the wall of the passage 22. Dust laden air (G) travels through this air passage 22 and the dust particles are charged by the corona discharge means. The dust laden air (G) containing the charged dust particles then passes through the electrically resistive filter medium 2 located  
5 between the first and second electrodes 4, 6 or the electrically resistive filter medium 2 located between the second and third electrodes 6, 8 and the dust particles become trapped in the electrically resistive filter medium 2.

In all of the embodiments described in relation to figures 5 to 7 the first and the third  
10 electrodes are at 0Volts and the second electrode is at - 4 to 10kV. This also means that the corona discharge electrode 10 is at - 4 to 10kV and the electrode of low curvature is at 0Volts.

The electrodes 4, 6, 8 may be formed from any suitable conductive material.  
15 Preferably, the first, second and/or third electrodes 4, 6, 8 are formed from a conductive metal sheet of from 0.1mm, or 0.25mm, or 0.5mm, or 1mm, or 1.5mm, or 2mm to 2.5mm, or 3mm, or in thickness.

In all of the embodiments described above the electrically resistive filter medium 2  
20 may be formed from any suitable material for example an open cell reticulated polyurethane foam derived from a polyester.

In a preferred embodiment the electrically resistive filter medium 2 is 3 to 12 PPI and preferably 8 to 10 PPI and most preferably 3 to 6 PPI. The average pore size, PPI or  
25 type of electrically resistive filter medium 2 may however vary along its length. For example the pore size of the electrically resistive filter medium 2 shown in Figure 8a varies along its length because it is formed from two sections each having a different pore size. In the embodiment shown the upstream portion has 3 or 8PPI and the downstream portion has 6 or 10PPI.

30 The pore size/diameter may be measured using the following method.

- 1) Microscopic pictures of the foam structure should be taken through horizontal sections insuring pore consistency as shown in Figure 13a

- 2) Five individual pores should be selected as shown in Figure 13b
  - 3) The diameter of each pore is measured as shown in Figure 13c to an accuracy of no less than 100micron and an average should be taken over the 5 pores.
  - 4) This average pore size (pore diameter) is given in microns or mm.
- 5 The pores per inch is calculated by dividing 25400 (1 inch =25400 microns) by the pore diameter in microns.

Figures 8a, 8b, 9, 10a and 10b show the second aspect of the present invention where the electrostatic filter 1 has been incorporated into the cyclonic separating apparatus of a vacuum cleaner. Vacuum cleaners incorporating the cyclonic separating apparatus shown in Figures 8a, 8b, 9, 10a and 10b are shown in Figures 11 and 12.

In Figure 11 the vacuum cleaner 100 comprises a main body 24, wheels 26 mounted on the main body 24 for manoeuvring the vacuum cleaner 100 across a surface to be cleaned, and a cyclonic separating apparatus 28 also removably mounted on the main body 24. A hose 30 communicates with the cyclonic separating apparatus 28 and a motor and fan unit (not shown) is housed within the main body 24 for drawing dust laden air into the cyclonic separating apparatus 28 via the hose 30. Commonly, a floor-engaging cleaner head (not shown) is coupled to the distal end of the hose 30 via a wand to facilitate manipulation of the dirty air inlet 34 over the surface to be cleaned.

20

In use, dust laden air drawn into the cyclonic separating apparatus 28 via the hose 30 has the dust particles separated from it in the cyclonic separating apparatus 28. The dirt and dust is collected within the cyclonic separating apparatus 28 while the cleaned air is channelled past the motor for cooling purposes before being ejected from the vacuum cleaner 100 via an exit port in the main body 24.

25

The upright vacuum cleaner 100 shown in Figure 12 also has a main body 24 in which a motor and fan unit (not shown) is mounted and on which wheels 26 are mounted to allow the vacuum cleaner 100 to be manoeuvred across a surface to be cleaned. A cleaner head 32 is pivotably mounted on the lower end of the main body 24 and a dirty air inlet 34 is provided in the underside of the cleaner head 32 facing the surface to be cleaned. Cyclonic separating apparatus 28 is removably provided on the main

30

body 24 and ducting 36 provides communication between the dirty air inlet 34 and the cyclonic separating apparatus 28. A wand and handle assembly 38 is releasably mounted on the main body 24 behind the cyclonic separating apparatus 28.

5 In use, the motor and fan unit draws dust laden air into the vacuum cleaner 100 via either the dirty air inlet 34 or the wand 38. The dust laden air is carried to the cyclonic separating apparatus 28 via the ducting 36 and the entrained dust particles are separated from the air and retained in the cyclonic separating apparatus 28. The cleaned air is passed across the motor for cooling purposes and then ejected from the  
10 vacuum cleaner 100.

The cyclonic separating apparatus 28 forming part of each of the vacuum cleaners 100 is shown in more detail in Figures 8a, 8b, 9, 10a and 10b. The specific overall shape of the cyclonic separating apparatus 28 can be varied according to the type of vacuum  
15 cleaner 100 in which the cyclonic separating apparatus 28 is to be used. For example, the overall length of the apparatus can be increased or decreased with respect to the diameter of the cyclonic separating apparatus 28.

The cyclonic separating apparatus 28 comprises an outer bin 42 which has an outer  
20 wall 44 which is substantially cylindrical in shape. The lower end of the outer bin 42 is closed by a base 46 which is pivotably attached to the outer wall 44 by means of a pivot 48 and held in a closed position by a catch 50. In the closed position, the base 46 is sealed against the lower end of the outer wall 44. Releasing the catch 50 allows the base 46 to pivot away from the outer wall 44 for emptying the cyclonic separating  
25 apparatus 28. A second cylindrical wall 52 is located radially inwardly of the outer wall 44 and spaced from it so as to form an annular chamber 54 between them. The second cylindrical wall 52 meets the base 46 (when the base 46 is in the closed position) and is sealed against it. The annular chamber 54 is delimited generally by the outer wall 44, the second cylindrical wall 52 and the base 46 to form the outer bin  
30 42. This outer bin 42 is both a first stage cyclone 56 and a dust collector.

A dust laden air inlet 58 is provided in the outer wall 44 of the outer bin 42. The dust laden air inlet 58 is arranged tangentially to the outer wall 44 so as to ensure that incoming dust laden air is forced to follow a helical path around the annular chamber

54. A fluid outlet is provided in the outer bin 42 in the form of a shroud 60. The shroud 60 comprises a cylindrical wall 62 in which a large number of perforations 64 are formed. The only fluid outlet from the first stage cyclone 56 is formed by the perforations 64 in the shroud 60. A passageway 66 is formed downstream of the shroud 60. The passageway 66 communicates with a plurality of second stage cyclones 68 which are arranged in parallel. The passageway 66 may be in the form of an annular chamber which leads to inlets 69 of the second stage cyclones or may be in the form of a plurality of distinct air passageways each of which leads to a distinct second stage cyclone 68.

10

A third cylindrical wall 70 extends between the base 46 and a vortex finder plate 72 which forms the top surface of each of the second stage cyclones 68. The third cylindrical wall 70 is located radially inwardly of the second cylindrical wall 52 and is spaced from it so as to form a second annular chamber 74 between them.

15

When the base 46 is in the closed position, the third cylindrical wall 70 may be sealed against it as shown in Figure 10a. Alternatively as shown in Figures 8a and 9 the third cylindrical wall 70 may be sealed by an electrostatic filter base plate 77.

20

The second stage cyclones 68 are arranged in a circle above the first stage cyclone 56. They are arranged in a ring which is centred on the axis of the first stage cyclone 56. Each second stage cyclone 68 has an axis which is inclined downwardly and towards the axis of the first stage cyclone 58.

25

Each second stage cyclone 68 is frustoconical in shape and comprises a cone opening 76 which opens into the top of the second annular chamber 74. In use dust separated by the second stage cyclones 68 will exit through the cone openings 76 and will be collected in the second annular chamber 74. A vortex finder 78 is provided at the upper end of each second stage cyclone 68. The vortex finders 78 may be an integral part of the vortex finder plate 72 or they may pass through the vortex finder plate 72.

30

In the embodiment shown in Figures 8a and 9 the vortex finders 78 lead into vortex finder fingers 80 which communicate directly with the electrostatic filter 1 rather than emptying into a plenum chamber which communicates with the electrostatic filter 1.

It is however possible that the vortex finders 78 could communicate with a plenum 81 which in turn communicates with the electrostatic filter 1. Such a plenum is shown in Figure 10a.

- 5 The electrostatic filter 1 is arranged concentrically down the centre of the cyclonic separating apparatus 28 such that at least a part of the first stage cyclone 56 and the second stage cyclones 68 surround the electrostatic filter 1.

10 In Figures 8a and 9 it can be seen that an air passage 22 leads from the vortex finder fingers 80 to the corona discharge means. This air passage 22 is used to deliver dust laden air to the corona discharge means. The electrostatic filter 1 comprises concentrically arranged cylindrical first, second and third electrodes 4, 6, 8. An electrically resistive filter medium 2 is located between both the first and second electrodes 4, 6 and the second and third electrodes 6, 8. The electrostatic filter 1 also  
15 comprises a corona discharge means in the form of a corona discharge electrode 10 and two electrodes of low curvature 12.

The first electrode of low curvature 12 is an extension of the first electrode 2 below the lower surface 16 of the electrically resistive filter medium 2 and the second  
20 electrode of low curvature 12 is an extension of the third electrode 8 below the lower surface 16 of the electrically resistive filter medium 2.

The corona discharge electrode 10 is in the form of a serrated lower edge 14 of the second electrode 4 which extends below a lower surface 16 of the electrically resistive  
25 filter medium 2. The electrodes of low curvature 12 can be seen to project both upstream and downstream of the serrated lower edge 14 of the corona discharge electrode 10.

Other features of the electrostatic filter may be as described above in relation to  
30 Figure 6.

During use of the separating apparatus shown in Figures 8a, 8b and 9, dust laden air enters the cyclonic separating apparatus 28 via the dirty air inlet 34 and, because of the tangential arrangement of the inlet 34, the dust laden air follows a helical path

around the outer wall 44. Larger dirt and dust particles are deposited by cyclonic action in the annular chamber 54 and collected therein. The partially-cleaned dust laden air exits the annular chamber 54 via the perforations 64 in the shroud 60 and enters the passageway 66. The partially-cleaned dust laden air then passes into tangential inlets 69 of the second stage cyclones 68. Cyclonic separation is set up inside the second stage cyclones 68 so that separation of some of the dust particles which are still entrained within the airflow occurs. The dust particles which are separated from the airflow in the second stage cyclones 68 are deposited in the second annular chamber 74 whilst the further cleaned dust laden air exits the second stage cyclones 68 via the vortex finders 78. The further cleaned dust laden air then passes through the vortex fingers 80 into the air passage 22 and into the electrostatic filter 1.

The further cleaned dust laden air then travels down the air passage 22 and past the corona discharge means formed from the corona discharge electrode 10 and the electrode of low curvature 12 such that any dust particles remaining in the further cleaned dust laden air become charged. The further cleaned dust laden air containing the charged dust then travels through the electrically resistive filter medium 2. The potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them within the electrically resistive filter medium 2.

In Figure 8a the cleaned air then leaves the electrostatic filter 1 via apertures 82 in the vortex finder plate 72 and enters an exhaust manifold and exhausts the cyclonic separating apparatus 28 via the exit port 86.

In Figure 9 the cleaned air then leaves the electrostatic filter 1 by passing through exit fingers 88 arranged at the top end of the electrostatic filter 1 downstream of the electrically resistive filter medium 2. The exit fingers 88 direct the air towards an exhaust passage 90 which passes through the centre of the cyclonic separating apparatus 28. Air passes through this exhaust passage 90 and exhausts the cyclonic separating apparatus 28 via the exit port 86 at the base of the cyclonic separating apparatus 28.

In Figures 10a and 10b it can be seen that the electrostatic filter 1 comprises a plurality of flat plate electrodes 92 which are located in the air passage 22 which is fluidly connected to plenum 81. An electrically resistive filter medium 2 is located between adjacent electrodes 92. The corona discharge means comprises a plurality of corona discharge electrodes 10 and a plurality of electrodes of low curvature 12.

The corona discharge electrodes 10 are in the form of serrated upper edges 14 of electrodes which are arranged between two other electrodes. The electrodes of low curvature 12 are formed from upper portions of electrodes which are located on either side of the corona discharge electrodes 10. It can be seen that the electrodes of low curvature 12 project both upstream and downstream of the serrated upper edges 14 of the corona discharge electrodes 10.

During use of the separating apparatus shown in Figure 10a and 10b, dust laden air travels through the cyclonic separating apparatus 28 in the same way as described above in relation to Figures 8a and 9 until it exits the vortex finders 78. In Figure 10a once the air has left the vortex finders 78 the air travels through the plenum 81 which collects air from the vortex finders 78 and channels it into the air passage 22 and into the electrostatic filter 1.

The air then travels past the corona discharge means formed from the corona discharge electrodes 10 and the electrodes of low curvature 12 such that any dust particles remaining in the air become charged. The air containing the charged dust then travels through the electrically resistive filter medium 2. The potential difference generated across the electrically resistive filter medium 2 causes the charged dust particles to be attracted to respective positive and negative ends of the electrically resistive filter medium 2, thus trapping them within the electrically resistive filter medium 2.

The cleaned air then leaves the electrostatic filter 1 and exhausts the cyclonic separating apparatus 28 via the exit port 86 at the base of the cyclonic separating apparatus 28.

Dust particles which have been separated from the dust laden air by the first and second stage cyclones 56, 68 will be collected in both of the annular chambers 54, 74.



In order to empty these chambers, the catch 50 is released to allow the base 46 to pivot for example about a hinge (not shown) so that the base 46 falls away from the lower ends of the walls 44, 52. Dirt and dust collected in the chambers 54, 74 can then easily be emptied from the cyclonic separating apparatus 28.

5

It will be appreciated from the foregoing description that the cyclonic separating apparatus 28 includes two distinct stages of cyclonic separation and a distinct stage of electrostatic filtration. In the preferred embodiments shown the electrostatic filter is located downstream of all of the cyclonic cleaning stages. The first stage cyclone 56 constitutes a first cyclonic separating unit consisting of a single first cyclone which is generally cylindrical in shape. In this first stage cyclone the relatively large diameter of the outer wall 44 means that comparatively large particles of dirt and debris will be separated from the air because the centrifugal forces applied to the dirt and debris are relatively small. Some fine dust will be separated as well. A large proportion of the larger debris will reliably be deposited in the annular chamber 54.

10  
15

There are 12 second stage cyclones 68. In these second stage cyclones 68 each second stage cyclone 68 has a smaller diameter than the first stage cyclone 56 and so is capable of separating finer dirt and dust particles than the first stage cyclone 56. It also has the added advantage of being challenged with air which has already been cleaned by the first stage cyclone 56 and so the quantity and average size of entrained dust particles is smaller than would otherwise have been the case. The separation efficiency of the second stage cyclones 68 is considerably higher than that of the first stage cyclone 56, however some small particles will pass through the second stage cyclones 68 and reach the electrostatic filter. The electrostatic filter 1 is capable of removing dust particles which remain in the air after it has passed through the first stage cyclone 56 and the second stage cyclones 68.

20

25

Although a corona discharge means is shown in Figures 8a, 8b 9, 10a and 10b the electrostatic filter will function without it and therefore the corona discharge means is not essential. The corona discharge means is however desirable as it may help to increase the separation efficiency of the electrostatic filter.

30

In all of the embodiments shown it is preferable that all of the electrodes are non porous. However, as long as the first and second electrodes are non porous it is possible that any other electrodes present could be porous if desired.

5

10

15

20

25

30

Claims

1. An electrostatic filter comprising a filter medium located between a first and a second electrode, each at a different voltage during use, such that a potential difference is formed across the filter medium, wherein a property of the filter medium varies along the length of the filter medium.  
5
2. An electrostatic filter according to claim 1 wherein the property which varies is the average pore diameter, the pores per inch, the electrical resistivity and/or the type of filter medium.  
10
3. An electrostatic filter according to claim 1 or 2 wherein the variation occurs in a single filter medium.
4. An electrostatic filter according to claim 1 or 2 wherein a plurality of sections of filter medium are brought together to form the filter medium.  
15
5. An electrostatic filter according to claim 2, 3 or 4 wherein the pores per inch increase in a downstream direction.  
20
6. An electrostatic filter according to any of claims 2 to 5 wherein the average pore size decreases in a downstream direction.
7. An electrostatic filter according to any of claims 2 to 6 wherein the electrical resistivity decreases in a downstream direction.  
25
8. An electrostatic filter according to any preceding claim wherein the filter medium comprises an open cell reticulated foam
9. An electrostatic filter according to any preceding claim wherein the first and second electrodes are substantially non porous.  
30
10. An electrostatic filter according to claim 9 wherein the first and second electrodes are non porous along their entire length.

11. An electrostatic filter according to any preceding claim wherein the filter medium is in contact with the first and/or the second electrode.

5 12. An electrostatic filter according to any preceding claim further comprising at least one corona discharge means.

13. An electrostatic filter according to any preceding claim wherein the first and/or second electrode is formed from a conductive metal sheet or foil of from 0.1mm to  
10 4mm in thickness.

14. A vacuum cleaner comprising an electrostatic filter according to any preceding claim.

15

20

25

30

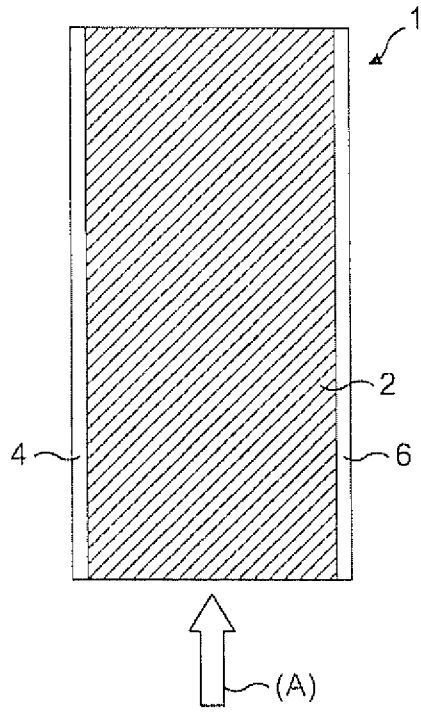


FIG. 1

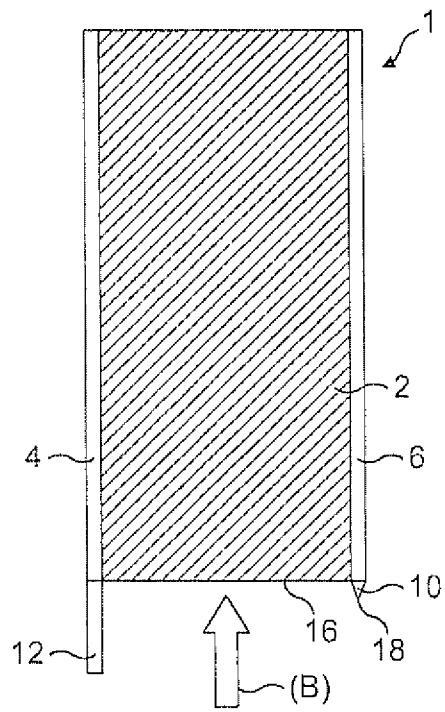


FIG. 2a

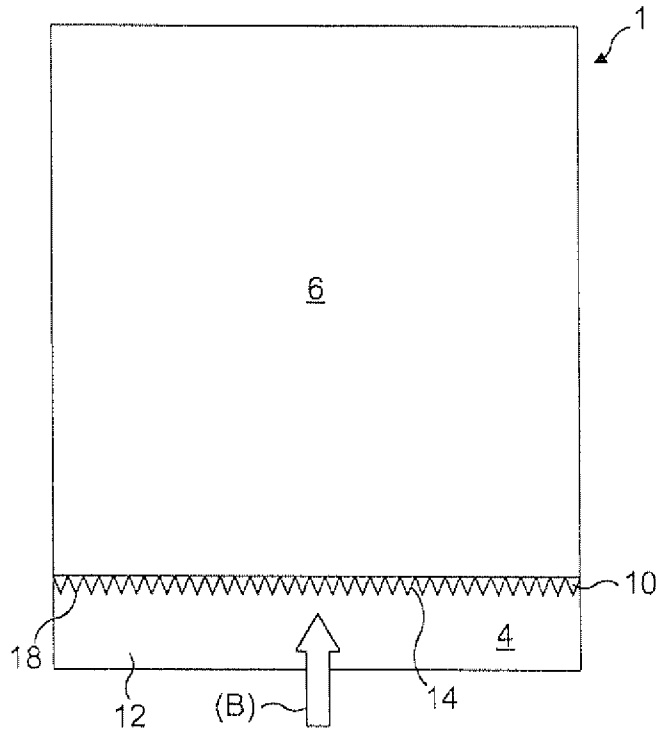


FIG. 2b

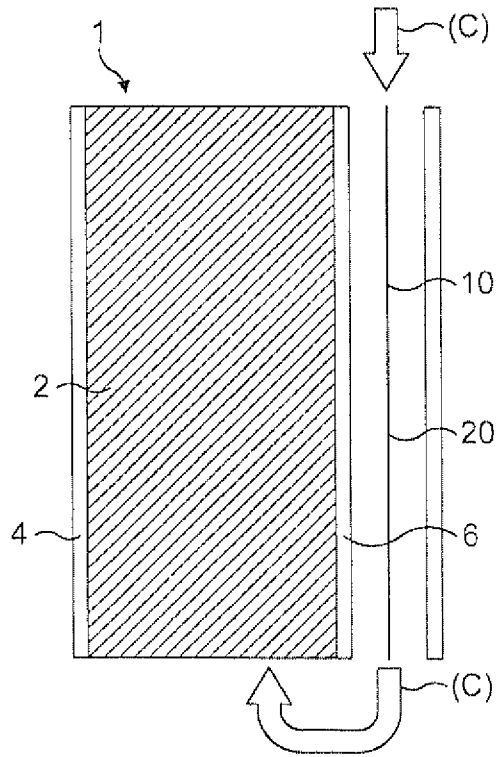


FIG. 3

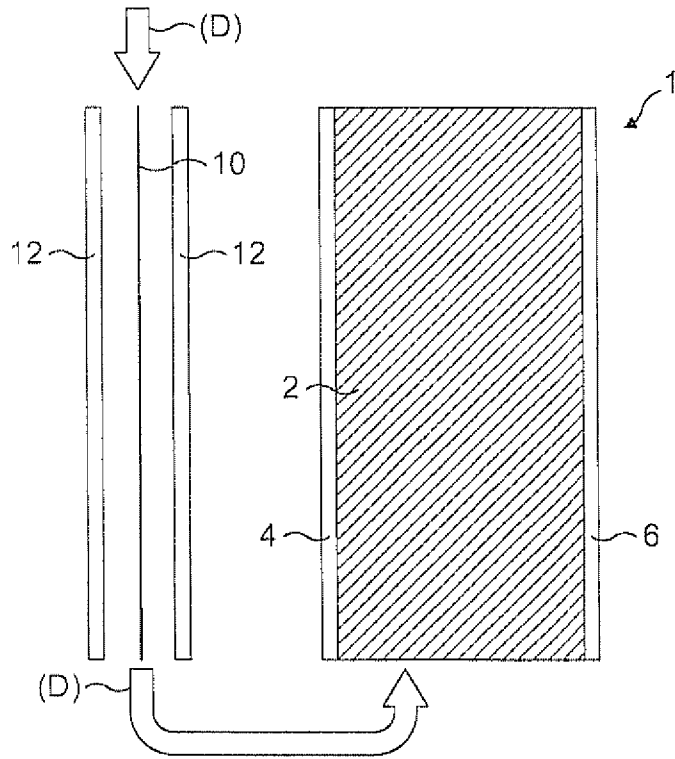


FIG. 4

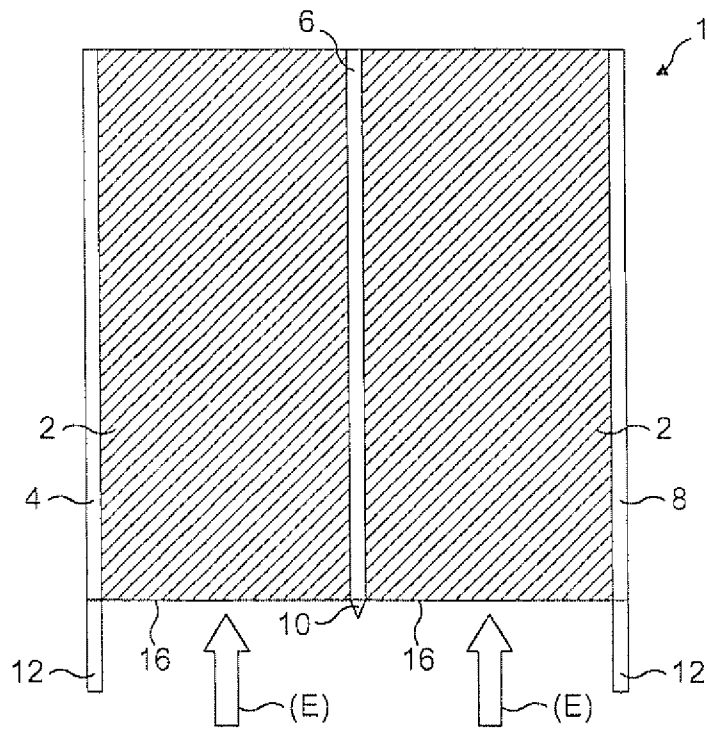


FIG. 5

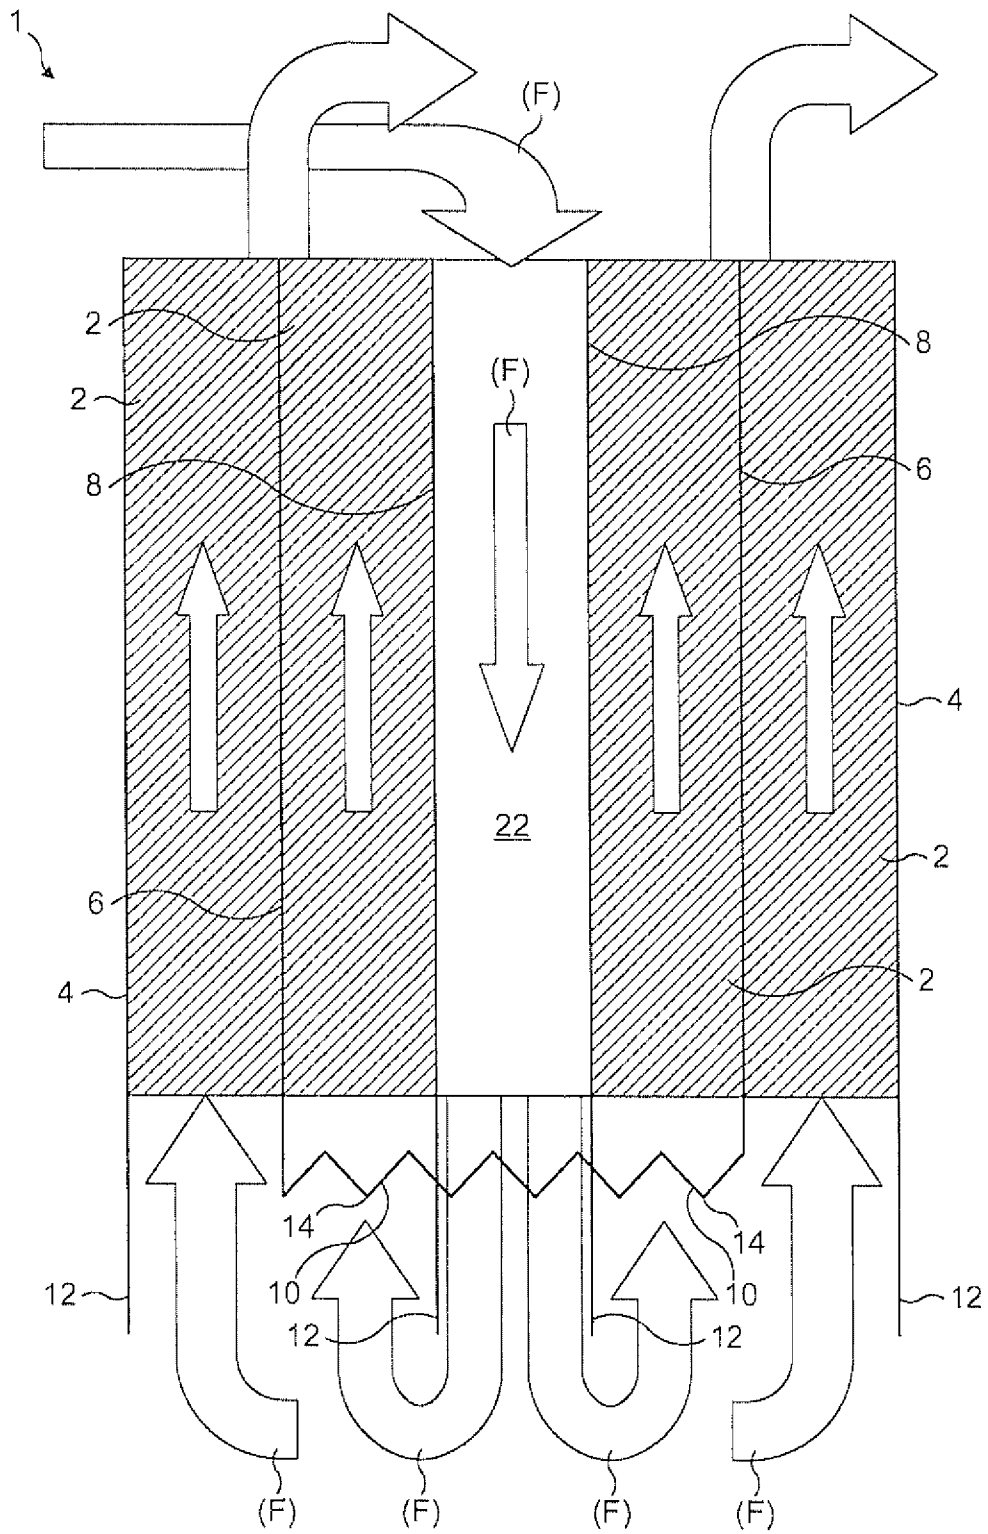


FIG. 6



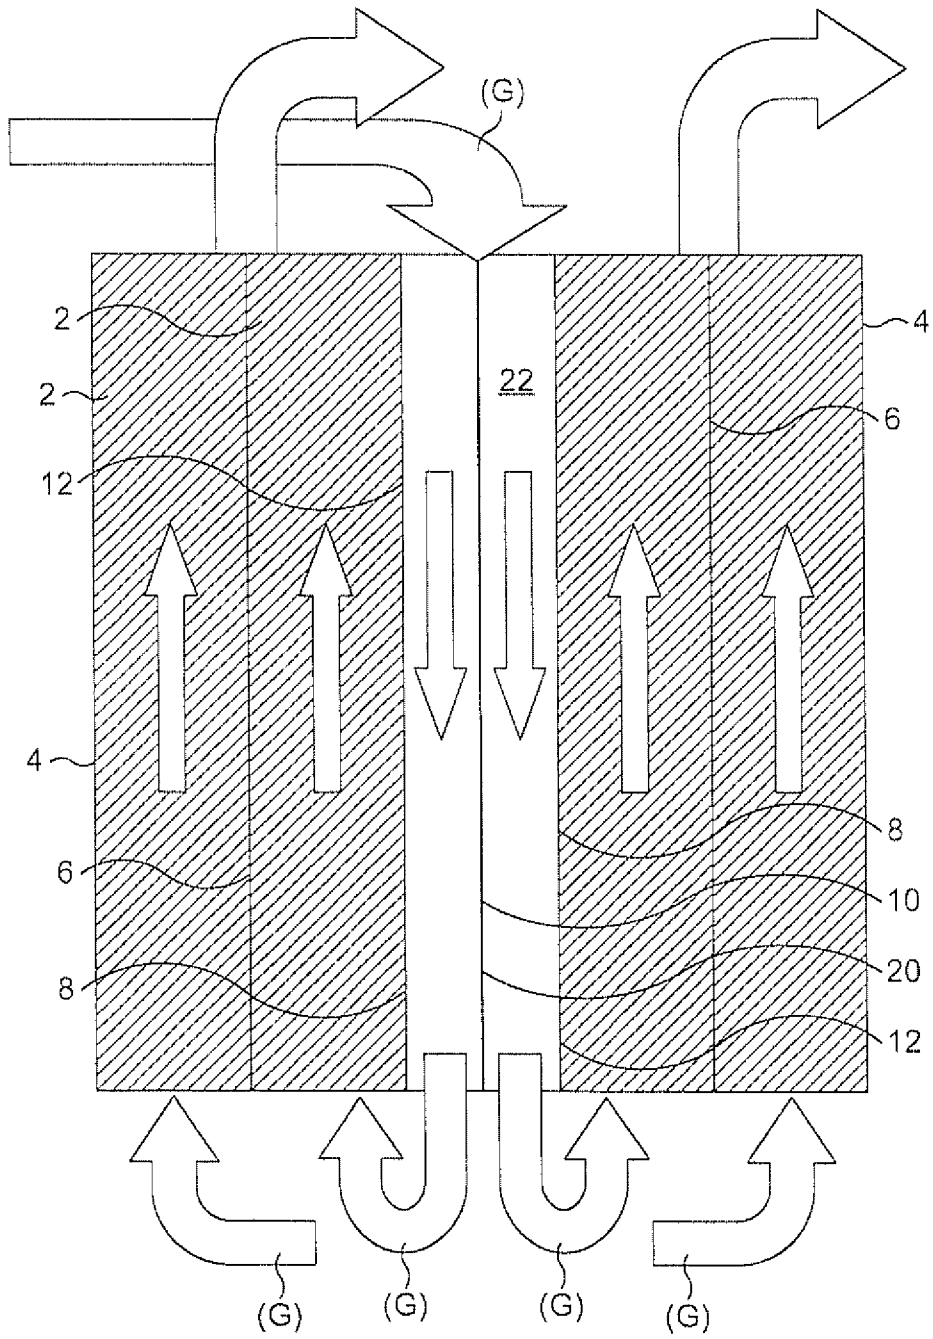


FIG. 7

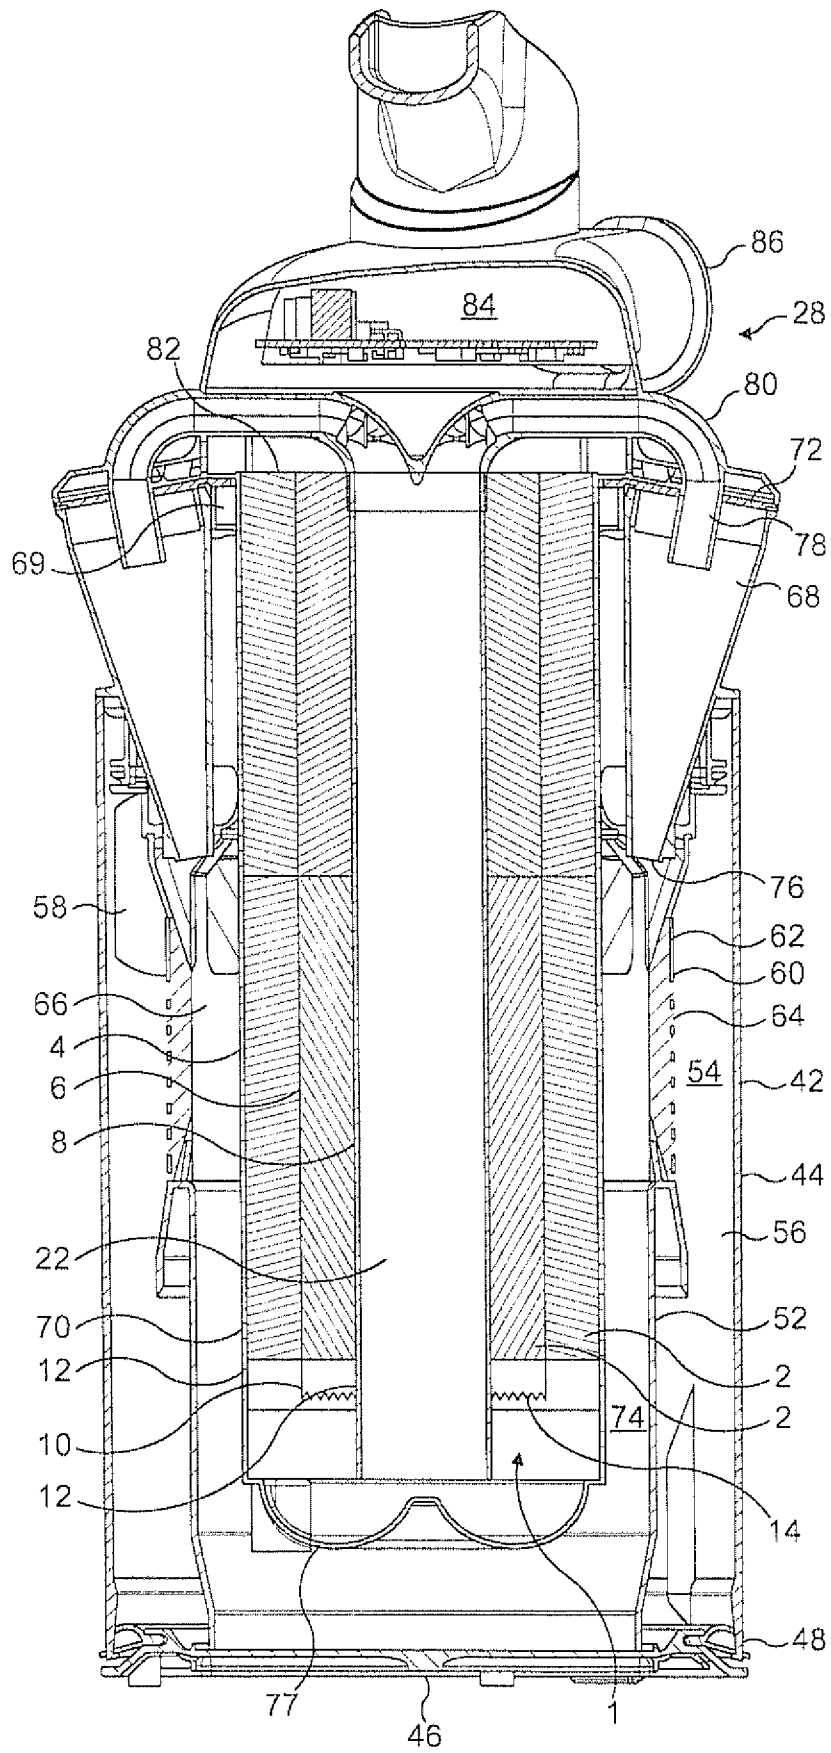


FIG. 8a

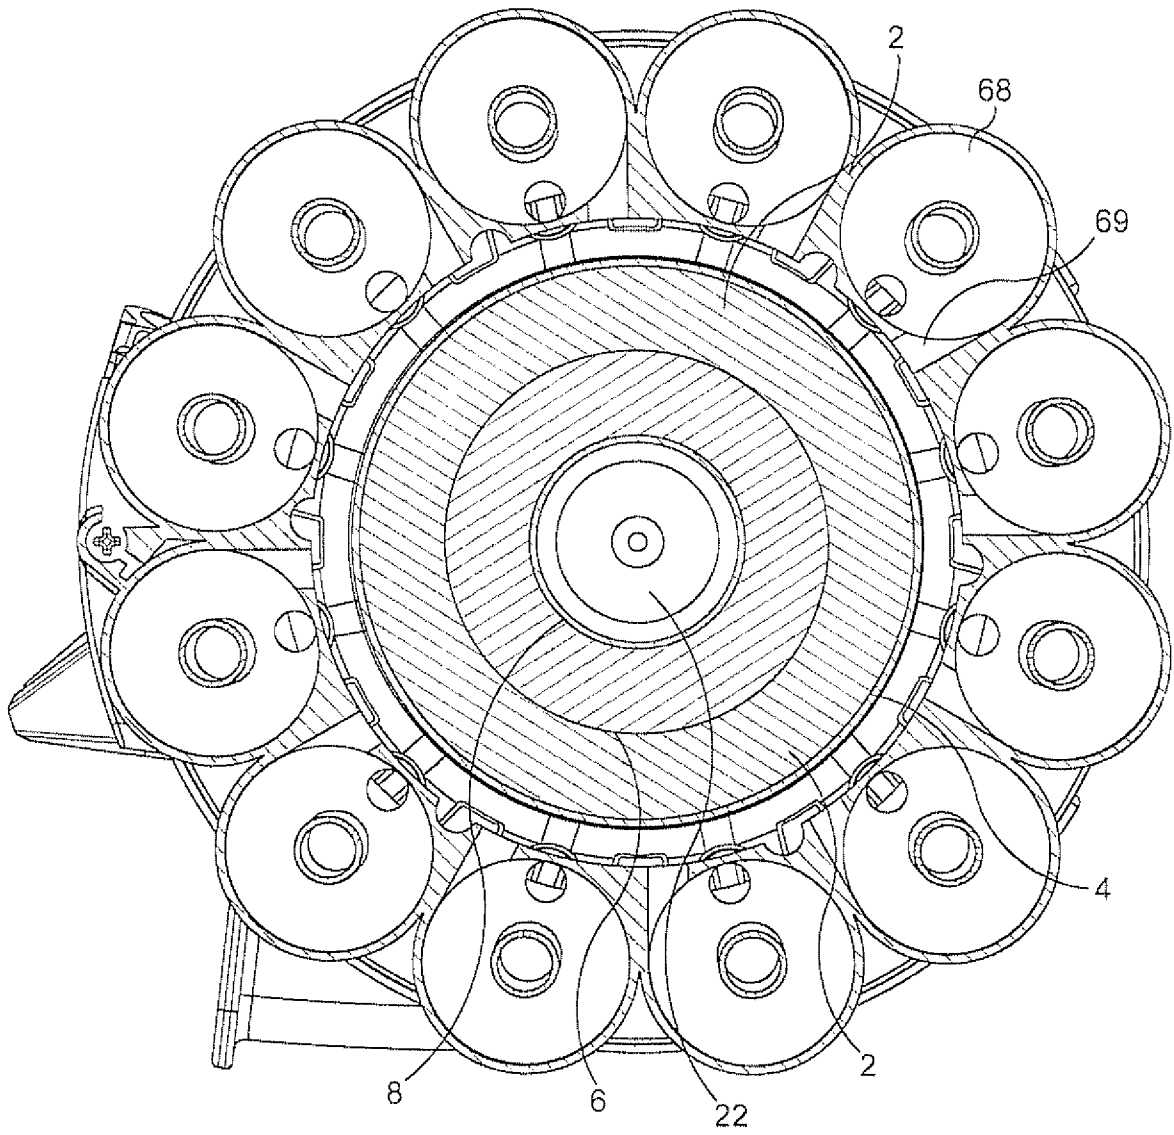


FIG. 8b

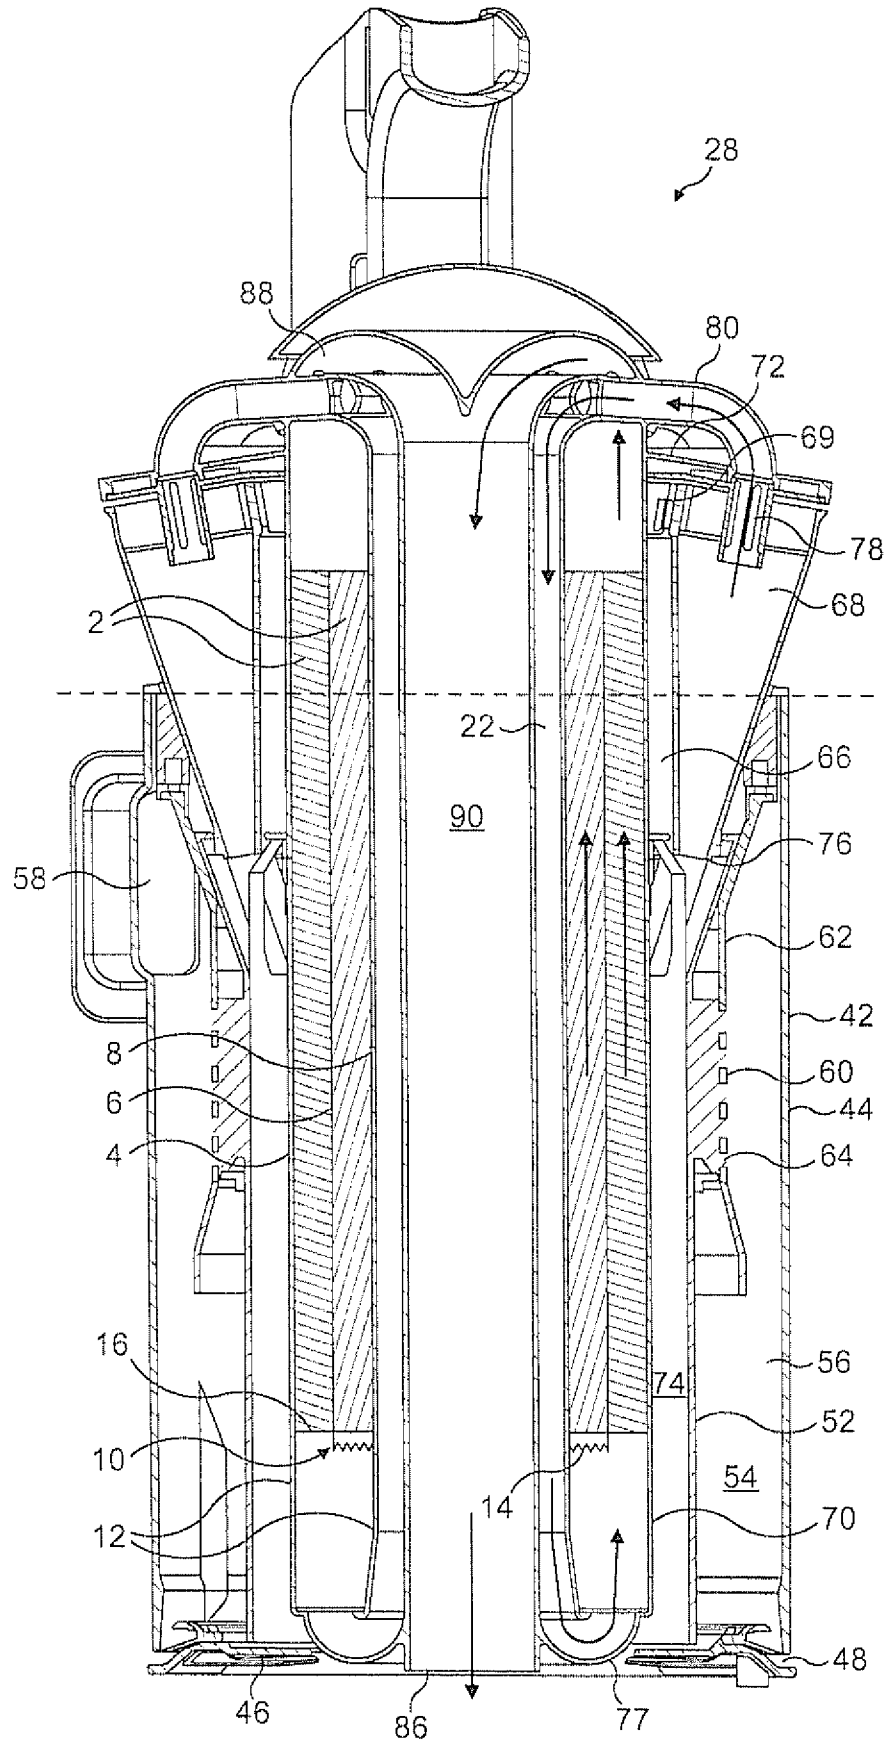


FIG. 9

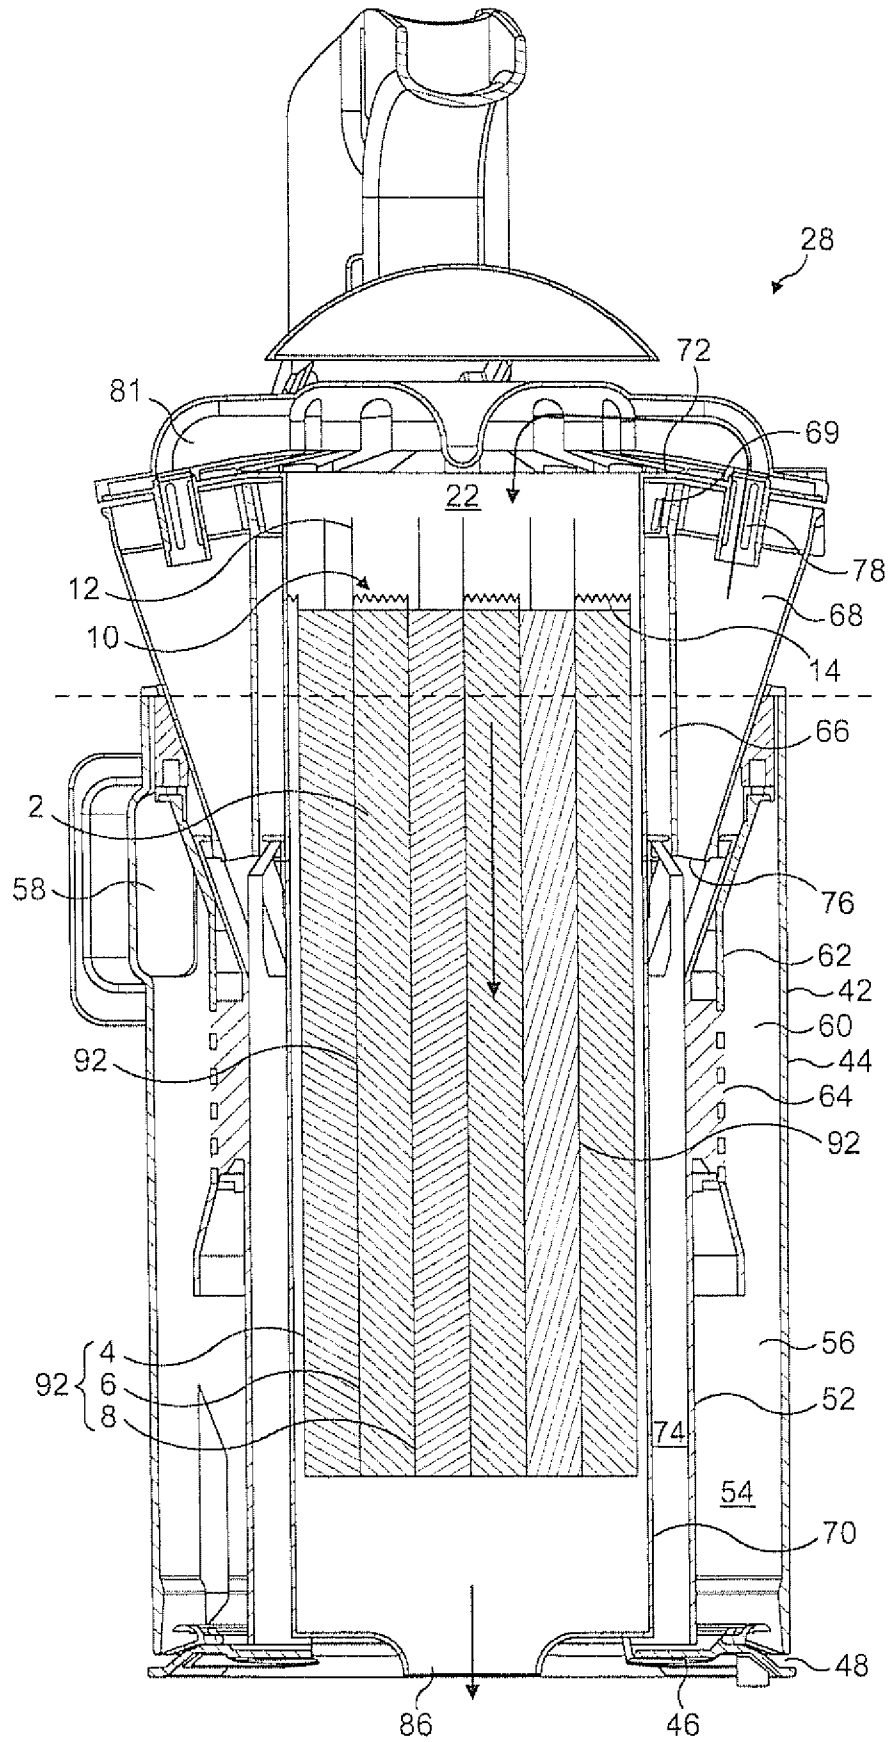


FIG. 10a

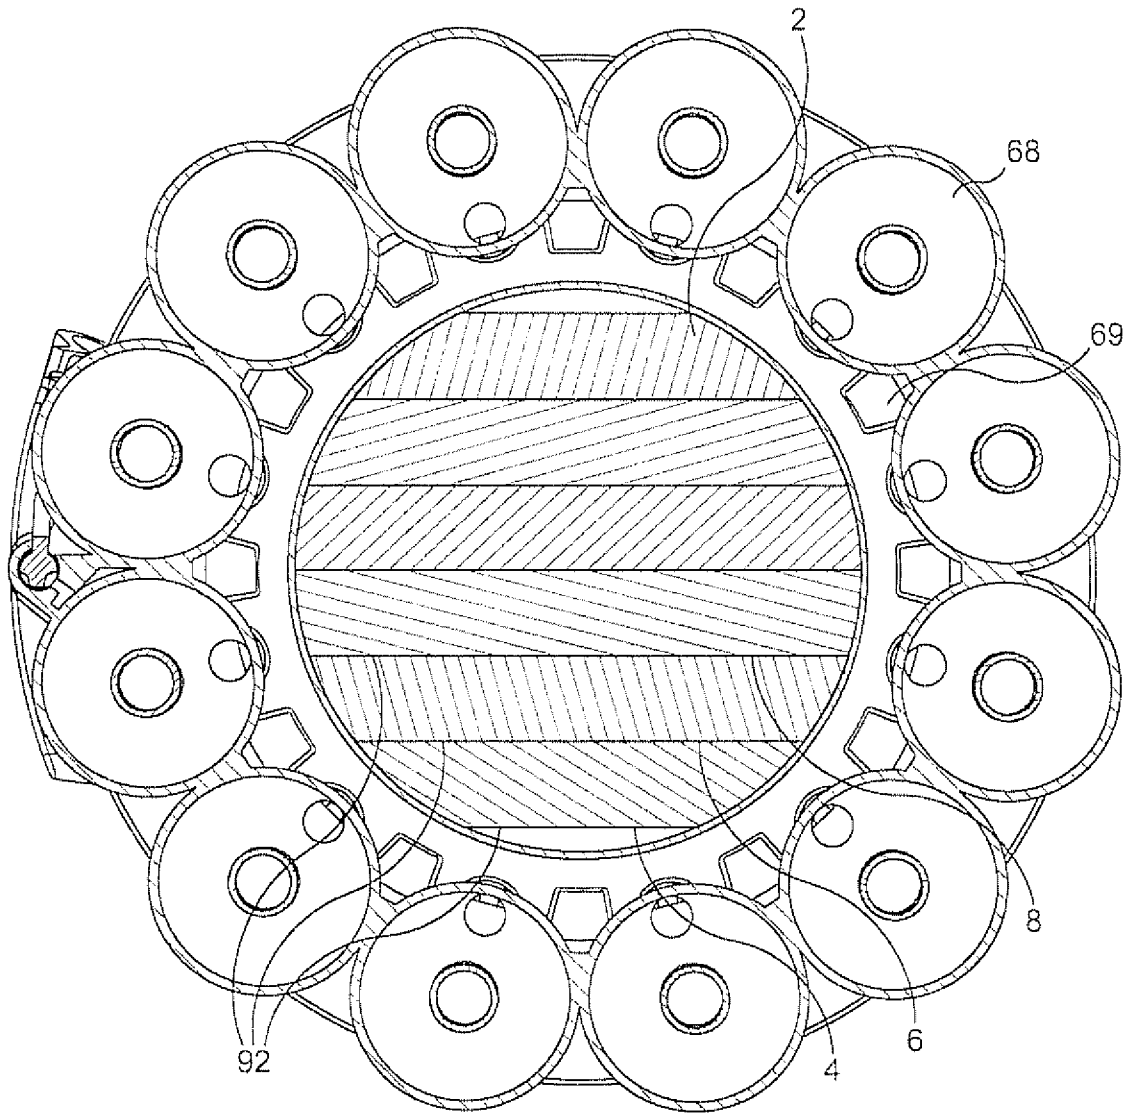


FIG. 10b

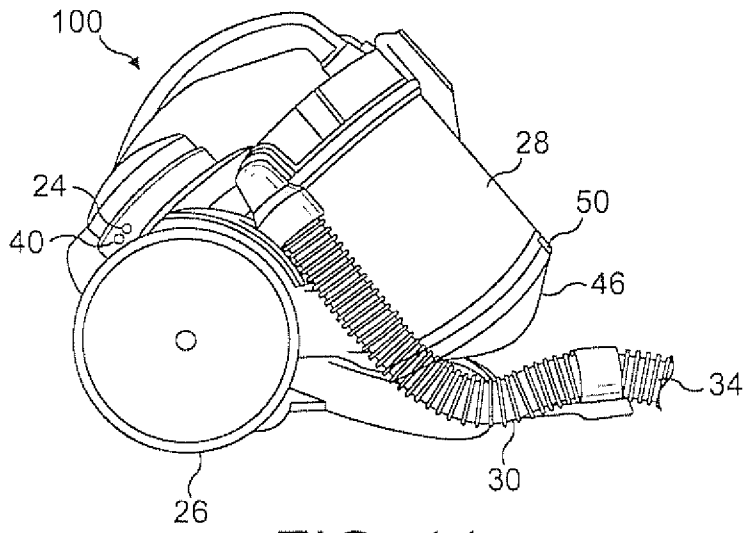


FIG. 11

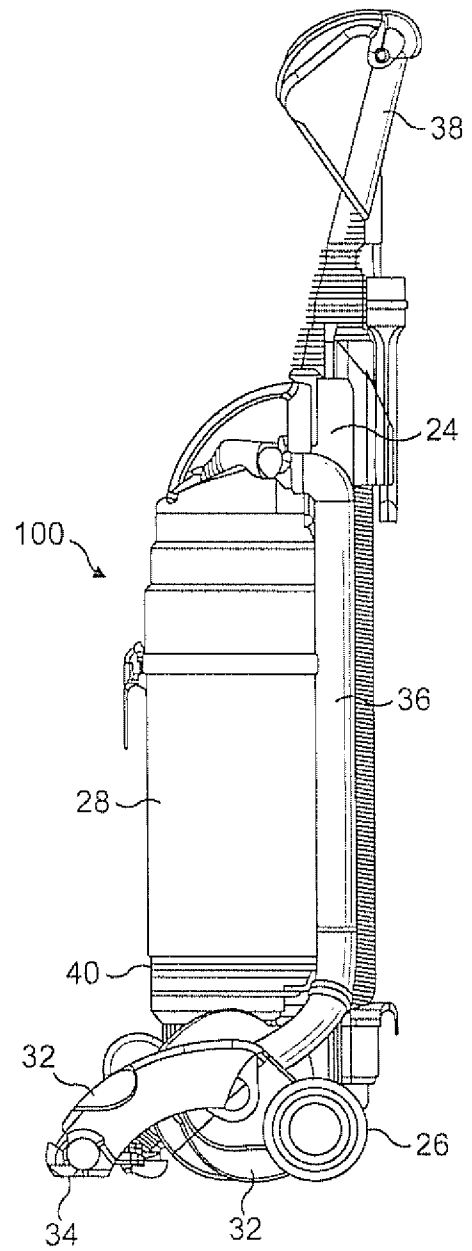


FIG. 12

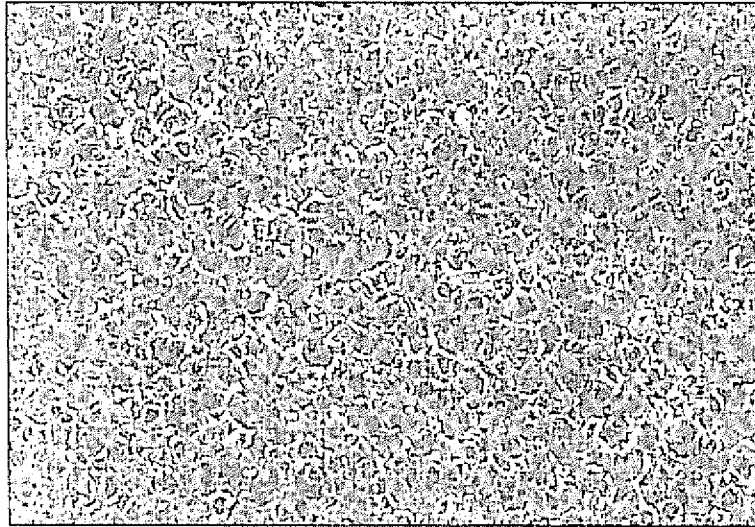


FIG. 13a

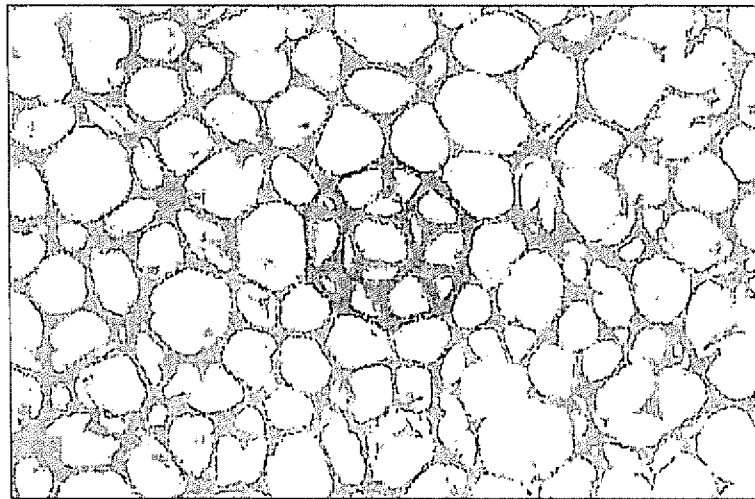


FIG. 13b

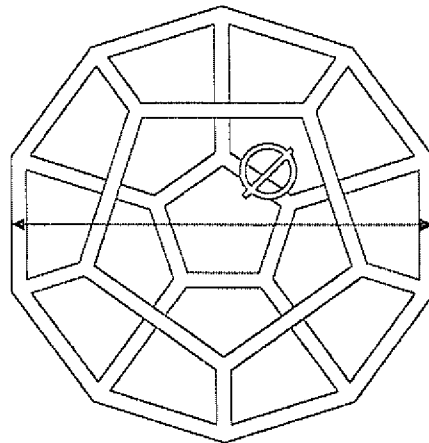


FIG. 13c



INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2010/051184

A. CLASSIFICATION OF SUBJECT MATTER

INV. A47L9/12  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
A47L B03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	US 2003/037676 A1 (DUNSHEE KEVIN BRYANT [US]) 27 February 2003 (2003-02-27) the whole document	1-6,8,11 12-14 7,9,10
X Y A	US 5 647 890 A (YAMAMOTO YUJIRO [US]) 15 July 1997 (1997-07-15) column 4, line 56 - column 5, line 25; figure 1 column 5, line 43 - line 45	1-4,8, 11,13 12,14 5-7,9,10
Y	GB 2 418 163 A (SAMSUNG KWANGJU ELECTRONICS CO [KR]) 22 March 2006 (2006-03-22) cited in the application page 11, line 8 - line 13; figure 3	12-14

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

8 October 2010

Date of mailing of the international search report

14/10/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Clarke, Alister

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/GB2010/051184

**C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 482 252 B1 (CONRAD WAYNE ERNEST [CA] ET AL) 19 November 2002 (2002-11-19) cited in the application column 12, line 16 - line 29; figure 5 -----	12-14
Y	US 5 593 476 A (COPPOM REX R [US]) 14 January 1997 (1997-01-14) cited in the application * abstract -----	12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/GB2010/051184
---

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 2003037676	A1	27-02-2003	NONE	
US 5647890	A	15-07-1997	NONE	
GB 2418163	A	22-03-2006	AU 2005201203	A1 06-04-2006
			CN 1751648	A 29-03-2006
			DE 102005014541	A1 06-04-2006
			FR 2875394	A1 24-03-2006
			JP 2006088139	A 06-04-2006
			KR 20060026574	A 24-03-2006
			RU 2295276	C2 20-03-2007
			US 2006059871	A1 23-03-2006
US 6482252	B1	19-11-2002	WO 0040135	A1 13-07-2000
			CA 2293984	A1 08-07-2000
			US 6238451	B1 29-05-2001
			US 6383266	B1 07-05-2002
US 5593476	A	14-01-1997	AU 2700395	A 04-01-1996
			CA 2190954	A1 14-12-1995
			JP 10501175	T 03-02-1998
			JP 3711145	B2 26-10-2005
			WO 9533570	A1 14-12-1995
			US 5549735	A 27-08-1996