United States Patent [19]

Walters

[11] **3,903,786**

[45] **Sept. 9, 1975**

[54] **HYDRAULIC SYSTEMS**

[75] Inventor: **Ronald Bernard Walters**, Wembley, England

[73] Assignee: **Sperry Rand Limited**, London, England

[22] Filed: **May 6, 1974**

[21] Appl. No.: **467,082**

[30] **Foreign Application Priority Data**

May 15, 1974 United Kingdom 22950/74

[52] **U.S. Cl.** **91/444**; 91/461

[51] **Int. Cl.**[2] **F15B 11/08**

[58] **Field of Search** 91/461, 444, 433

[56] **References Cited**

UNITED STATES PATENTS

2,909,195	10/1959	Keyt	91/433 X
3,555,970	1/1971	Borgeson	91/461
3,854,382	12/1974	Walters et al.	91/461

Primary Examiner—Edgar W. Geoghegan

Attorney, Agent, or Firm—Barnes, Kisselle, Raisch & Choate

[57] **ABSTRACT**

A hydraulic system including a compensator connected between the service ports of the control valve and the load and arranged to restrict the flow in one or both of the service lines so as to maintain a constant pressure difference between the supply pressure and the pressure at the valve service port supplying fluid to the load. The compensator may be connected in both service lines and arranged to restrict the flow equally in each of them. Alternatively a single-sided compensator may be used, and if the load is liable to over-run it must be connected in the service line which is downstream of the load when over-running.

5 Claims, 10 Drawing Figures

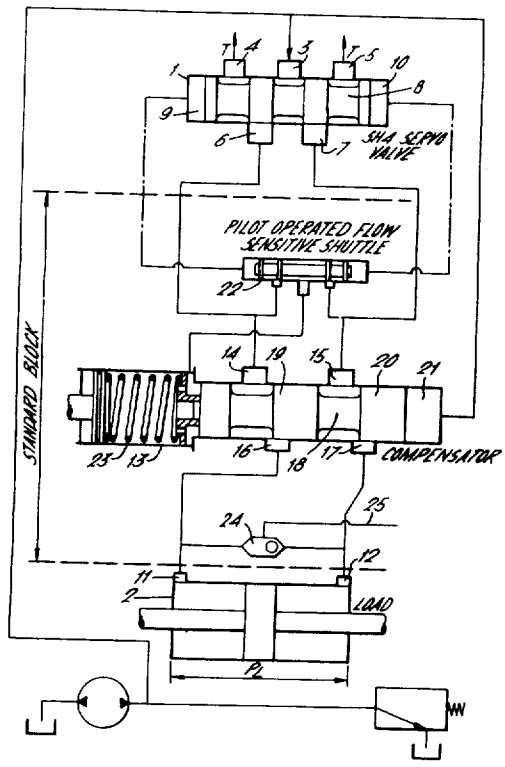


FIG. 1.

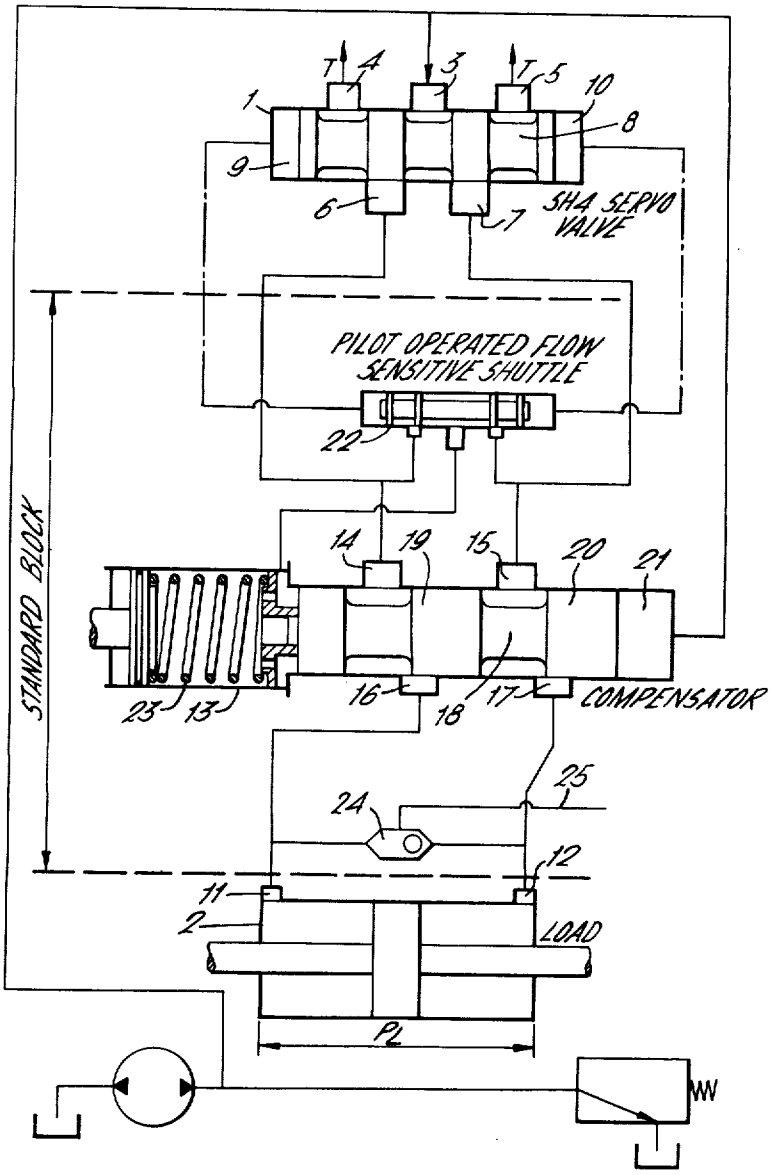

T
4
3
T
5
10
1
8
9
6
7
SHA SERVO VALVE
PILOT OPERATED FLOW SENSITIVE SHUTTLE
22
STANDARD BLOCK
14
19
15
20
21
23
13
16
18
17
COMPENSATOR
25
24
12
11
2
LOAD
PL
W

FIG. 2.

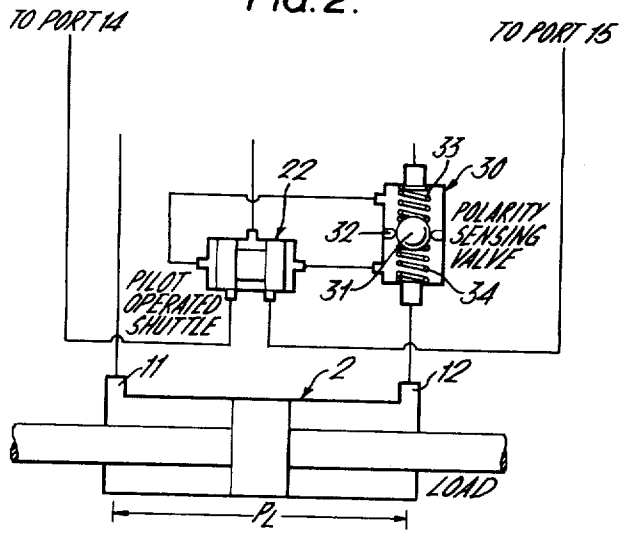

TO PORT 14
TO PORT 15
22
33
30
POLARITY SENSING VALVE
32
31
34
PILOT OPERATED SHUTTLE
11
2
12
LOAD
PL

FIG. 3.

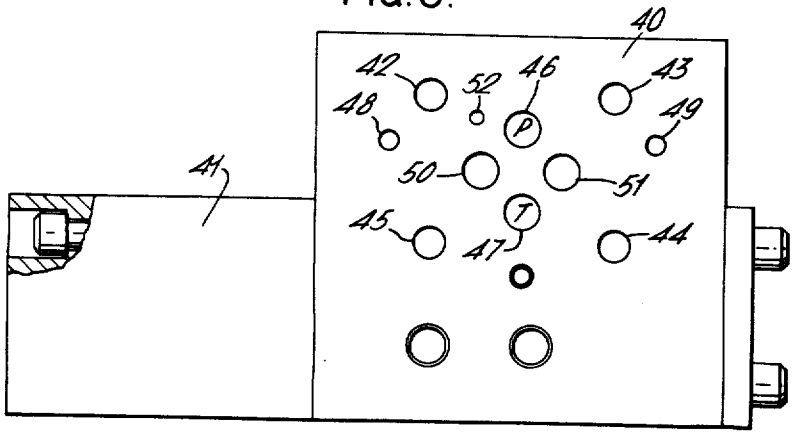

40
42
52
46
43
48
49
P
50
51
41
T
45
47
44

FIG. 4.

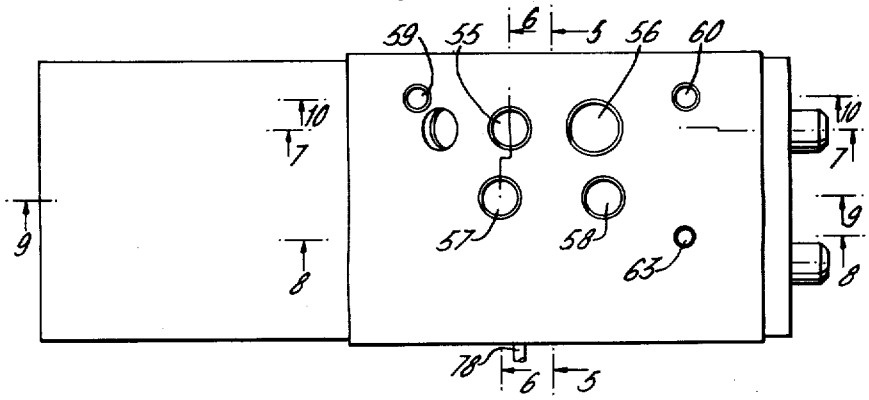


FIG. 5.

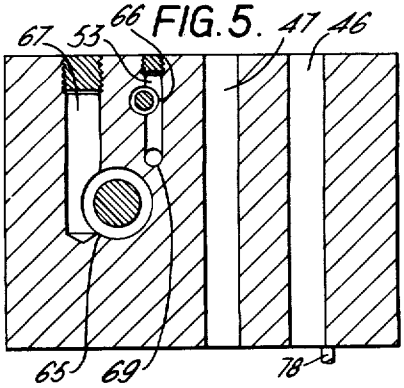


FIG. 6.

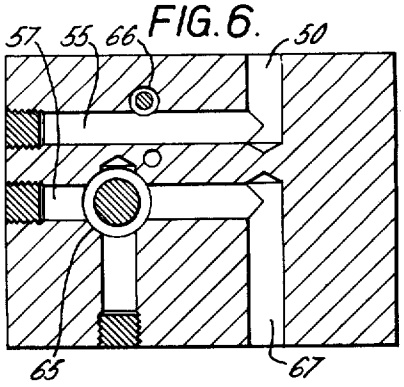
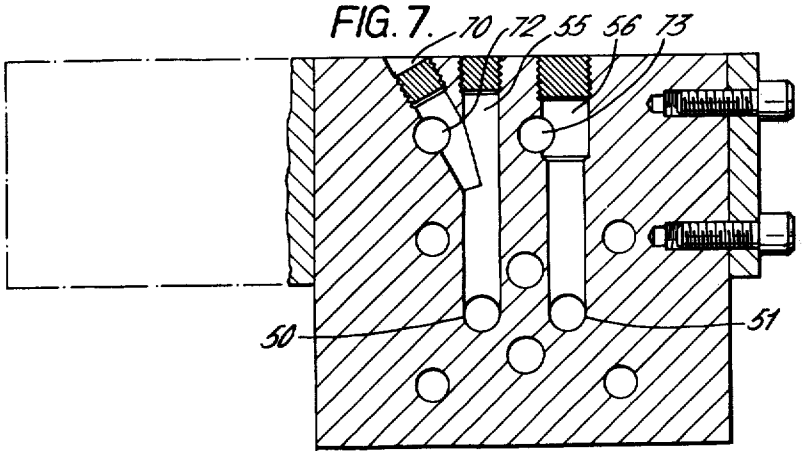


FIG. 7.



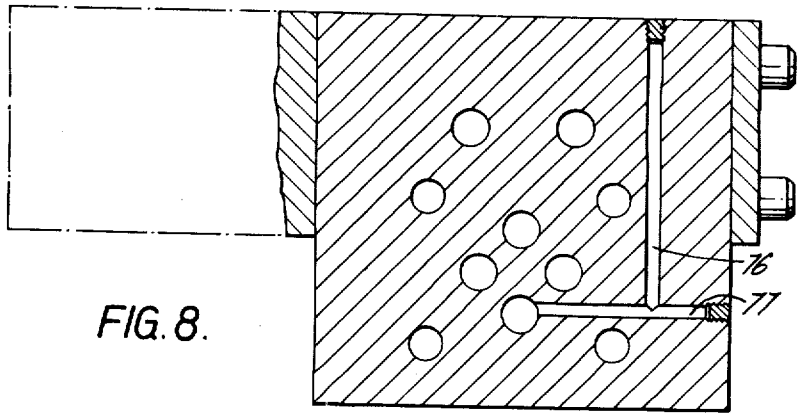


FIG. 8.

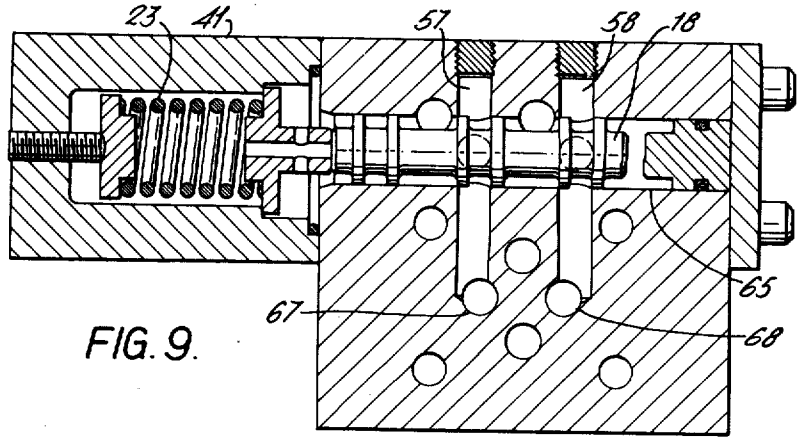


FIG. 9.

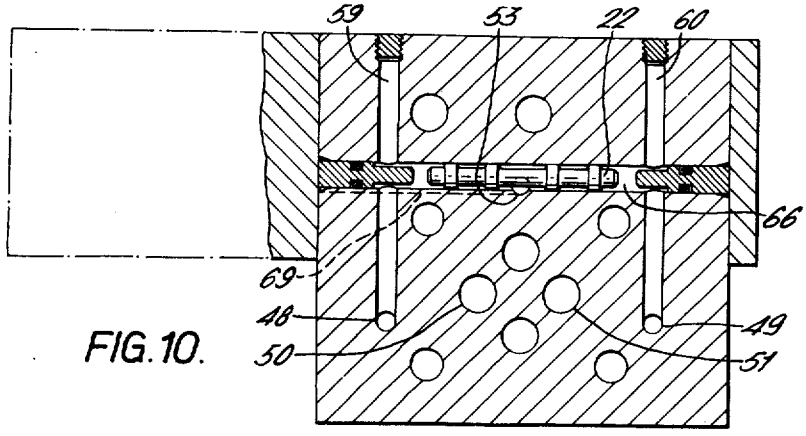


FIG. 10.

HYDRAULIC SYSTEMS

This invention relates to hydraulic systems in which a four-way control valve controls the supply of hydraulic power to move a load.

In such systems, the response to movements of the control valve depends on the magnitude of the load, and where the load may vary within wide limits the system may be difficult to control precisely and reliably. An object of the present invention is to reduce this difficulty.

In some cases the load may tend to overrun, causing cavitation in the supply lines, and the preferred form of this invention provides a means of preventing cavitation and enabling smooth control to be maintained with an over-running load.

In a system according to the present invention, a compensator is connected between the service ports of the control valve and the load, and is arranged to restrict the flow in one or both of the service lines so as to maintain a constant pressure difference between the supply pressure and the pressure at the valve service port supplying fluid to the load. The compensator may be connected in both service lines and arranged to restrict the flow equally in each of them. Alternatively a single-sided compensator may be used, and if the load is liable to over-run it must be connected in the service line which is downstream of the load when overrunning.

In a preferred form of the invention the control valve is a pilot-operated servo valve and the pilot pressure is applied to operate a shuttle valve so as to select the service line supplying fluid to the load and to apply the pressure in this line to the compensator. Where this is not convenient, pilot pressure for operating the shuttle valve may be obtained from a flow-sensing valve in one of the service lines.

In a preferred form of construction the compensator and the pilot operated shuttle valve are incorporated in a block provided with ports on its opposed flat surfaces corresponding to the ports of the control valve so that it can be assembled between the control valve and a surface having the supply and load connections without modification of the control valve.

When a number of systems according to the invention are connected together in an installation provided with a common power supply, shuttle valves may be connected across the load of each system to provide a load sensing supply for control of the supply pressure, for example, by controlling the off-load point of variable off-loading valve or the pressure compensator setting and hence the swash angle of a variable delivery swash plate pump.

The invention will be further described by way of example with reference to the accompanying drawings, in which:

FIG. 1 is a circuit diagram of a system according to the invention.

FIG. 2 shows a modification of the circuit of FIG. 1.

FIG. 3 is a plan view of a unit incorporating a compensator and shuttle valve connected in a circuit according to the invention.

FIG. 4 is an elevation of the unit of FIG. 3.

FIGS. 5, 6, 7, 8, 9, and 10 are sections of the unit taken on the planes indicated in FIG. 4.

Referring first to FIG. 1, a control valve 1 controls the supply of power to a load 2. In the FIGURE this load is shown as a ram, although it could, of course, be any other suitable form of actuator, for example a vane motor. The valve 1 is a four-way valve having the inlet 3 connected to the supply line, a pair of tank ports 4 and 5 exhausting to tank, and a pair of service ports 6 and 7 which by movement of the valve spool 8 are connected, one of them to the tank, and the other to the supply. The valve 1 is a pilot operated servo valve, the pilot stage of which is not shown in the drawing. A separate pilot valve may be used but in a convenient construction the pilot valve is contained within the main valve spool 8. In either case, the pilot pressure for operating the main valve spool appears across the end faces of the spool 8 at 9 and 10.

The supply from the service ports 6 and 7 is applied to ports 11, 12 of the load and according to the invention this is done by way of a compensator 13.

The compensator 13 is a spool valve having a pair of ports 14, 15 connected to the service ports 6, 7 of the servo valve and a pair of outlet ports 16, 17 connected to the ports 11, 12 of the load. The spool 18 of the compensator has a pair of raised lands 19, 20 arranged to co-operate with the ports 14, 15 so as to control the supply of hydraulic fluid into and out of the service ports 6 and 7 of the control valve. One end 21 of the compensator spool 18 is acted on by the supply pressure, the other end of the spool 18 is subjected to the pressure in one of the valve service lines from a shuttle valve 22, and also to the force of a biasing spring 23.

The shuttle valve 22 is a spool valve in which the ends of the spool are acted on by the pilot pressures operating at the ends 9 and 10, of the control valve, the spool moving under this pressure so as to connect the end space of the compensator to whichever of the service ports 6 and 7 is being connected by the control valve to the supply line.

In operation the spring 23 is set up so as to correspond to the pressure to be dropped across each opening of the control valve 1, this pressure being fairly low, for example 125 lbs. per sq. in. When the control valve is moved, for example to the left, in the view shown in the FIGURE, pilot pressure in the valve also operates the shuttle valve 22 connecting the service port 6 to the end space of the compensator 13 where it acts on the compensator spool 18 in addition to the force of the spring 23 so as to oppose the supply pressure applied to the other end 21 of the spool. When the load starts to move and if the pressure at the service port 6 falls, the supply pressure overcomes these combined pressures, moving the spool 18 to the left and causing the lands 19, 20 to close the ports 14, 15 so restricting the the flow of hydraulic fluid as to maintain pressure in the service port 6 at the predetermined drop of 125 lbs. per sq. in. below line pressure set by the spring 23. The rate of movement of the load is therefore set by the opening of a control valve 1 independently of the magnitude of the load at any moment.

Alternatively, if due to an opposing load the pressure at the service port 6 rises, the compensator spool moves to the right to maintain the pressure drop in the service line at 125 lbs. per sq. inch.

Should the load tend to over-run, the pressure in the service port 6 drops, causing the compensator to close, restricting the flow of hydraulic fluid in both service lines so as to maintain this pressure differential so that no cavitation occurs and the load moves under control of the valve 1.

If a number of systems of this kind are to be driven from a common supply whose pressure is controlled by load-sensing means, a ball shuttle valve **24** is connected across the load ports **11** and **12** and the pressure from this is carried through line **25** to the power unit of another system where it may be used to control the unloading point of an off-loading valve or the pressure compensator setting and therefore the swash angle of a variable delivery swash plate pump or other similar control device.

The arrangement described above with reference to FIG. **1** uses the pilot pressure of the main servo control valve for operating the shuttle valve. This may sometimes not be convenient; for example the main control valve may not be pilot operated. In such a case the invention may be carried out with the modification which will now be described with reference to FIG. **2.**

Referring now to this FIGURE, in one of the service lines to the load **2** a flow polarity sensing valve **30** is inserted to provide the necessary pilot pressures to the shuttle valve **22.** The polarity sensing valve **30** comprises a ball **31** which is a free fit in an aperture in a plate **32** and which is maintained central in this aperture by means of a pair of springs **33, 34.** The pilot pressures for operating the shuttle valve **22** are taken from either side of the plate **32.** In operation, any flow into or out of the port **12** of the load **2** has to pass through this valve and does so by displacing the ball **31** to one or other side of the position in which it closes the aperture in the plate **32** against the action of one of the springs **33, 34.** A pressure drop is therefore generated across the valve **30** whose magnitude depends primarily on the stiffness of these springs, and this pressure drop is applied to the ends of the spool of the shuttle valve **22** which is arranged to transmit the pressure of the valve service line to the compensator **13** of FIG. **1.**

In a common construction of a hydraulic control system the control valve is mounted directly on the power unit. In this case both the control valve and the power unit have matching surfaces machined flat in which are formed galleries for carrying the supply service and pilot control pressures between the valve and the power unit. These end at each matching surface in a matching system of galleries and either each opening in one of the surfaces is surrounded by an O-ring seal so that when the valve is bolted to the power unit the necessary connections are automatically made, or a separate sealing plate is provided.

In a preferred manner of carrying out the present invention the compensator and shuttle valve, and load-sensing shuttle if required, are mounted in a unit comprising a rectangular block having machined flat opposed surfaces provided with a corresponding system of passages so that it may be bolted directly between the control valve and the power unit to form a system according to the present invention. The block thus contains the portion within the dotted lines of FIG. **1.**

FIG. **3** shows a unit of this kind in plan, and FIG. **4** shows the same unit in side elevation.

Referring first to FIG. **3,** the unit comprises a rectangular block **40** of which the top face (visible in the FIGURE) and the parallel bottom face are machined flat and provided with corresponding openings. A projection from the block **41** forms a housing for the compensator spring of FIG. **1.** The openings visible in the FIGURE comprise a set of four holes, **42, 43, 44, 45,** which extend right through the unit and accommodate tie bolts by means of which the valve and the compensator unit are firmly secured to the power unit. A passageway **46** extends right through the unit and provides a connection for system pressure from the pump and a similar parallel passage **47** provides the connection to tank for the servo valve and compensator. Two smaller passages **48** and **49** allow pilot pressure to be transmitted from the servo control valve to the shuttle valve which is within the unit **40.**

The openings **50** and **51** form part of the service line. These openings do not extend right through the unit but are drilled in for a short distance from each face. Cross drillings from the side of the unit provide the necessary connections on the valve side and the power unit side to the ports of the compensator. A locating hole **52** may be provided to assist in location during assembly.

FIG. **4** is a side elevation of the block **40** showing a number of drillings which form internal passageways for the interconnections to the compensator and shuttle valve located within the block. The outer ends of each of these drillings is sealed by a screwed plug.

Referring now to this FIGURE, the passageways **55** and **56** provide inlets from the servo valve service port to the compensator and **57** and **58** provide outlets from the compensator back through connections on the power unit to the load; **59** and **60** allow the pilot pressures from the passages **48** and **49** of FIG. **3** to the ends of the shuttle valve which is within the block **40.** The drilling **63** is part of a system of connecting passages which apply system pressure to the end of the compensator spool remote from the spring. A locating pin **78** is provided to assist location during assembly.

FIGS. **5** and **6** are cross-sections of the block **40** in the plane **5—5** and **6—6** respectively indicated in the FIG. **4.** Referring now to those FIGURES, the compensator valve comprises a spool working within a bore **65.** Similarly the shuttle valve comprises a spool working within a further bore **66.**

The service line connection from the control valve **50** is only drilled a short distance into the block, where it meets the cross drilling **55.** Further drillings not shown in FIG. **5** connect this to the appropriate position in the compensator bore so that it forms an inlet port for the compensator valve. The compensator outlet port is formed by the drilling **57** which communicates with the service line outlet **67.** Drillings **55** and drilling **56** shown in FIG. **7** connect the service ports to the ports in the shuttle valve bore. The pressure line **46** and the tank line **47** are drilled straight through the block **40.** A connection exists between the pressure line and one end of the compensator, but this is not visible in the section of FIG. **5.** A drilling **53** passes through the shuttle valve bore **66** to make connection with a passageway **69** conveying the pressure selected by the shuttle valve to the spring end of the compensator.

FIGS. **7, 8, 9,** and **10** are sections of the unit on the planes indicated in FIG. **4.** These sections show the compensator and shuttle valve and the various internal passages by which they are interconnected.

Referring first to FIG. **7,** the service line connections from the valve **50, 51** are connected by passageways **55** and **56,** and the cross drilling **70** to passages **72** and **73** which provide the inlet ports of the compensator valve. This valve will be shown more fully in FIG. **9.**

FIG. **8** is a section taken in the plane of two of the passageways **76, 77** by means of which the supply pres-

sure is transmitted to the end of the compensator spool opposite to the spring.

The section of FIG. **9** is taken through the axis of the compensator spool **18.** One end of the spool is acted on by the bias spring **23** contained in the housing **41.** The other end of the spool is subject to system pressure from the pressure line **46** by way of the passages **76** and **77** shown in FIG. **8.** The service lines **67, 68** which supply the load communicate with the passages **57, 58** which pass through the valve bore **65** to form the outlet ports of the compensator. The spring housing **41** is also connected to the load pressure from the shuttle valve by means of a system of passages, a part of which **53,** 69 appears in FIG. **5.**

FIG. **10** is a section taken in a plane which includes the axis of the shuttle valve.

The shuttle valve spool **22** works in the bore **66** and is acted on at either end by pilot pressures from the pilot pressure lines **48** and **49** which are conveyed to the ends of the shuttle valve spool by means of the passages **59** and **60.** The service lines from the control valve communicate with the passages **55** and **56** (not shown in FIG. **10**) which break through the bore **66** and so provide ports for the selection of the required service line pressure as determined by the pilot pressures. The output from the shuttle valve is applied through the passages **53** and **69,** (see also FIG. **5**) to the spring end of the compensator.

The above arrangement may be simplified by using a compensator with a single land metering the flow in only one of the service lines. If the load is liable to overrun the compensator should be in the line which is downstream of the load in the over-running condition.

The unit as described above does not include any connection for a load-sensing line. If this is required it may be provided by the inclusion of a ball shuttle valve connected to the lines **67, 68** so as to respond to the higher of the pressures in the two lines.

Seals will of course be required at the surfaces of the unit around each of the bores to prevent the escape of fluid, and these have been omitted for clarity.

I claim:

1. A hydraulic system including a source of hydraulic pressure, a load, a four-way control valve arranged to control the supply of hydraulic pressure to said load, said valve having a pair of service ports, a pair of service lines connecting said service ports to said load, a compensator being connected in at least one of said service lines and being arranged to restrict the flow of hydraulic fluid in said service line so as to maintain a constant pressure difference between said source pressure and said pressure at that one of the valve service ports that supplies fluid to said load.

2. A hydraulic system according to claim **1** in which the compensator is connected in both service lines and is arranged to restrict flow equally in each of them.

3. A system according to claim **2** in which the control valve is a pilot-operated servo valve, and the pilot pressure is arranged to operate a shuttle valve so as to select the service line supplying fluid to the load, and to apply the pressure in that line to the compensator.

4. A system according to claim **1** including a shuttle valve, a flow-sensing valve is included in one of the service lines to provide pilot pressures for operating said shuttle valve which selects the service line supplying fluid to the load, and to supply the pressure in this line to said compensator.

5. A compensator and pilot operated shuttle valve incorporated in a block provided with ports on opposed flat surfaces, constructed and arranged so that it can be assembled with a control valve to form a system according to claim **1.**

* * * * *