



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2918128 A1 2015/02/26

(21) **2 918 128**

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) **Date de dépôt PCT/PCT Filing Date:** 2014/08/12
(87) **Date publication PCT/PCT Publication Date:** 2015/02/26
(85) **Entrée phase nationale/National Entry:** 2016/01/12
(86) **N° demande PCT/PCT Application No.:** US 2014/050657
(87) **N° publication PCT/PCT Publication No.:** 2015/026560
(30) **Priorités/Priorities:** 2013/08/19 (US61/867,586);
2014/08/11 (US14/457,056)

(51) **Cl.Int./Int.Cl. H04B 7/26** (2006.01),
H04B 7/15 (2006.01), **H04W 76/02** (2009.01)

(71) **Demandeur/Applicant:**
QUALCOMM INCORPORATED, US

(72) **Inventeurs/Inventors:**
JAFARIAN, AMIN, US;
CHERIAN, GEORGE, US;
TIMARIU, LUIZA, US;
PATIL, ABHISHEK PRAMOD, US;
ABRAHAM, SANTOSH PAUL, US

(74) **Agent:** SMART & BIGGAR

(54) **Titre : LIMITE D'ASSOCIATIONS DANS UN RESEAU A RELAIS**
(54) **Title: ASSOCIATION LIMIT IN RELAY NETWORK**

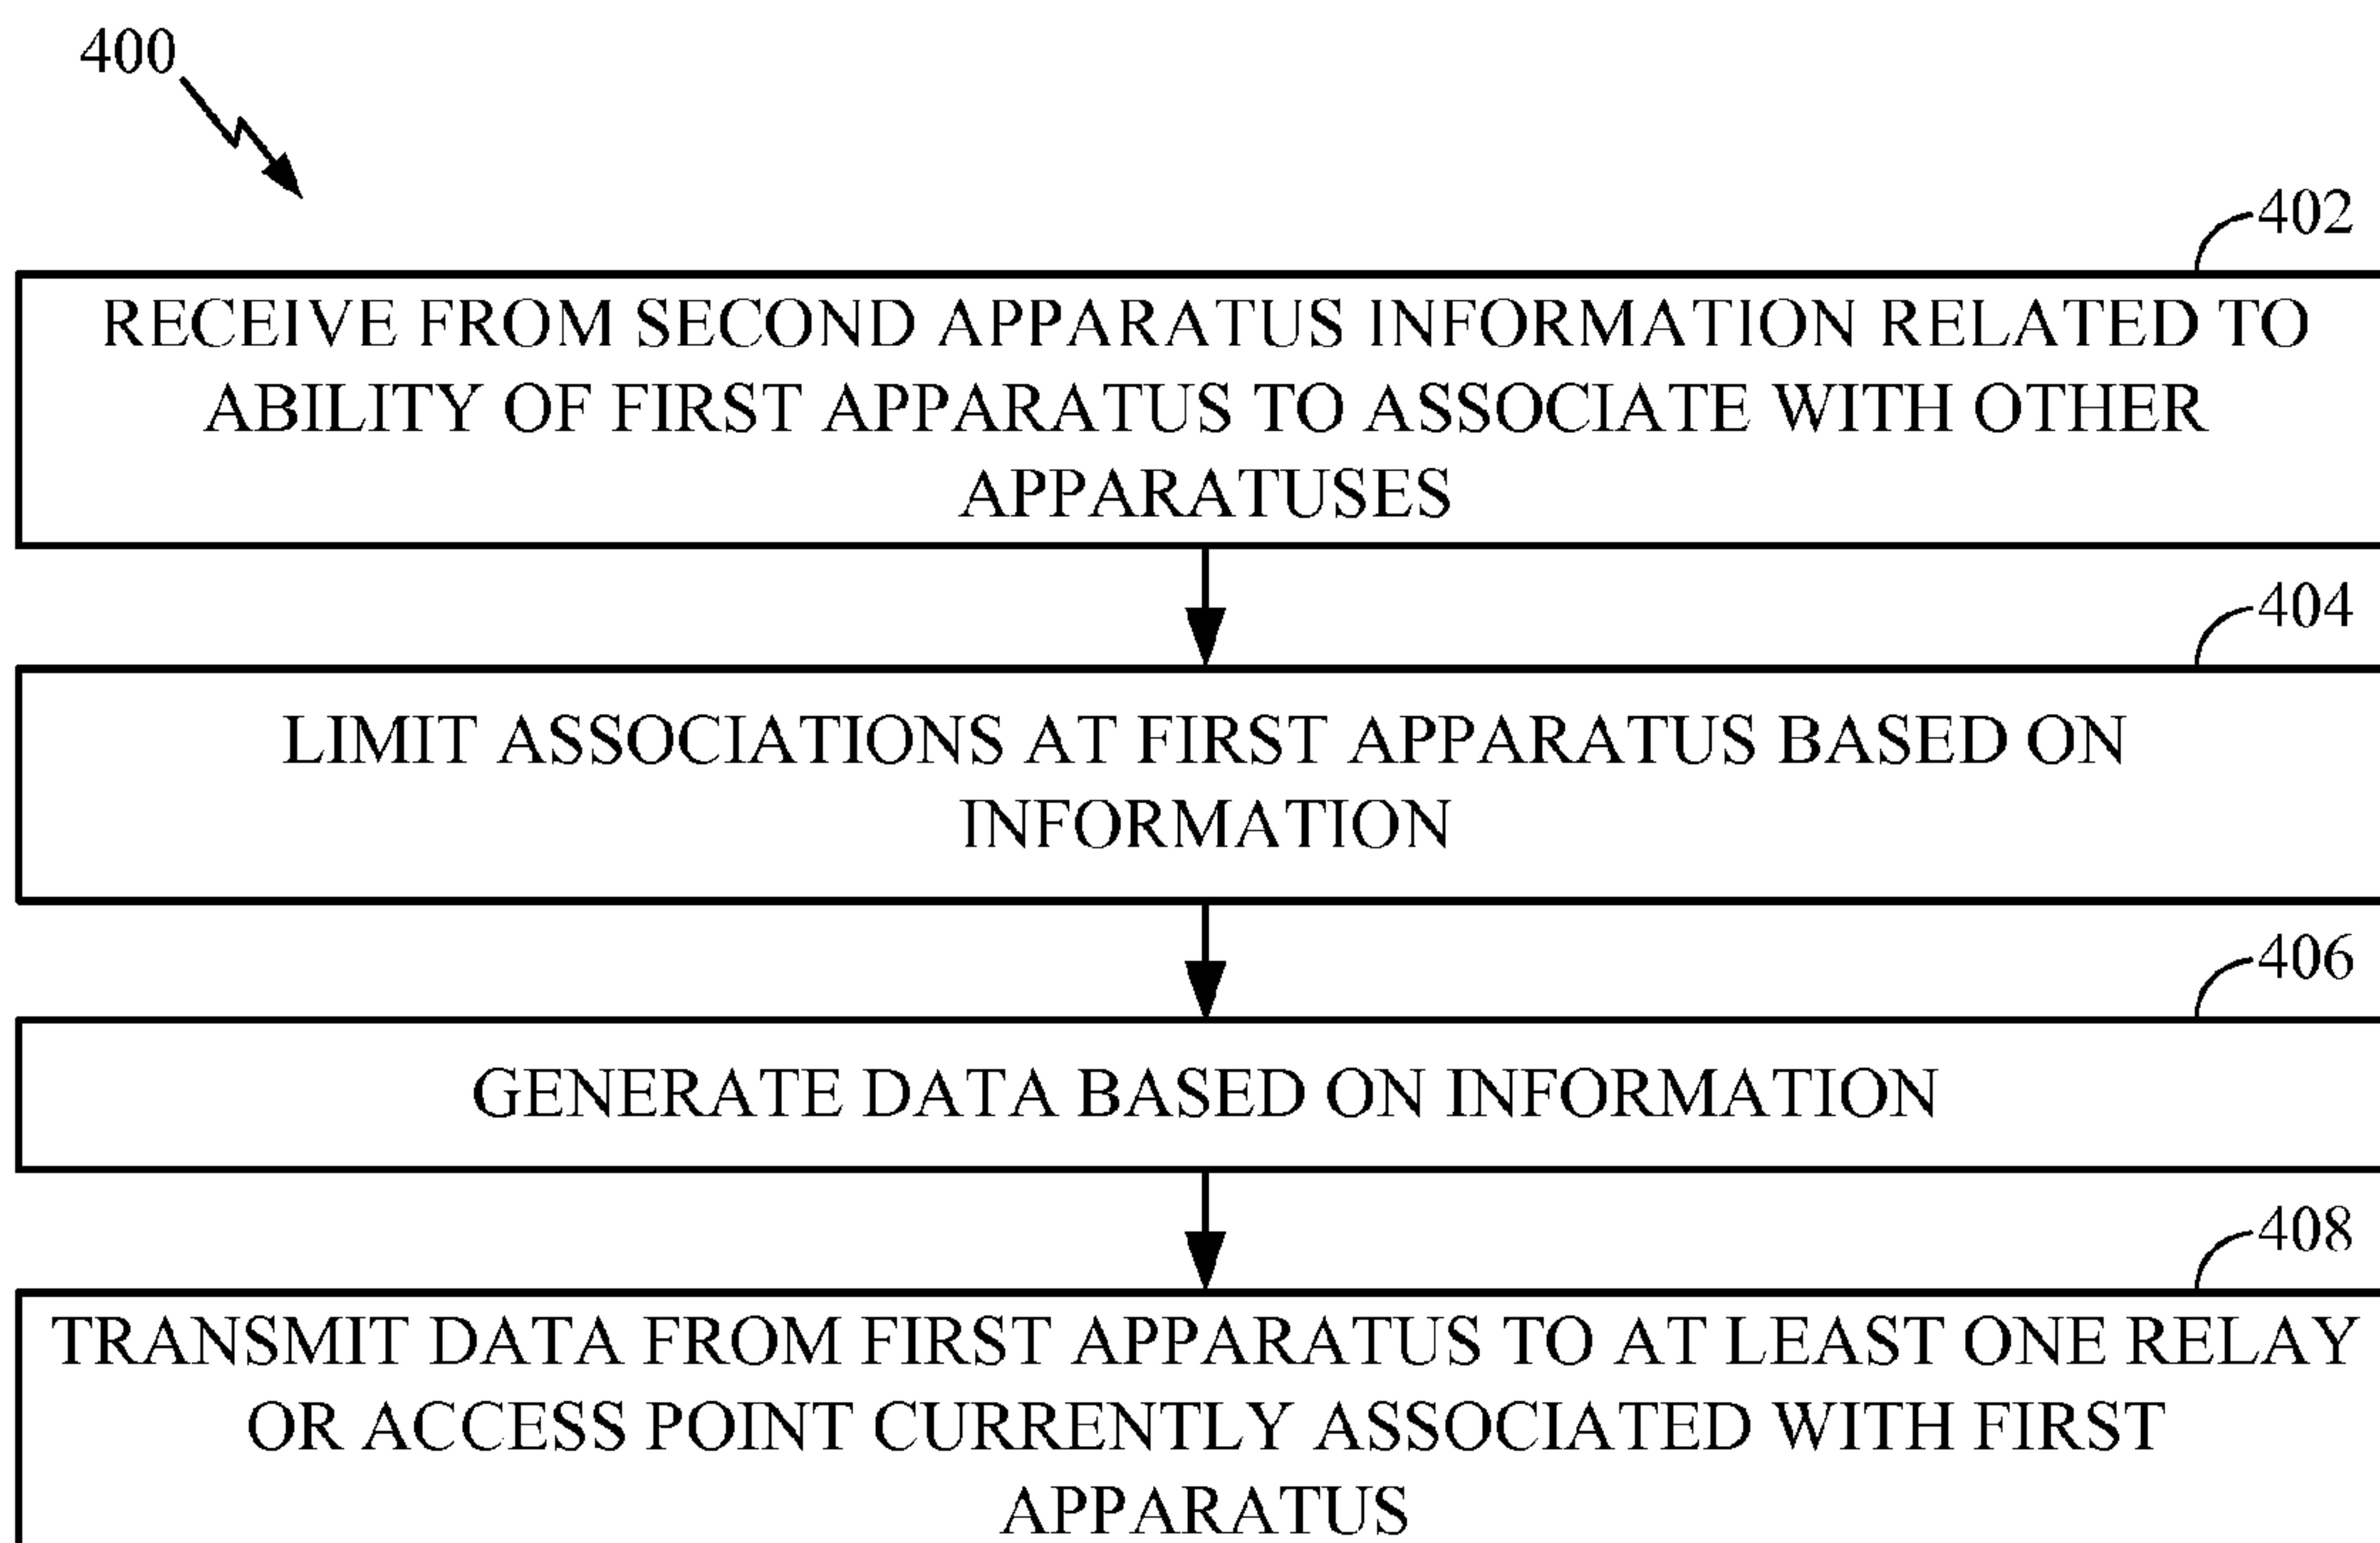


FIG. 4

(57) **Abrégé/Abstract:**

A method, an apparatus, and a computer program product for wireless communication are provided. In aspect, a first apparatus receives from a second apparatus information related to an ability of the second apparatus to associate with other apparatuses, and limits associations at the first apparatus based on the information. In another aspect, the first apparatus associates with a second apparatus, and transmits to the second apparatus information that indicates a number of desirable associations at the second apparatus.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2015/026560 A1

(43) International Publication Date
26 February 2015 (26.02.2015)

WIPO | PCT

(51) International Patent Classification:
H04B 7/26 (2006.01) **H04W 76/02** (2009.01)
H04B 7/15 (2006.01)

(74) Agents: **GELFOUND, Craig A.** et al.; Arent Fox LLP, 1717 K Street, NW, Washington, District of Columbia 20036 (US).

(21) International Application Number:
PCT/US2014/050657

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
12 August 2014 (12.08.2014)

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(25) Filing Language:
English

(26) Publication Language:
English

(30) Priority Data:
61/867,586 19 August 2013 (19.08.2013) US
14/457,056 11 August 2014 (11.08.2014) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
c/o International IP Administration, 5775 Morehouse Drive, San Diego, California 92121-1714 (US).

(72) Inventors: **JAFARIAN, Amin**; c/o QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **CHERIAN, George**; c/o QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **TIMARIU, Luiza**; c/o QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **PATIL, Abhishek Pramod**; c/o QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **ABRAHAM, Santosh Paul**; c/o QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714 (US).

Published:

— with international search report (Art. 21(3))

(54) Title: ASSOCIATION LIMIT IN RELAY NETWORK

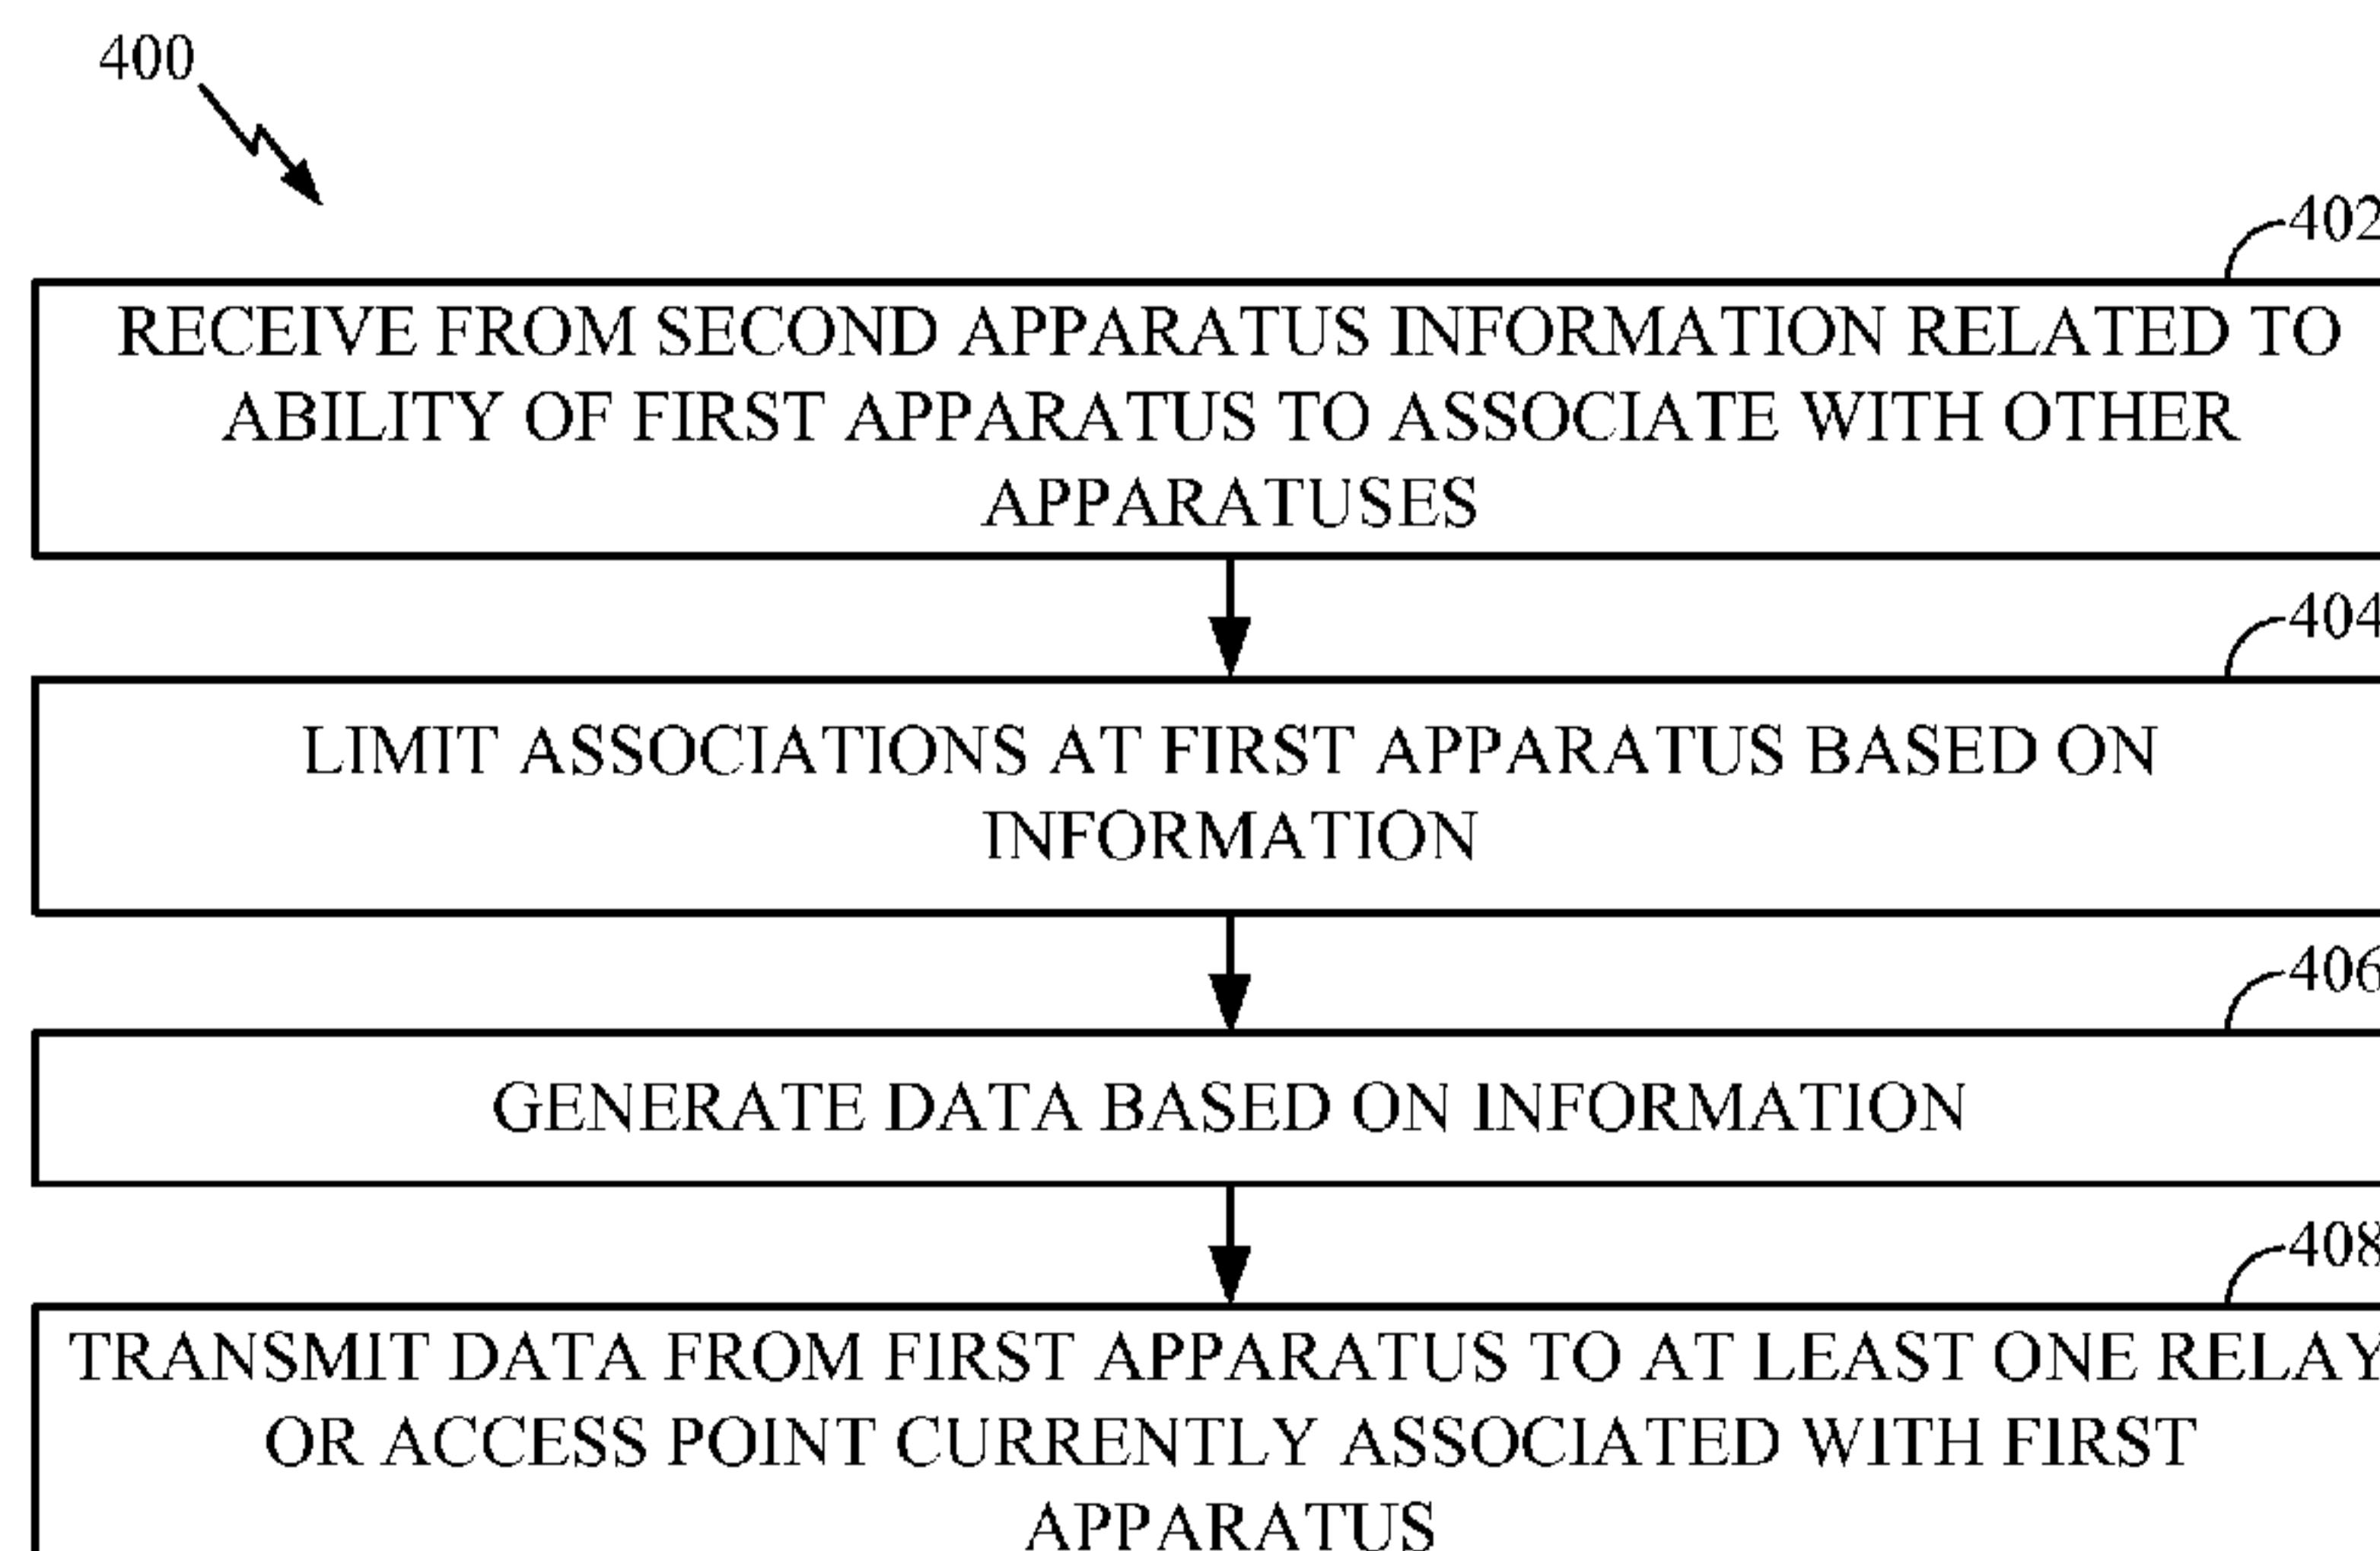


FIG. 4

(57) **Abstract:** A method, an apparatus, and a computer program product for wireless communication are provided. In aspect, a first apparatus receives from a second apparatus information related to an ability of the second apparatus to associate with other apparatuses, and limits associations at the first apparatus based on the information. In another aspect, the first apparatus associates with a second apparatus, and transmits to the second apparatus information that indicates a number of desirable associations at the second apparatus.

WO 2015/026560 A1

ASSOCIATION LIMIT IN RELAY NETWORK

CROSS-REFERENCE TO RELATED APPLICATION(S)

[0001] This application claims the benefit of U.S. Non-Provisional Application Serial No. 14/457,056 entitled “ASSOCIATION LIMIT IN RELAY NETWORK” and filed on August 11, 2014, and U.S. Provisional Application Serial No. 61/867,586, entitled “ASSOCIATION LIMIT IN RELAY NETWORK” and filed on August 19, 2013, which are expressly incorporated by reference herein in their entirety.

BACKGROUND

Field

[0002] The present disclosure relates generally to communication systems, and more particularly, to communicating information related to an ability of a first apparatus to associate with other apparatuses, wherein the information indicates a number of desirable associations at a second apparatus.

Background

[0003] Wireless communication networks are widely deployed to provide various communication services such as voice, video, packet data, messaging, broadcast, etc. These wireless networks may be multiple-access networks capable of supporting multiple users by sharing the available network resources. Examples of such multiple-access networks include Code Division Multiple Access (CDMA) networks, Time Division Multiple Access (TDMA) networks, Frequency Division Multiple Access (FDMA) networks, Orthogonal FDMA (OFDMA) networks, and Single-Carrier FDMA (SC-FDMA) networks.

[0004] In order to address the desire for greater coverage and increased communication range, various schemes are being developed. One such scheme is the sub-1-GHz frequency range (e.g., operating in the 902 - 928 MHz range in the United States) being developed by the Institute of Electrical and Electronics Engineers (IEEE) 802.11ah task force. This development is driven by the desire to utilize a frequency range that has greater wireless range than other IEEE 802.11 groups and has lower obstruction losses.

SUMMARY

[0005] Aspects of the present disclosure provide a first apparatus for wireless communication. The first apparatus is associated with a second apparatus. The first apparatus generally includes a receiver configured to receive from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses and a processing system configured to limit associations at the first apparatus based on the information.

[0006] Aspects of the present disclosure provide a first apparatus for wireless communication. The first apparatus generally includes a processing system configured to associate with a second apparatus and a transmitter configured to transmit to the second apparatus information that indicates a number of desirable associations at the second apparatus.

[0007] Aspects of the present disclosure provide a method for wireless communication by a first apparatus. The first apparatus is associated with a second apparatus. The method generally includes receiving from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses and limiting associations at the first apparatus based on the information.

[0008] Aspects of the present disclosure provide a method for wireless communication by a first apparatus. The method generally includes associating with a second apparatus and transmitting to the second apparatus information that indicates a number of desirable associations at the second apparatus.

[0009] Aspects of the present disclosure provide a first apparatus for wireless communication. The first apparatus is associated with a second apparatus. The first apparatus generally includes means for receiving from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses and means for limiting associations at the first apparatus based on the information.

[0010] Aspects of the present disclosure provide a first apparatus for wireless communication. The first apparatus generally includes means for associating with a second apparatus and means for transmitting to the second apparatus information that indicates a number of desirable associations at the second apparatus.

[0011] Aspects of the present disclosure provide a computer program product for wireless communications by a first apparatus, comprising a computer-readable medium having instructions stored thereon. The first apparatus is associated with a second apparatus. The instructions are generally executable to receive from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses and limit associations at the first apparatus based on the information.

[0012] Aspects of the present disclosure provide a computer program product for wireless communications by a first apparatus, comprising a computer-readable medium having instructions stored thereon. The instructions are generally executable to associate with a second apparatus and transmit to the second apparatus information that indicates a number of desirable associations at the second apparatus

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] So that the manner in which the above-recited features of the present disclosure can be understood in detail, a more particular description, briefly summarized above, may be had by reference to aspects, some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only certain typical aspects of this disclosure and are therefore not to be considered limiting of its scope, for the description may admit to other equally effective aspects.

[0014] FIG. 1 illustrates a diagram of an example wireless communications network, in accordance with certain aspects of the present disclosure.

[0015] FIG. 2 illustrates a block diagram of an example access point and user terminals, in accordance with certain aspects of the present disclosure.

[0016] FIG. 3 illustrates a block diagram of an example wireless device, in accordance with certain aspects of the present disclosure.

[0017] FIG. 4 illustrates a block diagram of example operations for wireless communications by a first apparatus, in accordance with certain aspects of the present disclosure.

[0018] FIG. 4A illustrates example means capable of performing the operations shown in FIG. 4.

[0019] FIG. 5 illustrates a block diagram of example operations for wireless communications by a first apparatus, in accordance with certain aspects of the present disclosure.

[0020] FIG. 5A illustrates example means capable of performing the operations shown in FIG. 5.

DETAILED DESCRIPTION

[0021] Various aspects of the disclosure are described more fully hereinafter with reference to the accompanying drawings. This disclosure may, however, be embodied in many different forms and should not be construed as limited to any specific structure or function presented throughout this disclosure. Rather, these aspects are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Based on the teachings herein one skilled in the art should appreciate that the scope of the disclosure is intended to cover any aspect of the disclosure disclosed herein, whether implemented independently of or combined with any other aspect of the disclosure. For example, an apparatus may be implemented or a method may be practiced using any number of the aspects set forth herein. In addition, the scope of the disclosure is intended to cover such an apparatus or method which is practiced using other structure, functionality, or structure and functionality in addition to or other than the various aspects of the disclosure set forth herein. It should be understood that any aspect of the disclosure disclosed herein may be embodied by one or more elements of a claim.

[0022] Although particular aspects are described herein, many variations and permutations of these aspects fall within the scope of the disclosure. Although some benefits and advantages of the preferred aspects are mentioned, the scope of the disclosure is not intended to be limited to particular benefits, uses, or objectives. Rather, aspects of the disclosure are intended to be broadly applicable to different wireless technologies, system configurations, networks, and transmission protocols, some of which are illustrated by way of example in the figures and in the following description of the preferred aspects. The detailed description and drawings are

merely illustrative of the disclosure rather than limiting, the scope of the disclosure being defined by the appended claims and equivalents thereof.

[0023] The acronyms listed below may be used herein, consistent with commonly recognized usages in the field of wireless communications. Other acronyms may also be used herein, and if not defined in the list below, are defined where first appearing herein.

ACKAcknowledgement
A-MPDUAggregated Media Access Control Protocol Data Unit
APAccess Point
BABlock ACK
BARBlock ACK Request
CRCCyclic Redundancy Check
DIFSDistributed Interframe Space
EOFEnd of Frame
EIFSExtended Interframe Space
FCSFrame Check Sequence
IDIdentifier
IEEEInstitute of Electrical and Electronic Engineers
LTFLong Training Field
MACMedia Access Control
MSBMost Significant Bit
MIMOMultiple Input Multiple Output
MPDUMAC Protocol Data Unit
MUMulti-User
MU-MIMOMulti-User Multiple Input Multiple Output
NDPNull Data Packet
OFDMOrthogonal Frequency Division Modulation
OFDMAOrthogonal Frequency Division Multiple Access
PHYPhysical Layer
PLCPPhysical Layer Convergence Protocol
PPDUPLCP Protocol Data Unit

PSDU.....PLCP Service Data Unit
 QoS.....Quality of Service
 RDGReverse Direction Grant
 SDMASpatial-Division Multiple Access
 SIFS.....Short Interframe Space
 SIGSignal (e.g., Sub 1GHz)
 STAStation
 STBC.....Space-Time Block Coding
 STF.....Short Training Field
 SU.....Single User
 TCP.....Transmission Control Protocol
 VHT.....Very High Throughput
 WLAN.....Wireless Local Area Network

AN EXAMPLE WIRELESS COMMUNICATION SYSTEM

[0024] The techniques described herein may be used for various broadband wireless communication systems, including communication systems that are based on an orthogonal multiplexing scheme. Examples of such communication systems include Spatial Division Multiple Access (SDMA), Time Division Multiple Access (TDMA), Orthogonal Frequency Division Multiple Access (OFDMA) systems, Single-Carrier Frequency Division Multiple Access (SC-FDMA) systems, and so forth. An SDMA system may utilize sufficiently different directions to simultaneously transmit data belonging to multiple user terminals. A TDMA system may allow multiple user terminals to share the same frequency channel by dividing the transmission signal into different time slots, each time slot being assigned to different user terminal. An OFDMA system utilizes orthogonal frequency division multiplexing (OFDM), which is a modulation technique that partitions the overall system bandwidth into multiple orthogonal sub-carriers. These sub-carriers may also be called tones, bins, etc. With OFDM, each sub-carrier may be independently modulated with data. An SC-FDMA system may utilize interleaved FDMA (IFDMA) to transmit on sub-carriers that are distributed across the system

bandwidth, localized FDMA (LFDMA) to transmit on a block of adjacent sub-carriers, or enhanced FDMA (EFDMA) to transmit on multiple blocks of adjacent sub-carriers. In general, modulation symbols are sent in the frequency domain with OFDM and in the time domain with SC-FDMA.

[0025] The teachings herein may be incorporated into (e.g., implemented within or performed by) a variety of wired or wireless apparatuses (e.g., nodes). In some aspects, a wireless node implemented in accordance with the teachings herein may comprise an access point or an access terminal.

[0026] An access point (“AP”) may comprise, be implemented as, or known as a Node B, Radio Network Controller (“RNC”), evolved Node B (eNB), Base Station Controller (“BSC”), Base Transceiver Station (“BTS”), Base Station (“BS”), Transceiver Function (“TF”), Radio Router, Radio Transceiver, Basic Service Set (“BSS”), Extended Service Set (“ESS”), Radio Base Station (“RBS”), or some other terminology.

[0027] An access terminal (“AT”) may comprise, be implemented as, or known as a subscriber station, a subscriber unit, a mobile station (MS), a remote station, a remote terminal, a user terminal (UT), a user agent, a user device, user equipment (UE), a user station, or some other terminology. In some implementations, an access terminal may comprise a cellular telephone, a cordless telephone, a Session Initiation Protocol (“SIP”) phone, a wireless local loop (“WLL”) station, a personal digital assistant (“PDA”), a handheld device having wireless connection capability, a Station (“STA”), or some other suitable processing device connected to a wireless modem. Accordingly, one or more aspects taught herein may be incorporated into a phone (e.g., a cellular phone or smart phone), a computer (e.g., a laptop), a tablet, a portable communication device, a portable computing device (e.g., a personal data assistant), an entertainment device (e.g., a music or video device, or a satellite radio), a global positioning system (GPS) device, or any other suitable device that is configured to communicate via a wireless or wired medium. In some aspects, the node is a wireless node. Such wireless node may provide, for example, connectivity for or to a network (e.g., a wide area network such as the Internet or a cellular network) via a wired or wireless communication link.

[0028] FIG. 1 illustrates a multiple-access multiple-input multiple-output (MIMO) system 100 with access points and user terminals. For simplicity, only one access

point 110 is shown in FIG. 1. An access point is generally a fixed station that communicates with the user terminals and may also be referred to as a base station or some other terminology. A user terminal may be fixed or mobile and may also be referred to as a mobile station, a wireless device, or some other terminology. Access point 110 may communicate with one or more user terminals 120 at any given moment on the downlink and uplink. The downlink (i.e., forward link) is the communication link from the access point to the user terminals, and the uplink (i.e., reverse link) is the communication link from the user terminals to the access point. A user terminal may also communicate peer-to-peer (or device-to-device) with another user terminal. A system controller 130 couples to and provides coordination and control for the access points.

[0029] While portions of the following disclosure will describe user terminals 120 capable of communicating via Spatial Division Multiple Access (SDMA), for certain aspects, the user terminals 120 may also include some user terminals that do not support SDMA. Thus, for such aspects, an AP 110 may be configured to communicate with both SDMA and non-SDMA user terminals. This approach may conveniently allow older versions of user terminals (“legacy” stations) to remain deployed in an enterprise, extending their useful lifetime, while allowing newer SDMA user terminals to be introduced as deemed appropriate.

[0030] In some configurations, the user terminal may act as a relay point between an access point and user terminal, or two user terminals. For example, referring to FIG. 1, the user terminal 120f may act as a relay between the AP 110 and the user terminal 120g. In another example, the user terminal 120g may act as a relay between the user terminal 120f and the user terminal 120h. Those skilled in the art will be readily able to implement the appropriate protocol for any wireless node depending on the particular application and the overall design constraints imposed on the overall system.

[0031] The system 100 employs multiple transmit and multiple receive antennas for data transmission on the downlink and uplink. The access point 110 is equipped with N_{ap} antennas and represents the multiple-input (MI) for downlink transmissions and the multiple-output (MO) for uplink transmissions. A set of K selected user terminals 120 collectively represents the multiple-output for downlink transmissions and the multiple-input for uplink transmissions. For pure SDMA, it is

desired to have $N_{ap} \geq K \geq 1$ if the data symbol streams for the K user terminals are not multiplexed in code, frequency or time by some means. K may be greater than N_{ap} if the data symbol streams can be multiplexed using TDMA technique, different code channels with CDMA, disjoint sets of subbands with OFDM, and so on. Each selected user terminal transmits user-specific data to and/or receives user-specific data from the access point. In general, each selected user terminal may be equipped with one or multiple antennas (i.e., $N_{ut} \geq 1$). The K selected user terminals can have the same or different number of antennas.

[0032] The SDMA system may be a time division duplex (TDD) system or a frequency division duplex (FDD) system. For a TDD system, the downlink and uplink share the same frequency band. For an FDD system, the downlink and uplink use different frequency bands. MIMO system 100 may also utilize a single carrier or multiple carriers for transmission. Each user terminal may be equipped with a single antenna (e.g., in order to keep costs down) or multiple antennas (e.g., where the additional cost can be supported). The system 100 may also be a TDMA system if the user terminals 120 share the same frequency channel by dividing transmission/reception into different time slots, each time slot being assigned to different user terminal 120.

[0033] FIG. 2 illustrates a block diagram of access point 110 and two user terminals 120m and 120x in MIMO system 100. The access point 110 is equipped with N_t antennas 224a through 224t. User terminal 120m is equipped with $N_{ut,m}$ antennas 252ma through 252mu, and user terminal 120x is equipped with $N_{ut,x}$ antennas 252xa through 252xu. The access point 110 is a transmitting entity for the downlink and a receiving entity for the uplink. Each user terminal 120 is a transmitting entity for the uplink and a receiving entity for the downlink. As used herein, a “transmitting entity” is an independently operated apparatus or device capable of transmitting data via a wireless channel, and a “receiving entity” is an independently operated apparatus or device capable of receiving data via a wireless channel. In the following description, the subscript “dn” denotes the downlink, the subscript “up” denotes the uplink, N_{up} user terminals are selected for simultaneous transmission on the uplink, N_{dn} user terminals are selected for simultaneous transmission on the downlink, N_{up} may or may not be equal to N_{dn} , and N_{up} and N_{dn} may be static values

or can change for each scheduling interval. The beam-steering or some other spatial processing technique may be used at the access point and user terminal.

[0034] On the uplink, at each user terminal 120 selected for uplink transmission, a transmit (TX) data processor 288 receives traffic data from a data source 286 and control data from a controller 280. TX data processor 288 processes (e.g., encodes, interleaves, and modulates) the traffic data for the user terminal based on the coding and modulation schemes associated with the rate selected for the user terminal and provides a data symbol stream. A TX spatial processor 290 performs spatial processing on the data symbol stream and provides $N_{ut,m}$ transmit symbol streams for the $N_{ut,m}$ antennas. Each transmitter unit (TMTR) 254 receives and processes (e.g., converts to analog, amplifies, filters, and frequency upconverts) a respective transmit symbol stream to generate an uplink signal. $N_{ut,m}$ transmitter units 254 provide $N_{ut,m}$ uplink signals for transmission from $N_{ut,m}$ antennas 252 to the access point.

[0035] N_{up} user terminals may be scheduled for simultaneous transmission on the uplink. Each of these user terminals performs spatial processing on its data symbol stream and transmits its set of transmit symbol streams on the uplink to the access point.

[0036] At access point 110, N_{ap} antennas 224a through 224ap receive the uplink signals from all N_{up} user terminals transmitting on the uplink. Each antenna 224 provides a received signal to a respective receiver unit (RCVR) 222. Each receiver unit 222 performs processing complementary to that performed by transmitter unit 254 and provides a received symbol stream. An RX spatial processor 240 performs receiver spatial processing on the N_{ap} received symbol streams from N_{ap} receiver units 222 and provides N_{up} recovered uplink data symbol streams. The receiver spatial processing is performed in accordance with the channel correlation matrix inversion (CCMI), minimum mean square error (MMSE), soft interference cancellation (SIC), or some other technique. Each recovered uplink data symbol stream is an estimate of a data symbol stream transmitted by a respective user terminal. An RX data processor 242 processes (e.g., demodulates, deinterleaves, and decodes) each recovered uplink data symbol stream in accordance with the rate used for that stream

to obtain decoded data. The decoded data for each user terminal may be provided to a data sink 244 for storage and/or a controller 230 for further processing.

[0037] On the downlink, at access point 110, a TX data processor 210 receives traffic data from a data source 208 for N_{dn} user terminals scheduled for downlink transmission, control data from a controller 230, and possibly other data from a scheduler 234. The various types of data may be sent on different transport channels. TX data processor 210 processes (e.g., encodes, interleaves, and modulates) the traffic data for each user terminal based on the rate selected for that user terminal. TX data processor 210 provides N_{dn} downlink data symbol streams for the N_{dn} user terminals. A TX spatial processor 220 performs spatial processing (such as a precoding or beamforming, as described in the present disclosure) on the N_{dn} downlink data symbol streams, and provides N_{ap} transmit symbol streams for the N_{ap} antennas. Each transmitter unit 222 receives and processes a respective transmit symbol stream to generate a downlink signal. N_{ap} transmitter units 222 providing N_{ap} downlink signals for transmission from N_{ap} antennas 224 to the user terminals.

[0038] At each user terminal 120, $N_{ut,m}$ antennas 252 receive the N_{ap} downlink signals from access point 110. Each receiver unit 254 processes a received signal from an associated antenna 252 and provides a received symbol stream. An RX spatial processor 260 performs receiver spatial processing on $N_{ut,m}$ received symbol streams from $N_{ut,m}$ receiver units 254 and provides a recovered downlink data symbol stream for the user terminal. The receiver spatial processing is performed in accordance with the CCMI, MMSE or some other technique. An RX data processor 270 processes (e.g., demodulates, deinterleaves and decodes) the recovered downlink data symbol stream to obtain decoded data for the user terminal.

[0039] At each user terminal 120, a channel estimator 278 estimates the downlink channel response and provides downlink channel estimates, which may include channel gain estimates, SNR estimates, noise variance and so on. Similarly, a channel estimator 228 estimates the uplink channel response and provides uplink channel estimates. Controller 280 for each user terminal typically derives the spatial filter matrix for the user terminal based on the downlink channel response matrix

$H_{dn,m}$ for that user terminal. Controller 230 derives the spatial filter matrix for the access point based on the effective uplink channel response matrix $H_{up,eff}$. Controller 280 for each user terminal may send feedback information (e.g., the downlink and/or uplink eigenvectors, eigenvalues, SNR estimates, and so on) to the access point. Controllers 230 and 280 also control the operation of various processing units at access point 110 and user terminal 120, respectively.

[0040] FIG. 3 illustrates various components that may be utilized in a wireless device 302 that may be employed within the MIMO system 100. The wireless device 302 is an example of a device that may be configured to implement the various methods described herein. The wireless device 302 may be an access point 110 or a user terminal 120.

[0041] The wireless device 302 may include a processor 304 which controls operation of the wireless device 302. The processor 304 may also be referred to as a central processing unit (CPU). The wireless device 302 may also include a generator 305 for generating data or information. The data or information generated by the generator 305 may be stored in a memory 306. The memory 306, which may include both read-only memory (ROM) and random access memory (RAM), provides instructions and data to the processor 304. A portion of the memory 306 may also include non-volatile random access memory (NVRAM). The processor 304 typically performs logical and arithmetic operations based on program instructions stored within the memory 306. The instructions in the memory 306 may be executable to implement the methods described herein.

[0042] The wireless device 302 may also include a housing 308 that may include a transmitter 310 and a receiver 312 to allow transmission and reception of data between the wireless device 302 and a remote location. The transmitter 310 and receiver 312 may be combined into a transceiver 314. A single or a plurality of transmit antennas 316 may be attached to the housing 308 and electrically coupled to the transceiver 314. The wireless device 302 may also include (not shown) multiple transmitters, multiple receivers, and multiple transceivers.

[0043] The wireless device 302 may also include a signal detector 318 that may be used in an effort to detect and quantify the level of signals received by the transceiver 314. The signal detector 318 may detect such signals as total energy, energy per subcarrier per symbol, power spectral density and other signals. The wireless device

302 may also include a digital signal processor (DSP) 320 for use in processing signals.

[0044] The various components of the wireless device 302 may be coupled together by a bus system 322, which may include a power bus, a control signal bus, and a status signal bus in addition to a data bus.

[0045] As stated above, a user terminal (station) may act as a relay point between an access point and a user terminal, or two user terminals. In an aspect, user terminals may participate in a multi-hop relay structure, wherein a number of user terminals may act as relay points between an access point and a user terminal, or two user terminals. For example, referring to FIG. 1, the AP 110, the user terminal 120f, the user terminal 120g, and the user terminal 120h may be in a multi-hop relay, wherein the user terminal 120f and the user terminal 120g act as relay points between the AP 110 and the user terminal 120h. In the example of the multi-hop relay, in order for the AP 110 to communicate information to the user terminal 120h, the AP 110 may first pass the information to the user terminal 120f (e.g., first hop), which may then generate data based on the received information and pass the data to the user terminal 120g (e.g., second hop). The user terminal 120g may similarly generate second data based on the received first data and pass the second data to the user terminal 120h (e.g., third hop). Hence, the user terminal 120h may be considered to be three hops away from the AP 110. The user terminal 120h may communicate information to the AP 110 by passing the information through the three-hop relay reverse to the operation described above.

[0046] In a multi-hop relay, a root access point (root AP) (e.g., AP 110) may need to limit a number of stations or relays associated to the root AP because of capacity issues related to buffer size, memory, or airtime limitations, for example. Generally, the root AP may not have control of the number stations or relays that are ultimately associated to the root AP via the relay structure because associations are performed locally by a relay. For example, referring to FIG. 1, the user terminal 120g may associate with the user terminal 120h without permission or restriction from the AP 110. The AP 110 may only learn of the association when the user terminal 120g passes information indicating the association up the relay tree (e.g., the information is passed from the user terminal 120g, to the user terminal 120f, and then to the AP 110).

[0047] In an aspect of the disclosure, the root AP may send information to a relay indicating an ability of the root AP to associate with stations or relays. For example, the information may indicate that the root AP has reached a maximum capacity for supporting stations or relays associated to the root AP, and therefore no new associations at the relay will be allowed. In another example, the information may indicate a remaining capacity for supporting associations. In a further example, the information may indicate a number of stations or relays that are allowed to be associated at the relay.

[0048] The relay may limit a number of associations at the relay based on the information from the root AP. The relay may limit the number of associations by dropping a current association with a station or relay, allowing only a maximum number of new associations, and/or disallowing any new associations.

[0049] The root AP may send the information to the relay by advertising the information in a beacon frame. The information may be included in an information element or relay element of the beacon frame. The relay may copy the information into a beacon frame of the relay and advertise the information to other relays.

[0050] In an aspect, the information may indicate a number of relays that can newly associate with the root AP. In another aspect, the information may indicate a number of stations and relays that can newly associate with the root AP. In a further aspect, the information may be one bit set to a value that indicates whether the root AP will accept any stations and relays for new association.

[0051] In an aspect, the information may limit a number of associations allowed at the relay according to a number of hops between the root AP and the relay. For example, if the relay is three hops away from the root AP, then the relay may be limited to associating with a maximum of three stations or relays. The information may be included in a number of fields of the beacon frame, wherein each field may define the limitation on the number of allowed associations per number of hops away from the root AP. In the example, the value of the maximum number of allowed associations at the relay is equal to the number of hops the relay is away from the root AP. However, the root AP may arbitrarily set any value for the maximum number of allowed associations at the relay corresponding to the number of hops the relay is away from the root AP.

[0052] Table 1 below shows an example of the information limiting the number of associations allowed at the relay according to a number of hops between the root AP and the relay. Although the table only provides information for a maximum of three hops, any number of hops along with a corresponding number of allowed associations may be included in the information sent from the root AP to the relay.

Number of Hops Between Root AP and Relay	Number of Allowed Associations at Relay
1	1
2	2
3	3

Table 1

[0053] In an aspect, the relay may generate data based on the information limiting the number of associations allowed at the relay. The relay may transmit (e.g., broadcast) the data to one or more other relays or access points currently associated with the relay. The data may indicate a number of desirable associations at the one or more relays or access points. Alternatively, the data may indicate a number of stations, relays, or stations and relays that can newly associate with the relay or the one or more other relays or access points. In an example operation, when the data indicates that the number of stations allowed to newly associate with the relay or the one or more other relays or access points is zero, then stations receiving the data (e.g., via hearing the broadcast) may determine to avoid association with the relay or the one or more other relays or access points.

[0054] FIG. 4 is a block diagram of example operations 400 for wireless communications by a first apparatus, in accordance with aspects of the present disclosure. The first apparatus may be associated with a second apparatus.

[0055] At 402, the first apparatus receives from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses. At 404, the first apparatus limits associations at the first apparatus based on the information. The first apparatus may limit the associations by dropping at least one current association, allowing a maximum number of new associations, and/or disallowing any new associations.

[0056] In an aspect, the information may indicate a number of stations, relays, or stations and relays that can newly associate with the second apparatus. Accordingly, the first apparatus may limit a number of associations based on the number of stations, relays, or stations and relays that can newly associate with the second apparatus.

[0057] In a further aspect, the information may indicate a number of desirable associations at the first apparatus. The number of desirable associations may be based on a number of hops between the first apparatus and the second apparatus. Accordingly, the first apparatus may limit a number of associations based on the number of desirable associations.

[0058] In another aspect, the information may be one bit set to a value that indicates whether the second apparatus will accept any new associations. Accordingly, the first apparatus may limit the associations at the first apparatus to a current number of associations when the one bit is set to a value that indicates that the second apparatus will not accept any new associations.

[0059] At 406, the first apparatus generates a data based on the information. At 408, the first apparatus transmits the data from the first apparatus to at least one relay or access point currently associated with the first apparatus. The first apparatus may transmit the data via broadcast.

[0060] In an aspect, the data indicates a number of desirable associations at the at least one relay or access point. The number of desirable associations may be limited according to: 1) a number of hops between the second apparatus and the at least one relay or access point; 2) a number of stations that can newly associate with the at least one relay or access point; 3) a number of relays that can newly associate with the at least one relay or access point; and/or 4) a number of stations and relays that can newly associate with the at least one relay or access point. In another aspect, the data may indicate a number of stations, relays, or stations and relays that can newly associate with the first apparatus or the at least one relay or access point.

[0061] In an aspect, the data may be transmitted via a beacon frame. Particularly, the data may be transmitted via an information element of the beacon frame. Alternatively, the data may be transmitted via a relay element of the beacon frame.

[0062] FIG. 5 is a block diagram of example operations 500 for wireless communications by a first apparatus, in accordance with aspects of the present disclosure.

[0063] At 502, the first apparatus associates with a second apparatus. At 504, the first apparatus generates information. The first apparatus may generate the information based on the first apparatus determining that at least one of a buffer size, memory, or airtime capacity can no longer support new associations at the first apparatus. Alternatively, the first apparatus may generate the information based on the first apparatus receiving other information from an access point that indicates a number of desirable associations at the first apparatus. At 506, the first apparatus transmits to the second apparatus information that indicates a number of desirable associations at the second apparatus.

[0064] In an aspect, the first apparatus may transmit the information via a beacon frame. In particular, the information may be transmitted via an information element of the beacon frame. Alternatively, the information may be transmitted via a relay element of the beacon frame.

[0065] In a further aspect, the information may indicate a number of stations, relays, or stations and relays that can newly associate with the first apparatus. The information may be one bit set to a value that indicates whether the first apparatus will accept any new associations. Furthermore, the information may indicate that the number of desirable associations at the second apparatus is based on a number of hops between the first apparatus and the second apparatus.

[0066] The various operations of methods described above may be performed by any suitable means capable of performing the corresponding functions. The means may include various hardware and/or software component(s) and/or module(s), including, but not limited to a circuit, an application specific integrated circuit (ASIC), or processor. Generally, where there are operations illustrated in figures, those operations may have corresponding counterpart means-plus-function components with similar numbering. For example, operations 400 and 500 illustrated in FIGs. 4 and 5 correspond to means 400A and 500A illustrated in FIGs. 4A and 5A, respectively.

[0067] For example, means for transmitting (e.g., means 408A and 506A) may comprise a transmitter (e.g., the transmitter unit 222) and/or an antenna(s) 224 of the

access point 110 illustrated in FIG. 2 or the transmitter 310 and/or antenna(s) 316 depicted in FIG. 3. Means for receiving (e.g., means 402A) may comprise a receiver (e.g., the receiver unit 222) and/or an antenna(s) 224 of the access point 110 illustrated in FIG. 2 or the receiver 312 and/or antenna(s) 316 depicted in FIG. 3.

[0068] Means for limiting (e.g., means 404A), means for generating (e.g., means 406A and 504A), and/or means for associating (e.g., means 502A) may comprise a processing system, which may include one or more processors, such as the RX data processor 242, the TX data processor 210, and/or the controller 230 of the access point 110 illustrated in FIG. 2 or the processor 304 and/or the DSP 320 portrayed in FIG. 3.

[0069] According to certain aspects, such means may be implemented by processing systems configured to perform the corresponding functions by implementing various algorithms (e.g., in hardware or by executing software instructions). For example, an algorithm for receiving at a first apparatus from a second apparatus information related to an ability of the second apparatus to associate with other apparatuses, as input. Based on this input, the algorithm may limit associations at the first apparatus based on the information. Similarly, an algorithm for associating with a second apparatus, generating information, and transmitting to the second apparatus information that indicates a number of desirable associations at the second apparatus.

[0070] As used herein, the term “determining” encompasses a wide variety of actions. For example, “determining” may include calculating, computing, processing, deriving, investigating, looking up (e.g., looking up in a table, a database or another data structure), ascertaining and the like. Also, “determining” may include receiving (e.g., receiving information), accessing (e.g., accessing data in a memory) and the like. Also, “determining” may include resolving, selecting, choosing, establishing and the like.

[0071] As used herein, a phrase referring to “at least one of” a list of items refers to any combination of those items, including single members. As an example, “at least one of: a, b, or c” is intended to cover a, b, c, a-b, a-c, b-c, and a-b-c.

[0072] The various illustrative logical blocks, modules and circuits described in connection with the present disclosure may be implemented or performed with a general purpose processor, a digital signal processor (DSP), an application specific

integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device (PLD), discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described herein. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any commercially available processor, controller, microcontroller, or state machine. A processor may also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0073] The steps of a method or algorithm described in connection with the present disclosure may be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module may reside in any form of storage medium that is known in the art. Some examples of storage media that may be used include random access memory (RAM), read only memory (ROM), flash memory, EPROM memory, EEPROM memory, registers, a hard disk, a removable disk, a CD-ROM and so forth. A software module may comprise a single instruction, or many instructions, and may be distributed over several different code segments, among different programs, and across multiple storage media. A storage medium may be coupled to a processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor.

[0074] The methods disclosed herein comprise one or more steps or actions for achieving the described method. The method steps and/or actions may be interchanged with one another without departing from the scope of the claims. In other words, unless a specific order of steps or actions is specified, the order and/or use of specific steps and/or actions may be modified without departing from the scope of the claims.

[0075] The functions described may be implemented in hardware, software, firmware, or any combination thereof. If implemented in hardware, an example hardware configuration may comprise a processing system in a wireless node. The processing system may be implemented with a bus architecture. The bus may include any number of interconnecting buses and bridges depending on the specific application of the processing system and the overall design constraints. The bus may link

together various circuits including a processor, machine-readable media, and a bus interface. The bus interface may be used to connect a network adapter, among other things, to the processing system via the bus. The network adapter may be used to implement the signal processing functions of the PHY layer. In the case of a user terminal 120 (see FIG. 1), a user interface (e.g., keypad, display, mouse, joystick, etc.) may also be connected to the bus. The bus may also link various other circuits such as timing sources, peripherals, voltage regulators, power management circuits, and the like, which are well known in the art, and therefore, will not be described any further.

[0076] The processor may be responsible for managing the bus and general processing, including the execution of software stored on the machine-readable media. The processor may be implemented with one or more general-purpose and/or special-purpose processors. Examples include microprocessors, microcontrollers, DSP processors, and other circuitry that can execute software. Software shall be construed broadly to mean instructions, data, or any combination thereof, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise. Machine-readable media may include, by way of example, RAM (Random Access Memory), flash memory, ROM (Read Only Memory), PROM (Programmable Read-Only Memory), EPROM (Erasable Programmable Read-Only Memory), EEPROM (Electrically Erasable Programmable Read-Only Memory), registers, magnetic disks, optical disks, hard drives, or any other suitable storage medium, or any combination thereof. The machine-readable media may be embodied in a computer-program product. The computer-program product may comprise packaging materials.

[0077] In a hardware implementation, the machine-readable media may be part of the processing system separate from the processor. However, as those skilled in the art will readily appreciate, the machine-readable media, or any portion thereof, may be external to the processing system. By way of example, the machine-readable media may include a transmission line, a carrier wave modulated by data, and/or a computer product separate from the wireless node, all which may be accessed by the processor through the bus interface. Alternatively, or in addition, the machine-readable media, or any portion thereof, may be integrated into the processor, such as the case may be with cache and/or general register files.

[0078] The processing system may be configured as a general-purpose processing system with one or more microprocessors providing the processor functionality and external memory providing at least a portion of the machine-readable media, all linked together with other supporting circuitry through an external bus architecture. Alternatively, the processing system may be implemented with an ASIC (Application Specific Integrated Circuit) with the processor, the bus interface, the user interface in the case of an access terminal), supporting circuitry, and at least a portion of the machine-readable media integrated into a single chip, or with one or more FPGAs (Field Programmable Gate Arrays), PLDs (Programmable Logic Devices), controllers, state machines, gated logic, discrete hardware components, or any other suitable circuitry, or any combination of circuits that can perform the various functionality described throughout this disclosure. Those skilled in the art will recognize how best to implement the described functionality for the processing system depending on the particular application and the overall design constraints imposed on the overall system.

[0079] The machine-readable media may comprise a number of software modules. The software modules include instructions that, when executed by the processor, cause the processing system to perform various functions. The software modules may include a transmission module and a receiving module. Each software module may reside in a single storage device or be distributed across multiple storage devices. By way of example, a software module may be loaded into RAM from a hard drive when a triggering event occurs. During execution of the software module, the processor may load some of the instructions into cache to increase access speed. One or more cache lines may then be loaded into a general register file for execution by the processor. When referring to the functionality of a software module below, it will be understood that such functionality is implemented by the processor when executing instructions from that software module.

[0080] If implemented in software, the functions may be stored or transmitted over as one or more instructions or code on a computer-readable medium. Computer-readable media include both computer storage media and communication media including any medium that facilitates transfer of a computer program from one place to another. A storage medium may be any available medium that can be accessed by a computer. By way of example, and not limitation, such computer-readable

media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Also, any connection is properly termed a computer-readable medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared (IR), radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of medium. Disk and disc, as used herein, include compact disc (CD), laser disc, optical disc, digital versatile disc (DVD), floppy disk, and Blu-ray® disc where disks usually reproduce data magnetically, while discs reproduce data optically with lasers. Thus, in some aspects computer-readable media may comprise non-transitory computer-readable media (e.g., tangible media). In addition, for other aspects computer-readable media may comprise transitory computer-readable media (e.g., a signal). Combinations of the above should also be included within the scope of computer-readable media.

[0081] Thus, certain aspects may comprise a computer program product for performing the operations presented herein. For example, such a computer program product may comprise a computer-readable medium having instructions stored (and/or encoded) thereon, the instructions being executable by one or more processors to perform the operations described herein. For certain aspects, the computer program product may include packaging material.

[0082] Further, it should be appreciated that modules and/or other appropriate means for performing the methods and techniques described herein can be downloaded and/or otherwise obtained by a user terminal and/or base station as applicable. For example, such a device can be coupled to a server to facilitate the transfer of means for performing the methods described herein. Alternatively, various methods described herein can be provided via storage means (e.g., RAM, ROM, a physical storage medium such as a compact disc (CD) or floppy disk, etc.), such that a user terminal and/or base station can obtain the various methods upon coupling or providing the storage means to the device. Moreover, any other suitable technique

for providing the methods and techniques described herein to a device can be utilized.

[0083] It is to be understood that the claims are not limited to the precise configuration and components illustrated above. Various modifications, changes and variations may be made in the arrangement, operation and details of the methods and apparatus described above without departing from the scope of the claims.

WHAT IS CLAIMED IS:**CLAIMS**

1. A first apparatus for wireless communication, the first apparatus associated with a second apparatus, comprising:

a receiver configured to receive from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses; and

a processing system configured to limit associations at the first apparatus based on the information.

2. The first apparatus of claim 1, wherein:

the information indicates a number of stations, relays, or stations and relays that can newly associate with the second apparatus; and

the processing system is configured to limit the associations at the first apparatus by limiting a number of associations based on the number of stations, relays, or stations and relays that can newly associate with the second apparatus.

3. The first apparatus of claim 1, wherein:

the information indicates a number of desirable associations at the first apparatus based on a number of hops between the first apparatus and the second apparatus; and

the processing system is configured to limit the associations at the first apparatus by limiting a number of associations based on the number of desirable associations.

4. The first apparatus of claim 1, wherein:

the information comprises one bit set to a value that indicates whether the second apparatus will accept any new associations; and

the processing system is configured to limit the associations at the first apparatus to a current number of associations when the one bit is set to a value that indicates that the second apparatus will not accept any new associations.

5. The first apparatus of claim 1, wherein the processing system is configured to limit the associations at the first apparatus by:

dropping at least one current association;

allowing a number of new associations; or
disallowing the new associations.

6. The first apparatus of claim 1, wherein:

the processing system is further configured to generate a data based on the information; and

the first apparatus further comprises a transmitter configured to transmit the data from the first apparatus to at least one relay or access point currently associated with the first apparatus.

7. The first apparatus of claim of claim 6, wherein the transmitter is configured to broadcast the data.

8. The first apparatus of claim 6, wherein the data indicates a number of desirable associations at the at least one relay or access point, and wherein the number of desirable associations is limited according to at least one of:

a number of hops between the second apparatus and the at least one relay or access point;

a number of stations that can newly associate with the at least one relay or access point;

a number of relays that can newly associate with the at least one relay or access point; or

a number of stations and relays that can newly associate with the at least one relay or access point.

9. The first apparatus of claim 6, wherein the data is transmitted via a beacon frame.

10. The first apparatus of claim 6, wherein the data indicates a number of stations, relays, or stations and relays that can newly associate with the first apparatus or the at least one relay or access point.

11. A first apparatus for wireless communication, comprising:

a processing system configured to associate with a second apparatus; and
a transmitter configured to transmit to the second apparatus information that indicates a number of desirable associations at the second apparatus.

12. The first apparatus of claim 11, wherein the processing system is configured to:

determine that at least one of a buffer size, memory, or airtime capacity can no longer support new associations at the first apparatus; and
generate the information based on the determination.

13. The first apparatus of claim 11, further comprising:
a receiver configured to receive other information from an access point that indicates a number of desirable associations at the first apparatus; and
wherein the processing system is configured to generate the information based on the other information.

14. The first apparatus of claim 11, wherein the information is transmitted via a beacon frame.

15. The first apparatus of claim 11, wherein the information indicates a number of stations, relays, or stations and relays that can newly associate with the first apparatus.

16. The first apparatus of claim 11, wherein the information comprises one bit set to a value that indicates whether the first apparatus will accept any new associations.

17. The first apparatus of claim 11, wherein the information indicates that the number of desirable associations at the second apparatus is based on a number of hops between the first apparatus and the second apparatus.

18. A method for wireless communication at a first apparatus, the first apparatus associated with a second apparatus, comprising:

receiving from the second apparatus information related to an ability of the second apparatus to associate with other apparatuses; and
limiting associations at the first apparatus based on the information.

19. The method of claim 18, wherein:

the information indicates a number of stations, relays, or stations and relays that can newly associate with the second apparatus; and

the limiting comprises limiting a number of associations based on the number of stations, relays, or stations and relays that can newly associate with the second apparatus.

20. The method of claim 18, wherein:

the information indicates a number of desirable associations at the first apparatus based on a number of hops between the first apparatus and the second apparatus; and

the limiting comprises limiting a number of associations based on the number of desirable associations.

21. The method of claim 18, wherein:

the information comprises one bit set to a value that indicates whether the second apparatus will accept any new associations; and

the limiting comprises limiting the associations to a current number of associations when the one bit is set to a value that indicates that the second apparatus will not accept any new associations.

22. The method of claim 18, wherein the limiting comprises at least one of:

dropping at least one current association;

allowing a number of new associations; or

disallowing the new associations.

23. The method of claim 18, further comprising:

generating a data based on the information; and

transmitting the data from the first apparatus to at least one relay or access point currently associated with the first apparatus.

24. The method of claim of claim 23, wherein the transmitting comprises broadcasting the data.

25. The method of claim 23, wherein the data indicates a number of desirable associations at the at least one relay or access point, and wherein the number of desirable associations is limited according to at least one of:

 a number of hops between the second apparatus and the at least one relay or access point;

 a number of stations that can newly associate with the at least one relay or access point;

 a number of relays that can newly associate with the at least one relay or access point; or

 a number of stations and relays that can newly associate with the at least one relay or access point.

26. The method of claim 23, wherein the data indicates a number of stations, relays, or stations and relays that can newly associate with the first apparatus or the at least one relay or access point.

27. A method for wireless communication at a first apparatus, comprising:
 associating with a second apparatus; and
 transmitting to the second apparatus information that indicates a number of desirable associations at the second apparatus.

28. The method of claim 27, further comprising:
 determining that at least one of a buffer size, memory, or airtime capacity can no longer support new associations at the first apparatus; and
 generating the information based on the determination.

29. The method of claim 27, further comprising:
 receiving other information from an access point that indicates a number of desirable associations at the first apparatus; and

generating the information based on the other information.

30. The method of claim 27, wherein the information indicates at least one of:

a number of stations, relays, or stations and relays that can newly associate with the first apparatus;

whether the first apparatus will accept any new associations; or

that the number of desirable associations at the second apparatus is based on a number of hops between the first apparatus and the second apparatus.

1/5

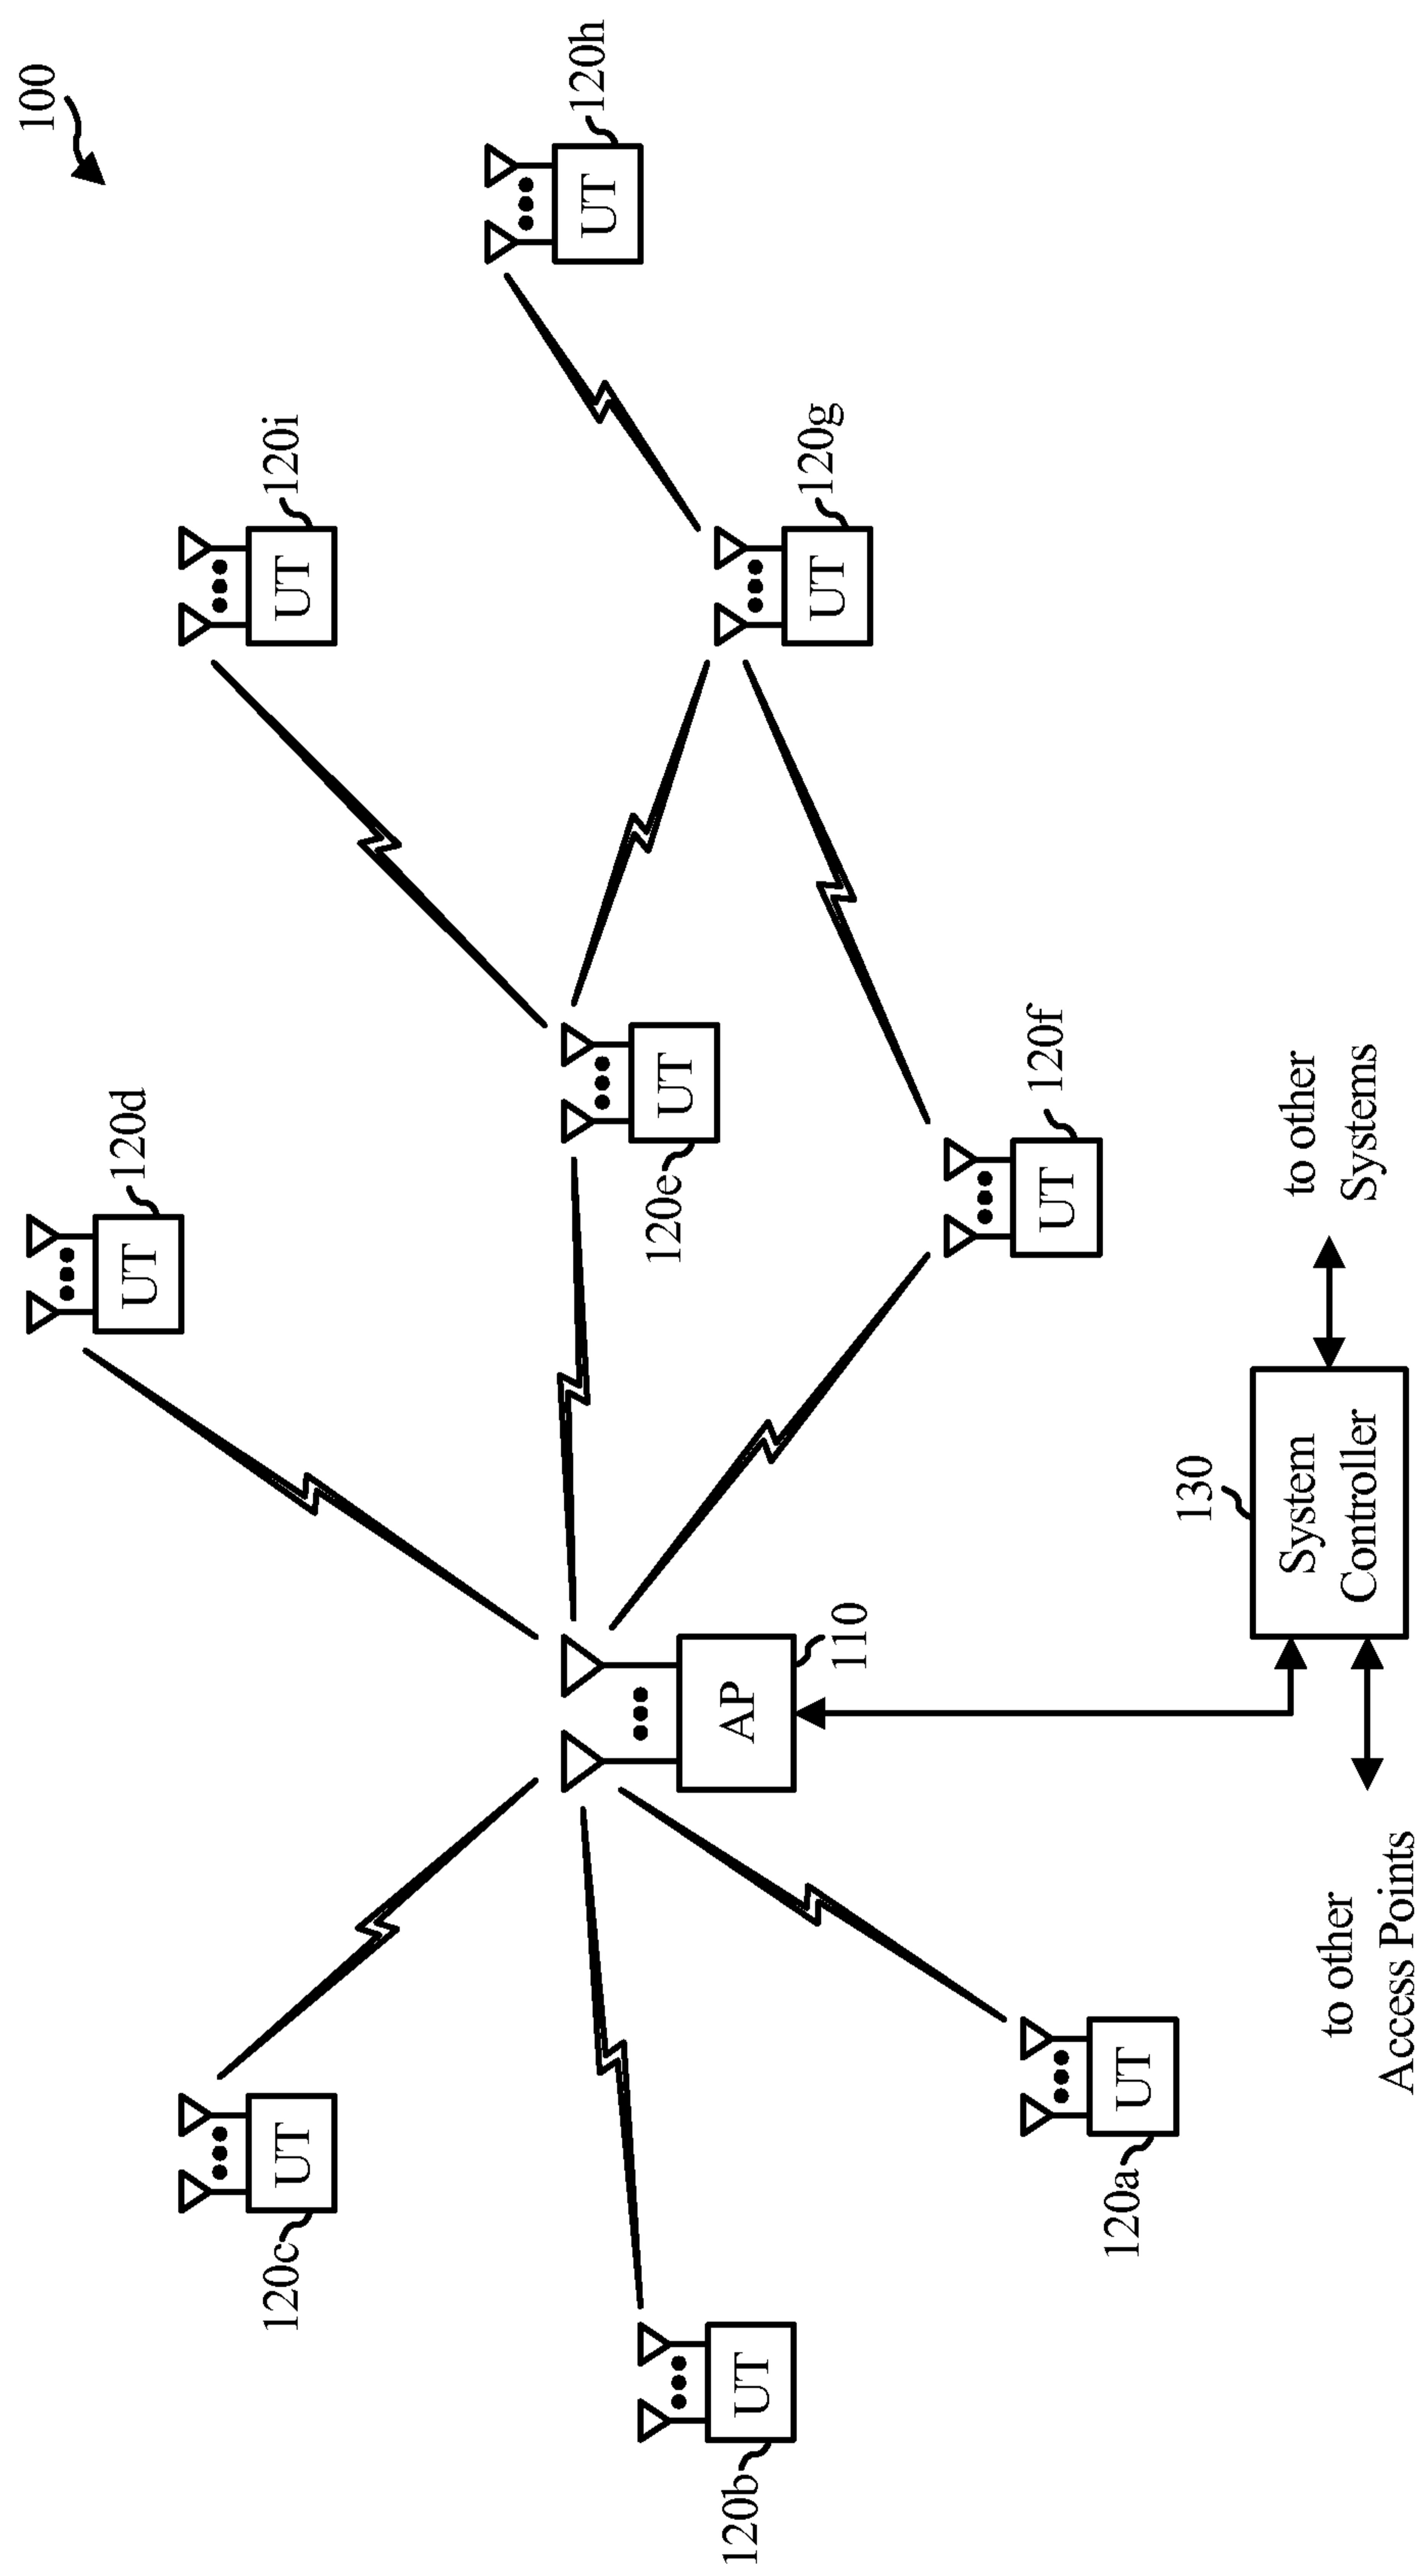


FIG. 1




FIG. 2

3/5

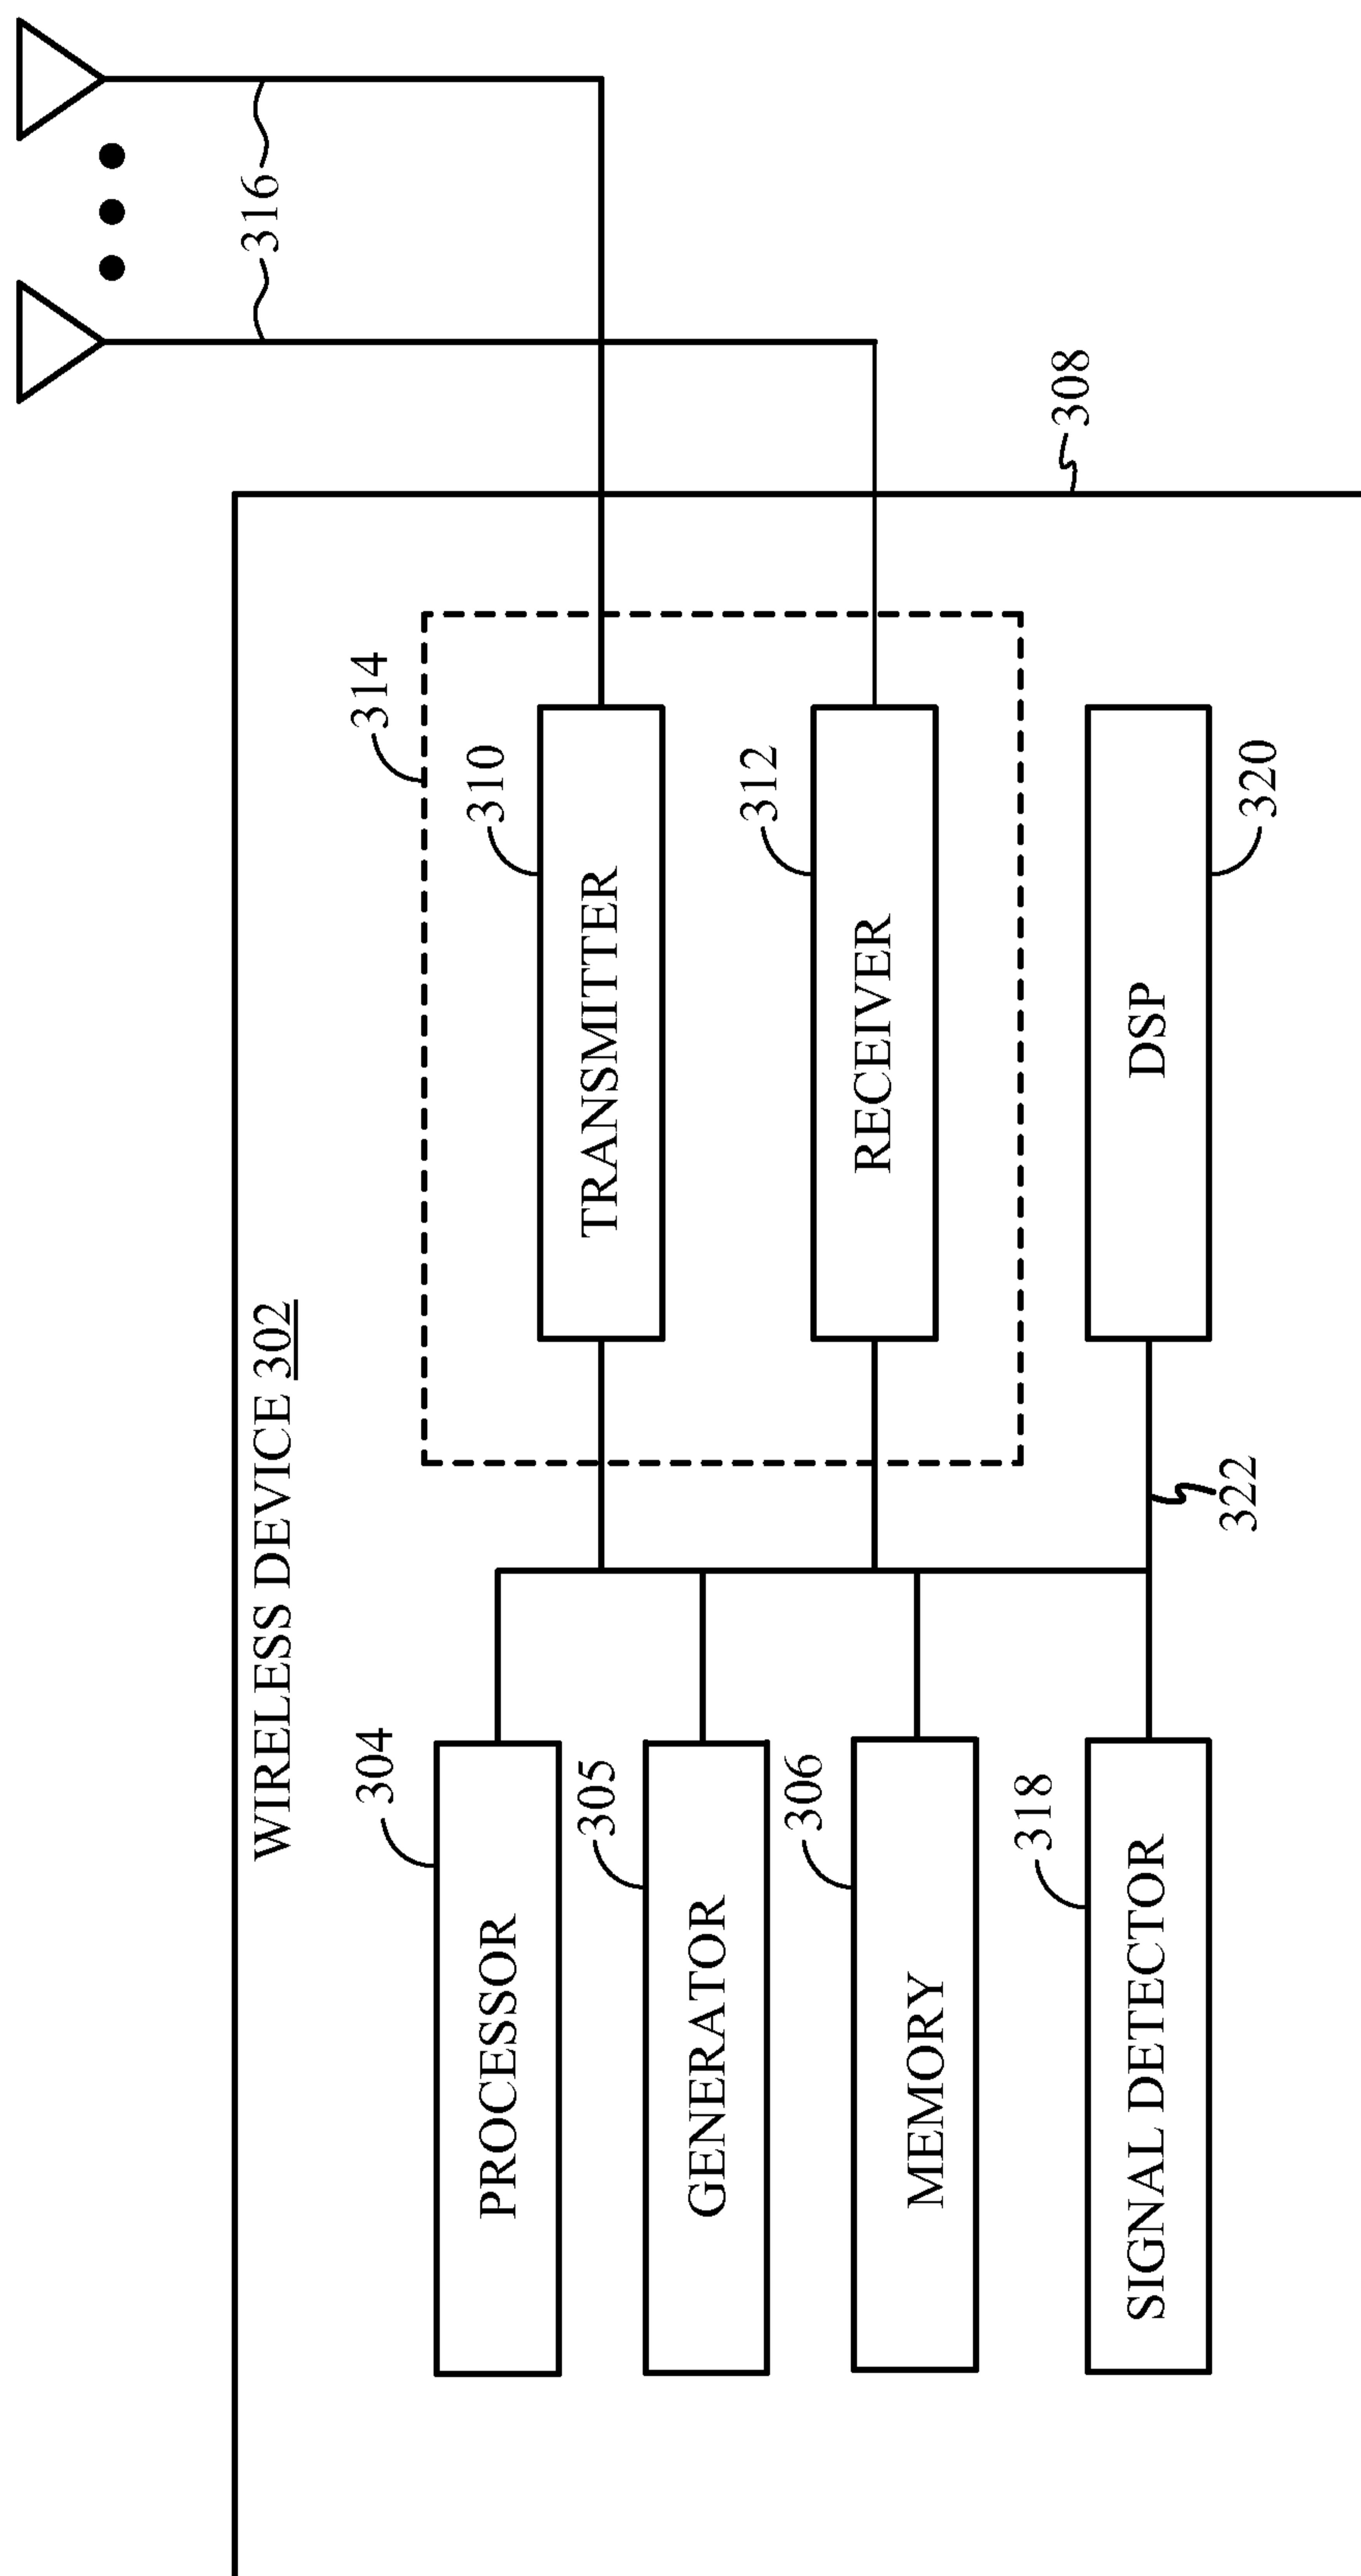


FIG. 3

4/5

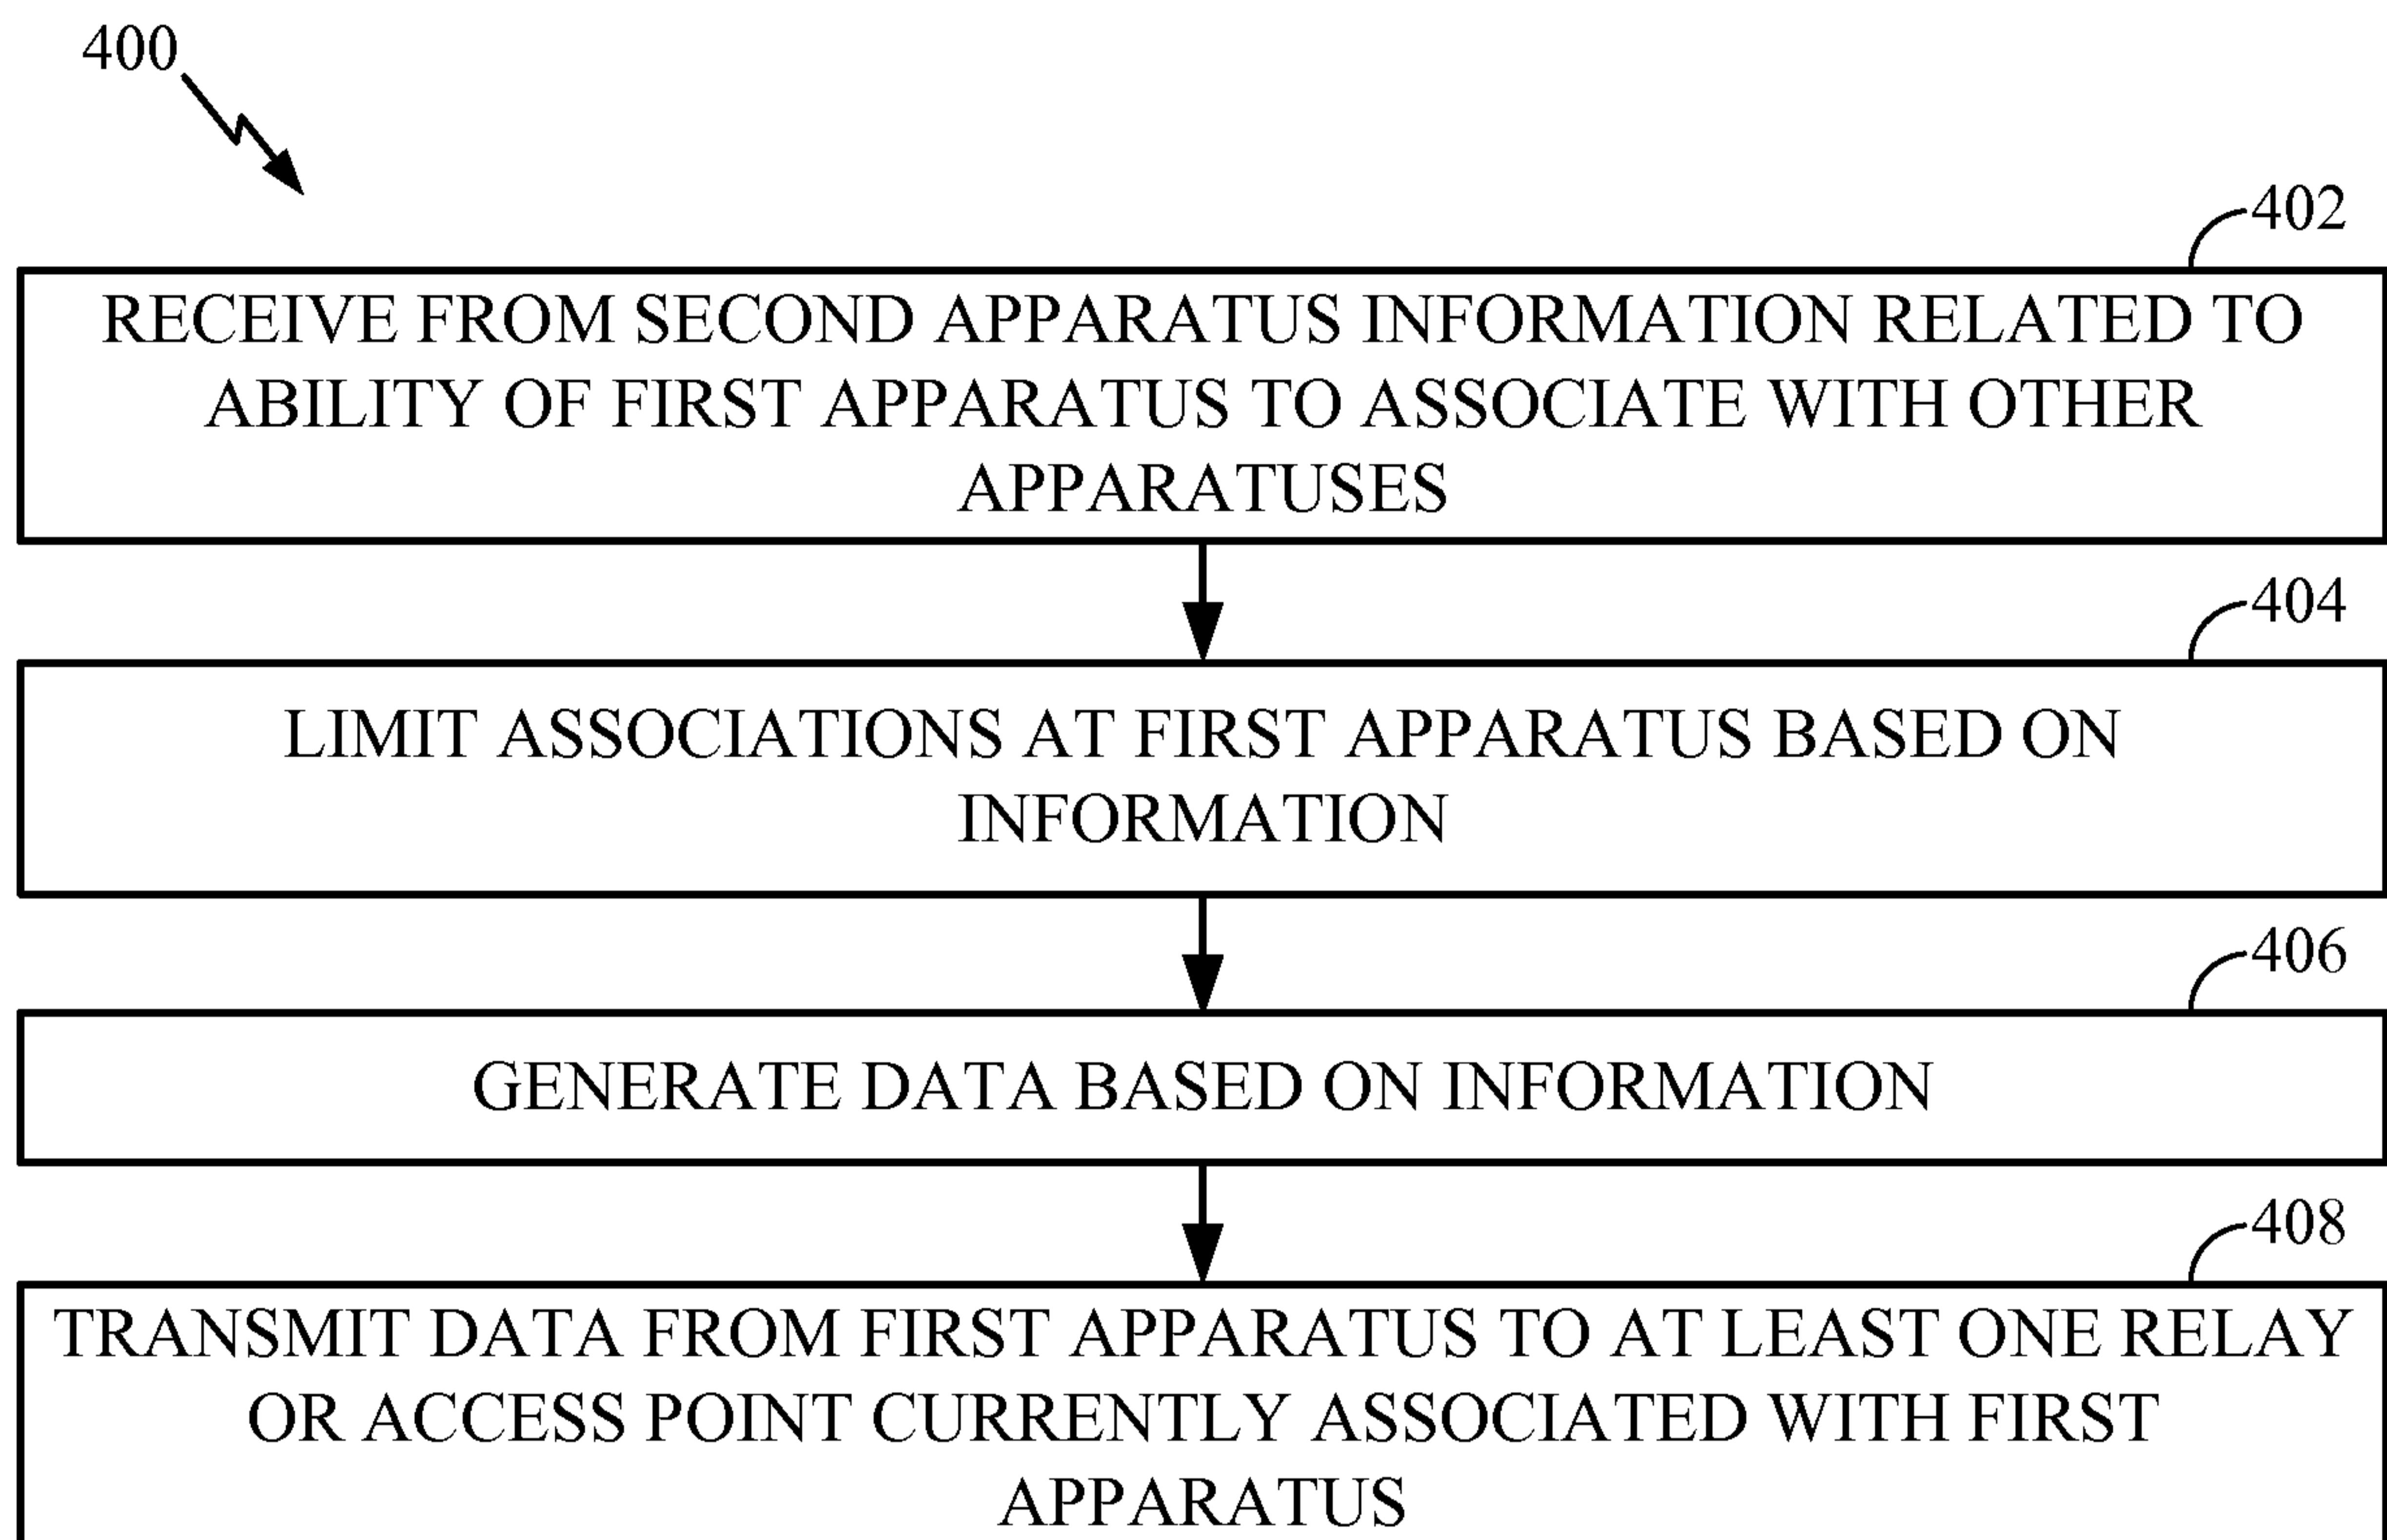


FIG. 4

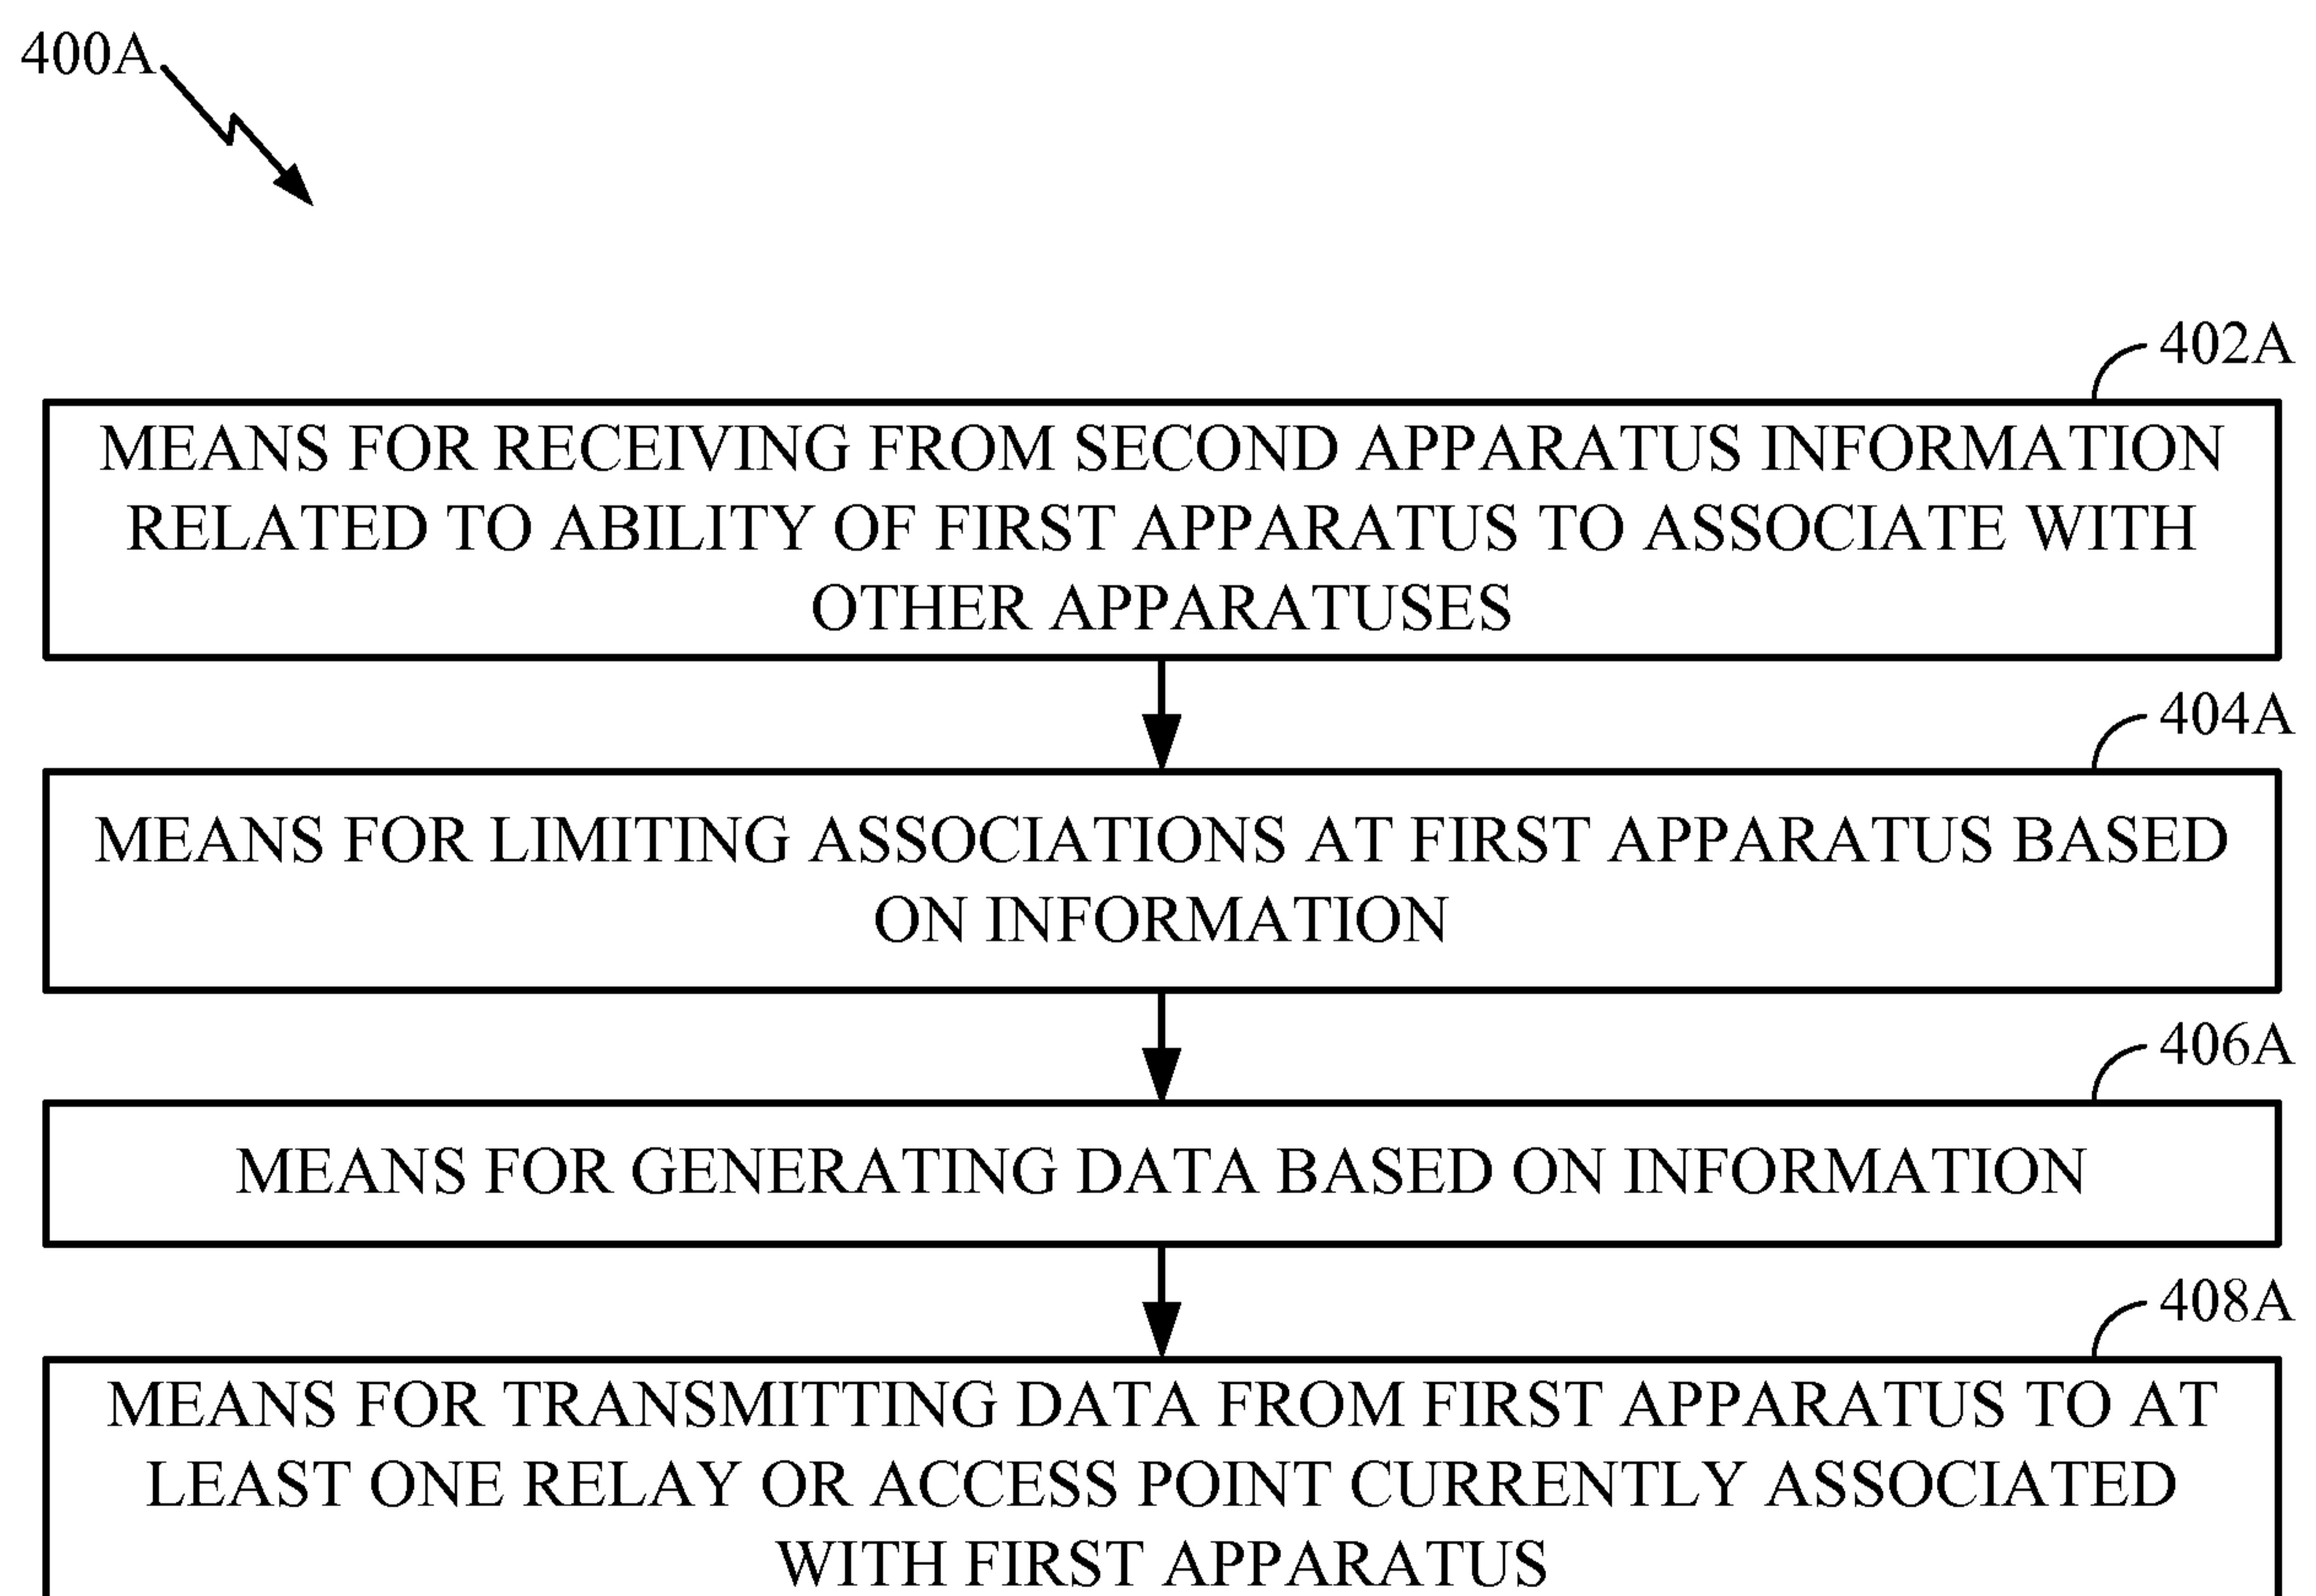


FIG. 4A

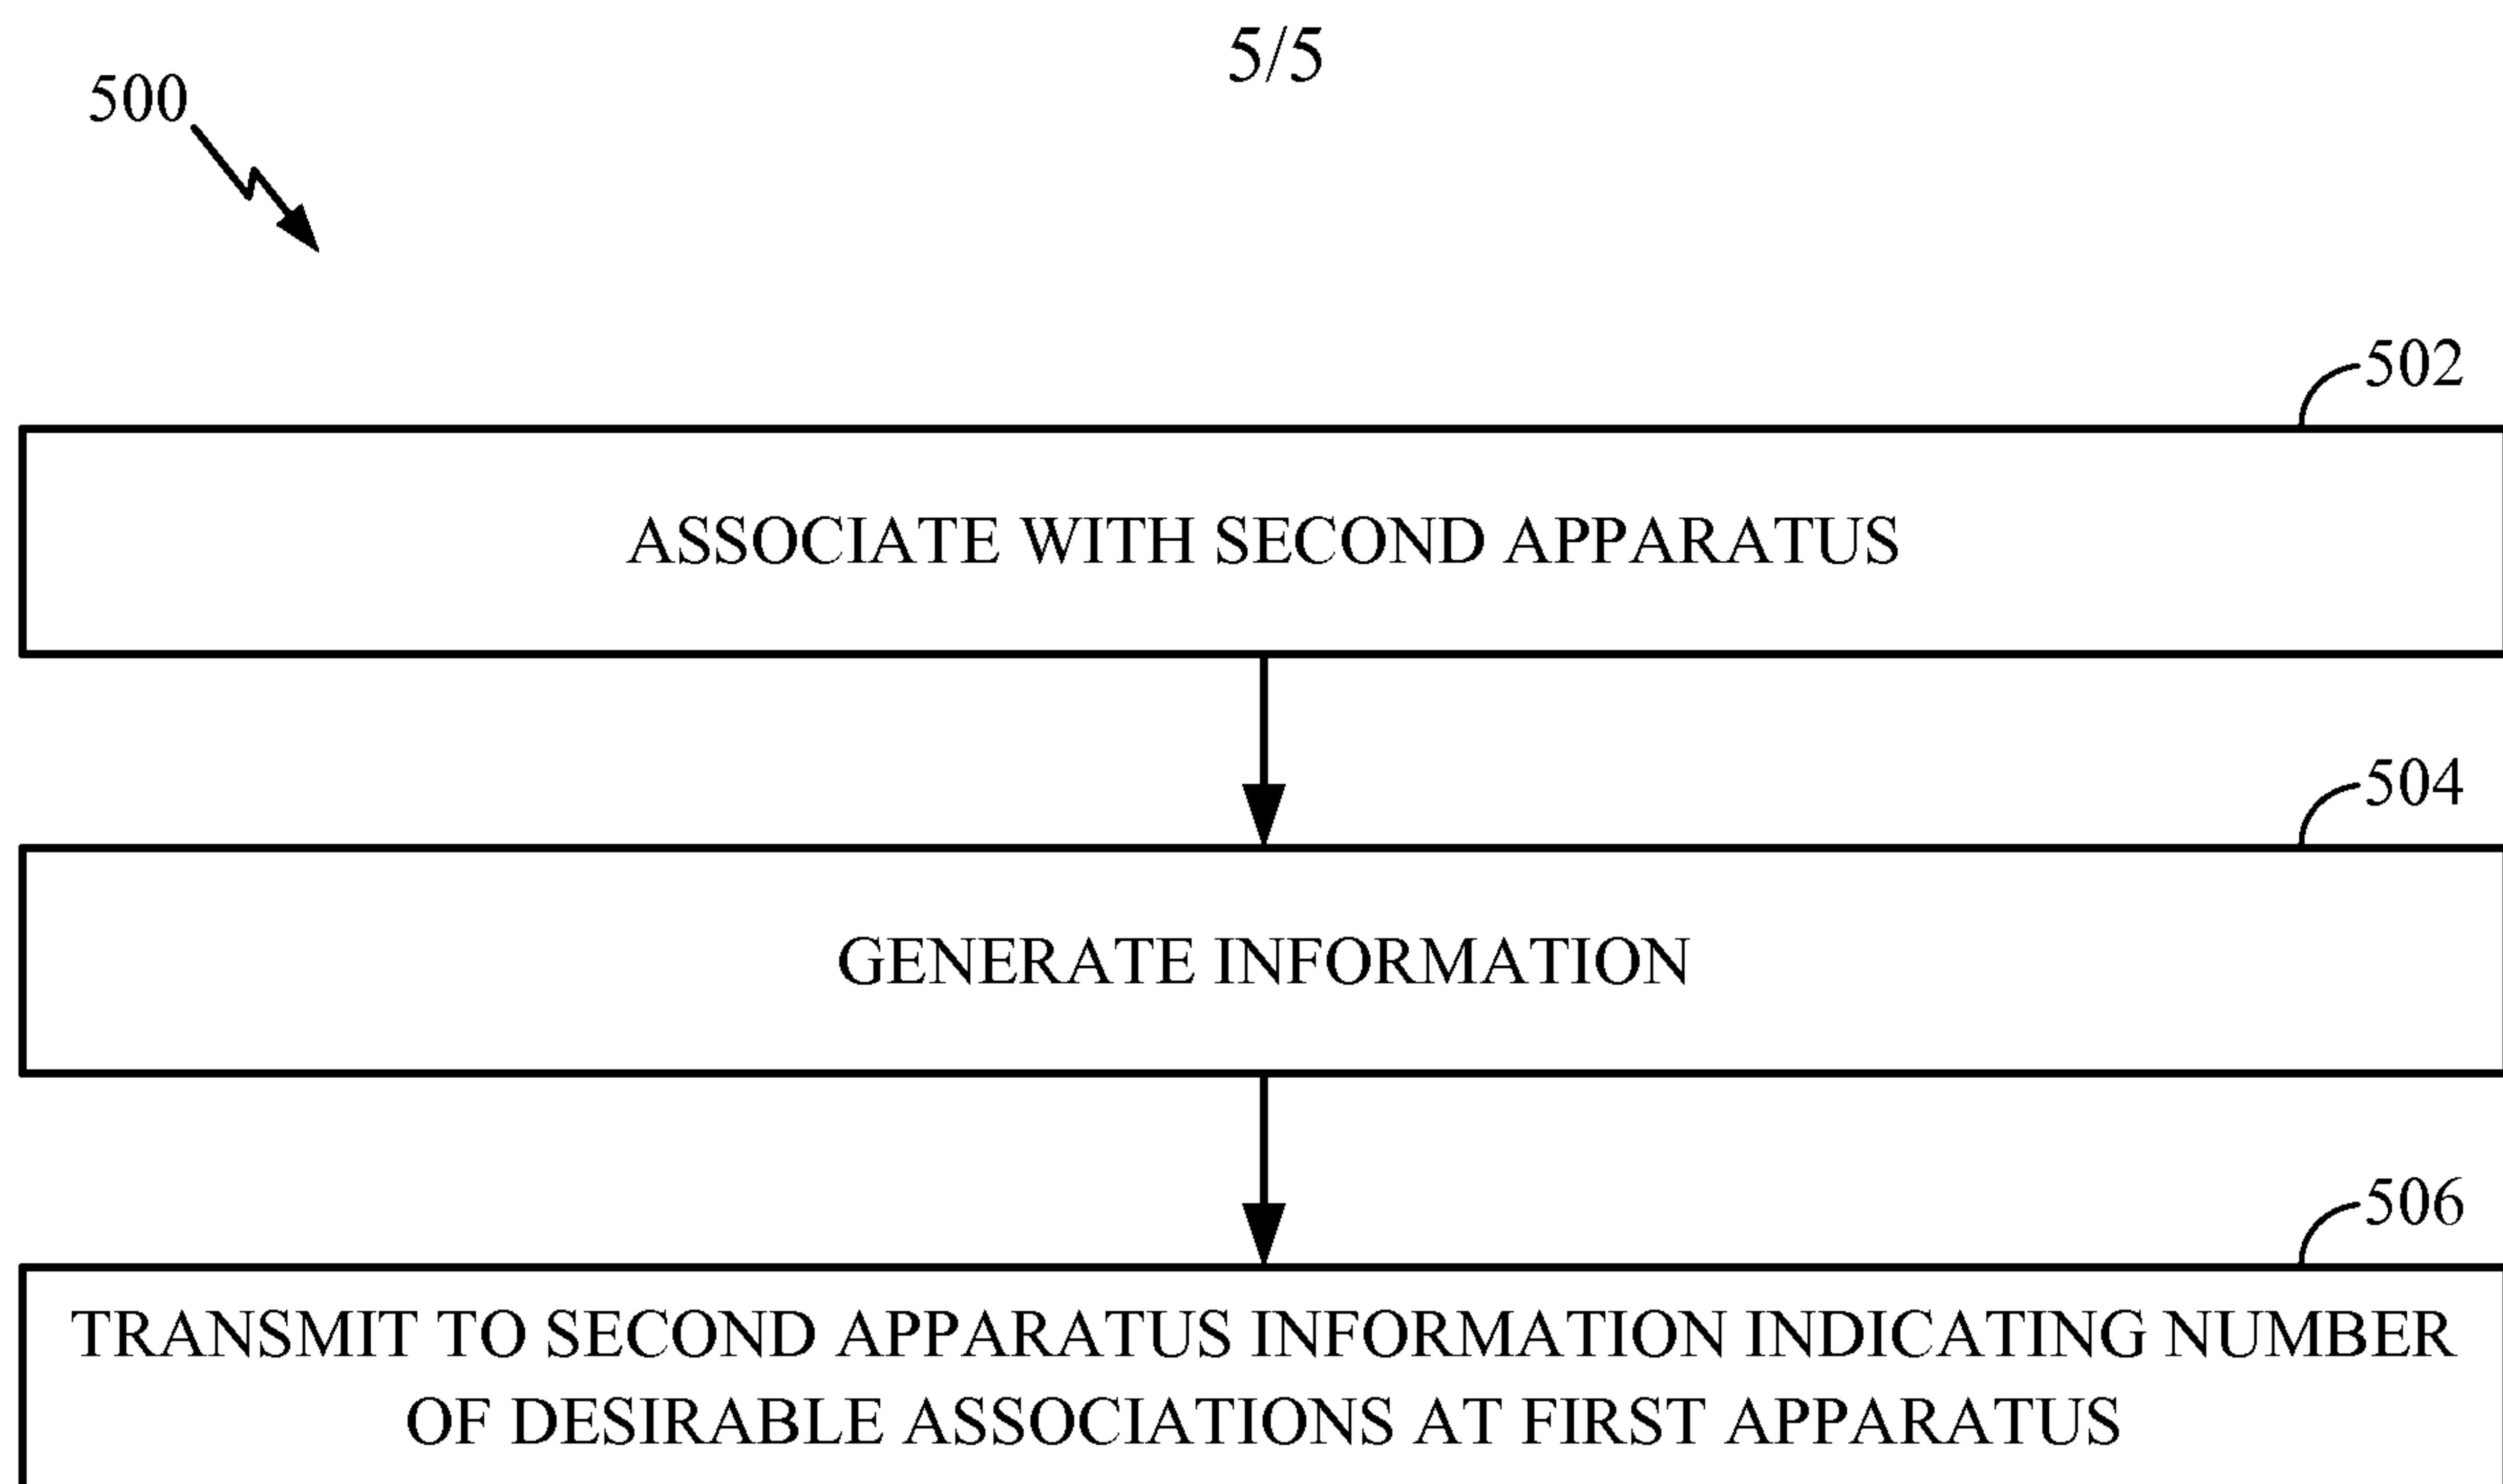


FIG. 5

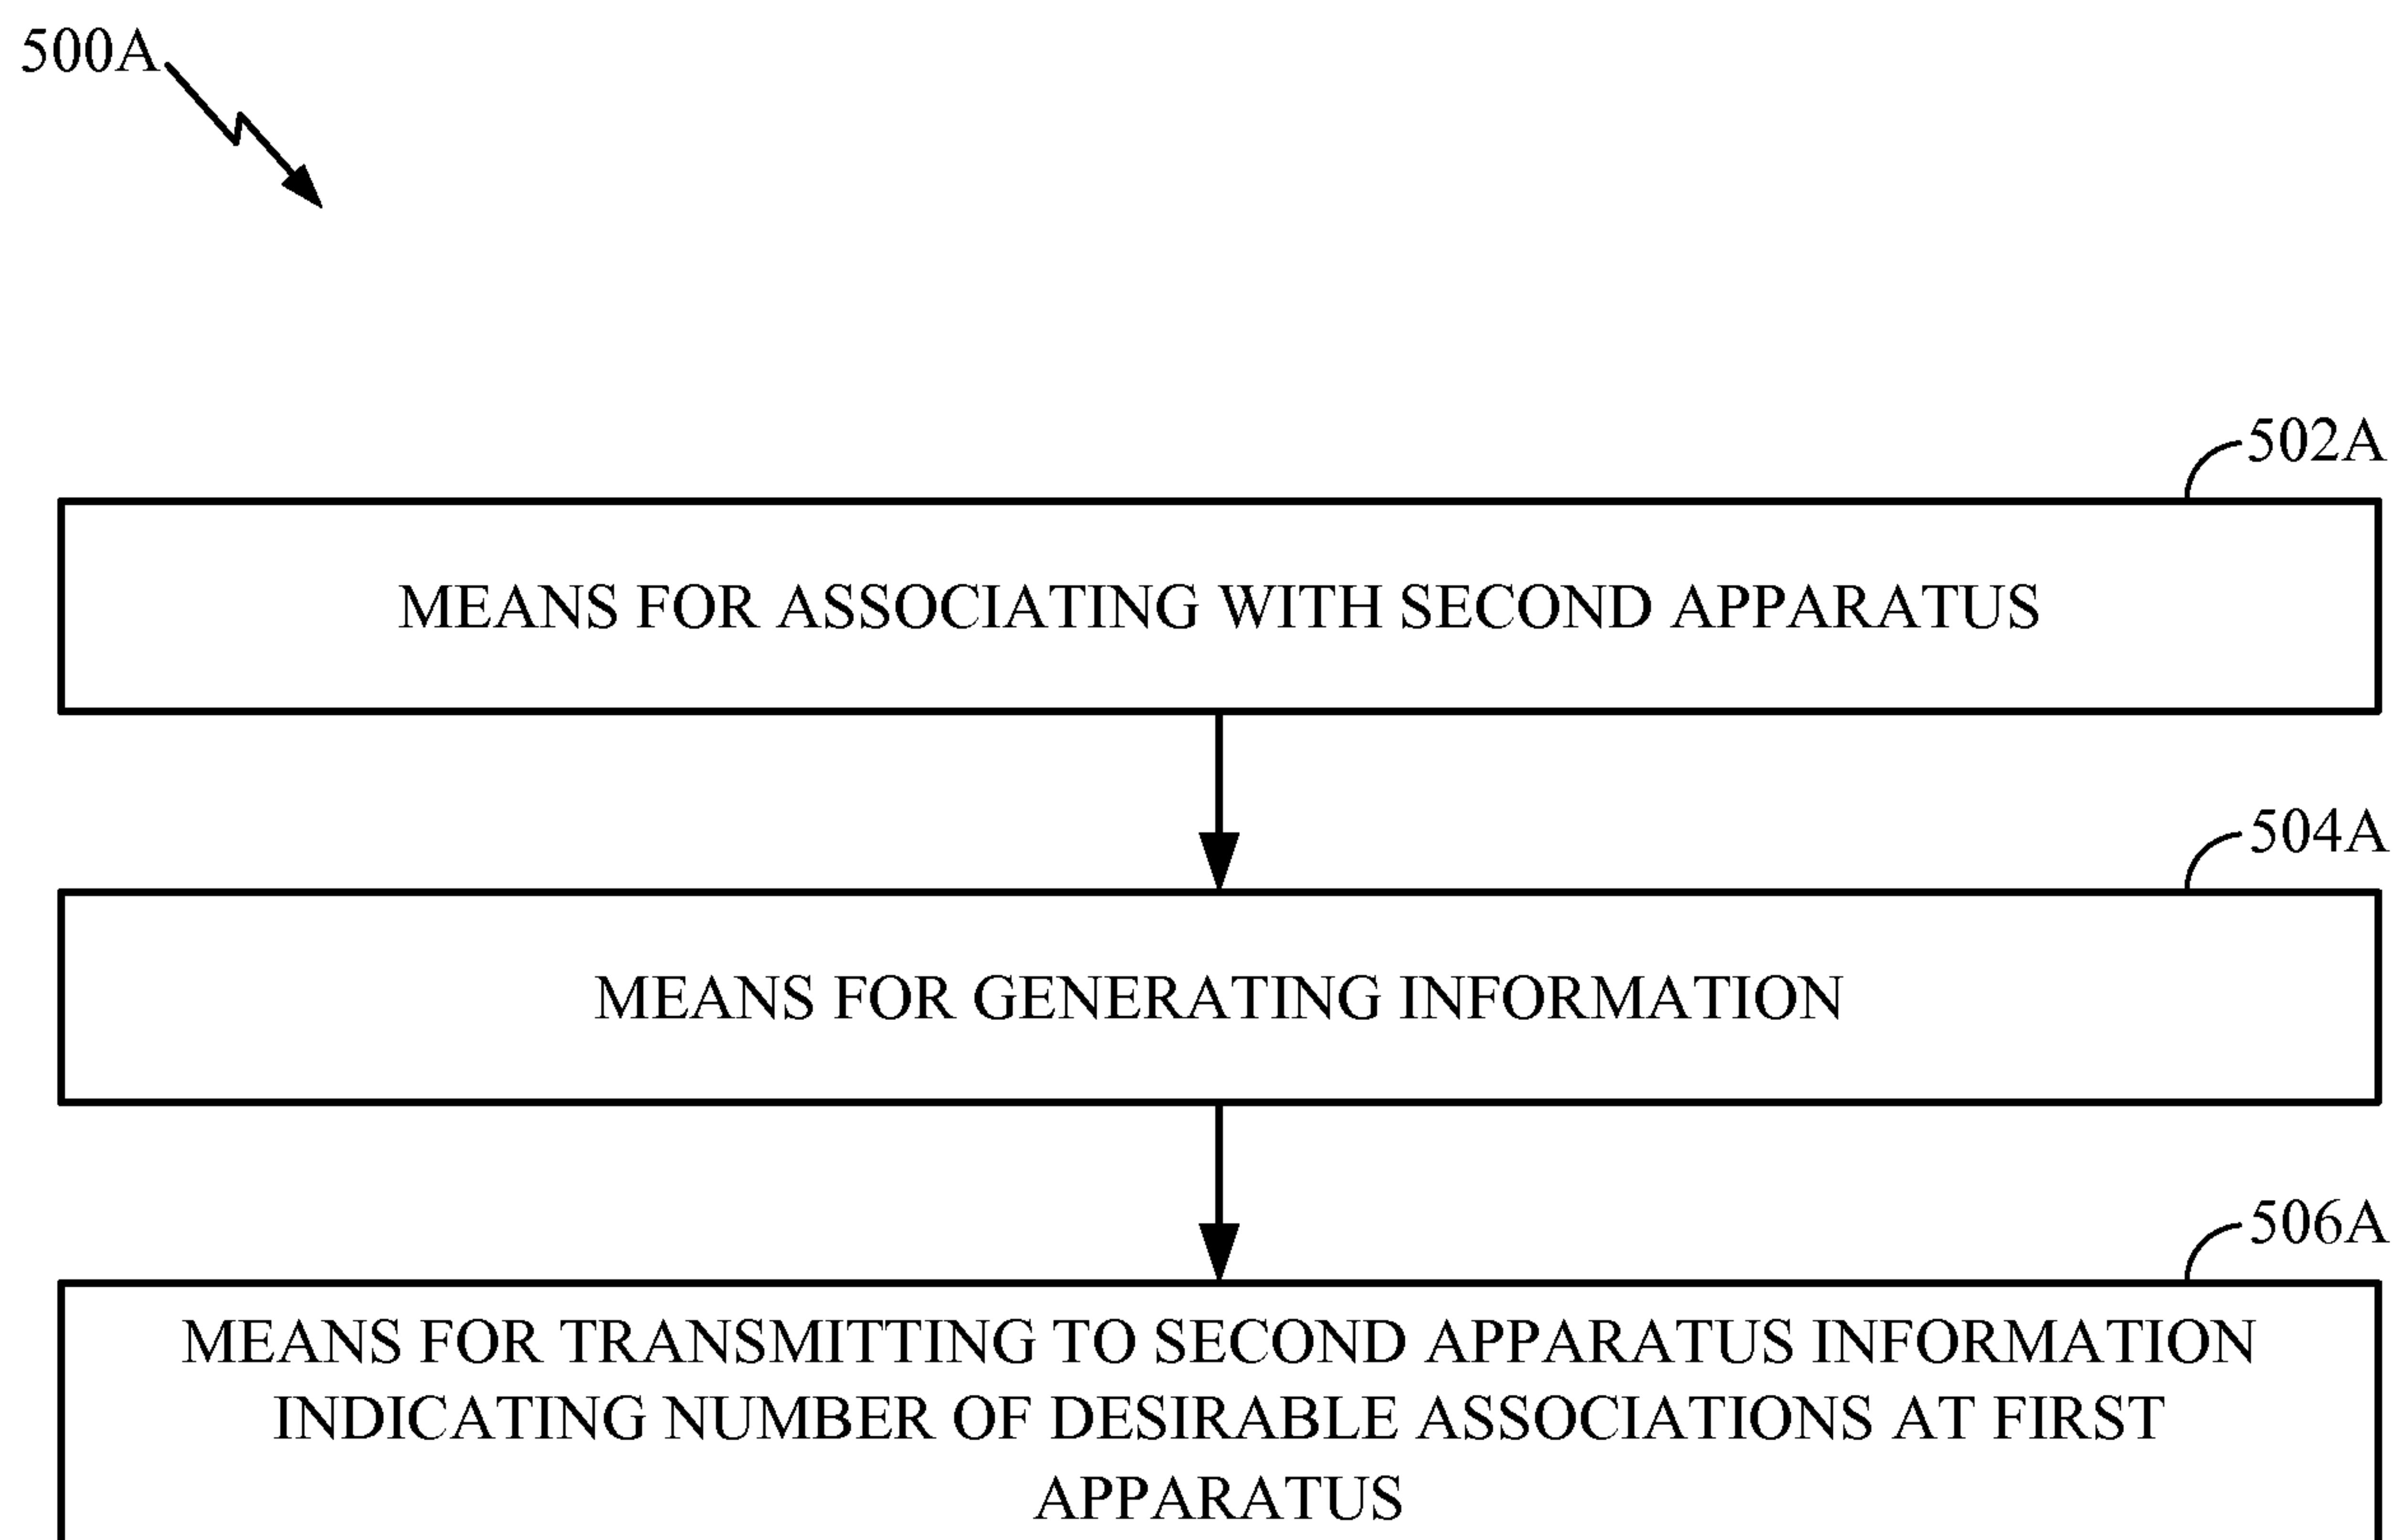


FIG. 5A

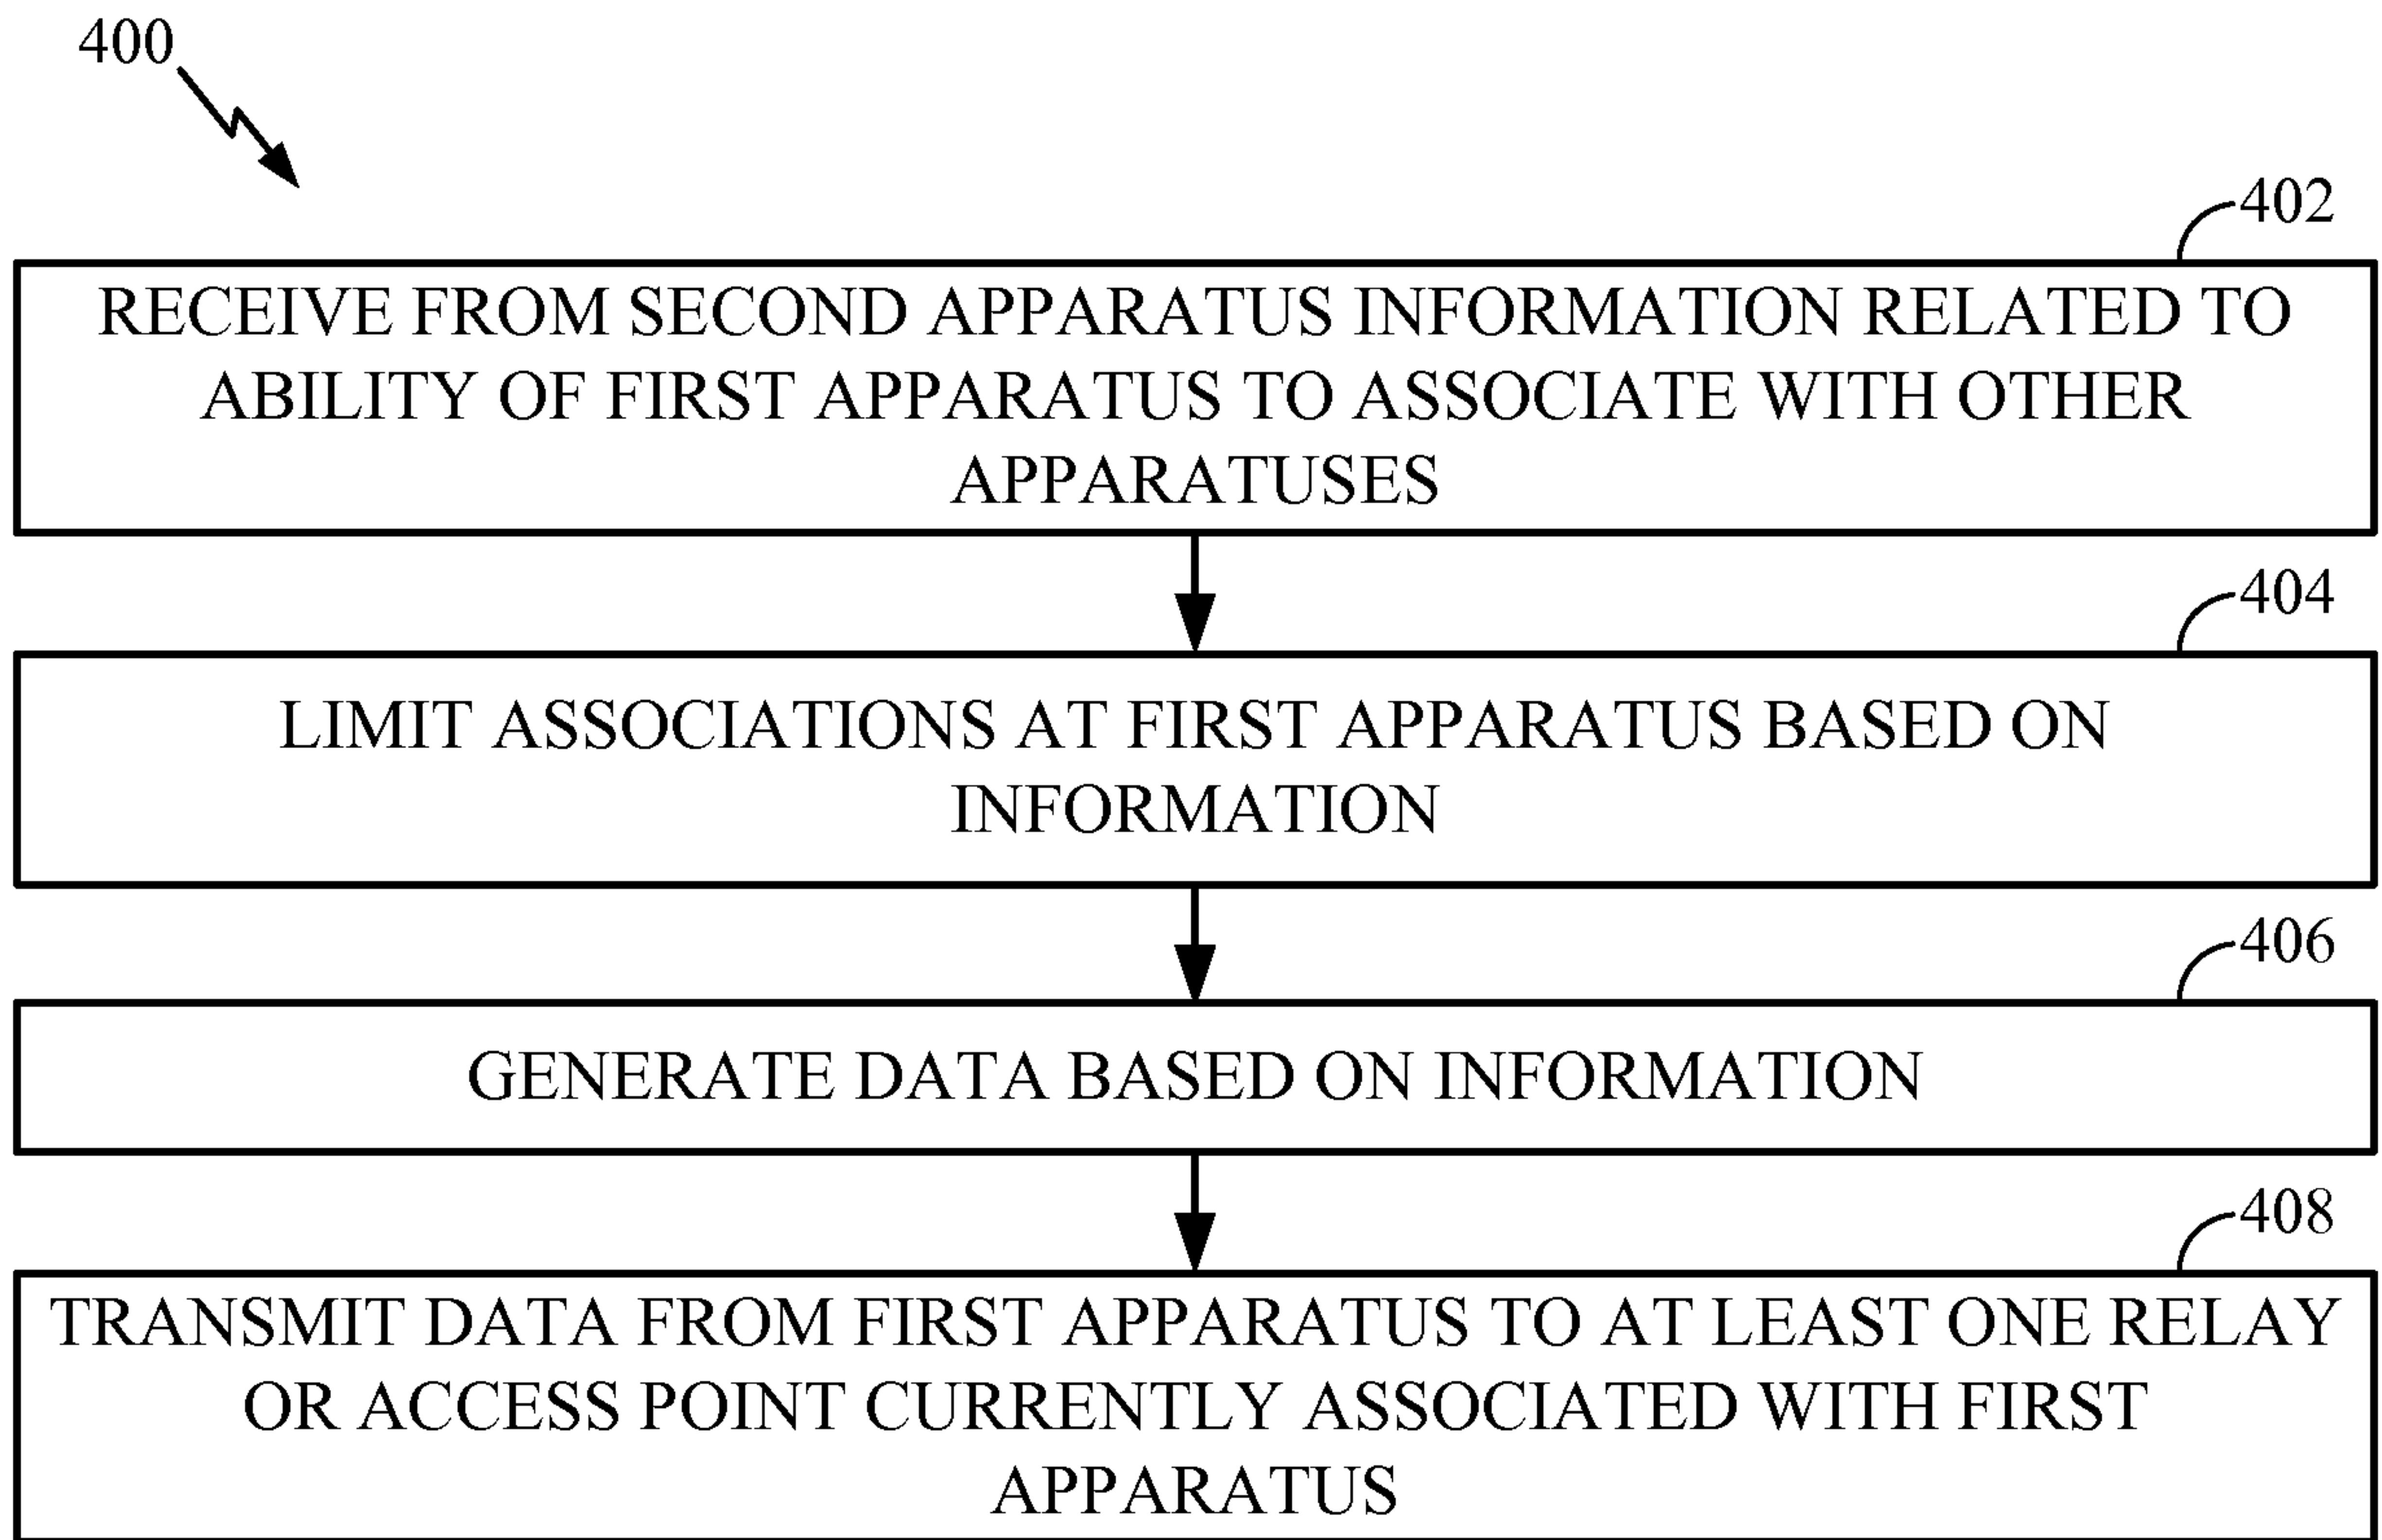


FIG. 4