

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200071661 B2
(10) Patent No. 781857

(54) Title
Disposable absorbent sanitary article

(51)⁷ International Patent Classification(s)
A61F 013/475

(21) Application No: **200071661**

(22) Application Date: **2000.11.17**

(30) Priority Data

(31) Number	(32) Date	(33) Country
11-330580	1999.11.19	JP

(43) Publication Date : **2001.05.24**

(43) Publication Journal Date : **2001.05.24**

(44) Accepted Journal Date : **2005.06.16**

(71) Applicant(s)
Uni-Charm Corporation

(72) Inventor(s)
Katsumi Mizutani; Yoshio Ono; Hirotomo Mukai

(74) Agent/Attorney
**PHILLIPS ORMONDE and FITZPATRICK,367 Collins Street,MELBOURNE VIC
3000**

(56) Related Art
WO 1994/018927
US 5246431

A B S T R A C T

A disposable absorbent sanitary article includes sheets 26 to form a pair of flaps 10A and a pair of flaps 20 and the sheets 26 are folded along flap fold lines 17, 39 back onto themselves, respectively, to form free edge portions 40A, 40B of the respective pairs of flaps 10A, 20. Elastic members 34, 36 secured under tension to the sheets 26 inside the respective free edge portions 40A, 40B are spaced from the fold lines 17, 39 at least by 1 mm, respectively.



DISPOSABLE ABSORBENT SANITARY ARTICLE

This invention relates to a disposable absorbent sanitary article for absorbing and retaining body fluids such as disposable diapers or menstruation pads

5

A sanitary article known to the applicant is provided with a pair of elasticized side flaps. This article includes a first pair of elasticized side flaps defining transversely opposite side edges of the article and a second pair of elasticized flaps lying on the inner side of the article and normally biased to rise upward on a liquid-absorbent core. A liquid-pervious
10 topsheet and a liquid-impervious backsheet sandwiching the core extend outward beyond transversely opposite side edges of the core. These extensions of the respective sheets are put flat and joined together to form the first side flaps. Distal edges of the side flaps are respectively provided with first elastic members extending under tension longitudinally of the flaps between the top- and backsheets. The second side flaps are formed by placing
15 separately prepared sheets upon the upper surface of the topsheet and folding these sheets in respective two halves and putting them flat together, respectively, along the respective distal edges with second elastic members extending under tension between the respective two halves. These first and second elastic members elastically contract and come in contact with a wearer's skin as the article is put on the wearer's body.

20

The distal edges of the first flaps correspond to lines along which the top- and backsheets placed upon each other have been cut to contour the article in conformity with its desired shape and, in other words, the distal edges of the first flaps partially define the article's contour. The first elastic members are placed in the vicinity of the respective distal
25 edges parallel to them and elasticize the respective distal edges. The distal edges of the first flaps, i.e., the cut ends of the top- and backsheets are not rounded and may irritate the wearer's skin as the napkin is put on the wearer's body. In addition, the first elastic members have a secondary effect to increase a rigidity of the distal edges, therefore irritation of the wearer's skin due to the cut ends and eventually to deteriorate a feeling to
30 wear the napkin.

The distal edges of the second side flaps formed by folding the respective sheets so as to wrap the respective second elastic members. With such an arrangement, the sheets sometimes cut into the wearer's skin rather than come in contact with the wearer's skin,
35 together with the second elastic members. Thus, the second side flaps may create a feeling of discomfort against the wearer.

The above discussion of documents, acts, materials, devices, articles and the like is included in this specification solely for the purpose of providing a context for the present invention. It is not suggested or represented that any of these matters formed part of the prior art base or were common general
 5 knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

10 It would be desirable to provide a disposable absorbent sanitary article improved to alleviate skin stimulation due to the elasticised side flaps.

15 According to this invention, there is provided a detachable urine pad for use on a disposable diaper having a body-side surface for contact with a wearer's skin and an undergarment-side surface opposed to said body-side surface and including a basic structure adapted to absorb and retain body fluids
 20 between said two surfaces and plural different pairs of flaps adapted to be elastically placed against the wearer's skin as said article is put on the wearer's body, wherein any one pair of said plural pairs of flaps each having a transverse direction and a longitudinal direction orthogonal to said transverse direction and formed by a sheet extending outward from said basic structure and an elastic
 25 member wrapped by said sheet in a state tensioned in said longitudinal direction, said flap having a proximal edge portion adjacent the basic structure as viewed in said transverse direction and an elastically stretchable free edge portion spaced from said basic structure wherein said sheet is folded in said free edge portion along a fold line extending in said longitudinal direction back onto itself with said elastic member inside and wherein said elastic member is placed at least 1mm apart from said fold line toward said proximal edge portion and bonded to the inner surface of said sheet.

W:\Aurion\Dev\718\pat\ADO\M 71001-00 3.may05.doc

Fig. 3 is a rear view depicting the partially cutaway absorbent sanitary article;

Fig. 4 is a sectional view taken along line IV - IV in Fig. 2;

Fig. 5 is a sectional view taken along line V - V in Fig. 2; and

Fig. 6 is a view similar to Fig. 4 depicting an alternative embodiment of this invention.

Details of a disposable absorbent sanitary article according to this invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

Fig. 1 depicts a urine pad 1 as one embodiment of a disposable absorbent sanitary article attached to a diaper cover 2 as a specific embodiment of the garment. The diaper cover 2 includes an inner sheet 3 made of a nonwoven fabric and an outer sheet 4 made of a plastic film placed upon the inner sheet 3 to define a front waist region 6, a rear waist region 7 and a crotch region 8 extending between these two waist regions 6, 7. Front and rear terminal edges of the front and rear waist regions 6, 7, respectively, are provided with waist-hole elastic members 11, 12 circumferentially extending between the

inner and outer sheets 3, 4 and secured under tension to the inner surface of at least one of the inner and outer sheets 3, 4. Along transversely opposite side edges of the crotch region 8, leg-hole elastic members 13 extend between the inner and outer sheets 3, 4 and secured under tension to the inner surface of at least one of these inner and outer sheets 3, 4. The rear waist region 7 is provided with a pair of tape fasteners 15 extending outward from transversely opposite side edges of the waist region 7, respectively. Each of the fasteners 15 is a hook member adapted to cooperate with a loop member to complete a mechanical fastening system. Being adopted for the diaper cover 2, the hook members 15 are anchored on the loop member attached to the outer sheet 4 of the front waist region 6 in the form of a strip of target tape 16.

The urine pad 1 is detachably attached to the inner side of the diaper cover 2 and contoured by a pair of transversely opposite side edges extending longitudinally as viewed in Fig. 1 parallel to each other across the crotch region 8 into the front and rear waist regions 6, 7, a pair of front and rear terminal edges 18 circumferentially extending parallel to each other (See Fig. 2 also) and four oblique edges 19 each extending between a pair of adjacent ends of the front or rear terminal edge 18 and the associated side edge 17 to define each corner

21 of the pad 1. Spaced from the respective side edges 17, a pair of barrier flaps 20, 20 extending between the pair of terminal edges 18, 18 parallel to the side edges 17.

Figs. 2 and 3 are respectively front and rear view depicting the disposable absorbent sanitary article as detached from the diaper cover 2. Fig. 4 is a sectional view taken along line IV - IV bisecting a length of the pad 1 and Fig. 5 is a sectional view taken along line V - V in Fig. 2. The pad 1 has a basic structure 5 including a liquid-pervious topsheet 22 to come in contact with the wearer's skin, a liquid-impervious backsheet 23 opposed to the topsheet 22 and a body fluid absorbent core 24 disposed between these two sheets 22, 23. The pad 1 is shaped symmetrically about a center line C - C extending longitudinally to bisect a width of the pad 1.

The core 24 is contoured by a pair of transversely opposite side edges 24A extending longitudinally parallel to each other, a pair of longitudinally opposite terminal edges 24B extending transversely parallel to each other and oblique edges 24C each extending between a pair of adjacent ends of the terminal edge 24B and the associated side edge 24A. Such oblique edges 24C slightly curves inwardly of the core 24 so as to reduce a width of the core 24. The side edges 24A curve at their longitudinally middle zones so that the core 24 as a

whole may present an hourglass-shape.

The topsheet 22 is contoured by transversely opposite rectilinear side edges 22A extending longitudinally along the respective side edges 24A of the core 24, longitudinally opposite terminal edges 22B extending transversely and oblique edges 22C defined at the respective corners 21 of the pad 1, each oblique edge 22c extending to describe a gentle curve between each pair of adjacent ends of the side edge 22A and the associated terminal edge 22B.

The backsheet 23 is substantially identical to the topsheet 22 in shape as well as in size and contoured by transversely opposite rectilinear side edges 23A extending longitudinally along the respective side edges 24A of the core 24, longitudinally opposite terminal edges 23B extending transversely and oblique edges 23C defined at the respective corners 21 of the pad 1, each oblique edge 23c extending to describe a gentle curve between each pair of adjacent ends of the side edge 23A and the associated terminal edge 23B. The top- and backsheets 22, 23 extend outward beyond curved regions 24D of the respective side edges 24A, the longitudinally opposite terminal ends 24B and the oblique edges 24C of the core 24. The top- and backsheets 22, 23 are placed upon and joined to each other over these extensions by means of hot melt adhesive

(not shown) to form a pair of side flaps 10A laterally extending from the basic structure 5 and a pair of terminal flaps 10B longitudinally extending from the basic structure 10A.

Each of the barrier flaps 20 is formed using a sheet such as of a nonwoven fabric or plastic film, preferably using a liquid-impervious sheet and more preferably using a breathable liquid-impervious sheet 26. A length of the barrier flap 20 is not specified and, according to the one embodiment illustrated, the barrier flap 20 longitudinally extends along the side edge 17 of the pad 1 to the longitudinally opposite terminal edges 18 and the oblique edges 19. The sheet 26 forming the flap 20 is folded along the side edge 17 onto the front and rear surfaces of the pad 1. The portion of the sheet 26 extending on the front surface of the pad 1 is joined to the topsheet 22 at corner join zones 51 and an intermediate join zone 52 as indicated by hatches using hot melt adhesive 27 (See Figs. 2 and 4) and the portion of the sheet 26 extending on the rear surface of the pad 1 is joined to the backsheet 23 at a join zone 28 indicated by hatches using hot melt adhesive 27 (See Figs. 3 and 4). The portion of the sheet 26 extending on the front surface of the pad 1 has its distal marginal edge folded back along a longitudinally extending fold line 39 and joined to itself with its inner surface inside using hot melt adhesive

30A to form a free edge portion 40A of the leak-proof flap 20 presenting an annular cross-section.

The free edge portion 40A of the barrier flap 20 wraps a first elastic member 34 continuously or intermittently secured under a longitudinal tension to the inner surface of the free edge portion 40A over its full length using hot melt adhesive (not shown). While the first elastic member 34 may be laid immediately inside the fold line 39, preferably the first elastic member 34 is spaced inward, as illustrated, from the fold line 39 by a dimension P of 1 mm, preferably of 1 - 20 mm.

The sheet 26 are folded back along the side edge 17 of the pad 1 and put flat and joined to itself with interposition of hot melt adhesive 30B to form a free edge portion 40B of the side flap 10A.

The portions of the sheet 26 folded back along the side edge 17 of the pad 1 sandwich a second longitudinally extending elastic member 36 which is, in turn, continuously or intermittently bonded with a longitudinal tension to the inner surface of the sheet 26 using hot melt adhesive (not shown). Such second elastic member 36 is spaced from the side edge 17 by a dimension R of at least 1 mm, preferably of 1 ~ 20 mm. The second elastic member 36 is laid to confront the curved region

24D of the core 24 so that the portion of the side flap 10A extending outside the curved region 24D of the core 24 may be formed with gathers as the second elastic member 36 contracts.

Referring to Fig. 3, there are provided a pair of rectangular fasteners 31 on the rear side of the pad 1 immediately inside the longitudinally opposite terminal edges, respectively. The fasteners 31 serve for detachably fastening the pad 1 to the inner side of the diaper cover 2 and each of these fasteners 31 may be formed by suitable means such as one of a hook member and a loop member constituting together a mechanical fastening system or a strip of pressure-sensitive adhesive tape. The fasteners 31 extend transversely of the pad 1 and are attached to the backsheet 23 by means of hot melt adhesive or pressure-sensitive adhesive so that respective lateral ends of these fasteners 31 may lie adjacent the respective corners 21 of the pad 1.

As will be seen in Fig. 1, the pad 1 is curved and the first and second elastic members 34, 36 contract as the diaper cover 2 assembled with the pad 1 is put on a wearer's body and longitudinally curved. Contract of the first elastic members 34 causes the barrier flaps 20 to form gathers and at the same time to rise on their proximal edge portions defined by the respective intermediate bond zones 52 as indicated by two-

dot-chain lines in Fig. 4. In this manner, the barrier flaps 20 form a pocket 20A opening inwardly of the pad 1. The free edge portions 40A of the barrier flaps 20 are placed against, for example, the inguinal region of the wearer. Contract of the second elastic members 36 generates gathers between the free edge portions 40B of the side flaps 10A and their proximal edge portions extending along the curved regions 24D of the core 24. These gathers are elastically placed against the wearer's skin, for example, around the legs.

The barrier flaps 20 as well as the side flaps 10A have their free edge portions 40A, 40B presenting the annular cross-sections. In addition, the first elastic members 34 are spaced from the fold lines 39 of the free edge portions 40A and the second elastic members 36 are also spaced from the side edges 17 substantially defining the fold lines of the free edge portions 40B. Consequently, the sheet 26 forming the flaps 20, 10A is freely deformed to round out or collapsed at the respective free edge portions 40A, 40B as indicated by single-dot-chain line in Fig. 4 as the flaps 20, 10A come in contact with the wearer's skin and thereby to prevent the first and second elastic members 34, 36 from cutting into the wearer's skin. The possibility that the first and second elastic members 34, 36 might cutting into the wearer's skin can be reliably

avoided even if the pad 1 is put on the wearer's body somewhat incorrectly because the first and second elastic members 34, 36 are continuously or intermittently secured to the sheet 26 over their full lengths and therefore immovable relative to the sheet 20.

Fig. 6 is a view similar to Fig. 4 depicting an alternative embodiment of this invention. This urine pad 1 differs from that of Fig. 4 in that the backsheet 23 laterally extends beyond the topsheet 22 to form the side flaps 10B and the sheets 26 are joined to the upper surfaces of respective side flaps 10B to form the barrier flaps 20. In this manner, it is possible without departing the scope and spirit of this invention to form the side flaps 10A and the barrier flaps 20 of the urine pad 1 by separate sheet materials so far as the flaps 10A, 20 have their free edge portions 40A, 40B presenting the annular cross-sections.

Exploitation of this invention is not limited to the absorbent sanitary article such as the urine pad 1 as has been described hereinabove. This invention can be exploited also in the form of the sanitary article having any one of the side flaps 10A and the barrier flaps 20. Furthermore, the idea of this invention is applicable also to at least one of the plural flaps included in the sanitary article. It should be noticed

here that the barrier flaps 20 lying on the inner side of the article 1 are often formed by a nonwoven fabric having a relatively small basis weight while the side flaps 10A defining the outer periphery of the article 1 are often formed by sheet material having a relatively high rigidity. More specifically, either a plastic film having a high rigidity or a thick nonwoven fabric having a basis weight of 15 ~ 50 g/m² both rarely used as stock material for the topsheet is often used as the backsheet 23 or the sheet 26 forming the side flaps 10A. This invention may advantageously applied to the side flaps 10A including such material in order to improve a feeling to wear the sanitary article.

For exploitation of this invention, joining of the various members relying on hot melt adhesive may be also achieved using the other means such as heat-sealing technique. The disposable absorbent sanitary article according to this invention includes, in addition to the urine pad, various specific examples such as training pants, menstruation pads and panty liners. In these sanitary articles, positions as well as sizes of the respective pairs of flaps are not limited to those in the illustrated embodiment but may be selectively designed.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

- 5 1. A detachable urine pad for use on a disposable diaper having a body-side surface for contact with a wearer's skin and an undergarment-side surface opposed to said body-side surface and including a basic structure adapted to absorb and retain body fluids between said two surfaces and plural different pairs of flaps adapted to be elastically placed against the wearer's skin as said
- 10 article is put on the wearer's body, wherein any one pair of said plural pairs of flaps each having a transverse direction and a longitudinal direction orthogonal to said transverse direction and formed by a sheet extending outward from said basic structure and an elastic member wrapped by said sheet in a state tensioned in said longitudinal direction, said flap having a proximal edge portion
- 15 adjacent the basic structure as viewed in said transverse direction and an elastically stretchable free edge portion spaced from said basic structure wherein said sheet is folded in said free edge portion along a fold line extending in said longitudinal direction back onto itself with said elastic member inside and wherein said elastic member is placed at least 1mm apart from said fold line
- 20 toward said proximal edge portion and bonded to the inner surface of said sheet.
2. The urine pad according to Claim 1, wherein said elastic member is spaced from said fold line at least by 1 – 20mm.
- 25 3. The urine pad according to Claim 1 or 2, wherein said flap includes a sheet extending laterally outward from said basic structure and functions as a body fluid barrier flap.
- 30 4. The urine pad according to claim 1, 2 or 3, wherein said sheet is of a nonwoven fabric having a basis weight of 15 – 50g/m².

16

5. A urine pad substantially as herein before described with reference to any one of the embodiments illustrated in the accompanying drawings.

DATED: 3 May 2005

5 PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

UNI-CHARM CORPORATION



W:\stron\Dev\InSpec\ODM 71081-00 2muy05.doc

FIG. 2

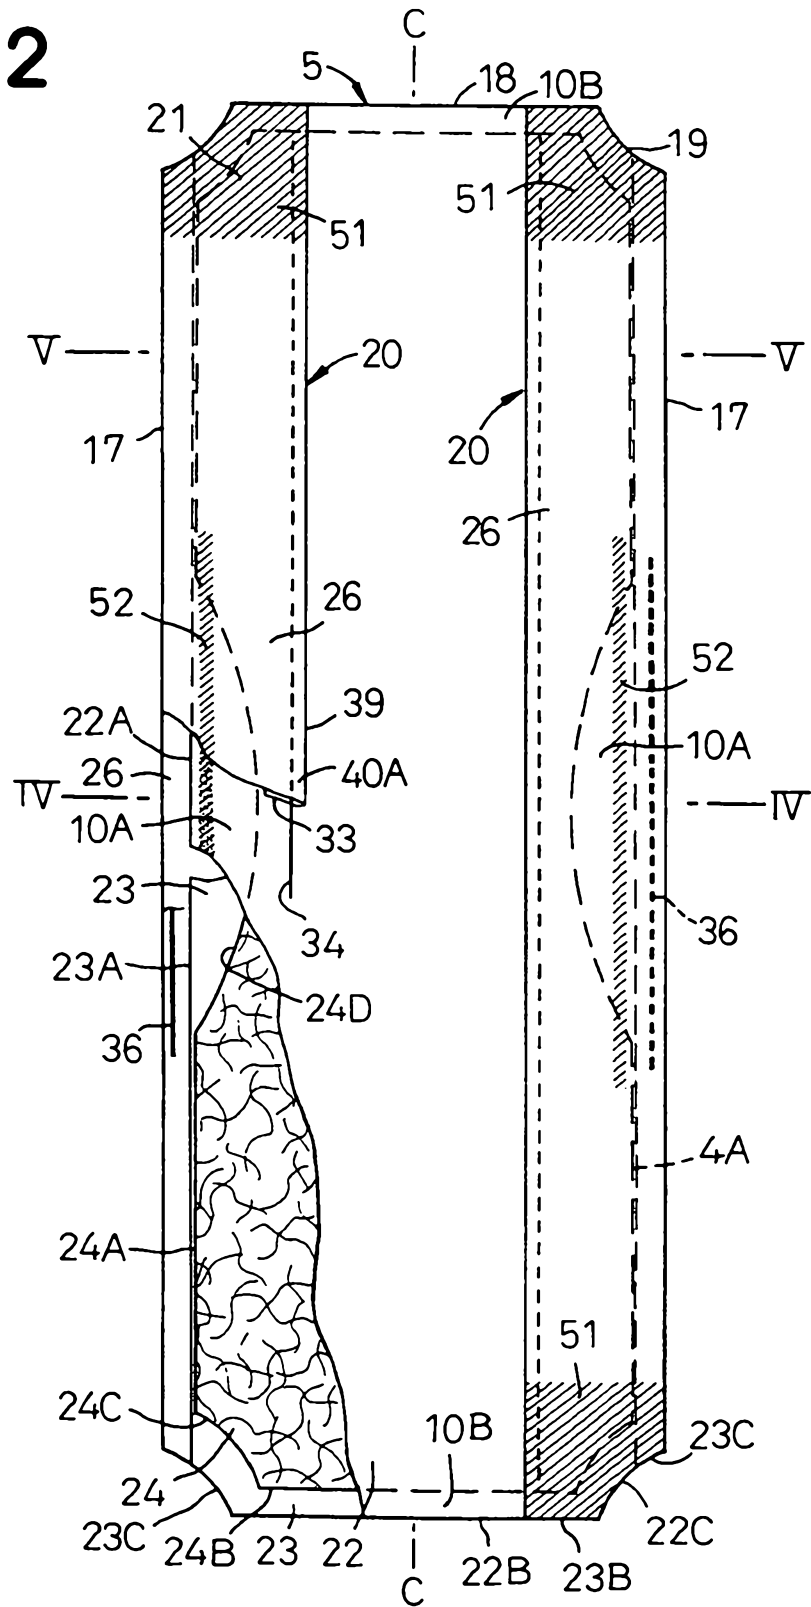


FIG. 3


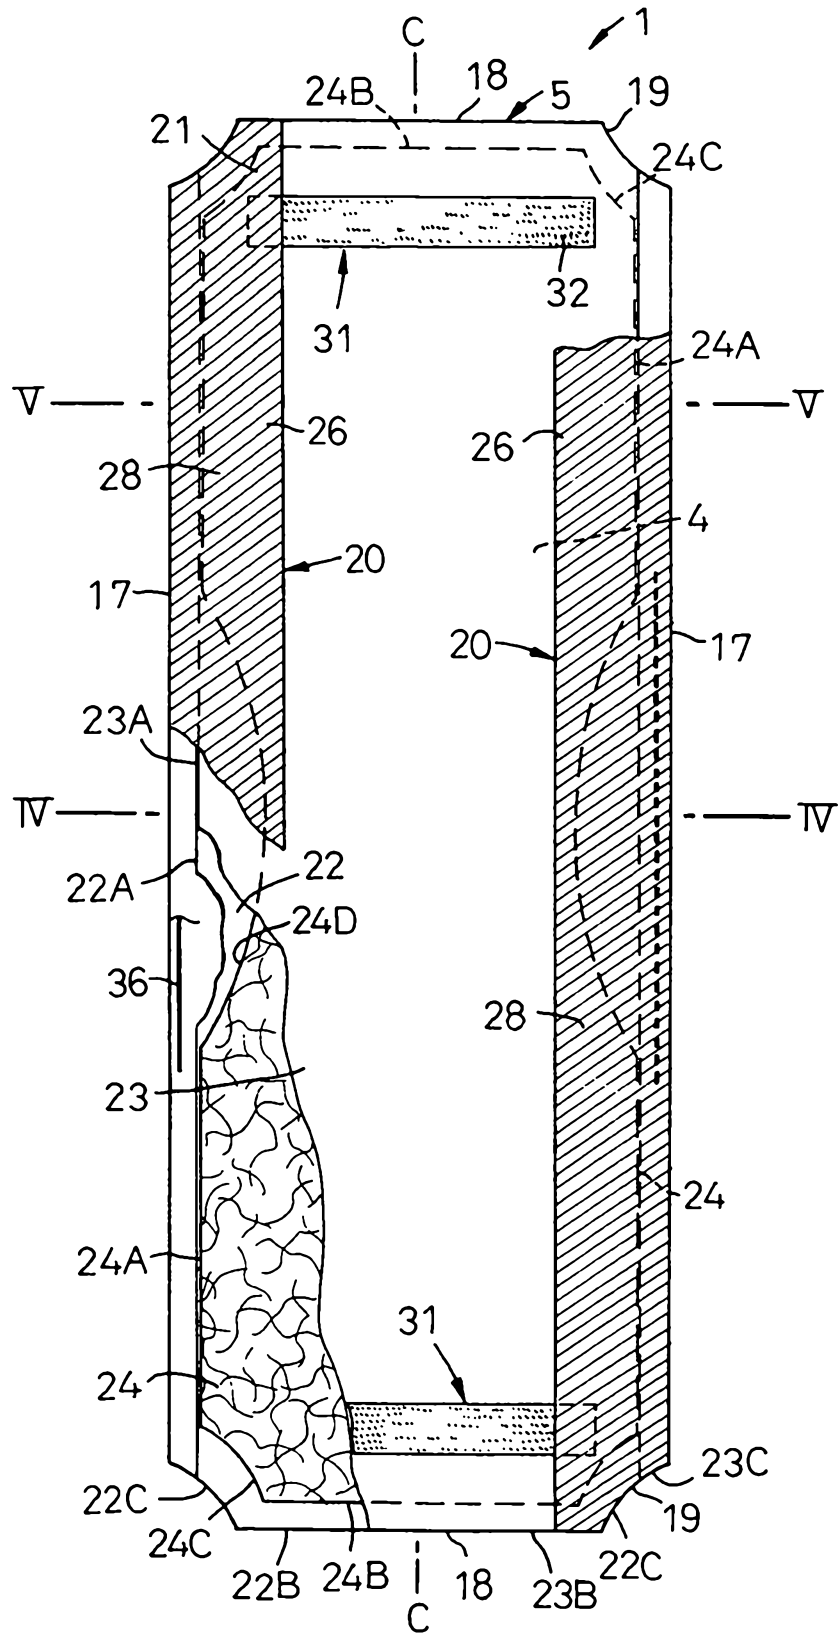


FIG. 4

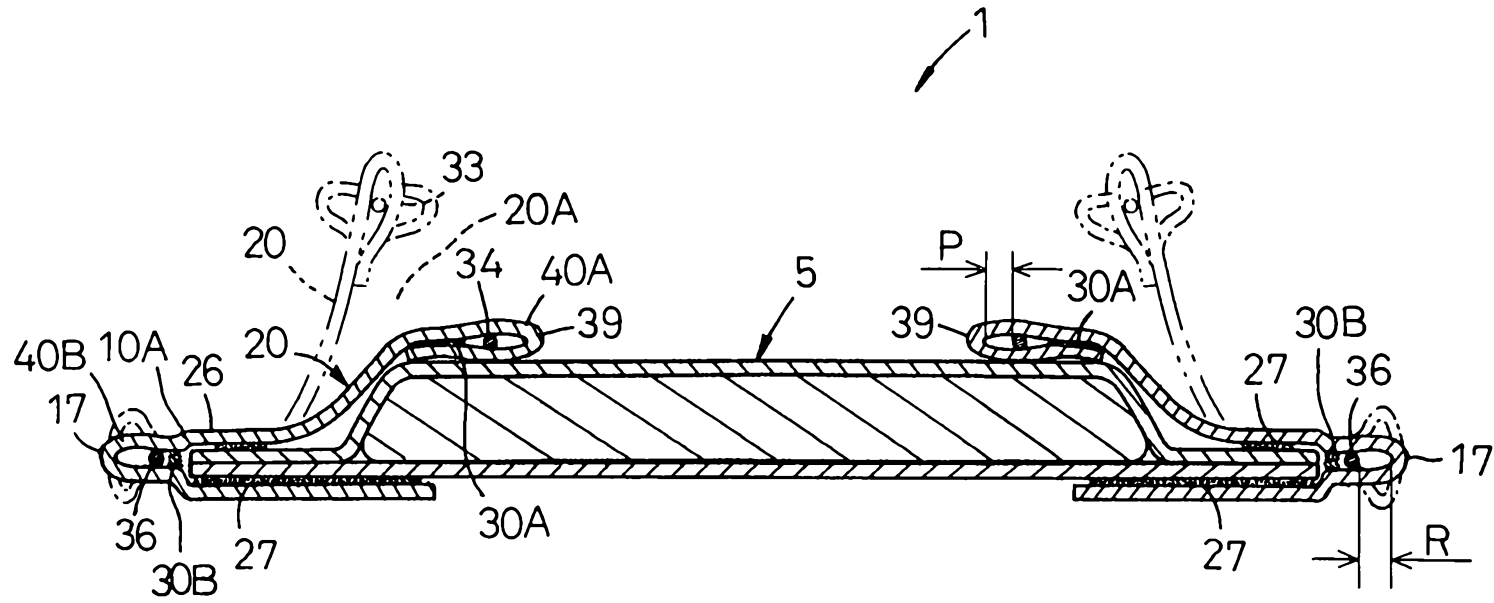
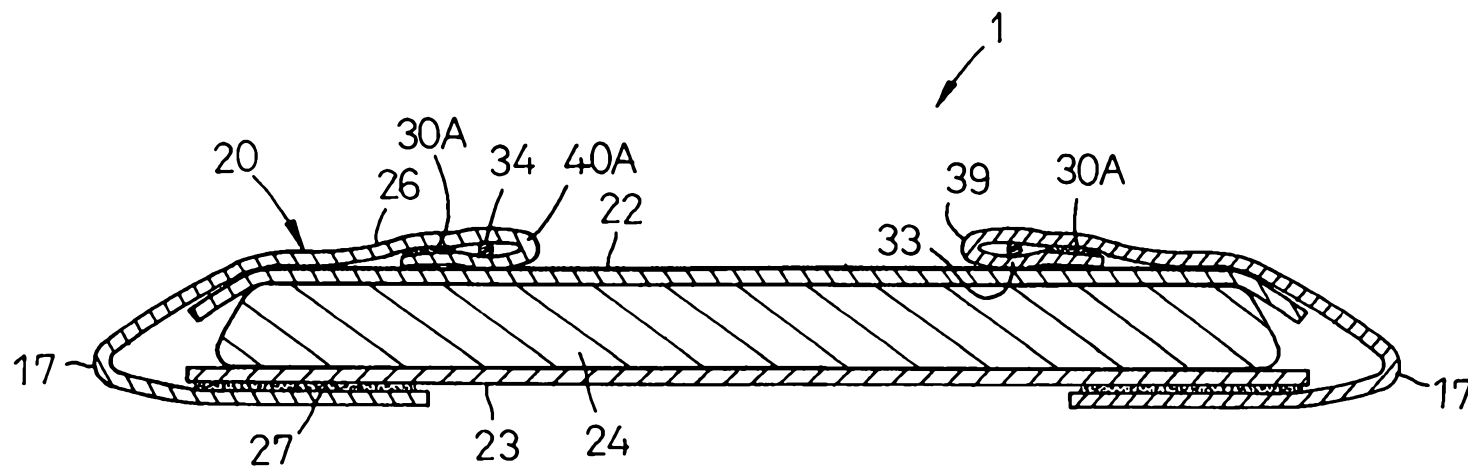


FIG. 5



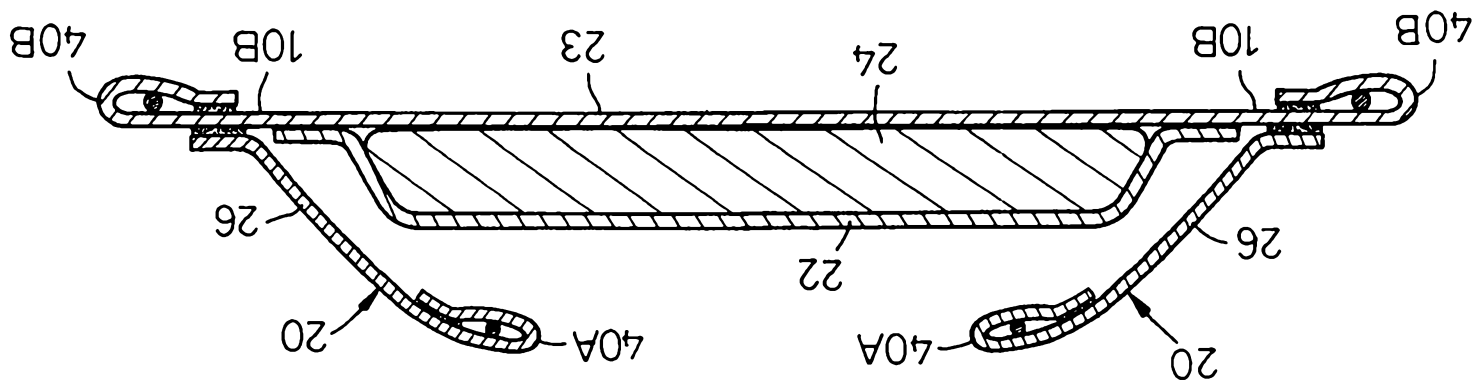


FIG. 6