




(86) **Date de dépôt PCT/PCT Filing Date:** 2013/05/14
(87) **Date publication PCT/PCT Publication Date:** 2013/11/21
(45) **Date de délivrance/Issue Date:** 2019/04/09
(85) **Entrée phase nationale/National Entry:** 2014/11/13
(86) **N° demande PCT/PCT Application No.:** IB 2013/053933
(87) **N° publication PCT/PCT Publication No.:** 2013/171675
(30) **Priorité/Priority:** 2012/05/14 (ITTO2012A000431)

(51) **Cl.Int./Int.Cl.** *F04D 25/10* (2006.01),
C05F 17/02 (2006.01), *F04D 27/02* (2006.01),
F24F 7/00 (2006.01)
(72) **Inventeurs/Inventors:**
CELLA MAZZARIOL, PIETRO PAOLO, IT;
GALANZINO, GIAN FRANCESCO, IT;
AVONTO, ALESSANDRO, IT
(73) **Propriétaire/Owner:**
ENTSORGAFIN S.P.A., IT
(74) **Agent:** AVENTUM IP LAW LLP

(54) **Titre : UNITE DE VENTILATION POUR INVERSION D'ECOULEMENT**
(54) **Title: VENTILATION UNIT FOR FLOW REVERSAL**

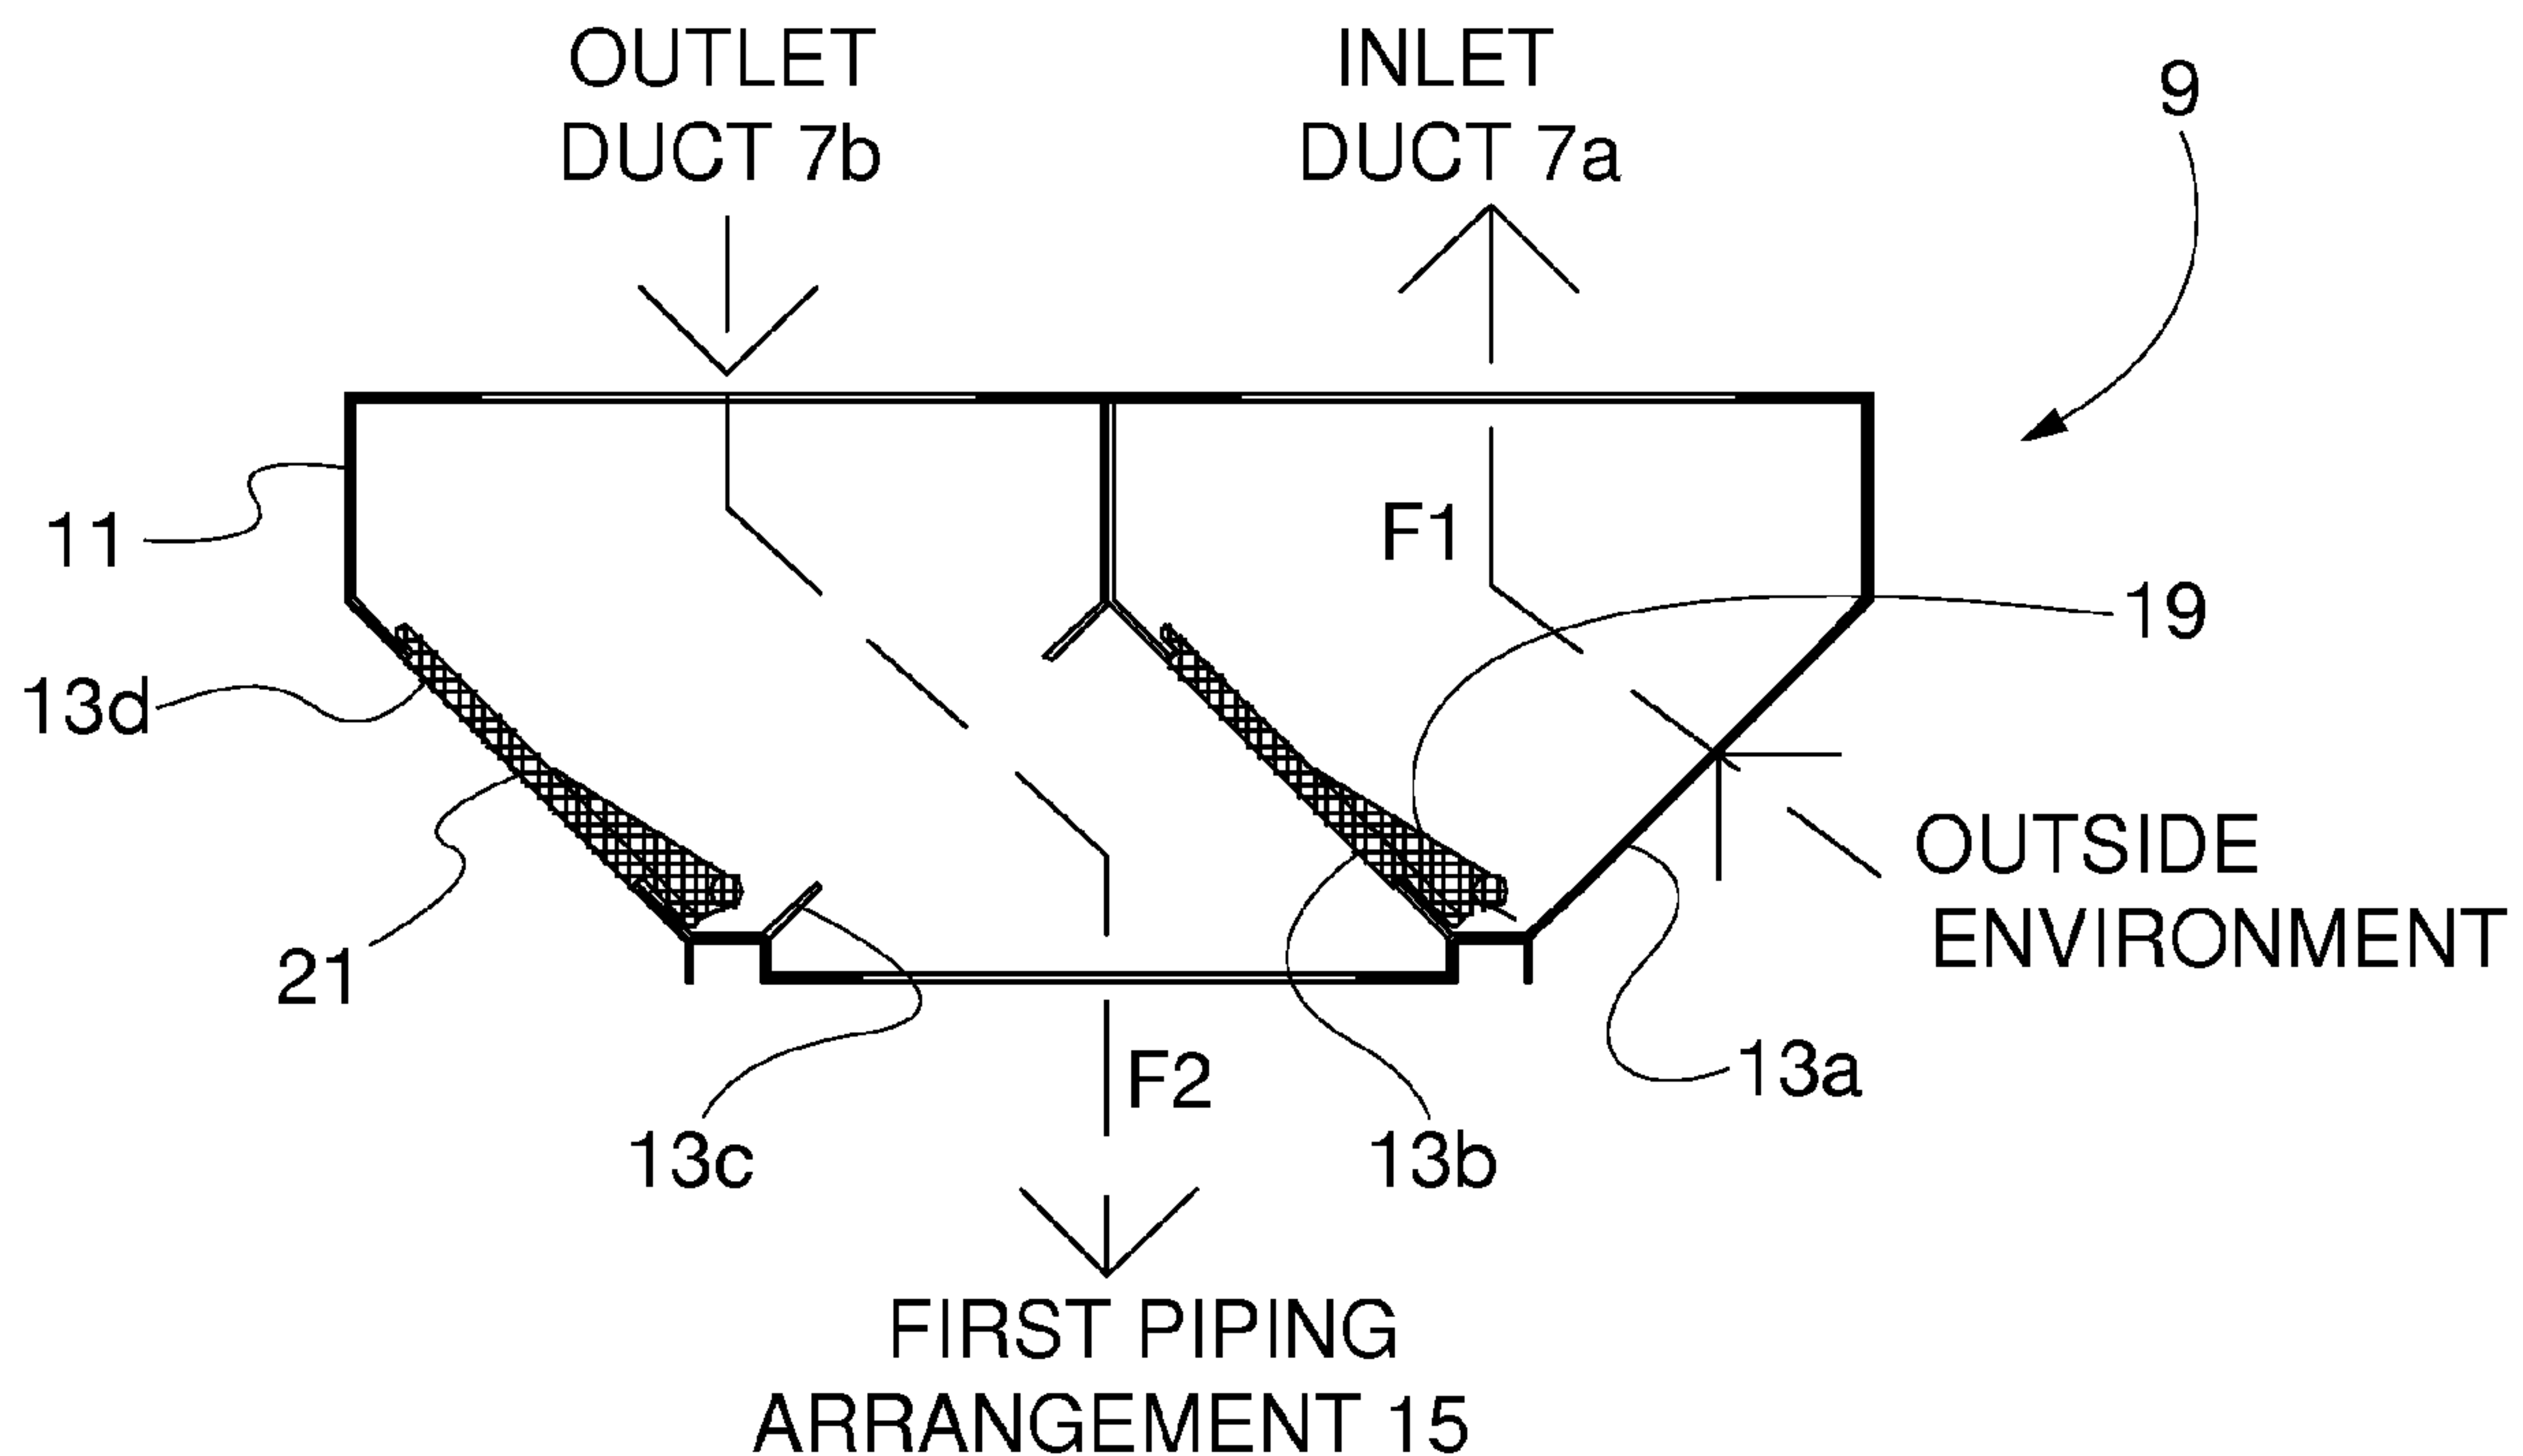

(57) **Abrégé/Abstract:**

The present invention refers to a ventilation unit (1) arranged to effect flow reversal, according to two opposite directions, of a gas flow generated by a fan without reversing the rotation direction of the fan. The ventilation unit (1) includes a fan (5), at least a first piping arrangement (15) through which a gas flow is intended to pass in one of the two possible directions depending on whether it is blown or sucked by said fan, and a switching assembly (9) arranged between said fan (5) and said first piping arrangement (15), at least a switching device (19, 21) being provided in said switching assembly (9) and being movable between two positions for selectively and alternately connecting said first piping arrangement (15) to the delivery duct (7b) and to the suction duct (7a) of said fan, so as to allow the passage of a gas flow in a direction or in the opposite direction within said first piping arrangement.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2013/171675 A1(43) International Publication Date
21 November 2013 (21.11.2013)

(51) International Patent Classification:

F04D 25/10 (2006.01) *C05F 17/02* (2006.01)
F04D 27/02 (2006.01) *F24F 7/00* (2006.01)

(21) International Application Number:

PCT/IB2013/053933

(22) International Filing Date:

14 May 2013 (14.05.2013)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

TO2012A000431 14 May 2012 (14.05.2012) IT

(71) Applicant: **ENTSORGAFIN S.P.A.** [IT/IT]; Strada Provinciale Per, Castelnuovo 7/9, I-15057 Tortona (al) (IT).(72) Inventors: **CELLA MAZZARIOL, Pietro Paolo**; Via Carducci N. 15, I-15057 Tortona (al) (IT). **GALANZINO, Gian Francesco**; Via Fracchia N. 11, I-15057 Tortona (al) (IT). **AVONTO, Alessandro**; C/o Entsorgafin S.p.a.,

Strada Provinciale Per Castelnuovo Scrivia 7/9, I-15057 Tortona (al) (IT).

(74) Agents: **ROBBA, Pierpaolo** et al.; Interpatent Srl, Via Caboto 35, I-10129 Torino (IT).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: VENTILATION UNIT FOR FLOW REVERSAL

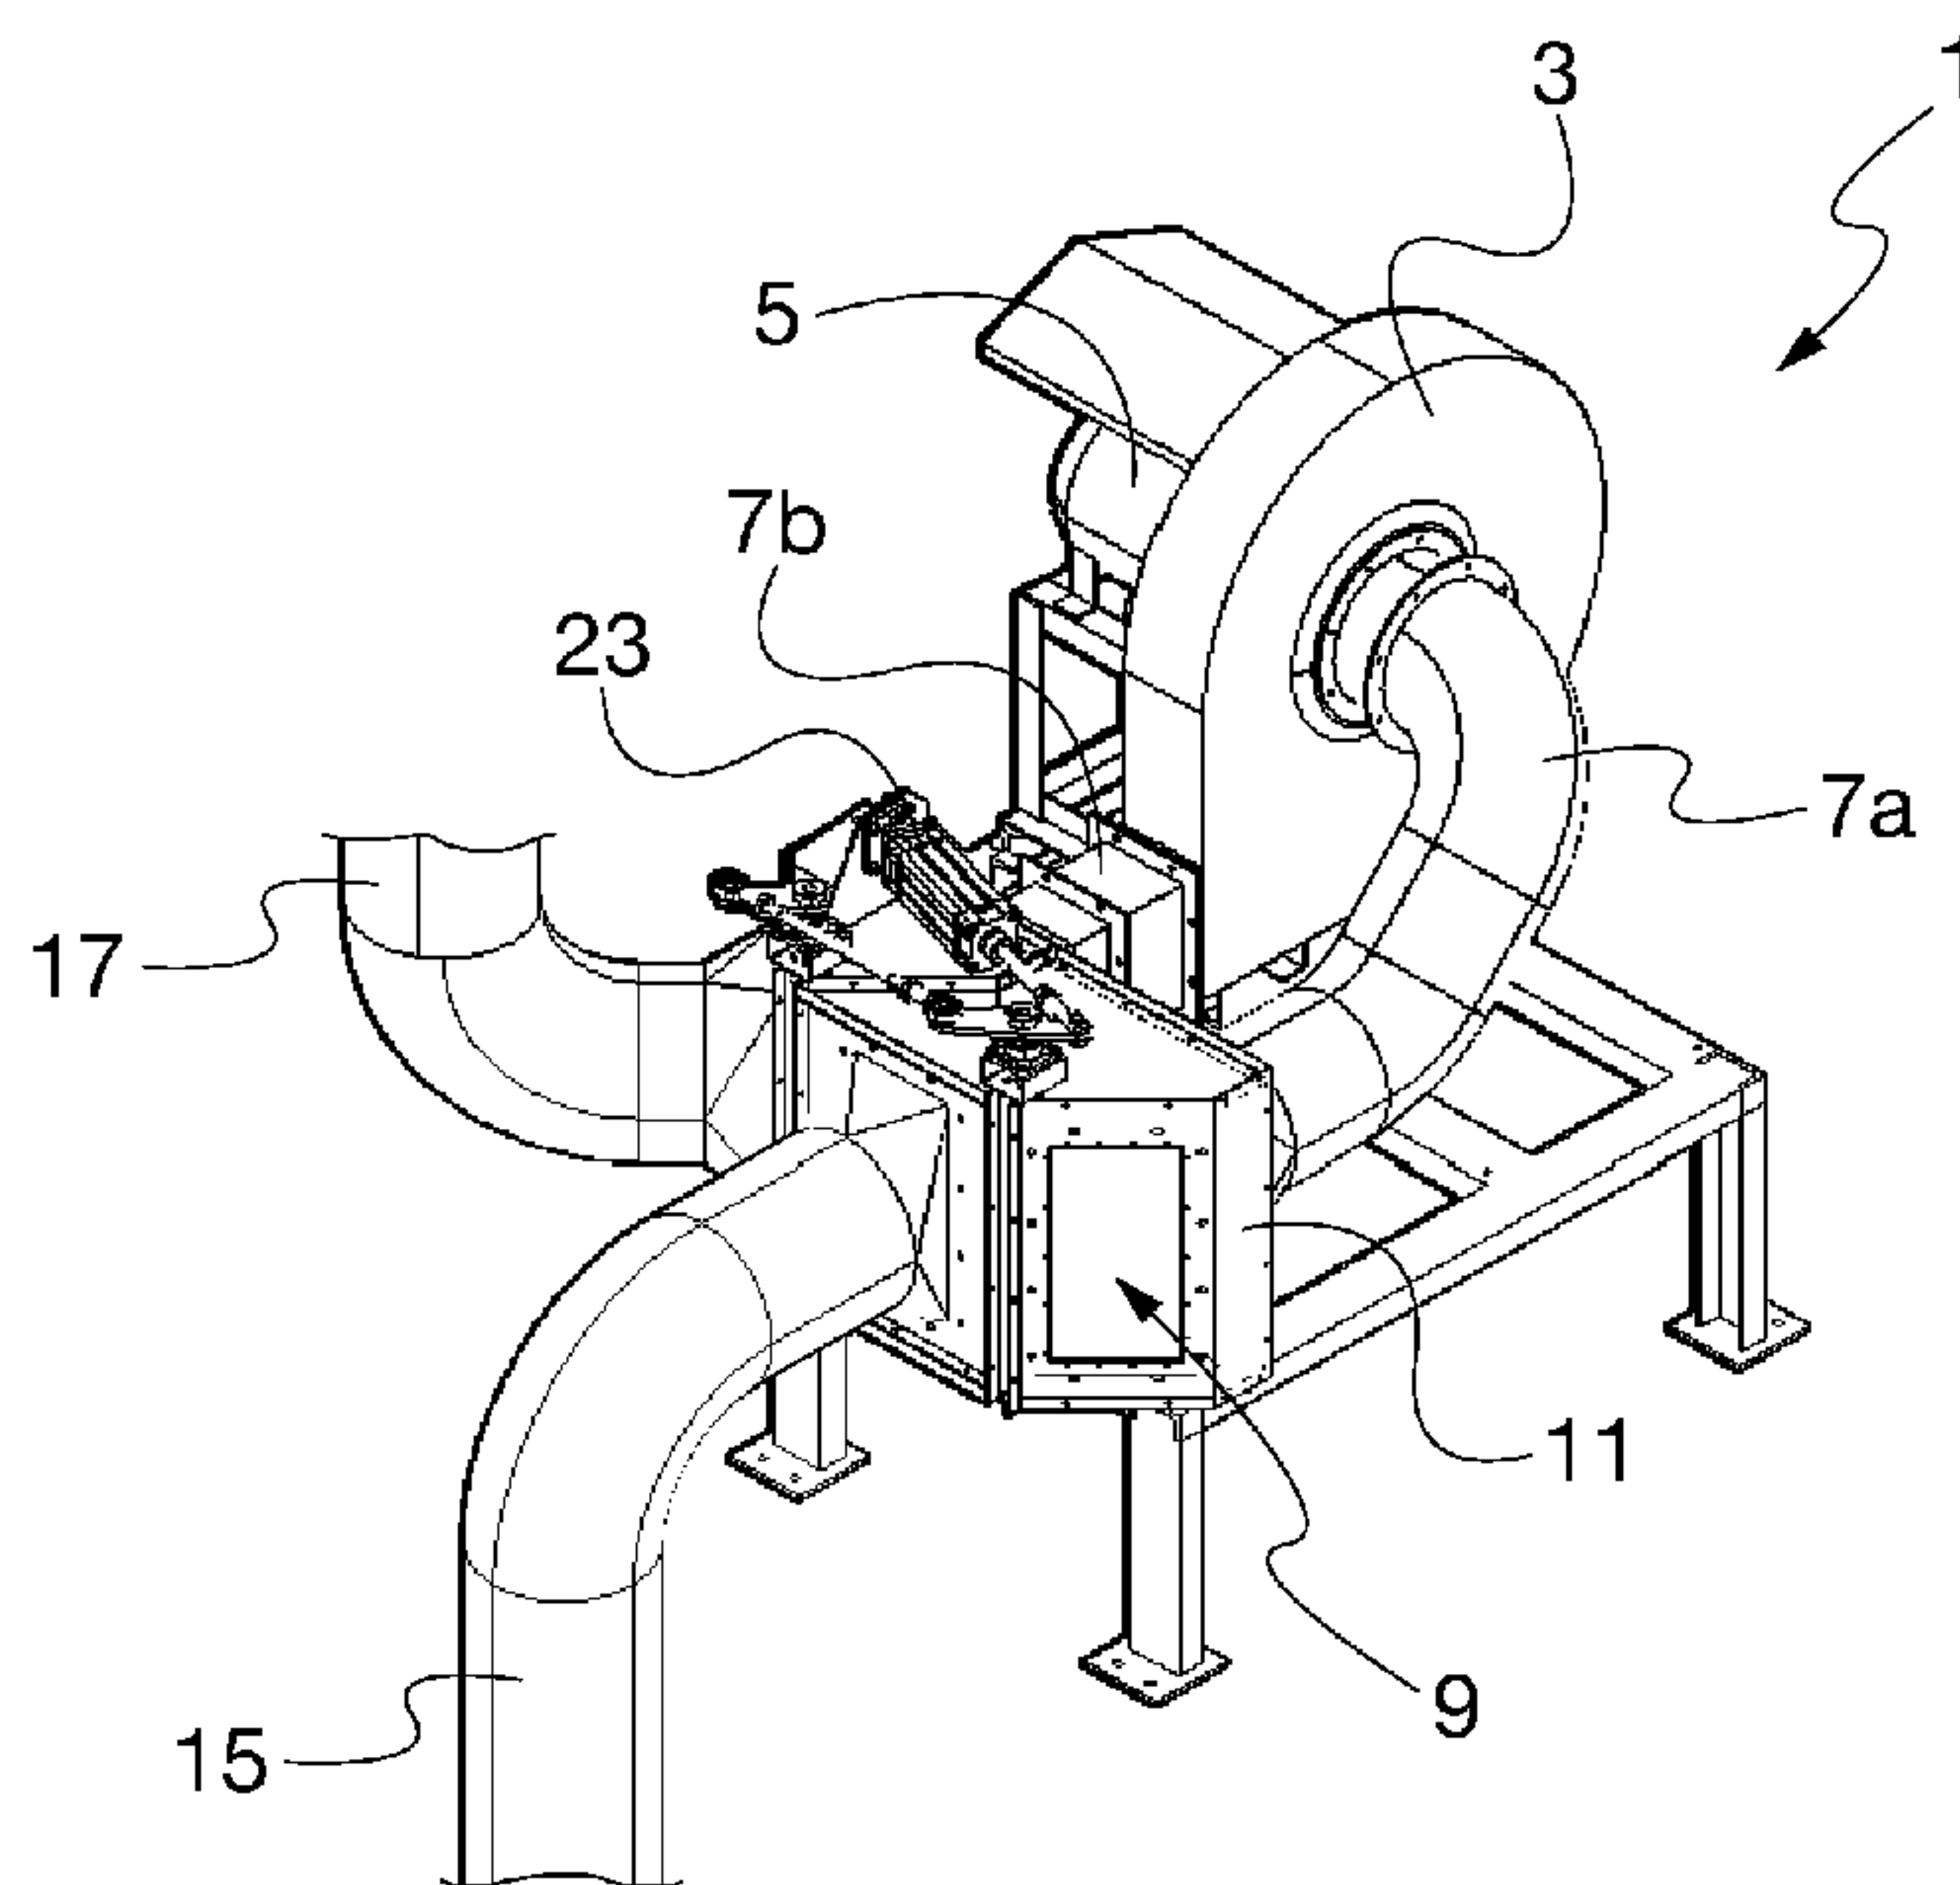


Fig. 1

(57) Abstract: The present invention refers to a ventilation unit (1) arranged to effect flow reversal, according to two opposite directions, of a gas flow generated by a fan without reversing the rotation direction of the fan. The ventilation unit (1) includes a fan (5), at least a first piping arrangement (15) through which a gas flow is intended to pass in one of the two possible directions depending on whether it is blown or sucked by said fan, and a switching assembly (9) arranged between said fan (5) and said first piping arrangement (15), at least a switching device (19, 21) being provided in said switching assembly (9) and being movable between two positions for selectively and alternately connecting said first piping arrangement (15) to the delivery duct (7b) and to the suction duct (7a) of said fan, so as to allow the passage of a gas flow in a direction or in the opposite direction within said first piping arrangement.

WO 2013/171675 A1

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:** — *with international search report (Art. 21(3))*

"Ventilation unit for flow reversal"

DESCRIPTION

Technical Field of the Invention

The present invention refers to a ventilation unit arranged to effect flow reversal, according to two opposite directions, of a gas flow.

More precisely, the present invention refers to a ventilation unit arranged to effect flow reversal, according to two opposite directions, of a gas flow generated by a fan without reversing the rotation direction of the fan.

Particularly, the present invention refers to a ventilation unit arranged to effect flow reversal, according to two opposite directions, of a gas flow applicable to plants for the aerobic treatment of organic waste.

Prior Art

An example of a plant for the aerobic treatment of organic waste is described in European Patent EP 1 431 262 in the name of the present Applicant.

A plant of the aforementioned type, housed within a closed building, includes an aerated floor, or pavement, on which the organic waste to be treated is deposited in heaps, the aerobic treatment of such organic waste being effected in a fermentation/bio-oxidation phase obtained by means of forced air; said plant further includes means for generating an air alternate air flow in two opposite directions, through said

floor and said heaps, said means preferably consisting of fans, pairs of three-way valves and by-passes for continuously inverting the air flow generated by said fans.

A drawback of the last described solution lies in its structural and operational complexity and, consequently, in its requiring a non-negligible expenditure of resources; indeed, it is necessary to set up a quite articulated circuit, in which each valve requires its own actuator, this making the system extremely expensive.

European Patent EP 2 017 481, in the name of the present Applicant, describes a ventilation unit which allows, by means of a single fan and a set of valves controlled by a single actuator, to obtain an alternate flow according to two opposite directions and moreover, optionally, to suck fresh air from the outside. In said ventilation unit the fan operates continuously and without reversal of its sense of rotation, whereas the flow reversal is effected by acting only on the valves by means of a single actuator.

Even if the ventilation unit described in EP 2 017 481 constitutes a satisfactory solution for effecting flow reversal of a gas flow generated by a fan without reversing the rotation direction of the fan, it is not free from drawbacks.

In particular, the Applicant has found that using said ventilation unit entails non-negligible head losses due to

turbulences existing in the generated gas flow.

Similarly, the document US 6,207,447 describes a ventilation unit which allows, by means of a single fan and a set of valves controlled by a single actuator, to obtain an alternate flow according to two opposite directions and moreover, optionally, to suck fresh air from the outside.

However, also the ventilation unit described in the aforesaid document has a complex structure with a high number of moving parts, which involves a remarkable risk of failures and malfunctioning, thus making the reliability of the ventilation unit unsatisfactory.

The document US 4,310,020 too describes a ventilation unit that is very complex and has a high number of moving part and it is therefore scarcely reliable.

The document US 1,848,811 describes a ventilation unit which allows, by means of a single fan, to obtain an alternate flow according to two opposite directions.

However, the ventilation unit described therein allows only to reverse the flow along a closed-loop flow circuit, but it does not allow, for instance, to suck fresh air from the outside, this remarkably limiting the field of its possible applications and making it unsuitable, inter alia, for applications in plants for the aerobic treatment of organic waste.

It is the main object of the present invention to overcome

the aforesaid drawback by providing a ventilation unit for flow reversal wherein head losses are reduced to a minimum.

It is another object of the present invention to provide a ventilation unit that is compact and has a limited number of moving mechanical parts, with a corresponding reduction of installation and operation costs.

Disclosure of the Invention

According to the invention, the ventilation unit includes a fan, at least a first piping arrangement through which a gas flow is intended to pass in one of the two possible directions depending on whether it is blown or sucked by said fan, and a switching assembly arranged between said fan and said first piping arrangement, at least a switching device being provided in said switching assembly and being movable between two positions for selectively and alternately connecting said first piping arrangement to the delivery duct and to the suction duct of said fan, so as to allow the passage of a gas flow in a direction or in the opposite direction within said first piping arrangement.

Besides being connected to the first piping arrangement, the suction and delivery ducts of the fan of the ventilation unit can be connected to the outer environment through the switching assembly for sucking an air flow from the outside and discharging an air flow into the outside.

Particularly, in applications where the gas flow to be

discharged is somehow contaminated, said gas flow is not directly brought into the outer environment, but it is insufflated in a second piping arrangement that lead to filtration and/or purification means.

Preferably, said switching devices are two in number, each allowing / preventing the flow connection between said first piping arrangement and said delivery duct and suction duct of the fan, respectively.

Preferably said switching devices are made each by a wing pivotable between the aforesaid two positions.

Thanks to the presence of a simple wing provided along the piping arrangement, the turbulence of the gas flow is reduced and, consequently, also head losses are lower.

In particular, by realizing the switching devices as simple wings, the size of the clearance of the connections between the delivery and suction ducts and said first piping arrangement at these wings can be maximized, which facilitates a linear and turbulence-free behavior of the gas flow.

Owing to the fact that the only moving mechanical parts in the ventilation unit according to the invention are the aforementioned switching devices and that said switching devices are housed in a single switching assembly and are driven by a single common actuator, said ventilation unit is reliable and resistant and has very limited manufacturing

and operating costs.

Brief Description of the Drawings

A preferred embodiment of the ventilation unit for flow reversal according to the present invention, provided by way of non-limiting example, will be now described more in detail with reference to the attached drawings, in which:

Figure 1 shows a perspective view of a ventilation unit according to the invention;

Figure 2a shows, in a sectional view, the switching assembly of the ventilation unit of Figure 1, in a first working position;

Figure 2b shows, in a sectional view, the switching assembly of the ventilation unit of Figure 1, in a second working position;

Figure 3a shows schematically an exemplary application of the ventilation unit of Figure 1, shown in its first working position of Figure 2a, to a plant for the aerobic treatment of organic waste;

Figure 3b shows schematically an exemplary application of the ventilation unit of Figure 1, shown in its second working position of Figure 2b, to a plant for the aerobic treatment of organic waste.

Description of a Preferred Embodiment

With reference to Figure 1, the ventilation unit 1 according to the invention comprises a suitably shaped housing 3, to

be connected to a fan 5 having the function of moving the air flow to be processed, by conferring it the desired flow rate, prevalence and direction.

The housing 3 is connected through a first duct or suction duct 7a and through a second duct or delivery duct 7b to a switching assembly 9, and more particularly to the casing 11 of said switching assembly 9.

With reference also to Figures 2a and 2b, according to the invention in said casing 11 of the switching assembly 9, in addition to the passages at the suction duct 7a and delivery duct 7b, there are provided four additional openings 13a, 13b, 13c, 13d of which a first opening 13a connects the casing 11 to the outer environment, a second opening 13b and a third opening 13c connect the casing 11 to a first piping arrangement 15 and a fourth opening 13d connects the casing 11 to the outer environment through a second piping arrangement 17.

Still according to the invention, to the first piping arrangement 15 there is associated a pair of switching devices 19, 21 movable between two end positions and adapted - by shifting from one of said positions to the other - to selectively connect said first piping arrangement to the delivery duct 7b or to the suction duct 7a of the fan 5, so as to allow/prevent the passage of the gas flow in a determined direction in said first piping arrangement, thus

effecting the flow reversal.

In the preferred embodiment shown, the switching devices consist of simple wings 19, 21 pivotable around a hinging axis for shifting from one of said positions to the other one.

In particular, in Figure 2a there is illustrated a first working configuration in which the wings 19, 21 are in a first position.

In said first working configuration, the second wing 21 obstructs the fourth opening 13d, thus preventing the passage of gas flow through the second piping arrangement 17, and leaves the third opening 13c free, thus allowing the connection between the delivery duct 7b of the fan and the first piping arrangement 15; at the same time, the first wing 19 obstructs the second opening 13b, thus preventing the connection between the suction duct 7a of the fan and the first piping arrangement 15, and leaves the first opening 13a free, in communication with the outer environment.

It will be evident to the person skilled in the art that in this configuration the fan 5, through its suction duct 7a, will suck a gas flow (especially an air flow) from the outer environment (arrow F1) and, through its delivery duct 7b, it will blow a gas flow into the first piping arrangement (arrow F2).

In Figure 2b there is illustrated a second working configuration in which the wings 19, 21 have been brought from the aforesaid first position to a second position.

In said second working condition, the second wing 21 leaves the first opening 13d free, thus allowing the connection between the delivery duct 7b of the fan and the second piping arrangement 17, and obstructs the third opening 13c, thus preventing the connection between said delivery duct 7b and the first piping arrangement 15; at the same time the first wing 19 leaves the second opening 13b free, thus allowing the connection between the suction duct 7a of the fan and the first piping arrangement 15 and obstructs the first opening 13a, in communication with the outer environment.

It will be evident to the person skilled in the art that in this configuration the fan 5, through its suction duct 7a, will suck a gas flow from the first piping arrangement 15 (arrow F3) and, through its delivery duct 7b, it will blow a gas flow into the second piping arrangement (arrow F4) for subsequent discharge into the outer environment.

In this way the ventilation unit 1 effects the flow reversal in the first piping arrangement 15, while always maintaining the same rotation direction.

Due to the fact that the wing 19, 21 are the only moving parts of the switching assembly 9, said switching assembly 9

is compact, reliable, resistant and inexpensive.

Owing to the structure of the switching assembly according to the invention it is possible to make the openings 13a-13d with a clearance sufficiently wide to ensure that the gas flows passing through said openings have an essentially linear behavior: the absence of turbulences guarantees the possibilities of reducing head losses to a minimum, thus allowing to attain the object set forth above. Advantageously, as can be seen in Figure 1, according to the preferred embodiment of the invention shown the wings 19, 21 can be driven simultaneously by a single actuator 23, thus additionally simplifying the structure and operation of the ventilation unit according to the invention.

Moreover, it is clear that it is also possible to provide, if desired, separate actuators for the two wings.

Similarly, the wings 19, 21 can be made as separate and different components or they can be integrated in the form of a single piece.

It is also evident that what has been described above with reference to the embodiment shown has been provided only by way of example and that several modifications and variants are possible without departing from the scope of the invention as defined by the appended claims.

In Figures 3a and 3b there is illustrated by way of example a possible application of the invention to the aerobic

treatment of organic waste.

In such application a plurality of ventilation units 1 are connected on one side, through corresponding first piping arrangements 15, to a bio-oxidation area 100 where the organic waste to be subjected to the aerobic treatment, and on the other side, through corresponding second piping arrangements 17, to a bio-filter 200 for filtering the gas flow before it is exhausted to the outer environment.

Thanks to the use of the ventilation units 1 according to the invention, a gas flow - especially an air flow - can be alternately blown into the bio-oxidation area 100 or sucked therefrom through said first piping arrangements 15 depending on the treatment requirements for the organic waste.

As is known, the possibility of blowing/sucking alternately an air flow into/from masses of organic waste allows to aerate said masses and to provide them with an amount of oxygen sufficient for the correct aerobic treatment of the masses themselves.

Referring particularly to Figure 3a, there is illustrated a situation corresponding to the first working configuration of the ventilation units 1 (see also Figure 2a). In this situation, a clean air flow is sucked from the outer environment and through the first piping arrangements 15 it is blown into the bio-oxidation area 100, into the masses of

organic waste located there. In this situation any flow through the second piping arrangements 17 is prevented.

With reference to Figure 3b, there is illustrated a situation corresponding to the second working configuration of the ventilation units 1 (see also Figure 2b). In shifting to this second situation, a flow reversal has been effected, whereby a contaminated air flow is sucked from the bio-oxidation area 100 through the first piping arrangements 15 and is blown into the second piping arrangements 17 until it reaches a bio-filter 200 where the contaminated air flow is purified before it is discharged into the atmosphere.

Preferably, said second piping arrangements 17 do not lead directly to the bio-filter 200; instead, the second piping arrangements 17 of the ventilation units 1 all open into a single equalization manifold 300 in common, equipped with mixing rooms 310, and the air is sent to the bio-filter only after it has passed through said manifold 300.

The air flow reversal, i.e. the shifting from the phase of blowing into the bio-oxidation area to the phase of sucking from said area, and vice versa, is effected preferably in an automatic manner by detecting the relevant parameters of the microbial activity, such as the O₂ content, the temperature of the material or of the air deriving from the material; such parameters, singularly or in combination, allow to regulate the waste treatment process by following control

schemes developed on the basis of known kinematics or suitably determined ones.

The ventilation unit according to the present invention can be made of different materials depending on its intended applications. For applications to the treatment of organic waste, it is preferably made of metal materials such as steel, or other materials suitable for withstanding chemical aggression by components that may be present especially in the contaminated air flow coming from the bio-oxidation area.

=====

CLAIMS

1. Ventilation unit (1) comprising a fan (5) equipped with a first duct or suction duct (7a) and a second duct or delivery duct (7b) and a first piping arrangement (15), wherein a switching assembly (9) is provided arranged between said fan (5) and said first piping arrangement (15), said switching assembly (9) comprising at least one switching device movable between two positions in order to allow alternately the passage of a gas flow from said fan (5) to said first piping arrangement (15) and vice versa, **characterized in that** said switching assembly includes a casing (11) in which said suction duct (7a) and said delivery duct (7b) of said fan (5) converge, wherein said casing (11) has four openings (13a,13b,13c,13d) of which a first opening (13a) connects said casing (11) to the outer environment, a second and a third opening (13b,13c) connect said casing (11) to said first piping arrangement (15) and a fourth opening (13d) connects said casing (11) to a second piping arrangement (17) **and in that** said switching assembly includes two switching devices (19,21), one (19) of said switching devices being movable between said two positions in order to selectively connect said suction duct (7a) of said fan (5) to said first opening (13a) or said second opening (13b) and the other one of said switching devices (21) being movable between said two positions in order to

selectively connect said delivery duct (7b) of said fan (5) to said third opening (13c) or said fourth opening (13d).

2. Ventilation unit (1) according to claim 1, wherein said switching devices are made as wings (19,21) pivotable around a hinging axis from one of said positions to the other one.

3. Ventilation unit (1) according to claim 1 or 2, wherein said switching devices (19, 21) are made as separate and different components.

4. Ventilation unit (1) according to claim 1 or 2, wherein said switching devices (19,21) are integrated in the form of a single piece.

5. Ventilation unit (1) according to claim 1 or 2, wherein said switching devices (19,21) are driven by a single actuator (23) in common.

6. Ventilation unit (1) according to claim 1 or 2, wherein said switching devices (19,21) are driven by separate and different actuators.

7. Plant for the aerobic treatment of organic waste, of the kind comprising a bio-oxidation area (100) in which the waste to be treated is placed, characterized in that it comprises one or more ventilation units (1) according to any of the claims 1 to 6, the first piping arrangements (15) of said one or more ventilation units (1) being connected to said bio-oxidation (100) and the second piping arrangements (17) of said one or more ventilation units (1) being

connected to a bio-filter (200).

=====

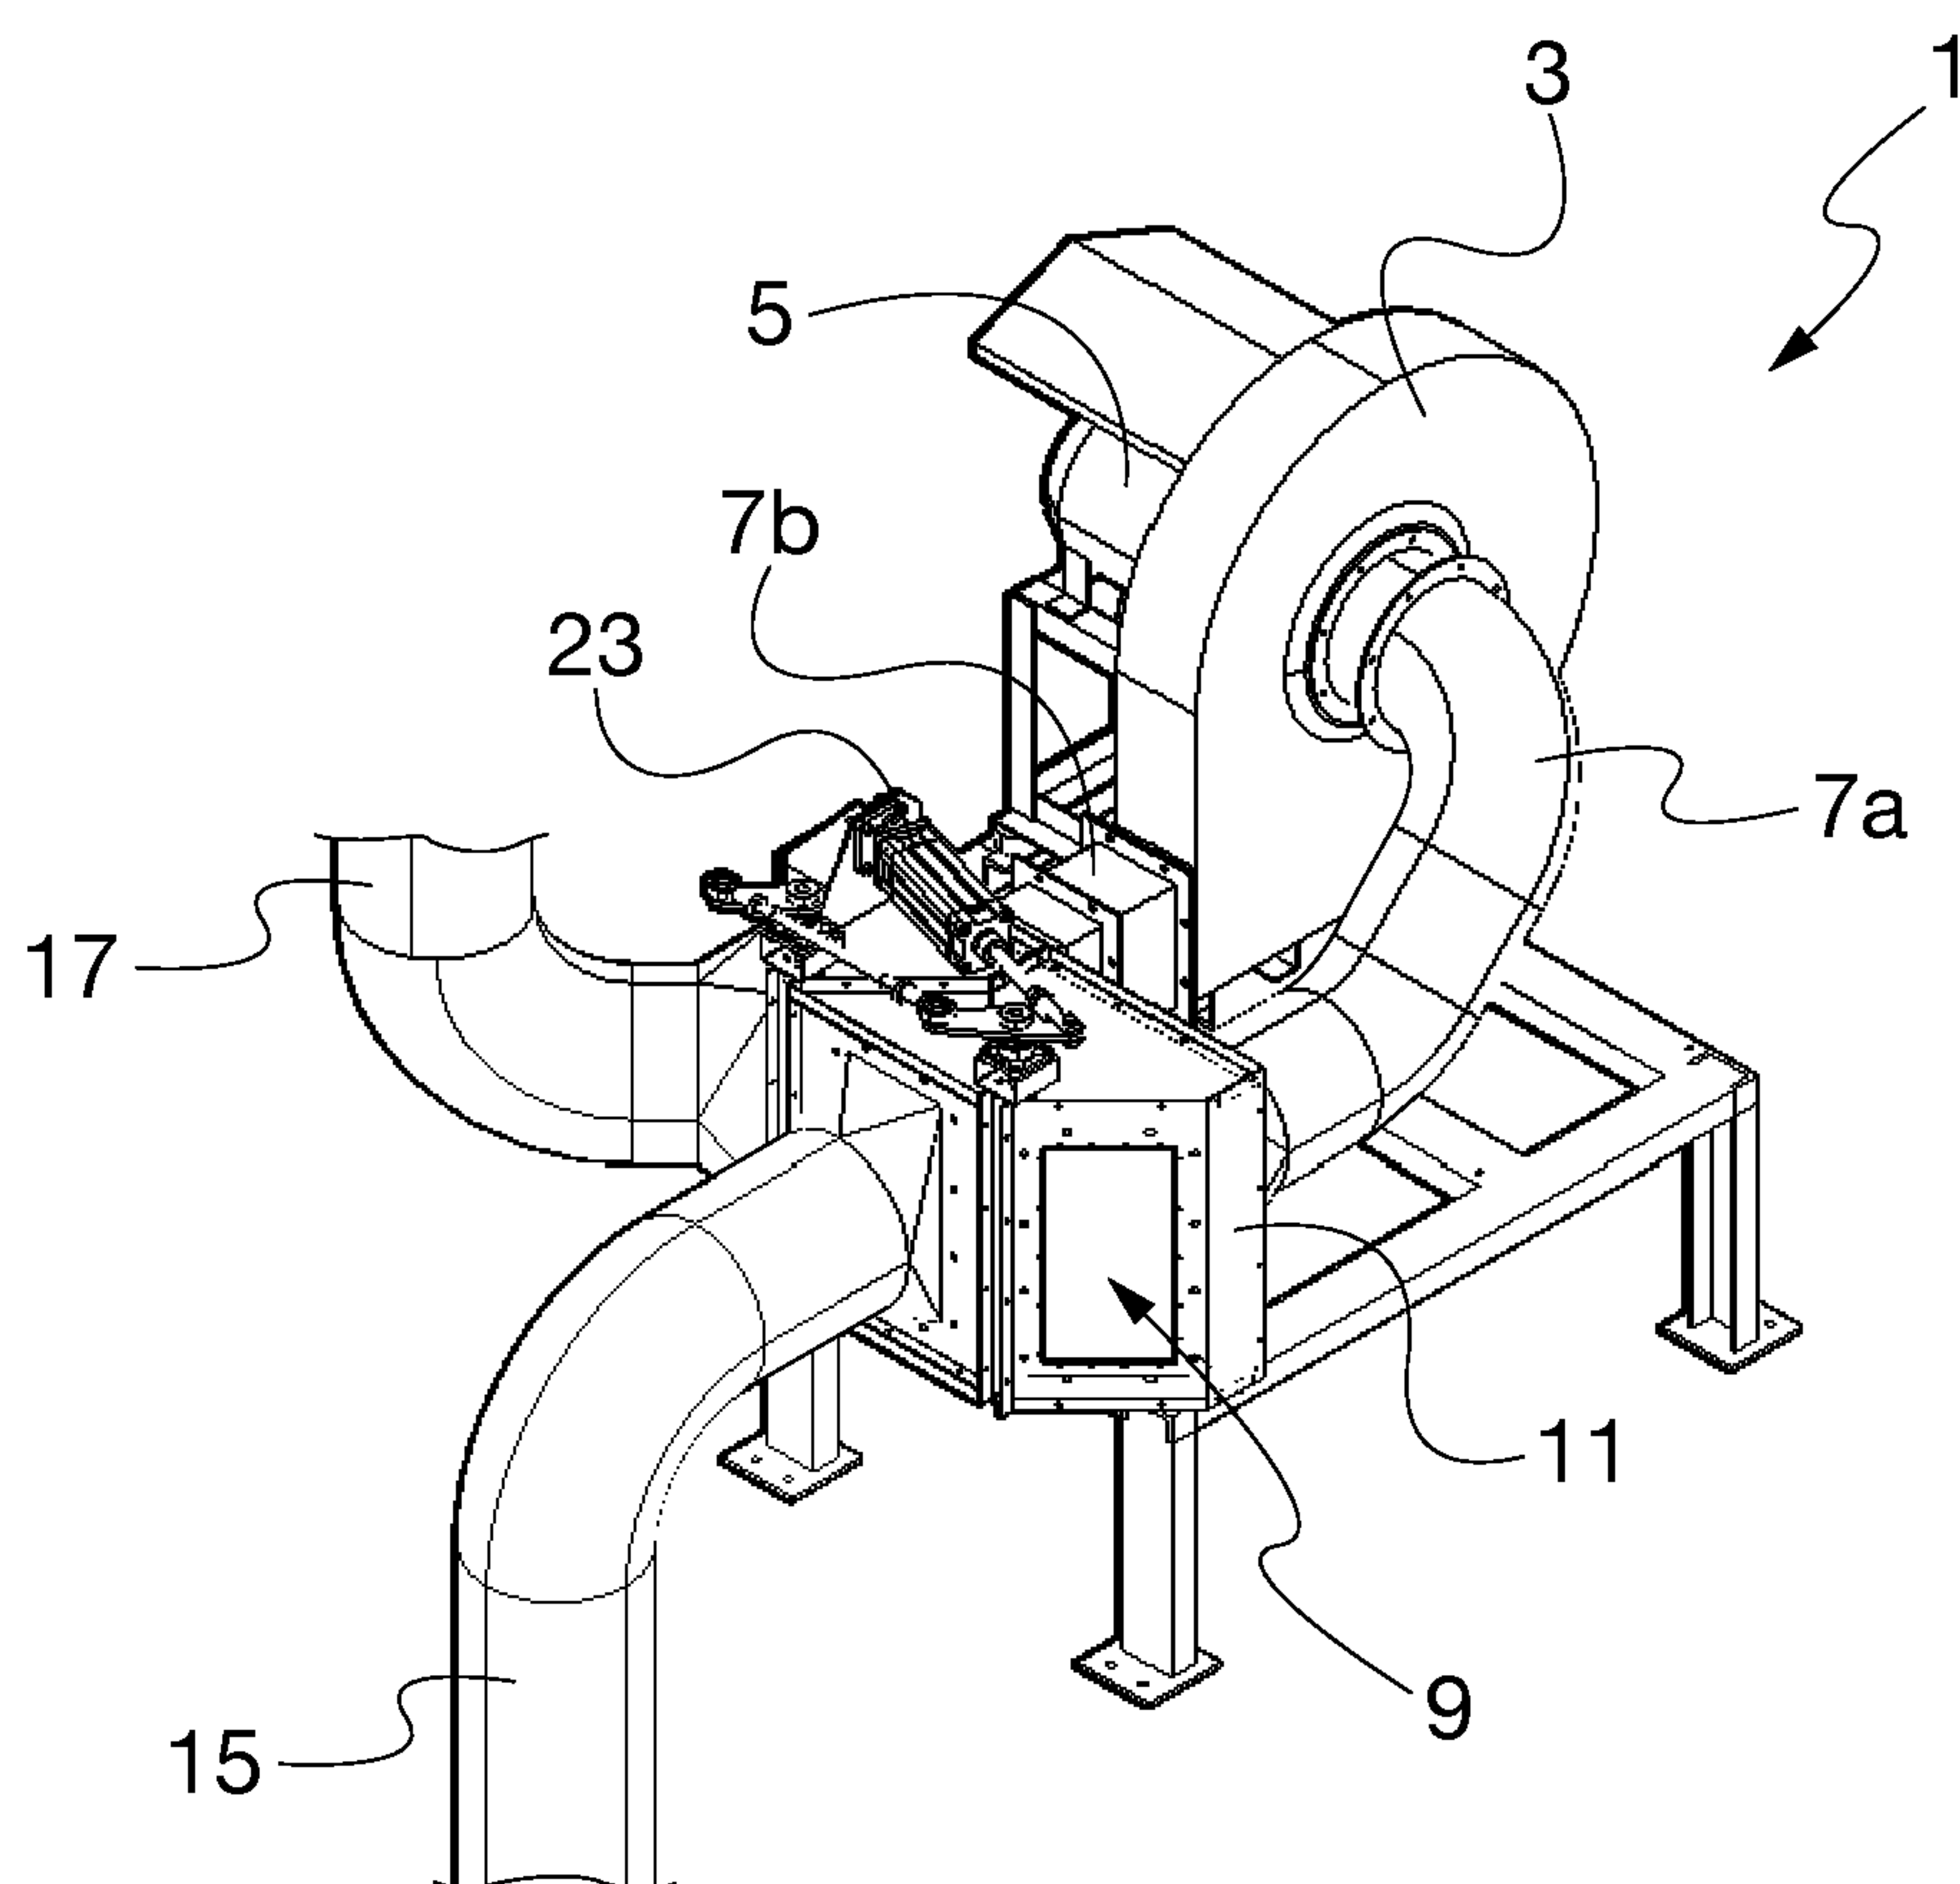


Fig. 1

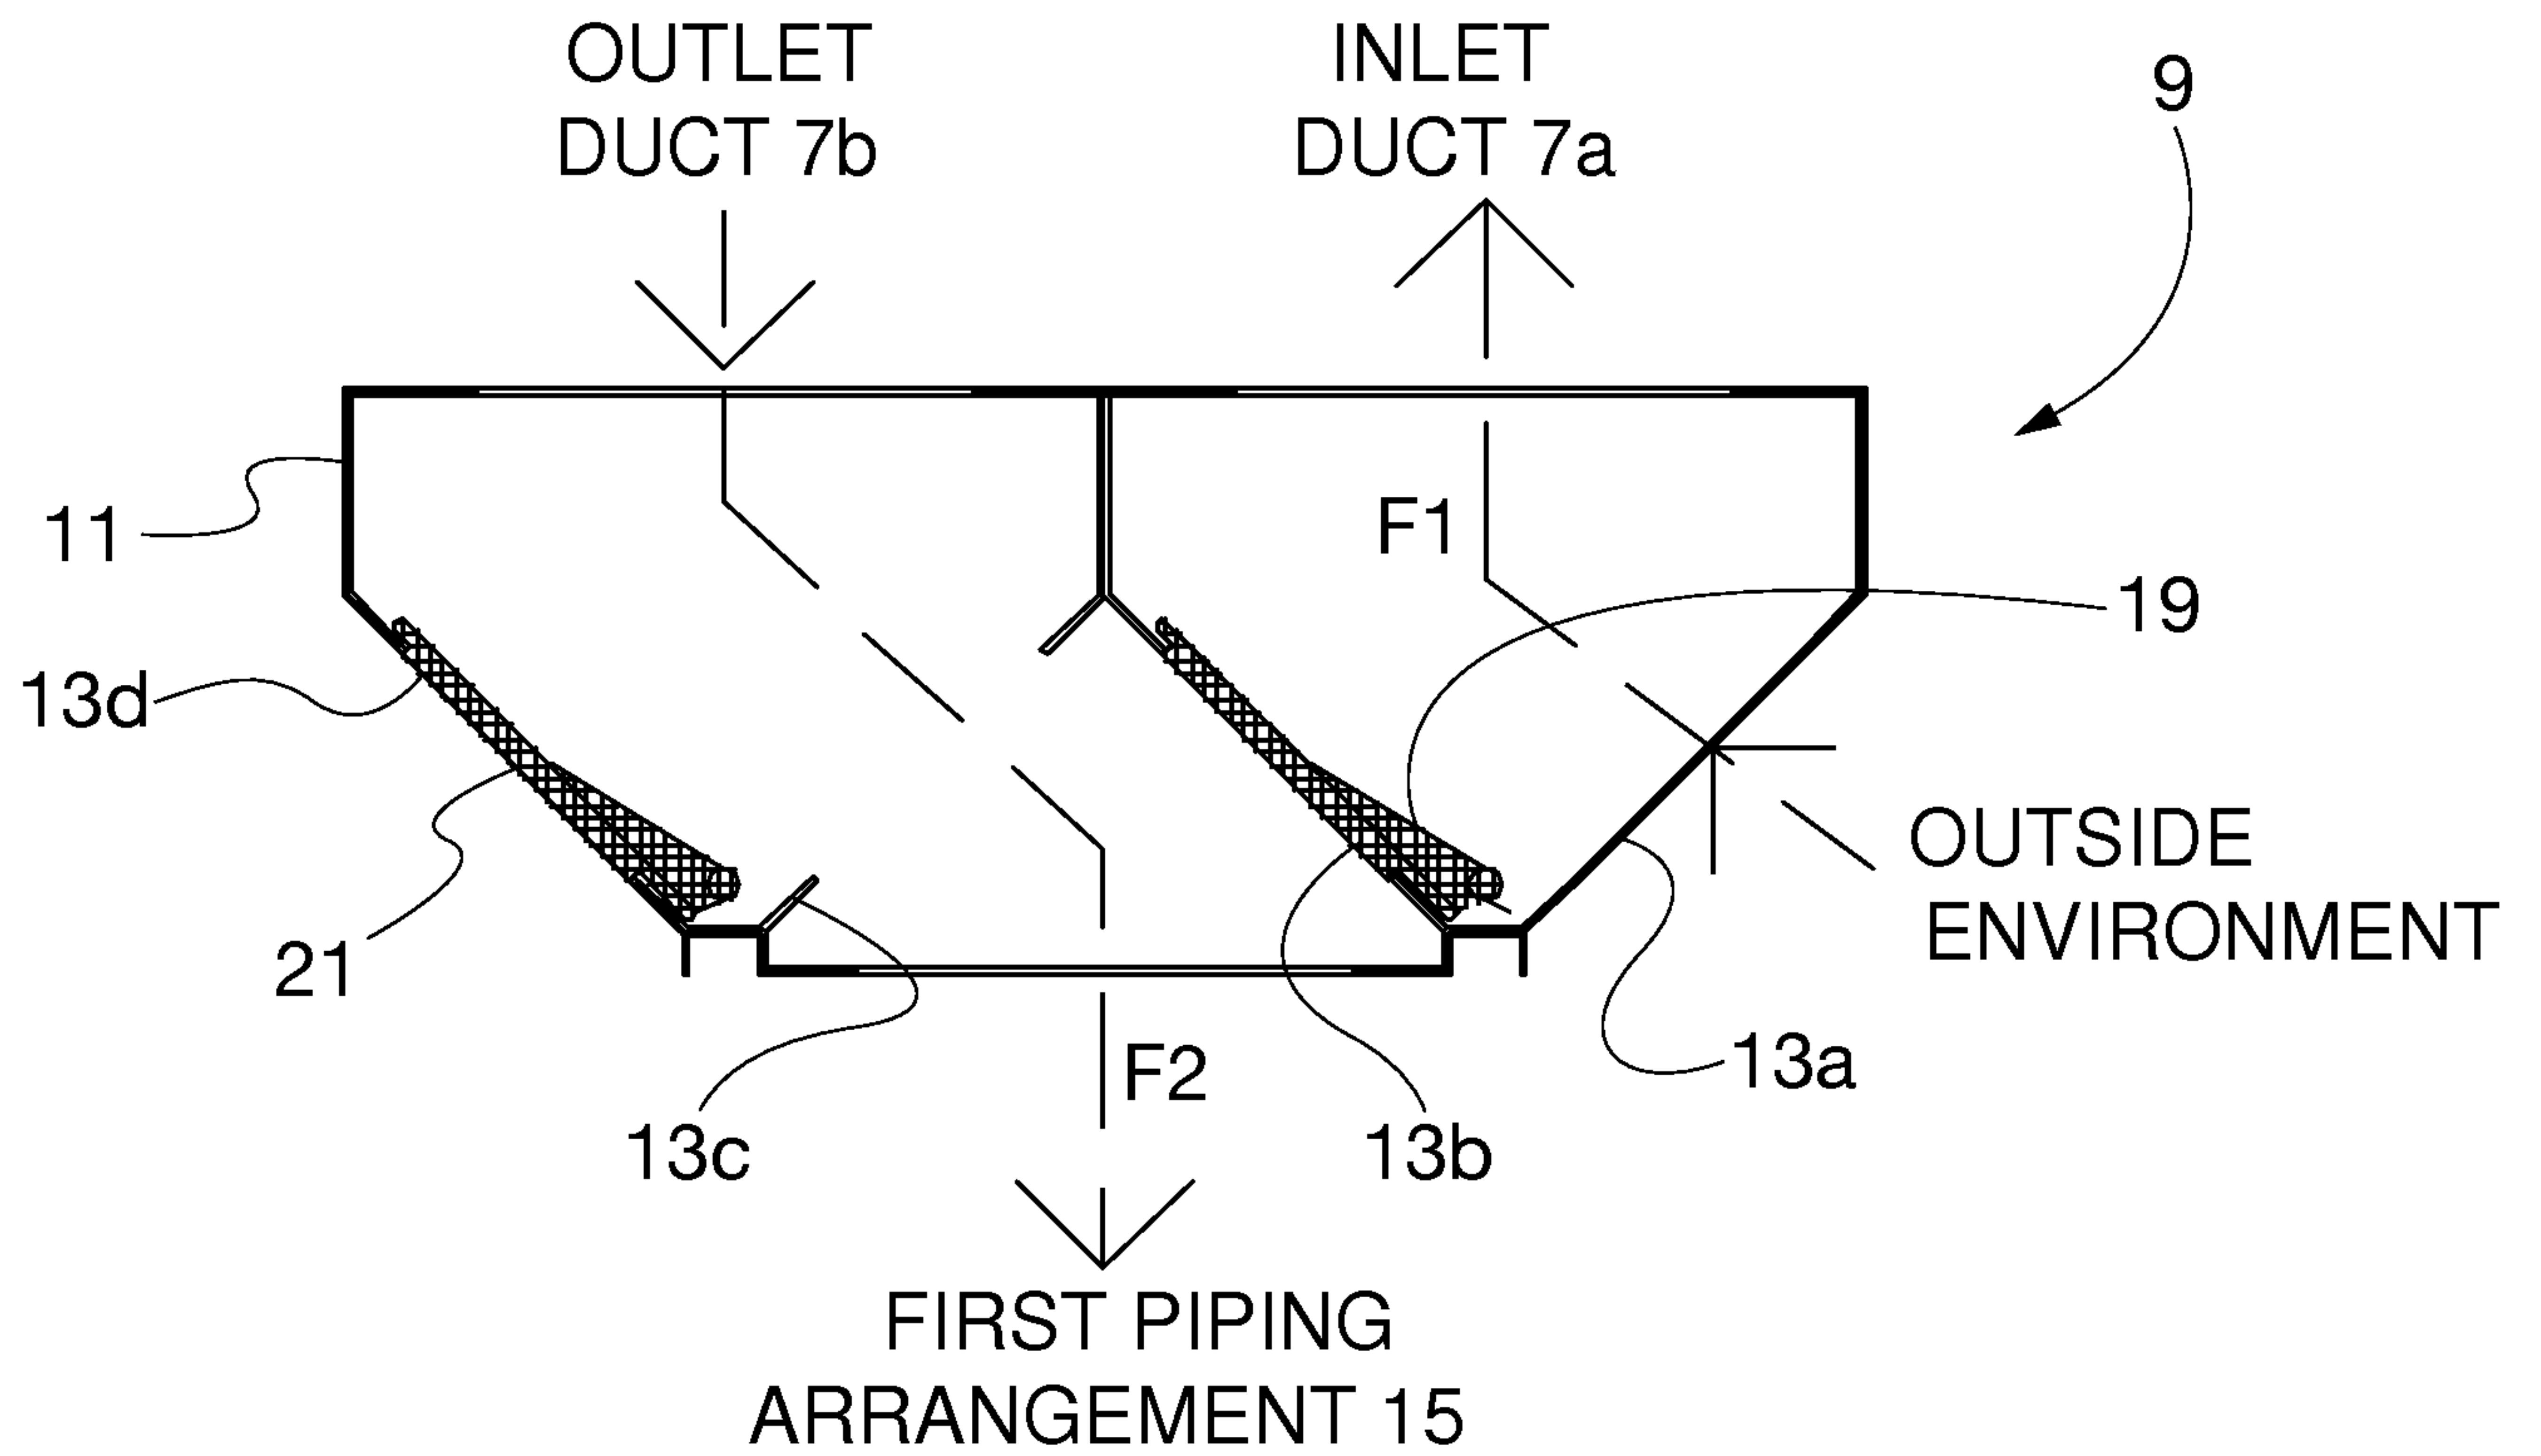


Fig. 2a

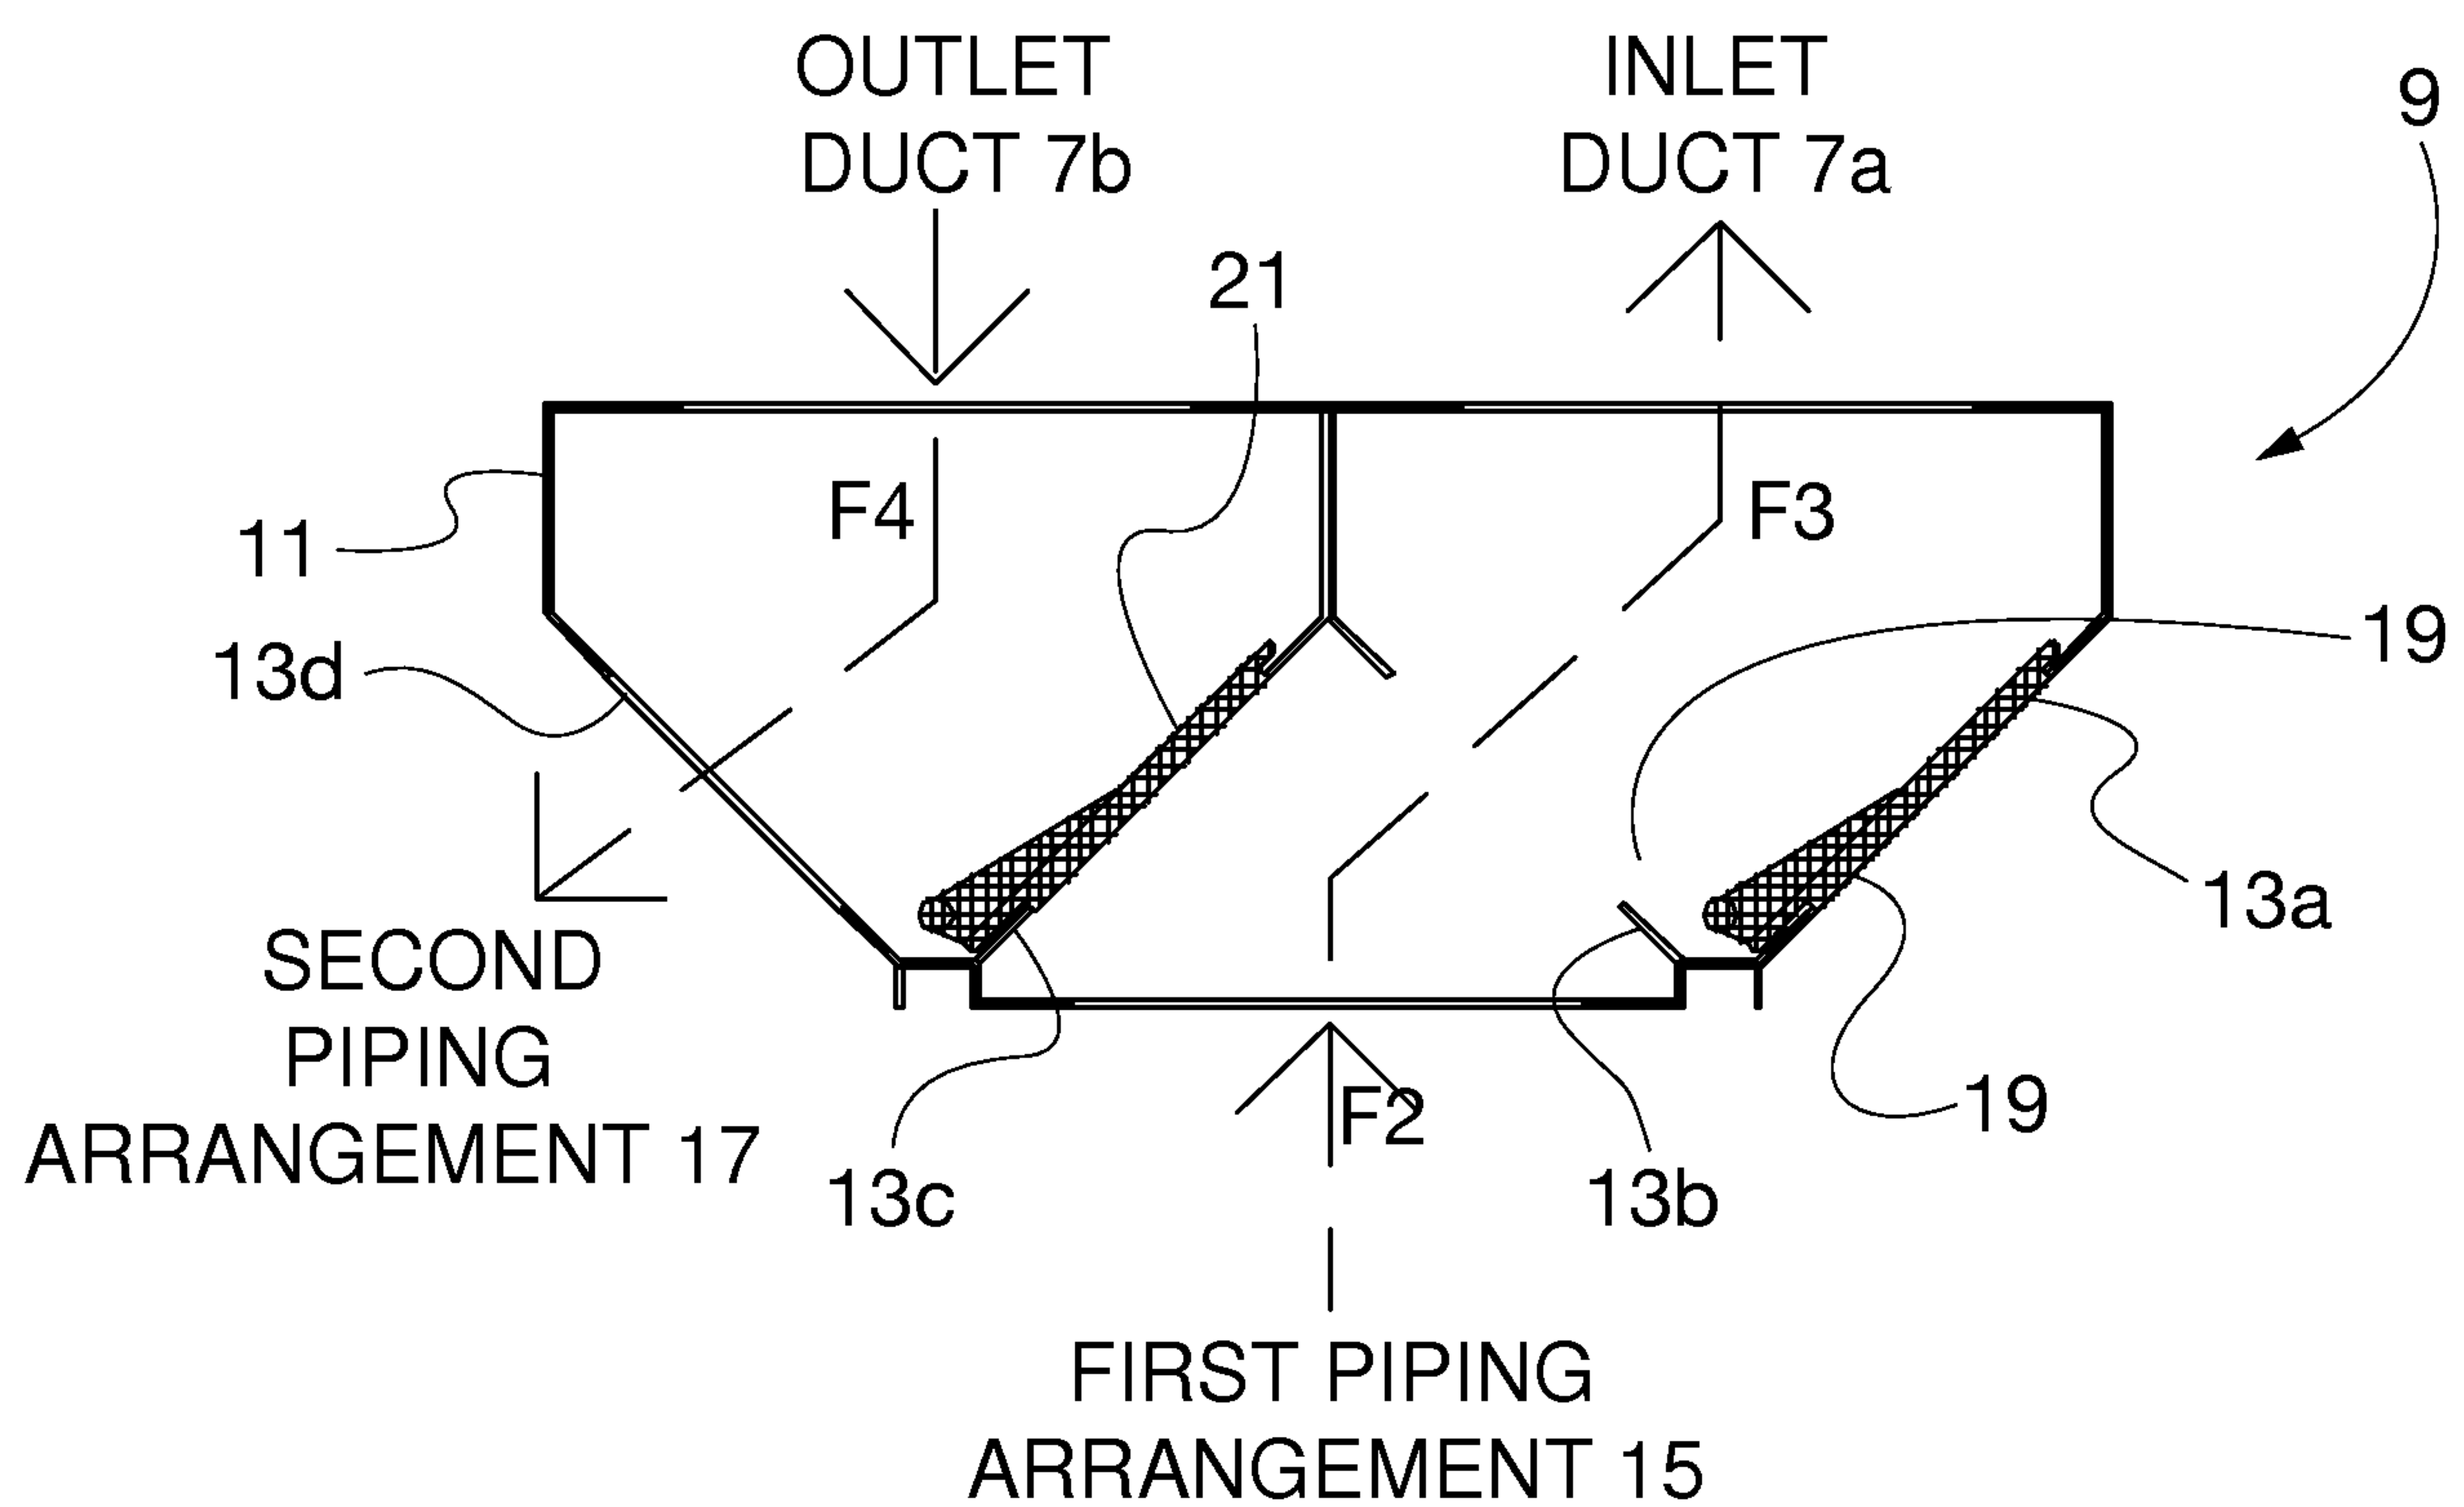


Fig. 2b

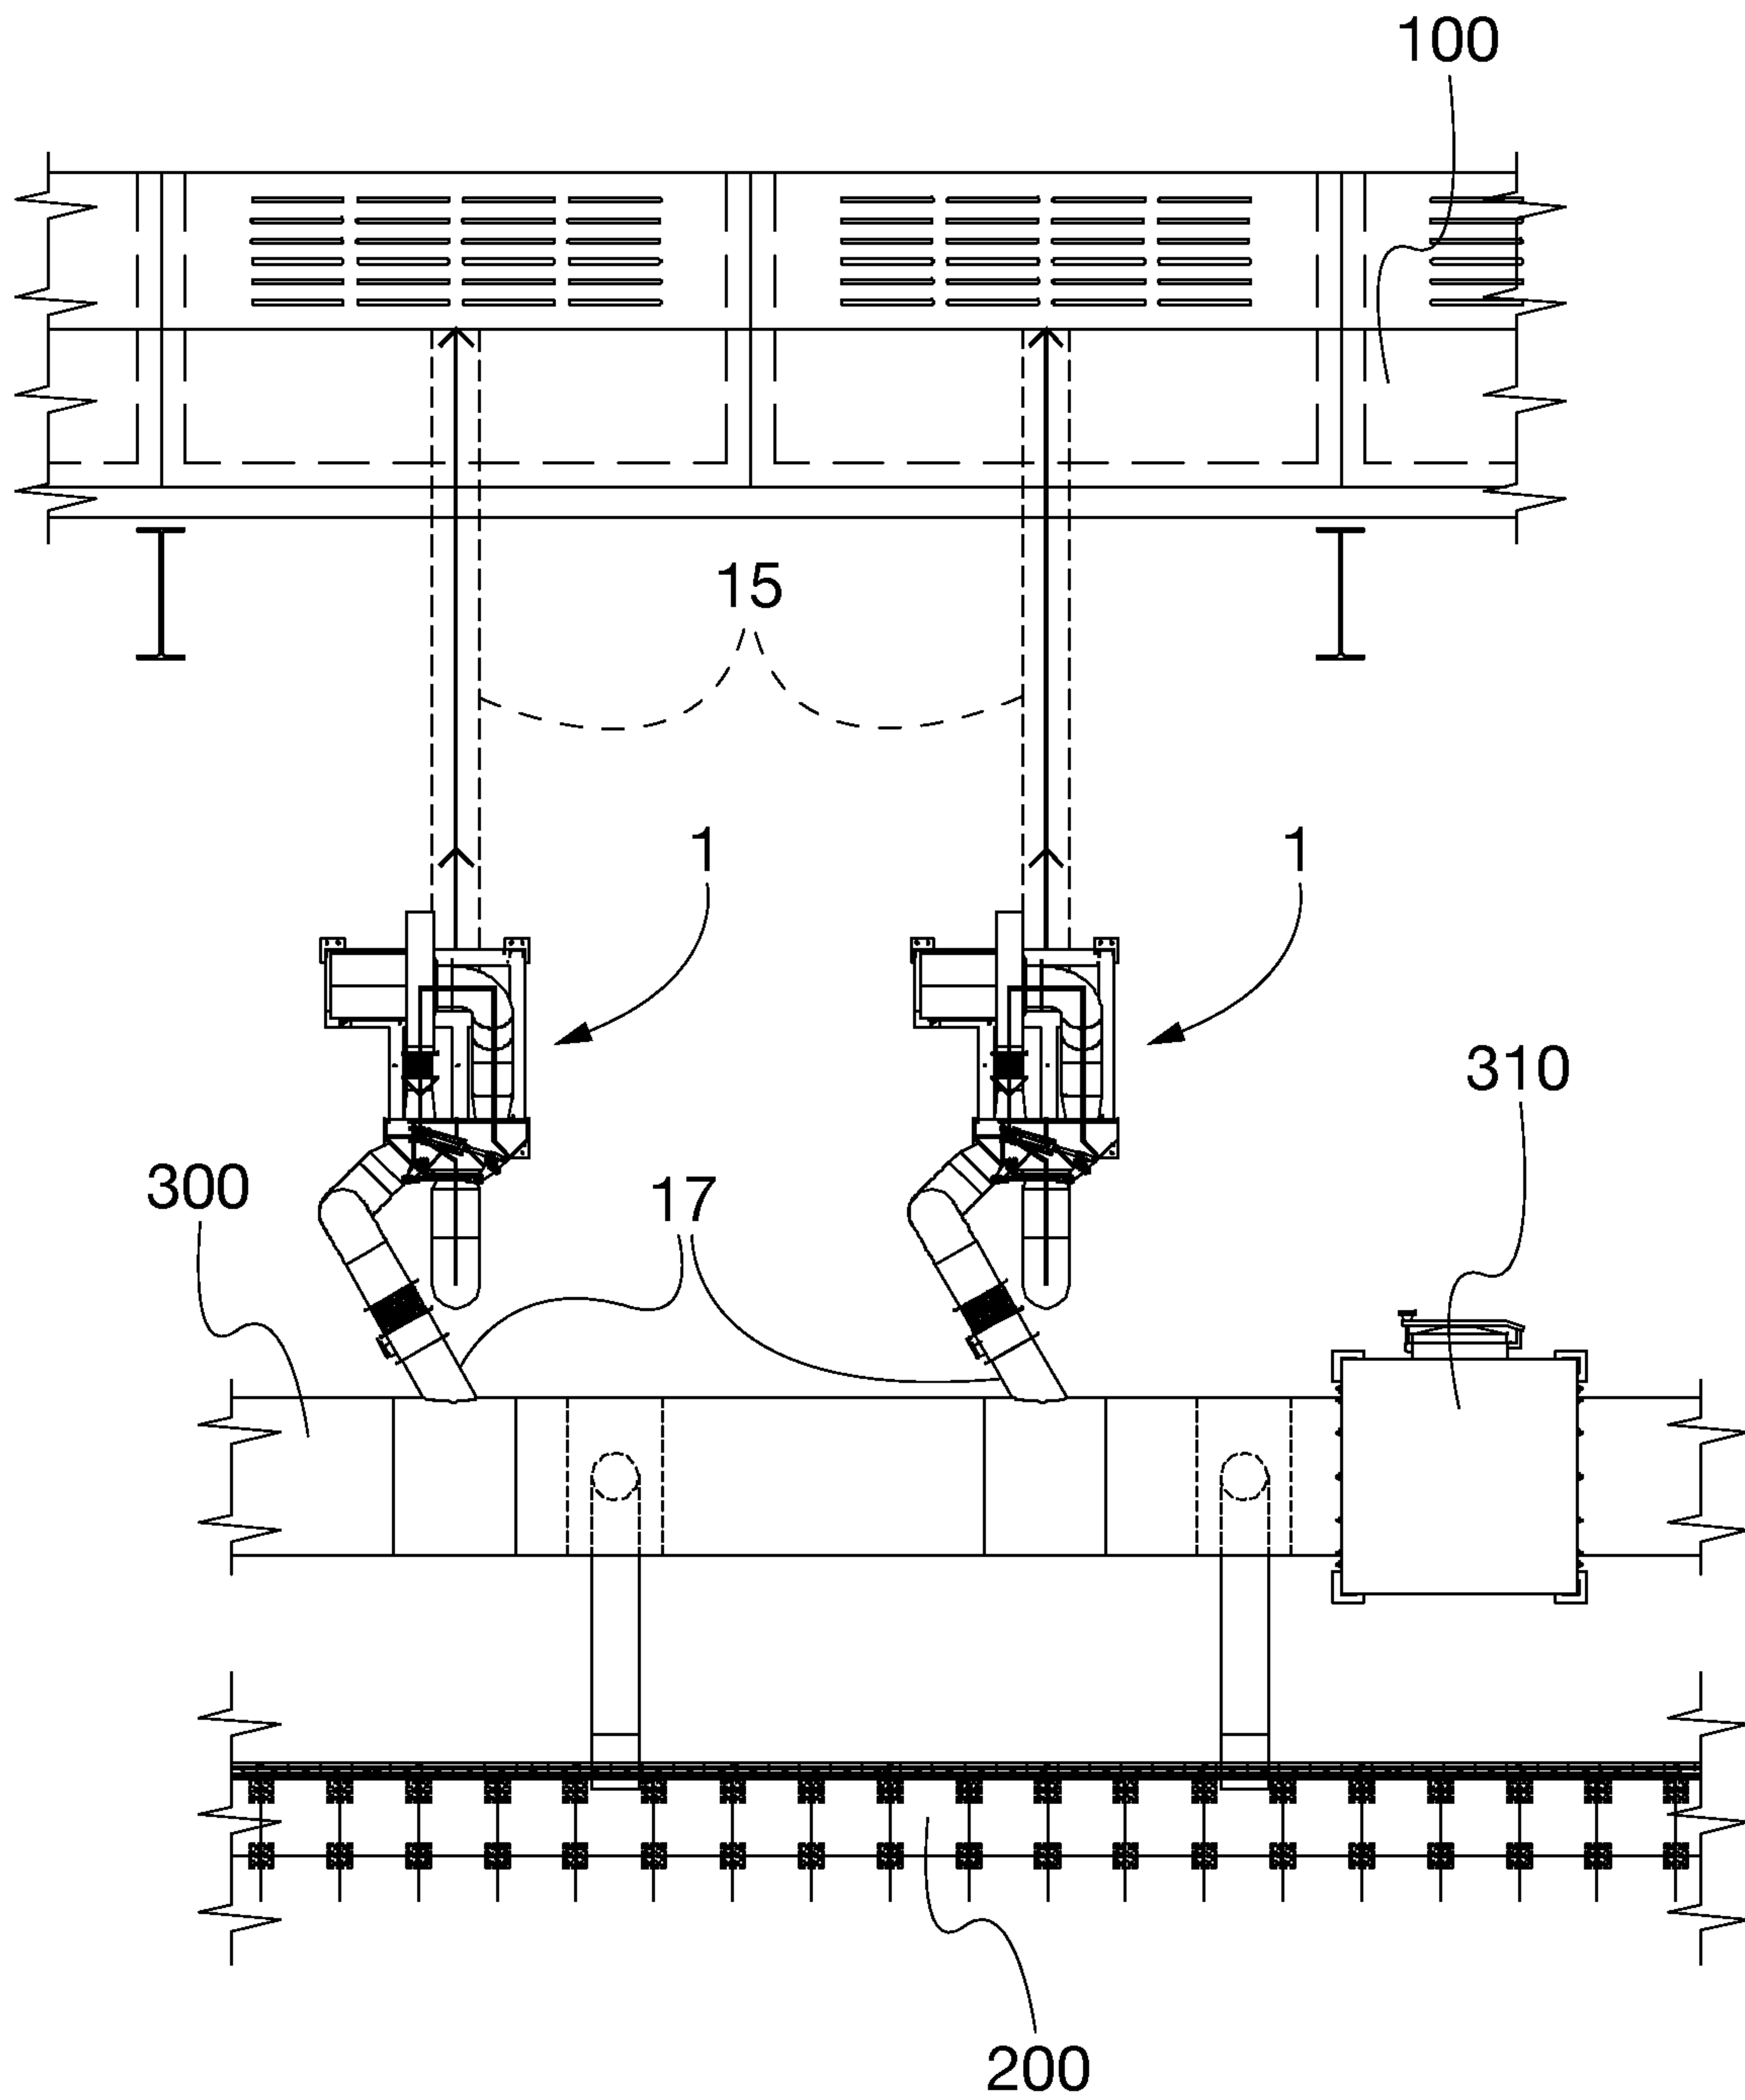


Fig. 3a

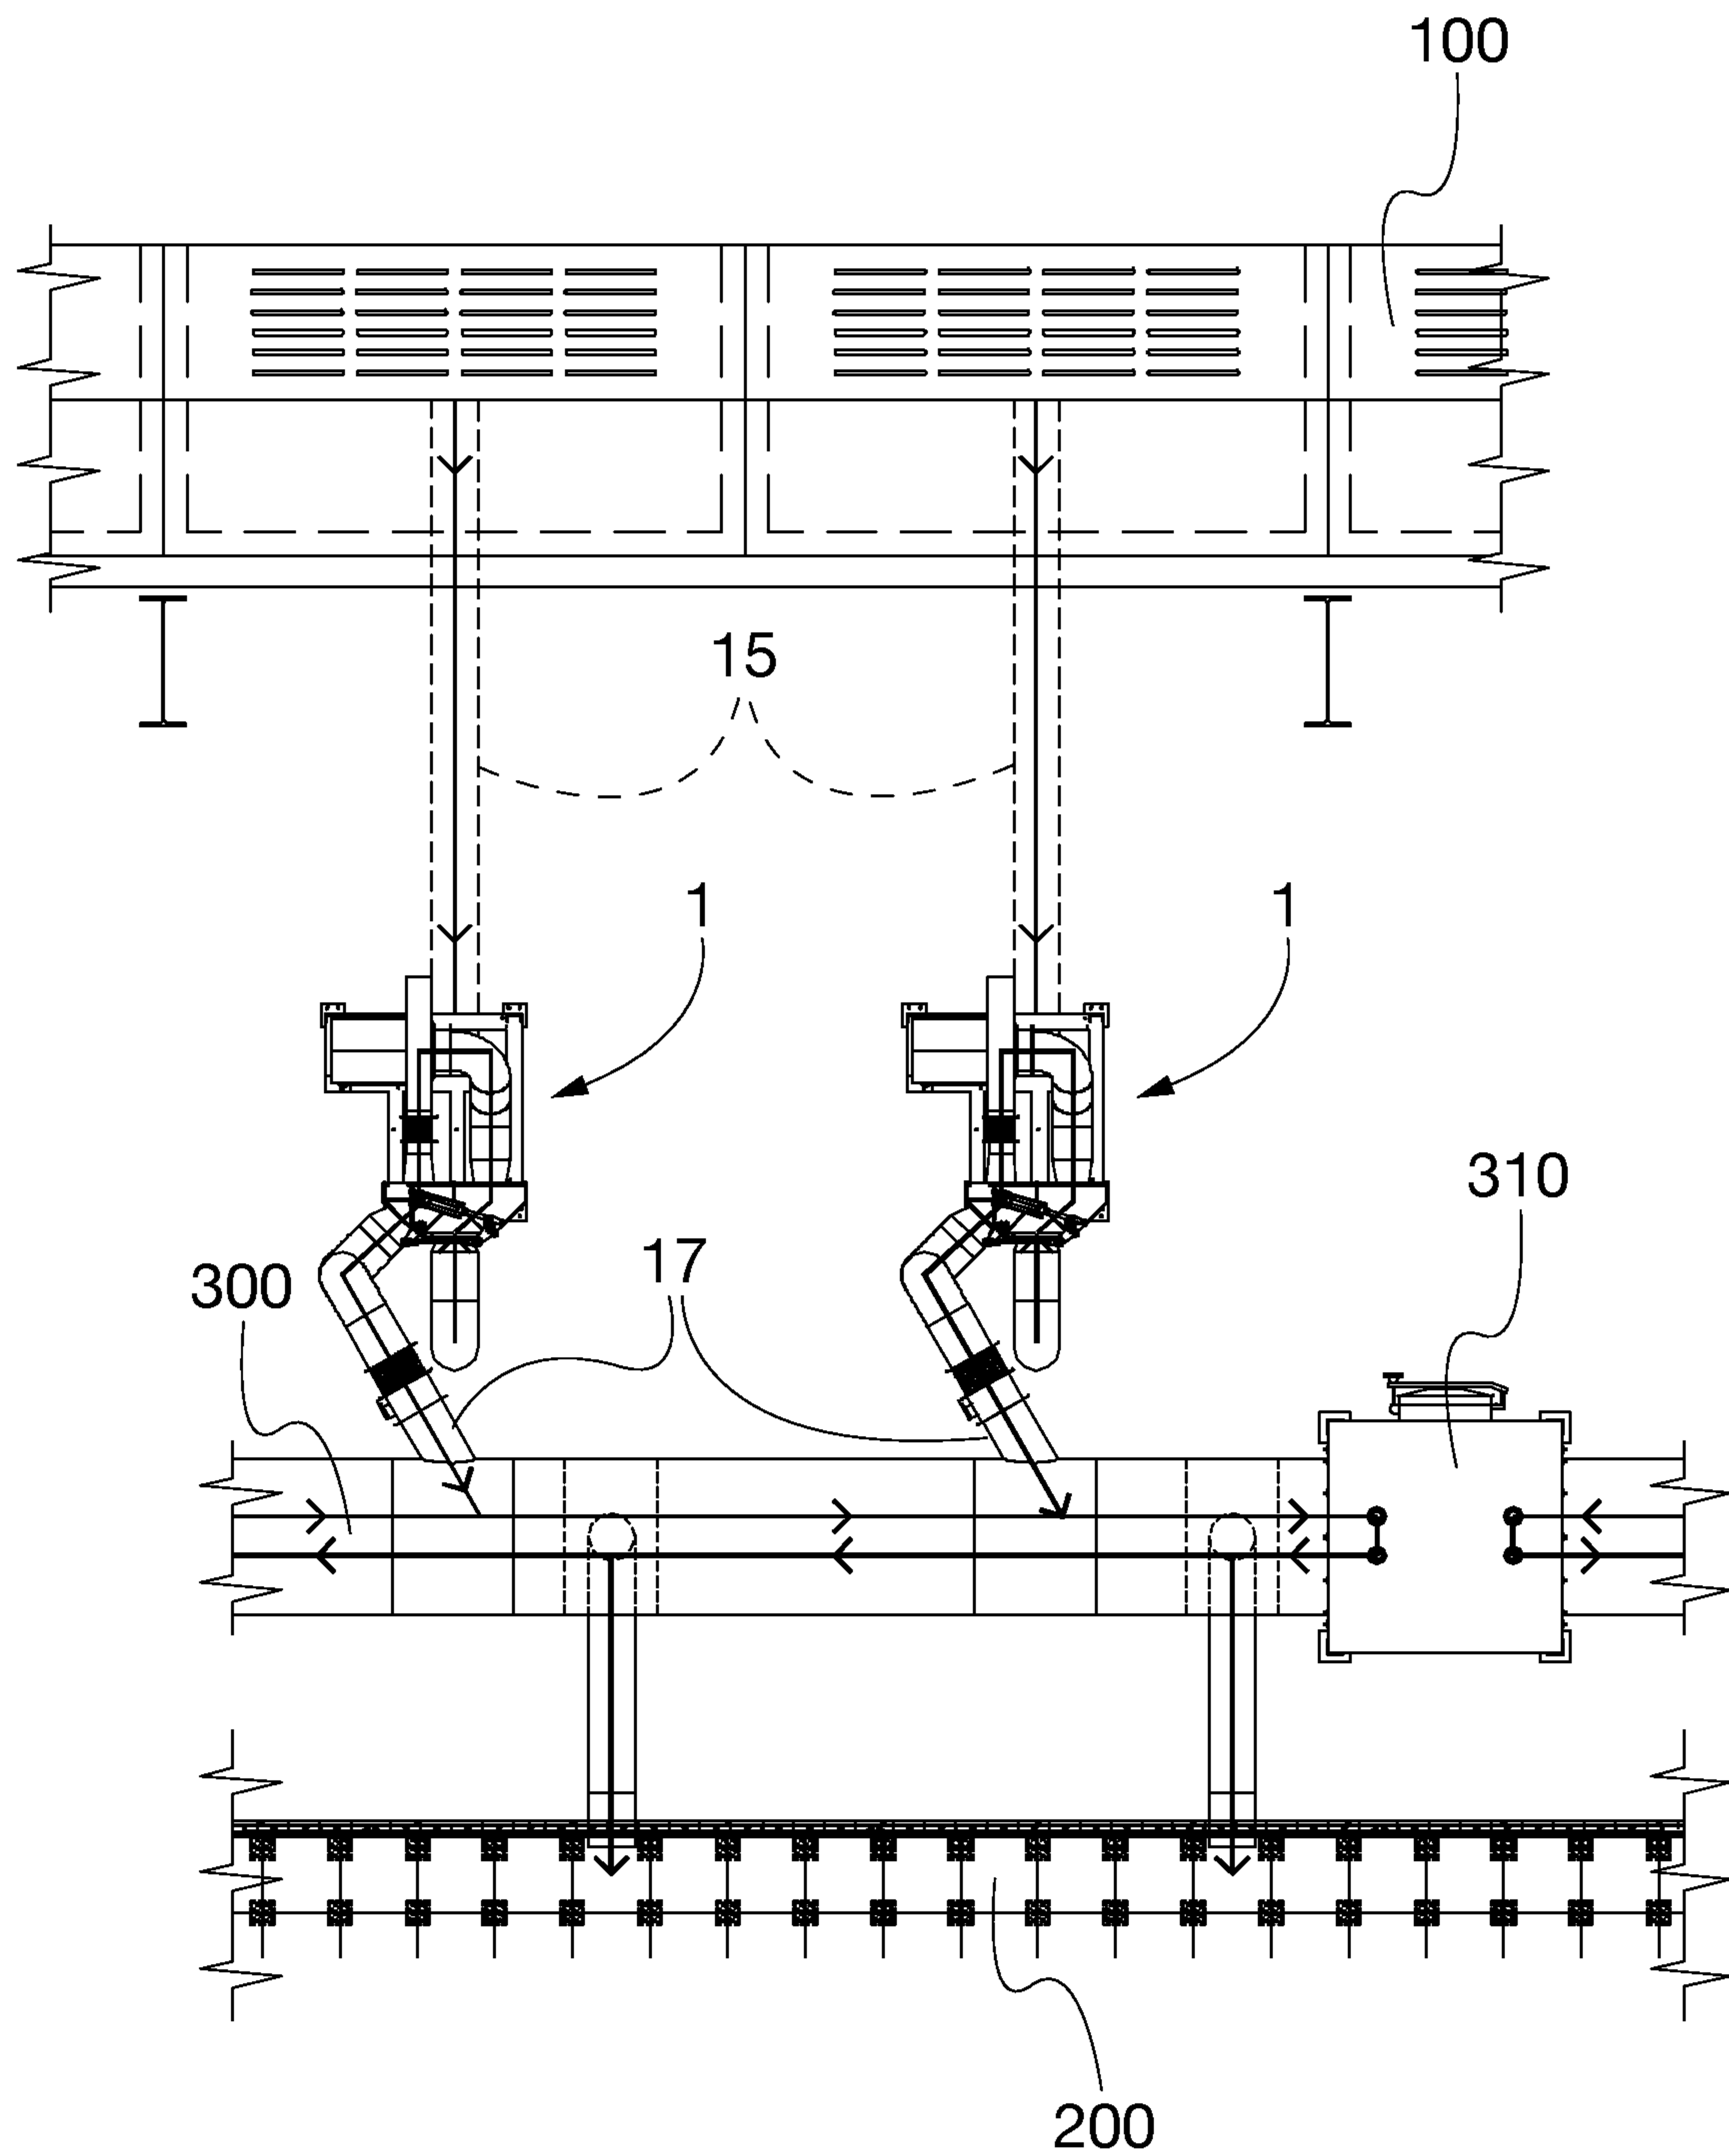


Fig. 3b

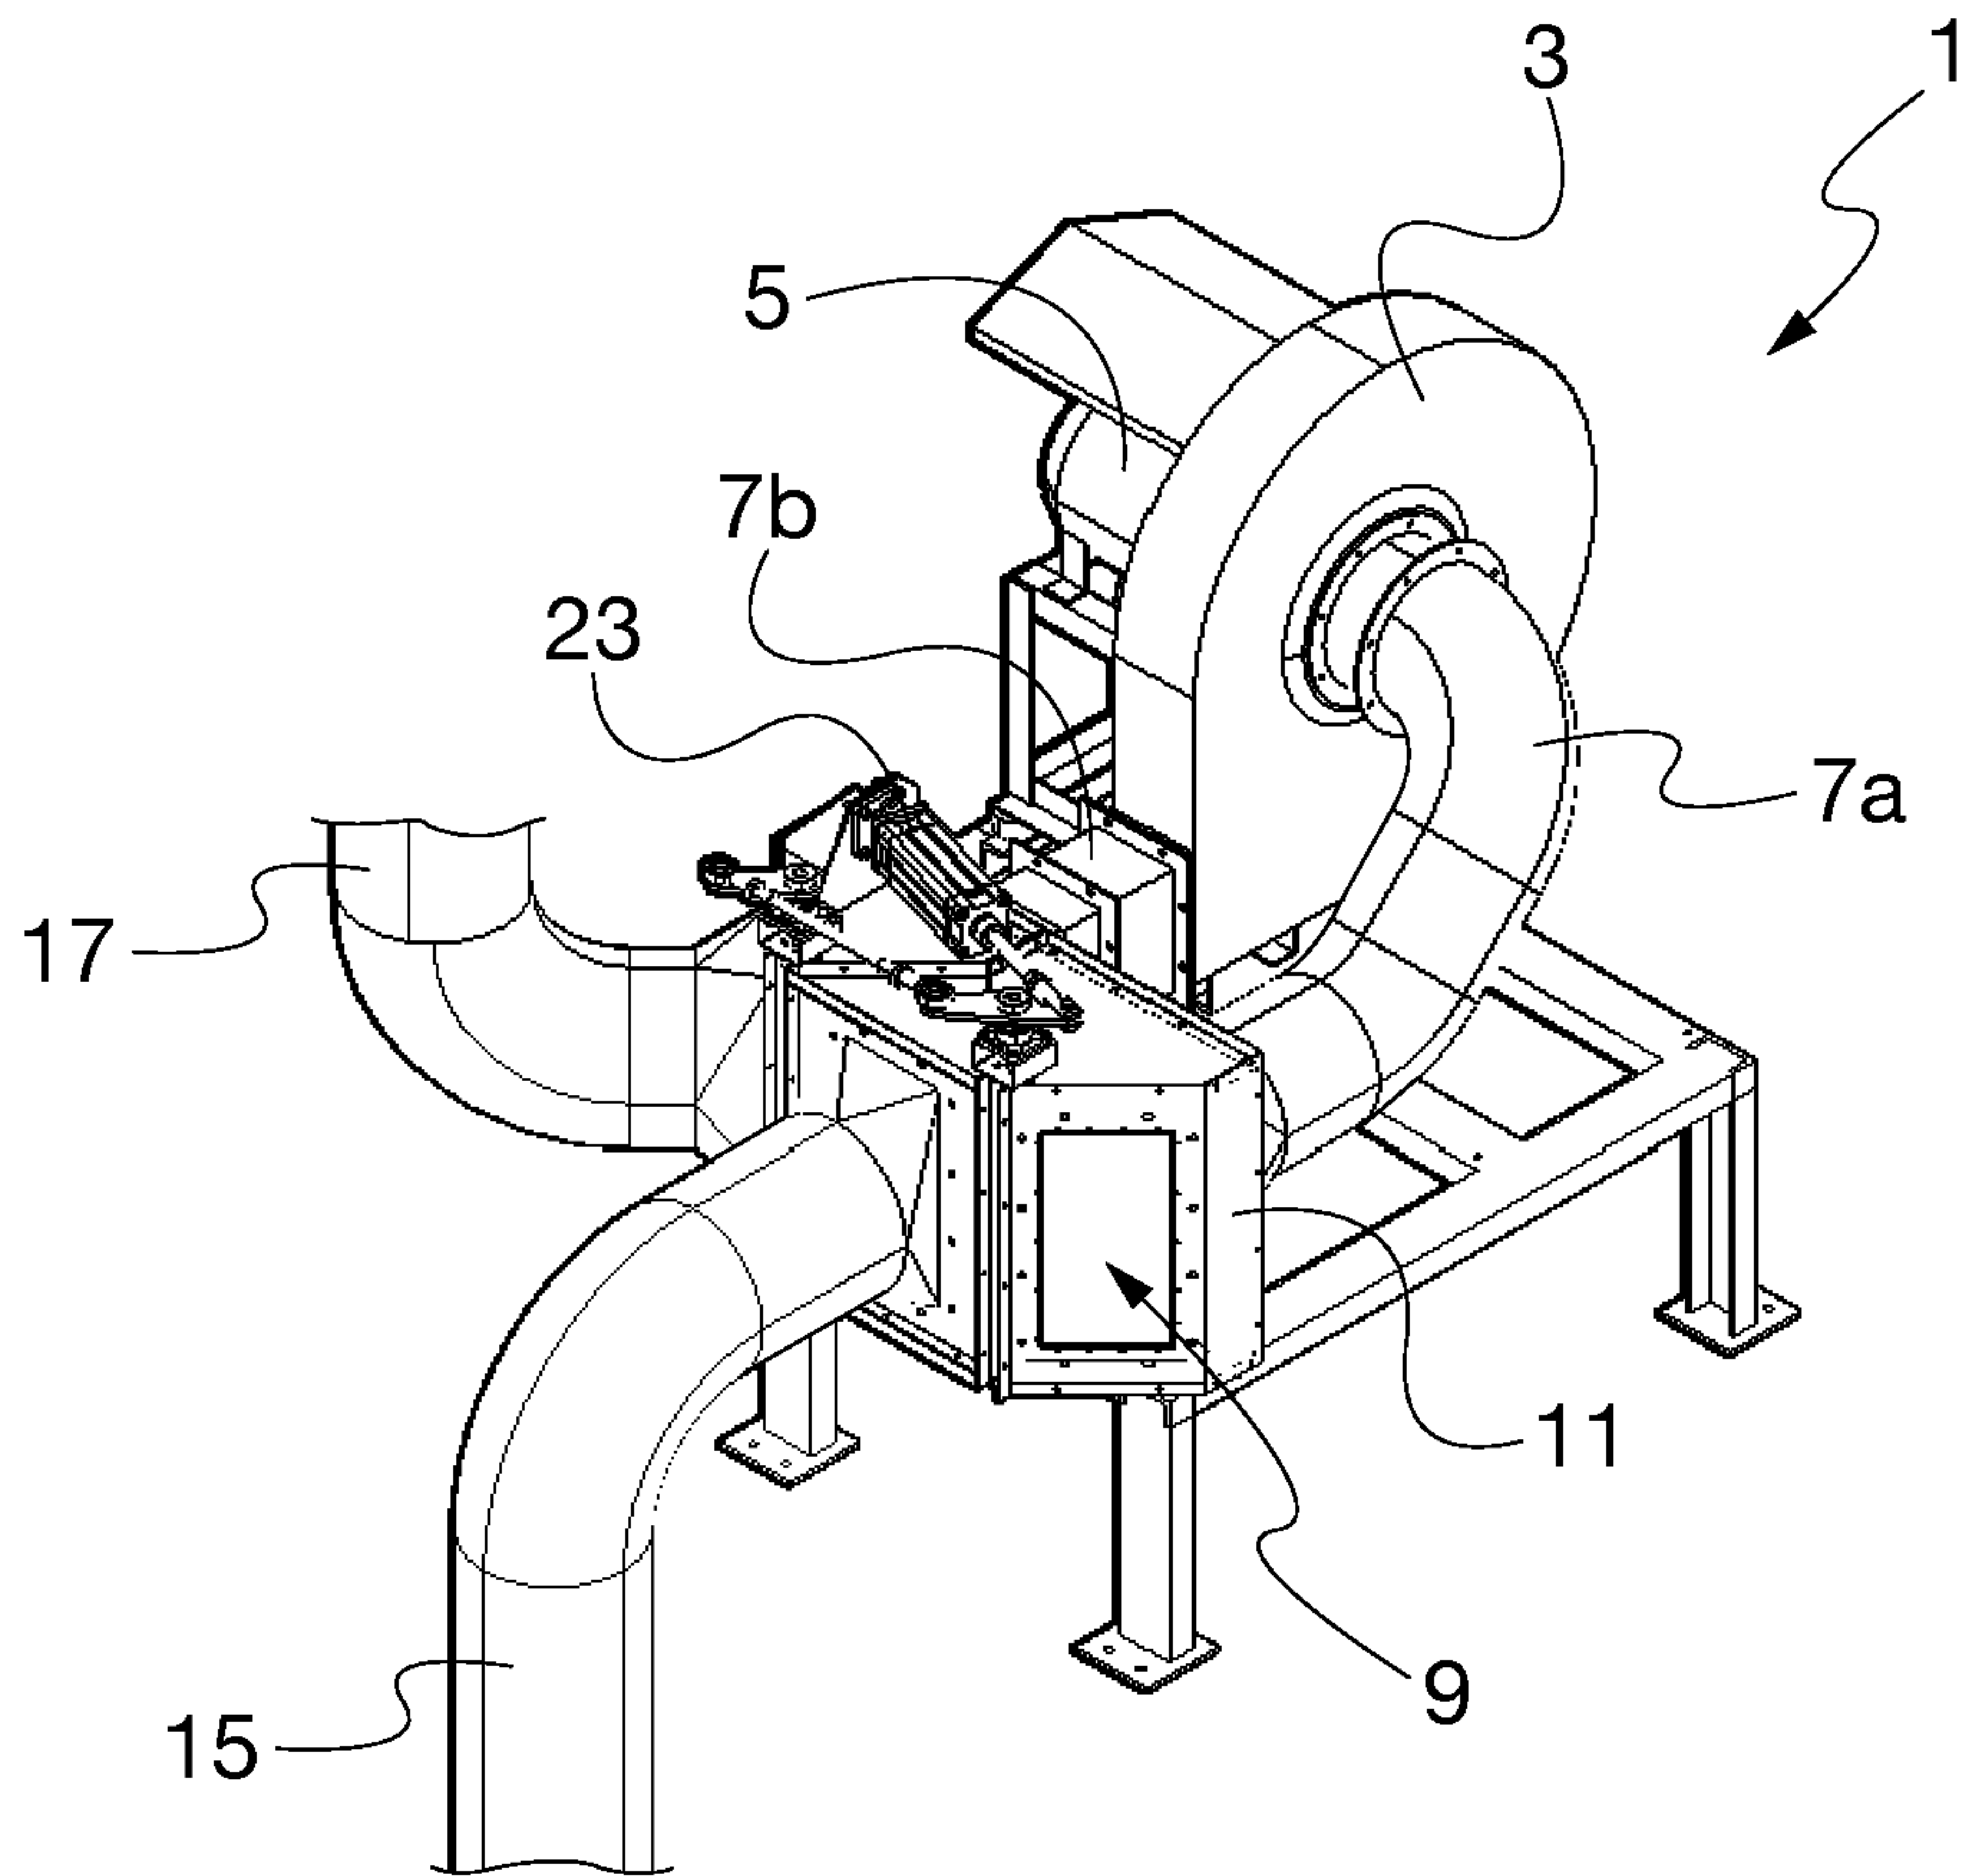


Fig. 1