



(86) Date de dépôt PCT/PCT Filing Date: 1998/03/05
 (87) Date publication PCT/PCT Publication Date: 1998/09/17
 (45) Date de délivrance/Issue Date: 2006/04/11
 (85) Entrée phase nationale/National Entry: 1999/05/05
 (86) N° demande PCT/PCT Application No.: JP 1998/000923
 (87) N° publication PCT/PCT Publication No.: 1998/040923
 (30) Priorités/Priorities: 1997/03/10 (9/54451) JP;
 1997/11/25 (9/323084) JP


(51) Cl.Int./Int.Cl. *H01M 10/40* (2006.01),
H02J 7/00 (2006.01), *H01M 4/02* (2006.01),
H01M 4/58 (2006.01), *H01M 4/50* (2006.01),
H01M 4/48 (2006.01), *H01M 10/44* (2006.01)

(72) Inventeurs/Inventors:
 KIDA, YOSHINORI, JP;
 OHSHITA, RYUJI, JP;
 KAMINO, MARUO, JP;
 YOSHIMURA, SEIJI, JP;
 NOHMA, TOSHIYUKI, JP;
 NISHIO, KOJI, JP

(73) Propriétaire/Owner:
 SANYO ELECTRIC CO., LTD., JP

(74) Agent: MARKS & CLERK

(54) Titre : BATTERIE A ELECTROLYTE NON AQUEUX ET PROCEDE DE CHARGE DE CELLE-CI
 (54) Title: NONAQUEOUS ELECTROLYTE BATTERY AND CHARGING METHOD THEREFOR

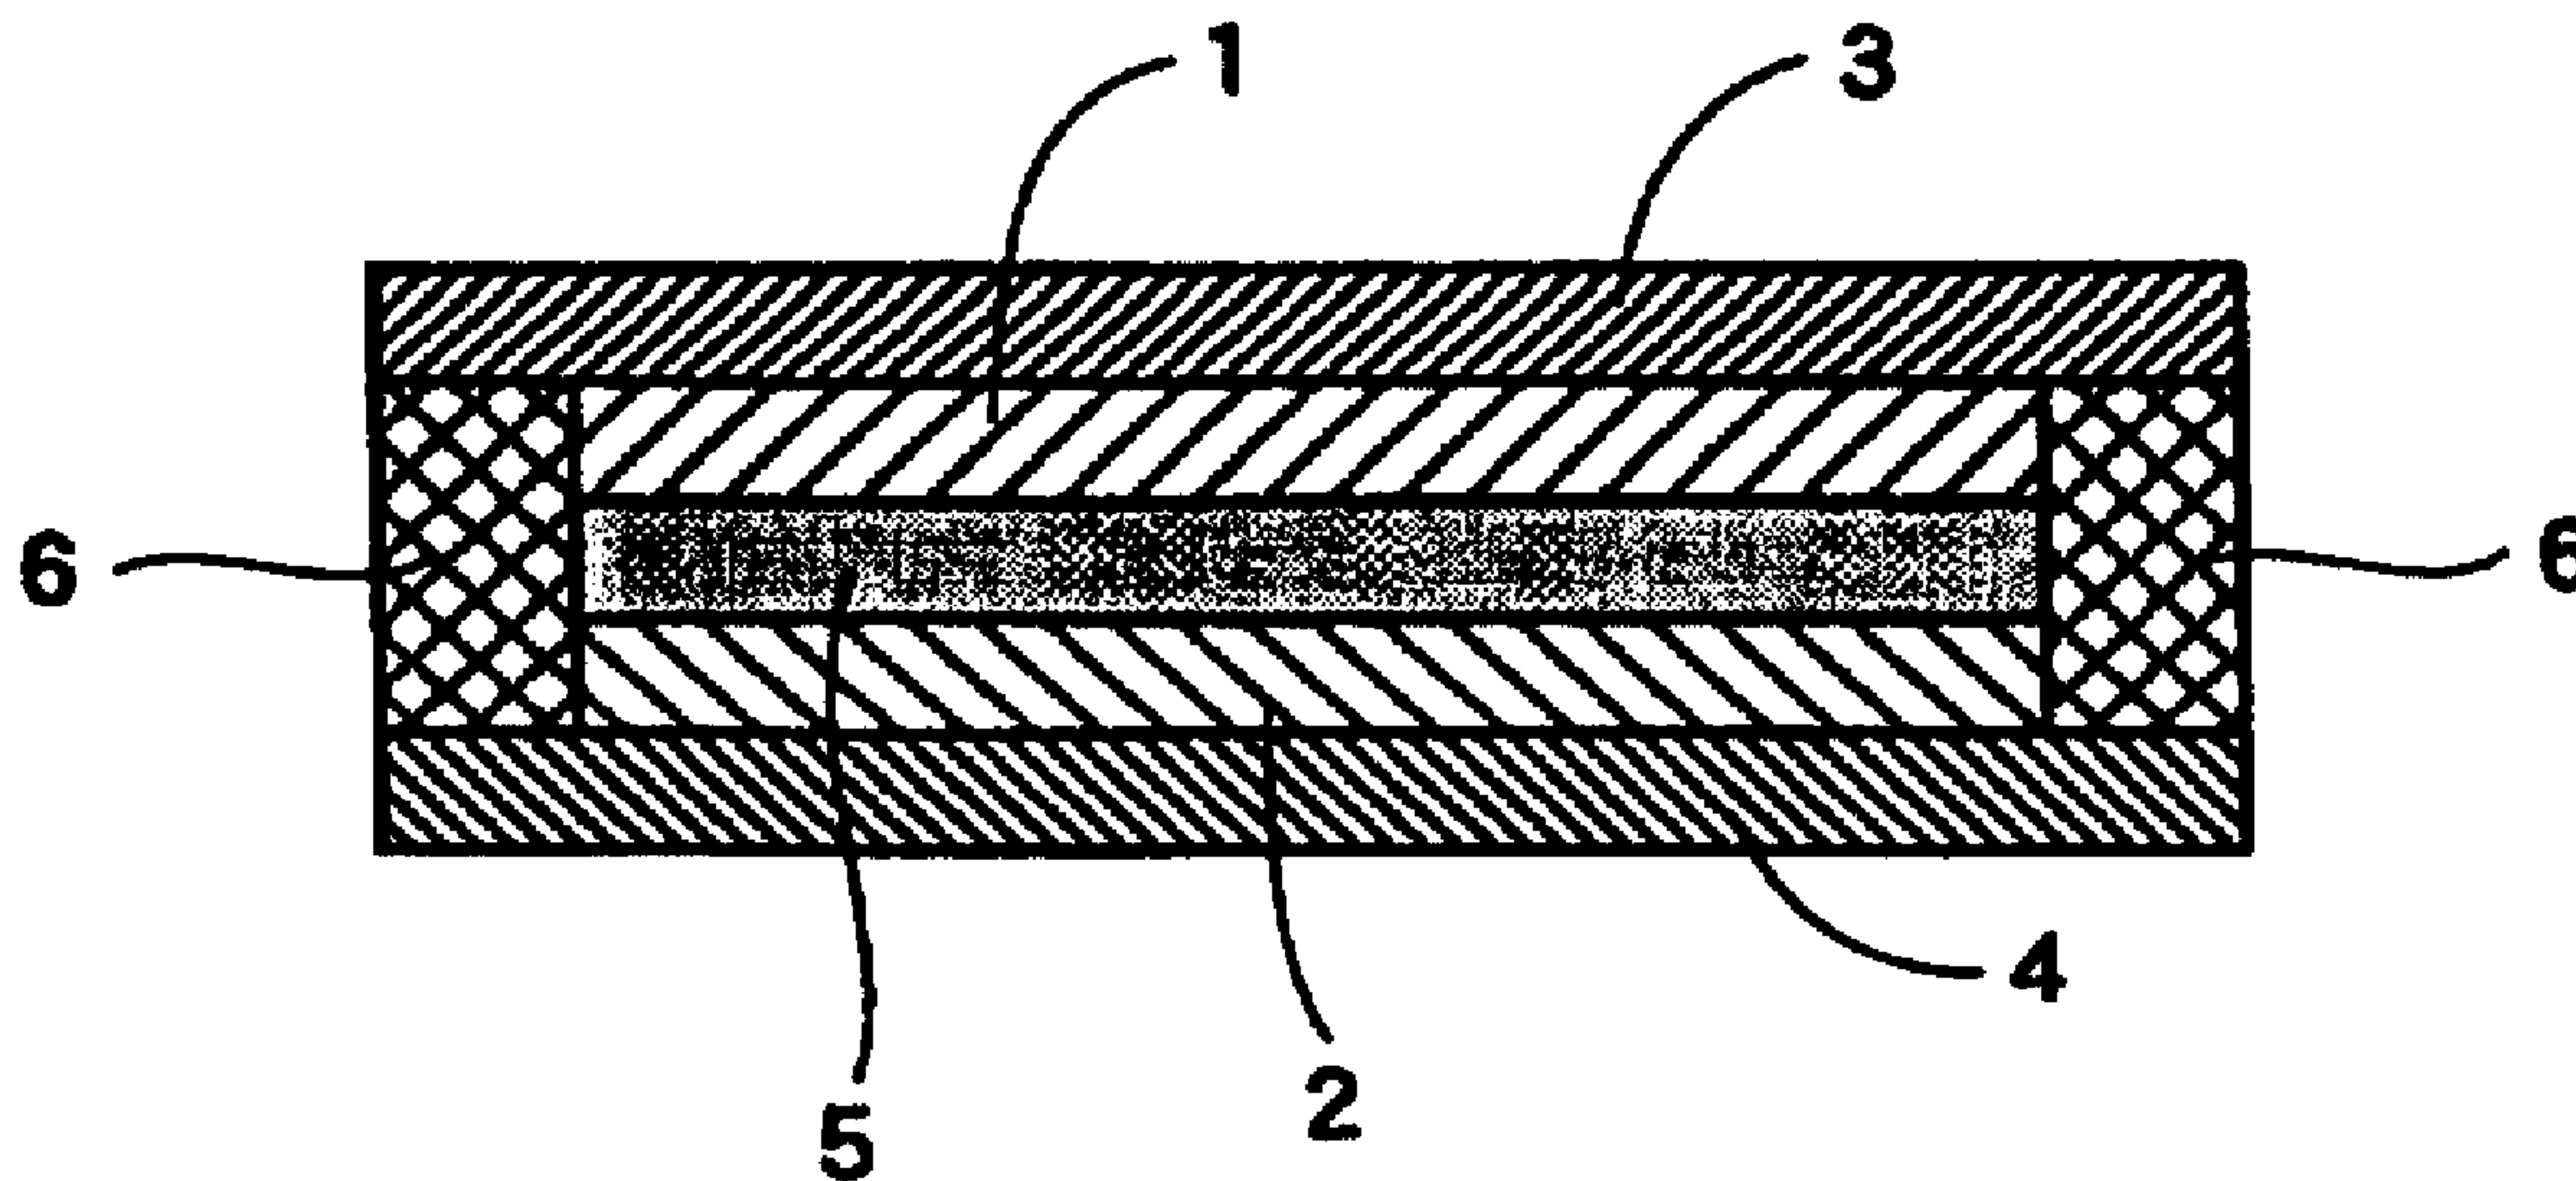

(57) **Abrégé/Abstract:**

A nonaqueous electrolyte battery using titanium oxide or lithium titanate as a negative electrode material of a negative electrode, wherein a polymer electrolyte is provided between the negative electrode and a positive electrode. By thus using titanium oxide or lithium titanate as the negative electrode material of the negative electrode and providing the polymer electrolyte between the negative electrode and the positive electrode, the polymer electrolyte is less likely reduced and decomposed by a catalytic action of titanium oxide or lithium titanate, and lowering of charge and discharge efficiency as in the case where a nonaqueous electrolyte solution is used is restrained. Thus, a nonaqueous electrolyte battery having high charge and discharge efficiency is provided.



PCT

特許協力条約に基づいて公開された国際出願

<p>(51) 国際特許分類6 H01M 10/40, 4/58, H02M 4/42, H01M 4/02</p>	A1	<p>(11) 国際公開番号 WO98/40923</p> <p>(43) 国際公開日 1998年9月17日(17.09.98)</p>
<p>(21) 国際出願番号 PCT/JP98/00923</p> <p>(22) 国際出願日 1998年3月5日(05.03.98)</p> <p>(30) 優先権データ 特願平9/54451 1997年3月10日(10.03.97) JP 特願平9/323084 1997年11月25日(25.11.97) JP</p> <p>(71) 出願人 (米国を除くすべての指定国について) 三洋電機株式会社(SANYO ELECTRIC CO., LTD.)(JP/JP) 〒570-8677 大阪府守口市京阪本通二丁目5番5号 Osaka, (JP)</p> <p>(72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 喜田佳典(KIDA, Yoshinori)(JP/JP) 大下竜司(OHSHITA, Ryuji)(JP/JP) 神野丸男(KAMINO, Maruo)(JP/JP) 吉村精司(YOSHIMURA, Seiji)(JP/JP) 能間俊之(NOHMA, Toshiyuki)(JP/JP) 西尾晃治(NISHIO, Koji)(JP/JP) 〒570-8677 大阪府守口市京阪本通二丁目5番5号 三洋電機株式会社内 Osaka, (JP)</p>		<p>(74) 代理人 弁理士 松川克明(MATSUKAWA, Katsuaki) 〒550-0005 大阪府大阪市西区西本町1丁目5番7号 本町新興産ビル Osaka, (JP)</p> <p>(81) 指定国 CA, US, 欧州特許 (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>添付公開書類 国際調査報告書 補正書・説明書</p>
<p>(54) Title: NONAQUEOUS ELECTROLYTE BATTERY AND CHARGING METHOD THEREFOR</p> <p>(54) 発明の名称 非水電解質電池及びその充電方法</p> <p>(57) Abstract A nonaqueous electrolyte battery using titanium oxide or lithium titanate as a negative electrode material of a negative electrode, wherein a polymer electrolyte is provided between the negative electrode and a positive electrode. By thus using titanium oxide or lithium titanate as the negative electrode material of the negative electrode and providing the polymer electrolyte between the negative electrode and the positive electrode, the polymer electrolyte is less likely reduced and decomposed by a catalytic action of titanium oxide or lithium titanate, and lowering of charge and discharge efficiency as in the case where a nonaqueous electrolyte solution is used is restrained. Thus, a nonaqueous electrolyte battery having high charge and discharge efficiency is provided.</p> <div data-bbox="892 1840 1911 2315" data-label="Diagram"> </div>		

DESCRIPTION

NON-AQUEOUS ELECTROLYTE BATTERY AND CHARGING METHOD
THEREFOR

Technical Field

The present invention relates generally to a non-aqueous electrolyte battery including a positive electrode, a negative electrode, and a non-aqueous electrolyte. More particularly, the invention relates to a non-aqueous electrolyte battery and a charging method therefor characterized in that where titanium oxide or lithium titanate is used as a negative electrode material for negative electrode, a charge current is prevented from being partially consumed for the decomposition of the non-aqueous electrolyte thereby to ensure a high charge/discharge efficiency.

Background Art

Recently, as one type of advanced batteries featuring high power and high energy density, non-aqueous electrolyte batteries of high electromotive force have been used. The non-aqueous electrolyte battery utilizes the non-aqueous electrolyte, such as a non-aqueous electrolyte

solution, and a process of oxidation and reduction of lithium or the like.

Such a non-aqueous electrolyte battery has generally employed, as the negative electrode material for negative electrode, metallic lithium, lithium alloys such as a Li-Al alloy, a carbon material capable of intercalating/deintercalating lithium.

One problem encountered with the use of metallic lithium as the negative electrode material for negative electrode is that charging/discharging of the battery results in lithium dendrite growth on the negative electrode surface.

Where the lithium alloy such as Li-Al alloy is used as the negative electrode material for negative electrode, the dendrite growth does not occur. However, a low flexibility of the lithium alloy makes it difficult to fabricate a cylindrical battery wherein the negative electrode and the positive electrode, with a separator interposed therebetween, are wound into a roll.

Where the lithium alloy is used in a powdery form, a high reactivity of the lithium alloy results in a problem of difficult handling thereof. In addition, when a charge/discharge process is performed with such a lithium alloy used as the negative electrode, the charge/discharge process induces expansion/contraction of the lithium alloy,

which produces a stress within the lithium alloy. This leads to another problem that the repeating of such charge/discharge processes causes destruction of the lithium alloy, resulting in capacity decline.

Where, on the other hand, the carbon material is used as the negative electrode material for negative electrode, the charge/discharge process causes less expansion/contraction of the carbon material than in the aforesaid case where the lithium alloy is used. However, some problems exist that the capacity of the carbon material is small than that of the lithium alloy and the initial charge/discharge efficiency is low.

Recently, there has been proposed, as in JP, 6-275263, A, the non-aqueous electrolyte battery which uses titanium oxide or lithium titanate as the negative electrode material for negative electrode together with a non-aqueous electrolyte solution, as the non-aqueous electrolyte, which solution is prepared by dissolving a lithium salt into a non-aqueous solvent.

Unfortunately, where titanium oxide or lithium titanate is used for the negative electrode in combination with the non-aqueous electrolyte solution prepared by dissolving the lithium salt into the non-aqueous solvent, a problem exists that the non-aqueous electrolyte solution is decomposed by a catalytic reduction induced by titanium

oxide or lithium titanate contained in the negative electrode while the charge current is partially consumed for the decomposition of this non-aqueous electrolyte solution and hence, the charge/discharge efficiency is lowered.

In view of the foregoing, the invention is directed to solve the aforementioned problem encountered with the use of titanium oxide or lithium titanate as the negative electrode material for use in the negative electrode of the non-aqueous electrolyte battery including the positive electrode, the negative electrode and the non-aqueous electrolyte. An object of the invention is to provide a non-aqueous electrolyte battery which ensures a high charge/discharge efficiency by preventing the non-aqueous electrolyte from being decomposed by the catalytic reduction induced by titanium oxide or lithium titanate used for the negative electrode.

Disclosure of Invention

In accordance with the invention, a non-aqueous electrolyte battery using titanium oxide or lithium titanate as a negative electrode material for use in a negative electrode thereof is characterized in that a polymeric electrolyte is interposed between the negative electrode and a positive electrode.

If, as suggested by the invention, the polymeric electrolyte is interposed between the negative electrode and the positive electrode of the non-aqueous electrolyte battery using titanium oxide or lithium titanate as the negative electrode material for negative electrode, the polymeric electrolyte is less liable to be decomposed by the catalytic reduction induced by titanium oxide or lithium titanate in comparison with the conventional non-aqueous electrolyte solution. This avoids the problem suffered by the conventional non-aqueous electrolyte battery that the charge current is partially consumed for the decomposition of the non-aqueous electrolyte solution so as to lower the charge/discharge efficiency. Thus, the non-aqueous electrolyte battery featuring the high charge/discharge efficiency is provided.

It is to be noted here that the known titanium oxide and lithium titanate may be used as the negative electrode material for negative electrode. Examples of a usable negative electrode material include a rutile-type titanium oxide, an anatase-type titanium oxide, a spinel-type lithium titanate and the like. Above all, particularly preferred is the spinel-type lithium titanate featuring a layered structure, easy insertion/desertion of lithium ions and high charge/discharge efficiency.

In the non-aqueous electrolyte battery of the invention, the known positive electrode materials capable of intercalating/deintercalating lithium ions may be used as the positive electrode material for positive electrode. Examples of a usable positive electrode material include lithium-transition metal compound oxides containing at least one of manganese, cobalt, nickel, iron, vanadium and niobium. Above all, particularly preferred is manganese oxide containing lithium, which is less susceptible to ion deposition on titanium oxide or lithium titanate used for the negative electrode.

Where manganese oxide containing lithium is used as the positive electrode material, LiMnO_2 is preferably used for the purpose of easy fabrication of the battery whereas manganese dioxide containing Li_2MnO_3 is preferably used for the purpose of increasing the battery capacity. The aforesaid manganese dioxide containing Li_2MnO_3 may be obtained by heat-treating a mixture containing a lithium salt, such as lithium hydroxide, lithium nitrate, lithium phosphate, lithium carbonate, lithium acetate and the like, and manganese dioxide at temperatures in the range of between 300°C and 430°C . The reason why the temperature for the heat treatment is limited within the range of between 300°C and 430°C is because Li_2MnO_3 is not preferably generated at temperatures of less than 300°C whereas the

decomposition of manganese dioxide takes place at temperatures of more than 430°C.

In the non-aqueous electrolyte battery according to the invention, the known polymeric electrolyte generally used in the art may be interposed between the positive electrode and the negative electrode. Examples of a usable polymeric electrolyte include polyethylene oxide, polypropylene oxide, cross-linked polyethylene glycol diacrylate, cross-linked polypropylene glycol diacrylate, cross-linked polyethylene glycol methyl ether acrylate, cross-linked polypropylene glycol methyl ether acrylate and the like.

Exemplary solutes to be added to the polymeric electrolyte include the known solutes generally used in the art, such as lithium compounds like lithium trifluoromethanesulfonate LiCF_3SO_3 , lithium hexafluorophosphate LiPF_6 , lithium perchlorate LiClO_4 , lithium tetrafluoroborate LiBF_4 , lithium trifluoromethanesulfonimide $\text{LiN}(\text{CF}_3\text{SO}_2)_2$.

When any one of the above solutes is added to the polymeric electrolyte, the solute dissolved in a solvent may be added. Exemplary solvents to be used include organic solvents such as propylene carbonate, ethylene carbonate, γ -butyrolactone, butylene carbonate, 1,2-dimethoxyethane, dimethyl carbonate, diethyl carbonate and

the like. These solvents may be used alone or in combination of two or more types.

In the non-aqueous electrolyte battery according to the invention uses titanium oxide or lithium titanate for the negative electrode together with the aforesaid polymeric electrolyte as the non-aqueous electrolyte, as described above, the battery suffers less decomposition of the polymeric electrolyte not only in the normal charging process but also in such a charging process as uses a solar cell supplying high and unstable charge voltage. Thus, a sufficient charging is ensured even when the solar cell is used.

Brief Description of Drawings

Fig.1 is a schematic sectional view showing a construction of a non-aqueous electrolyte battery according to examples of the invention and comparative examples hereof.

Best Mode for Carrying Out the Invention

The non-aqueous electrolyte batteries according to the invention will be described in detail by way of examples hereof. Further, with reference to comparative examples, an explanation will be given to clarify that the non-aqueous electrolyte batteries of the invention achieve

high charge/discharge efficiencies. It is to be understood that the non-aqueous electrolyte battery of the invention should not be limited to the following examples but changes and modifications may be made without departing from the scope of the invention.

(Example 1)

In a non-aqueous electrolyte battery of Example 1, there were used a negative electrode, a positive electrode and a polymeric electrolyte, which were prepared in the following manner, thereby to fabricate a flat coin-type non-aqueous electrolyte battery having a thickness of 1mm and a diameter of 20mm, as shown in Fig.1.

Preparation of Positive Electrode

In the preparation of the positive electrode, powdery LiMnO_2 was used as the positive electrode material. Powdery LiMnO_2 , carbon as a conductive material and polytetrafluoroethylene as a binder were mixed together in a weight ratio of 90:6:4 so as to obtain a positive electrode mixture. The positive electrode mixture was subject to press-molding thereby to form a disk-like positive electrode.

Preparation of Negative Electrode

In the preparation of the negative electrode, powdery spinel-type lithium titanate $\text{Li}_4\text{Ti}_5\text{O}_{12}$ was used as the negative electrode material. Powdery $\text{Li}_4\text{Ti}_5\text{O}_{12}$, powdery

carbon as the conductive material, and powdery polytetrafluoroethylene as the binder were mixed together in a weight ratio of 90:6:4 so as to obtain a negative electrode mixture. The negative electrode mixture was press-molded thereby to form a disk-like negative electrode.

Preparation of Polymeric Electrolyte

In the preparation of the polymeric electrolyte, polyethylene oxide (PEO) was heated to be melted, after which LiPF_6 was added in a concentration of 1 mol/l. The resultant mixture liquid was cured thereby to obtain a disk-like polymeric electrolyte.

Fabrication of Battery

In the fabrication of the battery, the positive electrode 1 thus prepared was attached to a positive electrode case 3 while the negative electrode 2 was attached to a negative electrode case 4. The aforesaid polymeric electrolyte 5 was sandwiched between the positive electrode 1 and the negative electrode 2 while the aforesaid positive electrode case 3 and negative electrode case 4 were electrically insulated from each other by an insulation packing 6. Thus, the coin-type non-aqueous electrolyte battery was obtained, as shown in Fig.1.

(Example 2)

In Example 2, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that rutile-type titanium oxide TiO_2 was used as the negative electrode material for negative electrode, as shown in the following table 1.

(Example 3)

In Example 3, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that anatase-type titanium oxide TiO_2 was used as the negative electrode material for negative electrode, as shown in the following table 1.

(Example 4)

In Example 4, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that powdery LiCoO_2 was used as the positive electrode material for positive electrode, as shown in the following table 1.

(Example 5)

In Example 5, the positive electrode was prepared in the following manner. Manganese dioxide and lithium hydroxide, each having a mean particle size of not more than $30\mu\text{m}$, were mixed in a weight ratio of 80:20 in a mortar. Subsequently, the resultant mixture was heat-treated in air at a temperature of 375°C for 20 hours thereby to obtain manganese dioxide containing Li_2MnO_3 .

Next, the resultant manganese dioxide containing Li_2MnO_3 was used as the positive electrode material for preparing the positive electrode in the same manner as in the above Example 1. Subsequently, using a lithium metal as a counter electrode for this positive electrode, the positive electrode was discharged to 2.2V (vs. Li/Li^+) at a constant potential in an electrolyte solution obtained by adding 1 mol/l LiPF_6 to a mixture solvent containing ethylene carbonate and diethyl carbonate in a volume ratio of 1:1.

In this example, the positive electrode thus discharged at the constant potential was used. On the other hand, as shown in the following table 1, the same spinel-type lithium titanate $\text{Li}_4\text{Ti}_5\text{O}_{12}$ as in Example 1 was used as the negative electrode material. The non-aqueous electrolyte battery of this example was fabricated in the same manner as in the above Example 1.

(Example 6)

In Example 6, similarly to the above Example 5, used was the positive electrode which was prepared by using, as the positive electrode material, manganese dioxide containing Li_2MnO_3 shown in the following table 1 and which was discharged to 2.2V (vs. Li/Li^+) at the constant potential as described above. On the other hand, the same rutile-type titanium oxide TiO_2 as in the above Example 2 was used

as the negative electrode material. Except for these, the same procedure as in the above Example 1 was taken to fabricate the non-aqueous electrolyte battery.

(Example 7)

In Example 7, similarly to the above Example 5, used was the positive electrode which was prepared by using, as the positive electrode material, manganese dioxide containing Li_2MnO_3 , shown in the following table 1 and which was discharged to 2.2V(vs. Li/Li^+) at the constant potential. On the other hand, the same anatase-type titanium oxide TiO_2 , as in the above Example 3 was used as the negative electrode material. Except for these, the same procedure as in the above Example 1 was taken to fabricate the non-aqueous electrolyte battery.

(Example 8)

In Example 8, spinel-type LiMn_2O_4 , shown in the following table 1 was used as the positive electrode material for preparing the positive electrode in the same manner as in the above Example 1. Subsequently, using the lithium metal as the counter electrode for this positive electrode, the positive electrode was discharged to 2.2V(vs. Li/Li^+) at the constant potential in the electrolyte solution which was prepared by adding 1 mol/l LiPF_6 to the mixture solvent containing ethylene carbonate and diethyl carbonate in a volume ratio of 1:1.

In this example, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that the positive electrode thus discharged at the constant potential was used.

(Comparative Example 1)

In Comparative Example 1, the positive electrode and the negative electrode were prepared in the same manner as in the above Example 1. On the other hand, the aforesaid polymeric electrolyte, as the non-aqueous electrolyte, was replaced by a non-aqueous electrolyte solution which was prepared by dissolving 1 mol/l LiPF_6 into a mixture solvent containing ethylene carbonate (EC) and 1,2-dimethoxyethane (DME) in a volume ratio of 1:1, as shown in the following table 1.

Then, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that a separator formed of a polypropylene porous film was interposed between the aforesaid positive electrode and negative electrode and was impregnated with the aforesaid non-aqueous electrolyte solution.

(Comparative Example 2)

In Comparative Example 2, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that graphite was used as

the negative electrode material for negative electrode, as shown in the following table 1.

(Comparative Example 3)

In Comparative Example 3, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that powdery LiCoO_2 was used as the positive electrode material for positive electrode while graphite was used as the negative electrode material for negative electrode, as shown in the following table 1.

(Comparative Example 4)

In Comparative Example 4, the non-aqueous electrolyte battery was fabricated in the same manner as in the above Example 1, except for that powdery LiCoO_2 was used as the positive electrode material for positive electrode while manganese dioxide MnO_2 was used as the negative electrode material for negative electrode, as shown in the following table 1.

(Comparative Example 5)

In Comparative Example 5, used was the positive electrode which was prepared by using, as the positive electrode material, manganese dioxide containing Li_2MnO_3 , as shown in the following table 1, and which was discharged to 2.2V (vs. Li/Li^+) at the constant potential. On the other hand, there were used powdery spinel-type lithium

titanate $\text{Li}_4\text{Ti}_5\text{O}_{12}$ as the negative electrode material and the non-aqueous electrolyte solution as the non-aqueous electrolyte, similarly to the above Comparative Example 1, and thus was fabricated the non-aqueous electrolyte battery.

(Comparative Example 6)

In Comparative Example 6, similarly to the above Example 5, there was used the positive electrode which was prepared by using, as the positive electrode material, manganese dioxide containing Li_2MnO_3 , shown in the following table 1 and which was discharged to 2.2V (vs. Li/Li^+) at the constant potential as described above. On the other hand, the same graphite as in Comparative Example 2 was used as the negative electrode material. Except for these, the same procedure as in the above Example 1 was taken to fabricate the non-aqueous electrolyte battery.

Next, each of the non-aqueous electrolyte batteries of Examples 1 to 8 and of Comparative Examples 1 to 6 was charged for 8 hours at a charge current of about $1\text{mA}/\text{cm}^2$ from a solar cell disposed outdoors and thereafter, discharged at a discharge current of about $1\text{mA}/\text{cm}^2$ to a level 0.3V lower than a mean battery voltage thereof. Specifically, the non-aqueous electrolyte batteries of Examples 1 to 3, 5 to 8 and of Comparative Examples 1, 5 were discharged to 1.2V. The non-aqueous electrolyte

battery of Example 4 was discharged to 1.8V. The non-aqueous electrolyte batteries of Comparative Examples 2,6 were discharged to 2.7V. The non-aqueous electrolyte battery of Comparative Example 3 was discharged to 3.3V whereas that of Comparative Example 4 was discharged to 0.3V. There were determined a quantity of electricity at the charging of each battery and a quantity of electricity at the discharging thereof, which quantities were used in the following equation for determination of a charge/discharge efficiency. The results are shown in the following table 1.

Charge/discharge efficiency(%)=(quantity of electricity at discharging÷quantity of electricity at charging)×100

(Table 1)

	Positive Electrode Material	Negative Electrode Material	Electrolyte	Charge/Discharge Efficiency
Example 1	LiMnO ₂	Li ₄ Ti ₅ O ₁₂	Polymer	98%
Example 2	LiMnO ₂	Rutile-TiO ₂	Polymer	93%
Example 3	LiMnO ₂	Anatase-TiO ₂	Polymer	91%
Example 4	LiCoO ₂	Li ₄ Ti ₅ O ₁₂	Polymer	97%
Example 5	MnO ₂ containing Li ₂ MnO ₃	Li ₄ Ti ₅ O ₁₂	Polymer	98%
Example 6	MnO ₂ containing Li ₂ MnO ₃	Rutile-TiO ₂	Polymer	94%
Example 7	MnO ₂ containing Li ₂ MnO ₃	Anatase-TiO ₂	Polymer	92%
Example 8	LiMn ₂ O ₄	Li ₄ Ti ₅ O ₁₂	Polymer	96%
Comparative Example 1	LiMnO ₂	Li ₄ Ti ₅ O ₁₂	Non-aqueous Electrolyte solution	83%
Comparative Example 2	LiMnO ₂	Graphite	Polymer	83%
Comparative Example 3	LiCoO ₂	Graphite	Polymer	81%
Comparative Example 4	LiCoO ₂	MnO ₂	Polymer	85%
Comparative Example 5	MnO ₂ containing Li ₂ MnO ₃	Li ₄ Ti ₅ O ₁₂	Non-aqueous Electrolyte solution	84%
Comparative Example 6	MnO ₂ containing Li ₂ MnO ₃	Graphite	Polymer	85%

As apparent from the results, the non-aqueous electrolyte batteries of Examples 1 to 8, which used titanium oxide or lithium titanate as the negative electrode material for negative electrode together with the polymeric electrolyte as the non-aqueous electrolyte, have

all achieved much greater improvement in the charge/discharge efficiency than the non-aqueous electrolyte batteries of Comparative Examples 1, 5 which did not use the polymeric electrolyte and than the non-aqueous electrolyte batteries of Comparative Examples 2 to 4, 6 which used graphite or manganese dioxide instead of titanium oxide or lithium titanate as the negative electrode material for negative electrode.

As to the non-aqueous electrolyte batteries of Comparative Examples 2 to 4, 6 which used graphite or manganese dioxide for the negative electrode, it is believed that even if the polymeric electrolyte was used as the non-aqueous electrolyte, the polymeric electrolyte would be reduced by graphite or manganese dioxide to decrease the charge/discharge efficiency.

According to a comparison among the non-aqueous electrolyte batteries of Examples 1 to 8, a notable increase in the charge/discharge efficiency was achieved by the use of spinel-type lithium titanate $\text{Li}_4\text{Ti}_5\text{O}_{12}$ as the negative electrode material for negative electrode. Additionally, the use of LiMnO_2 or manganese dioxide containing Li_2MnO_3 as the positive electrode material for positive electrode also contributed to the increase in the charge/discharge efficiency. The non-aqueous electrolyte batteries of Examples 1 and 5, which used the negative

electrode material of spinel-type lithium titanate $\text{Li}_4\text{Ti}_5\text{O}_{12}$ in combination with the positive electrode material of LiMnO_2 or manganese dioxide containing Li_2MnO_3 , presented the particularly increased charge/discharge efficiency.

Similarly to the foregoing, each of the non-aqueous electrolyte batteries of Examples 1 to 8 and of Comparative Examples 1 to 6 was charged for 8 hours at the charge current of about $1\text{mA}/\text{cm}^2$ from the solar cell and thereafter, discharged at the discharge current of about $1\text{mA}/\text{cm}^2$ to a level 0.3V below a mean battery voltage thereof. Specifically, the non-aqueous electrolyte batteries of Examples 1 to 3, 5 to 8 were discharged to 1.2V, and the non-aqueous electrolyte battery of Example 4 was discharged to 1.8V. Thus were determined respective battery capacities of the non-aqueous electrolyte batteries. The results are shown in the following table 2.

(Table 2)

Example	1	2	3	4	5	6	7	8
Battery Capacity (mAh)	9.1	7.8	7.5	8.5	10.2	9.2	8.7	9.1

It is apparent from the results that, where the non-aqueous electrolyte batteries using the same negative electrode material are compared, the batteries of Examples

5 to 7, which used the positive electrode material of manganese dioxide containing Li_2MnO_3 , presented greater battery capacities than the non-aqueous electrolyte batteries of Examples 1 to 4, 8 which used the positive electrode material of LiMnO_2 , LiCoO_2 , or spinel-type LiMn_2O_4 .

Industrial Applicability

As described above, in the non-aqueous electrolyte battery according to the invention, which uses titanium oxide or lithium titanate as the negative electrode material for negative electrode, there is interposed the polymeric electrolyte, as the non-aqueous electrolyte, between the aforesaid negative electrode and the positive electrode. Therefore, this polymeric electrolyte, unlike the conventional non-aqueous electrolyte solution, is less liable to be decomposed by the catalytic reduction induced by titanium oxide or lithium titanate. Hence, the charge/discharge efficiency is prevented from being decreased by the partial consumption of the charge current. Thus, the non-aqueous electrolyte battery featuring high charge/discharge efficiency is obtained.

Further, according to the non-aqueous electrolyte battery of the invention, the use of spinel-type lithium titanate as the negative electrode material for negative electrode or the use of manganese oxide containing lithium

as the positive electrode material for positive electrode provides the non-aqueous electrolyte battery further increased in the charge/discharge efficiency.

Additionally, the non-aqueous electrolyte battery further increased in the battery capacity is provided by using manganese dioxide containing Li_2MnO_3 as the manganese oxide containing lithium to be used as the positive electrode material.

Further, the non-aqueous electrolyte battery according to the invention uses titanium oxide or lithium titanate for the negative electrode in combination with the polymeric electrolyte as the non-aqueous electrolyte, as described above, and therefore, the non-aqueous electrolyte battery suffers less decomposition of the polymeric electrolyte and the like even when it is used in combination with the solar cell supplying unstable and high charge voltage. Thus, the non-aqueous electrolyte battery ensures adequate charging even when it is used in combination with the solar cell.

The embodiments of the present invention in which an exclusive property or privilege is claimed are defined as follows:

1. A non-aqueous electrolyte battery using spinel-type lithium titanate as a negative electrode material for use in a negative electrode and manganese dioxide containing Li_2MnO_3 as a positive electrode material for use in a positive electrode, wherein a polymeric electrolyte is interposed between said negative electrode and said positive electrode.
2. The non-aqueous electrolyte battery as claimed in claim 1, wherein a mean battery voltage thereof at the time of discharge is approximately 1.5V.
3. The non-aqueous electrolyte battery as claimed in claim 1 or 2, wherein said manganese dioxide containing Li_2MnO_3 used as said positive electrode material is obtained by heat-treating a mixture of manganese dioxide and a lithium salt at temperatures of between 300°C and 430°C.
4. The non-aqueous electrolyte battery as claimed in claim 3, wherein said lithium salt is selected from a group consisting of lithium hydroxide, lithium nitrate, lithium phosphate, lithium carbonate, and lithium acetate.
5. A charging method for non-aqueous electrolyte battery, wherein a solar cell is used for charging a non-aqueous electrolyte battery using spinel-type lithium titanate as a negative electrode material for use in a negative electrode and manganese dioxide containing Li_2MnO_3 as a positive electrode material for use in a positive electrode and

having a polymeric electrolyte interposed between the negative electrode and a positive electrode.

6. The charging method for non-aqueous electrolyte battery as claimed in claim 5, wherein said manganese dioxide containing Li_2MnO_3 used as said positive electrode material in the non-aqueous electrolyte battery is obtained by heat-treating a mixture of manganese dioxide and a lithium salt at temperatures of between 300°C and 430°C .

7. The charging method for non-aqueous electrolyte battery as claimed in claim 6, wherein said lithium salt is selected from a group consisting of lithium hydroxide, lithium nitrate, lithium phosphate, lithium carbonate, and lithium acetate.

Fig 1

