



- (51) International Patent Classification:  
*A61M 1/00* (2006.01)
- (21) International Application Number:  
PCT/US2012/024744
- (22) International Filing Date:  
10 February 2012 (10.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/442,060 11 February 2011 (11.02.2011) US  
61/489,811 25 May 2011 (25.05.2011) US  
61/510,967 22 July 2011 (22.07.2011) US

(74) Agents: HAN, Johny U. et al.; Levine Bagade Han LLP, 2400 Geng Road, Suite 120, Palo Alto, California 94303 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(71) Applicant (for all designated States except US): **TAUTONA GROUP RESEARCH AND DEVELOPMENT COMPANY, L.L.C.** [US/US]; 4040 Campbell Avenue, Suite 110, Menlo Park, California 94025 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and  
 (75) Inventors/Applicants (for US only): **GURTNER, Geoffrey C.** [US/US]; 901 Wing Place, Stanford, California 94305 (US). **ROSENTHAL, Michael H.** [US/US]; 315 Hedge Road, Menlo Park, California 94025 (US). **DOMECUS, Brian J.** [US/US]; 255 King Street, Apt. 409, San Francisco, California 94107 (US). **GITTINGS, Darin** [US/US]; 520 S. Bayview Ave., Sunnyvale, California 94086 (US). **HONG, Kinman** [US/US]; 20693 Greenleaf Drive, Cupertino, California 95014 (US).

Published:  
 — with international search report (Art. 21(3))  
 — before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: DEVICES AND METHODS FOR TISSUE TRANSFER

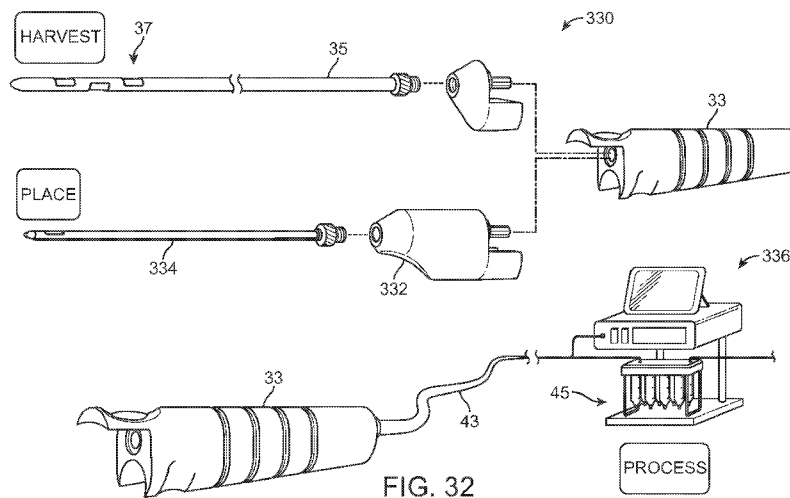

(57) Abstract: Devices and methods for tissue transfer are described where a cannula may be inserted into the breast of a subject at one of several points of entry. Insertion of the cannula into the breast may be accomplished by using a guidance system to distinguish between tissue types. Once desirably positioned, the cannula may be withdrawn from the breast while automatically (or manually) injecting the fat in multiple deposits of adipose tissue or fat such that the deposited fat remains within the tract formed by the withdrawn cannula. Multiple tracts of the deposited fat may be injected within the breast until the breast has been desirably re-modeled and/or augmented.



**DEVICES AND METHODS FOR TISSUE TRANSFER**

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority to U.S. Prov. App. Nos. 61/442,060 filed February 11, 2011; 61/489,811 filed May 25, 2011; and  
5 61/510,967 filed July 22, 2011, each of which is incorporated herein by reference in its entirety.

## FIELD OF THE INVENTION

[0002] The present invention relates generally to medical devices and  
10 methods used for transferring tissue into a region of the body. More particularly, the present invention relates to apparatus and methods for transferring fat tissue into a region of the body, such as a breast, in a selectively controlled manner.

## BACKGROUND OF THE INVENTION

15 [0003] Lipomodeling is a procedure which is typically performed under general anesthesia. Adipose tissue or fat is usually harvested from one part of the body such as the abdomen, buttocks, thighs, etc., and purified to obtain the adipocytes. The purified adipocytes or fat is then injected directly into a targeted region of the subject's body, for example, to treat the face or breasts for  
20 augmentation or treatment of abnormalities. In treating the breasts, the fat is typically injected, e.g., a volume of 100-250 mL per breast, via 10-mL syringes directly into the breast and deposited along multiple microtunnels to build up or remodel the breast.

[0004] Examples of such procedures are described in *Fat Injection to the*  
25 *Breast: Technique, Results, and Indications Based on 880 Procedures Over 10 Years*, Delay, Emmanuel et al., *Aesthetic Surgery Journal*, vol. 29, no. 5, 360-376, Sept./Oct. 2009; *Cell-Assisted Lipotransfer for Cosmetic Breast Augmentation: Supportive Use of Adipose-Derived Stem/Stromal Cells*, Yoshimura, Kotaro et al., *Aesth. Plast. Surg.*, vol. 32, 48-55, Sept. 2007; and *Fat*  
30 *Grafting to the Breast Revisited: Safety and Efficacy*, Coleman, Sydney et al., *Plastic and Reconstructive Surgery*, vol. 119, no. 3: 775-785, March 2007, each of

which is incorporated herein by reference in its entirety.

[0005] During injection of the adipocyte material, the physician will typically inject small, discrete quantities into the patient body using a Byron-Coleman type re-usable injection cannula. However, this technique is subject to  
5 variability in physician technique potentially resulting in inconsistent results and is also subject to improper placement of the adipose tissue into undesirable regions within the breast.

[0006] The regions within the breast which are ideally avoided by the physician, such as the muscles or ducts of the breast, may be difficult to discern  
10 while the desirable locations for injecting the fat (located between the pectoral muscles and breast ducts) are also difficult to detect. Prior attempts to accurately position the cannula for injection into the ideal locations within the breasts have been made but they have faced difficulties in use and adoption. Examples are described in, e.g., *A New Technique to Assist Epidural Needle Placement*, Ting,  
15 Chien-Kun et al., *Anesthesiology*, vol. 112, no. 5: 1128-35, May 2010, which is incorporated herein by reference in its entirety.

[0007] There remains a need for the application of greater volumes implanted into the breast as well as improved instruments and methods to better enable fat harvesting, purification, and/or implantation of the fat. Additionally,  
20 there remains a need for instruments having improved guidance for the precision placement of viable adipocyte grafts in the breast relative to the surrounding breast tissue.

#### SUMMARY OF THE INVENTION

25 [0008] A cannula may be inserted into the breast of a subject at one of several points of entry. After insertion of the cannula into the breast, the cannula may be withdrawn from the breast while injecting the fat in multiple deposits of adipose tissue or fat such that the deposited fat remains within the tract formed by the withdrawn cannula. Multiple tracts of the deposited fat may be injected within  
30 the breast until the breast has been desirably remodeled and/or augmented.

[0009] To properly position the cannula within the breast for injection of the fat, an instrument assembly utilizing diffuse reflectance may be incorporated and may generally comprise a cannula optically coupled to a light source, e.g.,

laser, etc. via an optical transmission fiber which is positioned through or adjacent to the cannula. A distal end of the transmission fiber may emit a light from the distal end of the cannula such that any light reflected by tissue in proximity to the distal end may be detected by the distal end of an optical receiving fiber. The receiving fiber may be optically coupled to a photo detector which may in turn be electrically coupled to a processor and a display for use by the physician.

5 [0010] By transmitting a light (such as laser light having a wavelength of between 600 to 1550  $\mu\text{m}$ ) via the transmission fiber onto the tissue, the backscattered reflected light may be detected by photo detector at a detection range matching that of the transmitted laser output. By having the processor differentiate between the different light scattering properties of the tissue, the physician can determine whether the cannula is located within or away from a particular anatomical structure for injecting or refraining from injecting the adipose tissue.

10 [0011] With the detection of tissue types utilizing diffuse reflectance, the assembly may be programmed by processor to automatically inject and/or cease injection of the fat from the cannula into the breast depending upon the type of tissue detected. By utilizing a closed-loop system, as the cannula is advanced or withdrawn from the breast, the different tissue types may be automatically detected by processor. When the presence of fat is detected, cannula may automatically inject the fat from cannula in a controlled volume and injection rate.

15 [0012] Aside from tissue identification, the cannula assembly may also be used for harvesting of the fat as well as injection into the body. An optionally detachable harvesting cannula may be introduced into a region of the body containing fat to be harvested. The fat may be aspirated or otherwise drawn into the harvesting cannula and collected into a harvesting reservoir assembly having one or more individual cartridges. The collected fat may be processed individually or collectively and this processed fat may be fluidly coupled directly to the handle with yet another detachable injection cannula.

20 [0013] In addition to the detection of tissue types for facilitating the accurate injection of the fat, various instruments may be utilized within or in conjunction with the cannula for delivering precise volumes of the fat in a controlled manner. One example is a screw-type injection mechanism having a fluted shaft. The screw mechanism may be rotatably positioned within the

cannula and it may have a distal opening for injecting the fat delivered through the cannula. As the screw mechanism rotates, any fat contained within a connected reservoir or within the cannula itself may be metered out through the distal opening. Starting or stopping the injection of the fat may be accurately controlled by  
5 starting or stopping rotation of the mechanism. An optional retractable cover located along the distal end of the cannula may be used as well.

**[0014]** An entry port may be positioned along the handle in proximity to the proximal end of screw mechanism such that fat for injection introduced into the handle may be taken up by the mechanism. The entry port may open into a  
10 chamber which is in fluid communication with the cannula and screw mechanism to minimize any clogging or obstruction which may occur due to the fat. Additionally and/or optionally, bristle stop members may be incorporated within the cannula lumen to further minimize or inhibit any clogging of the fat during injection into the patient.

**[0015]** In yet another variation, the injection assembly may optionally incorporate an impeller-stator assembly within the housing of the handle to help accelerate the fat to a speed sufficient for injection as well as to uniformly dispense the fat through the cannula for uniform injection into the breast. In use,  
15 as the impeller rotates via a drive shaft, the fat contained within the housing or reservoir may be propelled distally through the assembly past the blades of the stator which remains static. As the fat is urged through the assembly, the flow may be uniform as it is urged through the cannula for injection into the breast tissue.

**[0016]** Another variation may include a fat introduction chamber having a  
25 first diameter  $D1$  from which the cannula extends having a second diameter  $D2$  where the diameter of  $D1$  is about twice the diameter of  $D2$ . In this variation, the chamber may optionally incorporate a plunger to pressurize the fat for injection through the cannula while the mechanism rotates to eject the fat.

**[0017]** In yet another variation, a plunger may be positioned within the  
30 housing to extend into a proximal portion of the cannula. With the cannula filled with a quantity of fat, the cannula may be advanced percutaneously into the breast while under guidance. Once a suitable location has been located within the breast, the housing and plunger may both be maintained in a static position relative to the breast while the cannula may be retracted into the housing through the opening in

the housing relative to the breast proximally. Because the plunger remains static relative to the cannula, the fat contained within the cannula lumen may be forced out through the distal opening such that the ejected fat is deposited along the tract previously formed by the cannula within the tissue.

5 [0018] Other mechanisms may incorporate a pressure actuated system in which a piston is slidable through the housing by introducing a gas or fluid into a proximal or distal inlet to urge the piston proximally within the housing thereby retracting cannula or distally out of the housing.

[0019] Instead of utilizing a pressure driven assembly, another injection  
10 assembly variation may use a linear threaded member which is rotatably coupled to a motor positioned within a housing. Here, the motor may rotate the threaded member in either direction to urge a carriage which is threaded in a corresponding manner to move distally or proximally along the threaded member depending upon the direction of rotation by the threaded member. The carriage may be  
15 attached to a proximal end of the cannula such that as the carriage travels along the threaded member the cannula may be retracted or extended as desired.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Fig. 1A shows a cross-sectional side view of a cannula inserted into  
20 a breast of a subject and depositing adipose tissue.

[0021] Fig. 1B shows an anterior view of a representative breast and possible percutaneous entry points and pathways for depositing adipose tissue.

[0022] Figs. 1C and 1D show examples of how the cannula may be  
25 inserted through a single entry point beneath a breast for remodeling the breast with deposited fat.

[0023] Fig. 1E shows a cross-sectional side view of a breast with areas of breast tissue which are typically to be avoided when depositing adipose tissue.

[0024] Figs. 1F to 1H illustrate cross-sectional areas of a breast where an  
30 injection cannula has been advanced at varying angles and at different locations for potential fat deposition.

[0025] Fig. 2A shows a representative assembly in one variation of an implantation instrument which may be guided within the body by diffuse reflectance.

- [0026] Fig. 2B shows another variation of a guidance assembly having an optical fiber probe.
- [0027] Fig. 2C shows an example of an optoelectronic module which may be integrated with the guidance assembly.
- 5 [0028] Fig. 2D shows a perspective view of an example of an injection cannula having the light transmission and light receiving fibers within the distal end for tissue characterization.
- [0029] Fig. 2E shows a cross-sectional side view of another example of the cannula having the injection lumen passing through with one or more optical  
10 fibers positioned through the cannula.
- [0030] Figs. 2F to 2I show end views of exemplary embodiments for positioning of the optical fibers for excitation as well as detection.
- [0031] Figs. 2J to 2N show various configurations for the excitation source and detection assembly which may be used with the guidance assembly.
- 15 [0032] Fig. 3A shows an example of the variance in signal intensity upon encountering different tissue types for facilitating the selective deposition of adipose tissue.
- [0033] Fig. 3B shows a cross-sectional side view of an instrument which may be guided via the signal variance for selectively depositing the adipose tissue.
- 20 [0034] Fig. 4A shows a perspective assembly view of a cannula assembly which may be used for harvesting and collecting fat from within a body.
- [0035] Figs. 4B and 4C show perspective and cross-sectional side views of another variation of a cannula assembly used for harvesting and/or injection.
- [0036] Fig. 4D show side views of various harvesting cannulas.
- 25 [0037] Fig. 4E shows an assembly view of a harvesting reservoir assembly having one or more individual reservoirs or cartridges.
- [0038] Fig. 4F shows a perspective view of one variation of an instrument having an internal screw-type mechanism for controlling the delivery of the tissue into the body.
- 30 [0039] Fig. 5 shows a cross-sectional side view of another variation of an instrument having an internal screw-type mechanism coupled to a pressurizable reservoir.
- [0040] Fig. 6 shows a cross-sectional side view of an instrument shaft having a retractable distal tip.

- [0041] Figs. 7A to 7C show perspective views of the instrument shaft, handle, and tip, respectively, having a screw-type mechanism.
- [0042] Figs. 8A to 8C show side views and detailed perspective views of an instrument having a screw-type mechanism.
- 5 [0043] Figs. 9A to 9C show perspective detailed views of an instrument shaft incorporating projections, such as bristles, within the cannula shaft for functioning as a stop mechanism to the adipose material and to facilitate the linear movement of the material through the shaft lumen.
- [0044] Fig. 10 shows a side view of one variation of an impeller and stator  
10 mechanism for facilitating adipose tissue movement within the instrument as well as uniformly dispensing the tissue material from the cannula.
- [0045] Fig. 11 shows a side view of another variation of an impeller and stator mechanism.
- [0046] Figs. 12A to 12F show examples of various impeller configurations  
15 which may be used with the injection instrument.
- [0047] Fig. 13 shows a representative example of another variation of an instrument having an introduction chamber for receiving the adipose tissue for injection.
- [0048] Fig. 14 shows one variation of a reservoir which may be used to  
20 introduce the adipose material into an injection instrument.
- [0049] Fig. 15 shows a detailed cross-sectional side view of an inlet port for receiving the adipose material into the cannula for injection.
- [0050] Fig. 16A shows a cross-sectional side view of another variation of an injection instrument having at least two sections with differing diameters as  
25 well as a pressurizing mechanism, such as a piston, to inhibit clogging of the adipose material during injection.
- [0051] Fig. 16B shows a perspective view of a dual-diameter injection instrument.
- [0052] Fig. 16C shows a cross-sectional side view of another variation of a  
30 dual diameter injection instrument.
- [0053] Figs. 17A and 17B show side views of another variation of an injection instrument having a retractable cannula.
- [0054] Fig. 18A shows a cross-sectional side view of another variation of an injection instrument having a collapsible inner sheath within a cannula.

- [0055] Figs. 18B and 18C show side views of a retraction mechanism reconfigurable within the cannula.
- [0056] Fig. 19A shows a side view of another example of a needle cannula having a piston assembly.
- 5 [0057] Figs. 19B to 19D show side views of the needle cannula retracting relative to a breast to deposit a tract of adipose tissue within the breast.
- [0058] Figs. 20A and 20B show side views of another variation of an injection instrument which may be pressure actuated.
- [0059] Figs. 21A and 21B show side views of another variation where the  
10 injection instrument may be driven by a lead screw-type mechanism.
- [0060] Fig. 22 shows another variation of an injection instrument using a pressurized mechanism.
- [0061] Figs. 23A to 23C show perspective and side views of another variation using a lead screw-type mechanism with a retractable needle cannula.
- 15 [0062] Figs. 24A and 24B show perspective views of the instrument having a retractable needle cannula.
- [0063] Figs. 25A and 25B show detail side views of the retractable needle cannula mechanism.
- [0064] Figs. 26A to 26C show perspective views of another variation  
20 where the retractable needle may be refilled once retracted.
- [0065] Fig. 27 shows a cross-sectional side view of an in-line filtration system which may be integrated with an injection instrument.
- [0066] Figs. 28A to 28C show perspective views of alternative variations injection instruments configured to have multiple cannulas and/or interchangeable  
25 cannulas.
- [0067] Figs. 29A and 29B show perspective views of yet another variation having multiple cannulas where each successive cannula may have a length which is shorter to facilitate injection within a contoured body region such as a breast.
- [0068] Figs. 30A and 30B show perspective views of yet another variation  
30 where the fiber optic connection may be detachable from the system and reconnected in an axial arrangement.
- [0069] Fig. 31 shows a schematic illustration of an example of a complete harvesting, processing, and injection system which is coupled to one another such that a consistent and relatively low pressure may be maintained throughout the

entire process and system.

[0070] Fig. 32 shows an assembly view of a combined fat harvesting and injection assembly utilizing a single handle and controller.

[0071] Fig. 33 shows an assembly view of another example illustrating  
5 how the handle with a detachable harvesting cannula may be used for harvesting the fat for processing and then used also for injection into the patient body with a detachable injection cannula.

[0072] Fig. 34 shows an assembly view of another example of how an  
10 individual cartridge having processed fat may be coupled directly into the handle for injection into the body.

[0073] Figs. 35A and 35B show perspective views of another variation of a handle assembly attached to an injection cannula and further having an angled receiving section for receiving an individual cartridge having processed fat for injection.

[0074] Figs. 36A and 36B show perspective views of another variation of  
15 the handle assembly illustrating how the handle may be separated into at least two components.

[0075] Figs. 37A and 37B illustrate perspective views of another variation  
20 of a handle assembly which may also comprise a reusable component as well as a disposable component having an angled section.

[0076] Fig. 38A schematically illustrates one example of how the individual cartridges may be filled with the harvested fat collected from the harvesting cannula.

[0077] Fig. 38B schematically illustrates an example of how the individual  
25 cartridges may be purged of air or other material and incorporated into the injection assembly.

[0078] Fig. 39 shows a perspective view of one configuration of cartridges coupled to a base dock.

[0079] Fig. 40 shows a cross-sectional side view illustrating one  
30 configuration for a valve and plunger assembly incorporated into a cartridge.

[0080] Figs. 41A and 41B show cross-sectional side and perspective views of one variation of a plunger defining one or more openings therethrough.

[0081] Fig. 42 shows a side view of a cartridge having a plunger and valve assembly incorporated.

- [0082] Figs. 43A and 43B show cross-sectional side views of a plunger and valve assembly illustrating an open and closed configuration.
- [0083] Fig. 44 shows a partial cross-sectional side view of a plunger and valve assembly coupled to a port adapter.
- 5 [0084] Fig. 45 shows a perspective view of another variation of a plunger and valve assembly integrated with a key for maintaining a position of the plunger.
- [0085] Fig. 46 shows a perspective view of an example of a port adapter.
- [0086] Figs. 47A and 47B show respective side and schematic views of an  
10 example of a reversible pump assembly which may be integrated into any of the handle variations described herein.
- [0087] Fig. 48 shows a side view of another variation of the reversible pump assembly.
- [0088] Fig. 49 shows a graph of the travel distance of the piston relative to  
15 the current drawn by the motor.

#### DETAILED DESCRIPTION OF THE INVENTION

- [0089] As shown in the cross-sectional side view and anterior view of  
20 Figs. 1A and 1B, a cannula **10** may be inserted into the breast **BR** of a subject at one of several points of entry **14** in proximity to the nipple and circumference of the breast **BR**. After insertion of the cannula **10** into the breast, the cannula **10** may be withdrawn from the breast **BR** while injecting the fat in multiple deposits of adipose tissue or fat **12** such that the deposited fat **12** remains within the tract  
25 **16** formed by the withdrawn cannula **10**. Multiple tracts **16** of the deposited fat **12** may be injected within the breast utilizing the common entry points **14** until the breast has been desirably remodeled and/or augmented.
- [0090] Figs. 1C and 1D illustrate an example of how the cannula **10** may be inserted into a single entry point **14** beneath the breast **BR** and how the fat **12**  
30 may be deposited along a tract defined by the cannula **10**. With the cannula **10** positioned through the entry point **14** within the breast **BR**, the cannula **10** may be repeatedly advanced and withdrawn along multiple tracts **16** through the common

entry point **14** while depositing fat to remodel the breast **BR** accordingly.

[0091] However, the physician may encounter difficulties discerning when and where the fat can be deposited within the breast **BR**. Fig. 1E shows a cross-sectional side view of breast **BR** illustrating areas of breast tissue to be avoided  
5 **18**, such as within the underlying muscles or ducts, and the targeted deposit area **DA** which is typically within the subcutaneous fat layer within the breast **BR** located between the pectoral muscles and the ducts.

[0092] Figs. 1F to 1H illustrate cross-sectional areas of a breast **BR** when the cannula **10** has been advanced at varying angles and at different locations  
10 where fat may or may not be deposited. For instance, Figs. 1F and 1G illustrate how the cannula has been advanced into tissue regions to be avoided **18**, the cannula **10** may detect the tissue type (as discussed further herein) and give an indication as to the desirability of the location for fat deposition. Fig. 1H illustrates an example of when the cannula **10** may be advanced into a desirable  
15 area within the breast **BR** for fat deposition.

[0093] Thus, in properly positioning the cannula within the breast for injection of the fat, one example of an instrument assembly **20** utilizing diffuse reflectance is shown in the cross-sectional assembly view of Fig. 2A. As illustrated, assembly **20** may generally comprise a cannula **22** which may be  
20 optically coupled to a light source **24**, e.g., laser, etc. via an optical transmission fiber **26** which is positioned through or adjacent to cannula **22**. A distal end of the transmission fiber **26** may emit a light from the distal end **30** of the cannula such that any light reflected by tissue in proximity to the distal end **30** may be detected by the distal end of an optical receiving fiber **28**. The receiving fiber **28** may be  
25 optically coupled to a photo detector **32** which may in turn be electrically coupled to a processor **34** and a display **36** for use by the physician.

[0094] By transmitting a light (such as laser light having a wavelength of between 600 to 1550  $\mu\text{m}$ ) via transmission fiber **26** onto the tissue, the backscattered reflected light may be detected by photo detector **32** at a detection  
30 range matching that of the transmitted laser output, e.g., ranging up to 50 mW or more. Other suitable wavelengths for the laser light may range, e.g., between 630 to 1450 nm, as many biological tissues have a low absorption window which is away from hemoglobin absorption. Also, such a range may avoid water absorption in the NIR range. Moreover, Rayleigh scattering and Mie scattering

may allow for a diffuse reflectance of deep penetrating and back-scattered photons. Another suitable range may include, e.g.,  $920 \pm 10$  nm or  $1210 \pm 10$  nm. Laser light wavelengths in such a range may help to differentiate against non-lipid containing tissues when combined with other wavelengths.

5 [0095] Various types of lasers may be used (e.g., superluminescent emitting diode (SLED) lasers, etc.) at multiple wavelengths to highlight the differences in tissue structures. The photo detector **32** may convert the input signal to an output voltage which is then transmitted to processor **34** which may be programmed to differentiate the physiologic structures based on the light  
10 scattering properties and light reflectance intensity at various wavelengths. The diffuse reflectance may be optionally utilized in combination with other detection modalities such as ultrasound, optical coherence reflectometry, etc.

[0096] Fig. 2B shows another variation of a guidance assembly **21** which may have a cannula **22** (for tissue harvesting or injection) through which the  
15 injection lumen **29**, in this example, may be defined and an optical fiber probe **23**, as described above. The assembly **21** may also include a flow sensor **25** as well as an actuator assembly **27** integrated into the assembly **21**. An optical cable **31** may couple the optical fiber probe **23** to an optoelectronic (OE) module **33** containing the excitation source, e.g., laser source, as well as the detection electronics. A  
20 cable **35** may couple the OE module **33** with a display **36**.

[0097] An example of an OE module **33** is shown schematically in Fig. 2C which illustrates the optical cable **31** connected to an optical system assembly **39** comprising the excitation source, optical circuitry, detector(s), source driver, etc. An electronics assembly **41** (e.g., interface bus, digital signal processor,  
25 buffer/memory, A/D converter, DAQ (digital acquisition) module, etc.) may communicate with the optical system assembly **39** and a power supply **37** may also be included. The cable **35** may be electrically coupled to the electronics assembly **41** leading to the display or another module. Additionally, the flow sensor **25** may also be seen in electrical communication with the electronics  
30 assembly **41** as well.

[0098] Fig. 2D illustrates a perspective view of an example of a cannula where the transmission fiber **26** may emit the light **27** onto the adjacent tissue region. The optical receiving fiber **28** is also shown within the cannula distal end **30** receiving the reflected light **29** with information indicative of the tissue type.

[0099] Fig. 2E shows a cross-sectional side view of another example of the cannula **22** having the injection lumen passing through with one or more optical fibers positioned through the cannula **22**. Figs. 2F to 2I show end views of exemplary embodiments for positioning of the optical fibers for excitation as well as detection. Fig. 2F shows one example where the excitation source fiber **43** may be positioned adjacent to the fluorescence emission sense fiber **45**. A diffuse reflectance sense fiber **47** may be positioned in proximity to the excitation source fiber **43** for detecting the reflected diffused light **49** as well as any fluorescence **51** which may be excited from the illuminated tissue.

10 [0100] Fig. 2G shows another variation where the excitation source fiber **43** and fluorescence emission sense fiber **45** may be combined into a single optical fiber or fiber bundle. Fig. 2H shows yet another variation where the excitation source fiber **43** and fluorescence emission sense fiber **45** may be combined again but the reflectance sense fiber **47** may be positioned adjacent to the combined  
15 fiber or fiber bundle. Fig. 2I shows a similar variation where the excitation source fiber **43**, fluorescence emission sense fiber **45**, and reflectance sense fiber **47** may all be combined into a single fiber or fiber bundle.

[0101] Turning now to the optical system assembly **39**, the excitation source and detection assembly may be positioned into various configurations.  
20 Fig. 2J shows one variation in optical system assembly **39A** where the excitation source may be combined into a single signal including  $\lambda_{\text{source}}$  (e.g., from a first laser source **LD1**) and  $\lambda_{\text{ex}}$  (e.g., from a second laser source **LD2**). The diffuse reflectance  $\lambda_{\text{Rd}}$  as well as the fluorescence emission  $\lambda_{\text{em}}$  may be received back into the optical system assembly **39** where the signal may be split, e.g., via dichroic  
25 mirrors, for detection of the fluorescence emission  $\lambda_{\text{em}}$  by a first detector **DET1** and of the diffuse reflectance  $\lambda_{\text{Rd}}$  by a second detector **DET2** for processing by the electronics assembly **41**.

[0102] Fig. 2K shows another variation where the fluorescence emission  $\lambda_{\text{em}}$  may be filtered and detected, e.g., by a line detector **DET1**. Fig. 2L shows  
30 another variation where the excitation source  $\lambda_{\text{source}}$ ,  $\lambda_{\text{ex}}$  may be combined into a single signal and where the same fiber or fiber bundle may be used to detect the diffuse reflectance  $\lambda_{\text{Rd}}$  which may be filtered for detection by **DET1** while the fluorescence emission  $\lambda_{\text{em}}$  may be detected in a separate fiber or fiber bundle by second detector **DET2**. Fig. 2M shows yet another variation where the excitation

source  $\lambda_{\text{source}}$ ,  $\lambda_{\text{ex}}$  and diffuse reflectance  $\lambda_{\text{Rd}}$  may be detected via a single fiber or fiber bundle, as above, but where the fluorescence emission  $\lambda_{\text{em}}$  may be detected in a manner similar to the configuration shown in Fig. 2K above. Fig. 2N shows yet another variation where the excitation source source  $\lambda_{\text{source}}$ ,  $\lambda_{\text{ex}}$  and detected  
5 diffuse reflectance  $\lambda_{\text{Rd}}$  and fluorescence emission  $\lambda_{\text{em}}$  may be combined into a single fiber or fiber bundle. The detected signal may be filtered for detection by **DET1** and **DET2** as shown.

**[0103]** The tissue guidance assemblies described may be integrated into any of the harvesting and/or injection cannulas described herein to help  
10 distinguish between different tissue types when harvesting tissue and/or injecting processed tissue into the body.

**[0104]** By having the processor **34** differentiate between the different light scattering properties of the tissue, the physician can determine whether the cannula **20** is located within or away from a particular anatomical structure for  
15 injecting or refraining from injecting the adipose tissue. An example is illustrated in the graphical interface of Fig. 3A which shows the reflectance intensity **40** of the tissue encountered by the cannula **22**. Such a graph **40** may be displayed to the physician to provide a real time indication of cannula position during a procedure. In this example, as the cannula **22** approaches the skin surface, an  
20 initial noise floor **42** indicative of the presence of the cannula in air may be initially shown, as illustrated in Fig. 3B.

**[0105]** As the cannula **22** approaches and is inserted into the skin **1**, the signal intensity may rise indicating to the physician that the cannula **22** has entered the skin **1**. As the cannula **22** is advanced into the breast **BR**, the different  
25 layers of tissue may be detected and charted. For instance, as the cannula **22** enters adipose tissue or fat **2** within the breast, the signal intensity may drop to a level between the initial signal **42** and the signal sensed from the skin **1**. This detected level may indicate to the physician that they are within a region of the breast **BR** where fat may be injected. Other tissue structures such as ligament **3** or  
30 muscle **4** may be reflected and charted accordingly where each different tissue type may generate its own level of signal intensity. In the event the cannula **22** detects tissue types other than fat **2**, the processor **34** may be programmed to signal some visual or auditory alarm indicating that the cannula **22** may need repositioning. In the event that the signal drops to the noise floor **44**, this may

indicate that the cannula **22** has advanced between or has been withdrawn from the breast **BR**.

**[0106]** With the detection of tissue types utilizing diffuse reflectance, the assembly may be programmed by processor **34** to automatically inject and/or  
5 cease injection of the fat from the cannula **22** into the breast depending upon the type of tissue detected. By utilizing a closed-loop system, as the cannula **22** is advanced or withdrawn from the breast, the different tissue types may be automatically detected by processor **34**. When the present of fat is detected, cannula **22** may automatically inject the fat from cannula **22** in a controlled  
10 volume and injection rate. In the event that the system detects a position of the cannula **22** in tissue types other than fat, such as muscle, the processor **34** may automatically cease the injection into the breast until the presence of fat is again detected within the breast in which case the processor **34** may automatically resume the injection of the fat. Alternatively, rather than utilizing an automated  
15 system, an alarm or indication may be indicated to the physician who may manually inject and/or cease the injection of the fat from the cannula into the breast.

**[0107]** Moreover, with a cannula having a size ranging anywhere from 16-10 gauge (or higher), a typical volume of fat ranging from, e.g., 10-20 cc, may be  
20 accomplished. With such a volume injectable per cannula, the amount of fat injected during an entire procedure within, e.g., a breast, may vary from, e.g., 100-1000 cc per breast, or an average of, e.g., 450 cc per breast.

**[0108]** While the cannula **22** may be traversed through the body at various rates, e.g., up to 10 cm/sec, the withdrawal rates for the cannula **22** may vary as  
25 well. For example, the cannula may be retracted at rates of, e.g., 2 mm/sec up to 5 cm/sec, and the cannulas may optionally incorporate a hydrophilic coating along its length to facilitate the advancement or withdrawal through the tissue. Moreover, the cannulas may optionally oscillate (automatically or manually) to facilitate injection of the fat.

30 **[0109]** The identification of tissue type may be used not only for fat injection into the body, but it may also be used in identifying desirable tissue regions for the harvesting of the fat from the body for processing prior to re-injection.

**[0110]** One variation is illustrated in the perspective assembly view of Fig.

4A showing cannula assembly **31** which illustrates a handle **33** for providing the harvesting of the fat from the body as well as the injection into the body. An optionally detachable harvesting cannula **35** is shown extending from the handle **33** and defining one or more openings or fenestrations **37A** to **37C** along the  
5 cannula **35** near the distal end. Each of the openings **37A** to **37C** may be staggered or uniform relative to one another. Moreover, although three openings are shown, this is merely exemplary and a fewer or greater number of openings may be defined along the cannula **35**. A rotatable inner shaft **39** may be positioned within the cannula with a number of cutting windows **41A** to **41C**  
10 which correspond in position and size with respect to the openings **37A** to **37C** along the cannula **35**.

[0111] In use, the inner shaft **39** may be rotated relative to a stationary cannula **35** such that the when the openings are aligned, adjacent fat may be introduced within the openings and then cut or shaved into the cannula **35** as the  
15 inner shaft **39** rotates and closes the openings onto the fat with respect to the cannula **35**. The cut or shaved fat may be drawn through the cannula **35** and handle **33** and through a tubing **43** which is in fluid communication with a harvesting reservoir assembly **45** which may contain one or more individual reservoirs or cartridges **47**. The individual cartridges **47** containing the collected  
20 fat and other tissue may be further processed and directly introduced into the patient's body, such as the breasts, for remodeling the body.

[0112] Figs. 4B and 4C show perspective and partial cross-sectional side views of another variation of a cannula assembly **49** which may be used for harvesting and/or injection. The assembly **49** illustrates a harvesting cannula **35**  
25 with one or more openings **37** defined near the distal end of the cannula **35**. The handle **33** in this variation further illustrates an opening **51** along the side of the handle **33** into which a reservoir or cartridge **47** or tubing may be fluidly coupled to transfer and/or collect the aspirated fat for further processing or re-injection.

[0113] Fig. 4D illustrate side views of various harvesting cannulas **35**  
30 which have a variable number of openings **53** for collecting the fat. As shown, the number of openings **53** may be varied from a few, e.g., three openings, to several openings **55**, e.g., six openings.

[0114] An example of the harvesting reservoir assembly **45** is illustrated in the perspective view of Fig. 4E which shows assembly **45** fluidly coupled to a

harvesting cannula. As described above, the reservoir assembly 45 may contain one or more individual reservoirs or cartridges 47 each fluidly coupled. The tubing 43 coupled to the harvesting cannula may draw in the collected fat 59 and other fluids or tissue 57 directly into the one or more cartridges 47 thus increasing  
5 the viability of the collected fat by reducing exposure to air and mechanical trauma as well as reducing the amount of time spent outside the patient's body.

[0115] The one or more cartridges 47 may be individually or collectively processed and the miscellaneous fluids or tissue 57 may be removed from the cartridge 47, e.g., via an opening 61 located along the cartridge 47. The resulting  
10 processed cartridge 47A may retain only the desired fat tissue 59 for direct injection into the patient body by utilizing the cartridge 47A directly with the injection assembly.

[0116] In addition to the detection of tissue types for facilitating the accurate harvesting or injection of the fat, various instruments may be utilized  
15 within or in conjunction with the cannula for delivering precise volumes of the fat in a controlled manner. One example is shown in the perspective view of Fig. 4F which illustrates a screw-type injection mechanism 50, such as a screw mechanism 58 having a fluted shaft. The screw mechanism 58 may be rotatably positioned within cannula 52 which may also have a tapered piercing tip 54 and a  
20 distal opening 56 for injecting the fat delivered through the cannula 52. As the screw mechanism 58 rotates, any fat contained within a connected reservoir or within the cannula 52 itself may be metered out through the distal opening 56. Starting or stopping the injection of the fat may be accurately controlled by starting or stopping rotation of the mechanism 58.

[0117] Another variation is illustrated in the cross-sectional side view of  
25 injection instrument 60 shown in Fig. 5. In this variation, an outer sheath or cannula 62, e.g., 20 gauge, which may range from, e.g., 6-12 inches in length, may be operatively connected to a handle 68 and may also be in fluid communication with a reservoir 76 containing a volume of the adipose tissue or fat 78. A fluted  
30 mechanism 64 may be rotatably positioned within a lumen defined through the cannula 62 and a piston 74 may also be incorporated into the reservoir 76 for optionally pressurizing the fat 78 for facilitate injection through the cannula 62. An air inlet port 70 and an air outlet port 72 may also be optionally included along handle 68 for controlling the air within the device as piston 74 is actuated.

[0118] Fig. 6 shows a detailed cross-sectional side view of the cannula **62** from Fig. 5 with an optional retractable cover **82** located along the distal end **66** of the cannula **62**. In use, once the cannula **62** has been advanced and desirably positioned within the breast **BR** for fat injection using the transmission fiber **26** and receiving fiber **28** described above, the piston **74** may be optionally actuated and the fluted mechanism **64** may be actuated to rotate such that the fat **78** is advanced distally through the lumen **80** of cannula **62**. The one or more members of optional cover **82** (if present) may be retracted, as shown, to reveal the distal opening **84** of lumen **80** allowing for the injection of the fat **78** into the breast tissue.

[0119] Another example of an injection assembly is shown in the perspective views of Figs. 7A to 7C. Cannula **62** is shown with fluted mechanism **64** rotatably positioned within. Distal end **66** is shown having optionally retractable members **92** which form an atraumatic rounded tip when closed for advancement through tissue. However, when fat is ejected from cannula **62**, the retractable members **92** may open to allow for the injection of the fat. An entry port **90** for introducing adipose tissue into the handle **68** is also shown where the entry port **90** may be located in proximity to a proximal end of the fluted mechanism **64**.

[0120] As illustrated in the side and perspective views of Figs. 8A to 8C, the entry port **90** may be positioned along the handle **68** in proximity to the proximal end of mechanism **64** such that fat for injection introduced into the handle **68** may be taken up by the mechanism **64**. The entry port **90** may open into a chamber which is in fluid communication with the cannula **62** and mechanism **64** to minimize any clogging or obstruction which may occur due to the fat.

[0121] To further minimize or inhibit any clogging of the fat during injection into the patient, Figs. 9A to 9C show perspective and side views of one or more bristle stop members **100** which may be positioned attached along the lumen of cannula **62**. The bristle stop members **100** may generally comprise bristles or projections **106** which are attached along an attachment length **104** along the lumen and extend into the lumen and act as a stop for fat reducing radial travel and may function to increase the translational linear movement of the fat through the cannula **62** without inhibiting the rotational movement of the

mechanism **64** adjacent to the bristles **106**. The bristles **106** may extend along the lumen in discrete segments, as shown in Fig. 9A, or as a continuous bristle member **102**, as shown in Fig. 9B.

**[0122]** In yet another variation, the injection assembly may optionally  
5 incorporate an impeller-stator assembly **110**, as shown in the partial cross-sectional side view of Fig. 10, within the housing of the handle to help accelerate the fat to a speed sufficient for injection as well as to uniformly dispense the fat through the cannula **62** for uniform injection into the breast. Generally, an impeller-stator assembly **110** may have an impeller **112** which has one or more  
10 blades extending radially from a hub and is rotatable relative to the cannula **62**. A stator **114** which remain static relative to the assembly may be located distal to the impeller **112** and may also have one or more stator blades **116** which extend radially from its hub to facilitate the uniform distribution of the fat passing through the assembly **110**.

**[0123]** In use, as shown in the example of Fig. 11, as the impeller **112**  
15 rotates via a drive shaft **120**, the fat contained within the housing or reservoir may be propelled distally through the assembly past the blades **116** of the stator **114** which remains static. As the fat is urged through the assembly, the flow may be uniform as it is urged through the cannula **62** for injection into the breast tissue.  
20 Figs. 12A to 12F show examples of various impeller configurations **132**, **134**, **136**, **138**, **140** which may be used in the impeller-stator assembly **110**.

**[0124]** Fig. 13 shows yet another variation of an injection assembly incorporating a fat introduction chamber **150** within the housing of the handle. The introduction chamber **150** may be positioned proximally of the cannula **62**  
25 with an entry port **152** which opens above a proximal end of the fluted mechanism **64** when the assembly is held upright. One or more introduction lumens **154** may open into the introduction chamber **150** for receiving the fat from a reservoir **160**, as shown in the side view of Fig. 14. The reservoir **160** may be optionally pressurized via, e.g., a plunger **162**, and fluidly coupled to the introduction  
30 chamber **150** via tube **158** which may optionally divide into one or more transfer lumens **156**. As the mechanism **64** is actuated by drive shaft **120** (which may be automatically controlled by processor **34**, as previously described), fat may be urged from the pressurized reservoir **160** to transfer into the introduction chamber **150** and then into contact with the proximal end of mechanism **64** through entry

port **152**, as shown in the detail cross-sectional side view of Fig. 15, for injection into the subject's breast.

[0125] Another variation is shown in the partial cross-sectional side view of Fig. 16A, which shows a fat introduction chamber **170** having a first diameter D1 from which cannula **62** extends having a second diameter D2 where the diameter of D1 is about twice the diameter of D2. In this variation, chamber **170** may optionally incorporate a plunger **172** to pressurize the fat for injection through the cannula **62** while mechanism **64** rotates to eject the fat. Fig. 16B shows a perspective view of the assembly and Fig. 16C shows another variation in the partial cross-sectional side view which incorporates an optional port **174** for allowing air to enter or exit during pressurization of the fat within chamber **170**.

[0126] In yet another variation, Figs. 17 and 17B show representative partial cross-sectional side views of an injection assembly **180** having a housing **182** with a retractable cannula **184** which may be withdrawn partially or entirely into the housing **182** during fat injection. A plunger **186** may be positioned within housing **182** to extend into a proximal portion of cannula **184**. With cannula **184** filled with a quantity of fat **78**, cannula **184** may be advanced percutaneously into the breast while under guidance (as previously described). Once a suitable location has been located within the breast, housing **182** and plunger **186** may both be maintained in a static position relative to the breast while cannula **184** may be retracted into the housing **182** through opening **188** in housing **182** relative to the breast proximally. Because the plunger **186** remains static relative to the cannula **184**, the fat **78** contained within the cannula lumen **192** may be forced out through the distal opening **190** such that the ejected fat **78** is deposited along the tract previously formed by the cannula **184** within the tissue.

[0127] Fig. 18A shows another variation of the retractable cannula **184** having an actuation shaft **200** positioned within the cannula lumen. The actuation shaft **200** may have a support shaft **202** which extends through the cannula with one or more collapsible barbs **204** extending radially from the shaft **202**. Boluses of fat **78** may be positioned between each of the barbs **204** which may help to compact the fat within the cannula **184** and prevent any buildup or introduction of air within the fat **78**. Figs. 18B and 18C show detail side views of one variation of the barbs **204** which may project at an acute angle relative to the shaft **202** such that the barbs **204** are angled to extend distally along the cannula **184**. When shaft

202 is retracted proximally, each of the barbs 204 may pivot via a pivoting attachment 206 to collapse against shaft 202 to allow for the injection of the compacted fat 78 from distal opening 190 into the breast tissue.

[0128] In yet another variation, Fig. 19A shows a representative side of a retractable cannula 184 (e.g., a 10 gauge needle cannula) having an inner piston shaft 210 which is translatable relative to the cannula 184. Piston shaft 210 may define a lumen 212 therethrough within which a volume of fat 78 may be placed. An example of use is shown in the side views of Figs. 19B to 19D which illustrate how the needle cannula 184 may be retracted relative to the piston shaft 210 prior to percutaneous insertion into the breast BR, as shown in Fig. 19B. Prior to, during, or after the cannula 184 has been advanced into the breast BR and desirably positioned for injection (e.g., using the guidance devices and methods described herein), cannula 184 may be extended relative to the shaft 210 and a volume of fat 78 may be introduced into the cannula 184 through the lumen 212 of shaft 210, as shown in Fig. 19C. Once the volume of fat 78 is ready for injection into the breast BR, the cannula 184 may be retracted from the breast BR while maintaining a position of the shaft 210 relative to the breast BR such that a volume of fat 78 is injected into the breast BR along the tract formed by the withdrawn cannula 184, as shown in Fig. 19D.

[0129] Figs. 20A and 20B show side views of another variation of an injection assembly 220 which comprise a pressure actuated system. In this variation, cannula 184 may be attached at a cannula attachment 224 to a movable piston 226 which is slidable through the housing 182. A volume of fat may be introduced into the cannula 184 in its extended configuration which may be extended by introducing a gas or fluid into the proximal inlet 222, as shown in Fig. 20B. Once the cannula 184 has been desirably positioned within the breast BR, the cannula 184 may be retracted proximally into the housing 182 by introducing a gas or fluid into the distal inlet 222' to urge the piston 226 proximally within the housing 182 thereby retracting cannula 184, as shown in Fig. 20B.

[0130] Instead of utilizing a pressure driven assembly, another injection assembly 230 variation shown in the side views of Figs. 21A and 21B may use a linear threaded member 232 which is rotatably coupled to a motor 234 positioned within a housing. Here, the motor 234 may rotate the threaded member 232 in

either direction to urge a carriage **236** which is threaded in a corresponding manner to move distally or proximally along the threaded member **232** depending upon the direction of rotation by the threaded member **232**. Carriage **236** may be attached to a proximal end of cannula **184** such that as the carriage **236** travels  
5 along the threaded member **232** the cannula **184** may be retracted, as shown in Fig. 21A, or extended, as shown in Fig. 21B, as desired. A reservoir **238** (which may be pressurized) may be fluidly coupled to a proximal end of the cannula **184** so as to provide a volume of fat for injection through the cannula **184**.

**[0131]** Fig. 22 shows a partial cross-sectional side view of another  
10 injection assembly **240** variation which utilizes a pressurized cannula actuation system. Handle housing **242** may comprise a pressurizable line **244** which may be pressured at either a proximal inlet **246** or at a distal inlet **246'** to actuate a piston attached to the cannula **184**. Depending upon which inlet **246**, **246'** is pressurized, the cannula **184** may be retracted or extended for advancement into the breast and  
15 injection of fat accordingly.

**[0132]** In yet another variation, Figs. 23A to 23C show perspective and side views of an injection assembly **250** variation which utilizes a rotatable lead screw **232** to advance or retract a carriage **236** attached to a proximal end of cannula **184**, similar to the variation described above in Figs. 21A and 21B. In  
20 this example, handle housing **252** may contain a power supply **254** for driving the motor **234** to rotate the lead screw **232**. Figs. 24A and 24B show perspective views of the assembly **250** and Figs. 25A and 25B show detail side views of the extension and retraction, respectively, of the carriage **236** to extend and retract the cannula **184** within housing **252** for injecting the fat. The retractable cannula may  
25 be utilized in any number of various cannula embodiments as described herein.

**[0133]** Figs. 26A to 26C show perspective views of another variation of an injection assembly **260** which may comprise a handle housing **262** into which cannula **184** may be retracted using any of the mechanisms described herein. Housing **262** may incorporate a valve proximal to the opening **188** which may  
30 close once the cannula **184** has been retracted into housing **262**, as shown in Fig. 26B, to allow the cannula **184** to be refilled with fat. Once the cannula **184** is ready to be retracted once again, the valve may be opened and the cannula **184** extended. In this as well as any of the injection instrument embodiments described herein, the tissue detection assemblies may be incorporated as desired.

[0134] As previously mentioned, fat may be harvested from a first site of the patient (e.g., periumbilical, lumbar, trochanteric, thigh, medial knee and arm, etc.) and this harvested fat may be purified prior to injection back into the patient. When harvesting the fat, the patient may be anesthetized and the lipoaspiration  
5 procedure may be performed.

[0135] While extraction may be performed using an aspiration cannula (e.g., 3-4 mm Mercedes or 14 gauge needle connected to a syringe), aspiration may be performed alternatively using a cannula, such as cannula **184**, optionally having an alternative tip configuration depending upon the desired configuration  
10 for harvesting. The cannula **184** may be removed and/or replaced with another cannula for implantation, as previously described.

[0136] Additionally and/or alternatively, a cannula **184** incorporating the tissue detection assembly described herein may be used to facilitate the harvesting and extraction of the adipose tissue. In use, the cannula **184** may be advanced into  
15 the patient's body and the detection system as previously described may be used to detect for the presence of fat for extraction.

[0137] Once the fat has been harvested, it may then be purified by extracting viable adipocytes from the lipoaspirate material. Typically, the lipoaspirate material may undergo centrifugation to separate the adipocytes from  
20 the blood, serum, damaged cells, tumescent fluids, oil, etc. and the extracted adipose graft material may be transferred to standard syringes. Systems such as a VIAFILL™ (Lipose Corp., Maitland, FL) countertop centrifuge may be used to centrifuge and extract the adipocytes. A syringe, such as a short, broad 20 cc harvest syringe may be used to manually extract the viable adipocytes where the  
25 plunger arm may be removed for centrifugation and the extracted fat may be transferred directly to any of the reservoirs described herein, such as reservoir **238**, for direct implantation using any of the devices described herein.

[0138] Moreover, an optionally disposable in-line filtration device such as LIPIVAGE™ (Genesis Biosystems, Lewisville, TX) may be used to harvest the  
30 fat. Such a device may be incorporated into the injection assembly to extract and purify the extracted material, e.g., 20-25 cc of fat, by automatically separating and washing the fat during the harvesting process utilizing internal filters. An example is shown in the side view of Fig. 27 illustrating an in-line filtration device **270** having an extraction reservoir **272** which one or more filters **274**

integrated into the reservoir **272**. The extracted material may be drawn into the device from the patient and through cannula **184** where it may be separated and washed. The purified fat contained within the reservoir **272** may then be removed from the device **270** for implantation using the devices and methods above or it  
5 may simply be injected directly into the patient using the filtration device **270** incorporated into the sensing and injection assemblies described above.

[0139] Further examples of in-line filtration devices and methods which may be incorporated into the injection assemblies herein are further shown and described in, e.g., US Pats. 4,753,634; 6,258,054; 7,588,732; 7,780,649; and  
10 7,794,449, each of which is incorporated herein by reference in its entirety.

[0140] Additionally and/or optionally, any of the injection assemblies described herein may use multiple injection needles or cannulas, e.g., two or more, extending from a single housing to increase the volume and/or number of tracts per pass to increase the injected volume-per-surface ratio. These multiple  
15 cannulas may be arranged in various configurations (e.g., adjacent in a planar arrangement) and may use multiple cannulas as practicable. An example is illustrated in the perspective view of Fig. 28A which shows two cannulas **184**, **184'** projecting from handle **252** adjacent to one another. Fig. 28B shows another example of three cannulas **184**, **184'**, **184''** projecting from handle **252**.

20 Additional cannulas may be incorporated as desired and practicable. In each of the examples, the cannulas may be configured to be retractable within the handle **252** and/or may incorporate a movable piston within each cannula as described herein for facilitate fat injection into the body.

[0141] Another alternative variation is shown in the perspective view of  
25 Fig. 28C which illustrates an injection instrument having a cannula **184** which is interchangeable with a second cannula **184'**.

[0142] Figs. 29A and 29B show perspective views of yet another variation having multiple cannulas where each successive cannula may have a length which is shorter to facilitate injection within a contoured body region such as a breast. In  
30 this manner, a single insertion and injection may be accomplished along curved regions of the breast without piercing through entirely. For example, Fig. 29A shows an instrument assembly having a first cannula **184** with a first length and an adjacent cannula **280** having a second length which is shorter than the first length. Fig. 29B shows another variation incorporating a third cannula **282** which has a

third length which is yet shorter than the second length of the second cannula **280**. Each length may be varied depending upon the desired lengths and/or anatomy of the body portion or breast to be injected. Moreover, each of these variations may incorporate retractable cannulas and/or movable pistons within the cannulas as  
5 described above.

**[0143]** Figs. 30A and 30B show perspective views of yet another variation where the harvesting instrument assembly may incorporate a reconfigurable fiber optic attachment. In this example, the fiber optic assembly positionable through the instrument may have a connection which is attachable to a cable assembly **300**  
10 at a first configuration, e.g., extending from a side of the instrument. The cable assembly **300** may be detached from the instrument and re-coupled into an axial configuration **302**. In this manner, the fiber optic assembly within the instrument may be maintained as a modular system since cable assembly **302** may reconnect to the fiber optic assembly within the instrument.

**[0144]** In yet another variation, Fig. 31 shows a schematic illustration of a complete fat harvesting, processing, and injection system which is coupled to one another in a manner which provides a consistent and relatively low pressure (e.g., a maximum pressure of 700 mmHg) throughout the entire harvesting, processing, and injection procedure. As shown, the fat **308** may be initially harvested via the  
20 instrument **310** described herein. The harvested fat **308** may be drawn via a gentle vacuum **312** and introduced into a pressurized processing reservoir **314**. With the fat collected and processed within the reservoir **314**, a pressure **316** and a vacuum **318** may be simultaneously imparted upon the fat **308** contained within the system such that the net force experienced by the processed fat is low or close to zero.  
25 The low pressure imparted on the fat helps to maintain viability of the tissue.

**[0145]** With the fat drawn through the system, the processed fat may then be pressurized **320** for introduction **322** back into the selected region of the body. Accordingly, the entire procedure for harvesting, processing, and injection may be contained within a common closed system which imparts a relatively low pressure  
30 to maintain tissue viability as well as providing for a complete system which reduces or eliminates several steps. Additionally, the overall system further prevents the exposure of the adipose tissue to ambient air and to the environment to further reduce or minimize any additional trauma to the tissue. Moreover, the system may measure the pressure within the cannula, handle, or any of the other

components during harvesting and/or injection, e.g., via any of the processors or controllers described herein, to ensure that any trauma upon the tissue is minimized. In the event that the monitored pressure exceeds a predetermined level, the processor or controller may be programmed to reduce the pressure, 5 cease activity, or alert the user with a visual and/or audio indicator.

[0146] Further examples of a combined fat harvesting and injection assembly are shown in the assembly view of Fig. 32. In this variation, a single handle 33 may be used with either a harvesting cannula 35 having the one or more openings 37 and/or with a fat injection cannula 334 which may be detachably 10 removable via interface 332 to handle 33. The handle 33 may be fluidly coupled via tube 43 to the harvesting reservoir 45 described above and the process may be controlled and/or monitored via a processor 336 which may control the harvesting rates, pressures, flow rates, etc. as well as the injection parameters such as tissue identification, injection rates, etc.

15 [0147] Additionally and/or alternatively, in this and other variations the detachable injection cannula 334 may be variously configured. For example the injection cannula 334 may be configured to have an integrated plunger within a lumen of the cannula 334 and a retractable cannula which may be translated 20 proximally relative to the handle 33 to deposit a known quantity of fat into the body along a tract formed by the cannula itself. Examples of such a mechanism are described above, e.g., in Figs. 23A to 23C.

[0148] Another example is shown in the assembly view of Fig. 33 which illustrates how the handle 33 with the harvesting cannula 35 may be used to 25 harvest one or more cartridges 47 of fat and tissue from the patient body. This harvested fat may be collected via the reservoir assembly 45 and controlled by the processor 336. Once the fat has been desirably processed, the cartridge 47 may be fluidly connected to the same handle 33 or to a different handle and introduced into the patient body using an injection cannula 334, as described above.

30 [0149] An example of a variation of the handle 33 is illustrated in the assembly view of Fig. 34, which shows handle 33 with cartridge 47 coupled directly into the handle for introducing the fat into the patient body. Figs. 35A and 35B show perspective views of another variation of a handle assembly 340 attached to an injection cannula 334 and further having an angled receiving section 342 for receiving an individual cartridge 47 having processed fat for

injection. The angled section **342** may orient the cartridge **47** at an angle relative to the handle **340** to facilitate the manipulation of the handle **340** as well as to facilitate the introduction and removal of the cartridge **47** from the handle **340**.

5 [0150] Figs. 36A and 36B show perspective views of another variation of the handle assembly **340** illustrating how the handle may be separated into at least two components. A reusable component **350** may contain the pumping mechanism, electronics, controller, etc. and may be detachable coupled to a disposable portion containing the angled section **342** as well as the cartridge **47** and/or cannula **334**.

10 [0151] Figs. 37A and 37B illustrate perspective views of another variation of a handle assembly **360** which may also comprise a reusable component **362** as well as a disposable component **366** having an angled section **364** which may hold the cartridge **47** at a more acute angle relative to the handle **360**.

15 [0152] Fig. 38A schematically illustrates one example of how the individual cartridges **47** may be filled with the harvested fat collected from the harvesting cannula. As previously described, the harvesting assembly may utilize one or more individual cartridges **47** which are fluidly open to receiving the harvested material, as shown. Each of the cartridges **47** may be detachable coupled to a base dock **370** and each cartridge **47** may incorporate a valve **374**  
20 with a plunger **372** which remains in an open position for receiving the harvested material introduced through the base dock **370**.

[0153] The individual cartridges **47** may generally comprise conventional syringes arranged in a consecutive fashion. The system may contain the base dock **370** with several ports that allow each of the cartridges **47** connected to fill  
25 with the fat. As the individual cartridges fill, they may each close their respective plunger **372** to shut off the valve **374**.

[0154] Fat may be transported into the cartridges **47** through the use of a vacuum that is hooked into the base dock **370**. The ports may be placed in series allowing the fill of each consecutive syringe before moving on to the next.  
30 Configuration of the cartridges **47** can be placed in line or in a circular fashion, so long as it is in series, as shown in the perspective assembly view of Fig. 39. When the harvesting procedure is finished, cartridges **47** may have its respective fat fill. The user can then remove the fat filled cartridges **47** and purge the air, as shown in Fig. 38B.

[0155] Each cartridge 47 may integrate its own plunger 372 throughout the life the device. The plunger 372 may allow for fat fill when the cartridge 47 is engaged into the port adapter of the base dock 370. The fat may flow through the plunger 372 and around the valve 374, as shown in the cross-sectional side view  
5 of Fig. 40. Another variation is shown in the cross-sectional and perspective views of Figs. 41A and 41B which illustrate a plunger 372 defining one or more openings therethrough which may provide adequate space with a cross sectional area between, e.g., 0.15 to 0.20 in<sup>2</sup> for the fat to flow through, while maintaining the integrity as a plunger.

10 [0156] The plunger 372 may also be used as a vacuum plunger when the device is placed into the injection device. As the injection device draws the fat, the plunger 372 may move according to the vacuum rate, as shown in the side view of Fig. 42. The plunger 372 may incorporate O-rings 380 that allow a dynamic seal, the ability to move while sealing against the mating surface. With  
15 the vacuum pull of the injection device operating less than 20 inHg, the plunger is able to move with less than 2.0 LbF of pull.

[0157] The plunger 372 may further contain a piston valve 382 that is mechanically opened and automatically closed, as shown in the cross-sectional side views of Figs. 43A and 43B. The sealing valve size may be tuned to allow  
20 fat flow when opened during the harvesting procedure but also prevent air and liquid leakage when closed during the injection procedure. The valve 382 outer diameter may be greater than, e.g., 0.626 in, to provide a seal. The valve 382 may be less than, e.g., 0.875 in, to allow flow around it. The distance to which the valve 382 is moved away from the plunger 372 when opened is also tuned to  
25 allow for easy fat fill. A distance of at least, e.g., 0.125 in, from gasket to plunger 372 to allow fat to flow through. The valve 382 may also include a soft gasket that may seal against the opening plunger 372.

[0158] The plunger 372 may be activated when the cartridge 47 is engaged into the port adapters 384 which may be integrated into the base dock 370 for  
30 coupling to the cartridges 47. The design concept incorporates the use of a spring that may close the valve 382 in a rest state. When actuated, the spring may compress, opening the valve 372 for fill, as shown in the cross-sectional side view of Fig. 44. When released, the force of the spring may provide at least, e.g., 2.0

LbF, to overcome the vacuum draw in the injection device. Force of the vacuum draw to move the plunger 372 may be less than the force required to hold an air tight seal on the valve or leakage may occur.

[0159] A key 390 may be incorporated into the design to hold the plunger  
5 372 in place while the cartridge 47 is engaged on to the adapter, as shown in the perspective view of Fig. 45. After fill, the key 390 may be removed and discarded to allow the plunger 372 to move.

[0160] A perspective view of a port adapter 384 is shown in Fig. 46. The  
10 variation illustrated may incorporate flanges 392 to hold the cartridge 47 against the base of the port 370 due to counter forces from the spring, which may push the cartridge 47 off the adapter 384. A static O-ring 394 may be incorporated to provide a vacuum seal during fat fill. The bar may push the valve open when engaged.

[0161] An example of a reversible pump assembly 400 which may be  
15 integrated into any of the handle variations described herein is shown in the side and schematic side views of Figs. 47A and 47B. The pump assembly 400 shown may be integrated into any of the handle assemblies for use with the detachable harvesting and/or injection cannula to provide for continuous and uninterrupted withdrawal of tissue from the body for harvesting or for continuous infusion of  
20 tissue for injection, as described above. In either harvesting or injection, the vacuum pressure or injection pressure may be generated directly within the handle by the pump assembly 400 rather than relying upon a pumping mechanism separated from the handle.

[0162] Moreover, because the pump assembly 400 both aspirates and  
25 dispenses the tissue simultaneously, the pump 400 makes it possible to continually deliver the tissue with no wait time and shortens the overall procedure time.

[0163] The pump assembly 400 is shown as generally comprising a motor  
assembly 404 coupled to the pump 402. A detachable reservoir 406, e.g.,  
cartridge 47, may be removably coupled via connection 408 to the pump 402. The  
30 pump 402 may further define an opening 410 through which tissue may be harvested from the body and into the pump 402 or injected from the pump 402 and into the body.

[0164] As illustrated in detail schematic of Fig. 47B, the motor assembly  
404 may have a motor 412, e.g., stepper motor, with an optional time relay or

controller **414**. The motor **412** may be rotatably attached, e.g., to a rotatable lead screw **418**, via a sealed motor coupling **416** where the lead screw **418** is contained within a common chamber. A plunger **420** translatably positioned upon the lead screw **418** may separate the common chamber into a first chamber **422A** and  
5 second chamber **422B** which may both be variably sized depending upon the relative position of the plunger **420** relative to the motor **412**. When the lead screw **418** is rotated in a first direction, the plunger **420** may be forced to translate in a first direction within the chamber and when the lead screw **418** is rotated in a second opposite direction, the plunger **420** may accordingly translate in a second  
10 direction within the chamber opposite to the first direction.

[0165] In the case of tissue injection into the body, the detachable reservoir **406** having a volume of harvested tissue for injection may be removably coupled to a fluid channel **424**. Fluid channel **424** may be fluidly coupled to the second chamber **422B** via opening **426** and to fluid channel **434** which is in  
15 communication with opening **410**. A valve **428**, e.g., one-way valve, located along fluid channel **424** may allow for the uni-directional flow of tissue into second chamber **422B** and a valve **432**, e.g., one-way valve, located along fluid channel **430** coupling the reservoir **406** to fluid channel **434** may similarly allow for the uni-directional flow of tissue into and through fluid channel **434**. A valve  
20 **436**, e.g., one-way valve, positioned along fluid channel **434** may allow for the uni-direction flow of tissue from the first chamber **422A** into and through fluid channel **434** and out of cannula **442**. A fluid channel **438** fluidly connecting second chamber **422B** to fluid channel **434** may also have a valve **440**, e.g., one-way valve, which allows for the uni-directional flow of tissue from second  
25 chamber **422B** into and through fluid channel **434**.

[0166] In use, when the reservoir **406** is initially attached to the fluid channel **424**, motor **412** may be actuated to urge the plunger **420** in a first direction, e.g., distally relative to the motor **412**. As the plunger **420** moves along the first direction, a vacuum pressure generated within second chamber **422B** may  
30 draw the tissue from reservoir **406** through channel **424** and through valve **428** and into second chamber **422B**. Once the plunger **420** has been moved to a distal position along the lead screw **418**, the motor **412** may be reversed to turn the lead screw **418** in a second opposite direction to force the plunger **420** to move in a second opposite direction proximally towards the motor **412**. The reversed

motion of the plunger **420** may generate a vacuum pressure within first chamber **422A** to then draw the tissue from reservoir **406** through channel **430** and valve **432** and into first chamber **422A**. As the tissue is drawn into first chamber **422A**, the volume of tissue contained within second chamber **422B** may be forced into  
5 channel **438** and through valve **440** and into channel **434** and out of the cannula **442** for injection into the body. The one-way valve **428** may close to prevent the reintroduction of tissue from second chamber **422B** back into reservoir **406** and one-way valve **436** may likewise close to prevent the tissue passed through channel **438** from being drawn back into first chamber **422A**.

10 [0167] As the plunger **420** reaches the end of its stroke, its direction may again be reversed to then urge the drawn volume of tissue within first chamber **422A** through valve **436** and through cannula **442** and into the body while valve **432** and **440** may close to prevent the reintroduction of the tissue back into the reservoir **406**. This process may be repeated in a continuous manner such that the  
15 tissue from reservoir **406** may be injected into the body in a continuous and uninterrupted flow regardless of which direction the plunger **420** is moved.

Alternatively, the valves may be reversed in direction to provide for harvesting of the tissue from the body through cannula **442** (harvesting cannula) and into pump **402** for collection in reservoir **406** also in a continuous and uninterrupted manner.

20 [0168] Fig. 48 shows a side view of another variation of the continuous pump assembly **450**. As shown, the first and second chambers **422A**, **422B** may be seen separated by the translatable plunger **420**. In this example, the reservoir is detached and may be coupled via a separate channel, as shown.

[0169] To ensure a predictable amount of material is dispensed with each  
25 stroke, the total travel of the plunger **420** may be sensed. One method is to use feedback from an encoder or controller, e.g., controller **414**, attached to the drive motor **412**. Another method to assess the position of piston **420** is to monitor the current required to drive the piston **420**.

[0170] As shown in the exemplary graph of Fig. 49, the motor current may  
30 be graphed against a travel distance of the piston **420** within the chambers. As the piston travels between a proximal and distal end-of-travel (EOT) within the chamber, the current to the motor **412** changes with piston position. The signal moves up and down with changes in the power required to move the piston **420**. For example, the current signal may increase when a large sample moves through

the system and may drop when a more fluid sample moves through the system.

However, when the piston **420** reaches the EOT, the piston **420** stops moving and the motor **412** draws more current to try and overcome the stalled piston **420**. An internal electrical circuit may detect when that current exceeds a threshold current  
5 **466** indicating that the piston **420** has reached EOT and reverse the direction of the motor **412**. The process repeats when the current threshold **466** is exceeded when the piston **420** reaches EOT at the opposite end of the chamber.

**[0171]** Further examples and variations of the harvesting instrument as well as processing and guidance and also injection devices and methods are  
10 further described in the following description and figures, which is incorporated herein in its entirety.

**[0172]** The applications of the disclosed invention discussed above are not limited to certain treatments or regions of the body, but may include any number of other treatments and areas of the body. Modification of the above-described  
15 methods and devices for carrying out the invention, and variations of aspects of the invention that are obvious to those of skill in the arts are intended to be within the scope of this disclosure. Moreover, various combinations of aspects between examples are also contemplated and are considered to be within the scope of this disclosure as well.

20

## CLAIMS

What is claimed is:

1. A tissue transfer system, comprising:

a handle having an actuation mechanism;

5 at least one reservoir removably attachable to a harvesting reservoir assembly, wherein the handle is in fluid communication with the at least one reservoir through the reservoir assembly;

a tissue harvesting cannula defining at least one opening near or at a distal end of the harvesting cannula, wherein a proximal end of the harvesting  
10 cannula is removably attachable to the handle such that the harvesting cannula is in fluid communication with the reservoir assembly and is couplable to the actuation mechanism; and,

a tissue injection cannula defining at least one opening near or at a distal end of the injection cannula, wherein a proximal end of the injection  
15 cannula is removably attachable to the handle and is couplable to the actuation mechanism, and

wherein the at least one reservoir is further removably attachable to the proximal end of the injection cannula such that the at least one reservoir and injection cannula are in fluid communication.

20

2. The system of claim 1 wherein the actuation mechanism comprises a pumping mechanism.

3. The system of claim 2 wherein the pumping mechanism is a  
25 reversible pump configured to provide a continuous pressure with the handle.

4. The system of claim 1 wherein the at least one reservoir comprises

a cartridge having a one-way valve.

5           5. The system of claim 1 wherein the harvesting reservoir assembly comprises a plurality of removably attachable reservoirs in fluid communication with the harvesting reservoir assembly.

6. The system of claim 1 wherein the harvesting cannula further comprises a rotatable cutting member within the at least one opening.

10           7. The system of claim 1 wherein the injection cannula is extendable from the housing and longitudinally slidable relative to the housing.

15           8. The system of claim 7 further comprising a piston positioned within a lumen defined through the injection cannula such that the piston remains in a static position relative to the housing.

20           9. The system of claim 8 further comprising an actuation mechanism coupled to the injection cannula for actuating the injection cannula in a longitudinal direction, where the piston remains in a static position when the cannula is retracted proximally by the actuation mechanism.

10. The system of claim 1 wherein the actuation mechanism comprises a lead screw and a plunger threadingly coupled to the lead screw.

25           11. The system of claim 1 further comprising a tissue detection sensor positioned through or along the injection cannula and configured to

distinguish a tissue type.

12. The system of claim 11 wherein the tissue detection sensor  
comprises one or more optical fibers positioned near or at a distal end of the  
5 injection cannula.

13. The system of claim 11 further comprising a photo detector in  
optical communication with the one or more optical fibers.

10 14. The system of claim 13 further comprising a processor in  
electrical communication with the photo detector, where the processor is  
programmed to distinguish tissue types.

15 15. A method of remodeling a portion of a subject's body,  
comprising:

introducing a distal end of a tissue harvesting cannula percutaneously  
through a first opening into a first region of the body, wherein the harvesting  
cannula defines at least one opening near or at the distal end of the harvesting  
cannula and further has a proximal end of the harvesting cannula removably  
20 attached to a handle having an actuation mechanism;

removing adipose tissue via the actuation mechanism from the first  
region of the body through the harvesting cannula and into at least one  
reservoir removably attachable to a harvesting reservoir assembly which is in  
fluid communication with the handle;

25 replacing the harvesting cannula from the handle with a tissue  
injection cannula such that a proximal end of injection cannula is removably  
attached to the handle, the injection cannula defining at least one opening near  
or at a distal end of the injection cannula;

transferring the at least one reservoir from the harvesting reservoir assembly, the at least one reservoir having a volume of adipose tissue contained within, to removable attachment with the injection cannula;

5 introducing the distal end of the injection cannula through a second opening into a second region of the body; and

injecting the volume of adipose tissue from the at least one reservoir and into the second region of the body.

10 16. The method of claim 15 wherein the method of remodeling is performed without exposing the adipose tissue to ambient air.

17. The method of claim 15 wherein the method of remodeling is performed while maintaining pressure of less than 700 mmHg.

15 18. The method of claim 15 wherein removing adipose tissue further comprises removing excess fluid from the at least one reservoir.

20 19. The method of claim 15 wherein introducing the distal end of the injection cannula comprises percutaneously inserting the injection cannula into a breast.

20. The method of claim 15 wherein introducing the distal end of the injection cannula comprises introducing the distal end into a face.

25 21. The method of claim 15 wherein injecting the volume comprises urging the volume into the second region of the body via the actuation

mechanism.

22. The method of claim 21 wherein the urging the volume comprises pumping the volume in a continuous and uninterrupted manner.

5

23. The method of claim 15 further comprising detecting a type of tissue within the second region of the body prior to injecting the volume of adipose tissue.

10 24. The method of claim 23 wherein detecting comprises detecting the type of tissue via a diffuse reflectance parameter of the tissue.

25. The method of claim 15 wherein injecting the volume further comprises:

15 maintaining a static position of a piston within or near a proximal end of a lumen defined by the injection cannula; and,

retracting the injection cannula relative to the body while maintain the static position of the piston such that a quantity of adipose tissue held within the lumen is deposited into the second region along a tract formed by the  
20 injection cannula.

26. The method of claim 25 wherein retracting the injection cannula comprises automatically retracting the injection cannula upon detection of a presence of adipose within the second region.

25

27. The method of claim 15 further comprising repositioning an angle

of the injection cannula through the second opening within the second region of the body.

28. A tissue injection system, comprising:

5 a handle having an actuation mechanism;

an injection cannula removably attachable to the handle and having a tissue detection sensor positioned through or along the injection cannula and configured to distinguish a tissue type;

10 a reservoir fluidly coupled to a proximal end of the injection cannula;  
and

a controller in electrical communication with the tissue detection sensor.

15 29. The system of claim 28 wherein the reservoir is removably attachable to a harvesting reservoir assembly and where the handle is in fluid communication with the reservoir through the reservoir assembly.

20 30. The system of claim 29 further comprising a tissue harvesting cannula defining at least one opening near or at a distal end of the harvesting cannula, wherein a proximal end of the harvesting cannula is removably attachable to the handle such that the harvesting cannula is in fluid communication with the reservoir assembly and is couplable to the actuation mechanism.

25 31. The system of claim 30 wherein the harvesting cannula further comprises a rotatable cutting member within the at least one opening.

32. The system of claim 29 wherein the reservoir is further removably attachable to the proximal end of the injection cannula such that the at least one reservoir and injection cannula are in fluid communication.

5           33. The system of claim 28 wherein the actuation mechanism comprises a pumping mechanism.

34. The system of claim 33 wherein the pumping mechanism is a reversible pump configured to provide a continuous pressure with the handle.

10

35. The system of claim 28 wherein the reservoir comprises a cartridge having a one-way valve.

15           36. The system of claim 28 wherein the injection cannula is extendable from the housing and longitudinally slidable relative to the housing.

20           37. The system of claim 36 further comprising a piston positioned within a lumen defined through the injection cannula such that the piston remains in a static position relative to the housing.

25           38. The system of claim 37 further comprising an actuation mechanism coupled to the injection cannula for actuating the injection cannula in a longitudinal direction, where the piston remains in a static position when the cannula is retracted proximally by the actuation mechanism.

39. The system of claim 28 wherein the actuation mechanism comprises a lead screw and a plunger threadingly coupled to the lead screw.

5 40. The system of claim 28 wherein the tissue detection sensor comprises one or more optical fibers positioned near or at a distal end of the injection cannula.

41. The system of claim 40 further comprising a photo detector in optical communication with the one or more optical fibers.

10

42. The system of claim 41 further comprising a processor in electrical communication with the photo detector, where the processor is programmed to distinguish tissue types.

15 43. A method of remodeling a portion of a subject's body, comprising:

introducing a distal end of an injection cannula, which is detachably coupled to a handle having an actuation mechanism, percutaneously through an opening into a region of the body;

20 positioning the distal end within the body based upon a type of tissue detected by the injection cannula;

confirming a location of the distal end of the injection cannula within the region of the body; and

25 injecting a volume of adipose tissue held within a reservoir into the body.

44. The method of claim 43 wherein prior to introducing a distal end of an injection cannula, further comprising:

5 introducing a distal end of a tissue harvesting cannula percutaneously through a first opening into a first region of the body, wherein the harvesting cannula defines at least one opening near or at the distal end of the harvesting cannula and further has a proximal end of the harvesting cannula removably attached to a handle having an actuation mechanism;

10 removing adipose tissue via the actuation mechanism from the first region of the body through the harvesting cannula and into at least one reservoir removably attachable to a harvesting reservoir assembly which is in fluid communication with the handle; and,

15 replacing the harvesting cannula from the handle with a tissue injection cannula such that a proximal end of injection cannula is removably attached to the handle, the injection cannula defining at least one opening near or at a distal end of the injection cannula.

45. The method of claim 43 wherein the method of remodeling is performed without exposing the adipose tissue to ambient air.

20 46. The method of claim 43 wherein the method of remodeling is performed while maintaining pressure of less than 700 mmHg.

25 47. The method of claim 43 wherein introducing a distal end of the injection cannula comprises percutaneously inserting the injection cannula into a breast.

48. The method of claim 43 wherein introducing a distal end of the injection cannula comprises introducing the distal end into a face.

49. The method of claim 43 wherein injecting a volume comprises urging the volume into the body via the actuation mechanism.

5           50. The method of claim 49 wherein the urging the volume comprises pumping the volume in a continuous and uninterrupted manner.

51. The method of claim 43 wherein positioning comprises detecting the type of tissue via a diffuse reflectance parameter of the tissue.

10

52. The method of claim 43 further comprising repositioning an angle of the injection cannula through a second opening within a second region of the body.

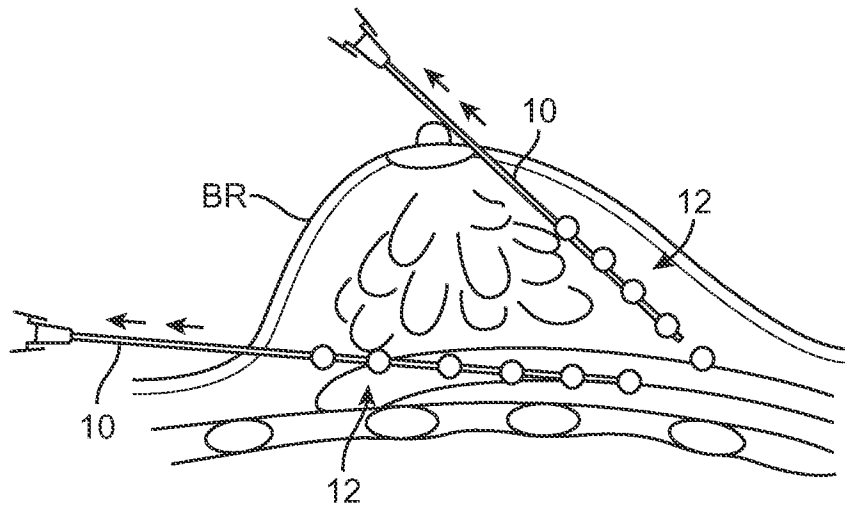


FIG. 1A

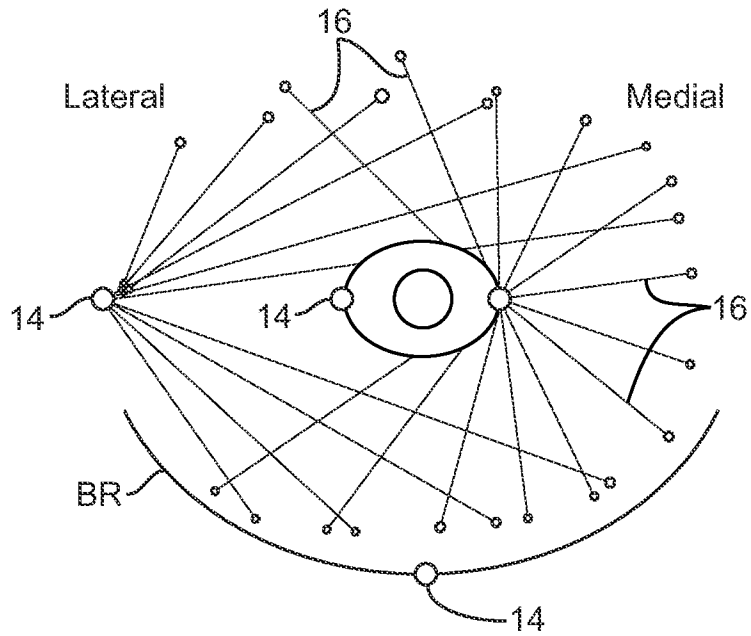


FIG. 1B

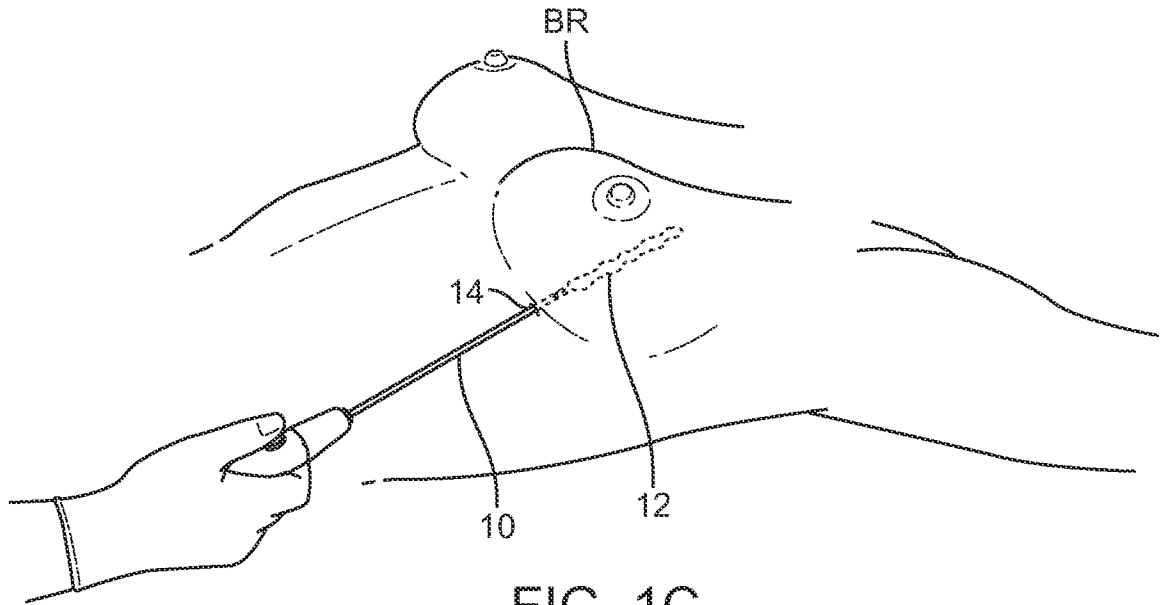


FIG. 1C

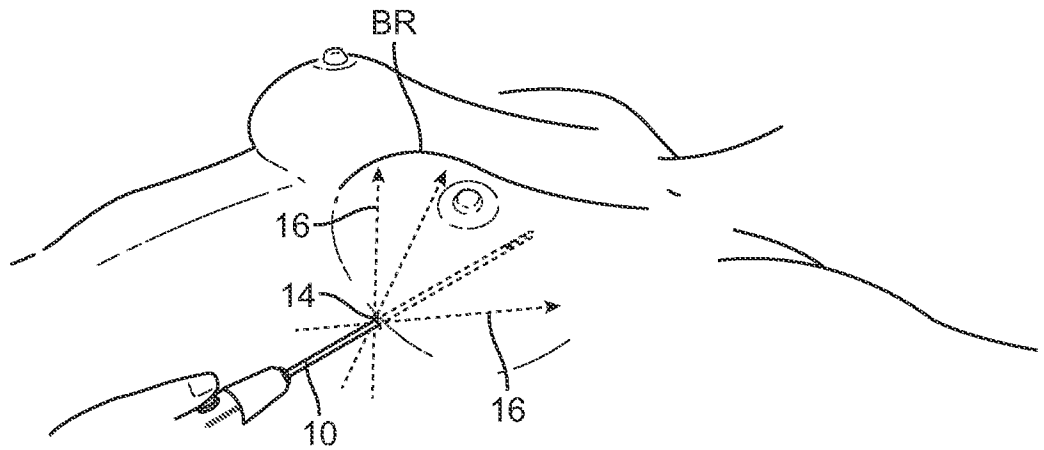


FIG. 1D



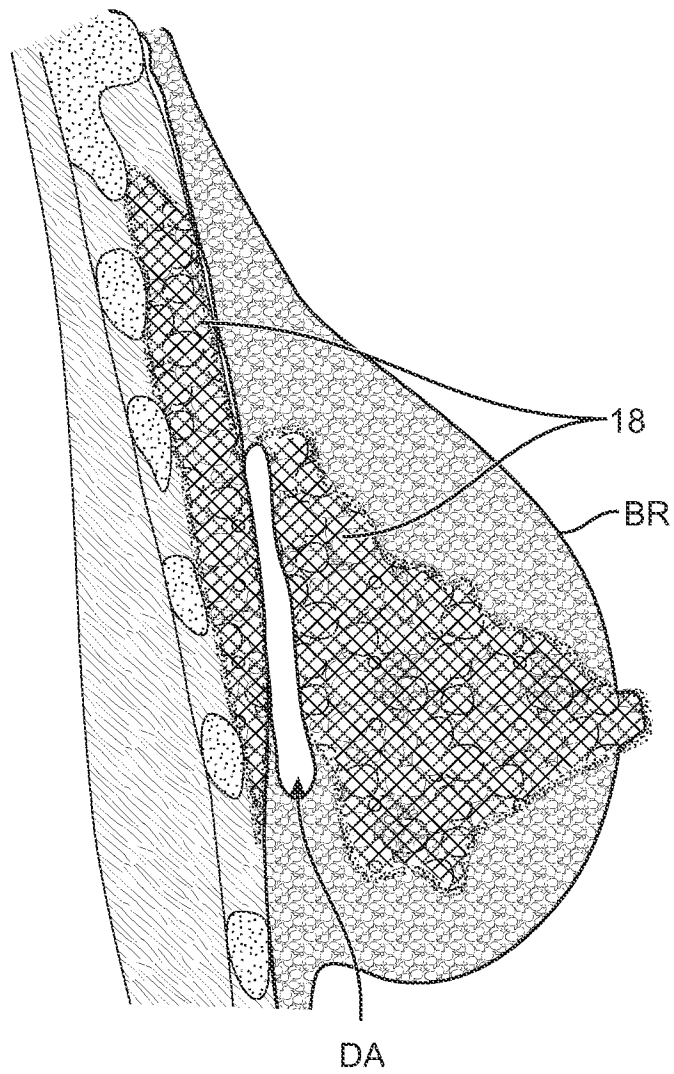


FIG. 1E



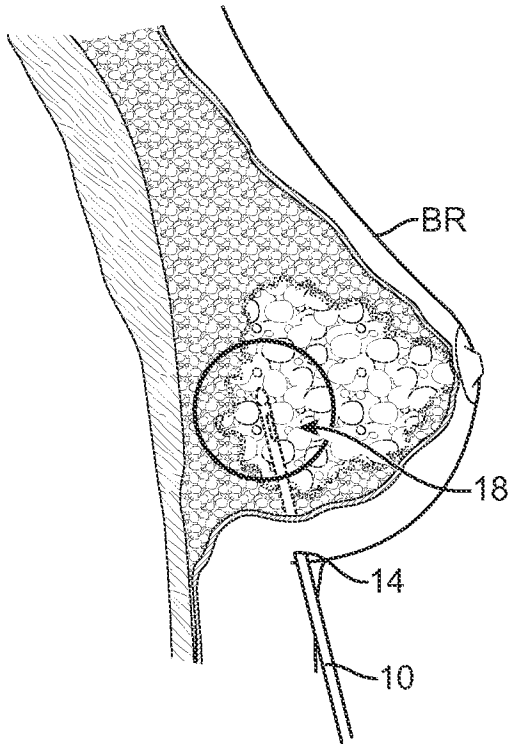


FIG. 1F

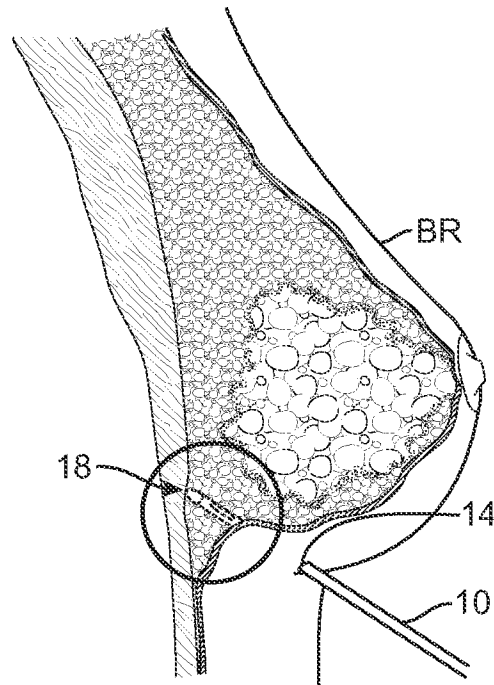


FIG. 1G

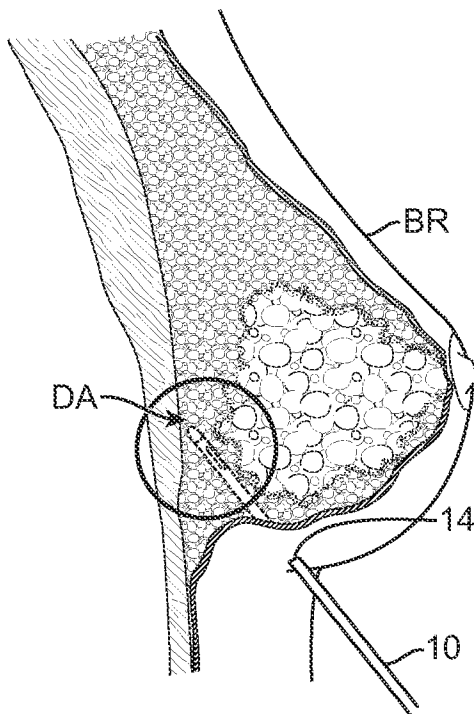


FIG. 1H

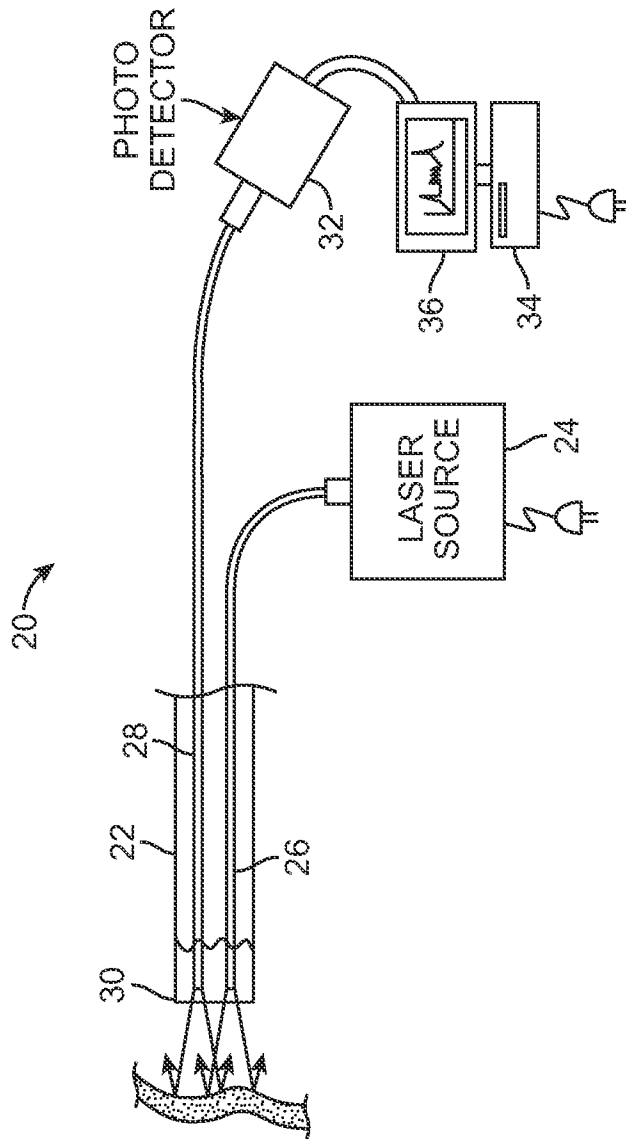


FIG. 2A

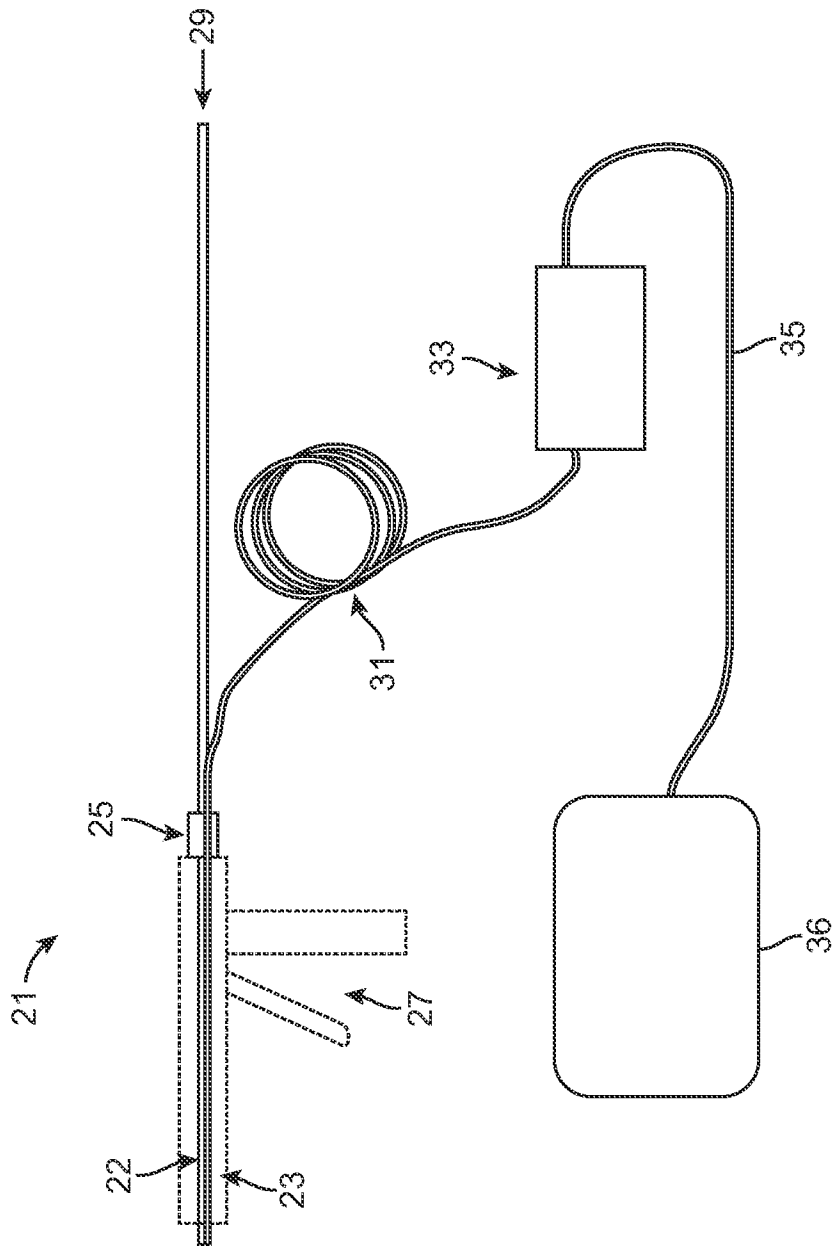


FIG. 2B

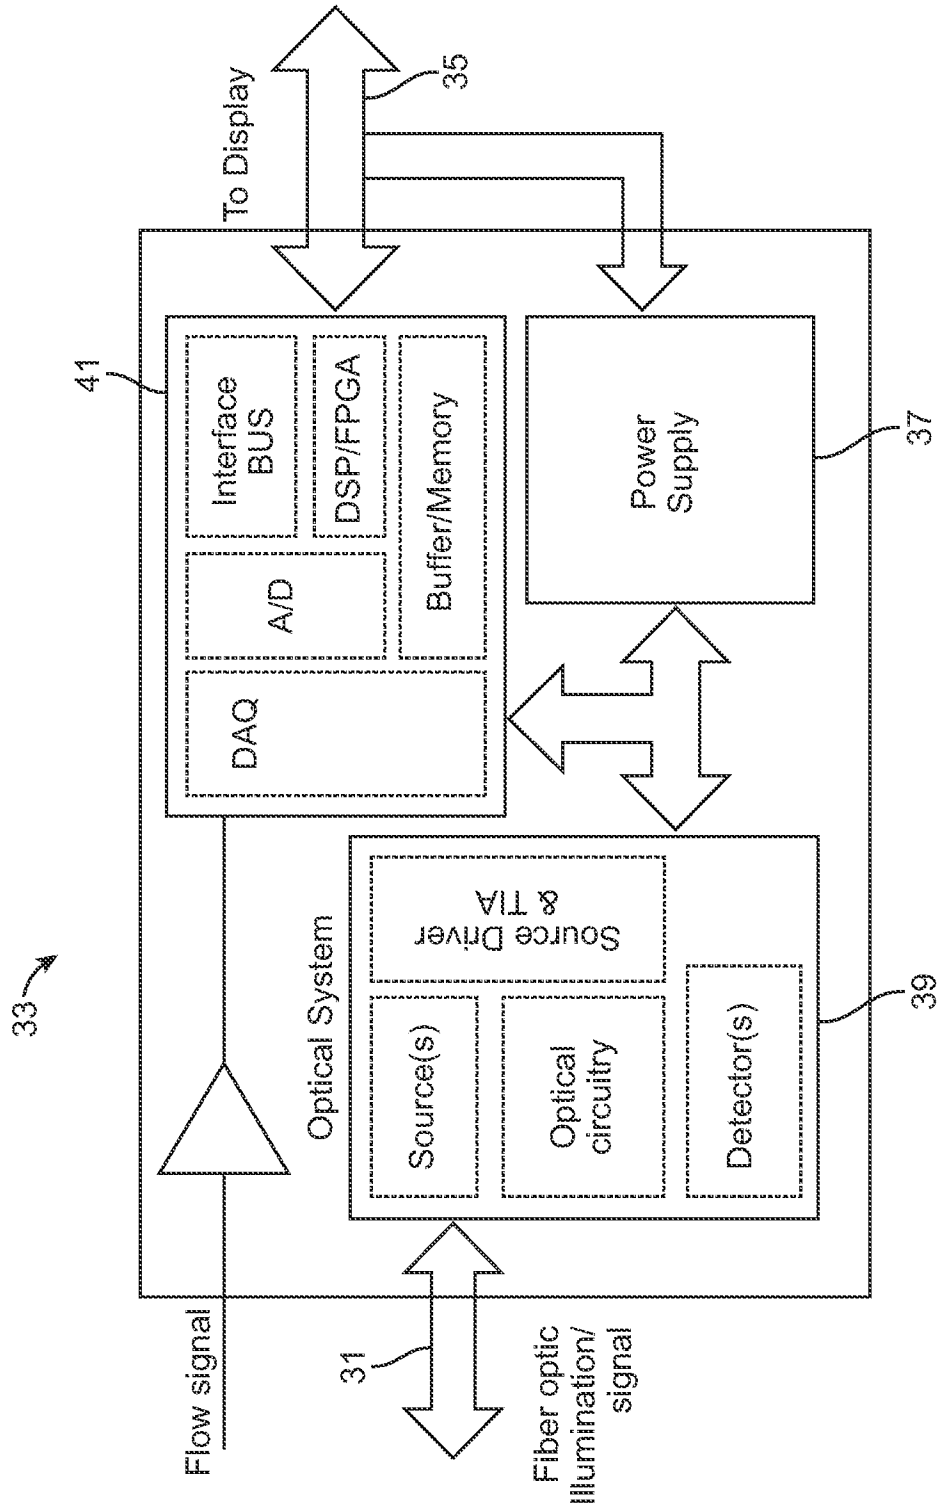


FIG. 2C

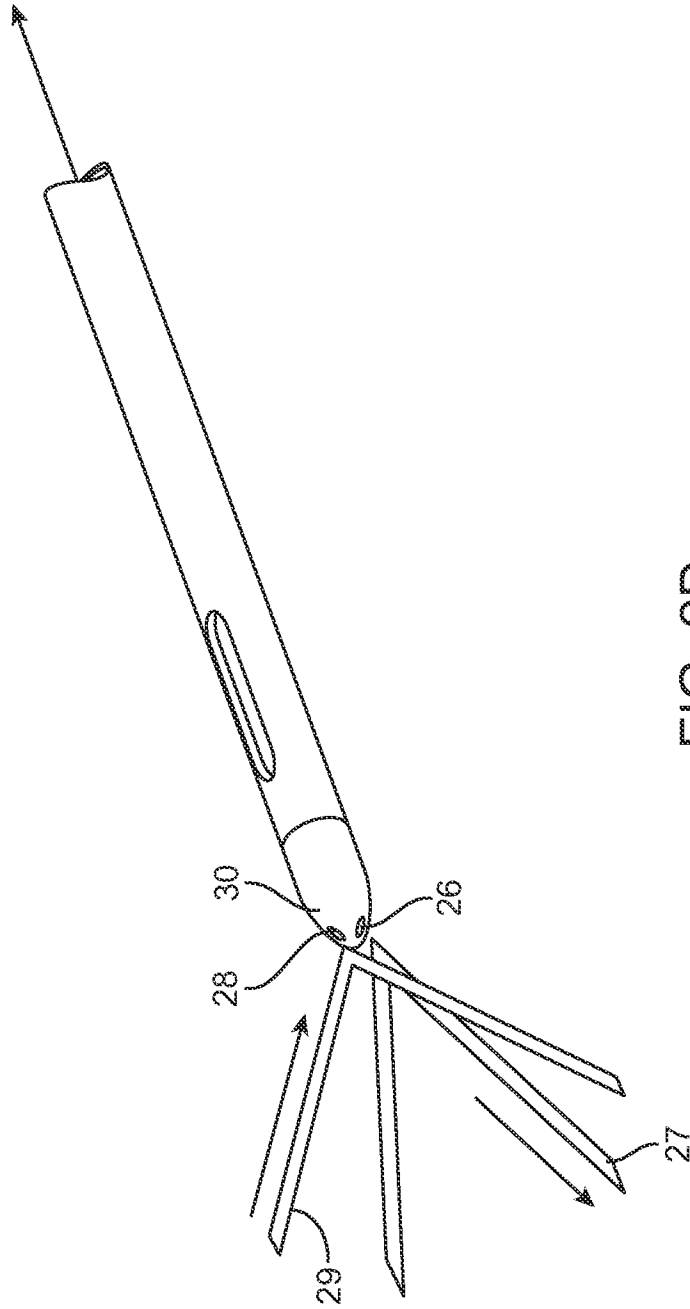


FIG. 2D

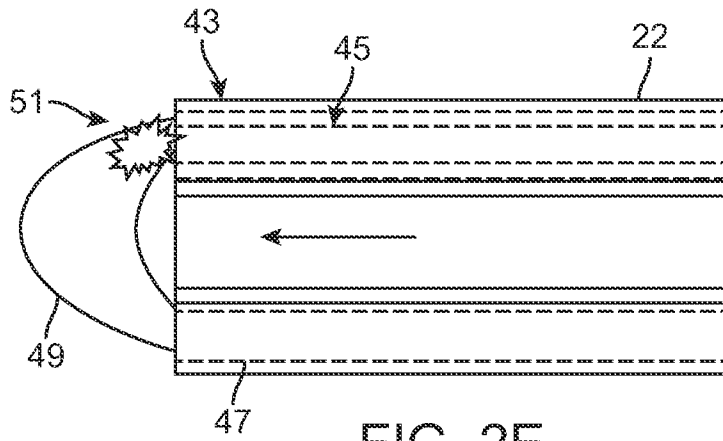


FIG. 2E

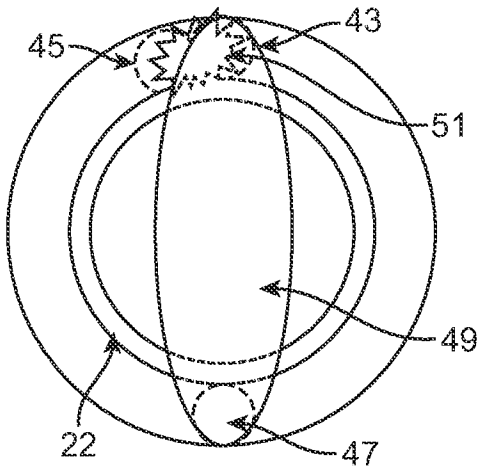


FIG. 2F

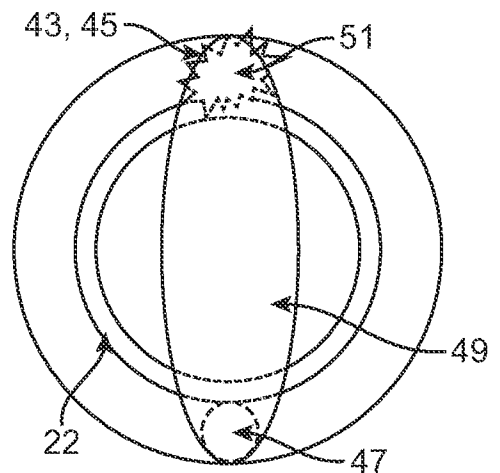


FIG. 2G

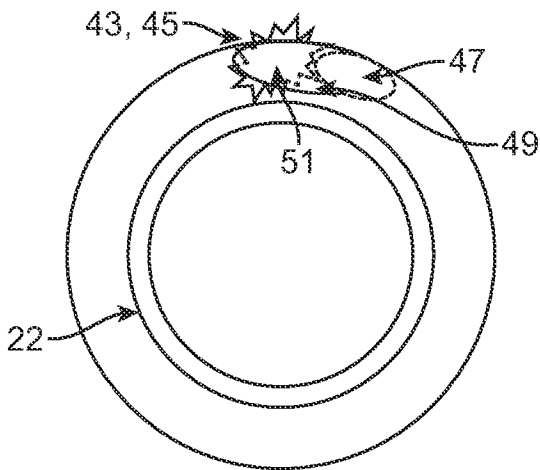


FIG. 2H

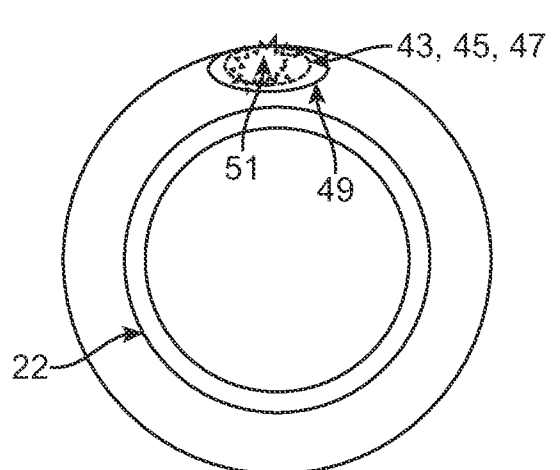


FIG. 2I

10/53

+

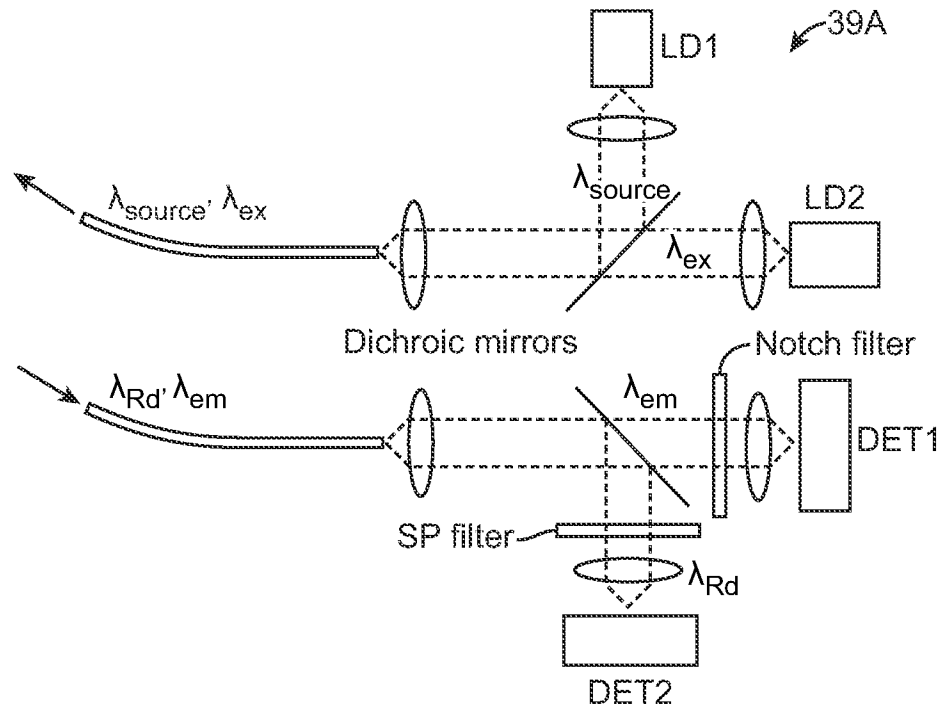


FIG. 2J

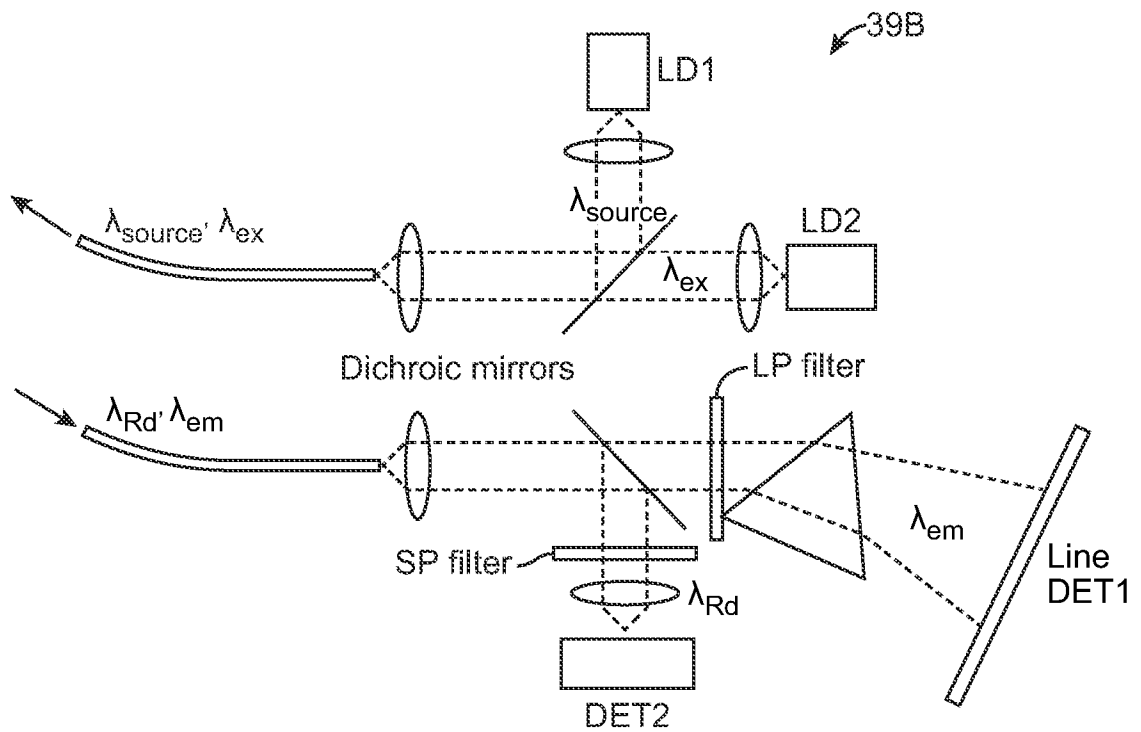


FIG. 2K

+

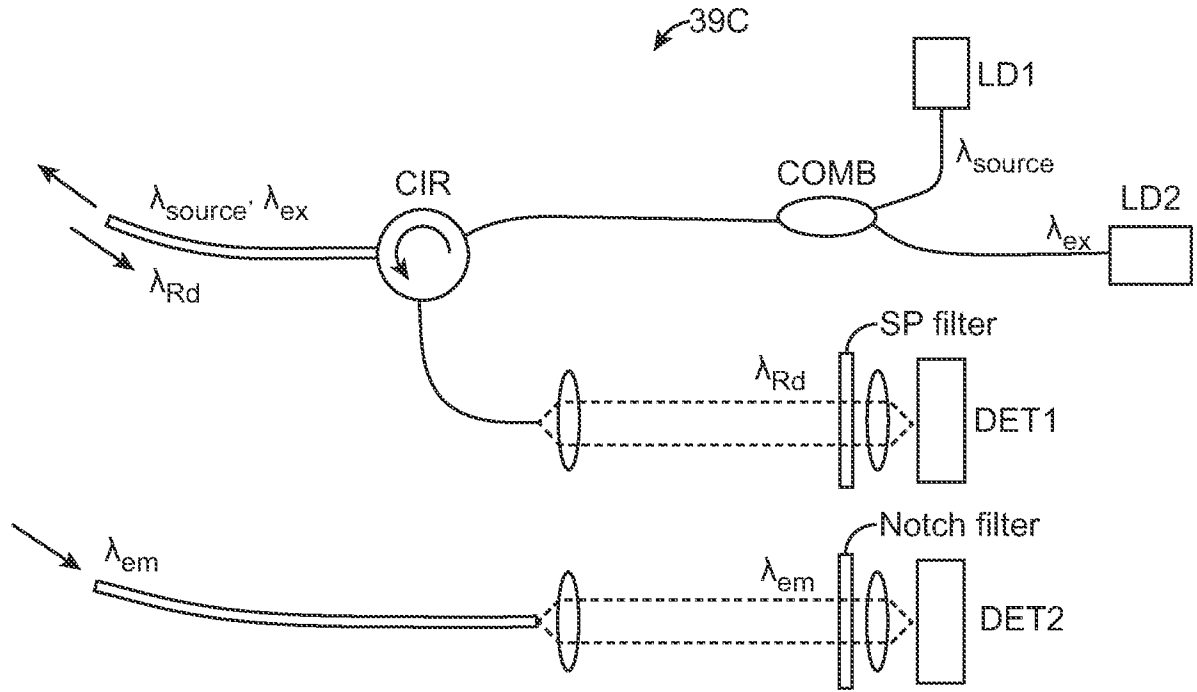


FIG. 2L

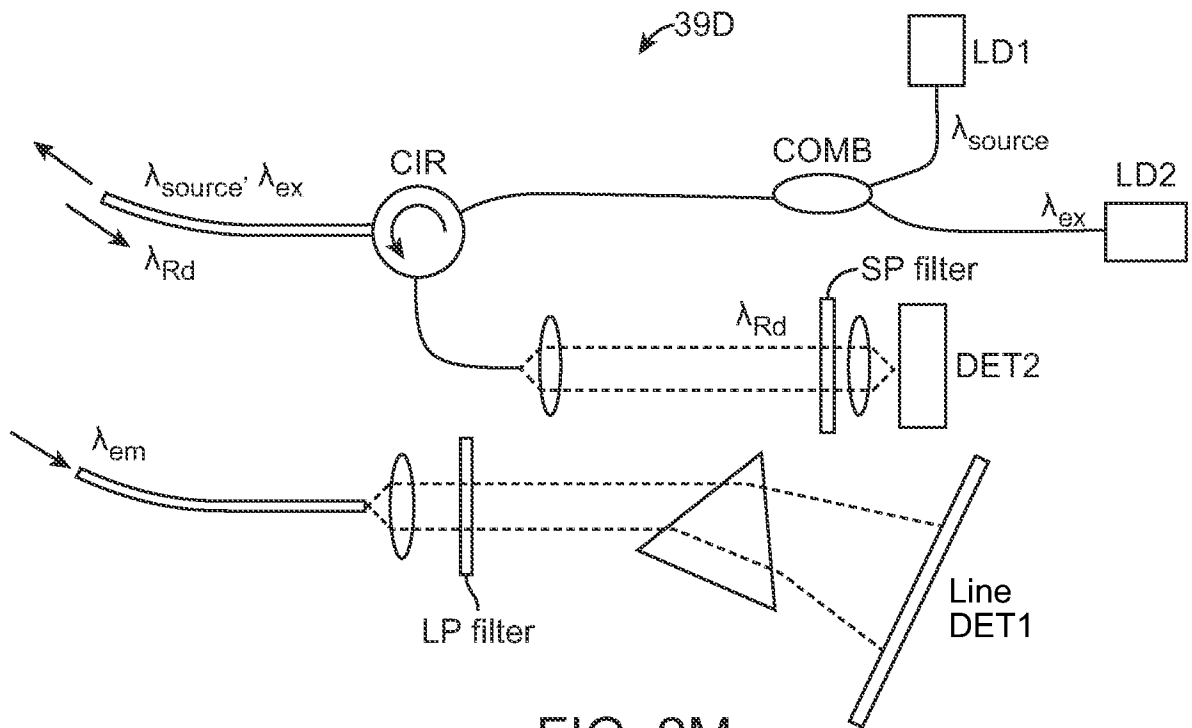


FIG. 2M

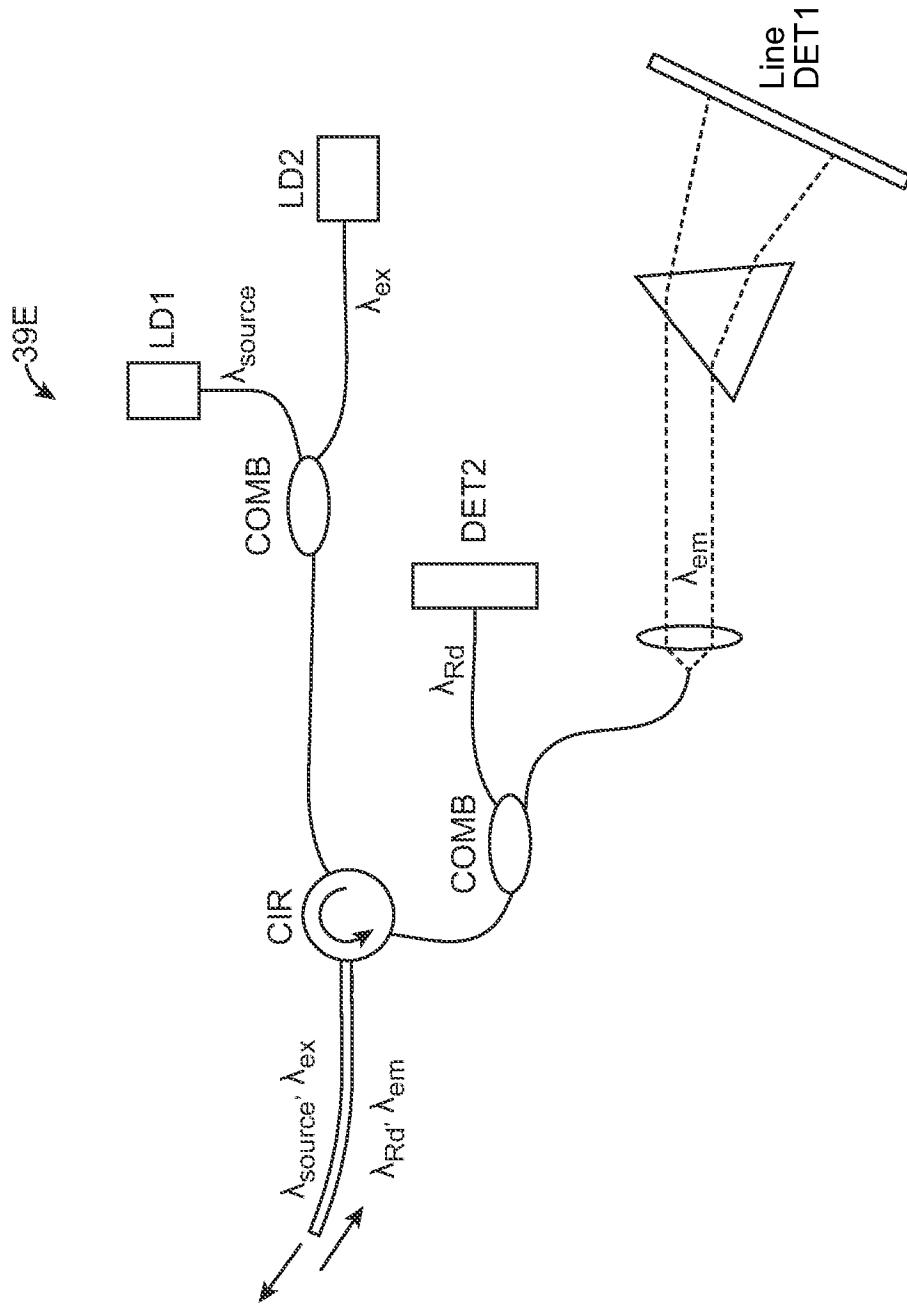


FIG. 2N

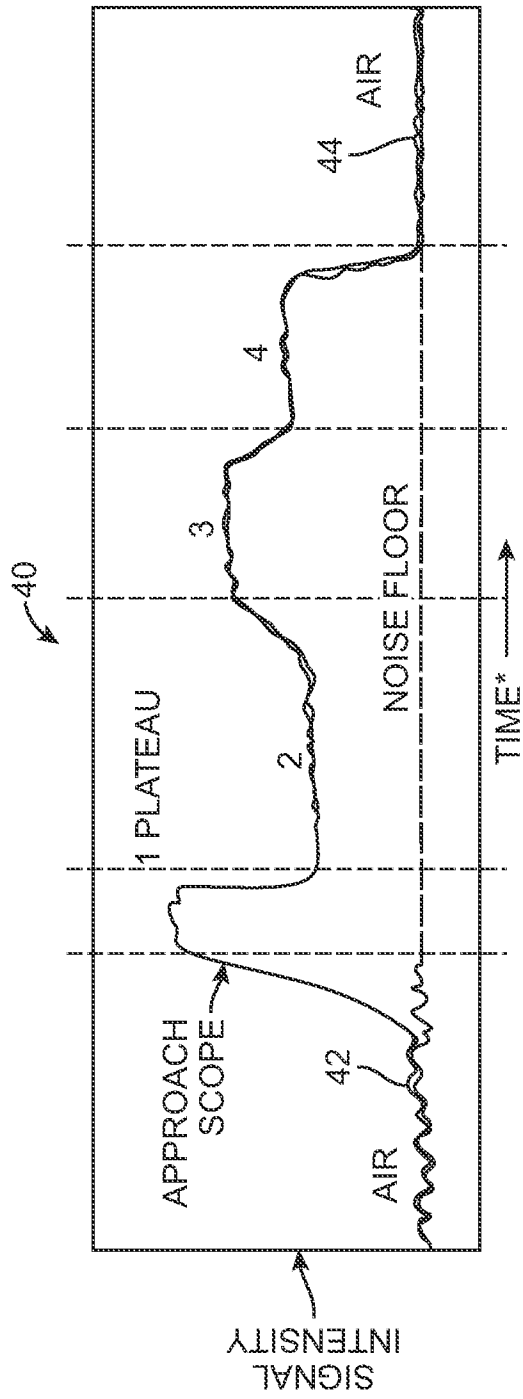


FIG. 3A

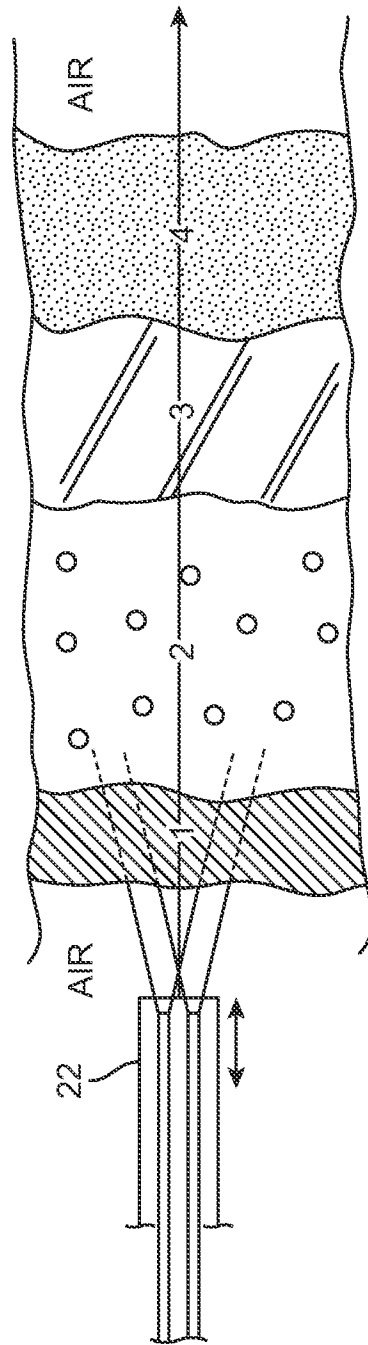


FIG. 3B

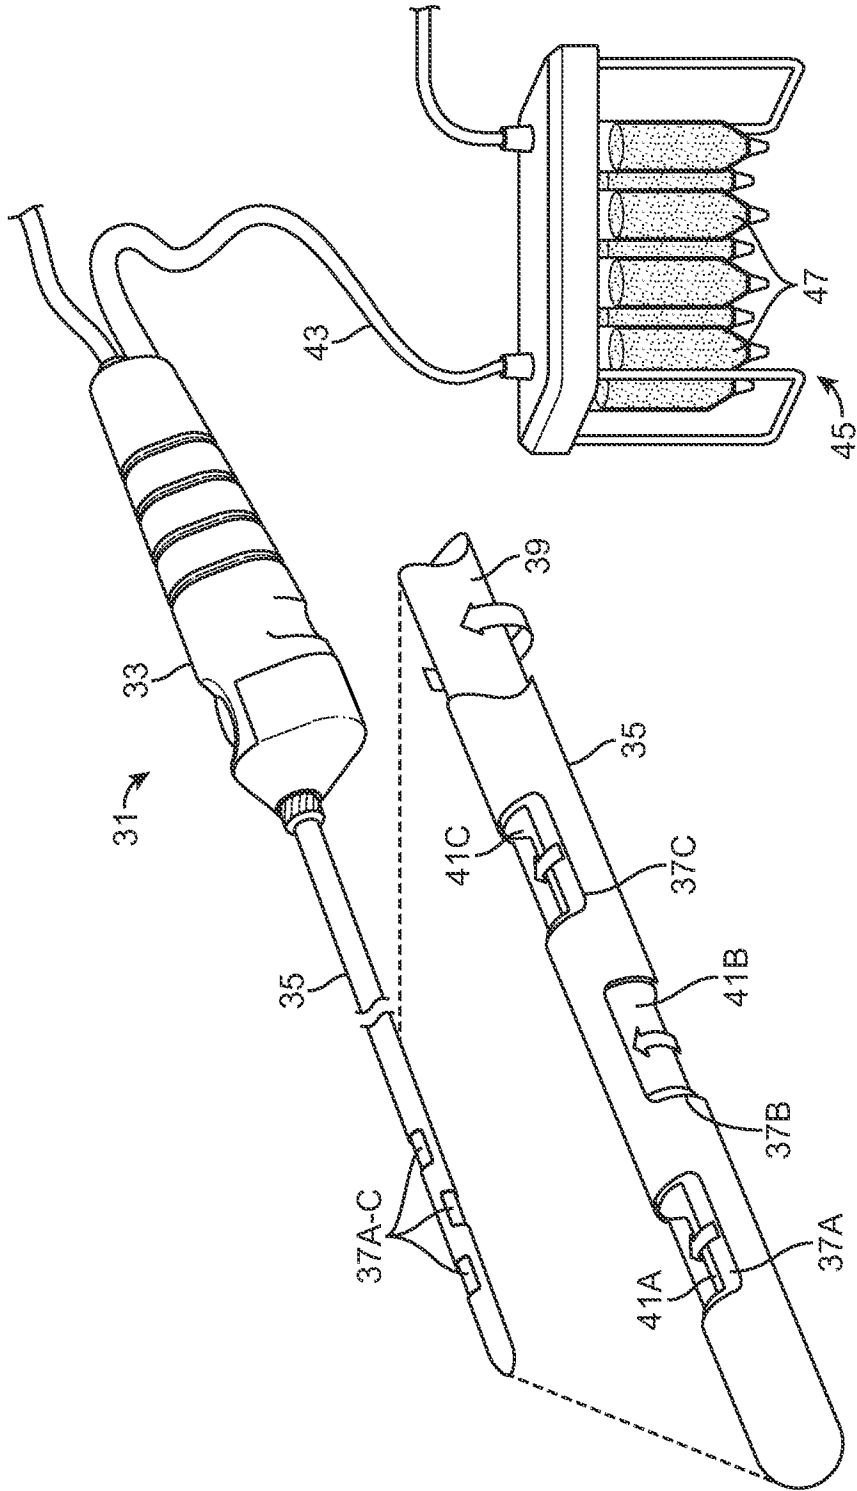


FIG. 4A

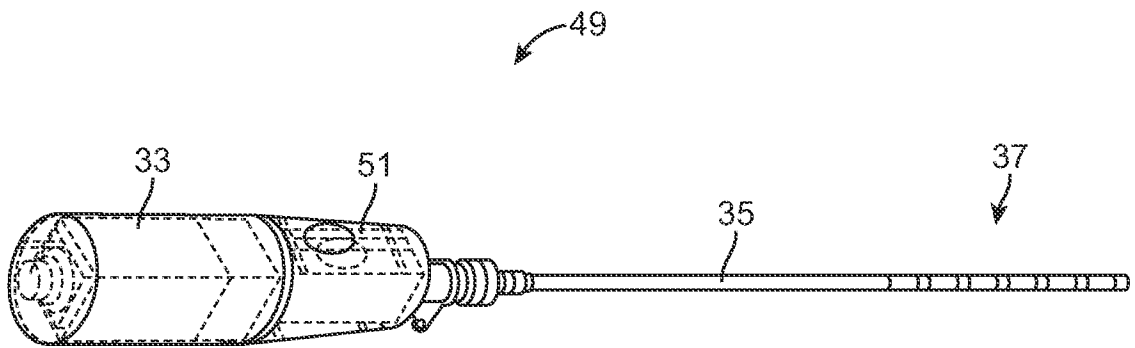


FIG. 4B

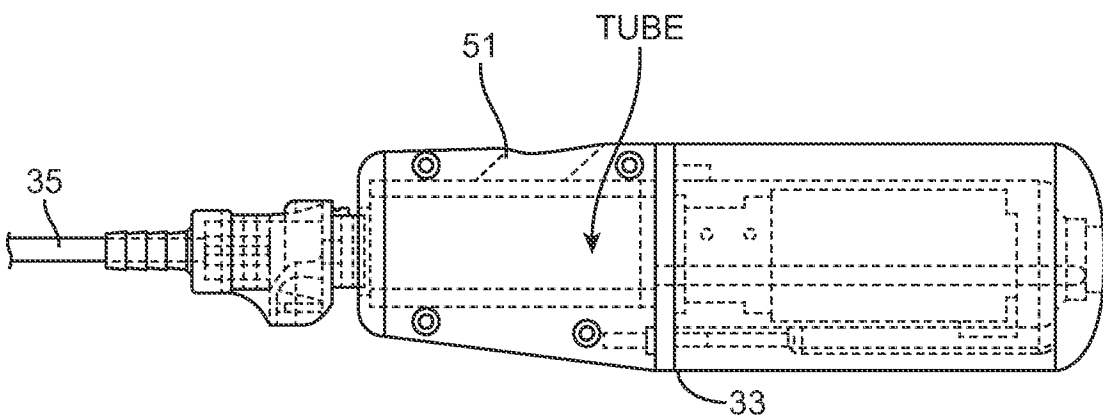


FIG. 4C

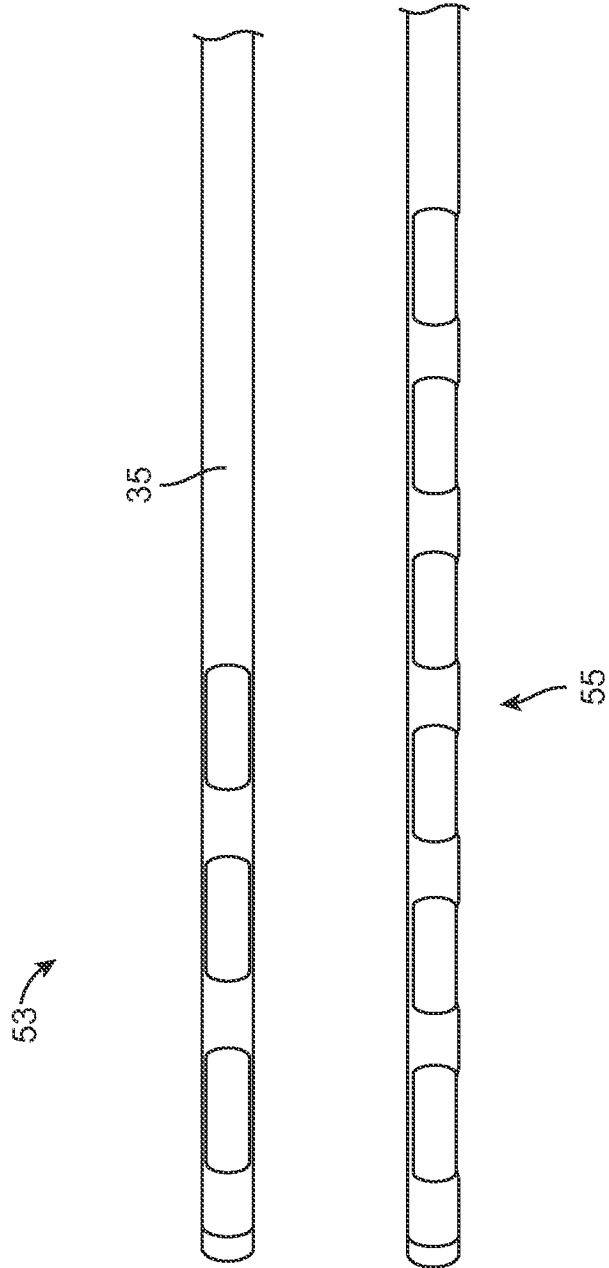
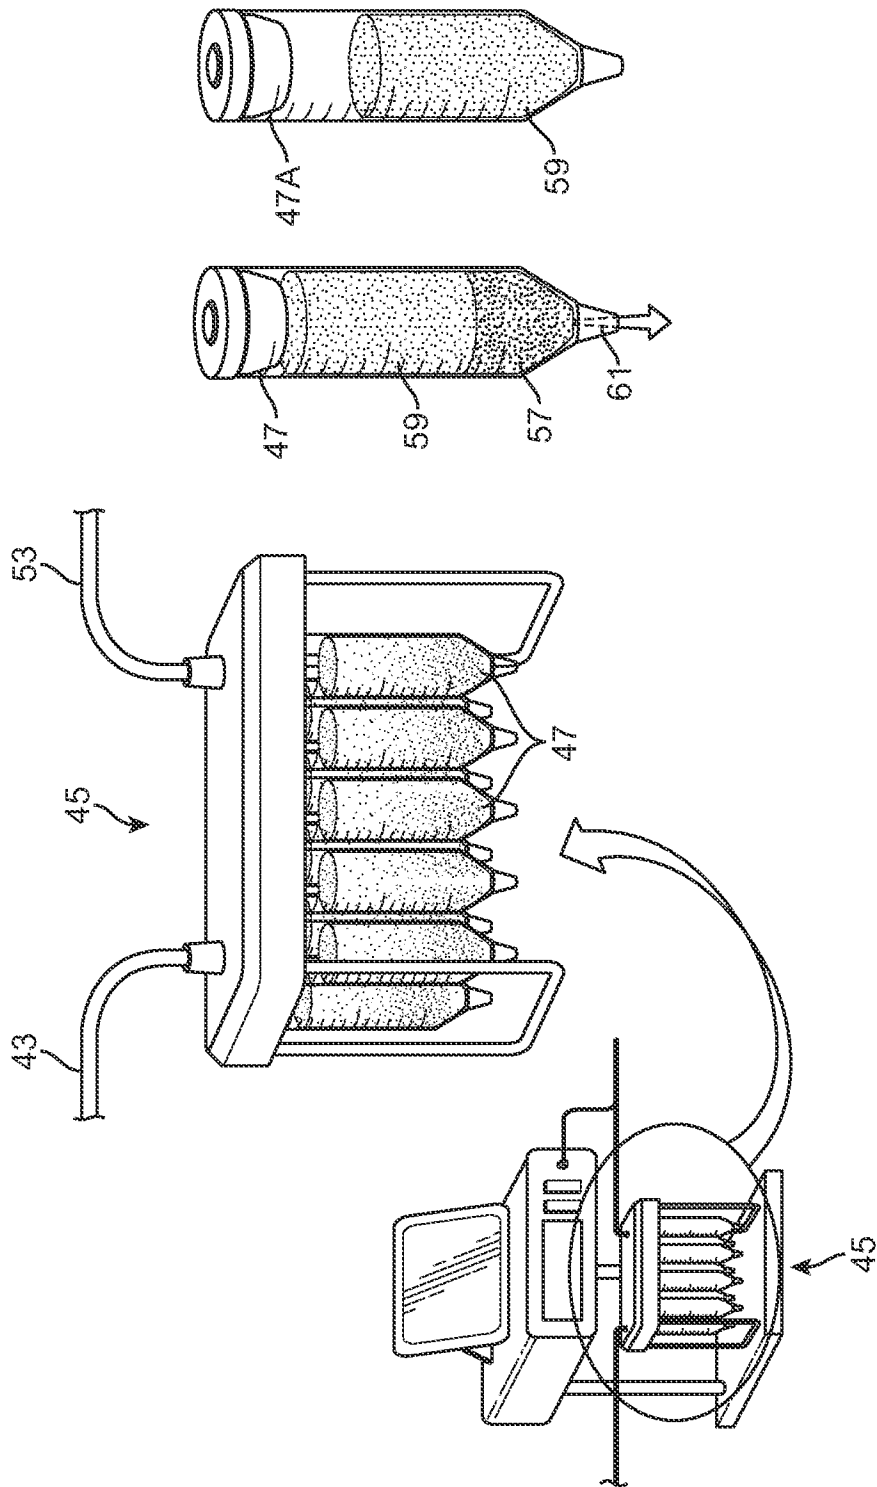


FIG. 4D

+

+



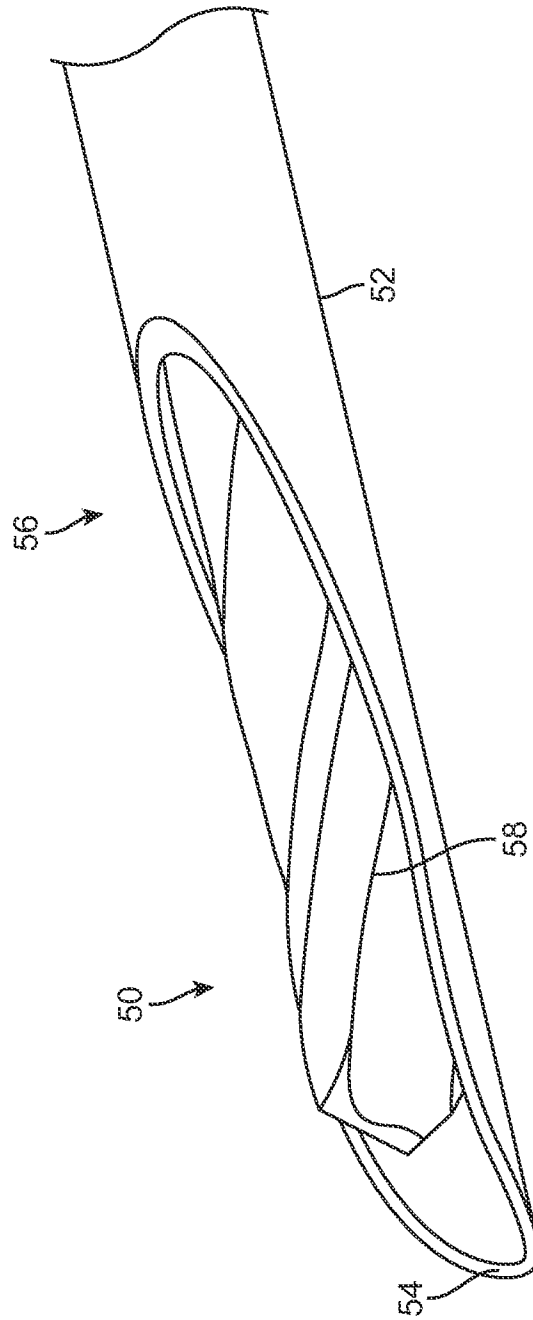


FIG. 4F

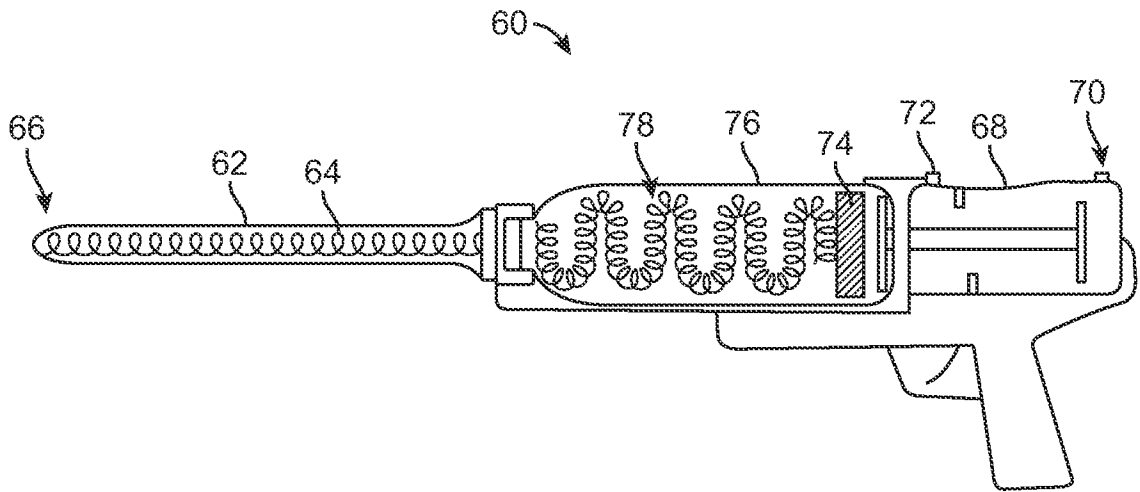


FIG. 5

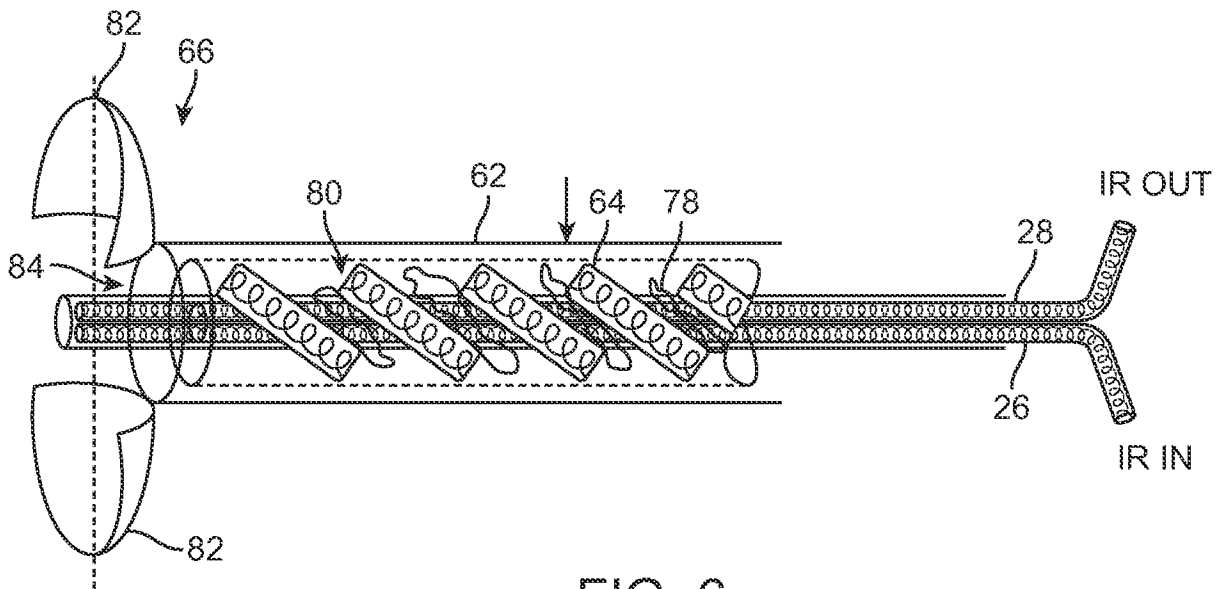


FIG. 6

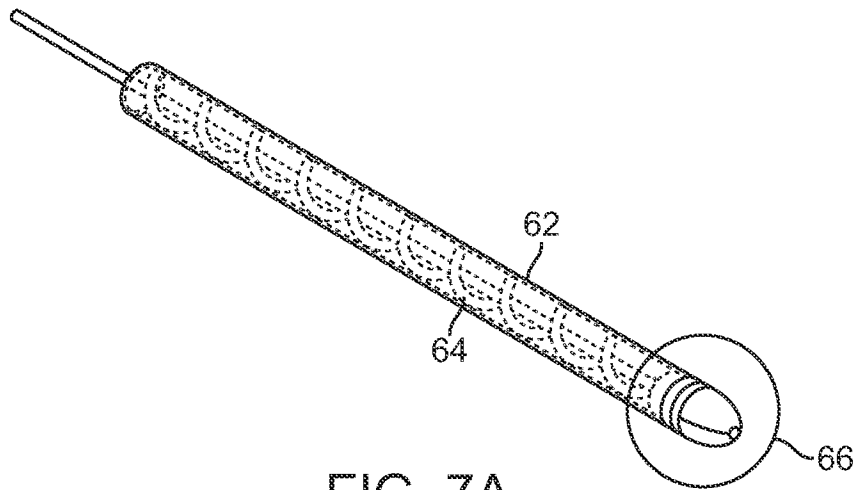


FIG. 7A

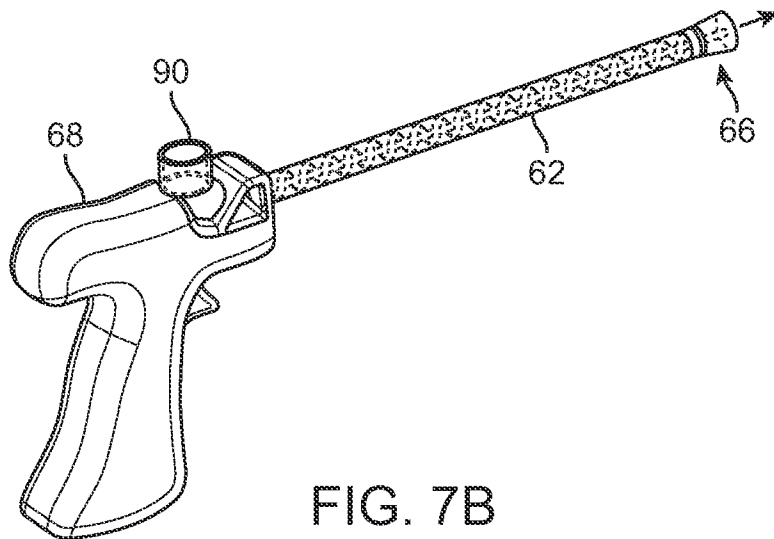


FIG. 7B

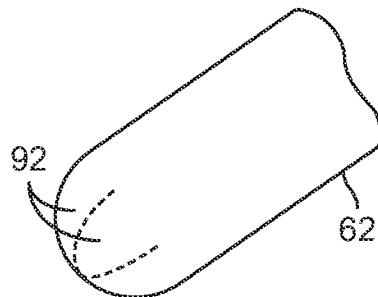


FIG. 7C



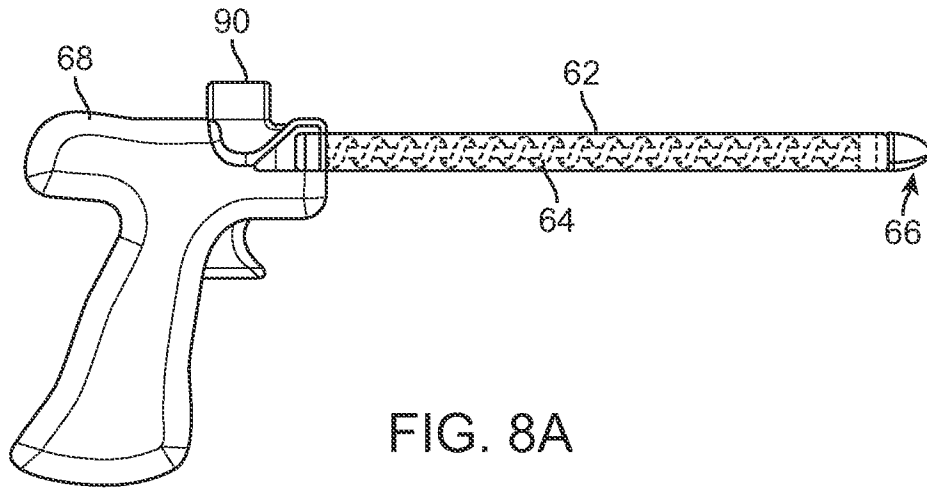


FIG. 8A

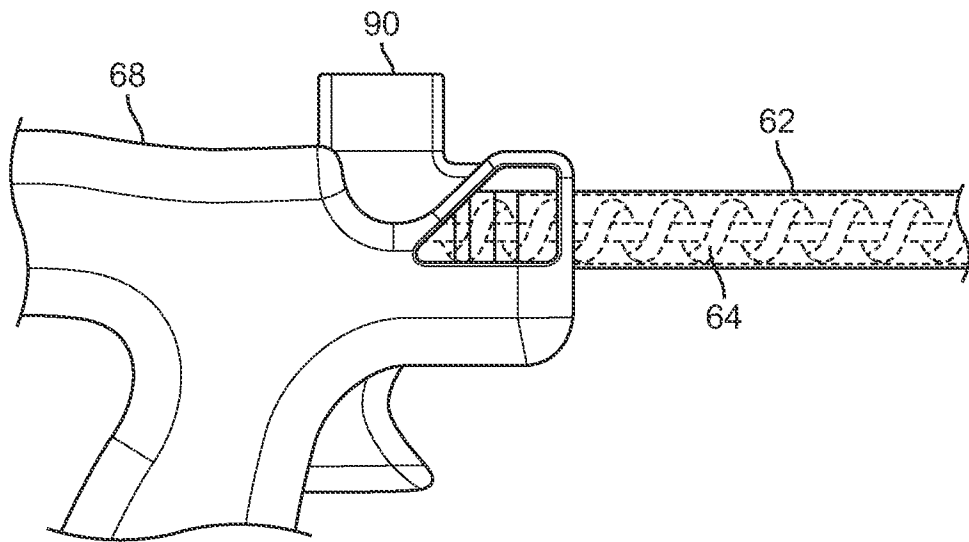


FIG. 8B

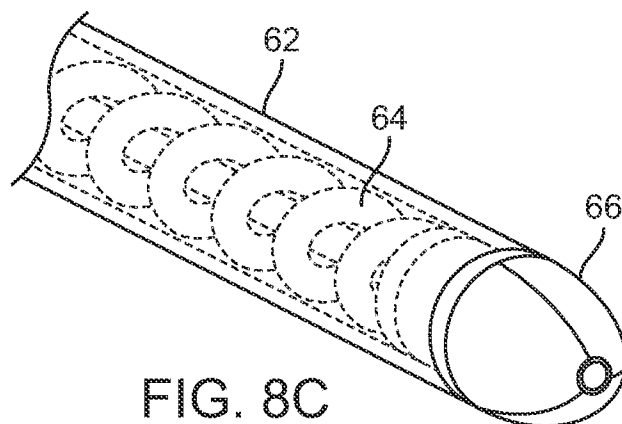


FIG. 8C



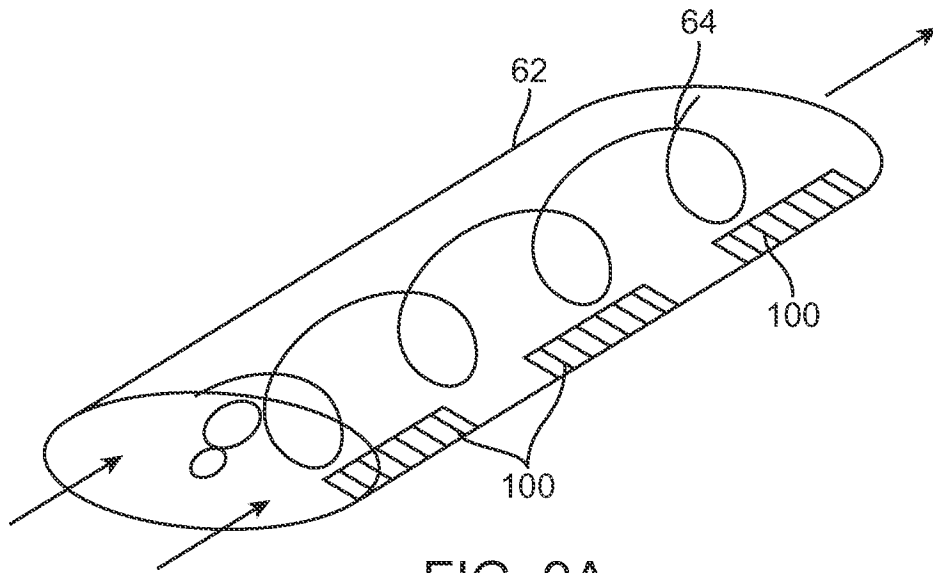


FIG. 9A

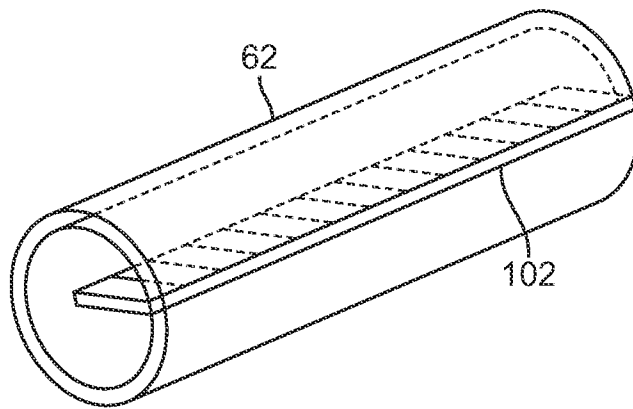


FIG. 9B

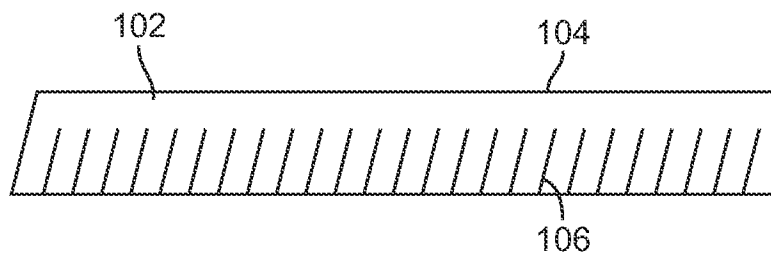


FIG. 9C

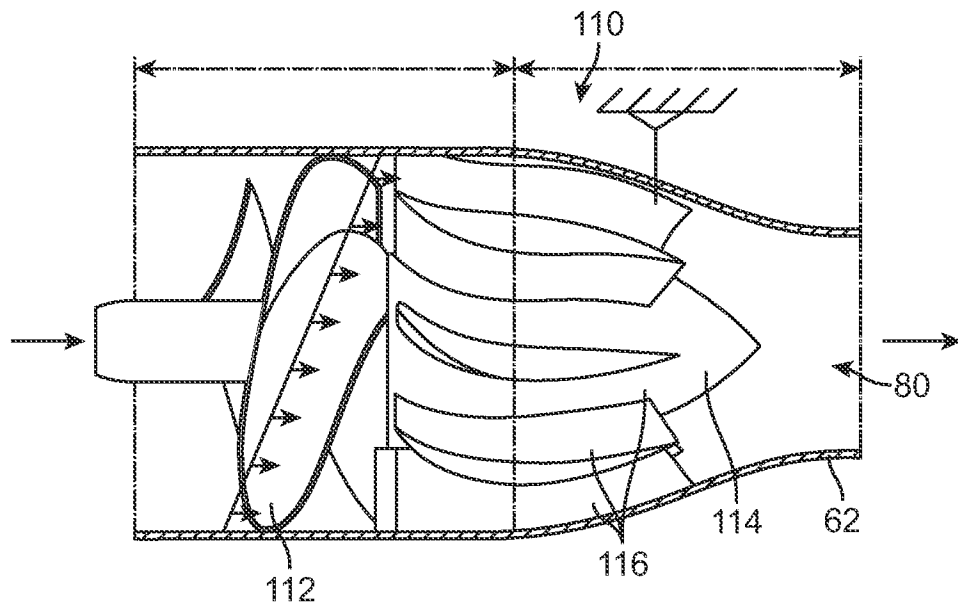


FIG. 10

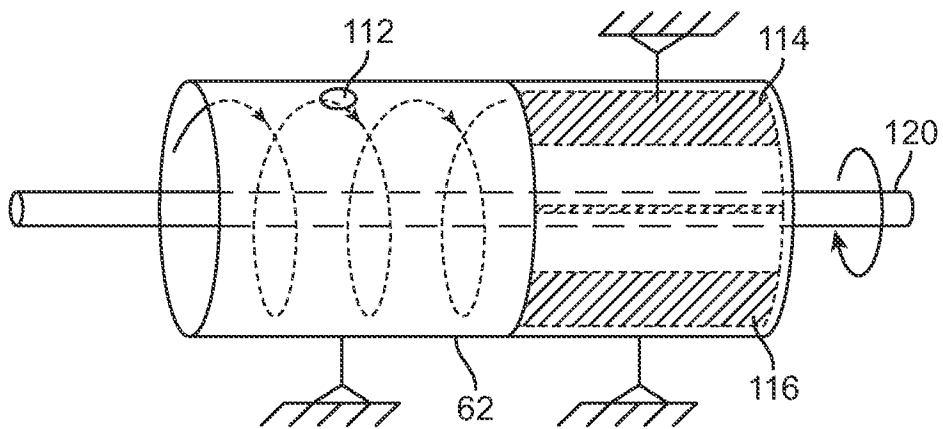


FIG. 11

+




FIG. 12A




FIG. 12B




FIG. 12C

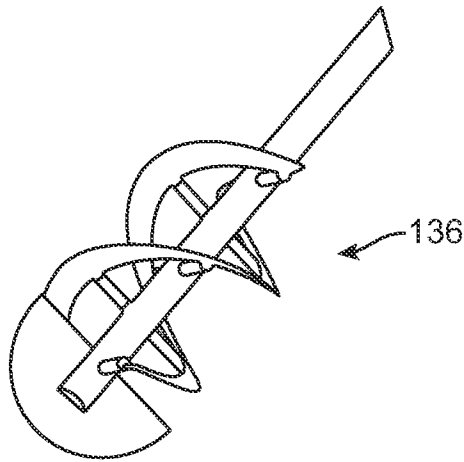


FIG. 12D

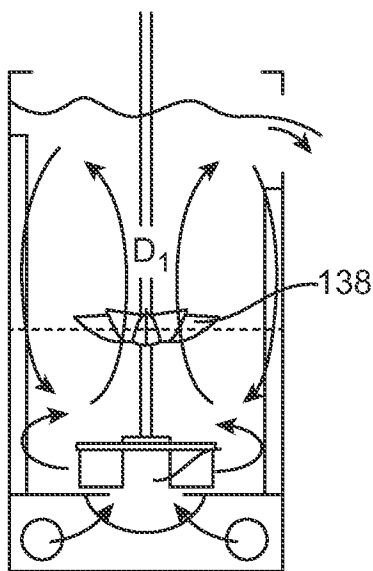


FIG. 12E

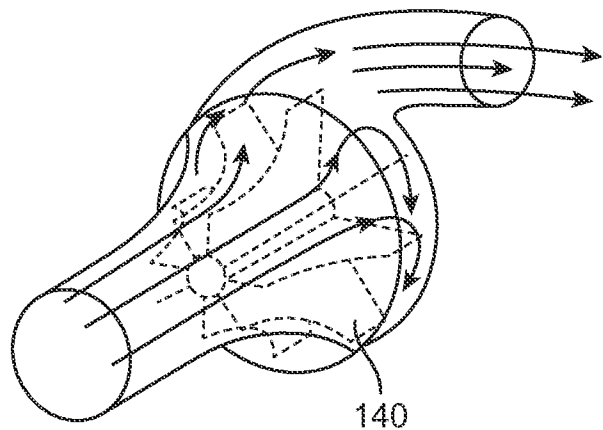


FIG. 12F

+

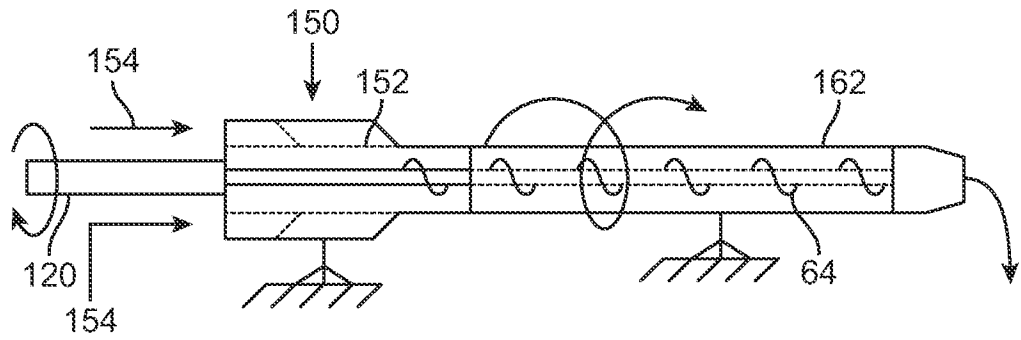


FIG. 13

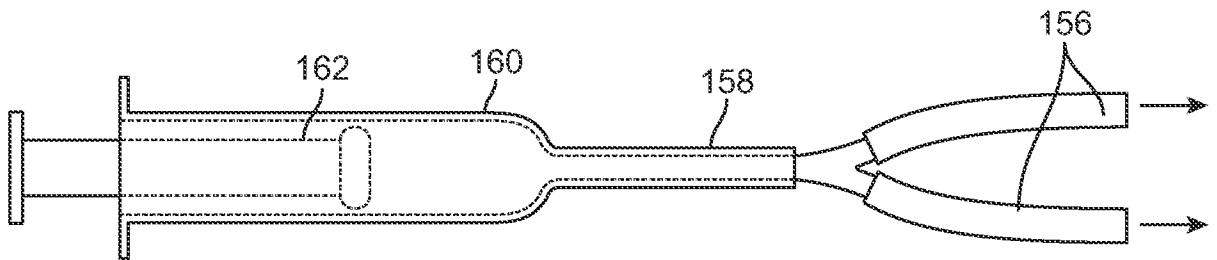


FIG. 14

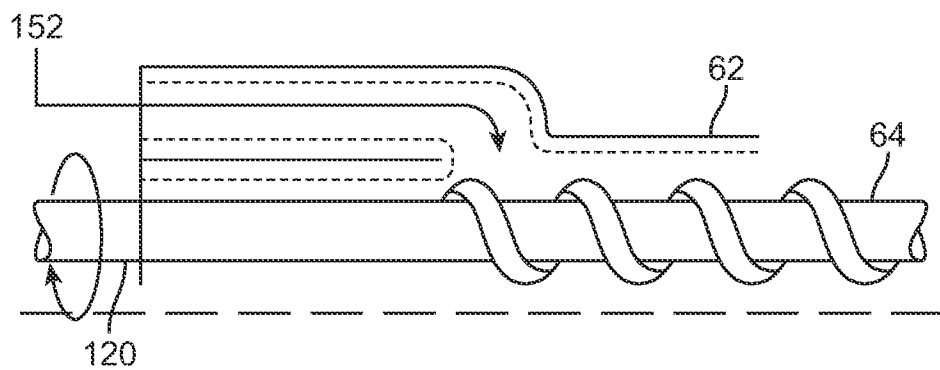


FIG. 15

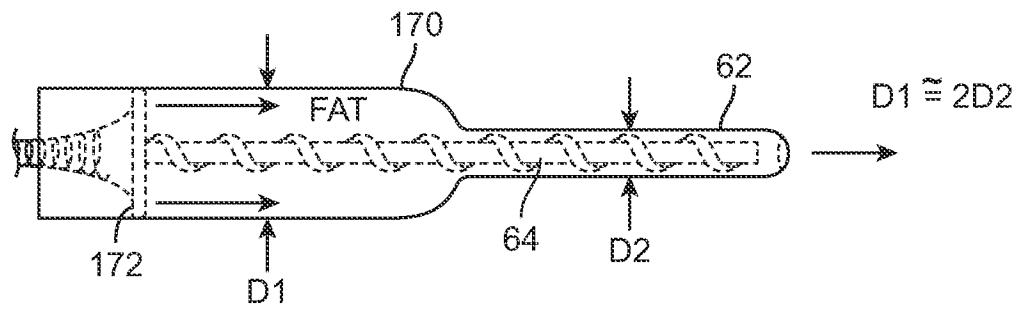


FIG. 16A

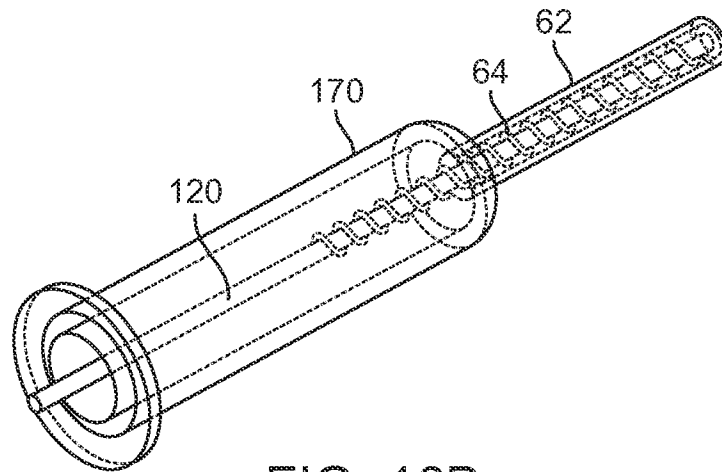


FIG. 16B

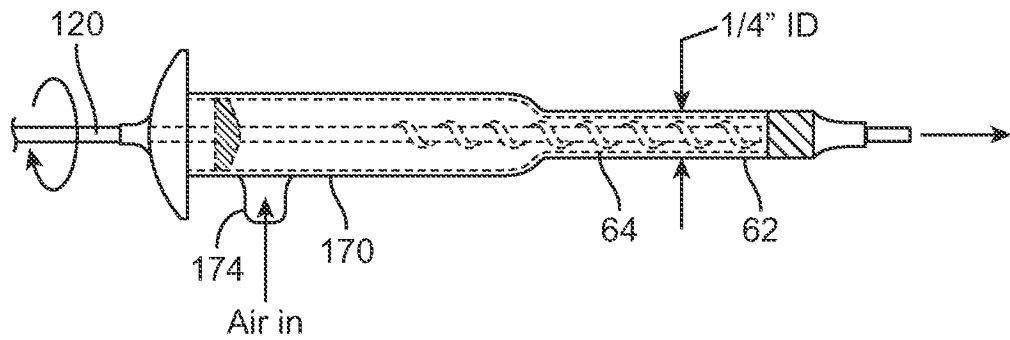


FIG. 16C

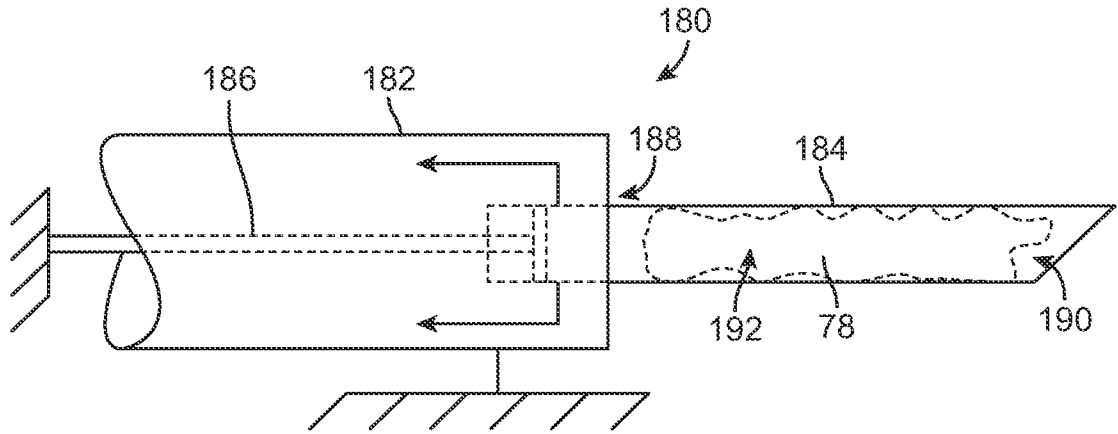


FIG. 17A

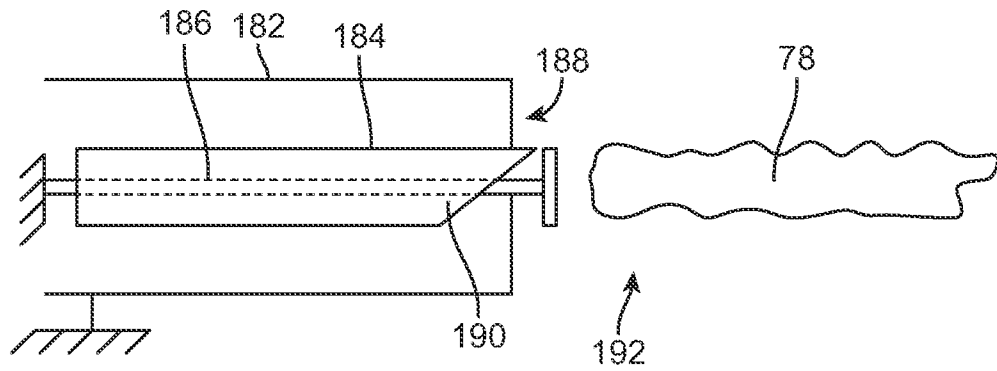


FIG. 17B

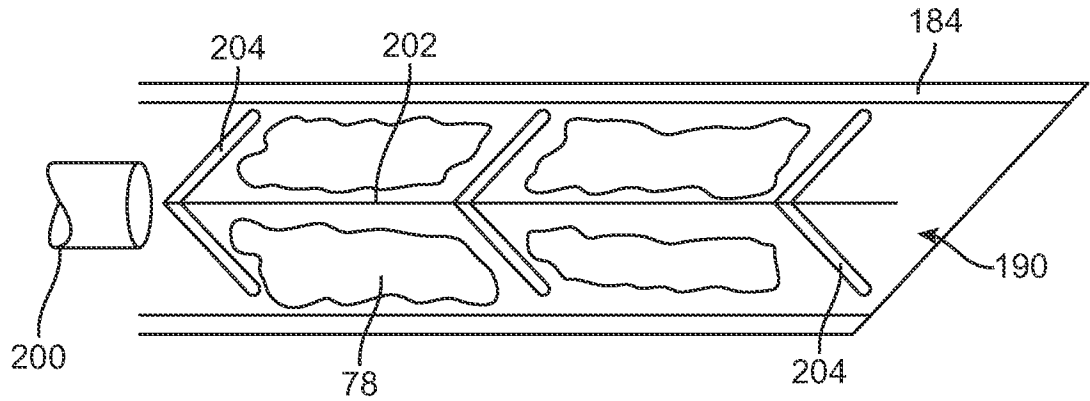


FIG. 18A

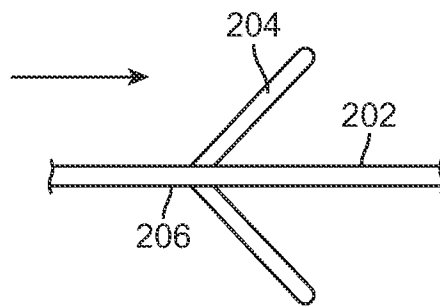


FIG. 18B

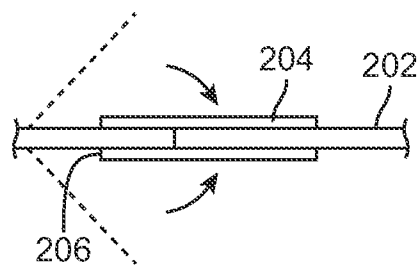


FIG. 18C

+

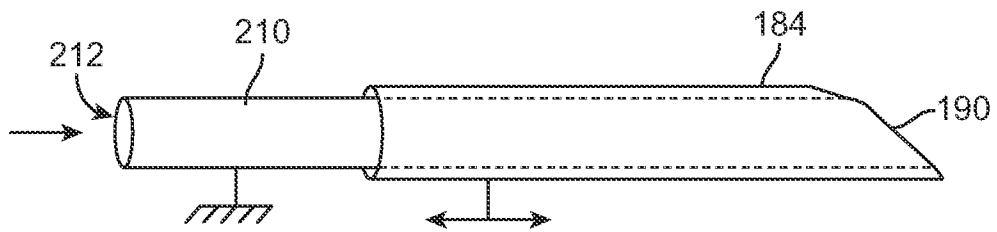


FIG. 19A

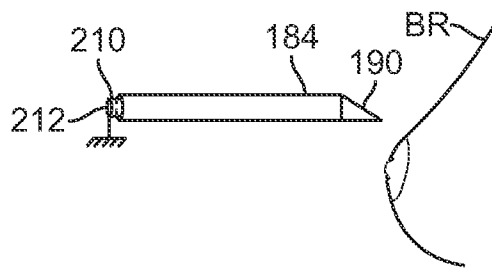


FIG. 19B

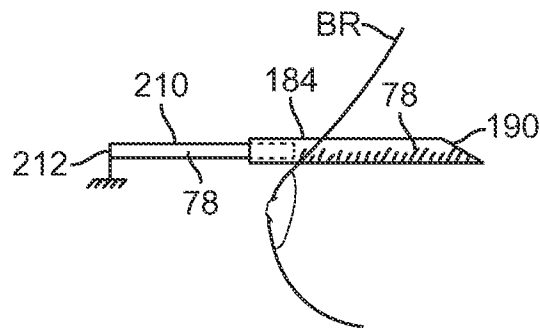


FIG. 19C

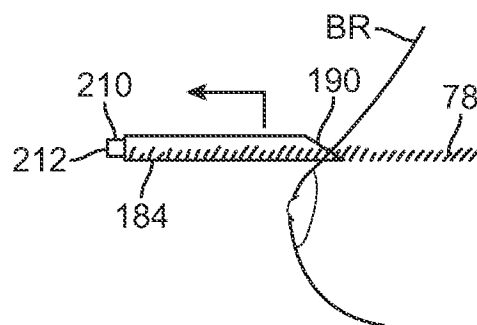


FIG. 19D

+

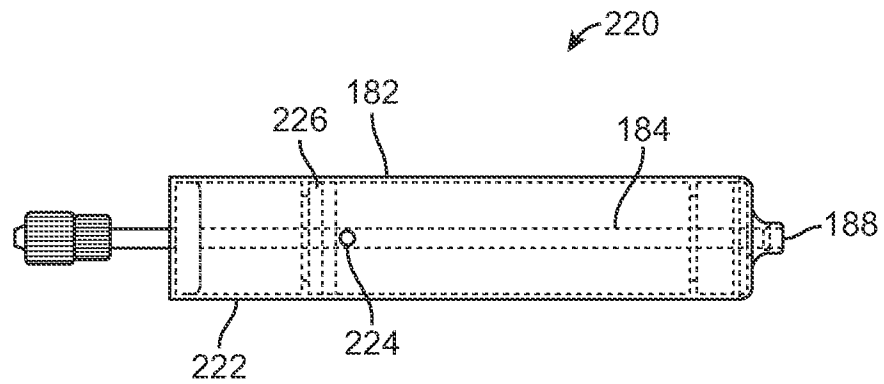


FIG. 20A

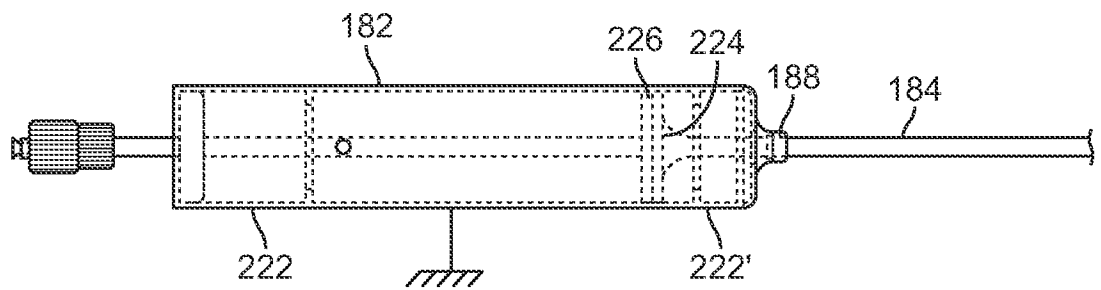


FIG. 20B

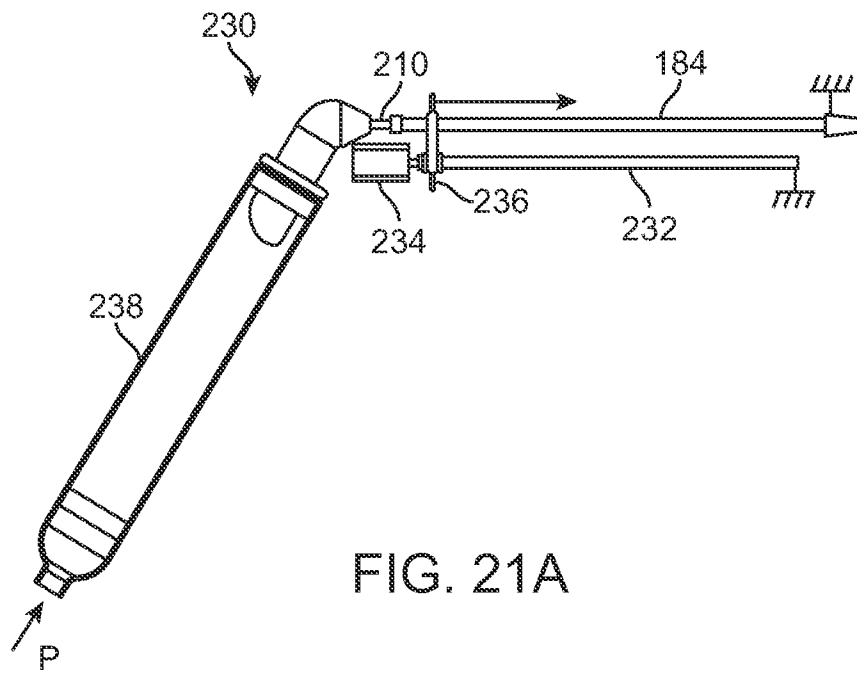


FIG. 21A

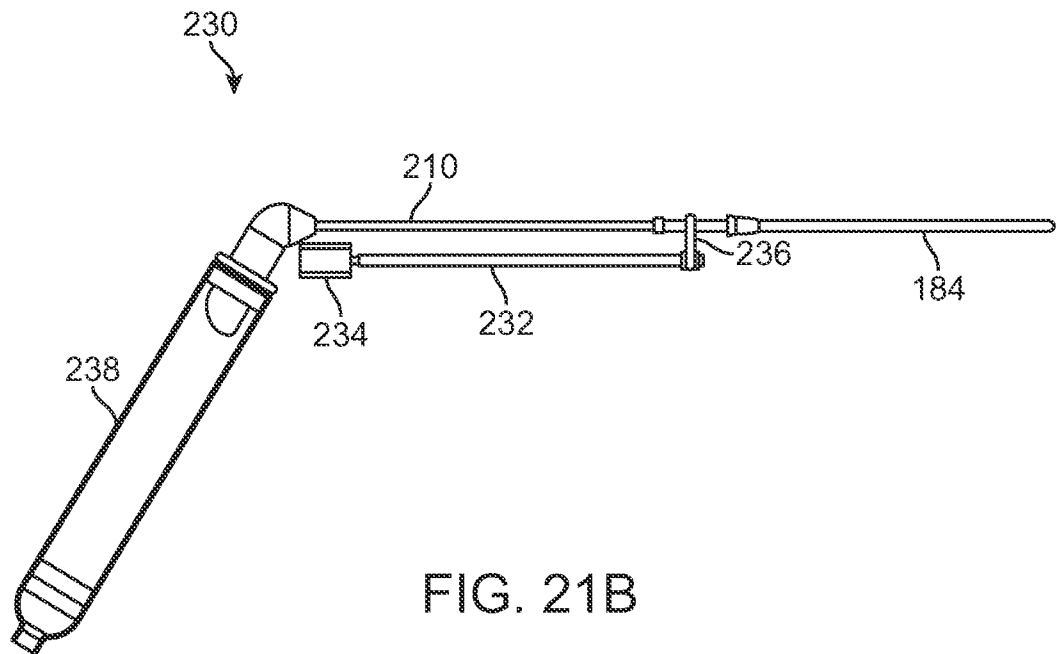


FIG. 21B



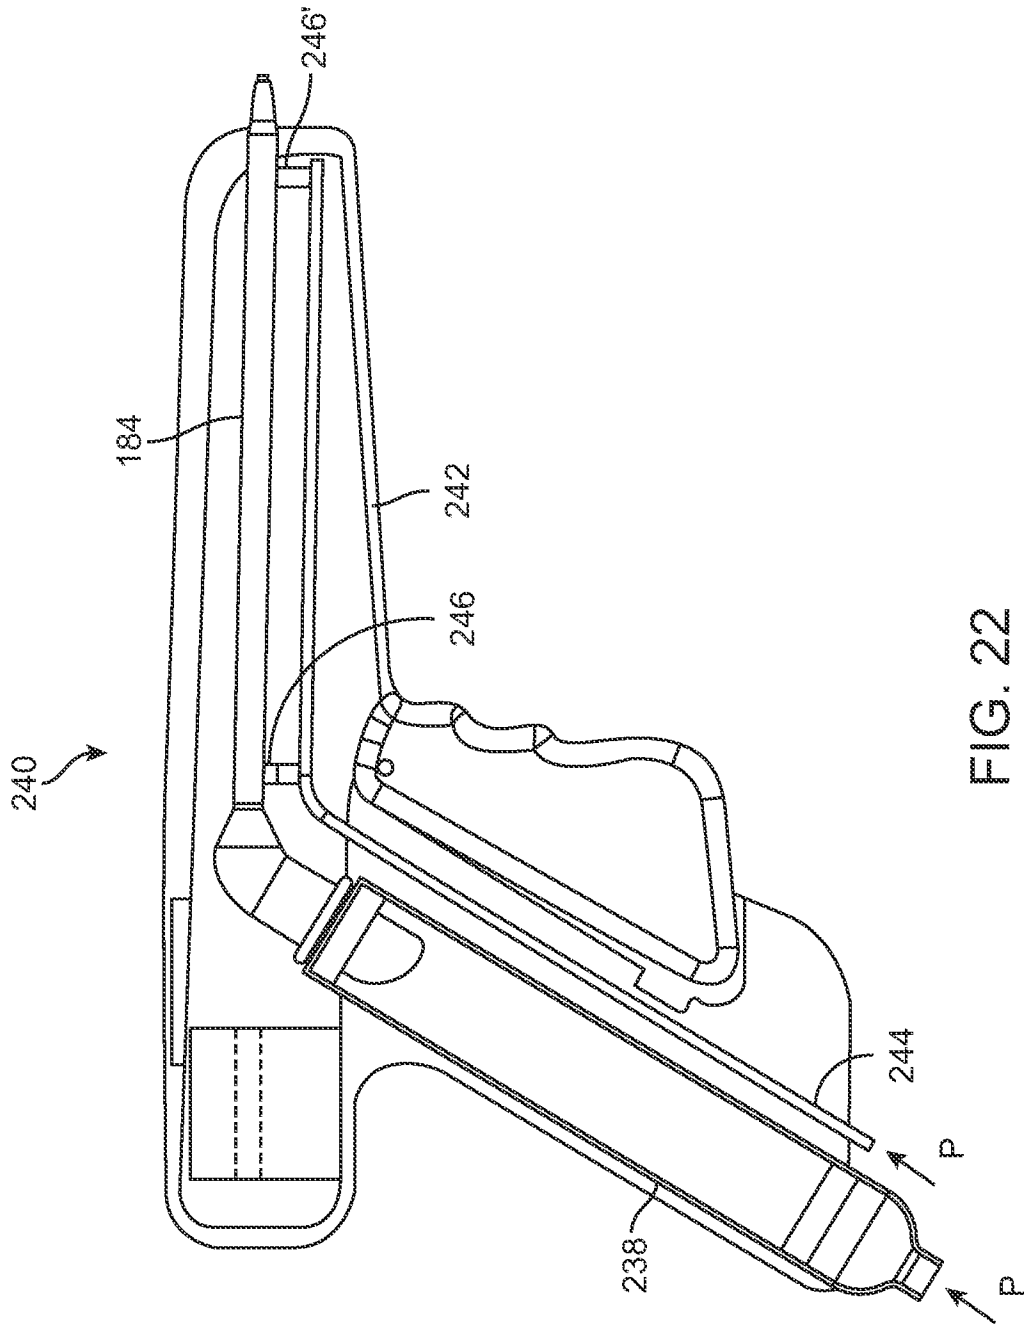


FIG. 22

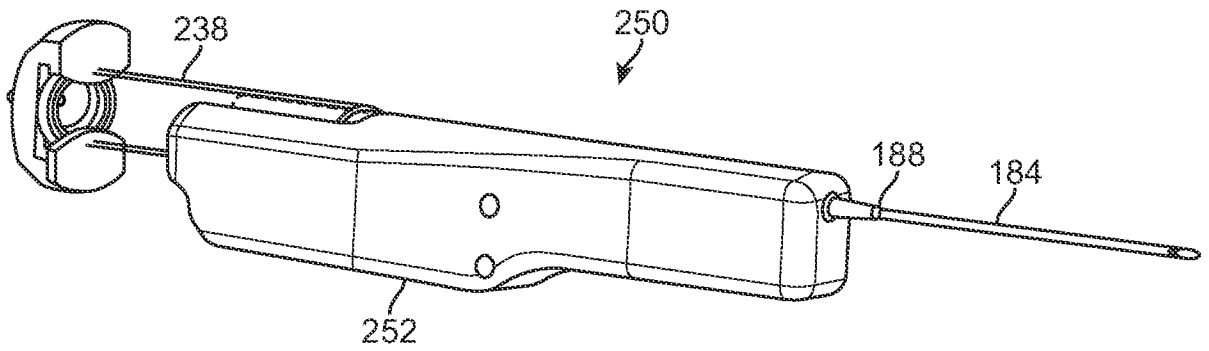


FIG. 23A

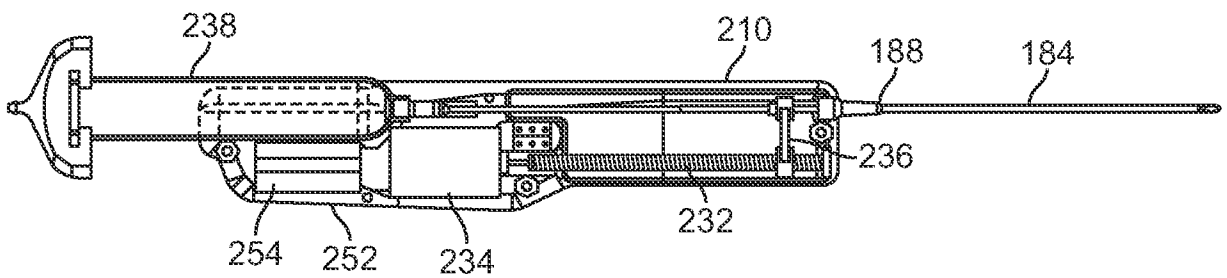


FIG. 23B

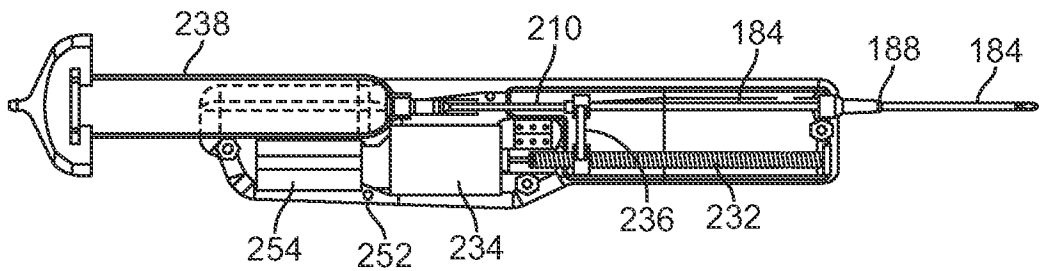


FIG. 23C



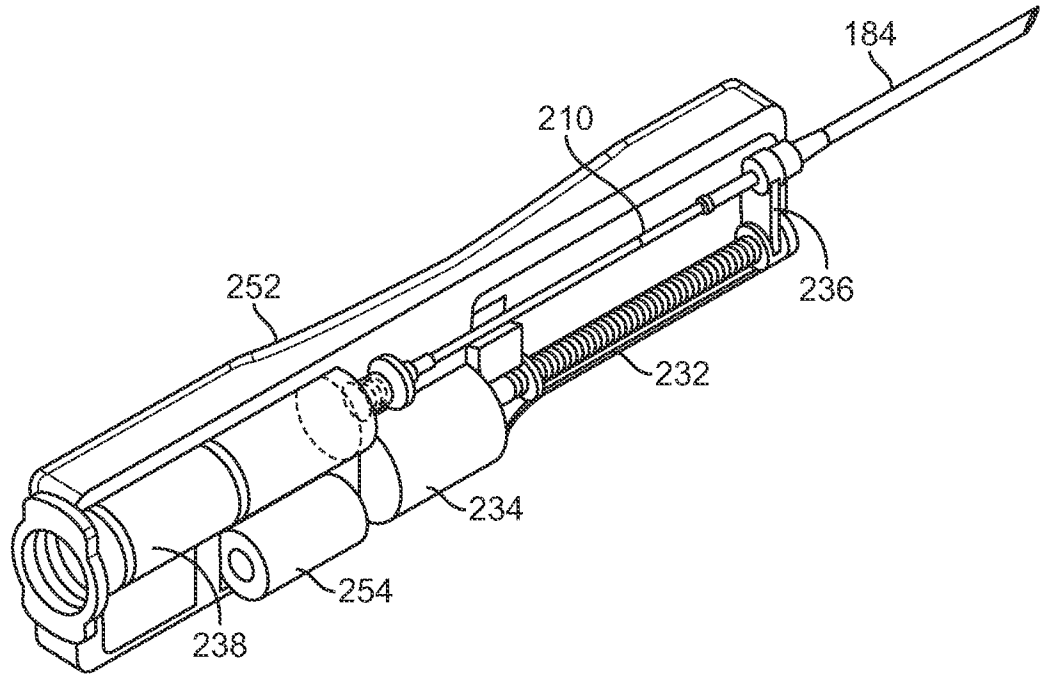


FIG. 24A

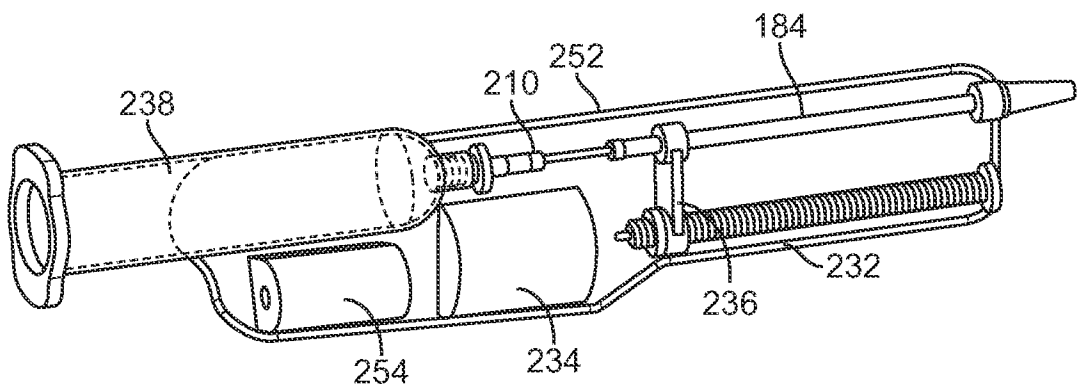
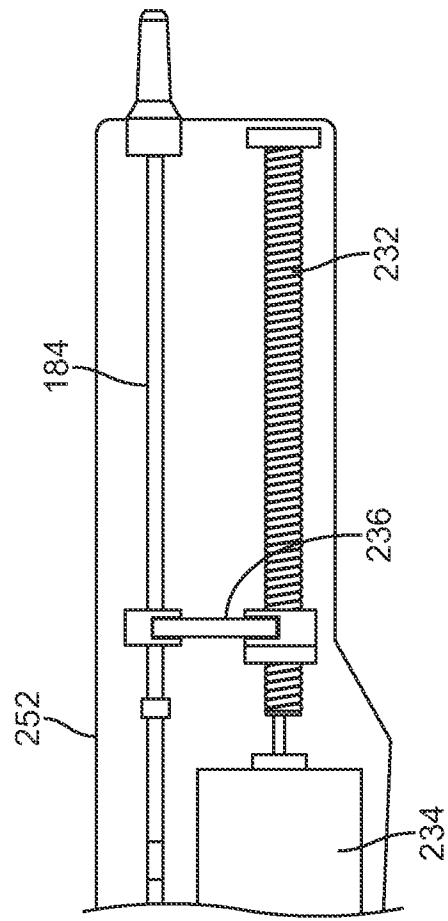
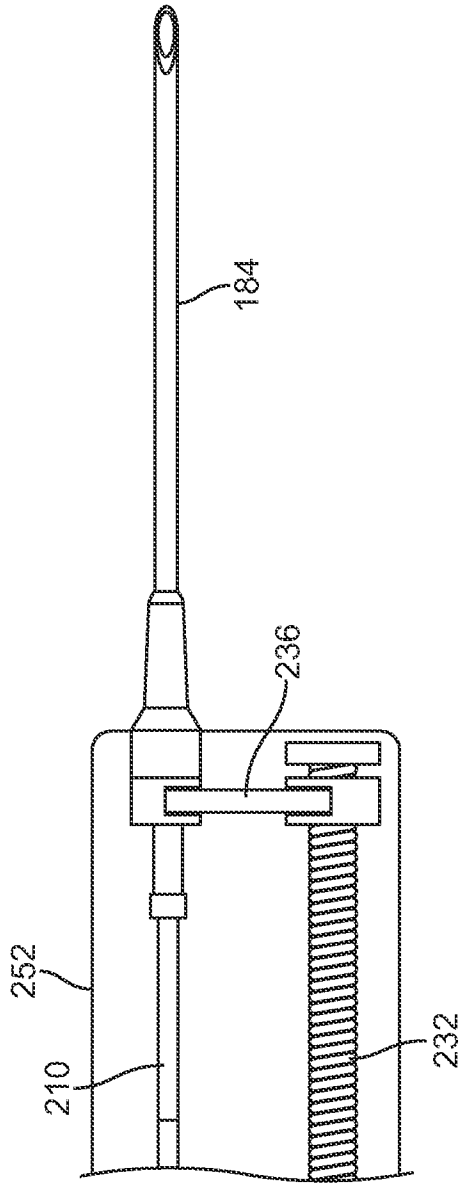


FIG. 24B





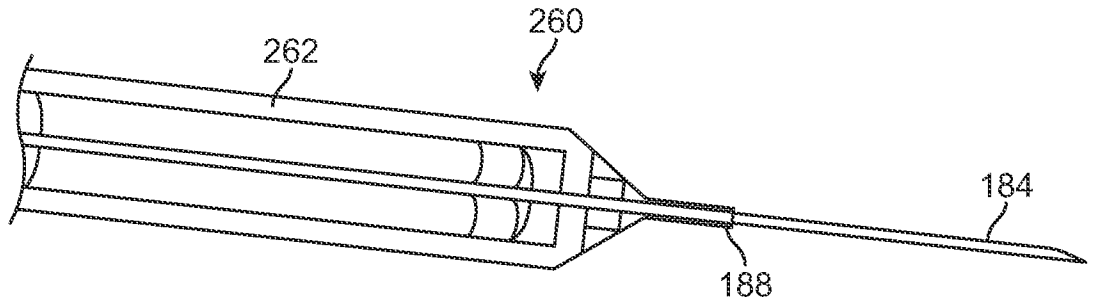


FIG. 26A

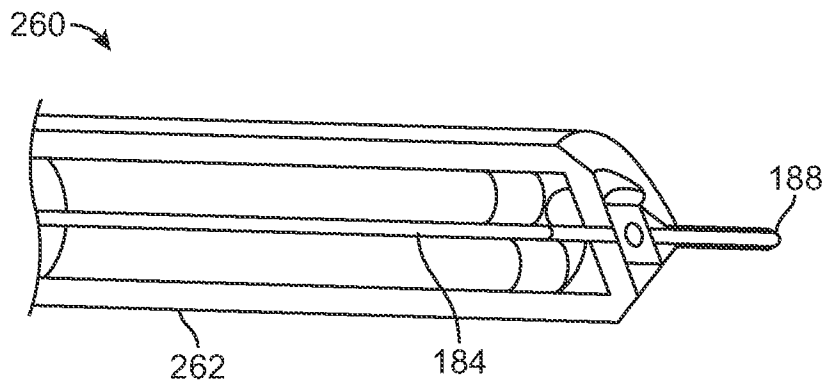


FIG. 26B

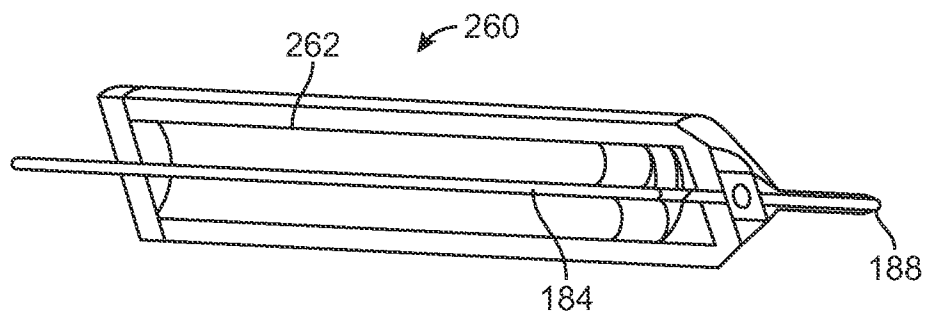


FIG. 26C

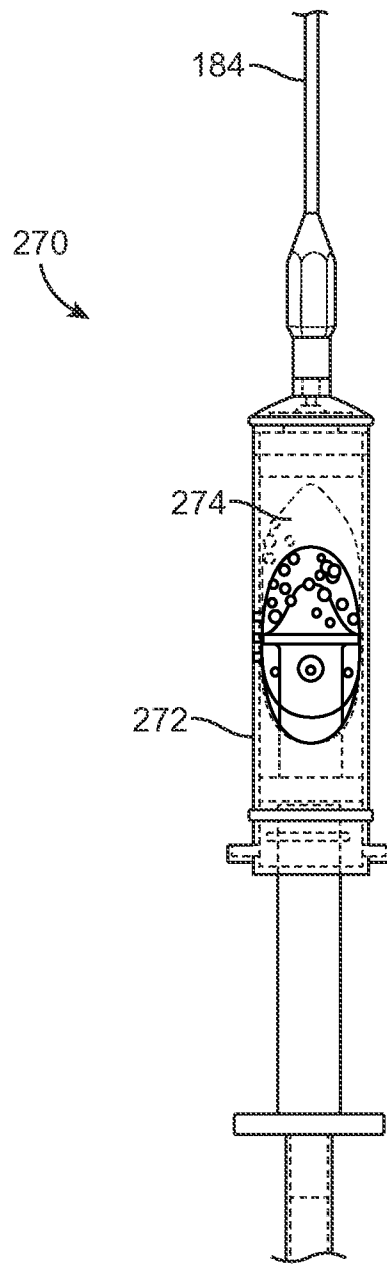


FIG. 27

38/53

+

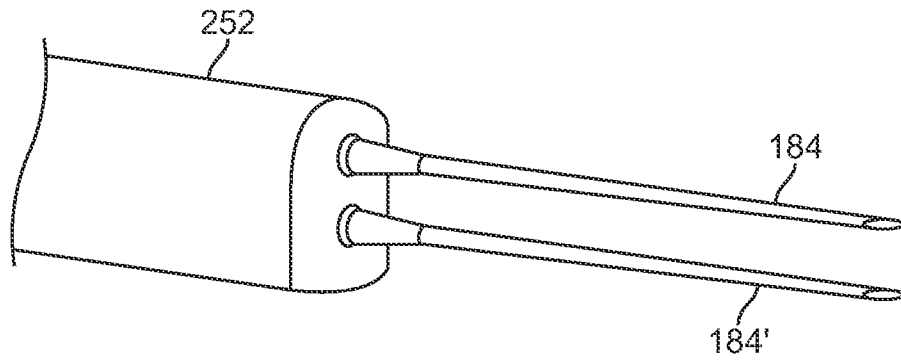


FIG. 28A

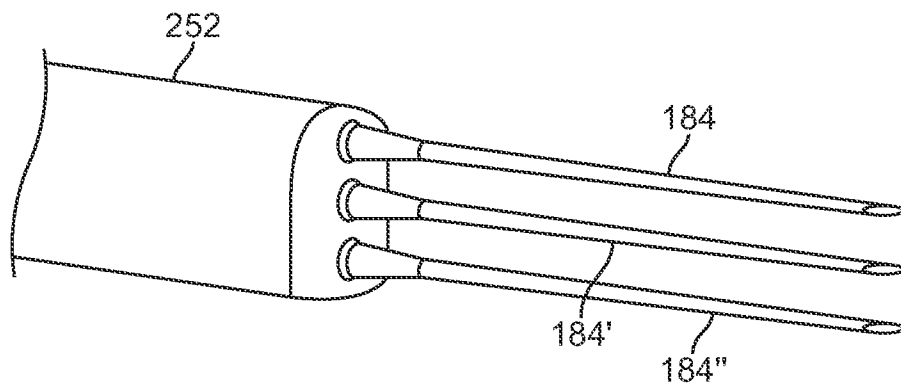


FIG. 28B

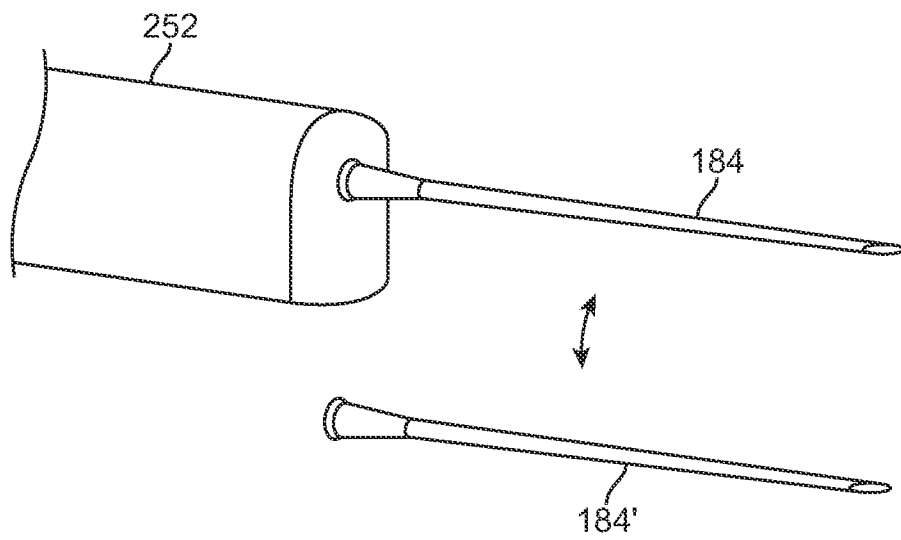


FIG. 28C

+

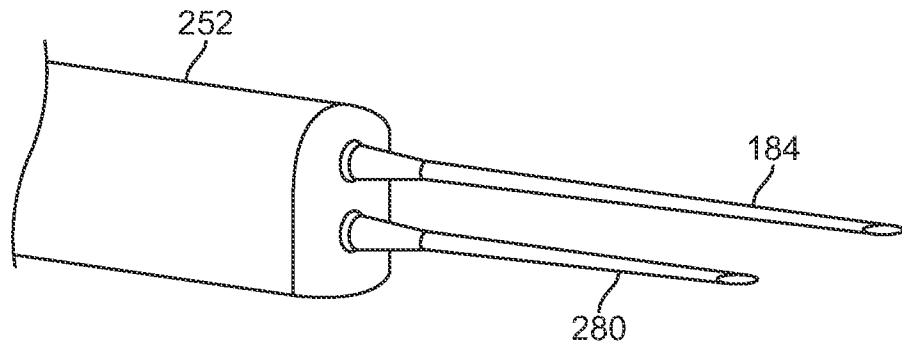


FIG. 29A

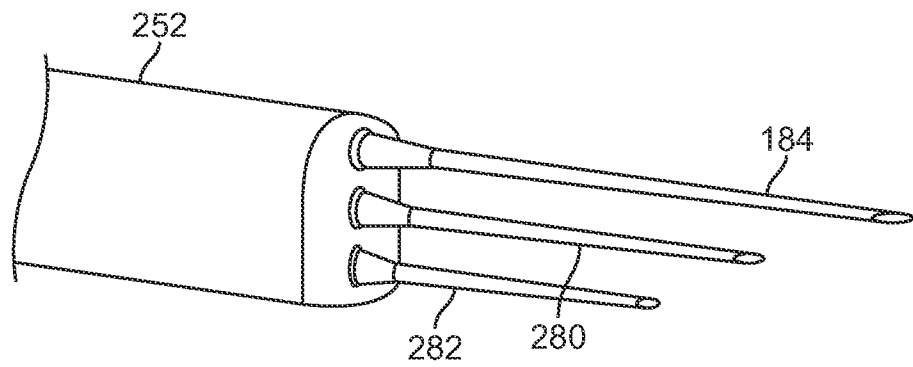


FIG. 29B



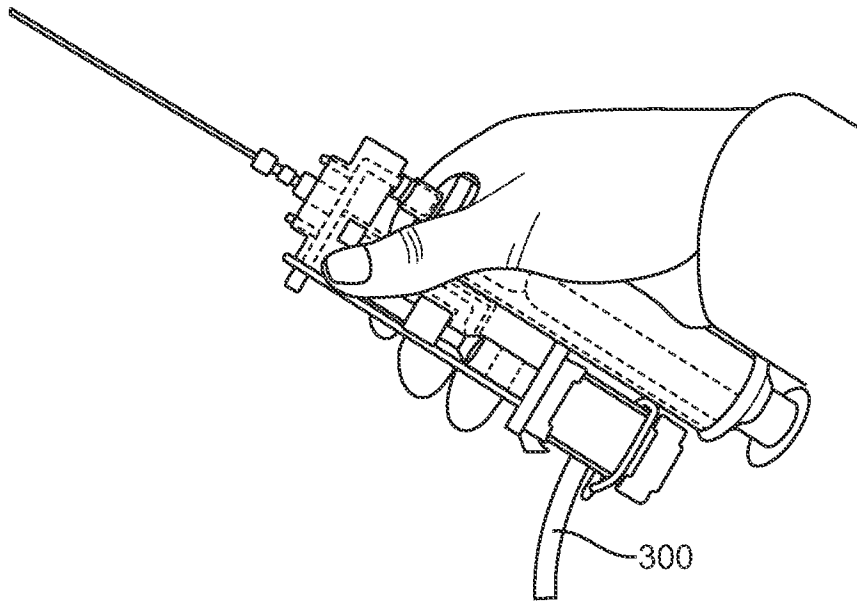


FIG. 30A

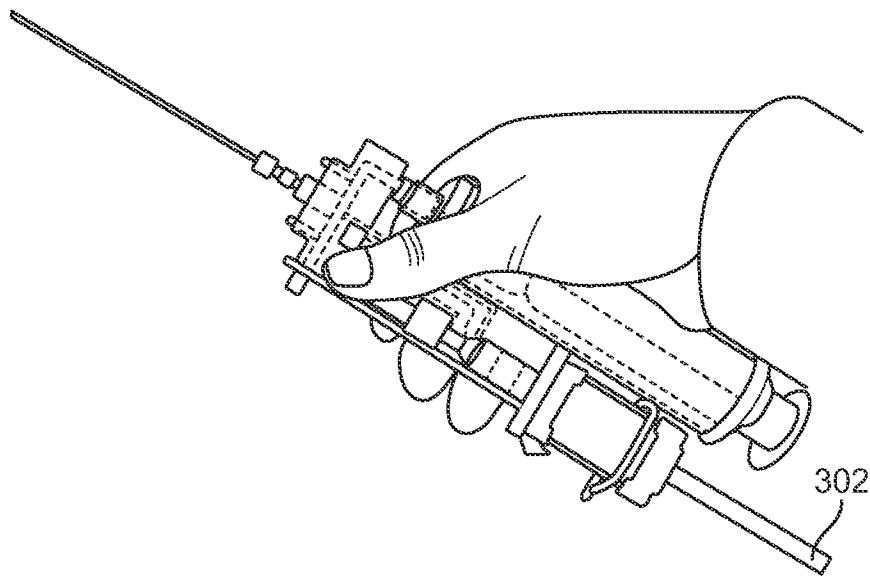


FIG. 30B



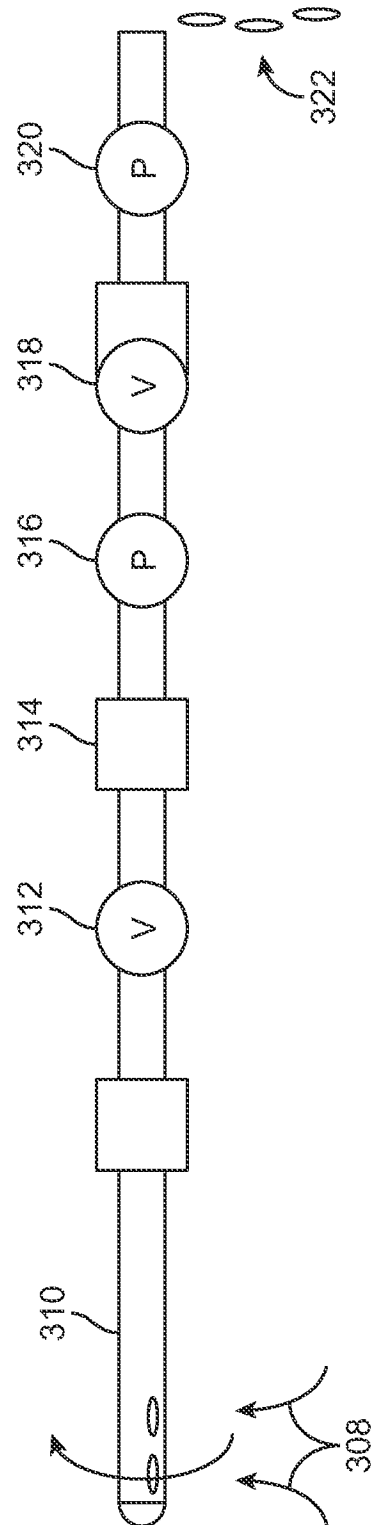


FIG. 31

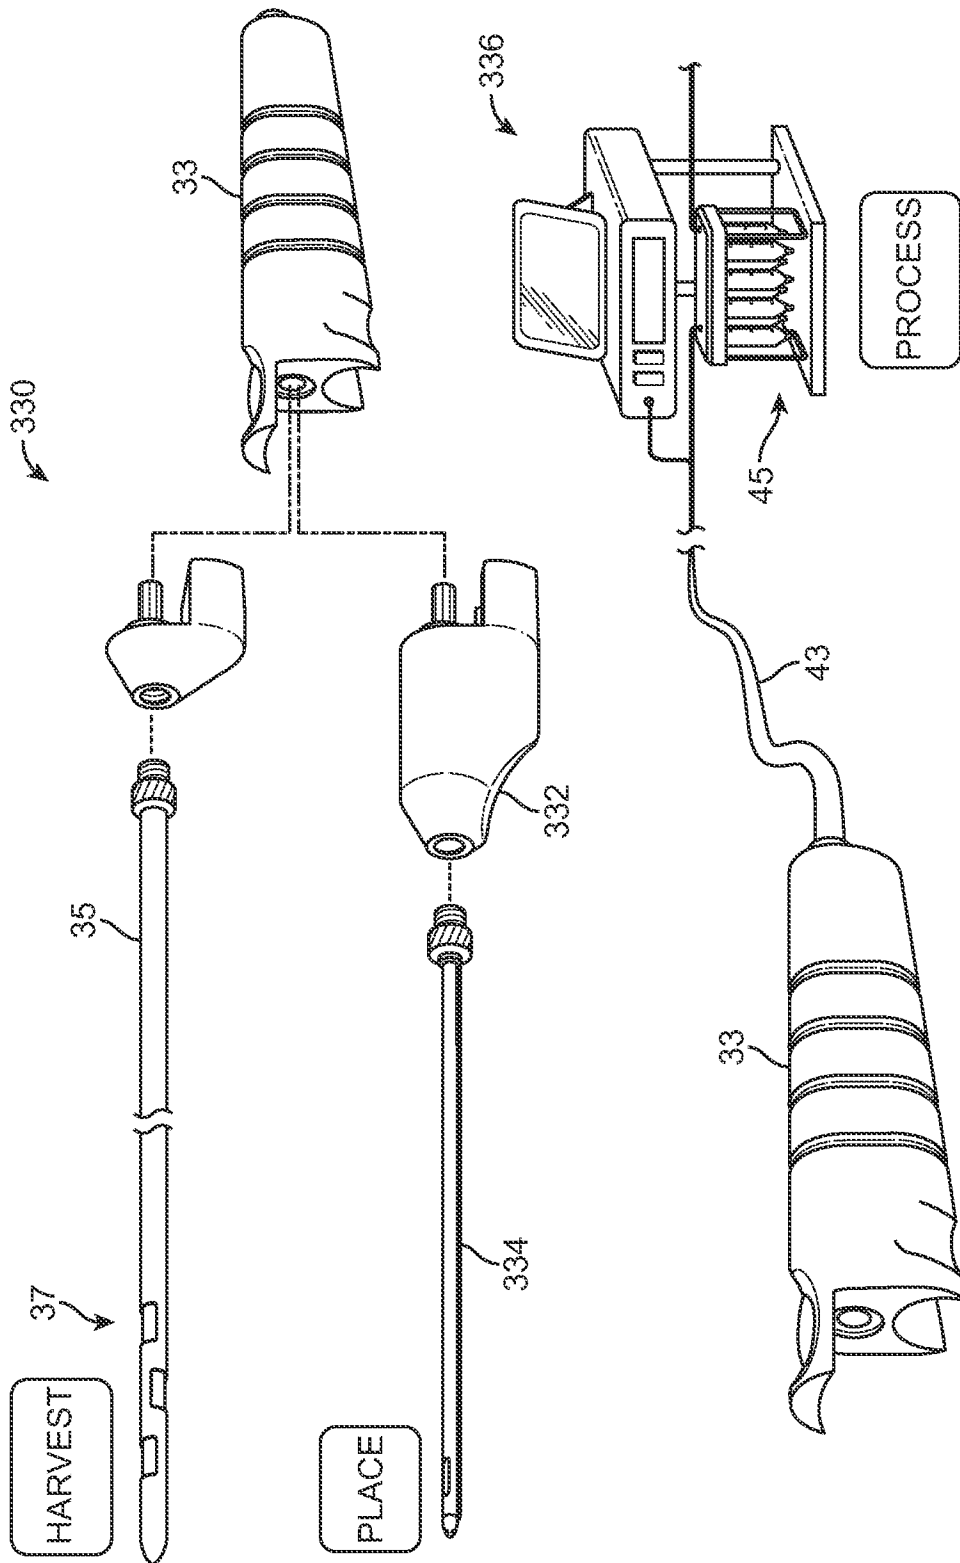


FIG. 32

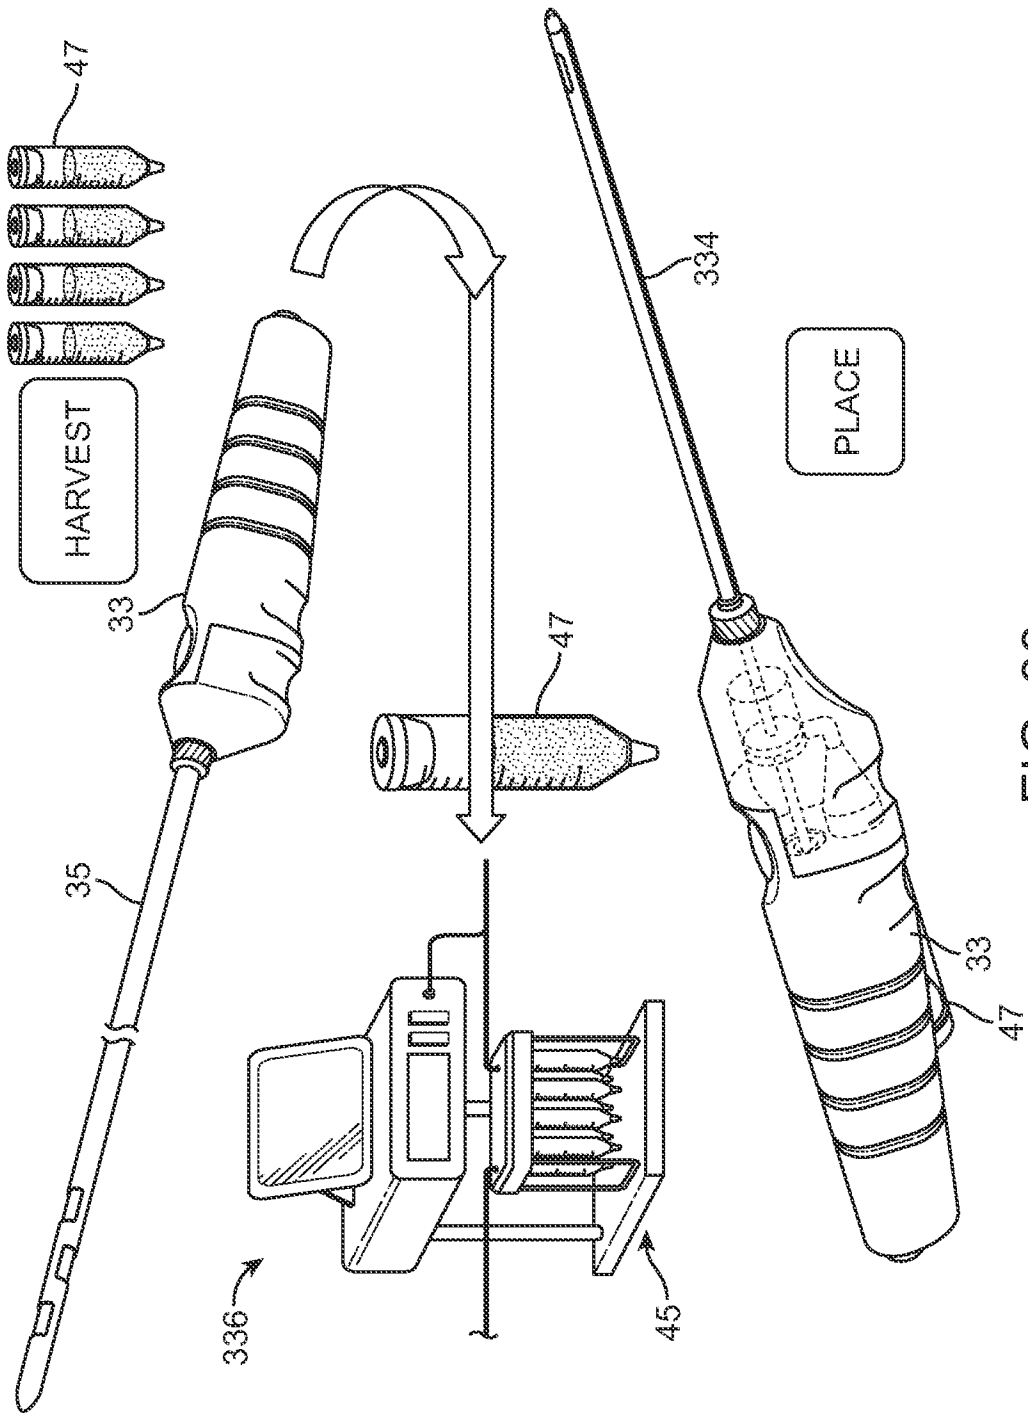


FIG. 33

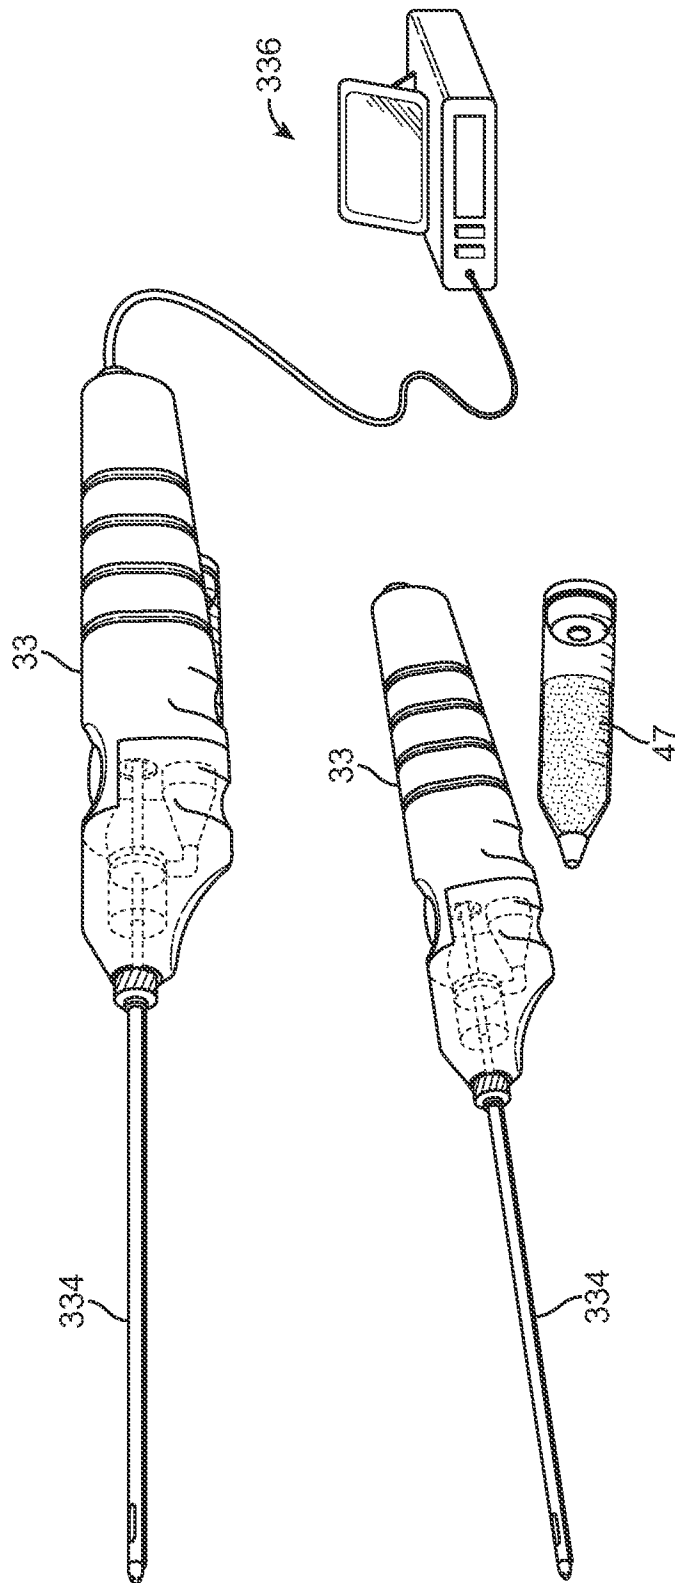


FIG. 34

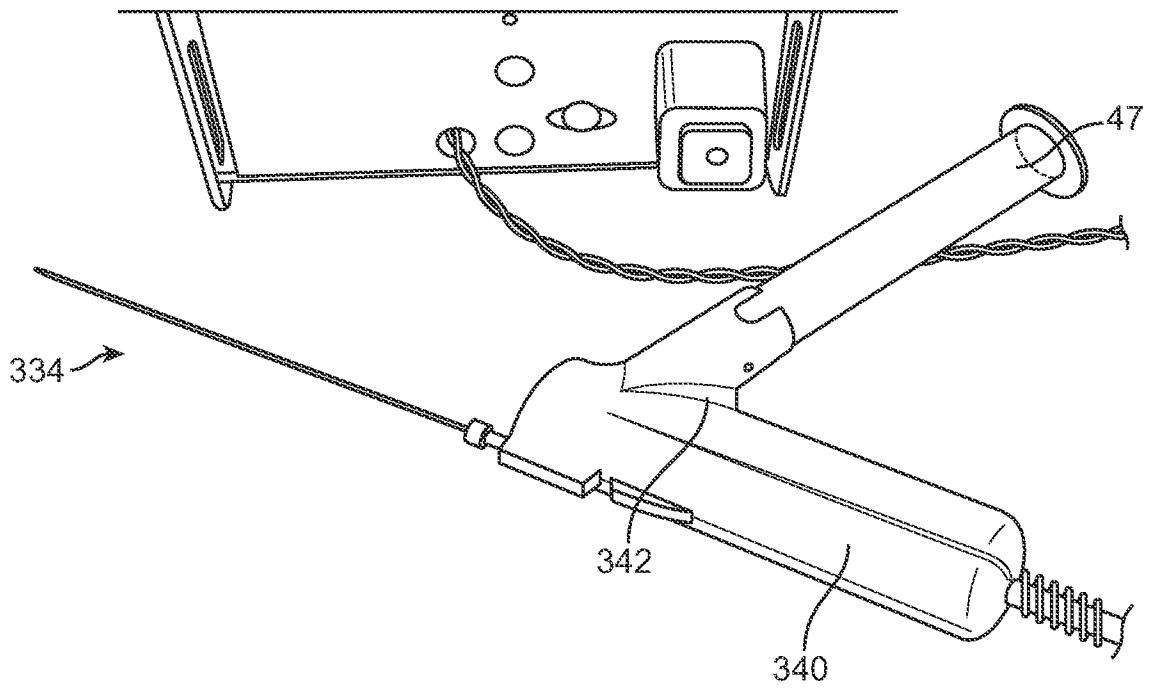


FIG. 35A

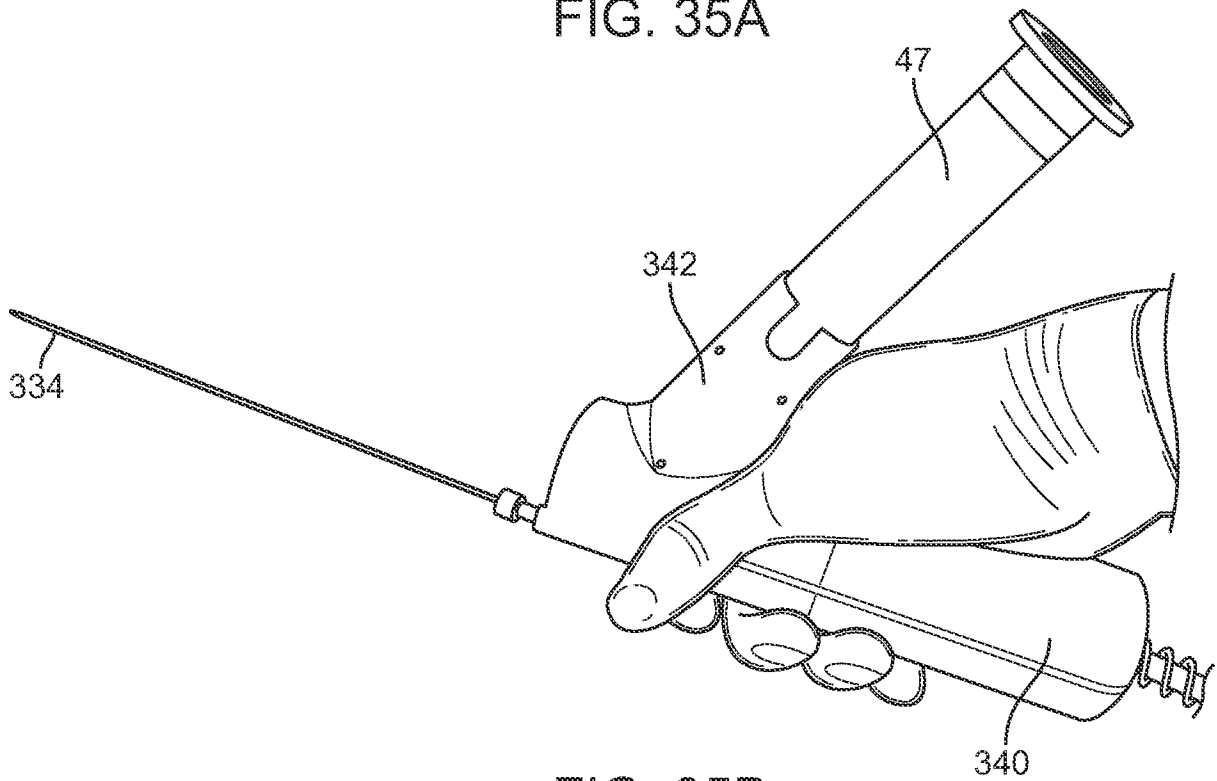


FIG. 35B

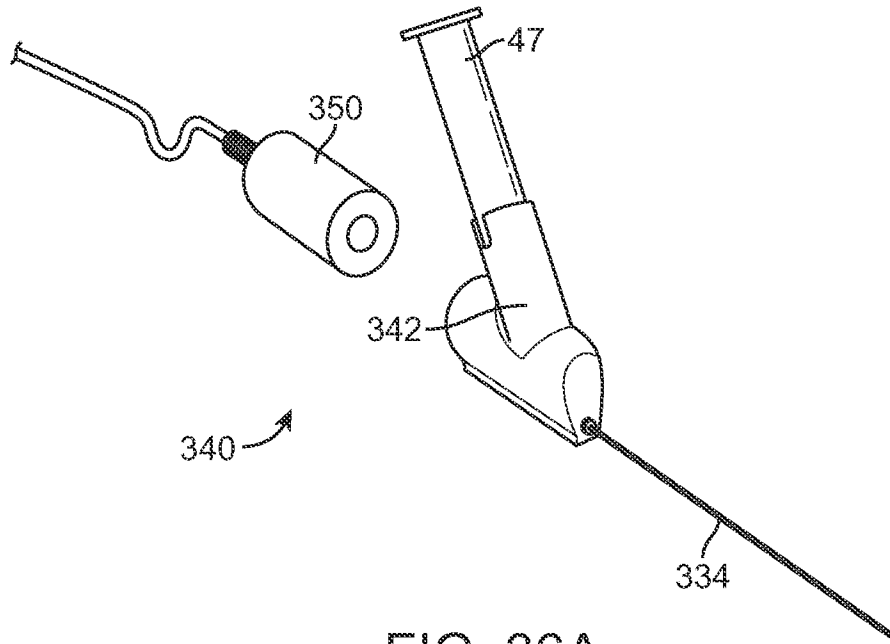


FIG. 36A



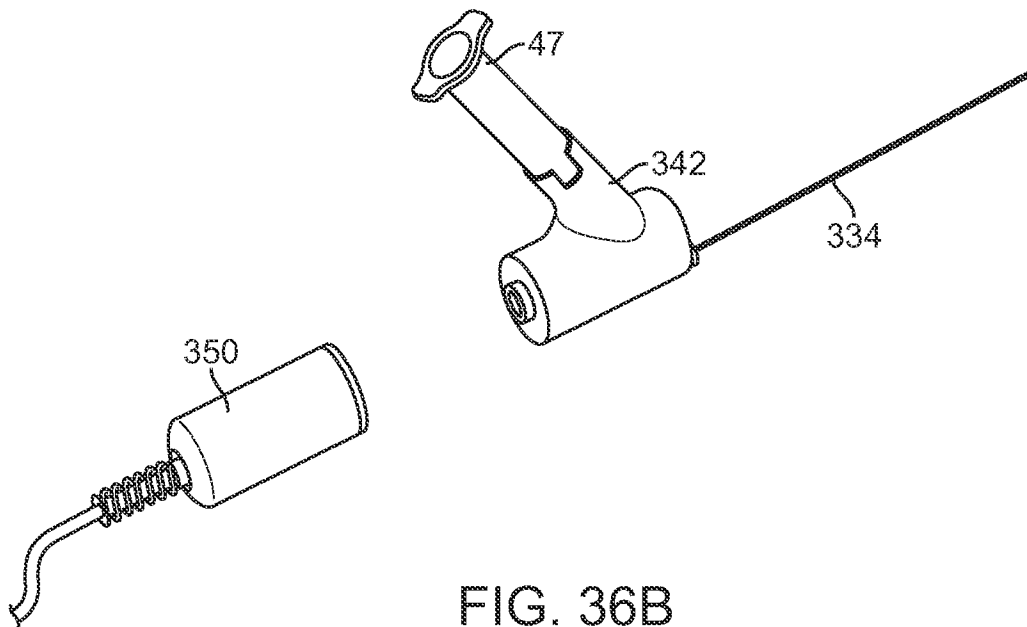


FIG. 36B


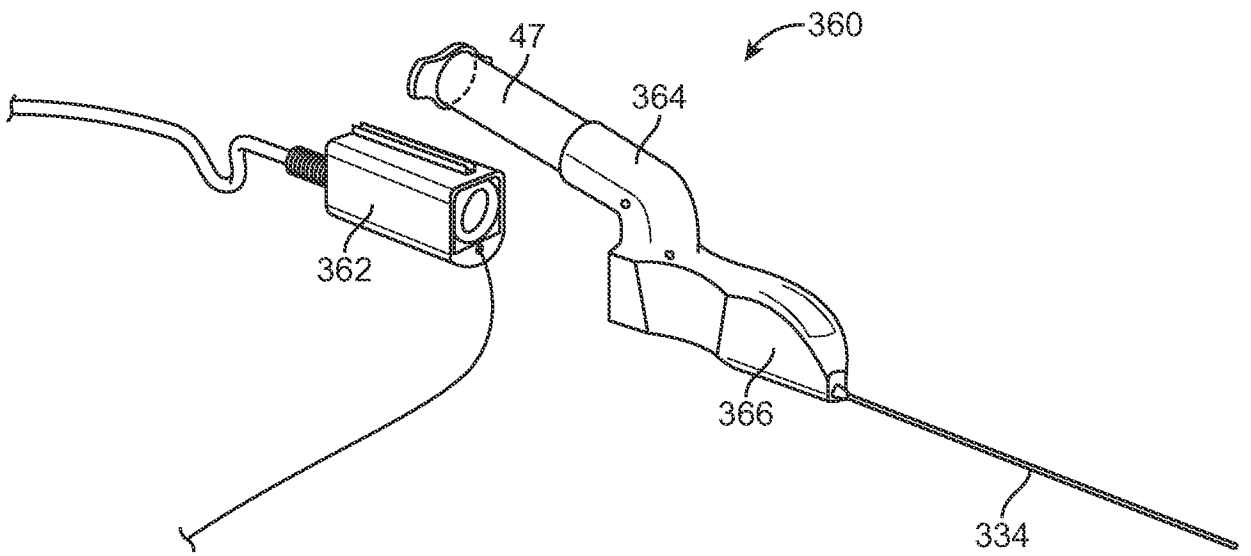


47/53

+

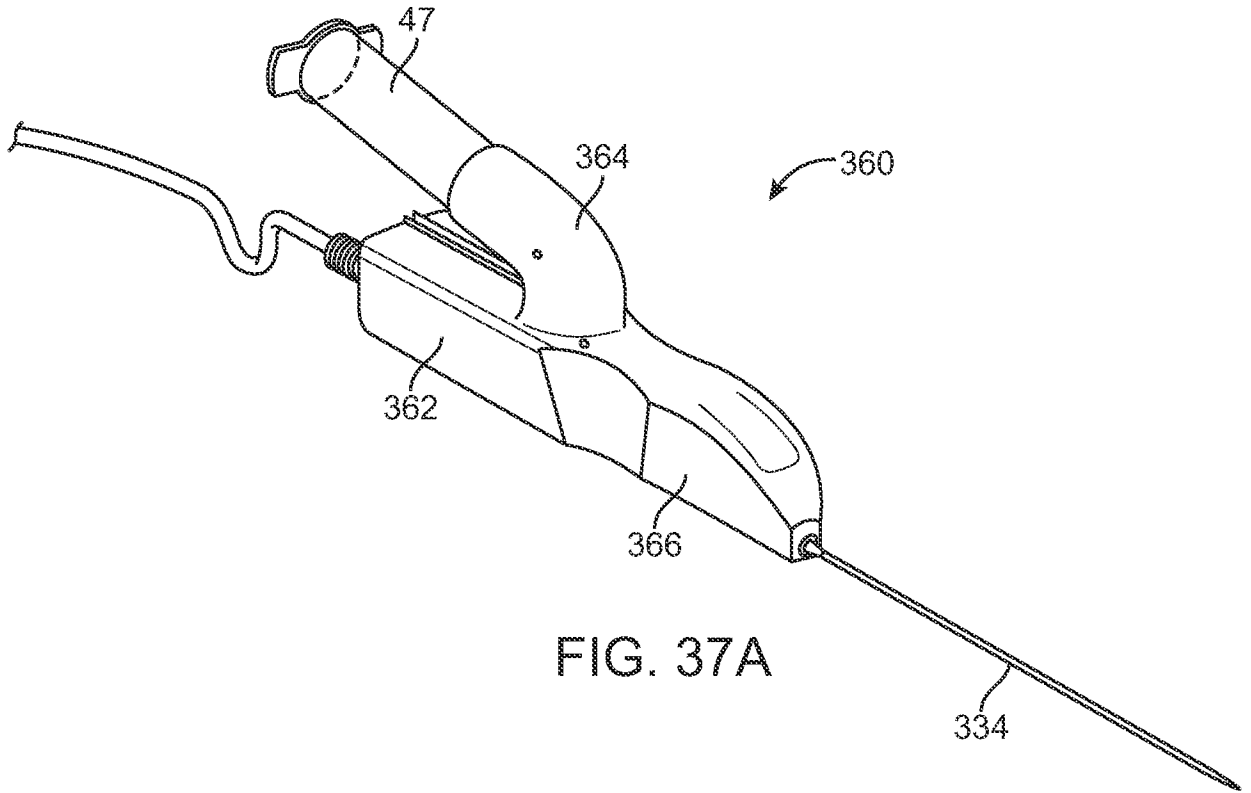

+

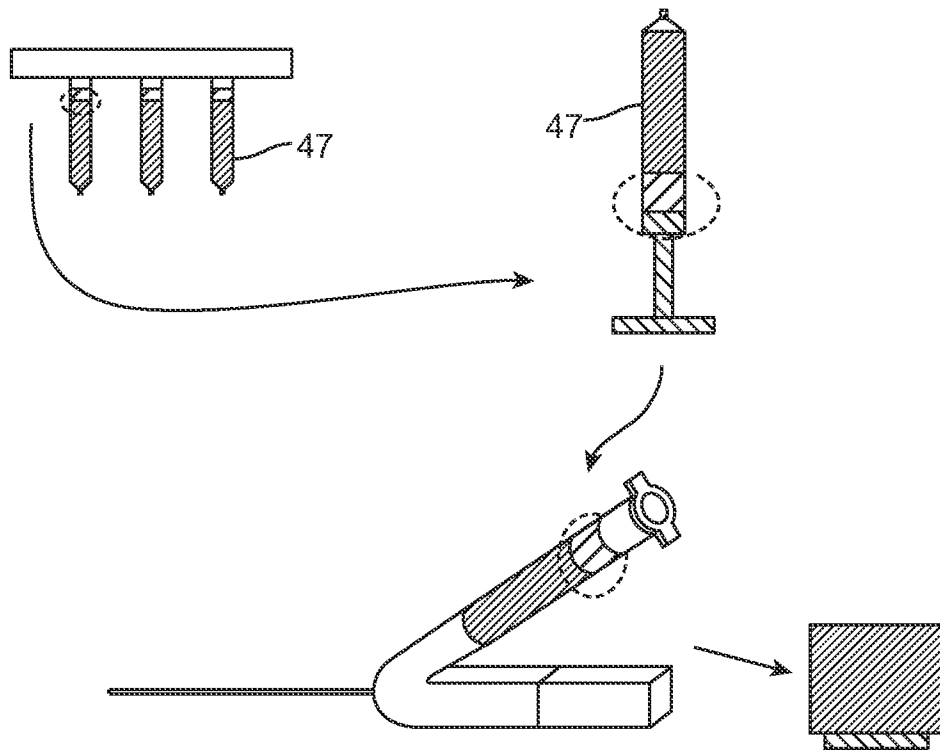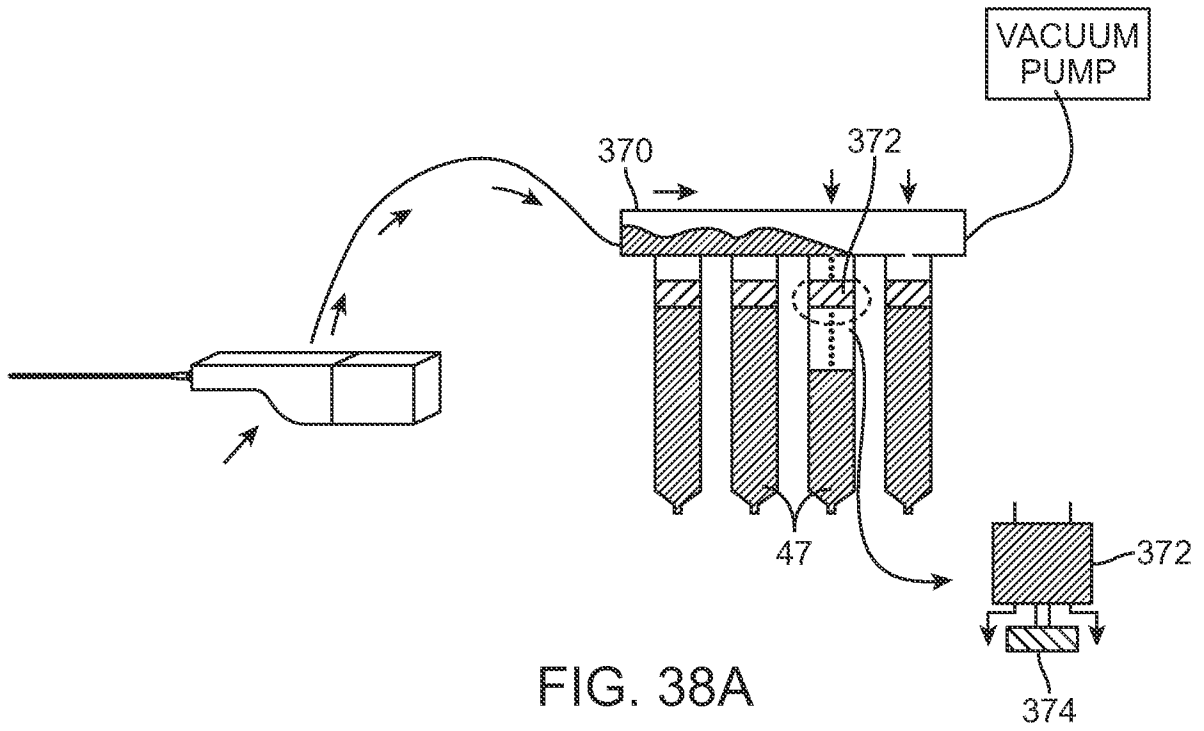

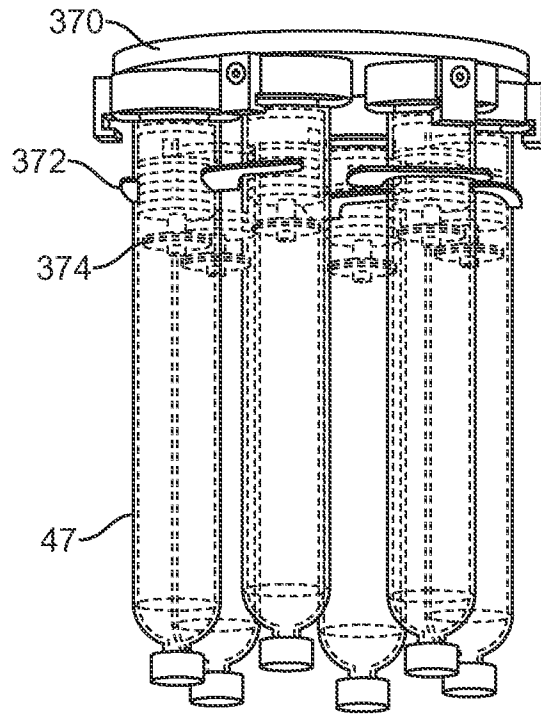


FIG. 39

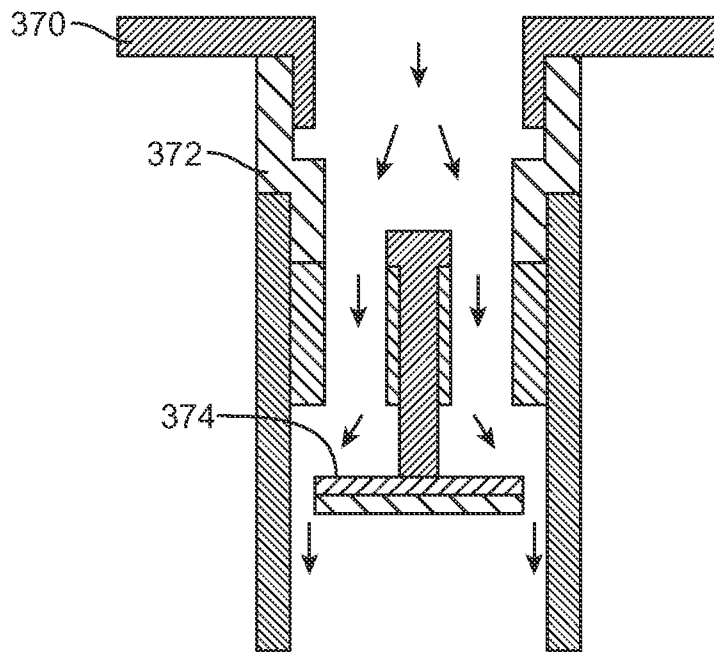


FIG. 40

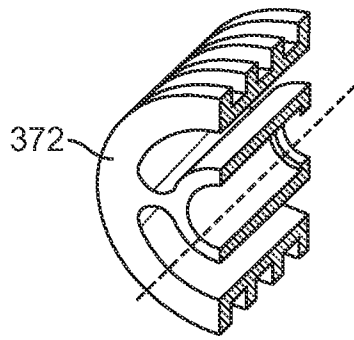


FIG. 41A

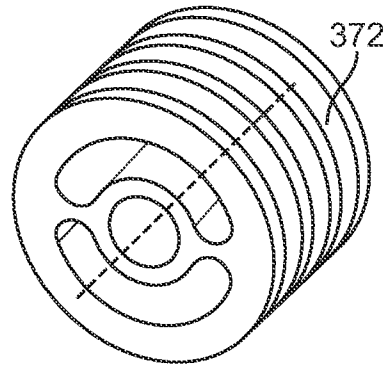


FIG. 41B

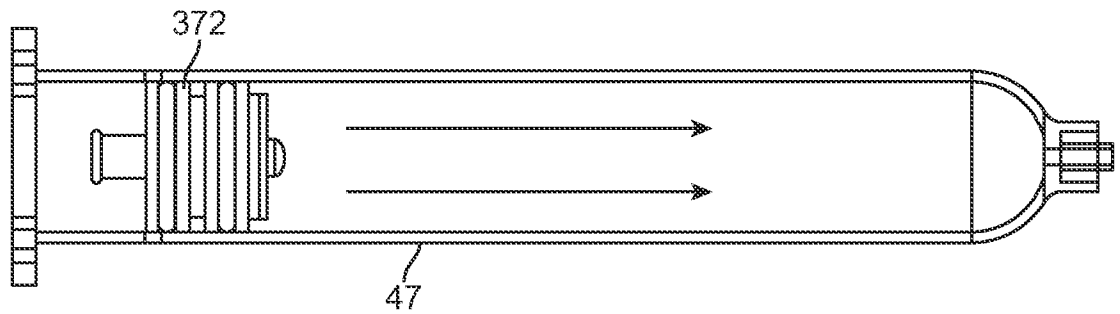


FIG. 42

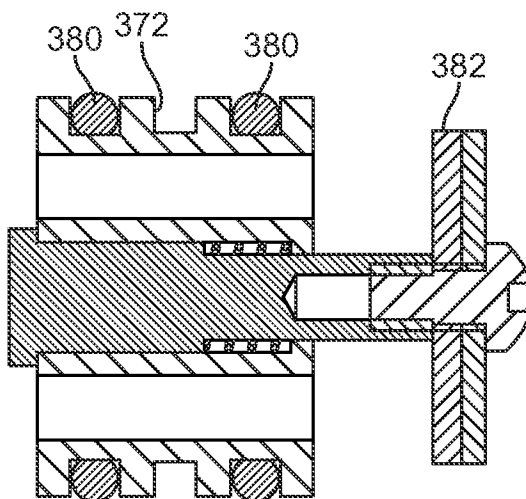


FIG. 43A

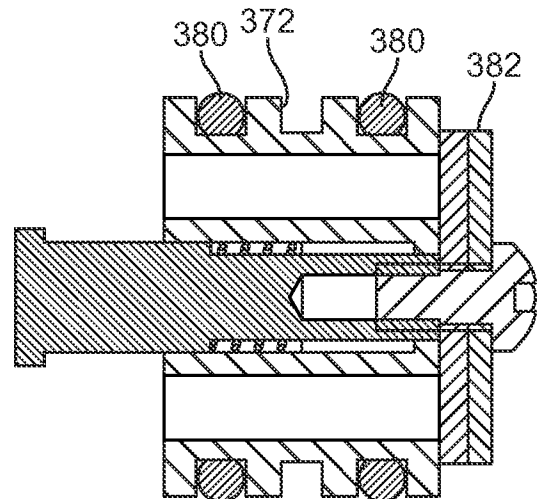


FIG. 43B



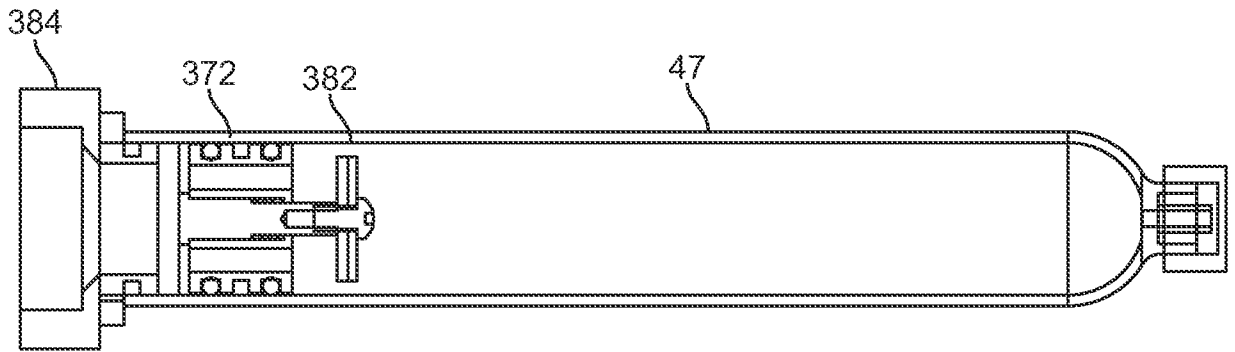


FIG. 44

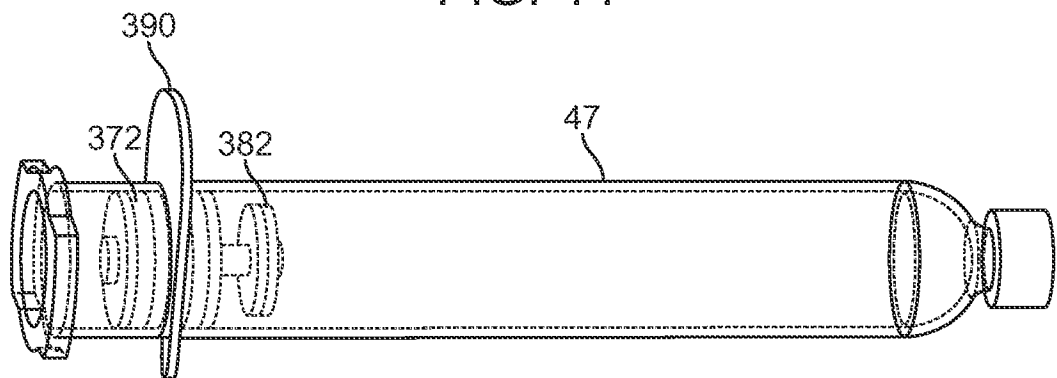


FIG. 45

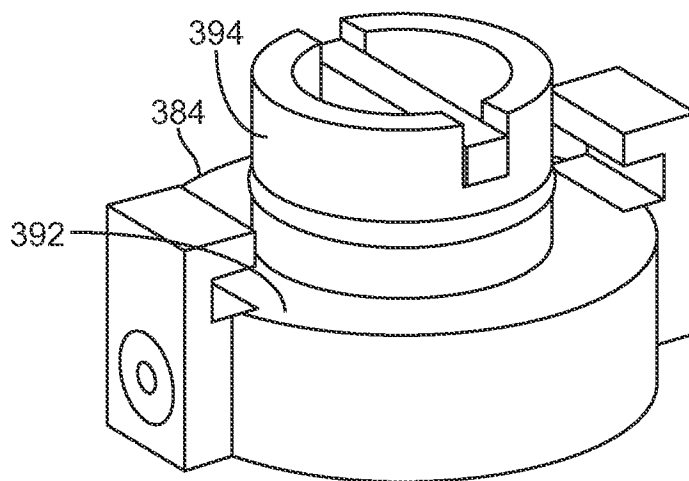


FIG. 46



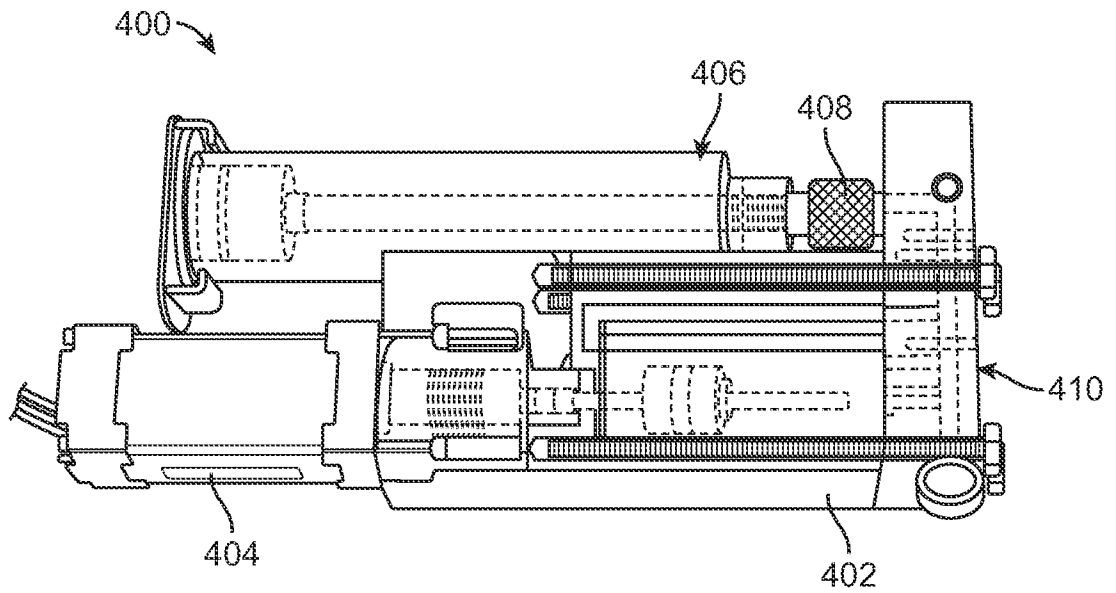


FIG. 47A

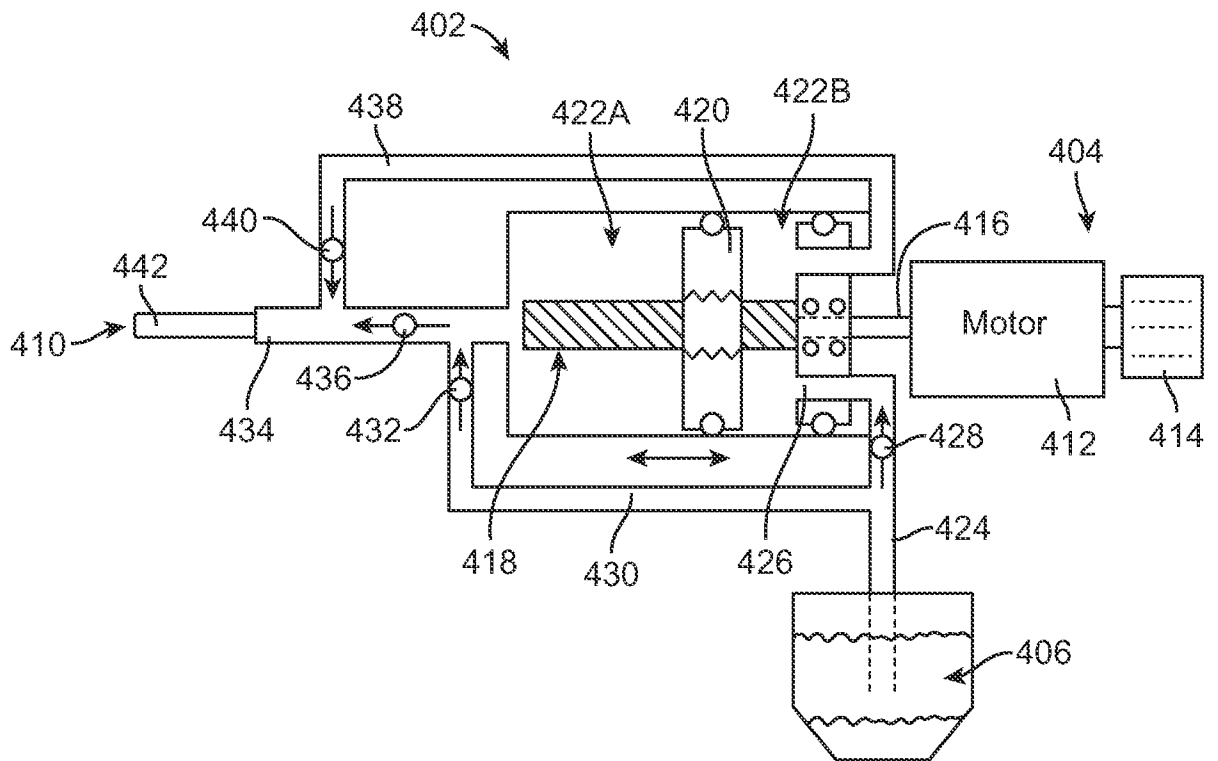


FIG. 47B

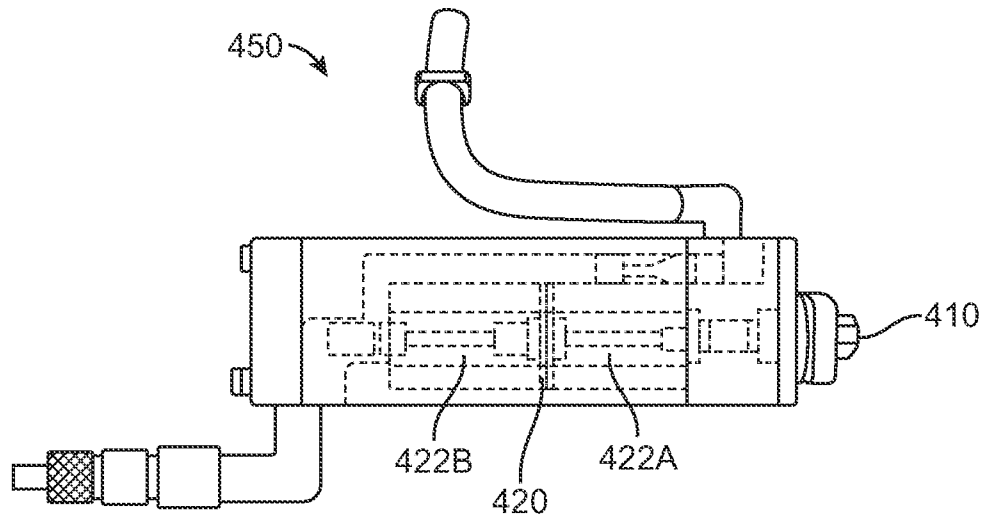


FIG. 48

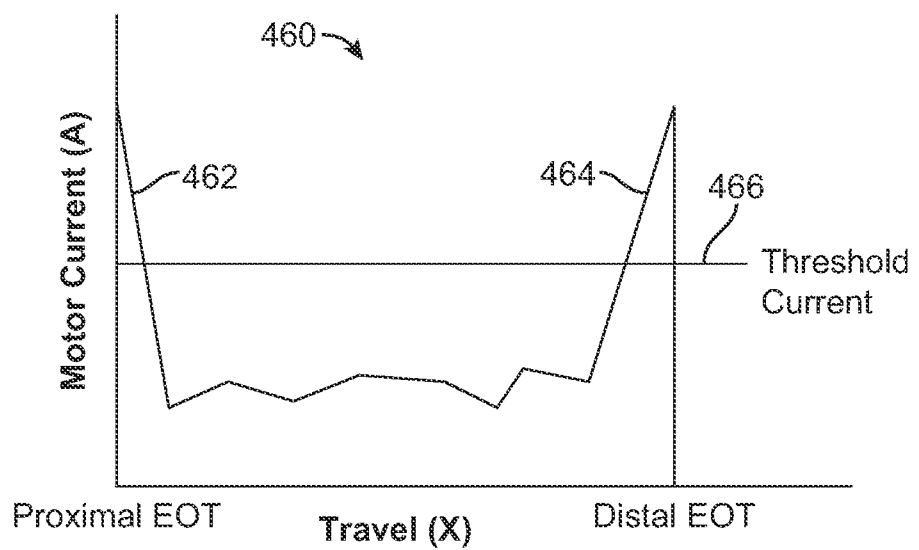


FIG. 49

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 12/24744

<p>A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - A61M 1/00 (2012.01) USPC - 604/542 According to International Patent Classification (IPC) or to both national classification and IPC</p>																				
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) US/IPC Classifications Searched IPC(8) - A61M1/00 (2012.01)</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched A61M5/00, 25/00, 25/01 604/19, 48, 500, 506, 93.01, 264, 540, 317, 319, 327</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PubWest (PGPB, USPT, EPAB, JPAB); Google Search Terms: Inject, deposit, transfer, transplant, fat, adipose, tissue, reservoir, cartridge, cannula, needle, conduit, removable, replaceable, hold, piston, plunger, withdraw, pull, housing, tube, rotatable, cutter, blade, fiber optic, determine, distinguish, tissue type</p>																				
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>US 2006/0224144 A1 (LEE) 05 October 2006 (05.10.2006) Entire document, especially Abstract, para[0059]- para[0068], para[0071]- para[0074] and FIGS. 1-2.</td> <td>1-52</td> </tr> <tr> <td>Y</td> <td>US 2009/0287190 A1 (SHIPPET) 19 November 2009 (19.11.2009) Abstract, para[0063] and FIG. 1.</td> <td>1-27, 44</td> </tr> <tr> <td>Y</td> <td>US 2010/0174162 A1 (GOUGH et al.) 08 July 2010 (08.07.2010) Abstract and para[0070].</td> <td>11-14, 23-24, 26, 28-52</td> </tr> <tr> <td>Y</td> <td>US 2002/0188280 A1 (NGUYEN et al.) 12 December 2002 (12.12.2002) Abstract, para[0012] and para[0076]-[0079].</td> <td>6, 31</td> </tr> <tr> <td>Y</td> <td>US 5,785,640 A (KRESCH et al.) 28 July 1998 (28.07.1998) col 8, ln 43-60 and FIG. 9B.</td> <td>8-9, 25-26, 37-38</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	Y	US 2006/0224144 A1 (LEE) 05 October 2006 (05.10.2006) Entire document, especially Abstract, para[0059]- para[0068], para[0071]- para[0074] and FIGS. 1-2.	1-52	Y	US 2009/0287190 A1 (SHIPPET) 19 November 2009 (19.11.2009) Abstract, para[0063] and FIG. 1.	1-27, 44	Y	US 2010/0174162 A1 (GOUGH et al.) 08 July 2010 (08.07.2010) Abstract and para[0070].	11-14, 23-24, 26, 28-52	Y	US 2002/0188280 A1 (NGUYEN et al.) 12 December 2002 (12.12.2002) Abstract, para[0012] and para[0076]-[0079].	6, 31	Y	US 5,785,640 A (KRESCH et al.) 28 July 1998 (28.07.1998) col 8, ln 43-60 and FIG. 9B.	8-9, 25-26, 37-38
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
Y	US 2006/0224144 A1 (LEE) 05 October 2006 (05.10.2006) Entire document, especially Abstract, para[0059]- para[0068], para[0071]- para[0074] and FIGS. 1-2.	1-52																		
Y	US 2009/0287190 A1 (SHIPPET) 19 November 2009 (19.11.2009) Abstract, para[0063] and FIG. 1.	1-27, 44																		
Y	US 2010/0174162 A1 (GOUGH et al.) 08 July 2010 (08.07.2010) Abstract and para[0070].	11-14, 23-24, 26, 28-52																		
Y	US 2002/0188280 A1 (NGUYEN et al.) 12 December 2002 (12.12.2002) Abstract, para[0012] and para[0076]-[0079].	6, 31																		
Y	US 5,785,640 A (KRESCH et al.) 28 July 1998 (28.07.1998) col 8, ln 43-60 and FIG. 9B.	8-9, 25-26, 37-38																		
<p><input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/></p>																				
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>“A” document defining the general state of the art which is not considered to be of particular relevance</td> <td>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>“E” earlier application or patent but published on or after the international filing date</td> <td>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>“O” document referring to an oral disclosure, use, exhibition or other means</td> <td>“&amp;” document member of the same patent family</td> </tr> <tr> <td>“P” document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			“A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	“E” earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	“O” document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family	“P” document published prior to the international filing date but later than the priority date claimed									
“A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
“E” earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
“O” document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family																			
“P” document published prior to the international filing date but later than the priority date claimed																				
<p>Date of the actual completion of the international search 09 June 2012 (19.06.2012)</p>		<p>Date of mailing of the international search report <b>22 JUN 2012</b></p>																		
<p>Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201</p>		<p>Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774</p>																		