

PROCESS TO DECOUPLE REGENERATION GAS COMPRESSOR FROM REGENERATION GAS TREATING

CROSS REFERENCE TO RELATED APPLICATIONS

- 5 [0001] This application claims the priority benefit of United States Patent Application 62/381,880 filed August 31, 2016 entitled PROCESS TO DECOUPLE REGENERATION GAS COMPRESSOR FROM REGENERATION GAS TREATING, the entirety of which is incorporated by reference herein.

BACKGROUND

10 Field of Disclosure

[0002] The disclosure relates generally to hydrocarbon processing, and more particularly, to regeneration of molecular sieve systems.

Description of Related Art

- 15 [0003] This section is intended to introduce various aspects of the art, which may be associated with the present disclosure. This discussion is intended to provide a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as an admission of prior art.

- 20 [0004] Molecular sieve systems are commonly used to treat natural gas streams by removing contaminants such as water, mercury, mercaptans or heavy hydrocarbons. Molecular sieves accumulate contaminants over time via adsorption and must be regenerated periodically in continuous service. Regeneration is accomplished by flowing heated gas, typically treated product gas, over the molecular sieve bed to remove the contaminants adsorbed during the regeneration gas bed's adsorption cycle. Molecular sieve regeneration gas systems may
25 contain processing equipment to remove these contaminants from the regeneration gas stream. Additionally, regeneration gas may be recycled upstream of the molecular sieve unit using a recycle compressor to recover the regeneration gas stream.

- 30 [0005] Figure 1 shows a regeneration gas system **100** used to support operation of a molecular sieve adsorbent vessel(s) **102** as is known in the art. A feed gas stream **104** enters the molecular sieve adsorbent vessel(s) **102** and contaminants in the feed gas stream **104** are removed thereby. A product gas stream **106** exits molecular sieve adsorbent vessel(s) **102**.

Contaminants accumulated in the molecular sieve adsorbent vessel(s) **102** are removed by flushing the molecular sieve with a regeneration gas stream **108**, which in this configuration comprises part of the product gas stream **106**. The regeneration gas stream **108** is first heated by a regeneration gas heater **109** and is directed to the molecular sieve adsorbent vessel to remove accumulated contaminants. Isolation valves **110**, **112** are opened so the regeneration gas stream **108** may flow through the regeneration gas system **100**. System **100** includes a compressor **114** that compresses the regeneration gas stream so that it may be recycled to the feed gas stream **104** upstream of the molecular sieve adsorbent vessel(s) **102**. A cooler **118** and liquids separation drum **122** are sized to remove the heat from the regeneration gas stream, condense contaminants (such as water) or product liquids (such as heavy hydrocarbons) and separate such contaminants or liquids **124** from the regeneration gas stream **108**. Cooler **118** may also serve to eliminate the heat of compression when compressor **114** is being operated in the recycle mode. The regeneration gas stream **108** may then be compressed in compressor **114**. Gas processing components, such as a process vessel **126** and filters **130**, may be included to further treat the regeneration gas stream **108**, such as for the removal of mercury. Such gas processing components typically are located between the isolation valves **110**, **112** and downstream of cooler **118** and liquids separation drum **122**. An anti-surge valve **134** may redirect the regeneration gas stream **108** between the isolation valves **110**, **112** to protect the compressor **114** from surges due to low flow conditions. If for some reason the compressor is not operational, the regeneration gas stream may be directed through an opened bypass valve **138** to be flared or treated in an alternate vapor recovery system (not shown). If the compressor is not operational and only a single cooler and liquids separation drum is provided between isolation valves **110**, **112** (i.e., within the regeneration gas system **100**), then processing the regeneration gas stream to remove contaminants or recover liquids prior to flaring or disposal may not be possible. If the regeneration gas stream is flared, contaminants may be unnecessarily released to the environment and/or revenue may be lost. If the regeneration gas stream is recycled back to the molecular sieve adsorbent vessel via the vapor recovery system, contaminants may accumulate and become concentrated in the main natural gas stream. What is needed is a means to remove contaminants from a regeneration gas stream that is usable when a related compressor is not operating.

SUMMARY

[0006] The present disclosure provides a method for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel. The regeneration gas stream

is cooled in a cooler to a temperature suitable to condense liquids in the regeneration gas stream. A separator removes liquids condensed in the regeneration gas stream. The regeneration gas stream is compressed in a compressor. The regeneration gas is flowed through the cooler, the separator, and a compressor when the compressor is operational. The
5 regeneration gas is flowed through the cooler and the separator but not the compressor when the compressor is not operational. Continuous treatment of the regeneration gas stream is thereby enabled.

[0007] The present disclosure also provides a contaminant removal system for continuously treating a regeneration gas stream of a molecular sieve adsorbent vessel. A cooler
10 is configured to cool the regeneration gas stream. A separator is configured to remove liquids in the regeneration gas stream condensed by the cooler. First and second isolation valves are located before and after the compressor and are configured to selectively permit the regeneration gas stream to pass therethrough. The cooler and the separator are not located between the first and second isolation valves. A controller controls the isolation valves to open
15 when the compressor is operational and to close when the compressor is not operational. The regeneration gas stream flows through the cooler and the separator regardless of whether the isolation valves are open or closed, thereby enabling continuous treatment of the regeneration gas stream.

[0008] The present disclosure also provides a method for continuously treating a
20 regeneration gas stream used to regenerate a molecular sieve adsorption vessel. The regeneration gas stream is cooled in a first cooler to a temperature suitable to condense liquids in the regeneration gas stream. A first separator removes the liquids condensed in the regeneration gas stream. The regeneration gas stream is cooled in a second cooler to perform at least one of (a) removing any remaining heat in the regeneration gas stream to bring the
25 regeneration gas stream down to a desired process temperature, and (b) to remove heat of compression added to the regeneration gas stream by a compressor when the compressor is operating in a recycle mode, wherein the second cooler is sized to accommodate the larger of a heat duty required for (a) or a heat duty required for (b). A second separator removes liquids condensed in the second cooler. The regeneration gas stream is compressed in a compressor.
30 The second cooler, the second separator, and the compressor are arranged between first and second isolation valves. The first and second isolation valves are opened when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor. The first and second isolation valves are closed when the

compressor is not operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the compressor. A bypass valve is opened to permit the regeneration gas stream to be flared or flowed to a vapor recovery system when the first and second isolation valves are closed, thereby enabling continuous treatment of the regeneration gas stream.

[0009] The foregoing has broadly outlined the features of the present disclosure so that the detailed description that follows may be better understood. Additional features will also be described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

10 [0010] These and other features, aspects and advantages of the disclosure will become apparent from the following description, appending claims and the accompanying drawings, which are briefly described below.

[0011] Figure 1 is a schematic diagram of a prior art regeneration gas treatment system.

15 [0012] Figure 2 is a schematic diagram of a regeneration gas treatment system according to the disclosed aspects.

[0013] Figure 3 is a schematic diagram of a regeneration gas treatment system according to the disclosed aspects.

[0014] Figure 4 is a schematic diagram of a regeneration gas treatment system according to the disclosed aspects.

20 [0015] Figure 5 is a schematic diagram of a valve control system according to disclosed aspects.

[0016] Figure 6 is a method according to aspects of the present disclosure.

[0017] Figure 7 is a method according to aspects of the present disclosure.

25 [0018] It should be noted that the figures are merely examples and no limitations on the scope of the present disclosure are intended thereby.

DETAILED DESCRIPTION

[0019] To promote an understanding of the principles of the disclosure, reference will now be made to the features illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the disclosure is thereby intended. Any alterations and further modifications, and any further applications of

the principles of the disclosure as described herein are contemplated as would normally occur to one skilled in the art to which the disclosure relates. For the sake of clarity, some features not relevant to the present disclosure may not be shown in the drawings.

5 [0020] At the outset, for ease of reference, certain terms used in this application and their meanings as used in this context are set forth. To the extent a term used herein is not defined below, it should be given the broadest definition persons in the pertinent art have given that term as reflected in at least one printed publication or issued patent. Further, the present techniques are not limited by the usage of the terms shown below, as all equivalents, synonyms, new developments, and terms or techniques that serve the same or a similar purpose are
10 considered to be within the scope of the present claims.

[0021] As one of ordinary skill would appreciate, different persons may refer to the same feature or component by different names. This document does not intend to distinguish between components or features that differ in name only. The figures are not necessarily to scale, but are drafted for purposes of convenience and clarity in illustrating various aspects of
15 the disclosure.

[0022] Certain features and components herein may be shown exaggerated in scale or in schematic form and some details of conventional elements may not be shown in the interest of clarity and conciseness. When referring to the figures described herein, the same reference numerals may be referenced in multiple figures for the sake of simplicity. In the following
20 description and in the claims, the terms “including” and “comprising” are used in an open-ended fashion, and thus, should be interpreted to mean “including, but not limited to.”

[0023] The articles “the,” “a” and “an” are not necessarily limited to mean only one, but rather are inclusive and open ended so as to include, optionally, multiple such elements.

25 [0024] As used herein, the terms “approximately,” “about,” “substantially,” and similar terms are intended to have a broad meaning in harmony with the common and accepted usage by those of ordinary skill in the art to which the subject matter of this disclosure pertains. It should be understood by those of skill in the art who review this disclosure that these terms are intended to allow a description of certain features described and claimed without restricting the scope of these features to the precise numeral ranges provided. Accordingly, these terms
30 should be interpreted as indicating that insubstantial or inconsequential modifications or alterations of the subject matter described and are considered to be within the scope of the disclosure.

[0025] As use herein, “heavy hydrocarbons” means hydrocarbons with a molecular structure containing three or more carbon atoms.

[0026] Aspects described herein allow a regeneration process used to regenerate a spent molecular sieve adsorbent material, including contaminant removal from the regeneration gas or recovery of liquids, to continue when the associated regeneration gas compressor is out of operation. The disclosed aspects include installing additional cooling and separation equipment to cool the regeneration gas and separate condensed liquids while the regeneration gas compressor is not operable or starting-up in full recycle. The disclosed aspects enable complete processing of the regeneration gas stream, thereby preventing undesirable emission of contaminants and allowing recovery of liquid products while the regeneration gas compressor is out of service.

[0027] Figure 2 depicts a regeneration gas system **200** used to regenerate a molecular sieve adsorbent vessel according to aspects of the disclosure. The molecular sieve adsorbent vessel, and the connections between the molecular sieve adsorbent vessel and the regeneration gas system **200**, may be as shown in Figure 1. For the purposes of clarity and brevity the molecular sieve adsorbent vessel **102** will not be shown in Figures 2-4; it is understood, however, that such vessel **102** and associated gas streams (e.g., **104**, **106**) are incorporated by reference into the remaining Figures. It is further understood that the particular molecular sieve adsorbent vessel and its configuration in Figure 1 is a non-limiting example of a molecular sieve adsorbent vessel that may be used with the regeneration gas systems disclosed herein, and that any other suitable vessel and/or configuration may be used with the aspects of the present disclosure. A regeneration gas stream **208**, which includes contaminants removed from the molecular sieve adsorbent vessel, is first processed by gas processing components **220** which are disposed outside of isolation valves **210**, **212**. The gas processing components **220** may include a first cooler **240**, a first liquids separation drum **242**, one or more process vessels **226**, and one or more filters **230**. First cooler **240** is sized to cool the regeneration gas stream **208** to a temperature suitable for use in the process vessel **226**, or to a temperature suitable for liquids knockout and recovery using, for example, the first liquids separation drum **242**. First cooler **240** may be an air cooler, a water cooler, or a refrigerant-based chiller such as a propane-based chiller. Additional coolers may be used as needed. The first liquids separation drum **242** may be used to remove condensed liquids (via first liquids stream **224**) from the regeneration gas stream at the process conditions. Process vessel **226** may be used for further treatment of the regeneration gas stream, such as for the removal of contaminants. Filters **230** may be

required depending on the nature of the process vessel **226**. An additional filter/coalescer element may be installed if required by the process vessel **226**.

[0028] Additional equipment is disposed between the isolation valves **210**, **212**. This additional equipment may include a second cooler **218**, a second liquids separation drum **222**, and a compressor. Second cooler **218** may be sized to reduce the temperature of the regeneration gas stream during normal operation to the required operating temperature, or to remove heat generated during full recycle operation of compressor **214**, whichever duty is largest. Second liquids separation drum **222** may be used to remove condensed liquids (via second liquids stream **223**) from the regeneration gas stream at the process conditions. Compressor **214** may be used during normal regeneration processes to recycle the processed regeneration gas stream **208a** upstream of the molecular sieve adsorbent vessel (not shown).

[0029] When the compressor is operational, i.e., when the compressor is operating normally and it is desired for the compressor to do so, the isolation valves **210**, **212** are open. Regeneration gas stream **208** flows through the gas processing components **220**, second cooler **218**, second liquids separation drum **222**, and compressor **214**, and is thereby cleaned and compressed sufficiently enough to be recycled upstream of the molecular sieve adsorbent vessel. When compressor **214** is not operational, i.e., when the compressor is not able to compress the regeneration gas or when it is not desired for the compressor to do so, isolation valves **210**, **212** are closed; regeneration gas stream **208** flows through the gas processing components **220** (which in Figure 2 include first cooler **240**, first liquids separation drum **242**, process vessel **226**, and filter **230**) and through a regeneration gas control valve **238** to a flare system or to an alternate vapor recovery system **244**. This allows the gas processing components **220** of the regeneration gas system **200** to operate while compressor **214** is not in operation. Additionally, compressor **214** may be operated in a full recycle mode using an anti-surge valve **234**, which connects part of the output of the compressor to an input of the second cooler. Using the anti-surge valve in this manner, the compressor may be re-started without interrupting flow of the regeneration gas stream **208**. Such an operation permits continued process treatment of regeneration gas and/or liquids recovery from the regeneration gas stream, in contrast to existing technology that would send contaminants and/or hydrocarbon liquids to flare, creating undesirable emissions.

[0030] Figure 3 depicts a regeneration gas system **300** for water and mercury removal from a regeneration gas stream according to aspects of the disclosure. System **300** is similar to system **200**, and similar components are identified by similar reference numbers herein. A

regeneration gas stream **308**, which includes contaminants removed from a molecular sieve adsorbent vessel (not shown), is first processed by gas processing components **320**, which in the aspect shown in Figure 3 include a first cooler **340**, a first liquids separation drum **342**, and a mercury removal unit **326**. First cooler **340** is sized to cool the regeneration gas stream **308** to a temperature suitable for use in first liquids separation drum **342** and mercury removal unit **326**. First cooler **340** may be an air cooler, a water cooler, or a refrigerant-based chiller such as a propane-based chiller. Additional coolers may be used as needed. First liquids separation drum **342** removes condensed liquids (via first liquids stream **324**) from the regeneration gas stream after being cooled in the first cooler. In an aspect, first liquids stream may principally comprise water. Filters **330** may be required to prevent dust from mercury removal unit **326** traveling into equipment or valves downstream of the mercury removal unit. An additional filter/coalescer may be added upstream of mercury removal unit **326** if required.

[0031] A second cooler **318**, a second liquids separation drum **322**, and a compressor **314** are disposed between isolation valves **310**, **312**. Second cooler **318** may be sized to reduce the temperature of the regeneration gas stream during normal operation to the required operating temperature, or to remove heat generated during full recycle operation of compressor **314**, whichever duty is largest. Second liquids separation drum **322** may be used to remove condensed liquids (via liquids stream **323**) from the regeneration gas stream at the process conditions. Compressor **314** may be used during normal regeneration processes to recycle the processed regeneration gas stream **308a** upstream of the molecular sieve adsorbent vessel (not shown).

[0032] When the compressor is operational, the isolation valves **310**, **312** are open. Regeneration gas stream **308** flows through the gas processing components **320**, second cooler **318**, second liquids separation drum **322**, and compressor **314**, and is thereby cleaned and compressed sufficiently enough to be recycled upstream of the molecular sieve adsorbent vessel. When compressor **314** is not operational, isolation valves **310**, **312** are closed; regeneration gas stream **308** flows through the gas processing components **320** (which in Figure 3 include first cooler **340**, first liquids separation drum **342**, mercury removal unit **326**, and filter **330**) and through a regeneration gas control valve **338** to a flare system or to an alternate vapor recovery system **344**. This allows the gas processing components **320** of the regeneration gas system **300** to operate while compressor **314** is not in operation. Additionally, compressor **314** may be operated in a full recycle mode using an anti-surge valve **334**, which connects part of the output of the compressor to an input of the second cooler. Using the anti-surge valve in this

manner, the compressor may be re-started without interrupting flow of the regeneration gas stream **308**. Such an operation permits continued mercury removal and/or liquids recovery from the regeneration gas stream, in contrast to existing technology that would send mercury to the flare, creating undesirable emissions.

5 **[0033]** Figure 4 shows a regeneration gas system **400** for heavy hydrocarbon liquids recovery according to aspects of the disclosure. System **400** is similar to systems **200** and **300**, and similar components are identified by similar reference numbers herein. A regeneration gas stream **408**, which contains contaminants such as heavy hydrocarbons removed from a molecular sieve adsorbent vessel (not shown), is first processed by gas processing components
10 **420**, which in Figure 4 include a first cooler **440** and a hydrocarbon liquids separation drum **442**. The first cooler **440**, which like cooler **240** may comprise one or more air coolers, water cooler, or refrigerant-based chillers, may be sized to cool the regeneration gas stream **408** to a temperature suitable for heavy hydrocarbon liquids knockout and recovery. The hydrocarbon liquids separation drum **442** removes condensed hydrocarbon product (via first hydrocarbon
15 liquids stream **424**) from the regeneration gas stream at the process conditions. In an aspect, first cooler **440** provide sufficient duty to condense all liquids in regeneration gas stream **408**, and hydrocarbon liquids separation drum **442** then separates all such liquids as previously described, including any water present in the regeneration gas stream.

[0034] A second cooler **418**, a liquids separation drum **422**, and a compressor **414** are
20 disposed between isolation valves **410**, **412**. Second cooler **418** may be sized to reduce the temperature of the regeneration gas stream **408** during normal operation to the required operating temperature, or to remove heat during full recycle operation of the compressor, whichever duty is largest. If the first cooler **440** is a refrigerant based chiller, then during normal operation the second cooler may chill the regeneration gas stream **408** to its lowest
25 temperature, and second cooler **418** is only needed during full recycle operation of compressor **414**. Liquids separation drum **422** is used to remove condensed liquids (via liquids stream **423**) from the regeneration gas stream at the process conditions. Compressor **414** may be used during normal operation to recycle the processed regeneration gas stream **408a** upstream of the molecular sieve adsorption vessel (not shown).

30 **[0035]** When the compressor is operational, isolation valves **410**, **412** are open. Regeneration gas stream **408** flows through the gas processing components **420**, second cooler **418**, liquids separation drum **422**, and compressor **414**, and is thereby cleaned and compressed sufficiently to be recycled upstream of the molecular sieve adsorbent vessel as previously

described. When the compressor **414** is not operational, the isolation valves **410**, **412** are closed. Regeneration gas stream **408** flows through first cooler **440** and hydrocarbon liquids separation drum **442**, and then through the regeneration gas control valve **438** to a flare system or to an alternate vapor recovery system **444**. This allows the gas processing components **420** of the regeneration gas system to operate while the compressor **414** is not in operation. Additionally, compressor **414** may be operated in a full recycle mode using the anti-surge valve **434**, which connects part of the output of the compressor to an input of the second cooler. Using the anti-surge valve in this manner, the compressor may be re-started without interrupting flow of the regeneration gas stream. Such an operation permits continued recovery of liquid heavy hydrocarbon from the regeneration gas that may otherwise be destroyed in the flare or be unrecoverable in an alternate vapor recovery system.

[0036] If first cooler **440** provides sufficient cooling duty – for example, if first cooler is a propane-based chiller – then most if not all of the liquids in the regeneration gas stream will be separated by hydrocarbon liquids separation drum **442**. In that case it may be possible to significantly reduce the size of second cooler **418**, as the purpose of the second cooler would be reduced to removing heat from the regeneration gas stream added by compressor **414**. In an additional aspect, liquids separation drum **422** could be eliminated from the regeneration gas system **400**, instead relying on first cooler **440** and hydrocarbon liquids separation drum **442** to remove heat and separate condensed liquids from the regeneration gas stream. Furthermore, the first liquids separation drum **242**, **342** may be eliminated from the regeneration gas systems **200**, **300** shown in Figures 2 and 3, by combining unit operations in a single process vessel **226**, (or mercury removal unit **326**) to remove contaminants and condensed liquids from the regeneration gas stream.

[0037] Figure 5 is a schematic depiction of a valve control system **500** according to aspects of the disclosure, which may be used to actuate the valves in any of the disclosed aspects as shown in Figures 2-4. Valve control system **500** includes a valve controller **502** that is operationally connected to the isolation valves **210**, **212**, the anti-surge valve **234**, and bypass valve **238**. Valve controller **502** may be manually operated by an operator to selectively open and close these valves in response to process conditions and the disclosed methods of operation. Alternatively, the valve controller may selectively open and close these valves in response to signals from a computer, processor, and/or other automated equipment that uses pre-determined logic or algorithms to maintain and change operating states of the components of a gas processing facility in response to such process conditions and the disclosed methods of

operation.

[0038] Figure 6 is a flowchart of a method **600** for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel according to disclosed aspects. At block **602** the regeneration gas stream is cooled in a cooler to a temperature suitable to
5 condense liquids in the regeneration gas stream. At block **604** a separator removes liquids condensed in the regeneration gas stream. At block **606** the regeneration gas stream is compressed in a compressor. At block **608** the regeneration gas stream is flowed through the cooler, the separator, and the compressor when the compressor is operational. At block **610**
10 the regeneration gas stream is flowed through the second cooler and the second separator but not the compressor when the compressor is not operational.

[0039] Figure 7 is a flowchart of a method **700** for treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel according to disclosed aspects. At block **702** the regeneration gas stream is cooled in a first cooler to a temperature suitable to condense
15 liquids in the regeneration gas stream. At block **704** a separator removes liquids condensed in the regeneration gas stream. At block **706** the regeneration gas stream is cooled in a second cooler to perform at least one of (a) removing any remaining heat in the regeneration gas stream to bring the regeneration gas stream down to a desired process temperature, and (b) removing
20 heat of compression added to the regeneration gas stream by a compressor when the compressor is operating in a recycle mode, wherein the second cooler is sized to accommodate the larger of a heat duty required for (a) or a heat duty required for (b). At block **708** a second separator removes liquids condensed in the second cooler. At block **710** the regeneration gas stream is compressed in the compressor. At block **712** the compressor, the second cooler, and the second
25 separator are arranged between first and second isolation valves. At block **714** the first and second isolation valves are opened when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor. At block **716** the first and second isolation valves are closed when the compressor is not
30 operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the compressor. At block **718** a bypass valve is opened, to permit the regeneration gas stream to be flared or flowed to a vapor recovery system when the first and second isolation valves are closed.

[0040] Disclosed aspects may include any combinations of the methods and systems shown in the following numbered paragraphs. This is not to be considered a complete listing of all possible aspects, as any number of variations can be envisioned from the description above.

1. A method for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel, comprising:

cooling the regeneration gas stream in a cooler to a temperature suitable to condense liquids in the regeneration gas stream;

5 in a separator, removing liquids condensed in the regeneration gas stream;

compressing the regeneration gas stream in a compressor;

flowing the regeneration gas stream through the cooler, the separator, and the compressor when the compressor is operational; and

10 flowing the regeneration gas stream through the cooler and the separator but not the compressor when the compressor is not operational, thereby enabling continuous treatment of the regeneration gas stream.

2. The method of paragraph 1, wherein the cooler is a first cooler and the separator is a second separator, and further comprising:

15 cooling the regeneration gas stream in a second cooler to remove at least part of the heat added to the regeneration gas stream when the regeneration gas stream is compressed by the compressor;

in a second separator, removing liquids condensed in the second cooler;

arranging the second cooler, the second separator, and the compressor between first and second isolation valves;

20 opening the first and second isolation valves when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor; and

25 closing the first and second isolation valves when the compressor is not operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the compressor.

3. The method of paragraph 1, further comprising:

permitting the regeneration gas stream to bypass the second cooler, the second separator, and the compressor after passing through the first cooler and the first separator, thereby enabling continuous treatment of the regeneration gas stream.

30 4. The method of paragraph 2 or paragraph 3, further comprising:

flaring the regeneration gas stream when the regeneration gas stream is permitted to bypass the second cooler, the second separator, and the compressor.

5. The method of paragraph 2 or paragraph 3, further comprising:

recovering vapor from the regeneration gas stream when the regeneration gas stream is permitted to bypass the second cooler, the second separator, and the compressor, thereby enabling continuous treatment of the regeneration gas stream.

6. The method of paragraph 1, further comprising:

removing contaminants from the regeneration gas stream in a process vessel that is located so that the regeneration gas stream flows therethrough when the compressor is operational and when the compressor is not operational.

7. The method of paragraph 6, wherein the process vessel removes mercury from the regeneration gas stream.

8. The method of paragraph 2, further comprising:

separating heavy hydrocarbons liquids from the regeneration gas stream in the first separator.

9. The method of paragraph 8, further comprising:

cooling the regeneration gas stream in the first cooler to a temperature at which heavy hydrocarbons condense.

10. A contaminant removal system for continuously treating a regeneration gas stream of a molecular sieve adsorbent vessel, comprising:

a cooler configured to cool the regeneration gas stream;

a separator configured to remove liquids in the regeneration gas stream condensed by the cooler;

a compressor that compresses the regeneration gas stream after liquids have been removed therefrom by the separator;

first and second isolation valves located before and after the compressor and configured to selectively permit the regeneration gas stream to pass therethrough, wherein the cooler and the separator are not located between the first and second isolation valves; and

a controller that controls the isolation valves to open when the compressor is operational and to close when the compressor is not operational;

wherein the regeneration gas stream flows through the cooler and the separator regardless of whether the isolation valves are open or closed, thereby enabling continuous treatment of the regeneration gas stream.

11. The containment removal system of paragraph 10, wherein the cooler is a first
5 cooler and the separator is a first separator, and further comprising:

a second cooler configured to cool the regeneration gas stream;

a second separator configured to remove liquids condensed by the second cooler;
wherein the second cooler and second separator are disposed between the first and second
isolation valves such that the regeneration gas stream flows through the first cooler, the first
10 separator, the first isolation valve, the second cooler, the second separator, the compressor, and
the second isolation valve when the first and second isolation valves are open.

12. The contaminant removal system of paragraph 10, further comprising a bypass
valve configured to permit the regeneration gas stream to bypass the second cooler, the second
separator, and the compressor after passing through the first cooler and the first separator, when
15 the first and second isolation valves are closed, thereby enabling continuous treatment of the
regeneration gas stream.

13. The contaminant removal system of paragraph 12, further comprising a flare
system configured to flare the regeneration gas stream flowing through the bypass valve.

14. The contaminant removal system of paragraph 12, further comprising a vapor
20 recovery system configured to recover vapor from the regeneration gas stream flowing through
the bypass valve.

15. The contaminant removal system of paragraph 10, further comprising a process
vessel configured to remove contaminants from the regeneration gas stream, wherein the
process vessel is located so that the regeneration gas stream flows therethrough when the
25 compressor is operational and when the compressor is not operational.

16. The contaminant removal system of paragraph 15, wherein the process vessel
comprises a mercury removal vessel.

17. The contaminant removal system of paragraph 10, wherein the separator
comprises a knockout drum configured to separate heavy hydrocarbons liquids from the
30 regeneration gas stream.

18. The contaminant removal system of paragraph 17, wherein the cooler is

configured to cool the regeneration gas stream to a temperature at which heavy hydrocarbons condense.

19. A method for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel, comprising:

5 cooling the regeneration gas stream in a first cooler to a temperature suitable to condense liquids in the regeneration gas stream;

in a separator, removing liquids condensed in the regeneration gas stream;

cooling the regeneration gas stream in a second cooler to perform at least one of;

(a) removing any remaining heat in the regeneration gas stream to bring the
10 regeneration gas stream down to a desired process temperature, and

(b) removing heat of compression added to the regeneration gas stream by a compressor when the compressor is operating in a recycle mode,

wherein the second cooler is sized to accommodate the larger of a heat duty required for (a) or a heat duty required for (b);

15 in a second separator, removing liquids condensed in the second cooler;

compressing the regeneration gas stream in the compressor;

arranging the second cooler, the second separator, and the compressor between first and second isolation valves;

20 opening the first and second isolation valves when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor;

closing the first and second isolation valves when the compressor is not operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the compressor; and

25 opening a bypass valve to permit the regeneration gas stream to be flared or flowed to a vapor recovery system when the first and second isolation valves are closed, thereby enabling continuous treatment of the regeneration gas stream.

20. The method of paragraph 19, further comprising:

30 removing contaminants from the regeneration gas stream in a process vessel that is located so that the regeneration gas stream flows therethrough when the compressor is

operational and when the compressor is not operational.

[0041] It should be understood that the numerous changes, modifications, and alternatives to the preceding disclosure can be made without departing from the scope of the disclosure. The preceding description, therefore, is not meant to limit the scope of the disclosure. Rather, 5 the scope of the disclosure is to be determined only by the appended claims and their equivalents. It is also contemplated that structures and features in the present examples can be altered, rearranged, substituted, deleted, duplicated, combined, or added to each other.

CLAIMS

What is claimed is:

1. A method for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel, comprising:

5 cooling the regeneration gas stream in a cooler to a temperature suitable to condense liquids in the regeneration gas stream;

in a separator, removing liquids condensed in the regeneration gas stream;

compressing the regeneration gas stream in a compressor;

10 flowing the regeneration gas stream through the cooler, the separator, and the compressor when the compressor is operational; and

flowing the regeneration gas stream through the cooler and the separator but not the compressor when the compressor is not operational, thereby enabling continuous treatment of the regeneration gas stream.

15 2. The method of claim 1, wherein the cooler is a first cooler and the separator is a second separator, and further comprising:

cooling the regeneration gas stream in a second cooler to remove at least part of the heat added to the regeneration gas stream when the regeneration gas stream is compressed by the compressor;

20 in a second separator, removing liquids condensed in the second cooler;

arranging the second cooler, the second separator, and the compressor between first and second isolation valves;

25 opening the first and second isolation valves when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor; and

closing the first and second isolation valves when the compressor is not operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the compressor.

30

3. The method of claim 2, further comprising:

permitting the regeneration gas stream to bypass the second cooler, the second separator, and the compressor after passing through the first cooler and the first separator, thereby enabling continuous treatment of the regeneration gas stream.

5

4. The method of claim 2 or claim 3, further comprising:

flaring the regeneration gas stream when the regeneration gas stream is permitted to bypass the second cooler, the second separator, and the compressor.

10 5. The method of claim 2 or claim 3, further comprising:

recovering vapor from the regeneration gas stream when the regeneration gas stream is permitted to bypass the second cooler, the second separator, and the compressor, thereby enabling continuous treatment of the regeneration gas stream.

15 6. The method of claim 1, further comprising:

removing contaminants from the regeneration gas stream in a process vessel that is located so that the regeneration gas stream flows therethrough when the compressor is operational and when the compressor is not operational.

20 7. The method of claim 6, wherein the process vessel removes mercury from the regeneration gas stream.

8. The method of claim 2, further comprising:

25 separating heavy hydrocarbons liquids from the regeneration gas stream in the first separator.

9. The method of claim 8, further comprising:

cooling the regeneration gas stream in the first cooler to a temperature at which heavy hydrocarbons condense.

30

10. A contaminant removal system for continuously treating a regeneration gas stream of a molecular sieve adsorbent vessel, comprising:

a cooler configured to cool the regeneration gas stream;

a separator configured to remove liquids in the regeneration gas stream condensed by the cooler;

5 a compressor that compresses the regeneration gas stream after liquids have been removed therefrom by the separator;

first and second isolation valves located before and after the compressor and configured to selectively permit the regeneration gas stream to pass therethrough, wherein the cooler and the separator are not located between the first and second isolation valves; and

10 a controller that controls the isolation valves to open when the compressor is operational and to close when the compressor is not operational;

wherein the regeneration gas stream flows through the cooler and the separator regardless of whether the isolation valves are open or closed, thereby enabling continuous treatment of the regeneration gas stream.

15 11. The containment removal system of claim 10, wherein the cooler is a first cooler and the separator is a first separator, and further comprising:

a second cooler configured to cool the regeneration gas stream;

20 a second separator configured to remove liquids condensed by the second cooler; wherein the second cooler and second separator are disposed between the first and second isolation valves such that the regeneration gas stream flows through the first cooler, the first separator, the first isolation valve, the second cooler, the second separator, the compressor, and the second isolation valve when the first and second isolation valves are open.

25 12. The contaminant removal system of claim 10, further comprising a bypass valve configured to permit the regeneration gas stream to bypass the second cooler, the second separator, and the compressor after passing through the first cooler and the first separator, when the first and second isolation valves are closed, thereby enabling continuous treatment of the regeneration gas stream.

30 13. The contaminant removal system of claim 12, further comprising a flare system configured to flare the regeneration gas stream flowing through the bypass valve.

14. The contaminant removal system of claim 12, further comprising a vapor recovery system configured to recover vapor from the regeneration gas stream flowing through the bypass valve.

5

15. The contaminant removal system of claim 10, further comprising a process vessel configured to remove contaminants from the regeneration gas stream, wherein the process vessel is located so that the regeneration gas stream flows therethrough when the compressor is operational and when the compressor is not operational.

10

16. The contaminant removal system of claim 15, wherein the process vessel comprises a mercury removal vessel.

17. The contaminant removal system of claim 10, wherein the separator comprises a knockout drum configured to separate heavy hydrocarbons liquids from the regeneration gas stream.

15

18. The contaminant removal system of claim 17, wherein the cooler is configured to cool the regeneration gas stream to a temperature at which heavy hydrocarbons condense.

20

19. A method for continuously treating a regeneration gas stream used to regenerate a molecular sieve adsorption vessel, comprising:

cooling the regeneration gas stream in a first cooler to a temperature suitable to condense liquids in the regeneration gas stream;

25

in a separator, removing liquids condensed in the regeneration gas stream;

cooling the regeneration gas stream in a second cooler to perform at least one of

(a) removing any remaining heat in the regeneration gas stream to bring the regeneration gas stream down to a desired process temperature, and

(b) removing heat of compression added to the regeneration gas stream by a compressor when the compressor is operating in a recycle mode,

30

wherein the second cooler is sized to accommodate the larger of a heat duty required for (a) or a heat duty required for (b);

in a second separator, removing liquids condensed in the second cooler;
compressing the regeneration gas stream in the compressor;
arranging the second cooler, the second separator, and the compressor between first and second isolation valves;

5 opening the first and second isolation valves when the compressor is operational, to permit the regeneration gas stream to flow to the second cooler, the second separator, and the compressor;

 closing the first and second isolation valves when the compressor is not operational, to prevent the regeneration gas stream to flow to the second cooler, the second separator, and the
10 compressor; and

 opening a bypass valve to permit the regeneration gas stream to be flared or flowed to a vapor recovery system when the first and second isolation valves are closed, thereby enabling continuous treatment of the regeneration gas stream.

15 20. The method of claim 19, further comprising:

 removing contaminants from the regeneration gas stream in a process vessel that is located so that the regeneration gas stream flows therethrough when the compressor is operational and when the compressor is not operational.

20

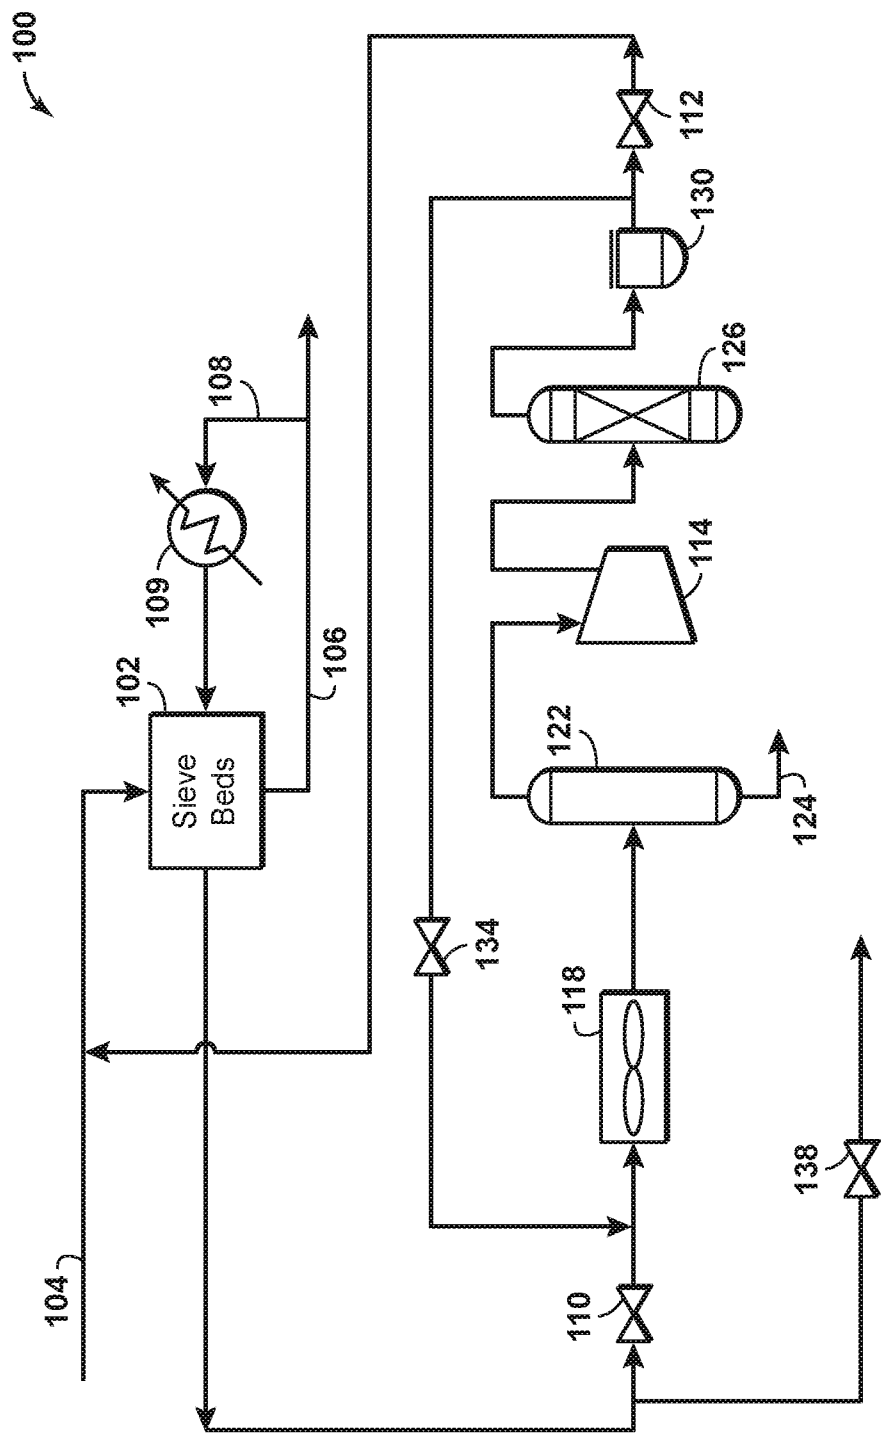


FIG. 1
(Prior Art)

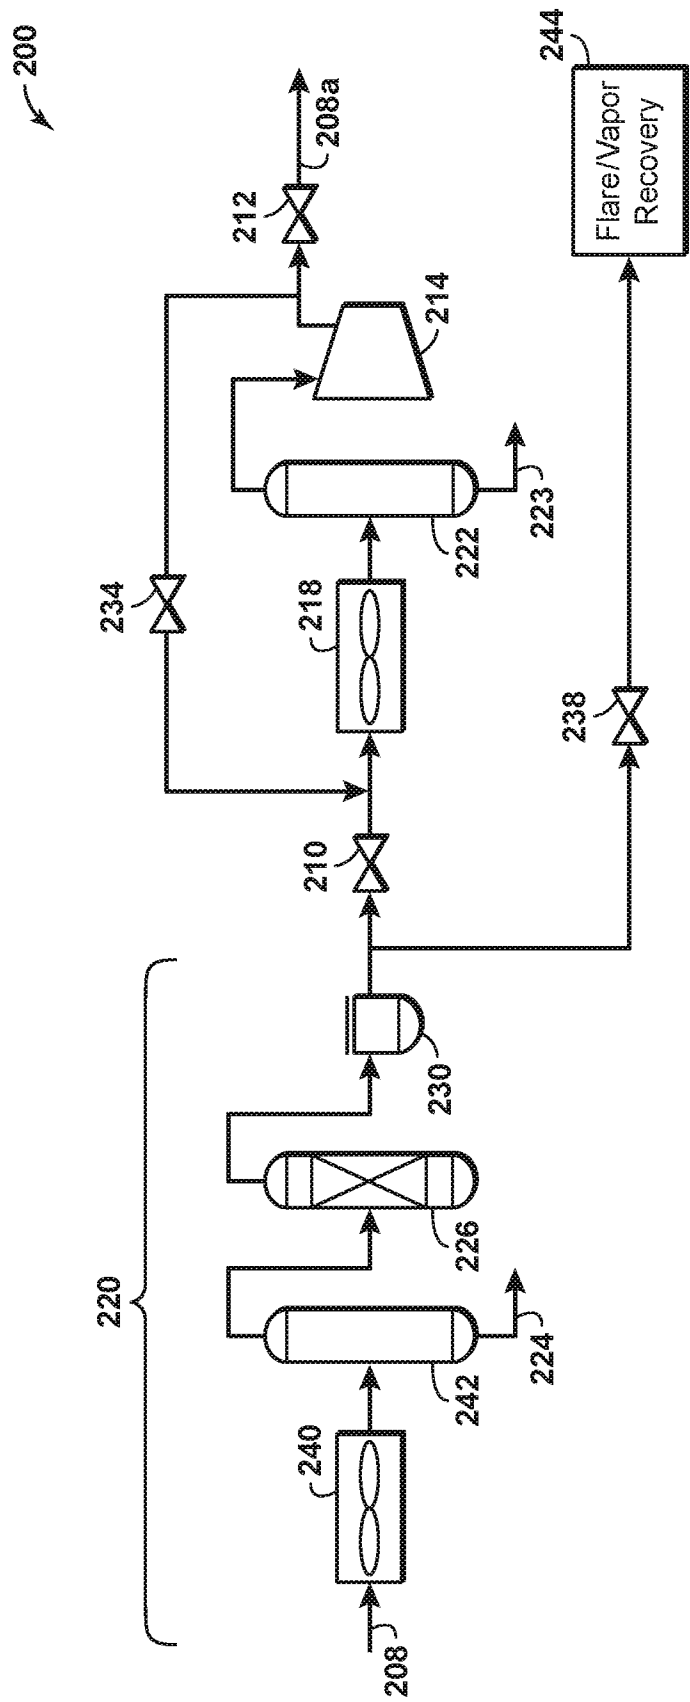


FIG. 2

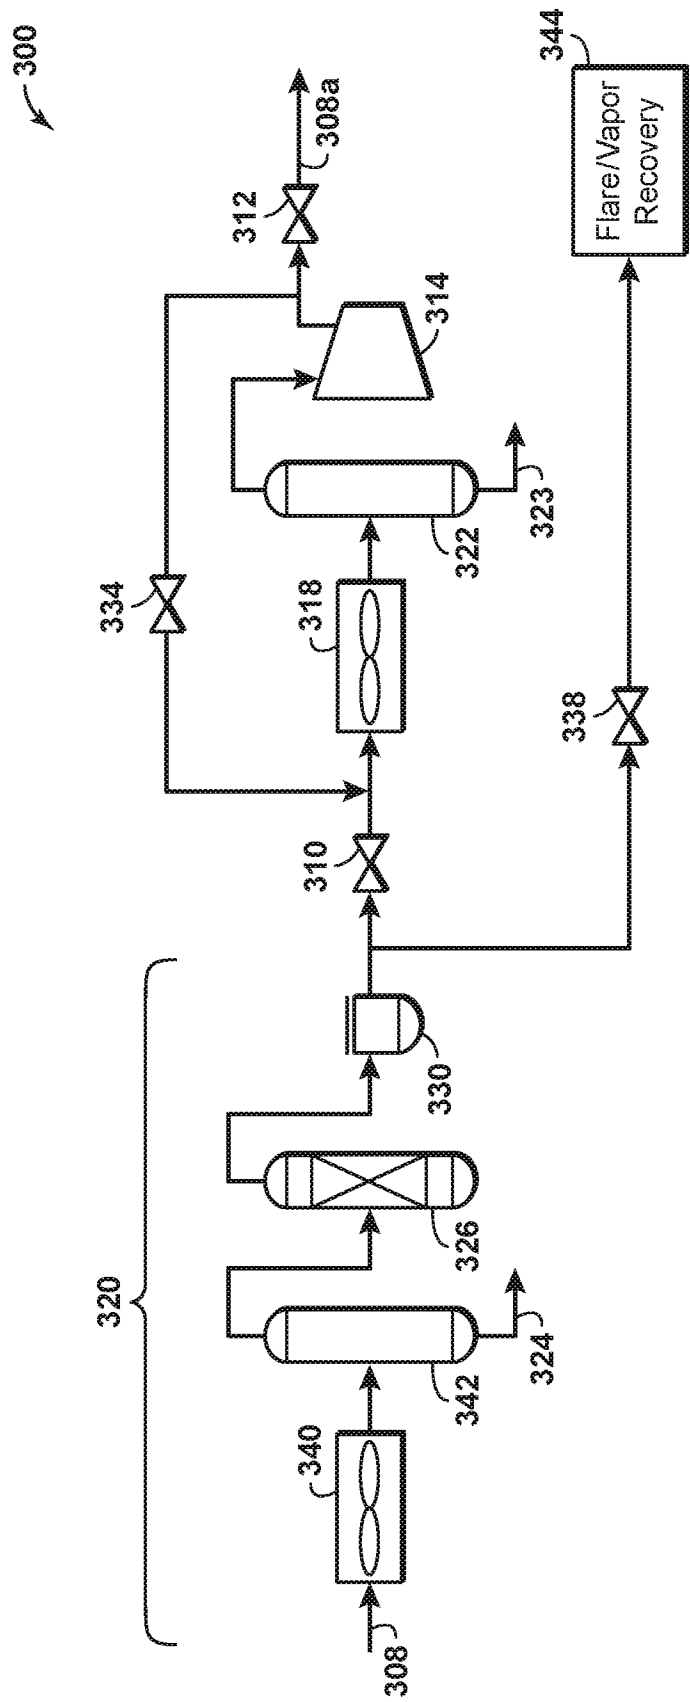


FIG. 3

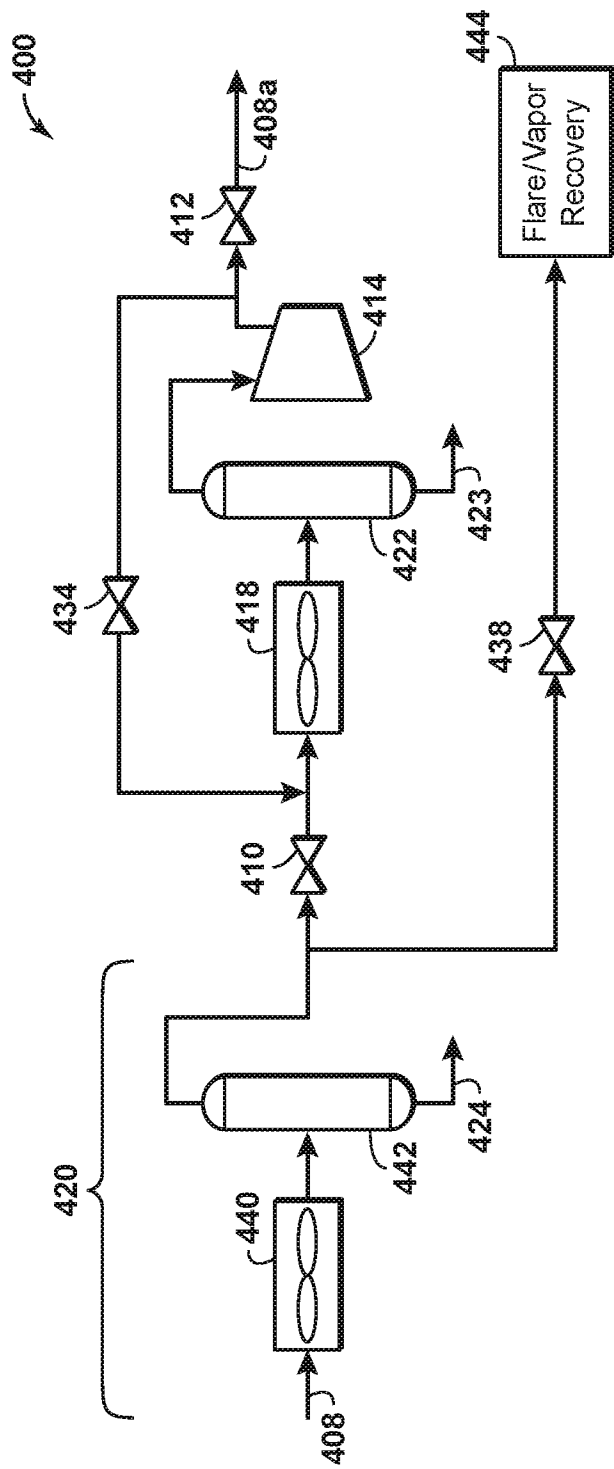


FIG. 4

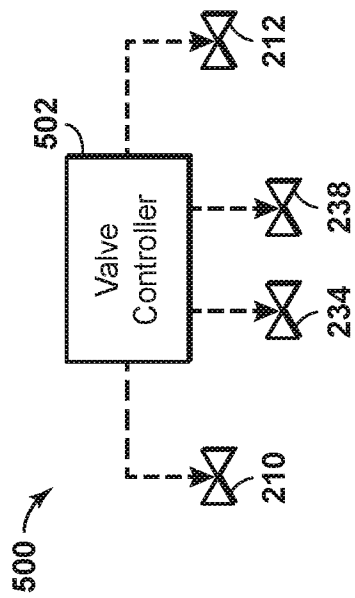
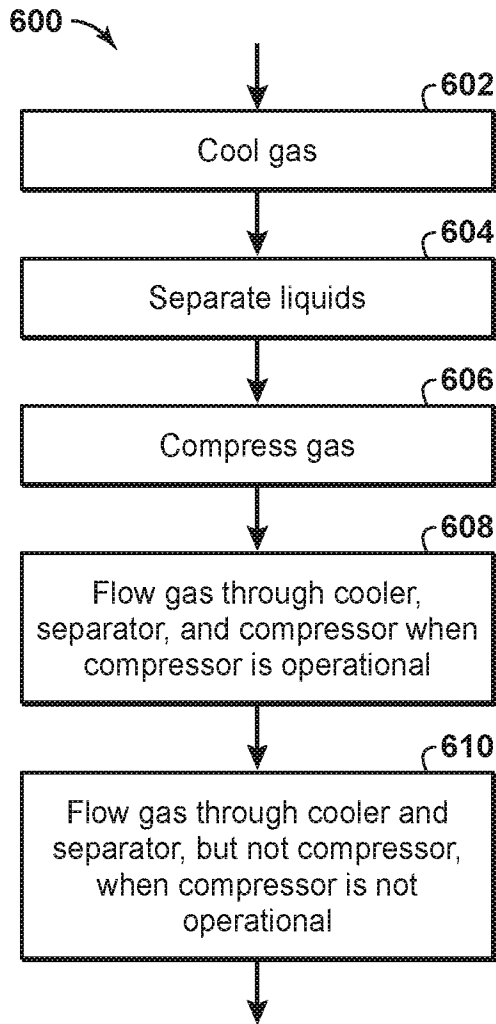
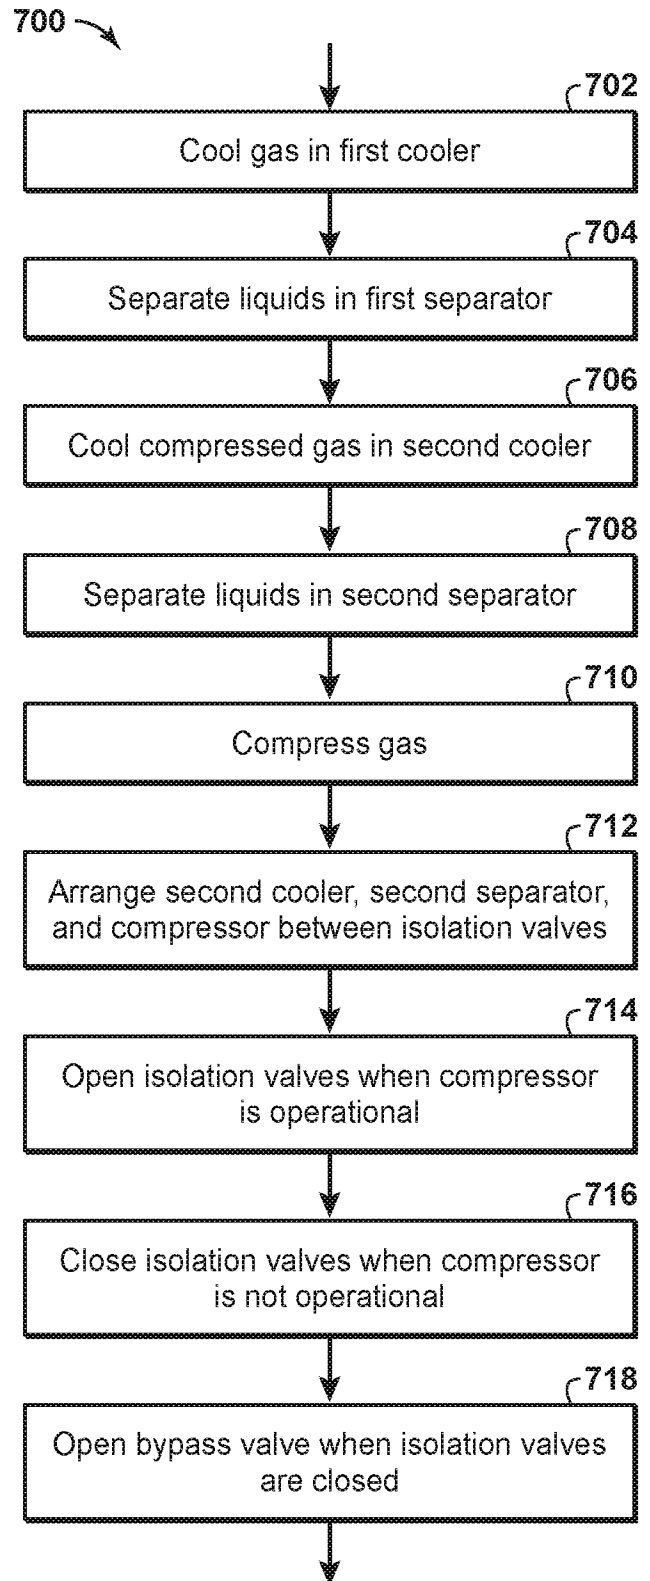


FIG. 5

**FIG. 6****FIG. 7**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/036109

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01D53/00 B01D53/26
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 527 024 A (MCMINN ROBERT E ET AL) 8 September 1970 (1970-09-08) figure 1	1,10,19
A	----- WO 86/03686 A1 (UNION CARBIDE CORP [US]) 3 July 1986 (1986-07-03) figure 1	1,10,19
A	----- US 4 487 614 A (YON CARMEN M [US]) 11 December 1984 (1984-12-11) figure 1	1,10,19
A	----- US 2015/096309 A1 (MATHUR UMESH [US]) 9 April 2015 (2015-04-09) figures 1-3,5,6,8	1,10,19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 August 2017

Date of mailing of the international search report

15/09/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bergt, Thomas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/036109

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 3527024	A	08-09-1970	BE	741323 A	16-04-1970
			DE	1955325 A1	15-10-1970
			FR	2022618 A1	31-07-1970
			GB	1261750 A	26-01-1972
			NL	6916677 A	08-05-1970
			US	3527024 A	08-09-1970

WO 8603686	A1	03-07-1986	AT	42212 T	15-05-1989
			BR	8507132 A	14-07-1987
			CA	1261281 A	26-09-1989
			DE	3569477 D1	24-05-1989
			EP	0205582 A1	30-12-1986
			FI	863346 A	19-08-1986
			JP	H0350561 B2	02-08-1991
			JP	S62501615 A	02-07-1987
			PH	22175 A	28-06-1988
			US	4726818 A	23-02-1988
			WO	8603686 A1	03-07-1986

US 4487614	A	11-12-1984	BR	8405811 A	17-09-1985
			CA	1239596 A	26-07-1988
			DE	3476739 D1	23-03-1989
			EP	0142157 A2	22-05-1985
			JP	H0357803 B2	03-09-1991
			JP	S60118206 A	25-06-1985
			PH	20968 A	10-06-1987
			US	4487614 A	11-12-1984

US 2015096309	A1	09-04-2015	CA	2867107 A1	04-04-2015
			US	2015096309 A1	09-04-2015
