

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number
WO 2004/075603 A2

- (51) International Patent Classification⁷: **H05B**
- (21) International Application Number:
PCT/KR2004/000342
- (22) International Filing Date: 19 February 2004 (19.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10-2003-0010393
19 February 2003 (19.02.2003) KR
- (71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-721 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SEO, Jeong Dae** [KR/KR]; 301, #66-8, Juam-dong, Gwacheon-si, Gyeonggi-do 427-070 (KR). **KIM, Hee Jung** [KR/KR]; Room No. 203, #16-37, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **LEE, Kyung Hoon** [KR/KR]; 308, #602-165, Namhyeon-dong, Gwanak-gu, Seoul 151-080 (KR). **OH, Hyoung Yun** [KR/KR]; #1016-24, Sadang 1-dong, Dongjak-gu, Seoul 156-091 (KR). **KIM, Myung Seop** [KR/KR]; Kolong Apt. 102-308, Umyeon-dong, Seocho-gu, Seoul 137-784 (KR). **PARK, Chun Gun** [KR/KR]; 101, #587-30, Sillim 12-dong, Gwanak-gu, Seoul 151-022 (KR).
- (74) Agents: **BAHNG, Hae Cheol** et al.; Kims International Patent & Law Office, 15th Floor Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ORGANIC ELECTROLUMINESCENT DEVICE

(57) Abstract: Disclosed is an organic electroluminescent device including a substrate, a first and second electrodes, and a light-emitting layer formed between the first electrode and the second electrode, and a hole-blocking layer formed between the light-emitting layer and the second electrode. In this case, at least one of A1 and A2 is selected from a substituted or non-substituted aromatic group, a heterocyclic group, an aliphatic group, halogen, and hydrogen.

WO 2004/075603 A2

ORGANIC ELECTROLUMINESCENT DEVICE

Technical Field

The present invention relates to an organic luminescent device, and more
5 particularly, to a hole-blocking layer.

Background Art

Recently, with the trend of a large sized display, a request of a flat display
that occupies a small area has been increased. One example of the flat display is
10 an organic electroluminescent device also called as an organic light emitting diode
(OLED). And, technology for the organic electroluminescent display is developed
rapidly, whereby various prototypes have been in market already.

The organic electroluminescent device emits light in a manner that electric
charges are injected in an organic layer formed between an anode and a cathode so
15 as to form a pair of electron and hole to generate an exciton and an excited state of
the exciton falls to a ground state so as to emit light.

The organic electroluminescent device is not only formed on a flexible
transparent substrate such as a plastic but also operated at a lower voltage (less
than 10V) compared to a plasma display panel or an inorganic electroluminescent
20 display.

Also, the organic electroluminescent device has advantages in that power
consumption is reduced and various colors are available.

Moreover, the organic electroluminescent device enables to express three
colors including green, blue, and red. Therefore, many concerns are focused on
25 the organic electroluminescent device as the next generation full color display.

The organic electroluminescent device generates an exciton by coupling a
hole from a hole transferring layer with an electron from the hole transferring

layer, the exciton corresponding to a luminescent area.

However, the exciton can be generated by the fast transferring speed of the hole in another area except the luminescent area.

The exciton generated in another area except the luminescent area illuminates in that area only, thus, there is a problem lowering color purity and brightness.

Therefore, for increasing the performance and the brightness of the device, a material blocking a movement of the hole needs to be formed around the luminescent layer.

10

Disclosure of Invention

Accordingly, the present invention is directed to an organic electroluminescent device that substantially obviates one or more problems due to limitations and disadvantages of the related art.


15 An object of the present invention is to provide an organic electroluminescent device with enhanced brightness and color purity is obtained by forming a hole-blocking layer formed between the light-emitting layer and a cathode.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

25 To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic electroluminescent device includes a substrate, a first and second electrodes, and a

light-emitting layer formed between the first electrode and the second electrode, and a hole-blocking layer using a material of a following chemical formula 1.

[Chemical formula 1]



5 In this case, at least one of A1 and A2 is selected from a substituted or non-substituted aromatic group, a heterocyclic group, an aliphatic group, halogen, and hydrogen.

Structures of A1 and A2 the same or different. At least one of A1 and A2 substituted or non-substituted is selected from phenyl, biphenyl, pyridyl, naphthyl,
10 quinolyl, isoquinolyl, fluorenyl, terphenyl, methyl, ethyl, propyl, isopropyl, and halogen groups.

A substitute of the A1 and A2 is at least one selected from aryl, alkyl, aryloxy, alkoxy, arylamino, alkylamino, hydroxyl, amino, halogen and cyano group.

15 A substitute of the A1 and A2 is at least one selected from phenyl, biphenyl, triphenyl, phenylethenyl, diphenylethenyl, phenylethynyl, phenoxy, tolyoxy, vinyl, methyl, ethyl, propyl, isopropyl, t-butyl, cyclohexyl, diphenylamino, carbazolyl, morpholinyl, methoxy, ethoxy, propoxy, butoxy, dimethylamino, diphenylamino, fluorine and chlorine group.

20 It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.


Best mode for Carrying Out the Invention

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the
5 drawings to refer to the same or like parts.

In the present invention, a first electrode and a second electrode are formed on a substrate in a vertical direction and a light-emitting layer is formed between the first electrode and the second electrode.

A hole-blocking layer formed between the light-emitting layer and the
10 second electrode and using a material of a chemical formula 1.

[Chemical formula 1]



In this case, at least one of A1 and A2 is selected from a substituted or non-substituted aromatic group, a heterocyclic group, an aliphatic group, a halogen,
15 and hydrogen.

Structures of A1 and A2 can be the same or different. Also, at least one of A1 and A2 is selected from a substituted or non-substituted phenyl, biphenyl, pyridyl, naphthyl, quinolyl, isoquinolyl, fluorenyl, terphenyl, methyl, ethyl, propyl, isopropyl, and halogen groups.


20 Each substitute of the A1 and A2 is at least one selected from aryl, alkyl, aryloxy, alkoxy, arylamino, alkylamino, hydroxyl, amino, halogen and cyano group.

Each substitute of the A1 and A2 is at least one selected from phenyl, biphenyl, triphenyl, phenylethenyl, diphenylethenyl, phenylethynyl, phenoxy,

tolyoxy, vinyl, methyl, ethyl, propyl, isopropyl, t-butyl, cyclohexyl, diphenylamino, carbazolyl, morpholinyl, methoxy, ethoxy, propoxy, butoxy, dimethylamino, diphenylamino, fluorine and chlorine group.

In this case, at least one of the A1 and A2 may be one of the following
5 chemical formulas 2.


[Chemical formula 2]

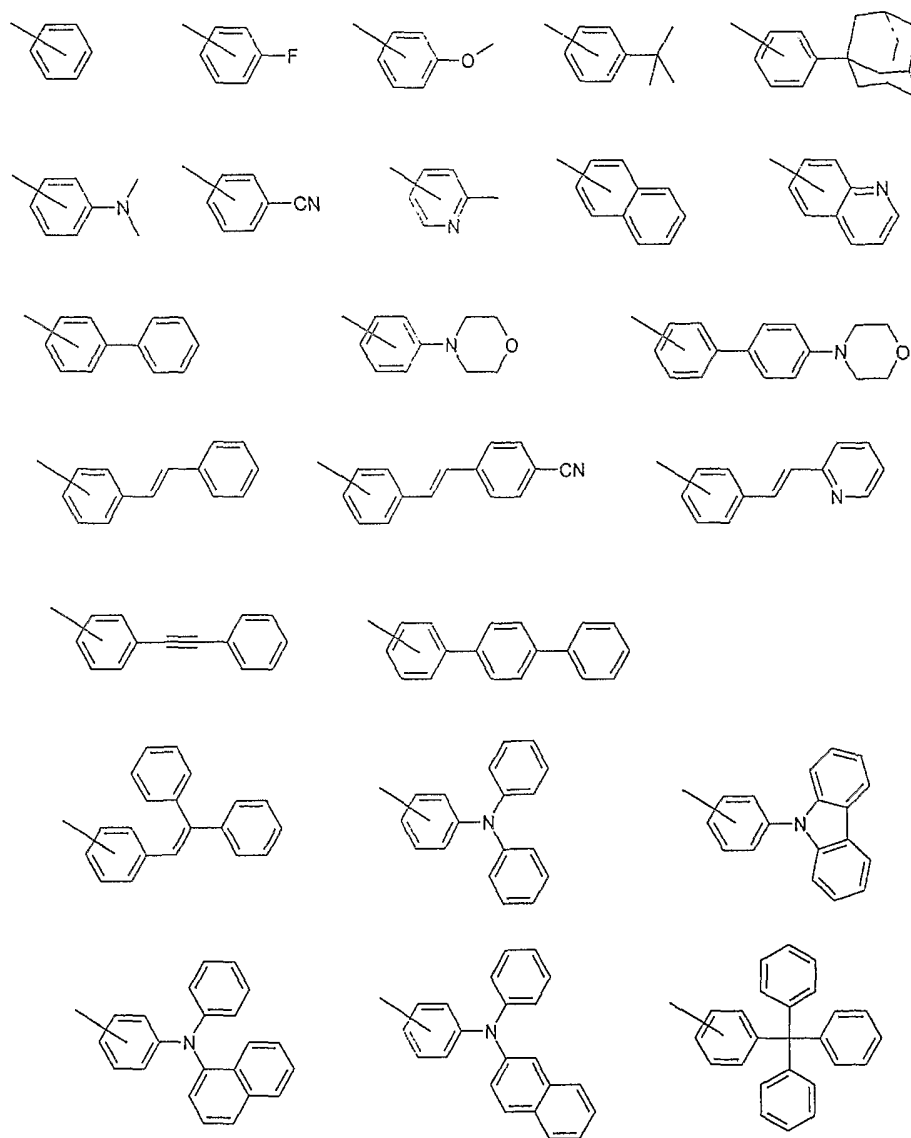















The material of the hole-blocking layer may be at least one of the following

chemical formulas.


[Chemical formula 3]

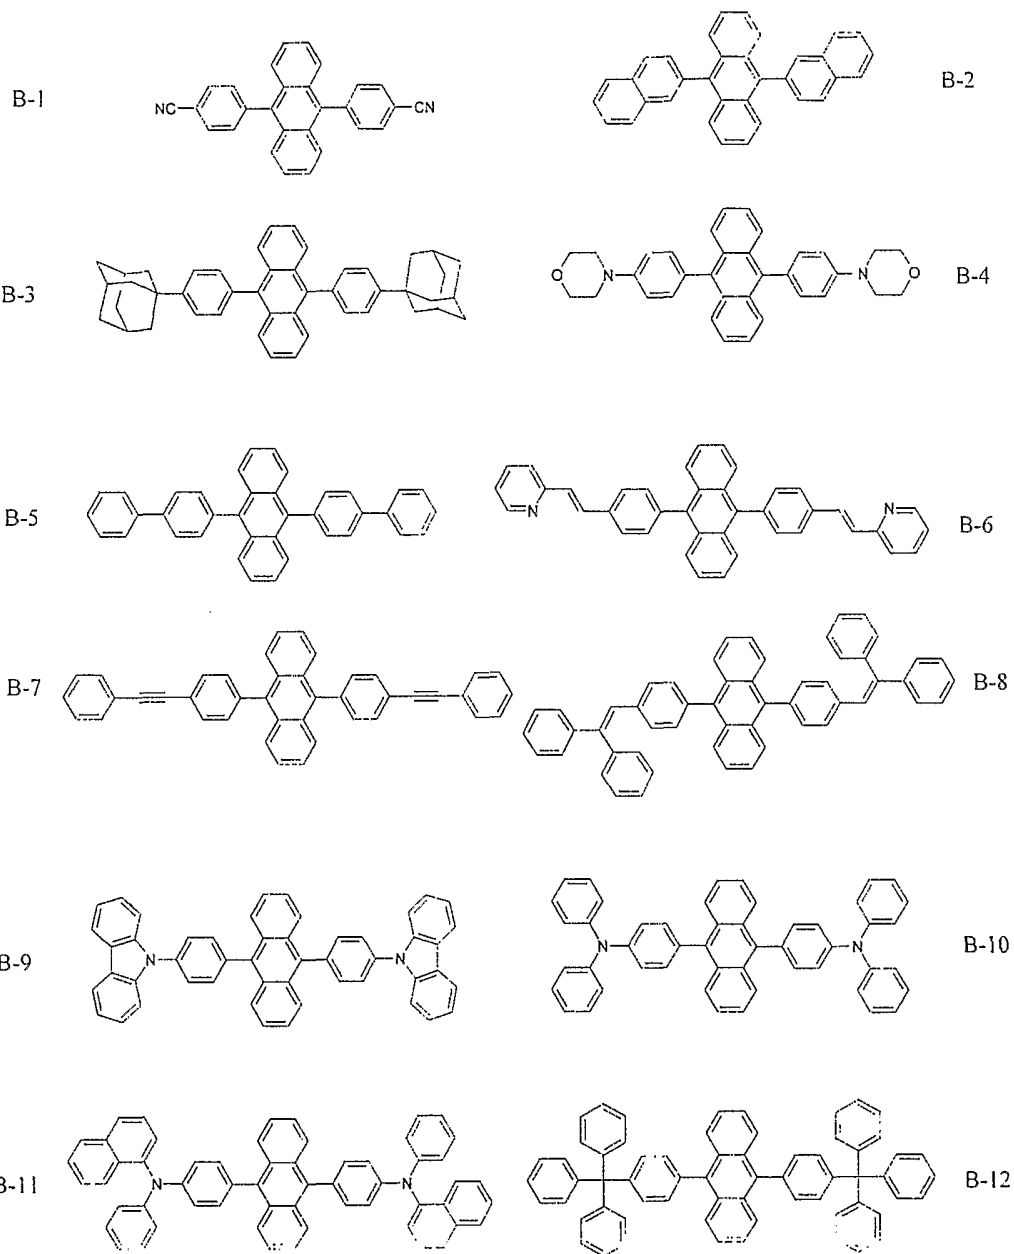


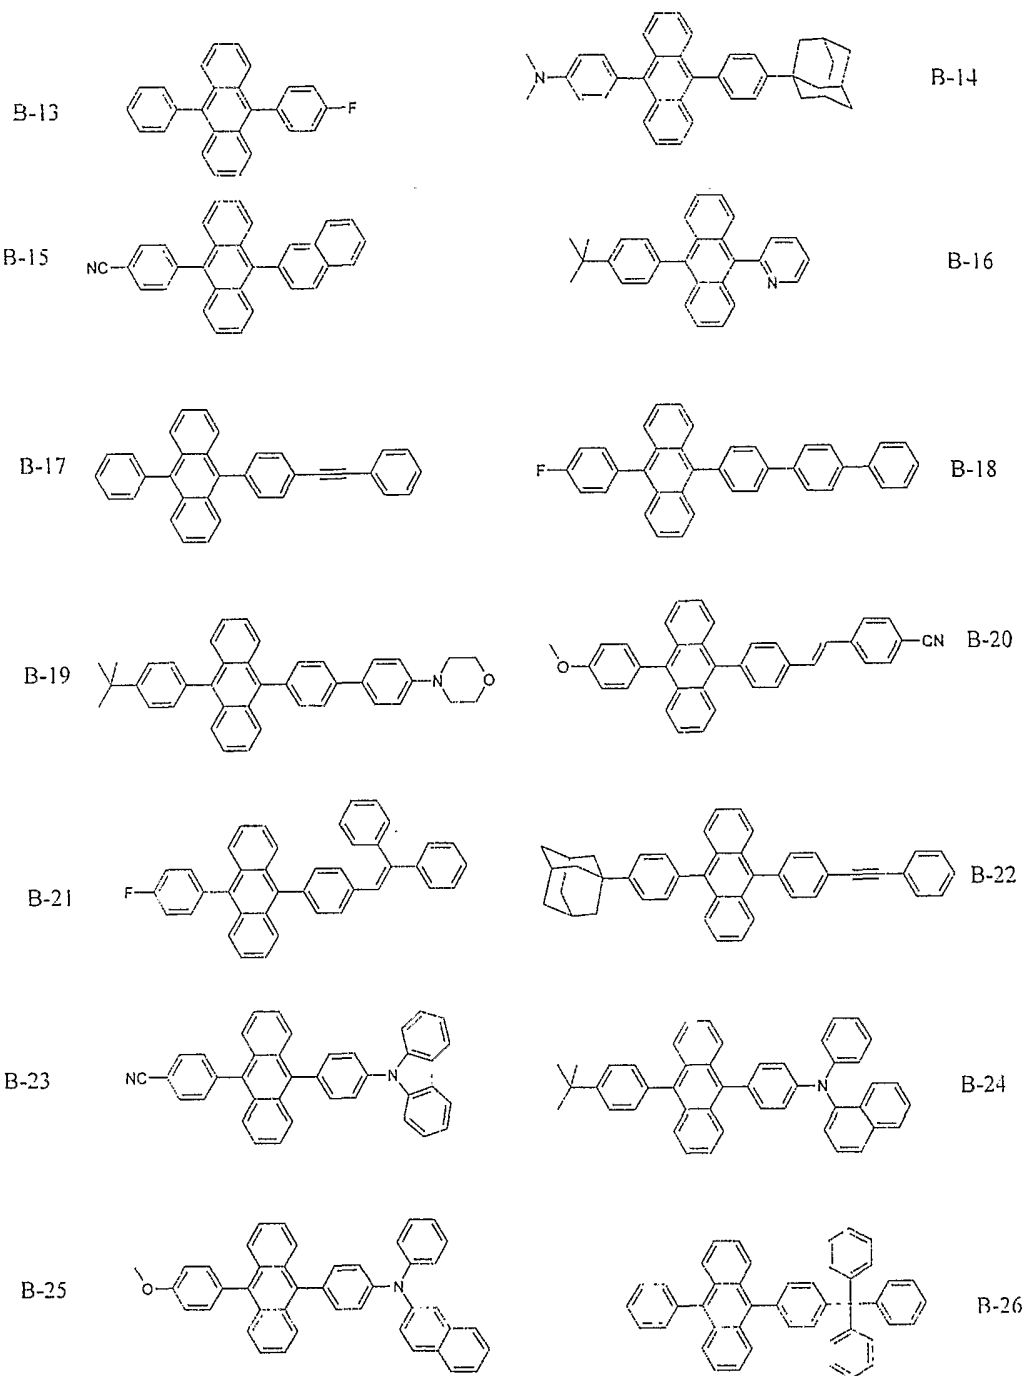

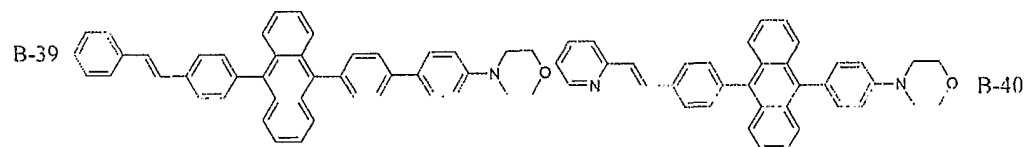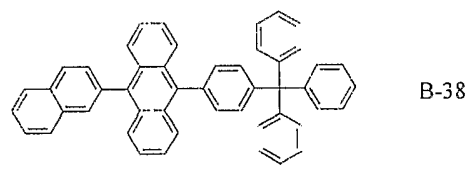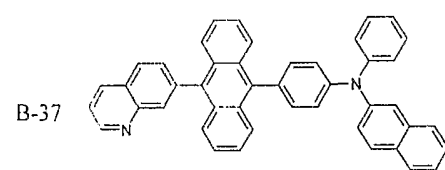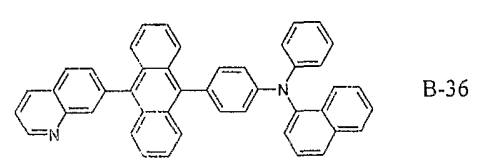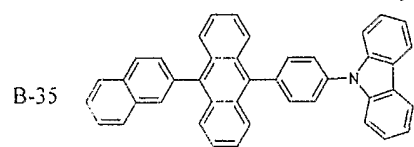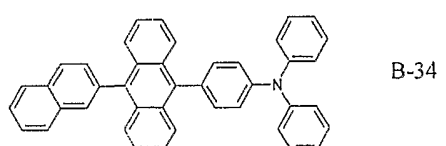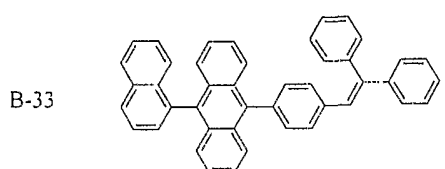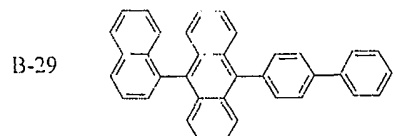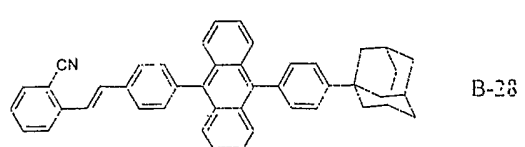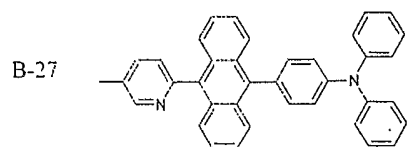


B-40

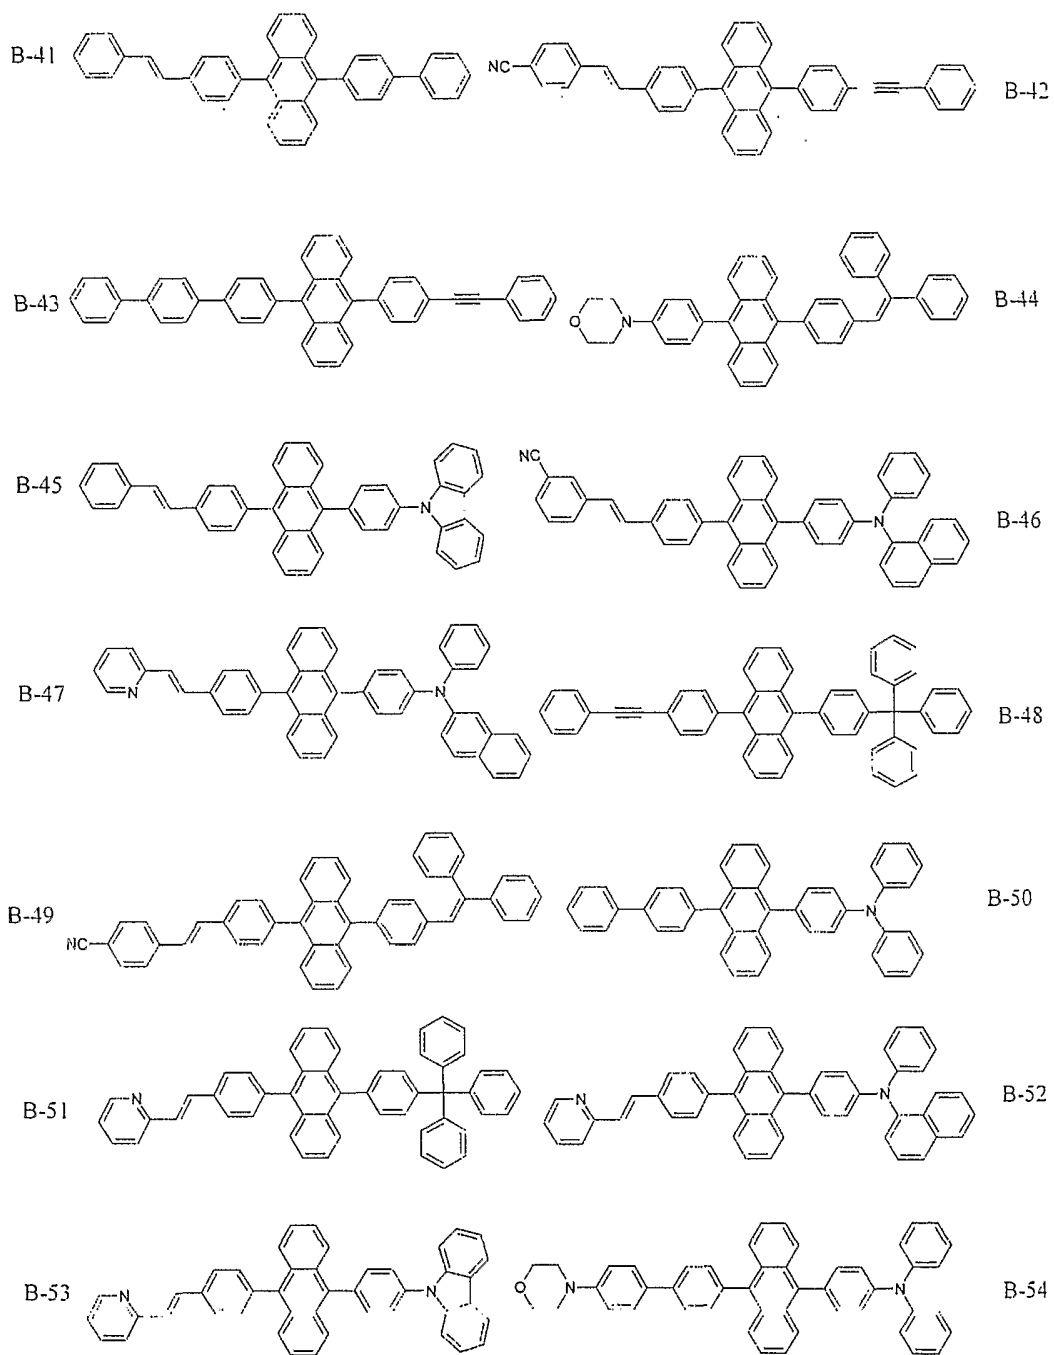

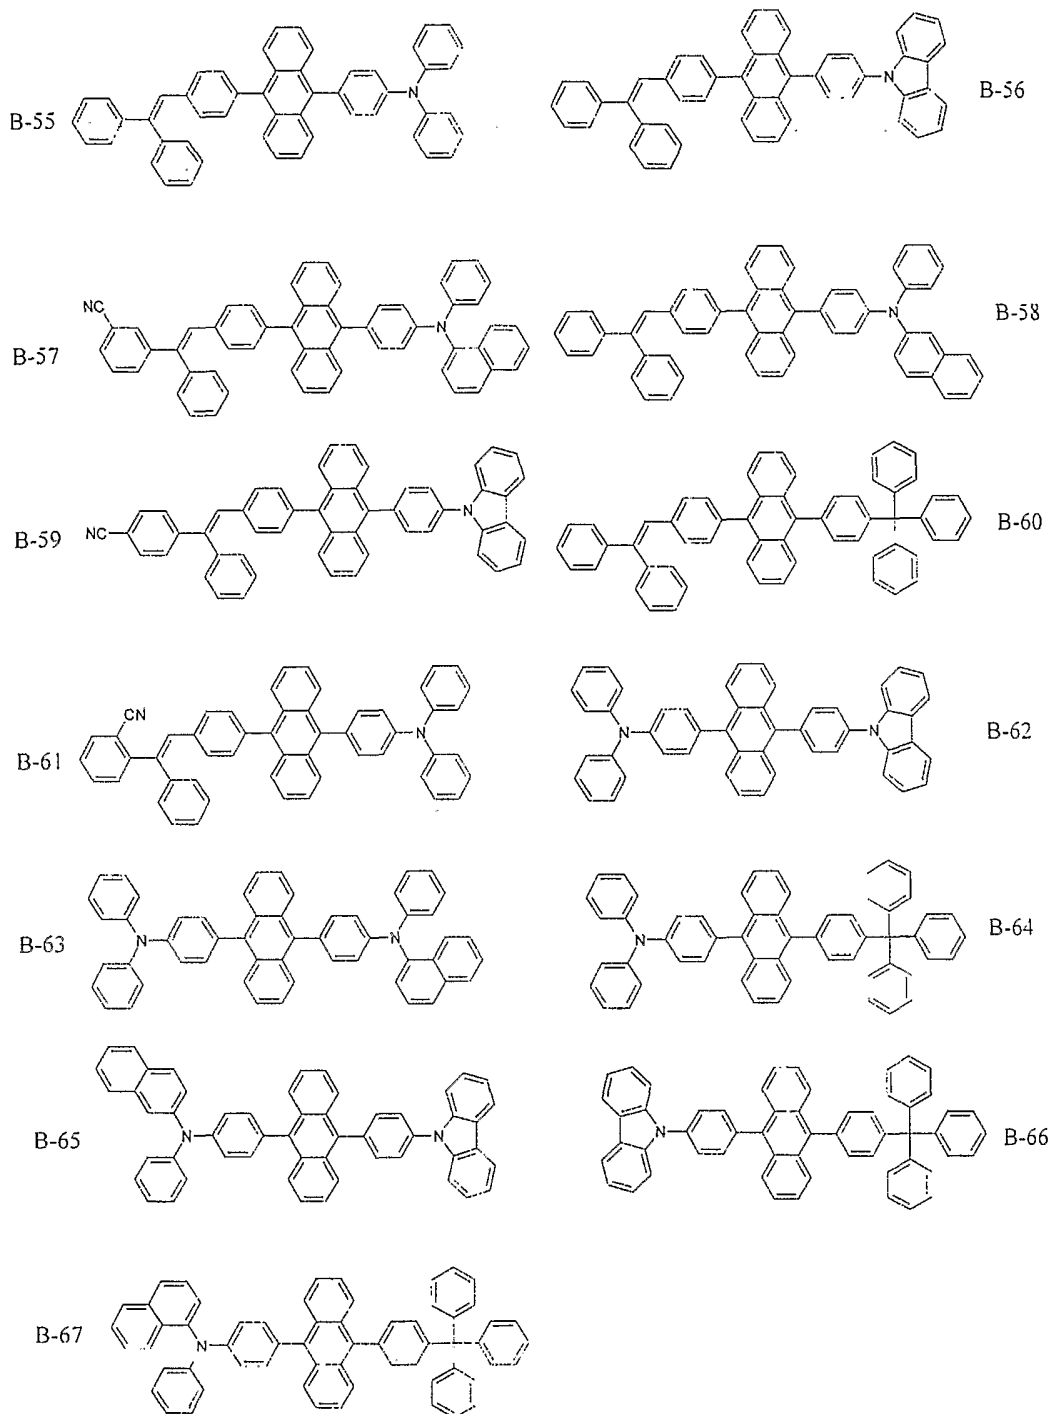

According to the organic luminescent device of the present invention, (9-[4-(2,2-diphenyl-vinyl)-phenyl]-10-(4-trityl-phenyl)-anthracene), that is the B-60
 5 used as the hole-blocking layer is compounded as follows.

(1) Synthesis of tetraphenylmethyl boronic acid

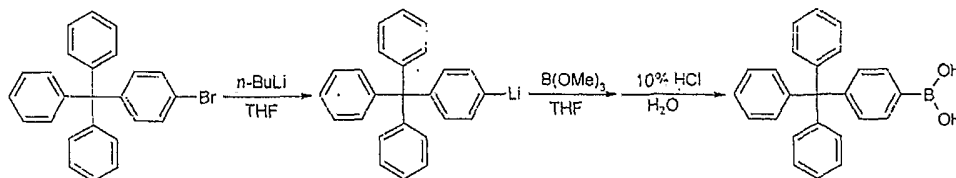


First of all, 4-Bromotetra phenylmethane (1.62g, 0.005mol) is dissolved in THF (120ml) in a dry 3-necks-r.b.f.. 1.6M of n-BuLi(3.9mL, 0.006mol) melted in
 5 hexane is slowly added to the bath at -78°C for ten minutes and the solution is stirred for 30 minutes at a room temperature.

And, after providing a bath at -78°C , trimethylborate(0.92ml, 0.0081mol) is slowly added into the bath at -78°C and stirred for 12 hours at a room temperature.

Then, about 10% of HCl is slowly added into the bath at 0°C for making
 10 pH 2 or 3, and a resuted solution is extracted by using diethylether and distilled under a reduced pressure.

And, when a deposit is formed by petroleum ether, the solvent is filtered whereby a white solid matter (1.25g, 84%) of tetraphenylmethyl boronic acid is obtained.

15 (2) Synthesis of 9-Bromo-10-(4-trityl-phenyl)-anthracene

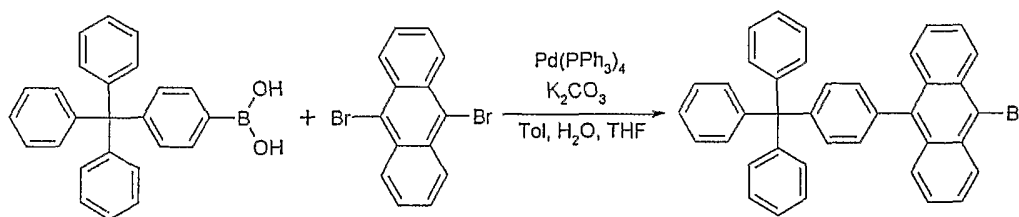


First, tetraphenylmethyl boronic acid(1.19g, 0.003mol), 9,10-DibromoAnthracene(2.74g, 0.008mol), tetrakis(triphenylphosphine) palladium(0)(0.19g, 0.05eq), Potassium carbonate(1.81g, 0.013mol) melted into
 20 Toluene(50mL), THF(50mL), and H₂O(50mL) are admitted into a two-neck-r.b.f.

The solution is heated in a hot oil bath at about 100°C and stirred for 24 hours.

When the reaction is finished, THF and toluene are removed.

And, after extracting a resulted solution by using Dichloromethane and water, the resulted solution is distilled under reduced pressure whereby silica gel column is obtained. The solution is re-crystallized by using Dichloromethane and methanol and filtered whereby a yellow solid matter, namely, 9-Bromo-10-(4-trityl-phenyl)-anthracene (0.98g, 53%) is obtained.

(3) Synthesis of (9-[4-(2,2-Diphenyl-vinyl)-phenyl]-10-(4-trityl-phenyl)-anthracene)

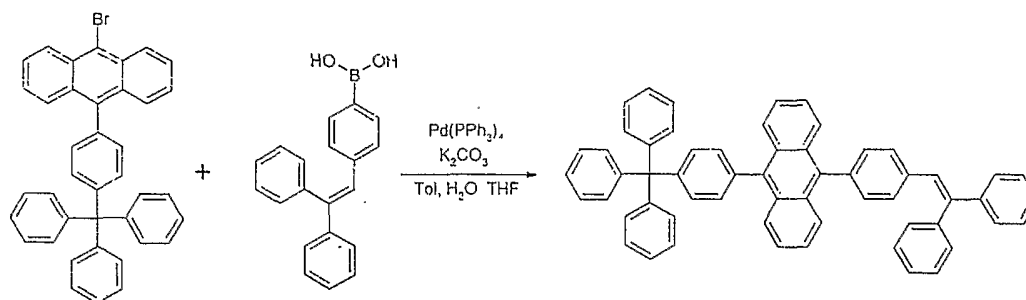

10

9-Bromo-10-(4-trityl-phenyl)-anthracene(0.35g, 0.0006mol), 4-(2,2-Diphenyl-vinyl)-phenyl boronic acid(0.26g, 0.0009mol), tetrakis(triphenyl-phosphine)palladium(0)(0.035g, 0.05eq), Potassium carbonate(0.25g, 0.002mol) melted into Toluene(30mL), THF(30mL), H₂O(30mL) are admitted into a two-neck-r.b.f. The solution is heated in a hot oil bath at about 100°C and stirred for 24 hours. When the reaction is finished, THF and toluene are removed.

15

Silica gel column is obtained from the resulted solution by using a ratio of Dichloromethane : Hexane = 1 : 50.

The solvent is distilled under reduced pressure whereby a yellow solid matter of 9-Bromo-10-(4-trityl-phenyl)-anthracene (0.98g, 53%) is obtained.

20

The solvent is distilled under reduced pressure and filtered by using methanol, whereby a yell solid matter of 9-[4-(2,2-Diphenyl-vinyl)-phenyl]-10-(4-

trityl-phenyl)-anthracene (0.42g, 91%) is obtained.

Hereinafter, a preferred embodiment of the organic electroluminescent device will be described according to the present invention.

[Embodiment]

5 An ITO glass is patterned so as to have a size of 2mm x 2mm. The patterned ITO glass is then cleaned.

A substrate is loaded on a vacuum chamber of which basic pressure is set up as 1×10^{-6} torr and CuPC(200 Å), NPD(400 Å), CBP+(btp)₂Ir(acac)(8%)(200 Å), the hole-blocking layer (100 Å), Alq₃(300 Å), LiF(5 Å), Al(1000 Å) are deposited
10 on the ITO in order.

When B-60 is used as the hole-blocking layer, 1135cd/m²(9.30V) is shown at about 1mA, brightness shows about 3.2cd/A, whereby CIE is x=0.661, y=0.328.

[Comparative embodiment]

The ITO glass is patterned so as to have a size of 3mm x 3mm. The
15 patterned ITO glass is then cleaned. A substrate is loaded on a vacuum chamber of which basic pressure is set up as 1×10^{-6} torr and CuPC(200 Å), NPD(400 Å), CBP+(btp)₂Ir(acac)(8%)(200 Å), a light-emitting layer (100 Å), Alq₃(300 Å), LiF(5 Å), Al(1000 Å) are deposited on the ITO in order.

When Balq is used as the hole-blocking layer,
20 1018cd/m²(9.97V)1135cd/m²(9.30V) is shown at about 1mA, brightness shows about 1018cd/m²(9.97V), whereby CIE ≒ x=0.659, y=0.329. Lifetime (half of first brightness) shows 2000cd/m² at about 1mA.

Industrial applicability

25 Accordingly, the present invention is the organic electroluminescent device including the hole-blocking layer between the anode and cathode. The organic


electroluminescent device with enhanced brightness and color purity is obtained through the hole-blocking layer.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit
5 or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An organic electroluminescent device, comprising:
a substrate;
a first and second electrodes formed on the substrate;
a light-emitting layer formed between the first electrode and the second electrode; and
a hole-blocking layer formed between the light-emitting layer and the second electrode and using a material of a chemical formula 1.

[Chemical formula]




Wherein, at least one of A1 and A2 is selected from a substituted or non-substituted aromatic group, a heterocyclic group, an aliphatic group, halogen, and hydrogen.

2. The organic electroluminescent device of claim 1, wherein structures of A1 and A2 are the same or different each other.
3. The organic electroluminescent device of claim 1, wherein at least one of A1 and A2 is selected from phenyl, biphenyl, pyridyl, naphthyl, quinolyl, isoquinolyl, fluorenyl, terphenyl, methyl, ethyl, propyl, isopropyl, and halogen groups.
4. The organic electroluminescent device of claim 3, wherein a substitute of the A1 and A2 is at least one selected from aryl, alkyl, aryloxy, alkoxy, arylamino,

alkylamino, hydroxyl, amino, halogen and cyano group.

5. The organic electroluminescent device of claim 4, wherein a substitute of the A1 and A2 is at least one selected from phenyl, biphenyl, triphenyl, phenylethenyl, diphenylethenyl, phenylethynyl, phenoxy, tolyoxy, vinyl, methyl, ethyl, propyl, isopropyl, t-butyl, cyclohexyl, diphenylamino, carbazolyl, morpholinyl, methoxy, ethoxy, propoxy, butoxy, dimethylamino, diphenylamino, fluorine and chlorine group.

6. The organic electroluminescent device of claim 1, wherein at least one of the A1 and A2 is one of the following chemical formulas 2.

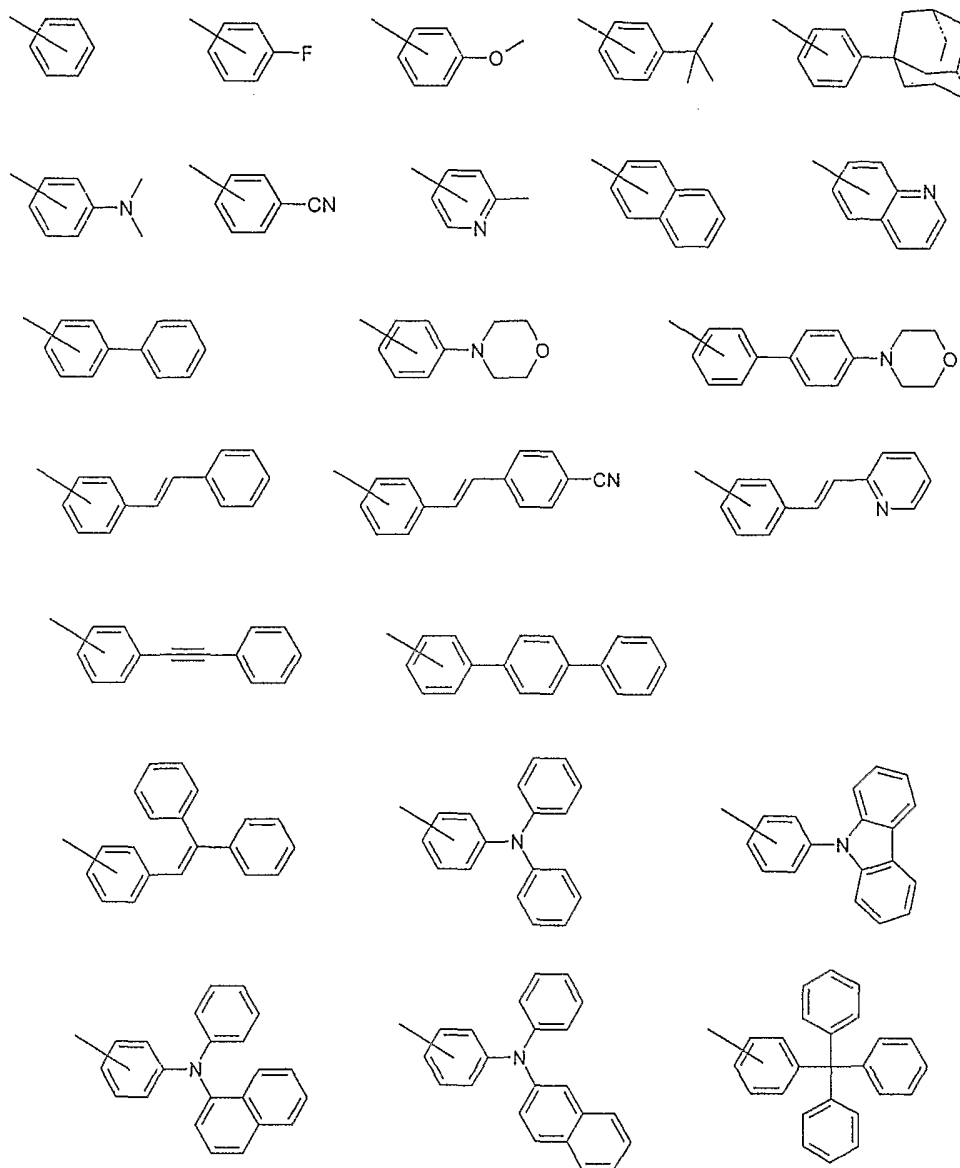

7. The organic electroluminescent device of claim 1, wherein a material of the hole-blocking layer is one of the following chemical formulas 3.

