

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 May 2006 (26.05.2006)

PCT

(10) International Publication Number  
**WO 2006/055519 A1**

(51) International Patent Classification:  
**H04L 12/56** (2006.01)

(21) International Application Number:  
PCT/US2005/041262

(22) International Filing Date:  
15 November 2005 (15.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/993,534 19 November 2004 (19.11.2004) US

(71) Applicant (for all designated States except US): **ANALOG DEVICES, INC.** [US/US]; One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HADJIAHMAD, Massoud** [CA/CA]; 98 Grandview Ave., Thornhill, Ontario L3T 1H6 (CA). **HOANG, Tuan** [CA/CA]; 3077 Weston Road, Unit 1206, North York, Ontario M9M 3A1 (CA). **STRAKER-PAYNE, Andre** [CA/CA]; 1407-101 Subway Crescent, Etobicoke, Ontario M9B 6K4 (CA).

(74) Agents: **CONNORS, Matthew, E.** et al.; Gauthier & Connors LLP, Suite 2300, 225 Franklin Street, Boston, MA 02110 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: AUTO CONFIGURATION FOR ASYNCHRONOUS TRANSFER MODE BASED ACCESS DEVICE

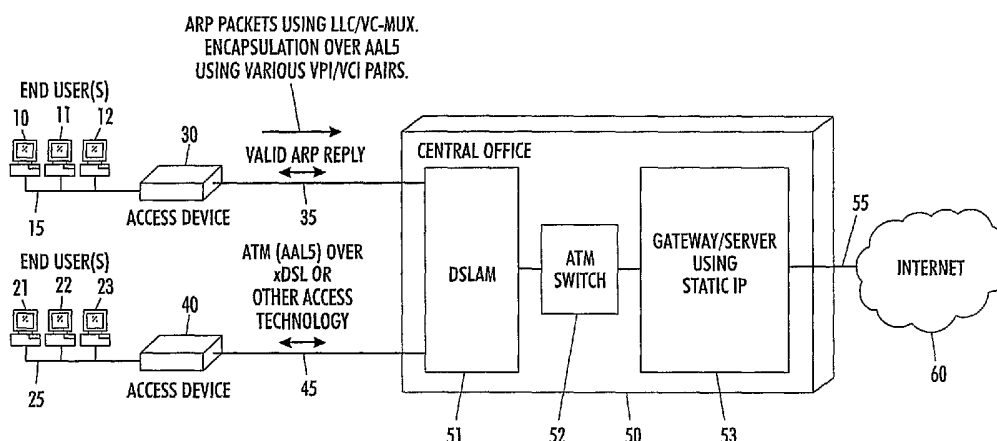

(57) Abstract: A method for obtaining virtual path identifier, virtual channel identifier, and encapsulation values in an asynchronous transfer mode access device for a network using either non-static or static internet protocol address assignments and asynchronous transfer mode adaptation layer (5). In the non-static environment, a plurality of discovery packets are generated, but in the static environment, a plurality of address resolution protocol packets are generated. Headers are added to the plurality of packets, such that a first set of packets, each packet including a logical link control header, and a second set of packets, each packet including a virtual channel multiplexed header, are realized. The first and second sets of packets are encapsulated and then transmitted to a central office. It is determined if a valid response packet has been received to any of the transmitted packets, and a virtual path identifier/virtual channel identifier pair value and encapsulation value are established, based upon a virtual path identifier/virtual channel identifier pair value and encapsulation value of the received valid response. The established virtual path identifier/virtual channel identifier pair value and encapsulation value are utilized for transferring data between the asynchronous transfer mode access device and a central office.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **AUTO CONFIGURATION FOR ASYNCHRONOUS TRANSFER MODE BASED ACCESS DEVICE**

### **PRIORITY INFORMATION**

5           This application claims priority to U.S. Utility Patent Application Serial No. 10/993,534 filed on November 19, 2004, incorporated herein by reference in its entirety.

### **FIELD OF THE PRESENT INVENTION**

10       **[0001]**     The present invention is directed to configuring virtual path identifiers, virtual channel identifiers, and asynchronous transfer mode adaptation layer 5 encapsulation on asynchronous transfer mode based network access devices to enable the data transfer to and from a central office gateway. More particularly, the present invention is directed to configuring virtual path identifiers, virtual channel identifiers, and asynchronous transfer mode adaptation layer 5 encapsulation on asynchronous transfer mode based network access  
15       devices for networks that use non-static or static internet protocol address assignments.

### **BACKGROUND OF THE PRESENT INVENTION**

20       **[0002]**     Conventional asynchronous transfer mode access devices used for obtaining a broadband connection to the internet must be configured to use the specific packet encapsulation method required by the provider of the broadband connection service before use. This complication results in either increased manufacturing costs for the access devices if the configuration is done at the factory or more costly customer service if the configuration must be done at the customer's site

25       **[0003]**     Figure 1 illustrates how a conventional access device (30 and 40) is connected to the internet 60. End user's computer equipment (10, 11, 12, 21, 22, or 23) is connected to an asynchronous transfer mode access device (30 or 40) using direct connection or a local network (15 or 25). Before the asynchronous transfer mode access device (30 or 40) can provide a connection to the internet 60, it must be configured to meet the packet encapsulation, Virtual Path Identifier, and virtual Channel Identifier requirements of the  
30       equipment in the central office 50. Once the asynchronous transfer mode access device (30 or 40) is configured, data communication over a phone line, cable line, microwave transmission, radio-frequency, or other communication channel (35 or 45) can proceed.

[0004] The equipment in the central office **50** manages data flow to and from the asynchronous transfer mode access devices (**30** and **40**). The equipment in the central office **50** also manages data flow to and from the internet **60** using its own internet connection **55**, routing the information back to the correct individual end user's computer equipment (**10**,  
5 **11, 12, 21, 22, or 23**).

[0005] Although conventional methods for automatically configuring the asynchronous transfer mode access devices (**30** and **40**) when the asynchronous transfer mode access devices are installed has been proposed. These methods are complicated in that they require changes in the central office **50** as well as in the asynchronous transfer mode access devices  
10 (**30** and **40**). The required changes in the central office to implement the methods are barriers to market acceptance.

[0006] Another method for configuring the asynchronous transfer mode access devices is described in US Patent 6,636,505, entitled "Method For Service Provisioning A Broadband Modem." The entire content of US Patent 6,636,505 is hereby incorporated by  
15 reference.

[0007] US Patent 6,636,505 discloses a way for multiple internet service providers to be serviced by one network service provider, requiring special software to reside on the end user's computer equipment. The network service provider must implement a special configuration to support the method. Although this method provide a way to configure  
20 asynchronous transfer mode access devices, the method fails to address the problem of the need for special configuration of the central office, which, as noted above, is a barrier to market acceptance.

[0008] Therefore, it is desirable to provide a method of automatically configuring an access device without requiring special changes to the configuration of the central office.  
25 Moreover, it is desirable to provide a method that eliminates the need for the end user to configure the virtual path identifiers, virtual channel identifiers, and asynchronous transfer mode adaptation layer 5 encapsulation on asynchronous transfer mode based network access devices to enable the data transfer to and from a central office gateway.

[0009] It is further desirable to provide a method that eliminates the need for the end  
30 user to configure the virtual path identifiers, virtual channel identifiers, and asynchronous transfer mode adaptation layer 5 encapsulation on asynchronous transfer mode based network access devices to enable the data transfer to and from a central office for networks that use static internet protocol address assignments.

[0010] Also, it is desirable to provide a method that eliminates the need for the end user to configure the virtual path identifiers, virtual channel identifiers, and asynchronous transfer mode adaptation layer 5 encapsulation on asynchronous transfer mode based network access devices to enable the data transfer to and from a central office for networks that use non-static internet protocol address assignments.

### **SUMMARY OF THE PRESENT INVENTION**

[0011] One aspect of the present invention is a method for obtaining virtual path identifier, virtual channel identifier, and encapsulation values in an asynchronous transfer mode access device for a network using non-static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The method generates a plurality of discovery packets; adds headers to the plurality of discovery packets, such that a first set of discovery packets, each packet including a logical link control header, and a second set of discovery packets, each packet including a virtual channel multiplexed header, are realized; encapsulates the first and second sets of discovery packets; transmits all the encapsulated discovery packets to a central office; determines if a valid response packet has been received to any of the transmitted packets; establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon a virtual path identifier/virtual channel identifier pair value and encapsulation value of the received valid response; and utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

[0012] Another aspect of the present invention is a method for obtaining virtual path identifier (VPI), virtual channel identifier (VCI), and encapsulation values in an asynchronous transfer mode access device having a table of pre-defined VPI/VCI pairs for a network using non-static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The method generates a pair of point-to-point protocol over Ethernet discovery packets for each VPI/VCI pair; generates a pair of plurality of dynamic host configuration protocol discovery packets for each VPI/VCI pair; adds logical link control headers to the dynamic host configuration protocol discovery packets, such that each VPI/VCI pair has an associated dynamic host configuration protocol discovery packet with a logical link control header; adds logical link control headers to the point-to-point protocol over Ethernet discovery packets, such that each VPI/VCI pair has an associated point-to-point protocol over Ethernet discovery packet with a logical link control header; adds virtual

channel multiplexed headers to the dynamic host configuration protocol discovery packets, such that each VPI/VCI pair has an associated dynamic host configuration protocol discovery packet with a virtual channel multiplexed header; adds virtual channel multiplexed headers to the point-to-point protocol over Ethernet discovery packets, such that  
5 each VPI/VCI pair has an associated point-to-point protocol over Ethernet discovery packet with a virtual channel multiplexed header; encapsulates the discovery packets with associated headers in an asynchronous transfer mode adaptation layer 5 format, such that each VPI/VCI pair has an associated encapsulated point-to-point protocol over Ethernet discovery packet with a logical link control header, an associated encapsulated dynamic host  
10 configuration protocol discovery packet with a logical link control header, an associated encapsulated point-to-point protocol over Ethernet discovery packet with a virtual channel multiplexed header, and an associated encapsulated dynamic host configuration protocol discovery packet with a virtual channel multiplexed header; transmits, for each VPI/VCI pair, the associated encapsulated discovery packets to a central office; determines if a valid  
15 response packet has been received to any of the transmitted discovery packets for a given VPI/VCI pair; establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon an encapsulation value of the received valid response and the VPI/VCI pair associated therewith; and utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data  
20 between the asynchronous transfer mode access device and a central office.

[0013] Another aspect of the present invention is a method for obtaining virtual path identifier, virtual channel identifier, and encapsulation values in an asynchronous transfer mode access device for a network using static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The method generates a plurality of address  
25 resolution protocol packets; adds headers to the plurality of address resolution protocol packets, such that a first set of address resolution protocol packets, each packet including a logical link control header, and a second set of address resolution protocol packets, each packet including a virtual channel multiplexed header, are realized; encapsulates the first and second sets of address resolution protocol packets; transmits all the encapsulated  
30 address resolution protocol packets to a central office; determines if a valid response packet has been received to any of the transmitted address resolution protocol packets; establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon a virtual path identifier/virtual channel identifier pair value and encapsulation value of the received valid response; and utilizes the established virtual path identifier/virtual channel

identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

[0014] Another aspect of the present invention is a method for obtaining virtual path identifier (VPI), virtual channel identifier (VCI), and encapsulation values in an asynchronous transfer mode access device having a table of pre-defined VPI/VCI pairs for a network using static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The method generates a pair of address resolution protocol packets, for each VPI/VCI pair, based upon a gateway internet protocol address; adds logical link control headers to the address resolution protocol packets, such that each VPI/VCI pair has an associated address resolution protocol packet with a logical link control header; adds virtual channel multiplexed headers to the address resolution protocol packets, such that each VPI/VCI pair has an associated address resolution protocol packet with a virtual channel multiplexed header; encapsulates the address resolution protocol packets with associated headers in an asynchronous transfer mode adaptation layer 5 format, such that each VPI/VCI pair has an associated encapsulated address resolution protocol packet with a logical link control header and an associated encapsulated address resolution protocol packet with a virtual channel multiplexed header; transmits, for each VPI/VCI pair, the associated encapsulated address resolution protocol packets to a central office; determines if a valid response packet has been received to any of the transmitted address resolution protocol packets for a given VPI/VCI pair; establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon an encapsulation value of the received valid response and the VPI/VCI pair associated therewith; and utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0015] The present invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating a preferred embodiment or embodiments and are not to be construed as limiting the present invention, wherein:

[0016] Figure 1 illustrates a block diagram of a conventional use of asynchronous transfer mode access devices;

[0017] Figure 2 illustrates a block diagram of an automatic configuration of asynchronous transfer mode access devices when non-static internet protocol addressing is used according to the concepts of the present invention; and

5 [0018] Figure 3 illustrates a block diagram of an automatic configuration of asynchronous transfer mode access devices when static internet protocol addressing is used according to the concepts of the present invention.

### **DETAILED DESCRIPTION OF THE PRESENT INVENTION**

10 [0019] The present invention will be described in connection with specific embodiments; however, it will be understood that there is no intent to limit the present invention to the embodiments described herein. On the contrary, the intent is to cover all alternatives, modifications, and equivalents as may be included within the spirit and scope of the present invention as defined by the appended claims.

15 [0020] For a general understanding of the present invention, reference is made to the drawings. In the drawings, like reference have been used throughout to designate identical or equivalent elements. It is also noted that the various drawings illustrating the present invention are not drawn to scale and that certain regions have been purposely drawn disproportionately so that the features and concepts of the present invention could be properly illustrated.

20 [0021] The present invention is a method by which an asynchronous transfer mode access device can automatically configure itself to encapsulate, that is to create data packets, according to the encapsulation values required by a central office to which it is connecting, which may correspond to either (a) logical link control or (b) virtual channel multiplexing.

25 [0022] Figures 2 and 3 illustrate the present invention in two different embodiments: (a) using non-static internet protocol addresses and/or (b) using static internet protocol addresses. In both embodiments, the role of the digital subscriber line access multiplexer **51** and of the asynchronous transfer mode switch **52** will be the same. However, the gateway server **53** in each of the embodiments behaves differently. The gateway server **53** can be  
30 configured to use any or all of the following (a) dynamic host configuration protocol, (b) point-to-point over Ethernet, and/or (c) static internet protocol addressing using address resolution protocol.

[0023] In the first embodiment, illustrated by Figure 2, it can use either (a) dynamic host configuration protocol or (b) point-to-point over Ethernet.



[0024] In the second embodiment, illustrated by Figure 3, it uses (c) static internet protocol addressing using address resolution protocol.

[0025] In both embodiments, the digital subscriber line access multiplexer **51** receives multiple concurrent incoming data packets and transmits them to the asynchronous transfer mode switch **52** in the conventional manner. The digital subscriber line access multiplexer **51** also receives data packets from the asynchronous transfer mode switch **52** in the conventional manner and transmits them to the proper destination, which is the proper asynchronous transfer mode access device (**30** or **40**) in the conventional manner, based on their header information.

[0026] In both embodiments, the asynchronous transfer mode switch **52** receives data packets from the digital subscriber line access multiplexer **51** and transmits the data packets to the gateway server **53** in the conventional manner and it also receives data packets from the gateway server **53** and transmits them to the digital subscriber line access multiplexer **51** in the conventional manner. The role of the asynchronous transfer mode switch **52** is to transmit the data packets in 53-byte segments or cells, thus enabling optimal throughput, according to the industry standard encapsulation method called asynchronous transfer mode adaptation layer 5.

[0027] The process illustrated by Figure 2 is as follows. The asynchronous transfer mode access device (**30** or **40**) begins operation by transmitting four different discovery packets, which are standard messages to the network gateway server **53**, requesting a return message. Each of these discovery packets is encapsulated by the asynchronous transfer mode access device (**30** or **40**) using the asynchronous transfer mode adaptation layer 5 method. The asynchronous transfer mode adaptation layer 5 method creates data packets that are segmented into 53-byte cells, which are transmitted separately to the network and reassembled at their destinations.

[0028] The four discovery packets are of the following four formats: (a) having both logical link control and point-to-point protocol over Ethernet header information, (b) having both virtual channel multiplexing and point-to-point protocol over Ethernet header information, (c) having both logical link control and dynamic host configuration protocol header information, and/or (d) having both virtual channel multiplexing and dynamic host configuration protocol header information.

[0029] Only a discovery packet in the proper format that corresponds to the configuration of the equipment (**51**, **52**, and **53**) in the central office **50** can cause a return response packet to be generated. Thus, the asynchronous transfer mode access device (**30** or

40), according to the concepts of the present invention, will discover the proper format for all subsequent data communication.

5 [0030] The asynchronous transfer mode access device (30 or 40) will detect whether the return response header contains logical link control or virtual channel multiplexing header information and use that type of header information in all subsequent data communication. The asynchronous transfer mode access device (30 or 40) will also detect whether the return response header contains point-to-point protocol over Ethernet or dynamic host configuration protocol header information and use that type of header information in all subsequent data communication.

10 [0031] The process is repeated for each of the values in the industry compliant table of virtual path identifier and virtual channel identifier pairs stored in the access device (30 or 40). When a return response packet is received, the asynchronous transfer mode access device (30 or 40) will incorporate the virtual path identifier and virtual channel identifier pair of the header of the return response packet into the header information for all subsequent data communication.

15 [0032] Once the process is complete, the end user's equipment (10, 11, 12, 21, 22, or 23) will be able to access the internet 60 through the equipment (51, 52, or 53) at the central office 50 using the central office's internet connection 55 because the asynchronous transfer mode access device (30 or 40) will be using the header information that corresponds to the configuration of the equipment (51, 52, or 53) in the central office 50.

20 [0033] The process illustrated by Figure 3 is as follows. The asynchronous transfer mode access device (30 or 40) begins operation by transmitting two different discovery packets which are standard messages to the network gateway server 53 requesting a return message. Each of these discovery packets is encapsulated by the asynchronous transfer mode access device (30 or 40) using asynchronous transfer mode adaptation layer 5 method. 25 The asynchronous transfer mode adaptation layer 5 method creates data packets that are segmented into 53-byte cells which are transmitted separately to the network and reassembled at their destination. Each of the discovery packets will contain address resolution protocol header information containing the static internet protocol address information that corresponds to the end users' device (10, 11, 12, 20, 21, and 22). 30

[0034] The two discovery packets are of the following two formats: (a) having logical link control header information, and/or (b) having virtual channel multiplexing header information.

[0035] Only a discovery packet in the proper format that corresponds to the configuration of the equipment (51, 52, and 53) in the central office 50 can cause a return response packet to be generated. Thus, the asynchronous transfer mode access device (30 or 40), according to the concepts of the current invention, will discover the proper format for all subsequent data communication. The asynchronous transfer mode access device (30 or 40) will detect whether the header contains logical link control or virtual channel multiplexing header information and use that type of header information in all subsequent data communication.

10 [0036] The process is repeated for each of the values in the industry compliant table of virtual path identifier and virtual channel identifier pairs stored in the access device (30 or 40). When a return response packet is received, the asynchronous transfer mode access device (30 or 40) will incorporate the virtual path identifier and virtual channel identifier pair of the header of the return response packet into the header information for all subsequent data communication.

15 [0037] Once the process is complete, the end user's equipment (10, 11, 12, 21, 22, or 23) will be able to access the internet 60 through the equipment (51, 52, or 53) at the central office 50 using the central office's internet connection 55 because the asynchronous transfer mode access device (30 or 40) will be using the header information that corresponds to the configuration of the equipment (51, 52, or 53) in the central office 50.

20 [0038] As noted above, one embodiment of the present invention obtains virtual path identifier, virtual channel identifier, and encapsulation values in an asynchronous transfer mode access device for a network using static internet protocol address assignments and asynchronous transfer mode adaptation layer 5.

25 [0039] The process further generates a plurality of discovery packets; adds headers to the plurality of discovery packets, such that a first set of discovery packets, each packet including a logical link control header, and a second set of discovery packets, each packet including a virtual channel multiplexed header, are realized; and encapsulates the first and second sets of discovery packets.

30 [0040] The process transmits all the encapsulated discovery packets to a central office; determines if a valid response packet has been received to any of the transmitted packets; and establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon a virtual path identifier/virtual channel identifier pair value and encapsulation value of the received valid response.

[0041] Finally, the process utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

5 [0042] The address resolution protocol packets may be encapsulated in asynchronous transfer mode adaptation layer 5 packet format. Each asynchronous transfer mode adaptation layer 5 packet may be segmented into fifty-three byte cells.

[0043] Another embodiment of the present invention obtains virtual path identifier (VPI), virtual channel identifier (VCI), and encapsulation values in an asynchronous transfer mode access device having a table of pre-defined VPI/VCI pairs for a network using non-  
10 static internet protocol address assignments and asynchronous transfer mode adaptation layer 5.

[0044] The process generates a pair of point-to-point protocol over Ethernet discovery packets for each VPI/VCI pair; generates a pair of plurality of dynamic host configuration protocol discovery packets for each VPI/VCI pair; and adds logical link control headers to  
15 the dynamic host configuration protocol discovery packets, such that each VPI/VCI pair has an associated dynamic host configuration protocol discovery packet with a logical link control header.

[0045] The process adds logical link control headers to the point-to-point protocol over Ethernet discovery packets, such that each VPI/VCI pair has an associated point-to-point  
20 protocol over Ethernet discovery packet with a logical link control header; adds virtual channel multiplexed headers to the dynamic host configuration protocol discovery packets, such that each VPI/VCI pair has an associated dynamic host configuration protocol discovery packet with a virtual channel multiplexed header; and adds virtual channel multiplexed headers to the point-to-point protocol over Ethernet discovery packets, such that  
25 each VPI/VCI pair has an associated point-to-point protocol over Ethernet discovery packet with a virtual channel multiplexed header.

[0046] The process encapsulates the discovery packets with associated headers in an asynchronous transfer mode adaptation layer 5 format, such that each VPI/VCI pair has an associated encapsulated point-to-point protocol over Ethernet discovery packet with a  
30 logical link control header, an associated encapsulated dynamic host configuration protocol discovery packet with a logical link control header, an associated encapsulated point-to-point protocol over Ethernet discovery packet with a virtual channel multiplexed header, and an associated encapsulated dynamic host configuration protocol discovery packet with a virtual channel multiplexed header; transmits, for each VPI/VCI pair, the associated

encapsulated discovery packets to a central office; determines if a valid response packet has been received to any of the transmitted discovery packets for a given VPI/VCI pair; and establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon an encapsulation value of the received valid response and the VPI/VCI pair associated therewith; and utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

5 [0047] The encapsulated address resolution protocol packets may be segmented into fifty-three byte cells.

10 [0048] A further embodiment of the present invention obtains virtual path identifier, virtual channel identifier, and encapsulation values in an asynchronous transfer mode access device for a network using static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The process generates a plurality of address resolution protocol packets; adds headers to the plurality of address resolution protocol packets, such that a first set of address resolution protocol packets, each packet including a logical link control header, and a second set of address resolution protocol packets, each packet including a virtual channel multiplexed header, are realized; and encapsulates the first and second sets of address resolution protocol packets.

15 [0049] The process transmits all the encapsulated address resolution protocol packets to a central office; determines if a valid response packet has been received to any of the transmitted address resolution protocol packets; and establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon a virtual path identifier/virtual channel identifier pair value and encapsulation value of the received valid response.

20 [0050] Finally, the process utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

[0051] A plurality of point-to-point protocol over Ethernet discovery packets and a plurality of dynamic host configuration protocol discovery packets may be generated.

25 [0052] Logical link control headers and virtual channel multiplexed headers may be added to the plurality of point-to-point protocol over Ethernet discovery packets and a plurality of dynamic host configuration protocol discovery packets such that a first set of point-to-point protocol over Ethernet discovery packets, each point-to-point protocol over Ethernet discovery packet including a logical link control header. A second set of point-to-

point protocol over Ethernet discovery packets, each point-to-point protocol over Ethernet discovery packet may include a virtual channel multiplexed header. A third set of dynamic host configuration protocol discovery packets each dynamic host configuration protocol discovery packet may include a logical link control header. A fourth set of dynamic host configuration protocol discovery packets, each dynamic host configuration protocol discovery packet may include a virtual channel multiplexed header.

[0053] The discovery packets may be encapsulated in asynchronous transfer mode adaptation layer 5 packet format. The process may also segment each asynchronous transfer mode adaptation layer 5 packet into fifty-three byte cells.

10 [0054] A further embodiment of the present invention obtains virtual path identifier (VPI), virtual channel identifier (VCI), and encapsulation values in an asynchronous transfer mode access device having a table of pre-defined VPI/VCI pairs for a network using static internet protocol address assignments and asynchronous transfer mode adaptation layer 5. The process generates a pair of address resolution protocol packets, for each VPI/VCI pair, based upon a gateway internet protocol address; adds logical link control headers to the address resolution protocol packets, such that each VPI/VCI pair has an associated address resolution protocol packet with a logical link control header; adds virtual channel multiplexed headers to the address resolution protocol packets, such that each VPI/VCI pair has an associated address resolution protocol packet with a virtual channel multiplexed header; and encapsulates the address resolution protocol packets with associated headers in an asynchronous transfer mode adaptation layer 5 format, such that each VPI/VCI pair has an associated encapsulated address resolution protocol packet with a logical link control header and an associated encapsulated address resolution protocol packet with a virtual channel multiplexed header.

25 [0055] The process transmits, for each VPI/VCI pair, the associated encapsulated address resolution protocol packets to a central office; determines if a valid response packet has been received to any of the transmitted address resolution protocol packets for a given VPI/VCI pair; establishes a virtual path identifier/virtual channel identifier pair value and encapsulation value based upon an encapsulation value of the received valid response and the VPI/VCI pair associated therewith; and utilizes the established virtual path identifier/virtual channel identifier pair value and encapsulation value for transferring data between the asynchronous transfer mode access device and a central office.

30 [0056] A plurality of point-to-point protocol over Ethernet discovery packets and a plurality of dynamic host configuration protocol discovery packets may be generated.

[0057] In summary, the present invention eliminates the need for the end user to configure the virtual path identifier, virtual channel identifier, and asynchronous transfer mode adaptation layer 5 encapsulation on an asynchronous transfer mode based network access device to enable the data transfer to and from the central office gateway. The auto-configuration method of the present invention can be utilized with networks that use static internet protocol address assignments. The present invention emulates a device trying to obtain information about the network devices and their associated internet protocol addresses by generating address resolution protocol packets using the known gateway internet protocol address.

10 [0058] The present invention uses a list of predefined virtual path identifier virtual channel identifier pairs to generate the address resolution protocol packets for each pair and each possible encapsulation. If the auto-configuration module receives a valid response (address resolution protocol reply) for a specific combination of the aforementioned variables/parameters, it will have detected the required parameters that are used for that  
15 specific access point to the network.

[0059] The auto-configuration method of the present invention can also be utilized with networks that use non-static internet protocol address assignments. These networks most commonly use a PPPoE or a DHCP server. The internet protocol address is assigned to the end-user via DHCP or PPPoE protocols. The present invention emulates a device trying to  
20 obtain an internet protocol address by generating DHCP and PPPoE discovery packets.

[0060] The present invention uses a list of predefined virtual path identifier virtual channel identifier pairs to generate the DHCP and PPPoE discovery packets for each pair and each possible encapsulation. If the auto-configuration module receives a valid response for a specific combination of the aforementioned variables/parameters, it will have detected  
25 the required parameters that are used for that specific access point to the network.

[0061] While various examples and embodiments of the present invention have been shown and described, it will be appreciated by those skilled in the art that the spirit and scope of the present invention are not limited to the specific description and drawings herein, but extend to various modifications and changes.

**What is claimed is:**

1           1. A method for obtaining virtual path identifier, virtual channel identifier, and  
2     encapsulation values in an asynchronous transfer mode access device for a network using  
3     static internet protocol address assignments and asynchronous transfer mode adaptation  
4     layer 5, comprising:

5           (a) generating a plurality of address resolution protocol packets;

6           (b) adding headers to the plurality of address resolution protocol packets, such  
7     that a first set of address resolution protocol packets, each packet including a logical link  
8     control header, and a second set of address resolution protocol packets, each packet  
9     including a virtual channel multiplexed header, are realized;

10          (c) encapsulating the first and second sets of address resolution protocol packets;

11          (d) transmitting all the encapsulated address resolution protocol packets to a  
12     central office;

13          (e) determining if a valid response packet has been received to any of the  
14     transmitted address resolution protocol packets;

15          (f) establishing a virtual path identifier/virtual channel identifier pair value and  
16     encapsulation value based upon a virtual path identifier/virtual channel identifier pair  
17     value and encapsulation value of the received valid response; and

18          (g) utilizing the established virtual path identifier/virtual channel identifier pair  
19     value and encapsulation value for transferring data between the asynchronous transfer  
20     mode access device and a central office.

1           2. The method as claimed in claim 1, wherein the address resolution protocol  
2     packets are encapsulated in asynchronous transfer mode adaptation layer 5 packet format.

1           3. The method as claimed in claim 2, wherein each asynchronous transfer mode  
2     adaptation layer 5 packet is segmented into fifty-three byte cells.

1           4. A method for obtaining virtual path identifier (VPI), virtual channel identifier  
2     (VCI), and encapsulation values in an asynchronous transfer mode access device having a



15

3 table of pre-defined VPI/VCI pairs for a network using static internet protocol address  
4 assignments and asynchronous transfer mode adaptation layer 5, comprising:

5 (a) generating a pair of address resolution protocol packets, for each VPI/VCI  
6 pair, based upon a gateway internet protocol address;

7 (b) adding logical link control headers to the address resolution protocol packets,  
8 such that each VPI/VCI pair has an associated address resolution protocol packet with a  
9 logical link control header;

10 (c) adding virtual channel multiplexed headers to the address resolution protocol  
11 packets, such that each VPI/VCI pair has an associated address resolution protocol packet  
12 with a virtual channel multiplexed header;

13 (d) encapsulating the address resolution protocol packets with associated headers  
14 in an asynchronous transfer mode adaptation layer 5 format, such that each VPI/VCI pair  
15 has an associated encapsulated address resolution protocol packet with a logical link  
16 control header and an associated encapsulated address resolution protocol packet with a  
17 virtual channel multiplexed header;

18 (e) transmitting, for each VPI/VCI pair, the associated encapsulated address  
19 resolution protocol packets to a central office;

20 (f) determining if a valid response packet has been received to any of the  
21 transmitted address resolution protocol packets for a given VPI/VCI pair;

22 (g) establishing a virtual path identifier/virtual channel identifier pair value and  
23 encapsulation value based upon an encapsulation value of the received valid response and  
24 the VPI/VCI pair associated therewith; and

25 (h) utilizing the established virtual path identifier/virtual channel identifier pair  
26 value and encapsulation value for transferring data between the asynchronous transfer  
27 mode access device and a central office.

1 5. The method as claimed in claim 4, wherein the encapsulated address resolution  
2 protocol packets are segmented into fifty-three byte cells.

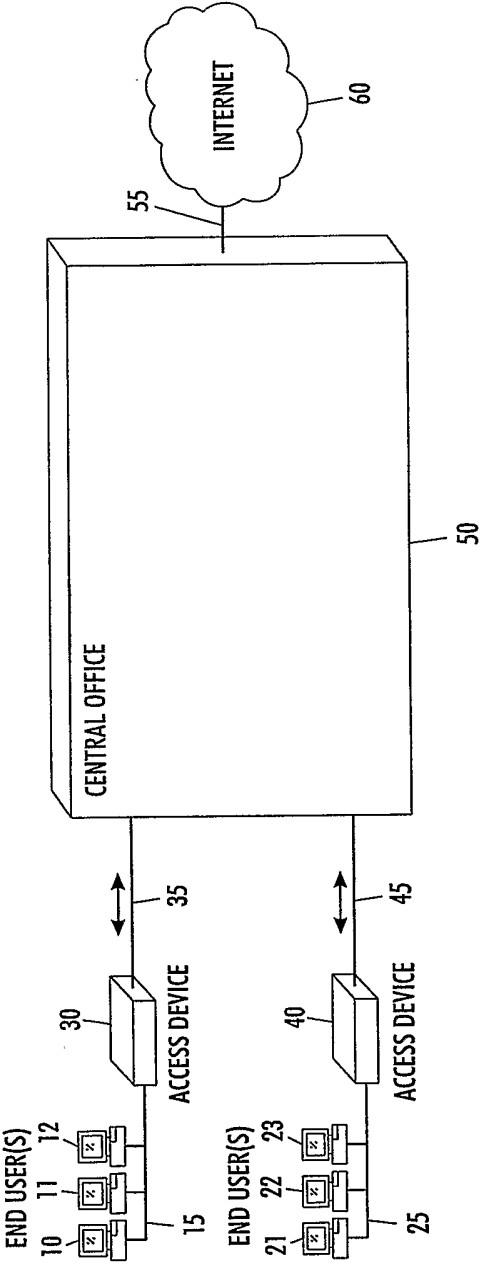


FIG. 1

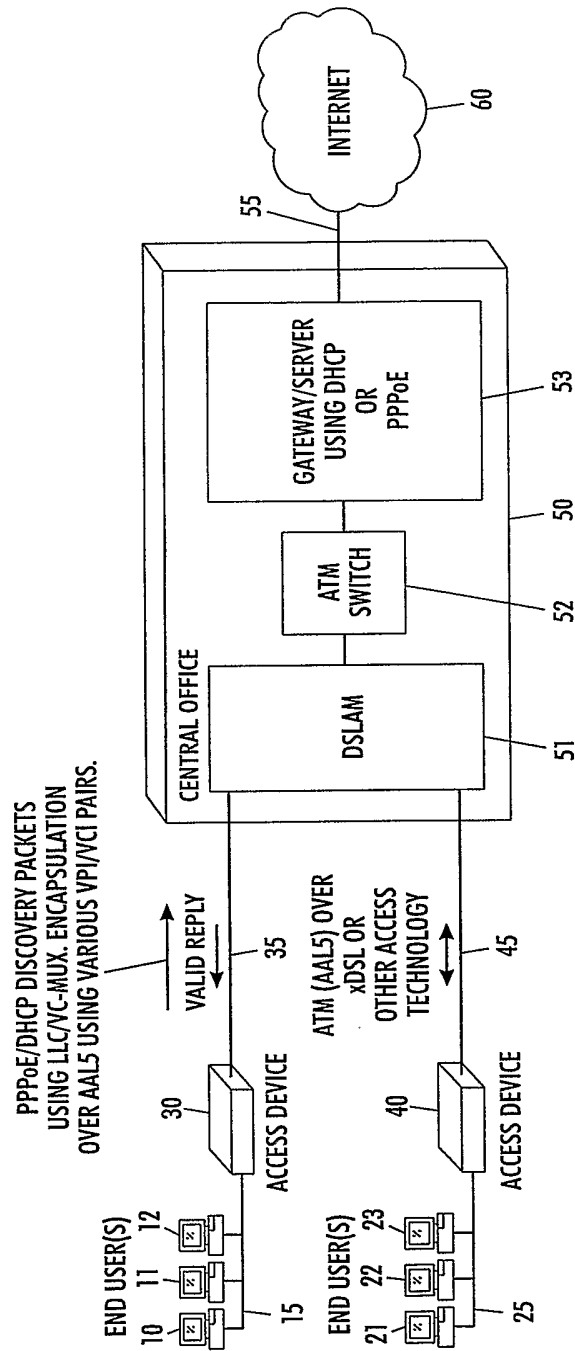


FIG. 2

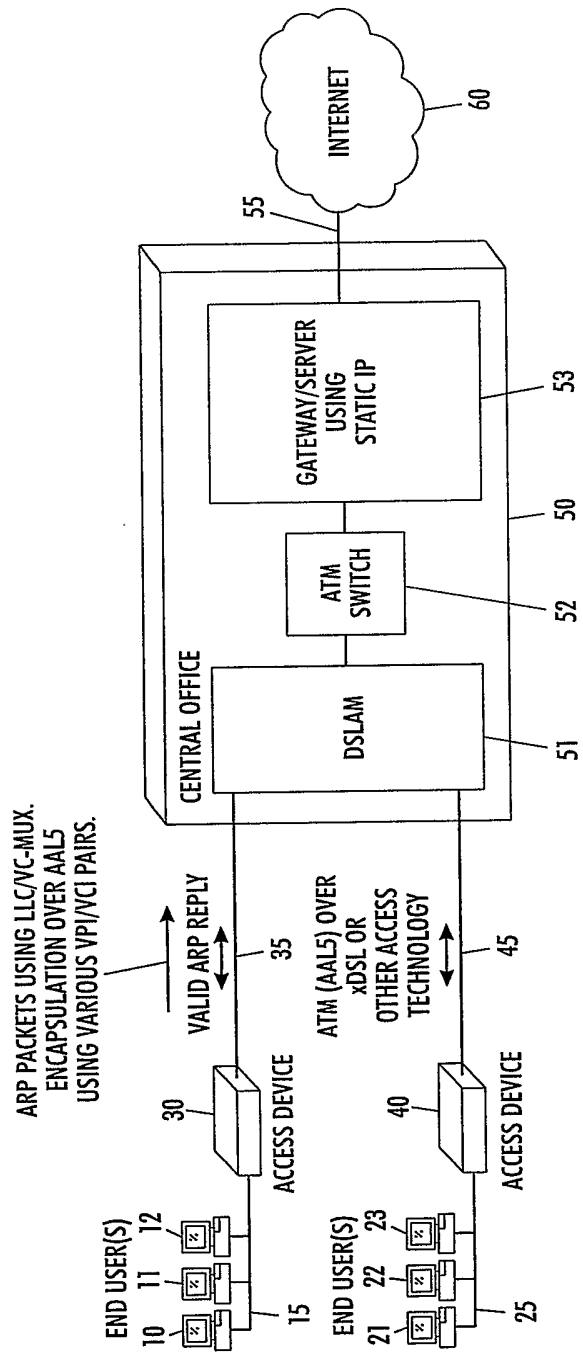


FIG. 3

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2005/041262

## A. CLASSIFICATION OF SUBJECT MATTER

H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages             | Relevant to claim No. |
|-----------|------------------------------------------------------------------------------------------------|-----------------------|
| Y         | US 2004/052263 A1 (XU HAIBO)<br>18 March 2004 (2004-03-18)                                     | 1-3                   |
| A         | paragraph [0033] - paragraph [0033]<br>paragraph [0042] - paragraph [0047]                     | 4, 5                  |
| Y         | US 6 118 768 A (BHATIA ET AL)<br>12 September 2000 (2000-09-12)<br>column 4, line 53 - line 66 | 1-3                   |

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

17 March 2006

Date of mailing of the international search report

27/03/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gregori, S

# INTERNATIONAL SEARCH REPORT

International application No

PCT/US2005/041262

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 2004052263                             | A1                  | 18-03-2004                 | NONE                |
| US 6118768                                | A                   | 12-09-2000                 | NONE                |