

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 November 2011 (17.11.2011)

(10) International Publication Number
WO 2011/141633 A1

(51) International Patent Classification:
H04B 1/59 (2006.01) **H01Q 1/22** (2006.01)
H04B 5/00 (2006.01) **G09F 3/00** (2006.01)

(21) International Application Number:
PCT/FI2011/050427

(22) International Filing Date:
9 May 2011 (09.05.2011)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
20105507 **10 May 2010 (10.05.2010)** **FI**

(71) Applicant (for all designated States except US):
MARISENSE OY [FI/FI]; Pohjantähdentine 17, FI-01450 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KARHUKETO, Hannu** [FI/FI]; Roinilantie 16, FI-04500 Tuusula (FI). **WRIGHT, Gregory** [US/US]; 18 Clay Street, Fair Haven, NJ 07704 (US).

(74) Agent: **HEINÄNEN OY**; Airport Plaza, Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: WIRELESS ELECTRONIC SHELF LABEL

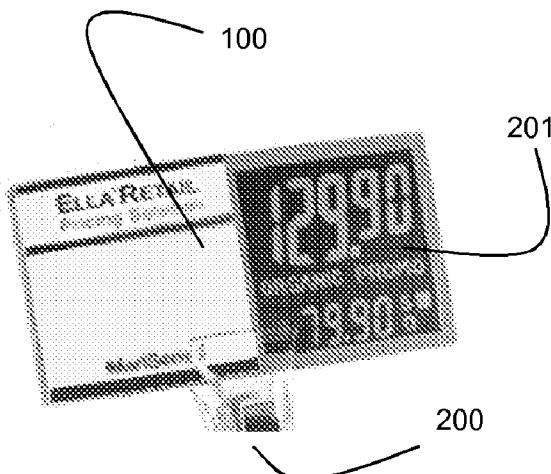


Fig. 2

(57) **Abstract:** A wireless electronic shelf label (100) having a layered structure comprising: a display layer (101) comprising display material, a backplane material structure with an antenna (202), and a circuit board arrangement with control electronics for controlling the operation of the label, such as the display and the radio communication, and a resilient layer having a space for a rigid component, such as a battery, wherein said resilient layer is arranged to provide a substantially even total thickness of said label (100), wherein the radio communication control further comprises means for radio frequency communication via modulated backscatter with at least one detector diode (205), and, wherein the detector diode is connected to the antenna in at least one antenna connection point where the antenna signal has its maximum or at least near maximum.

WIRELESS ELECTRONIC SHELF LABEL

Technical field

5 The present invention relates to electronic shelf labels. Especially the present invention relates to wireless electronic shelf labels having a layered structure and provided with an antenna and detector diode means.

Technical background

10

Electronically controllable compact display units find new and wider applications continuously. A well-known and a steadily growing field of applications can be found in stores and warehouses, where instead of conventional paper price labels on the shelves, the prices and other product related information is displayed using electronic shelf labels.

20

The electronic shelf label system, also known by the acronym ESL, is a system used by retailers for displaying product pricing on shelves. Typically, electronic shelf labels are implemented as electronic display modules that are attached to the front edge of retail shelving. These modules use different technologies to show the current product price and also other information to the customer. A communication network allows the price display to be automatically updated whenever a product price is changed. This automated system reduces pricing management labor costs and improves pricing accuracy.

25

ESL's are particularly suitable for use in large shops or supermarkets that offer thousands or tens of thousands product items for sale, whose prices must be updated frequently and correctly.

30

The electronic display modules can be updated from a centralised control system via wired or wireless communication. All-wired systems have obvious problems in terms of the layout limitations caused by complicated cabling due to the high number of individual ESL displays. Wireless systems have their major

technological bottleneck in the need for individual power supplies for each ESL display unit and requirement for long power supply lifetime, i.e. operational lifetime for the batteries. In addition, the wireless systems need to be able to provide dependable communication channel in an environment that has high number of individual receiver-transmitter units that in order to prolong the battery life, need to operate with minimum transmitting power levels.

A display technology that is suitable for ESL applications is a so called Electronic Paper Display (EPD) that possess a paper-like high contrast appearance, 10 ultra-low power consumption, and a thin, light form. EPD's aim to give the viewer the experience of reading from paper, while providing the capability to electronically update the displayed information. EPD's are a technology enabled, as one possibility, by electronic ink. Such ink carries an electrical charge enabling it to be updated through electronics. Electronic ink is well suited for EPD's as it 15 is a reflective technology which requires no front or backlight, is viewable under a wide range of lighting conditions, including direct sunlight, and requires no power to maintain an image. Electrical power is only consumed when the displayed data is changed. In order to become widely applied in different type of applications, wireless ESL's or corresponding electronically controlled wireless 20 displays are faced with a number of requirements that are partly dictated by the manufacturing process and partly by the end use, for example, the use, environment and manageability in a store by the store personnel.

WO 0067110 (A1) (E Ink Corporation) discloses a display unit for electronic 25 shelf price label system that utilizes electronic ink and EPD technology. The electronic display unit in WO 0067110 features a printable electronic display comprising an encapsulated electrophoretic display medium. The resulting electronic display is flexible and has in large measure the applications of a printed display. Further, since the encapsulated electrophoretic display medium used in 30 the present invention can be printed, the display itself can be made inexpensively. The encapsulated electrophoretic display medium is an optoelectronically active material which comprises at least two phases: an electrophoretic contrast media phase and a coating/binding phase. The electrophoretic display

medium can form, for example, a full color, multi-color, or two color (e. g. black and white) display. The electrophoretic phase comprises at least one species of encapsulated electrophoretic particles, having distinct physical and electrical characteristics, dispersed in a clear or dyed suspending fluid. The coat-

5 ing/binding phase includes a polymer matrix that surrounds the electrophoretic phase. In this embodiment, the polymer in the polymeric binder is capable of being dried, crosslinked, or otherwise cured as in traditional inks, and therefore a printing process can be used to deposit the encapsulated electrophoretic display medium onto a substrate.

10

In ESL's from the manufacturing point of view, in the order to achieve truly low cost ESL's, a roll-to-roll or web-based manufacturing process is preferred. This brings about severe limitations to the encapsulation of the ESL's to be suitable for such manufacturing methods, for example, due to the requirement a certain 15 level of flexibility of the structures. Typically not all of the components required in an ESL and having cost and technical performance at acceptable level are nowadays available as mechanically flexible structures and this limitation would need to be somehow addressed in the manufacturing methods.

20

In order for the ESL's to be easily manageable during the manufacturing process and in the following logistical steps, the encapsulation of the ESL's need to provide a somewhat flexible structure against damage and preferably even thickness of the encapsulation or casing without any protruding or intend- 25 ing rims or order structures. Reasons for such requirements arise from, for ex-

ample, simple and easy packaging and delivery of the items to the end user

from the manufacturer, any preparations, automated or manual, needed for the ESL's to be used in the shelves (often also including adding conventional printed information on the ESL's) and installation/mounting of the ESL's on the shelves or holders therein. ESL's undergo a lot of handling during the prepara- 30 tion before they are installed to those substantially permanent final locations in the shelves. This make the requirements for these display modules clearly dif-

ferent from those of, for example, small sized electronic devices to be personal- ly carried out in pockets etc. This also opens up more possibilities to choose

materials as well in many cases relieves requirements for the size/dimensions of the devices. Further, the structure and encapsulation of ESL's need to be such that the wireless communication with the control systems can be realized with minimal or negligible interference from the encapsulation itself or by the 5 surrounding structures, such as the metal shelves that the ESL's are to be attached to in the shop.

In addition, the preferred shape of the encapsulated devices in some applications is not a straight card type shape, but in order to improve the visual appearance and readability, the ESL display can also have a slightly curved shape 10 so that the displayed information appears on the outwards curved surface. Further, in many applications the extreme thinness of the product might not be preferable, because it can complicate the handling of ESL's.

15 WO 2009103857 (A1) (Marisense Oy) discloses a layered thin display unit for ESL's comprising a flexible display layer having display material, preferably epaper, a flexible backplane layer having an electrode structure for driving the display material, a rigid component and a resilient layer. The unit is provided with wireless communication means including an antenna that is arranged in the 20 backplane layer. This thin layered structure enables a roll-to-roll or web-based manufacturing process.

The main benefits of the display modules according to WO 2009103857 lie in the mechanical resistance of substantially thin and flexible display module laminates against mechanical impacts, as well as in the completely smooth outer 25 surface and even thickness to aid overall manageability. Further, the encapsulation technique results in casings that have good performance in respect to the wireless communication using an internal antenna. A further benefit is the fact that the visual appearance of the ESL's resembles paper sheets or paper labels 30 that are familiar for the customers and that can also be placed in the same type of holders, pockets or space as the conventional paper labels. It further allows using such energy source, for example, battery solutions, that provide long op-

erational lifetimes without high cost that would be inherent for more exotic battery technologies.

The ESL's may, like in WO 2009103857, be implemented as semi-active RF tags that may be powered from incident RF communicating via modulated backscatter. For this reason the ESL's have to be provided with a detector diode. The problem with the prior art detector diode arrangements is the complex structure that does not allow continuous manufacturing methods and also poor electrical properties, mainly due to the insufficient signal strength in signals which the indicator diode receives via the antenna.

Summary of the invention

The aim of the present invention is to provide a novel and inventive ESL structure that improves the electrical properties of the ESL's, especially the operation of the detector diode, and also simplifies the manufacturing process.

The present invention is based on the idea that the detector diode is connected to the antenna in an antenna connection point area where the antenna signal has its maximum.

In a preferred embodiment the detector diode is connected to the connection point in the antenna via a conductor that leads the antenna signal to the detector diode. In this way the diode can be arranged in the controlling electronic circuit adjacent to the antenna which further simplifies the manufacturing process as the diode can be connected to the flexible circuit board together with the other components and not to the antenna.

In another preferred embodiment the connection conductor is arranged on the opposite side of the flexible circuit board than the antenna and connected to the antenna by means of conducting vias. In this way the conductor length can be minimized.

The present invention is in detail defined in independent claim 1 and its preferred embodiments are in detail defined in the other claims.

The problems with the prior art solutions are related to the structure of the electronic label because in the electronic label the antenna is part of the structure of the electronic label. The optimal places for the detector diode can be measured and they can be in different parts of the antenna layer, for example in the middle of the antenna layer. With the solution of this invention the antenna layer is on top of polyester layer, and therefore the detector diode cannot be soldered to the polyester layer because the layer tolerates heat only up to 150 C degrees. Therefore the diode cannot be attached directly to the most optimal spot at the antenna layer with reasonable costs or without extra phases in manufacturing process. Because of costs, usage of polyester-type layer is preferred.

The benefit with the solution of the present invention with the multilayered structures is that despite of the structural and process limitations described above the signal can be brought out from the optimal spot of the antenna layer and to flexible circuit board. With the solution of the present invention the detector diode can be attached to the same layer and place with the other components to the polyamide flexible circuit board. This way the detector diode can receive the optimal signal although it's not itself located at the optimal spot on the antenna layer. The connection from the antenna layer to the detector diode can be made with the same way as other connections between the flexible circuit board and the backplane using e.g. anisotropic conducting connection.

With the solution of the present invention no extra manufacturing phases are needed when the detector diode is attached to the same layer with other components. It can be attached and soldered using the same methods and processes as the other components. This solution of the present invention also creates lower costs in production. Another benefit is that when the detector diode is located at the same location as the other components usage of the expensive polyamide circuit can be kept minimal in the manufacturing process.

Brief description of the drawings

The foregoing, and additional objects, features and advantages of the present invention will be more clearly understood from the following detailed description 5 of preferred embodiments of the present invention, taken in conjunction with accompanying drawings, in which:

Fig. 1 presents an electronic shelf label system for displaying product pricing on shelves,

10

Fig. 2 presents an ESL module according to the present invention together with a plastic holder,

15

Figs. 3a and 3b present the antenna and the control electronics with the detector diode according to the first embodiment of the present invention in a top view and in a cross sectional view,

20

Figs. 4a and 4b present the antenna and the control electronics with the detector diode according to the second embodiment of the present invention in a top view and in a cross sectional view, and

Figs. 5a and 5b present the antenna and the control electronics with the detector diode according to the third embodiment of the present invention in a top view and in a cross sectional view.

25

Detailed description of preferred embodiments

Figure 1 shows an ESL (Electronic Shelf Label) system utilizing ESL's 100 implemented as a semi-active tag in a supermarket or similar sale environment 30 where the shelves 101 are equipped with ESL displays that are typically attached in shelf rails carrying plastic ESL holders 102. ESL displays are placed in locations corresponding to the products on the shelves to be easily perceivable for the customers.

ESL displays communicate in a wireless manner with the base stations 103. This wireless communication method may be based on passive backscatter radio communication. In this approach the base stations actively send radio signals and instead of answering with active radio transmission, the ESL modules do not use a radio transmitter; instead, they answer by modulating the reflected power of the base station signal. The modulation is achieved, typically, by changing the load state of the ESL antenna in the ESL module, for example, by connecting and disconnecting the antenna between the ground and non-ground potential. This modulation of the backscattered signal allows for the ESL modules to answer to the base stations and further to the store level server 104.

Each ESL module can be identified by its own identification code that the ESL module in question knows to listen for in the transmission from the base station. After receiving new information, instructions or commands from the store server via base station, the ESL module can acknowledge the reception of these instructions by using the reflected backscattering modulated properly and timely for the store level server to identify that the response is coming from the ESL module in question. To facilitate that the store server may have a certain listening period after a transmission directed to a certain ESL module for giving the module possibility to answer during that time.

Base stations are typically connected in a wired manner, for example, via Ethernet connection or via WLAN or corresponding wireless communication connection to a base station controller 105. This base station controller is further connected to a controller software running in a store level server containing the price and other product information. Some retail chains may have the server only in the head office.

When price information is changed in the store level server locally according to pre-programmed instructions therein or manually by the shopkeeper or, remotely, from instructions received from a store chain level server 108, this information will be delivered through the base stations to individual ESL displays.

The corresponding price information is also made available to the check-out counter 106 that is arranged in communication with the store level server. A further possibility for modifying the content of the information send to individual ESL displays is the use of a handheld terminal 107. A handheld terminal can be 5 used by a member of the shop staff allowing him/her to freely move around in the shop and communicate in a wireless manner with the store level server and POS system. This communication can be achieved via a wireless communication network allowing using Personal Digital Assistant (PDA) type computing devices with inherent wireless communication capabilities. The handheld terminal 10 can contain only limited functionalities or depending on the processing power of the device, it can be used to control the full capabilities of the application running in the store level server. In some applications in smaller shops with a fewer number of ESL displays, a handheld terminal may be used instead of a separate store level server. A mobile phone may also be used as a contacting 15 means to the POS and further to the pricing system, too.

Further, the shop level server can be in connection with a chain level server that can provide identical price and product information to several stores belonging to the same chain of stores.

20

Figure 2 shows an ESL display module 100 together with a plastic clip holder 200 where the display module is attached to the clip holder 200. The holder 200 can be attached, typically, to the front rail of a shelf and facilitates easy installation of the ESL display. The ESL module may also be attached directly to the 25 shelf or to a self edge rail other structure without a separate holder.

In the example embodiment in Fig. 1, the size of the ESL module is approximately 90 mm (width) x 45 mm (height) x 2 mm (thickness). This gives the display module, or label a convenient size for convenient manual handling, occupying a suitably sized space in the shelf and also large enough text and numbers to be easily visible for a customer.

The above dimensions are just exemplary giving idea of the size class of the

module. The size of the modules according to the invention can vary from these according to the application.

The ESL display module 100 in Fig. 2 has a layered structure. It consists essentially of a flexible epaper display layer 201 comprising epaper display material, a backplane layer as a flexible circuit board having an electrode structure (not shown) for controlling the display, a substantially rigid component, wherein the thickness of said rigid component is greater than the thickness of said flexible display layer and the thickness of said flexible backplane layer, and a resilient layer having a cut-out space for said rigid component, wherein said resilient layer is arranged to provide a substantially even total thickness of said device.

The module further comprises wireless communication capabilities with an antenna 202 on the same flexible circuit board 203 as the display control (Fig. 3a), as the ESL is implemented as semi-active RF tags that is powered from incident RF communicating via modulated backscatter, and a separate flexible circuit board 204 with a detector diode 205 wherein the same diode may be used in both receive and acknowledgment modes. The separate flexible circuit board 204 controlling the operation of the ESL is smaller than the display control and antenna board 203 and arranged under the backplane board as can be seen in Fig. 3b.

The rigid component may be an energy source, an accumulator, and has been encapsulated in a cut-out space by laminating said display, backplane, control circuit board and resilient layers together. Further, the display layer, the backplane layer, the resilient layer and the rigid component are located between two protective layers. The rigid component has been attached to the flexible printed wire board 204 operating as a submodule under the backplane and the antenna.

Manufacturing of the ESL's is implemented basically on the web-type roll-to-roll manufacturing methods that is not described here in detail as it is not essential

for this invention. The continuous web-shaped product may be die cut into individual labels 100.

The backplane and the antenna circuit board 203 and the ESL control circuit board 204 are patterned plastic films (PET or PC or PVC or polyimid) with patterned conductive copper layers 205 – 208 on the top and bottom surfaces (see details in Figures 3a and 3b). The forming and patterning of the conductors can be made using any method known as such for a person skilled in the art, for example by direct printing of conductive ink or by etching of a thin metal layer.

10 The lower surface of the backplane has display segment feed lines patterned in a similar way. Each display segment is electrically connected to a corresponding display segment feed line through a preferably laser processed via. Also other ways of providing feed-through vias are possible as is evident for a person skilled in the art. In phase 2, in order to establish an electrical contact from the 15 backplane segments to the display front electrode, that is in this example on the front surface of the flexible electronic display web, an electrically conducting tape is laminated on the backplane area acting as a front electrode feed line. Alternatively and instead of an electrically conducting tape, electrically conducting paste or similar material with adhesive nature may be dispensed on the 20 backplane web to make contact with the front plane electrodes.

Further, according to the present invention the detector diode is connected to the antenna via connection conductors 209, 210 in an antenna connection points 211, 212 where the antenna signal has its maximum, in fig. 3a at the 25 front edge in the middle near the bottom of the V formed front edge.

The detector diode can be arranged in the controlling flexible circuit board 204 connected to the flexible circuit board together with the other components on the opposite side (underside) of the board 204. The connection conductors are 30 arranged on the opposite side of the flexible circuit board than the antenna direct over the underside of the board and connected to the antenna by means of conducting vias 213, 214 and to the diode by means of a third conducting via 215 on the control circuit board.

An antenna required for the wireless communication is formed on the backplane board together with the conductors required to drive the e-ink display, and different embodiments are shown in Figs. 3a, 3b, 4a, 4b, 5a and 5b. In Figs. 4a, 5 4b, 5a and 5b the antenna structure 302, 402 consists of two triangular forms and the conductors 309, 310, 409, 410 are arranged between them (Fig. 4a) or outside them (Fig. 5a) on the same or opposite side of the circuit board. In the latter case conducting vias 313, 314, 315, 413, 414 and 415 are used (Fig. 4b and Fig. 5b).

10

As a further advantage, the manufacturing process according to the invention gives possibility to manufacture display labels that can be made curved in shape. This can be done by adjusting the tension between the different laminated layers together with proper selection of materials. The upper surface of 15 the display label 100 may be e.g. convex or concave.

The invention provides possibility to manufacture display module structures that despite of their significant thickness, at least more than 1 mm but typically in the range of 2 mm, have certain amount of flexibility and still maintain well their 20 original shape. Further, the encapsulated display modules 100 can be made very light compared to their size, which makes the convenient and easy to handle both manually and automatically. In prior art products and encapsulation methods, increasing thickness typically decreases the flexibility, whereas in the products according to the invention the flexibility and the benefits therein are 25 preserved better even if conventional rigid components are to be used as a part of the device ESL. Further, instead of one diode also two diodes or even more may be used.

CLAIMS

1. A wireless electronic shelf label (100) having a layered structure comprising:
a display layer (101) comprising display material, a backplane material structure
5 with an antenna (202), and a circuit board arrangement with control electronics
for controlling the operation of the label, such as the display and the radio
communication,
and
a resilient layer having a space for a rigid component, such as a battery, where-
10 in said resilient layer is arranged to provide a substantially even total thickness
of said label (100),
wherein the radio communication control further comprises means for radio fre-
quency communication via modulated backscatter with at least one detector
diode (205),
15 **characterized** in that
the detector diode is connected to the antenna in at least one antenna connec-
tion point where the antenna signal has its maximum or at least near maximum.
2. The wireless electronic shelf label (100) according to claim 1, **characterized**
20 in that the detector diode is connected to the connection point in the antenna via
a conductor that leads the antenna signal to the detector diode.
3. The wireless electronic shelf label (100) according to claim 1 or 2, **characte-**
rized in that the connection conductor is arranged on the same side or opposite
25 side of the circuit board than the antenna and when arranged on the opposite
side connected to the antenna by means of conducting vias.
4. The wireless electronic shelf label (100) according to any of the claims 1 to 3
wherein said antenna and the control electronics are arranged on separate cir-
30 circuit boards.
5. The wireless electronic shelf label (100) according to any of the claims 1 to 4

wherein said antenna and control electronics are arranged on the same flexible circuit board.

6. The wireless electronic shelf label (100) according to any of the claims 1 to 4
5 wherein said antenna and control electronics are arranged on separate circuit boards arranged adjacent to each other on different levels.
7. The wireless electronic shelf label (100) according to any of the claims 1 to 6
10 wherein the circuit board or boards for said antenna and control electronics is/are flexible.

1/3


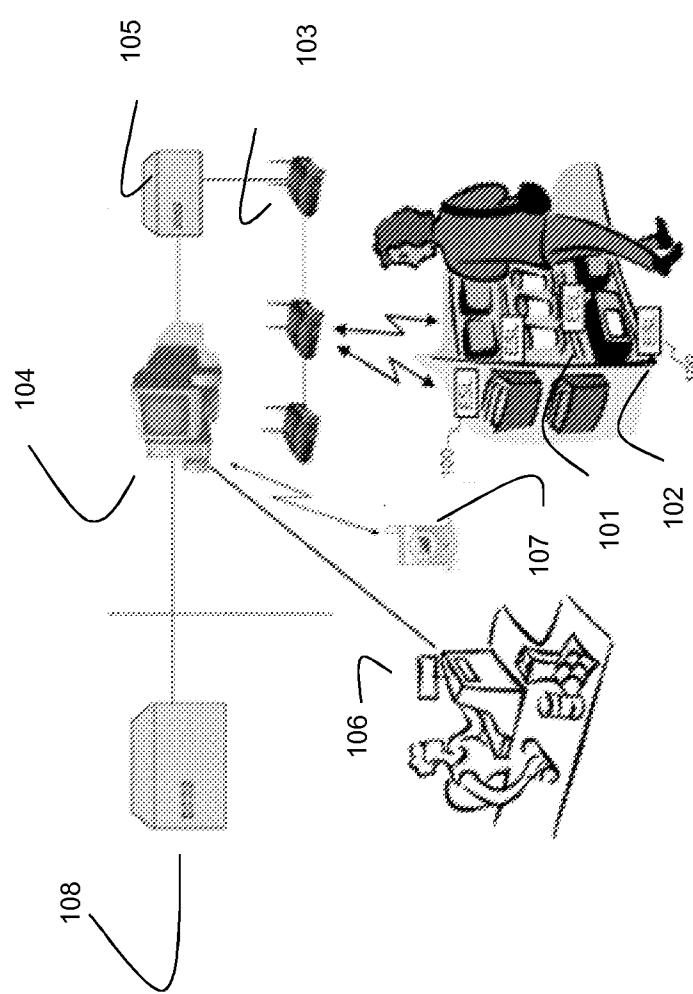


Fig 1

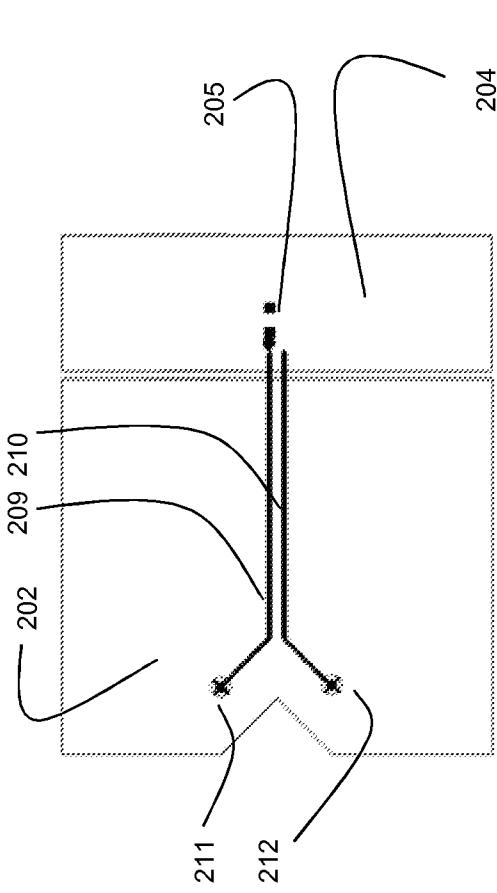

2/3

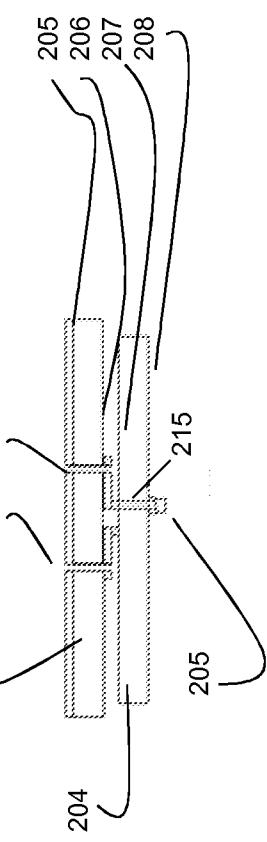


Fig. 3a

Fig. 3b

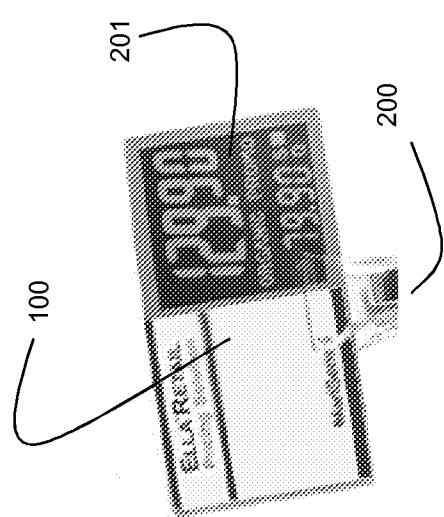


Fig. 2

3/3

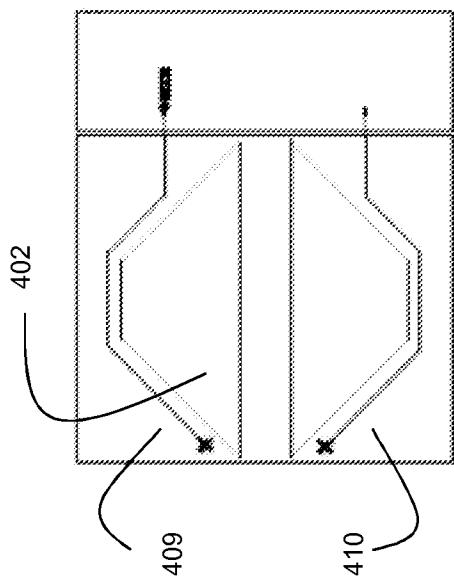


Fig. 4a
Fig. 4b



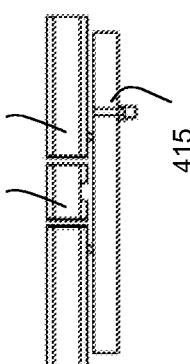


Fig. 5a
Fig. 5b

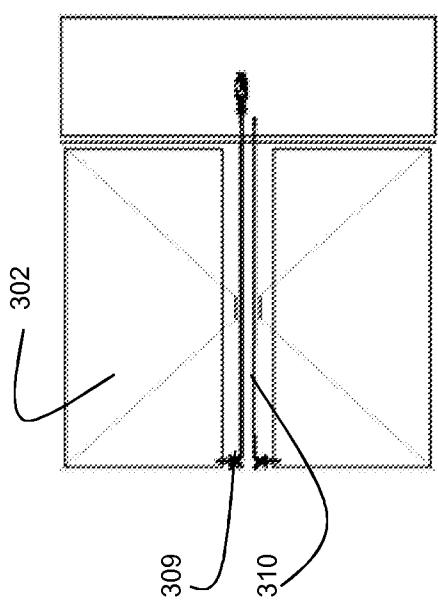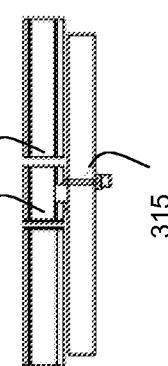

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2011/050427

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04B, H01Q, G09F, G06Q, G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X | WO 2009103857 A1 (MARISENSE OY et al.) 27 August 2009 (27.08.2009) abstract; p. 6, line 24-p. 7, line 2; p. 15, line 30-p. 16, line 5; p. 18, lines 4-9; claim 4; Figs. 1, 7-8 | 1-7 |
| A | WO 9315418 A1 (SAAB SCANIA COMBITECH AB) 05 August 1993 (05.08.1993) abstract; p. 15, line 29-p. 16, line 18; Fig. 5 | 1-7 |
| A | US 6108367 A (HERMAN, A et al.) 22 August 2000 (22.08.2000) abstract; Fig. 12 | 1-7 |
| A | US 5394159 A (SCHNEIDER, M V et al.) 28 February 1995 (28.02.1995) abstract; column 2, lines 55-60; column 3, lines 41-53; Figs. 2-3 | 1-7 |
| A | US 5414427 A (GUNNARSSON, S) 09 May 1995 (09.05.1995) abstract; column 7, lines 5-31; Figs. 3-7 | 1-7 |

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 August 2011 (26.08.2011)

Date of mailing of the international search report

31 August 2011 (31.08.2011)

Name and mailing address of the ISA/FI
National Board of Patents and Registration of Finland
P.O. Box 1160, FI-00101 HELSINKI, Finland
Facsimile No. +358 9 6939 5328Authorized officer
Ville Möttönen
Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2011/050427

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|---|---|-----------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | WO 9823971 A1 (TAGMASTER AB et al.) 04 June 1998 (04.06.1998) abstract; Fig. 2 | 1-7 |
| A | US 5530637 A (FUJITA, S et al.) 25 June 1996 (25.06.1996) abstract; Figs. 1, 3 | 1-7 |
| A | EP 1978592 A1 (VALTION TEKNILLINEN) 08 October 2008 (08.10.2008) abstract; par. [0035]; Fig. 1 | 1-7 |

INTERNATIONAL SEARCH REPORT
Information on patent family members

| | |
|--|--|
| International application No. PCT/FI2011/050427 | |
|--|--|

| Patent document cited in search report | Publication date | Patent family members(s) | Publication date |
|--|------------------|---|--|
| WO 2009103857 A1 | 27/08/2009 | JP 2011520133 A KR 20100126427 A EP 2250638 A1 CA 2715571 A1 | 14/07/2011 01/12/2010 17/11/2010 27/08/2009 |
| WO 9315418 A1 | 05/08/1993 | US 5552790 A SE 9303879 A WO 9325918 A1 WO 9323833 A1 JP 7509793T T EP 0640235 A1 WO 9315417 A1 EP 0623219 A1 DE 69324132T T2 AU 3465293 A AU 3413393 A SE 9203590 A | 03/09/1996 31/05/1994 23/12/1993 25/11/1993 26/10/1995 01/03/1995 05/08/1993 09/11/1994 28/10/1999 01/09/1993 01/09/1993 24/07/1993 |
| US 6108367 A | 22/08/2000 | WO 9627957 A1 JP 11514507T T EP 0813777 A1 CA 2214783 A1 AU 5184996 A AU 710522B B2 | 12/09/1996 07/12/1999 29/12/1997 12/09/1996 23/09/1996 23/09/1999 |
| US 5394159 A | 28/02/1995 | JP 7193424 A EP 0651459 A1 CA 2128763 A1 | 28/07/1995 03/05/1995 03/05/1995 |
| US 5414427 A | 09/05/1995 | NO 930217 A FI 930254 A US 5392049 A SE 9200210 A SE 9200209 A WO 9201953 A1 WO 9201952 A1 JP 5508824T T JP 6501595T T ES 2092575T T3 EP 0540638 A1 EP 0553094 A1 DE 69124259T T2 | 22/03/1993 22/01/1993 21/02/1995 06/01/1993 06/01/1993 06/02/1992 06/02/1992 09/12/1993 17/02/1994 01/12/1996 12/05/1993 04/08/1993 30/04/1997 |

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI2011/050427

| Patent document cited in search report | Publication date | Patent family members(s) | Publication date |
|--|------------------|--|--|
| | | DE 69122511T T2 CA 2087980 A1 AU 8307391 A AU 8280291 A AU 650470B B2 AT 143734T T AT 147864T T SE 9002493 A SE 465391 B | 17/04/1997 25/01/1992 18/02/1992 18/02/1992 23/06/1994 15/10/1996 15/02/1997 02/09/1991 02/09/1991 |
| WO 9823971 A1 | 04/06/1998 | US 6246356 B1 EP 0943104 A1 AU 5141998 A AT 325352T T SE 9604346 A SE 508835 C2 | 12/06/2001 22/09/1999 22/06/1998 15/06/2006 27/05/1998 09/11/1998 |
| US 5530637 A | 25/06/1996 | JP 6334565 A JP 6268554 A | 02/12/1994 22/09/1994 |
| EP 1978592 A1 | 08/10/2008 | None | |

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI2011/050427

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

H04B 1/59 (2006.01)

H04B 5/00 (2006.01)

H01Q 1/22 (2006.01)

G09F 3/00 (2006.01)