



US 20030200225A1

(19) **United States**
(12) **Patent Application Publication**
Yurt et al.

(10) **Pub. No.: US 2003/0200225 A1**
(43) **Pub. Date: Oct. 23, 2003**

(54) **AUDIO AND VIDEO TRANSMISSION AND RECEIVING SYSTEM**

(75) Inventors: **Paul Yurt**, Scottsdale, AZ (US); **H. Lee Browne**, Greenwich, CT (US)

Correspondence Address:
CHRISTIE, PARKER & HALE, LLP
P.O. BOX 7068
PASADENA, CA 91109-7068 (US)

division of application No. 08/630,590, filed on Apr. 10, 1996, now Pat. No. 6,002,720, which is a continuation of application No. 08/133,982, filed on Oct. 8, 1993, now Pat. No. 5,550,863, which is a continuation of application No. 07/862,508, filed on Apr. 2, 1992, now Pat. No. 5,253,275, which is a continuation of application No. 07/637,562, filed on Jan. 7, 1991, now Pat. No. 5,132,992.

Publication Classification

(73) Assignee: **Acacia Media Technologies Corporation**

(51) **Int. Cl.⁷ G06F 17/00**

(52) **U.S. Cl. 707/102**

(21) Appl. No.: **10/423,216**

(57) **ABSTRACT**

(22) Filed: **Apr. 24, 2003**

Related U.S. Application Data

(60) Continuation of application No. 10/273,967, filed on Oct. 17, 2002, which is a continuation of application No. 09/651,115, filed on Aug. 30, 2000, which is a continuation of application No. 09/120,452, filed on Jul. 23, 1998, now Pat. No. 6,144,702, which is a

A system of distributing video and/or audio information employs digital signal processing to achieve high rates of data compression. The compressed and encoded audio and/or video information is sent over standard telephone, cable or satellite broadcast channels to a receiver specified by a subscriber of the service, preferably in less than real time, for later playback and optional recording on standard audio and/or video tape.

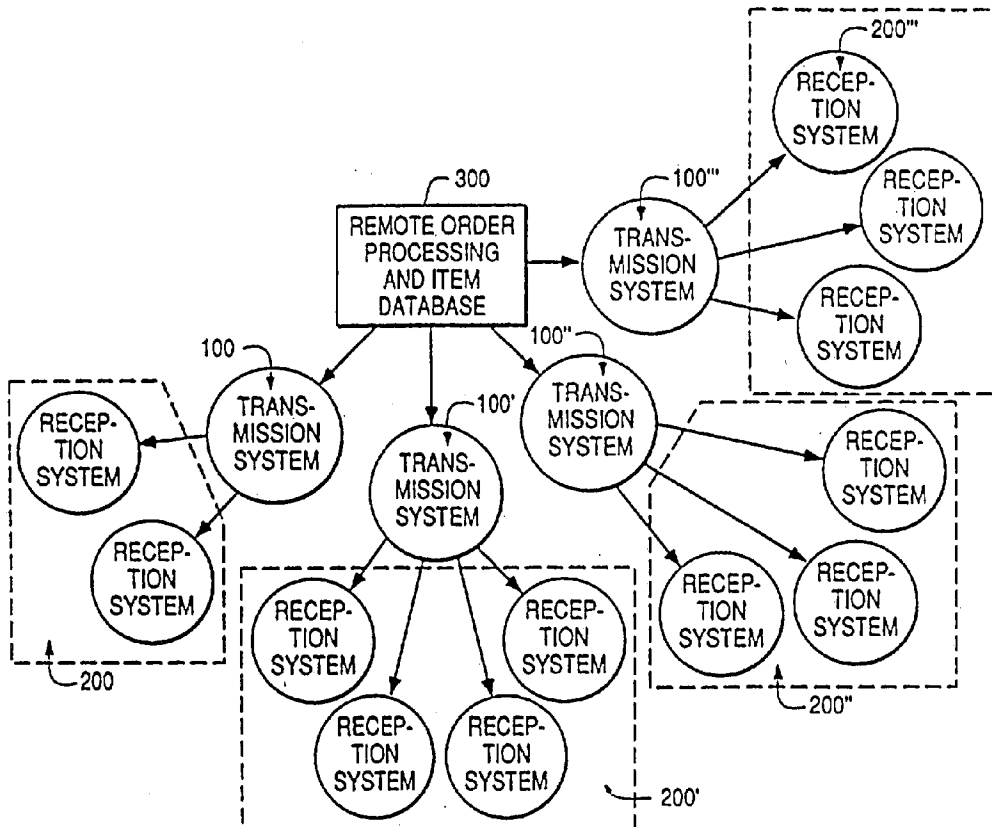


FIG. 1a

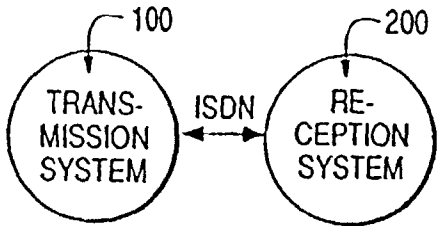


FIG. 1b

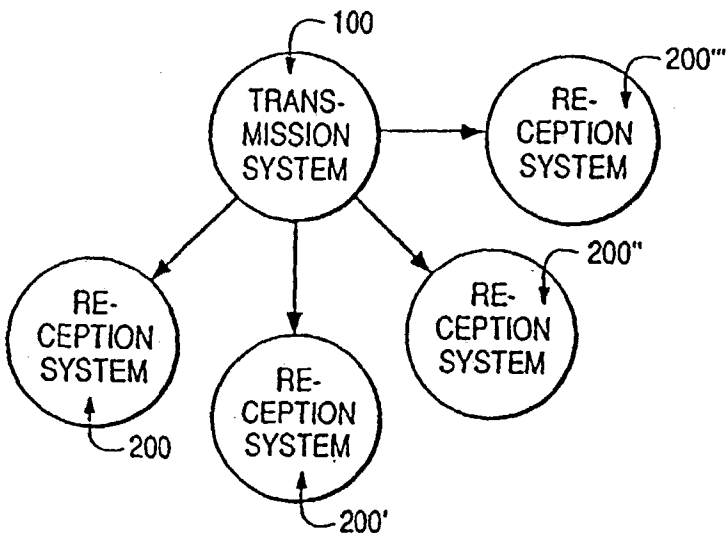
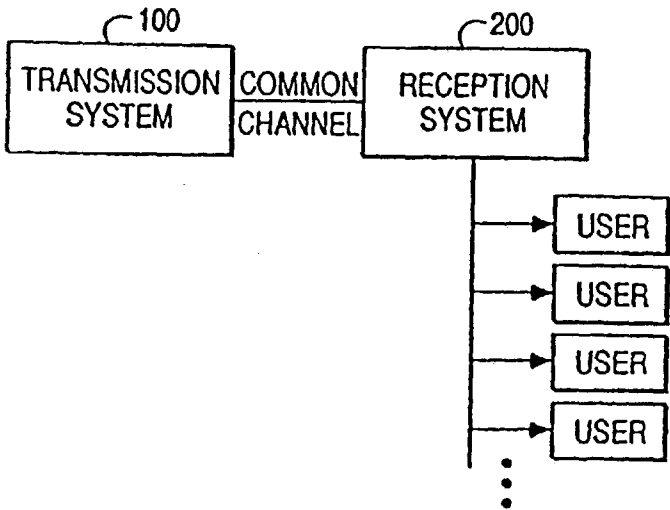


FIG. 1d



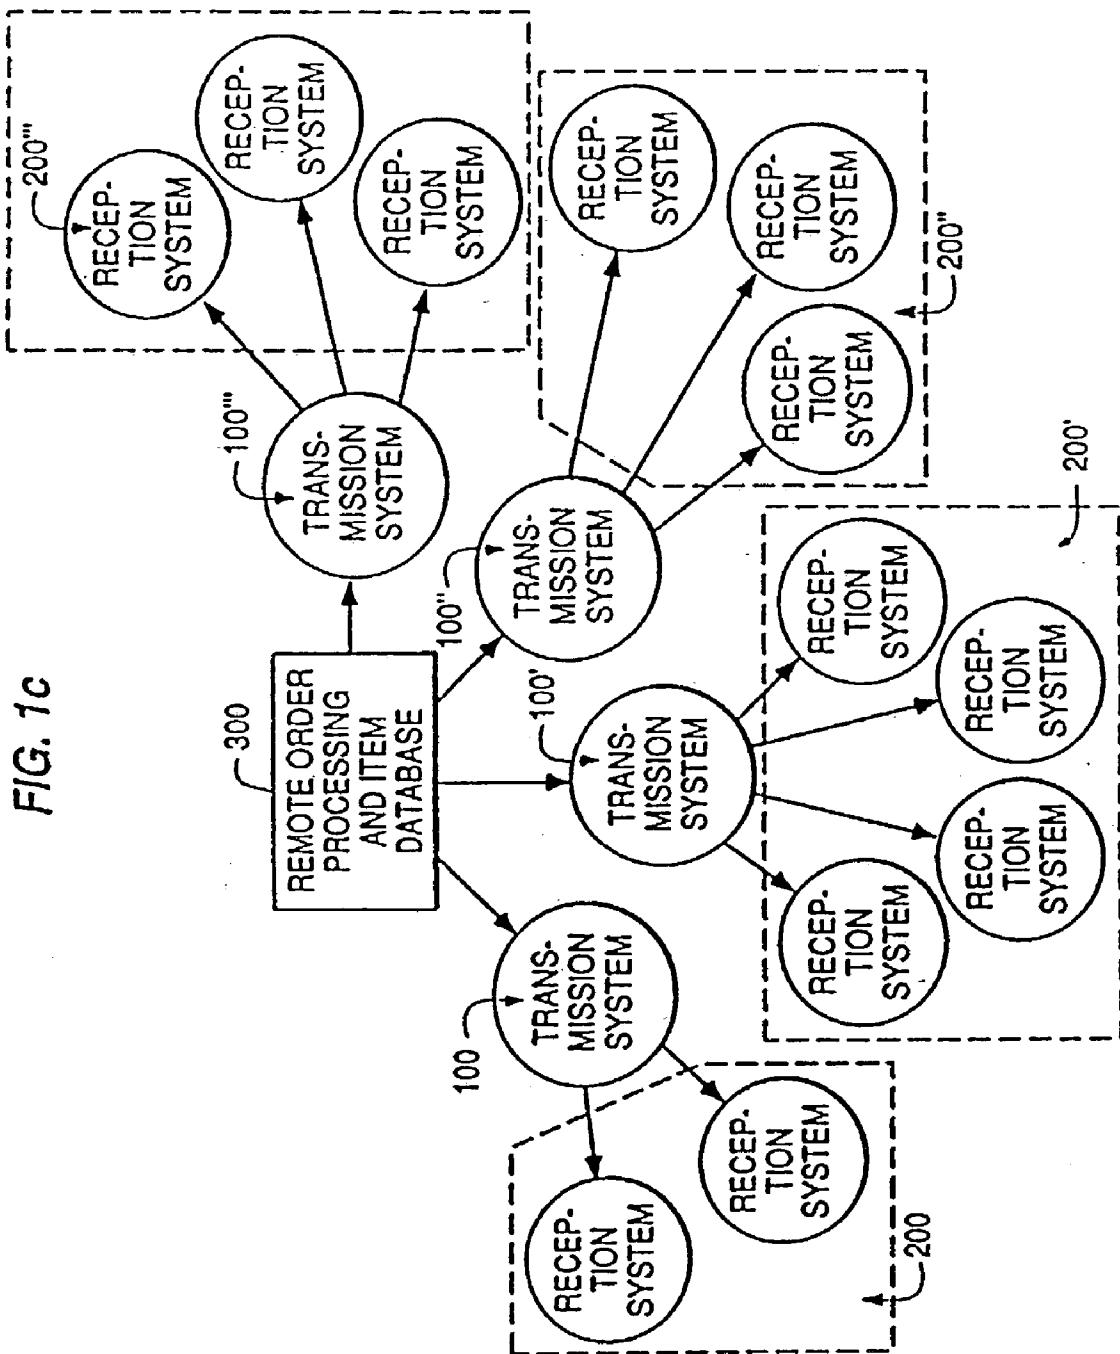


FIG. 1e

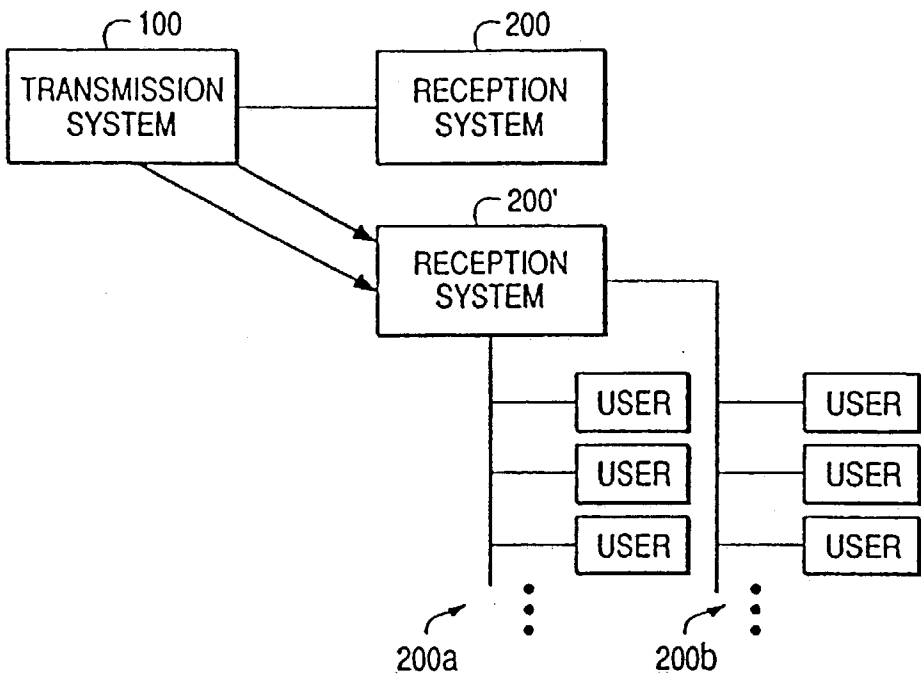


FIG. 1f

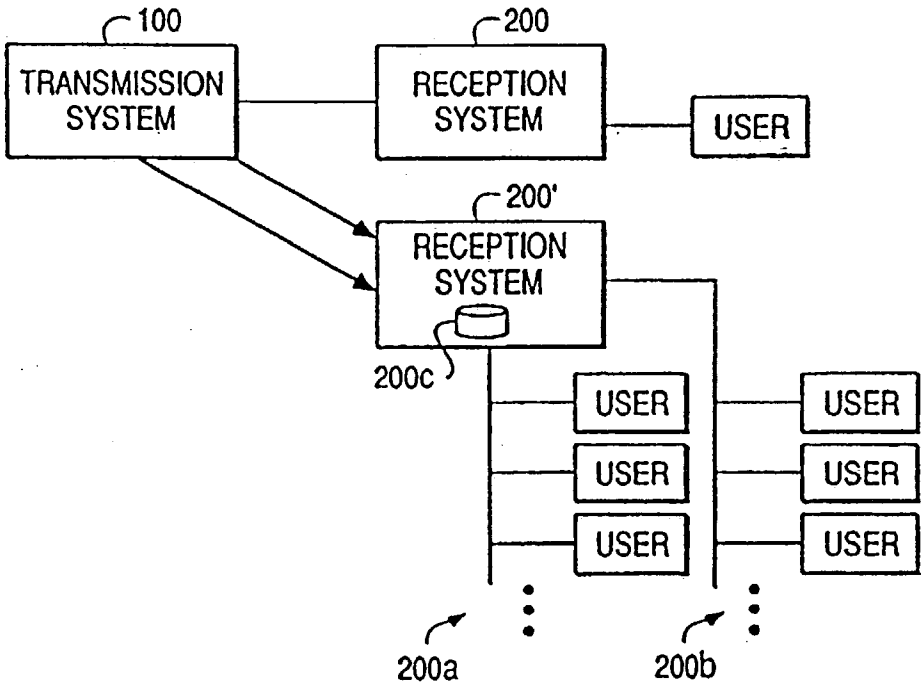


FIG. 1g

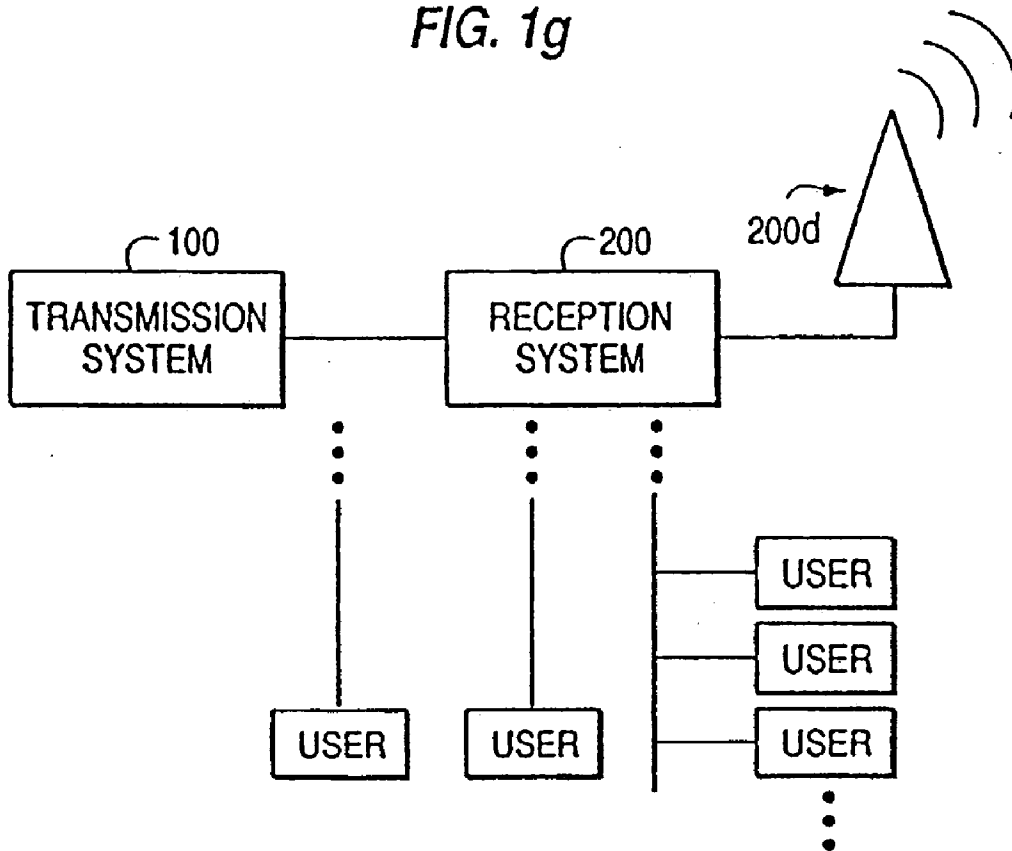
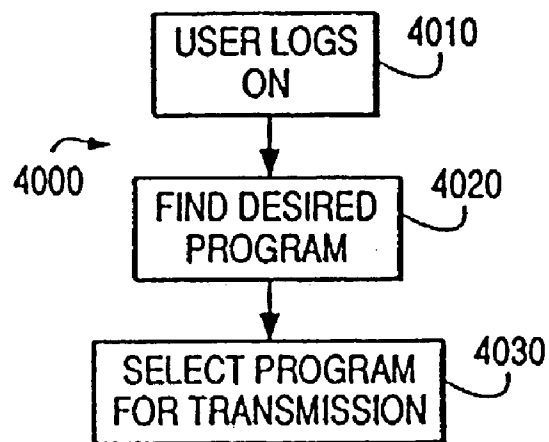


FIG. 4



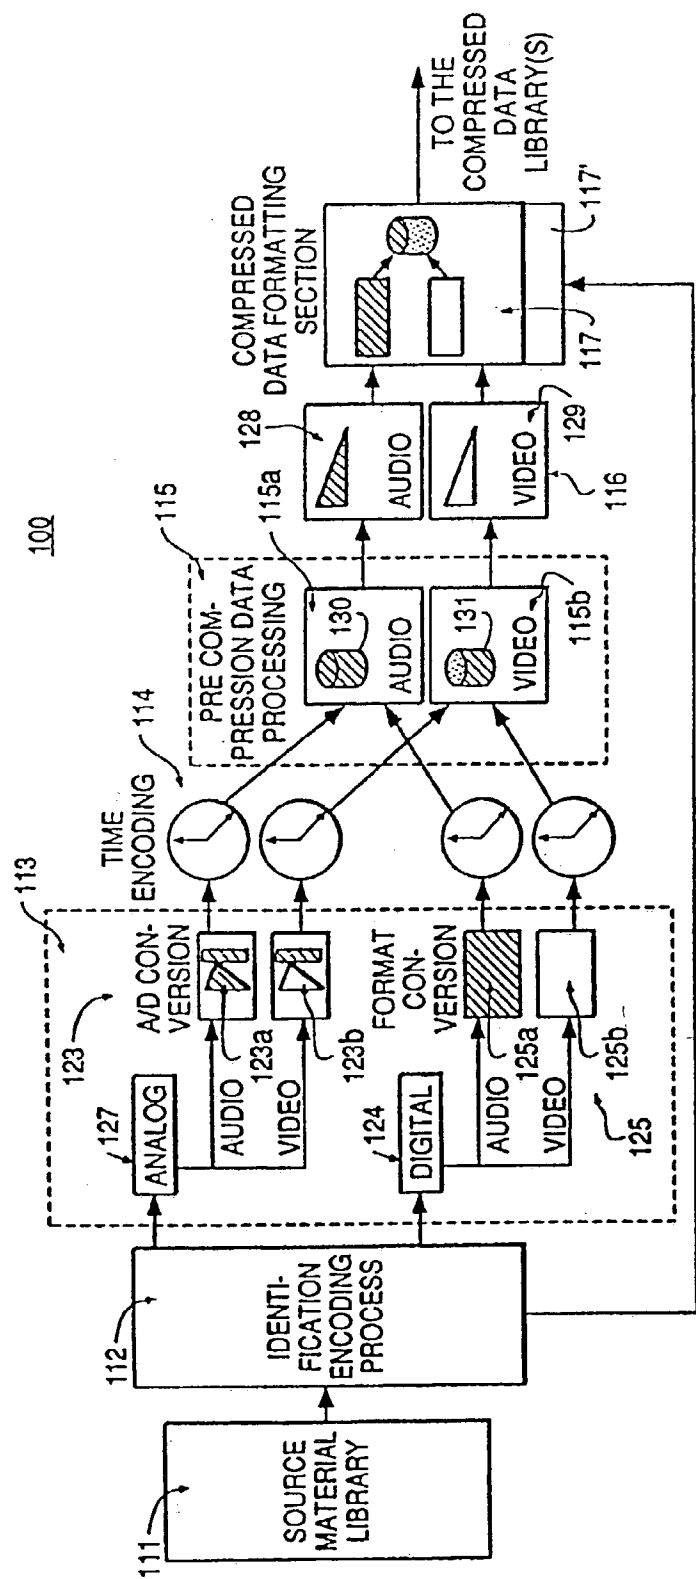


FIG. 2a

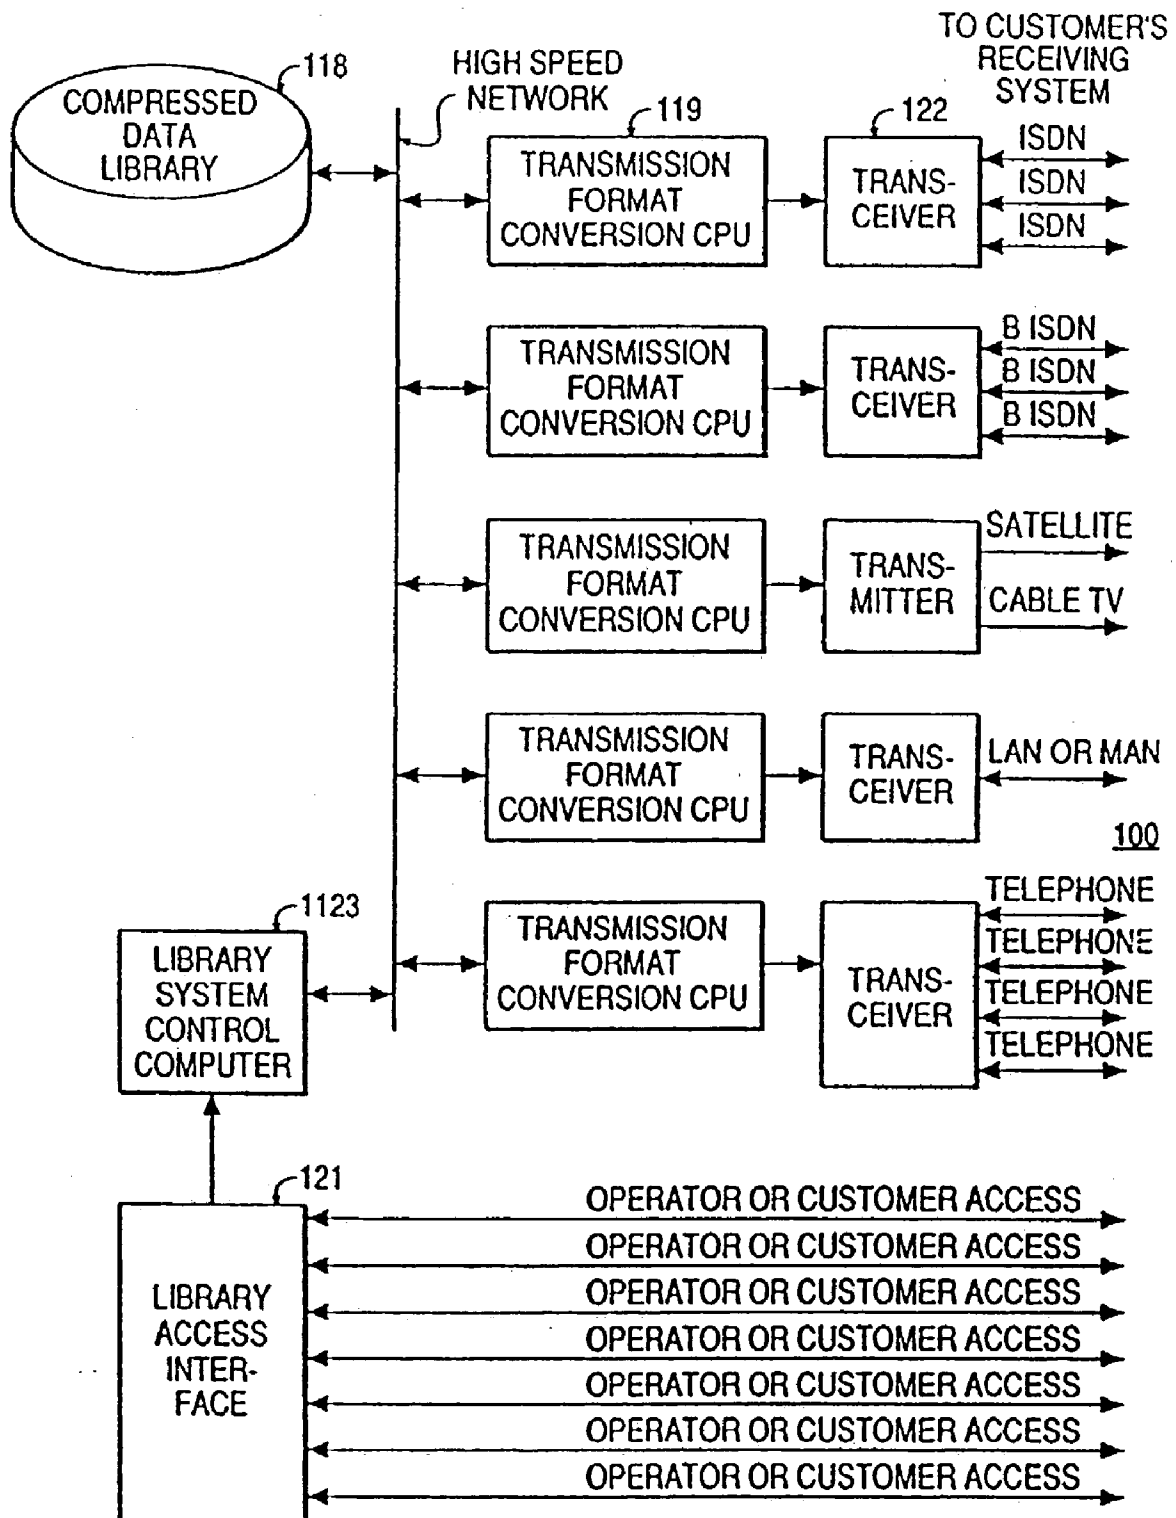


FIG. 2b

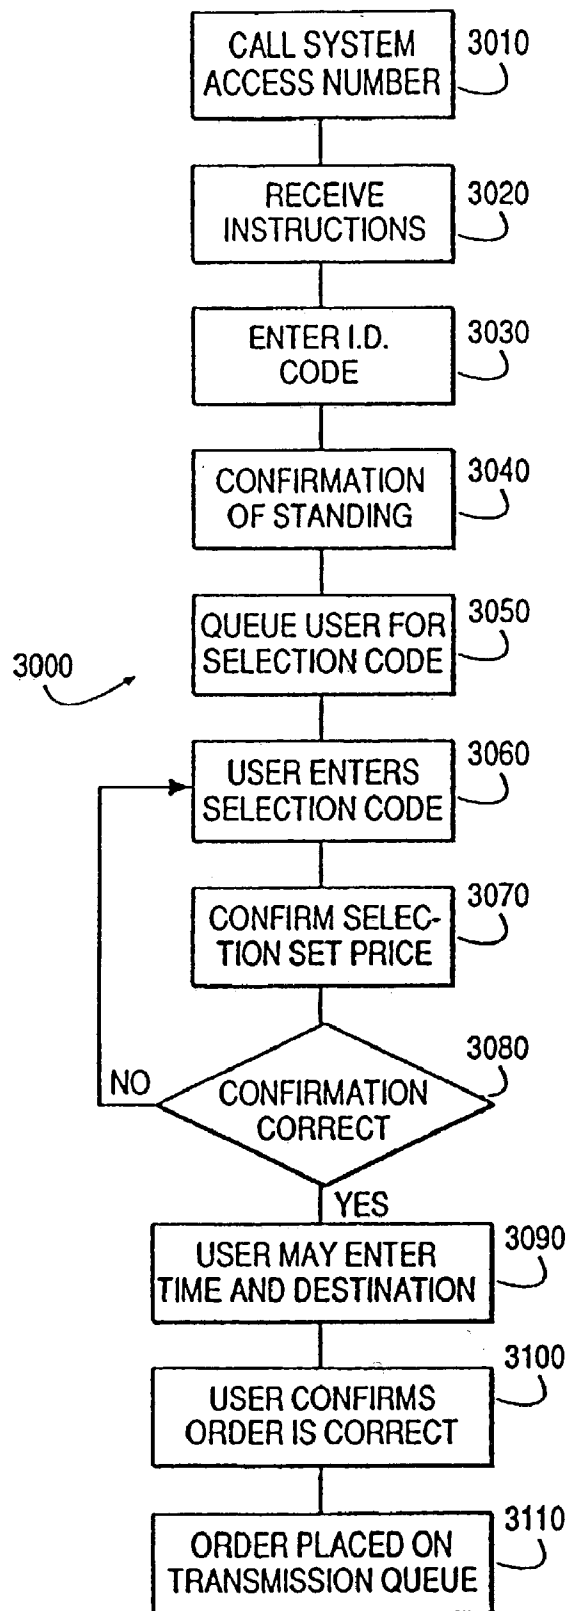


FIG. 3

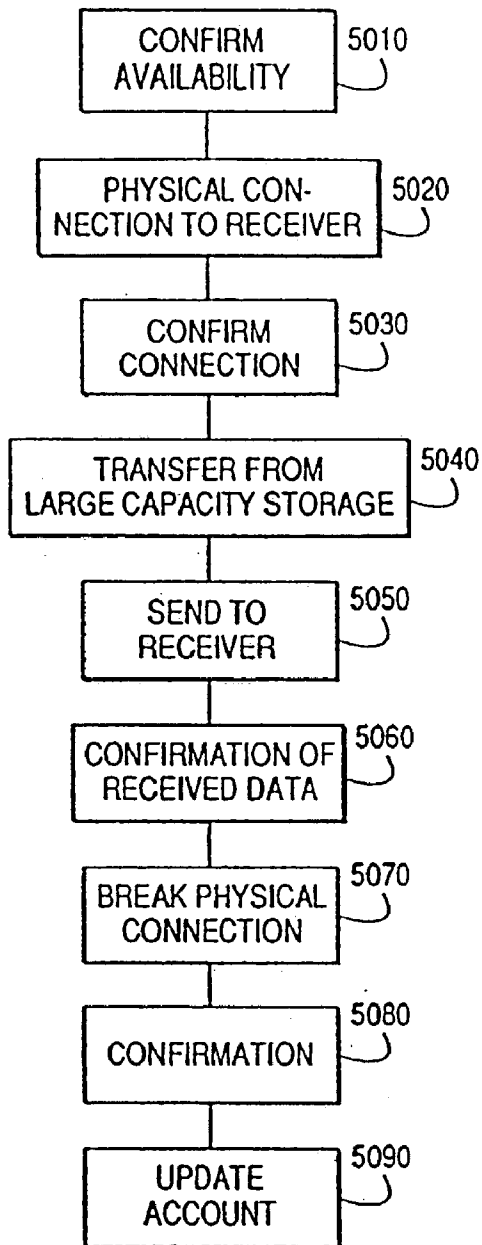


FIG. 5

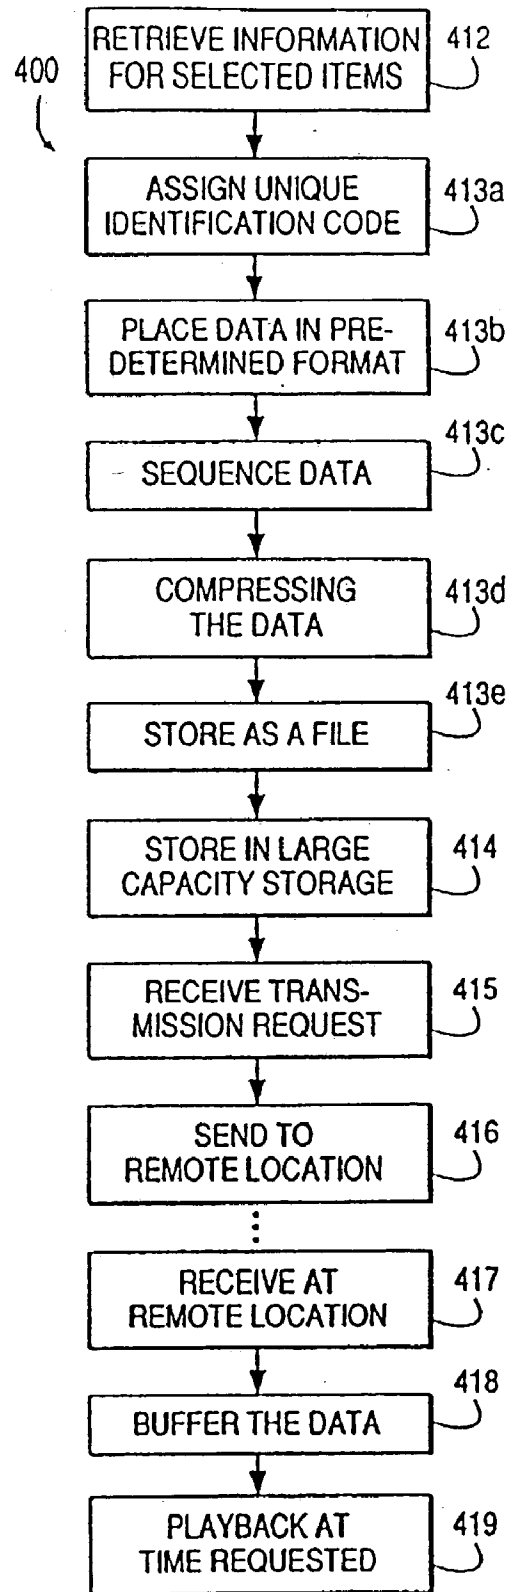


FIG. 7






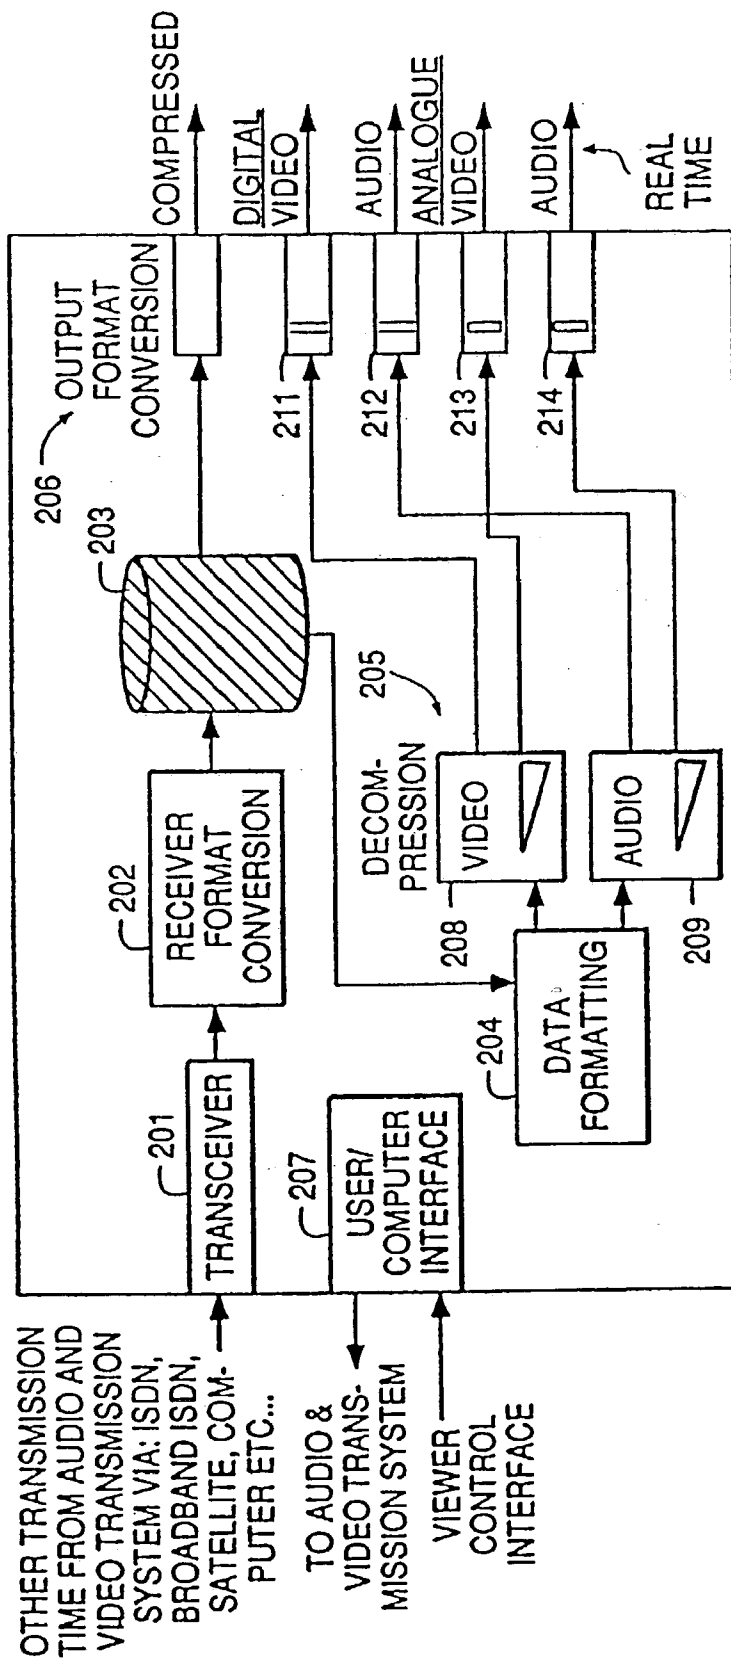


FIG. 6

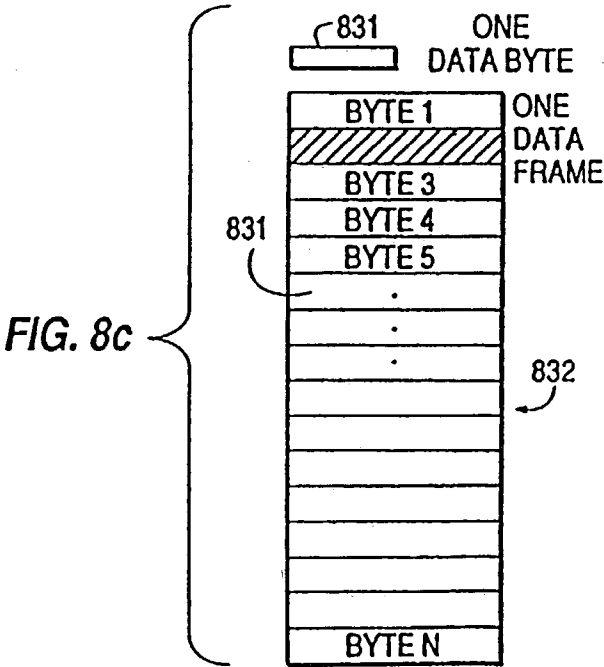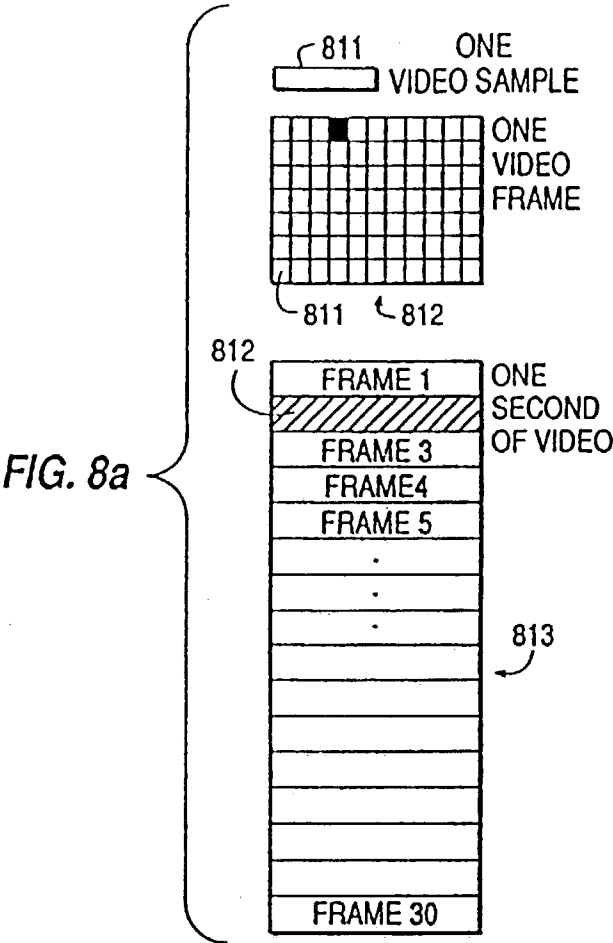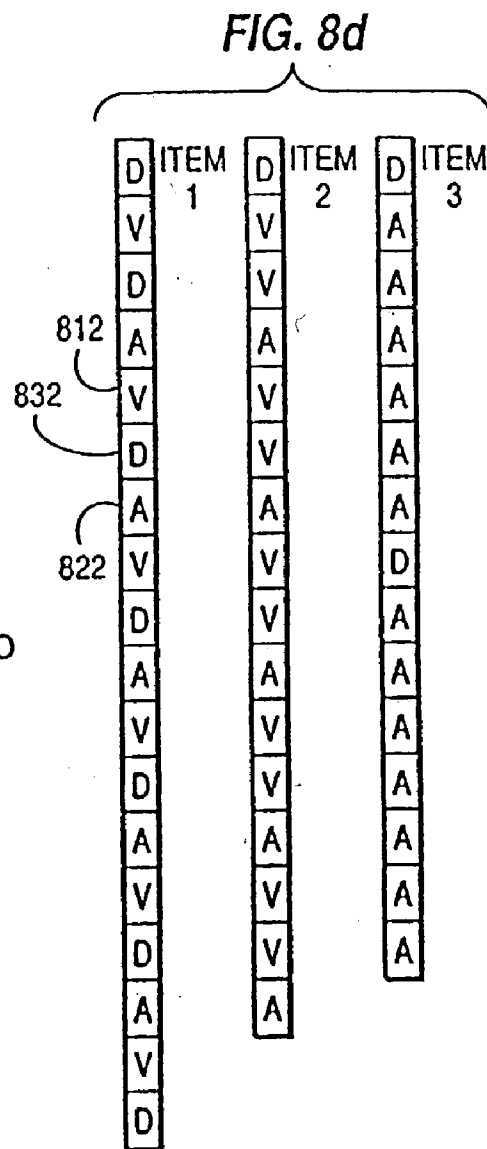

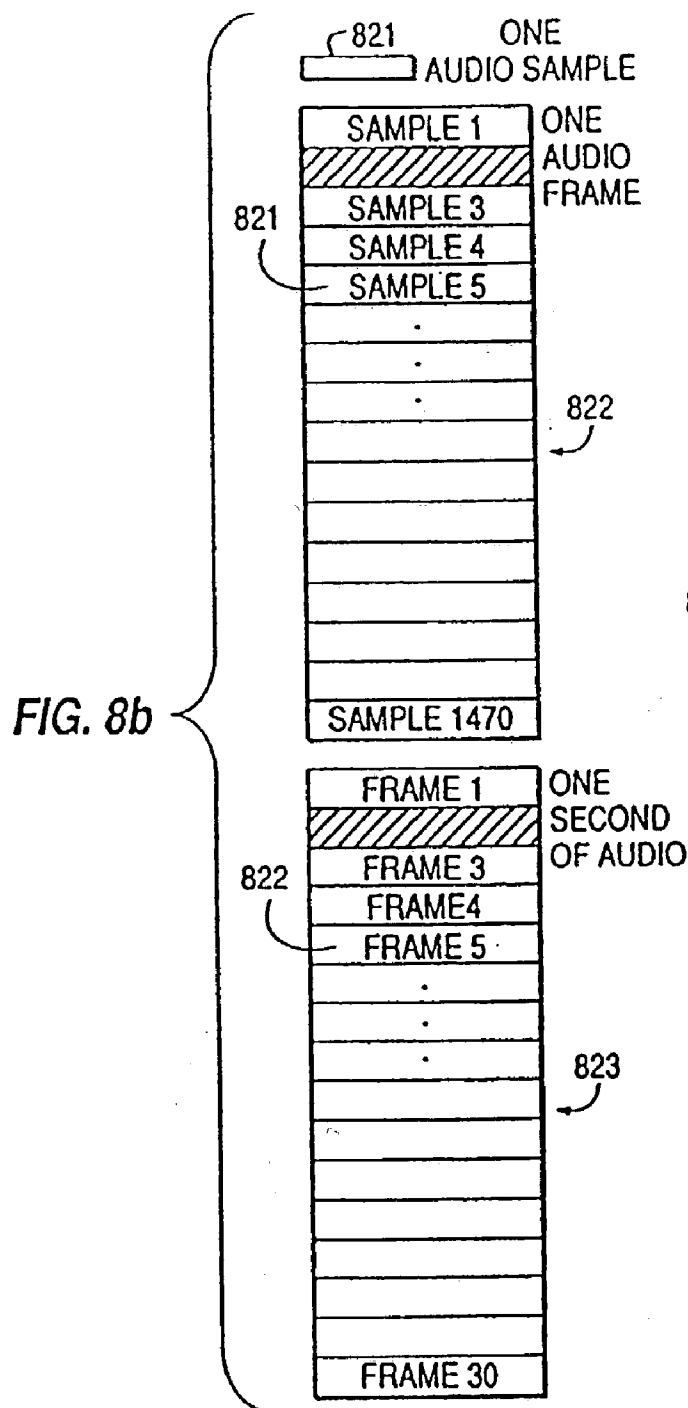

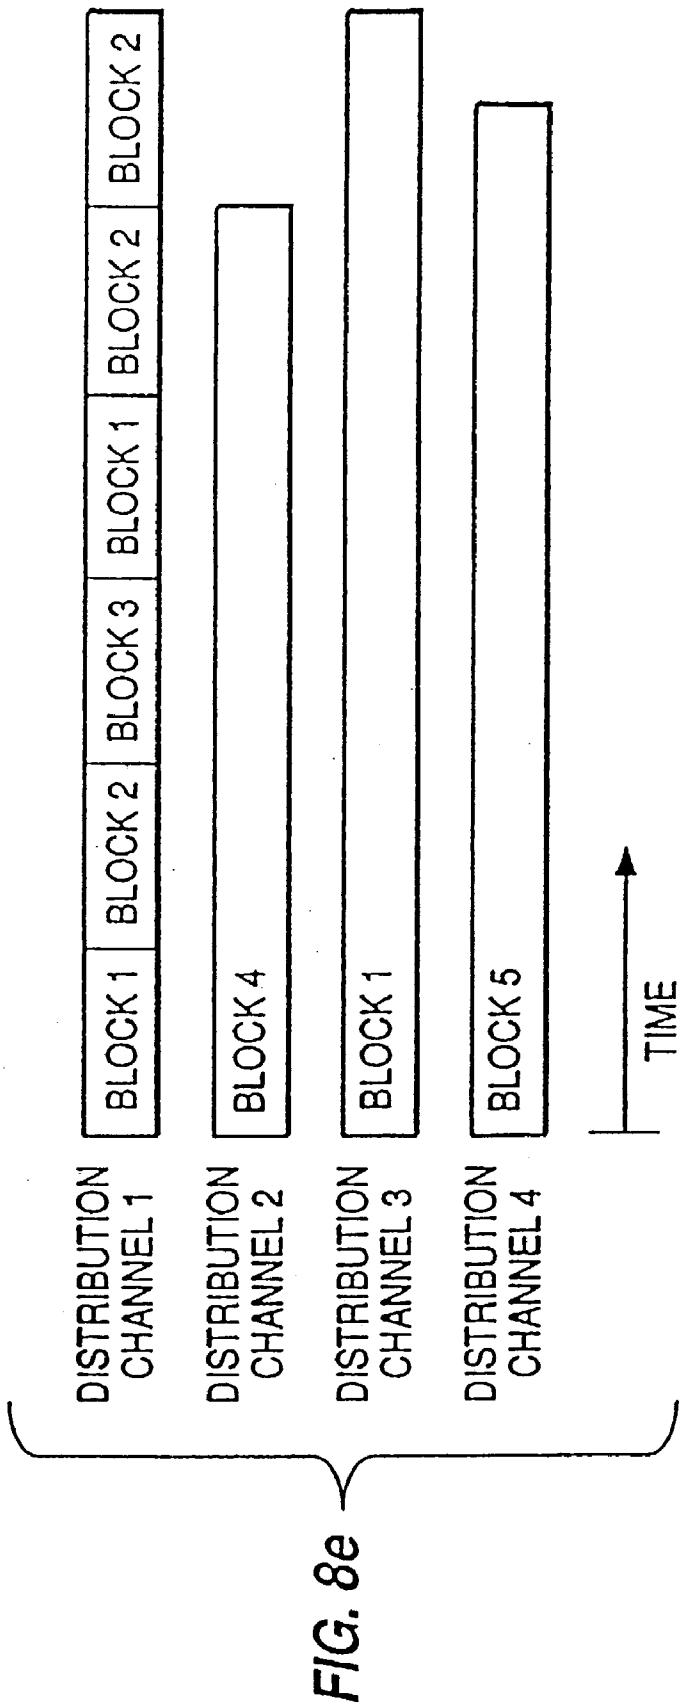

AUDIO AND VIDEO TRANSMISSION AND RECEIVING SYSTEM

BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to an audio and video transmission and receiving system, and more specifically to such a system in which the user controls the access and the playback operations of selected material.

[0002] At the present time, only a video cassette recorder (VCR) or a laser disk player (LDP) allow a viewer to enjoy control over selection of particular audio/video material. Using either a VCR or an LDP requires the viewer to obtain a video tape either by rental or by purchase. Remote accessing of the material has not yet been integrated into an efficient system.

[0003] Several designs have been developed which provide the viewer with more convenient means of accessing material. One such design is disclosed in U.S. Pat. No. 4,506,387, issued to Walter. The Walter patent discloses a fully dedicated, multi-conductor, optical cable system that is wired to the viewer's premises. While the system affords the viewer some control over accessing the material, it requires that a location designated by the viewer be wired with a dedicated cable. The Walter system further requires the viewer be at that location for both ordering and viewing the audio/video material.

[0004] U.S. Pat. No. 4,890,320, issued to Monslow, describes a system which broadcasts viewer selected material to a viewer at a prescribed time. This system is limited in that it requires multiple viewers in multiple locations to view the audio/video material at the time it is broadcast, rather than allowing each viewer to choose his or her own viewing time. The system disclosed in Monslow also does not allow for the stop, pause, and multiple viewing functions of existing VCR technology.

[0005] U.S. Pat. No. 4,590,516, issued to Abraham, discloses a system that uses a dedicated signal path, rather than multiple common carriers, to transmit audio/video programming. The receiver has no storage capability. The system provides for only display functions, which limits viewing to the time at which the material is ordered. Like Monslow, the Abraham system does not allow for the stop, pause, and multiple viewing functions of existing VCR technology.

[0006] U.S. Pat. No. 4,963,995, issued to Lang, discloses an audio/video transceiver with the capability of editing and/or copying from one video tape to another using only a single tape deck. Lang does not disclose a system with one or more libraries wherein a plurality of system subscribers may access information stored in the film and tape library or libraries, and play back the selected information at a time and place selected by the subscriber.

[0007] It is therefore an object of the present invention to provide a user with the capability of accessing audio/video material by integrating both accessing and playback controls into a system that can use multiple existing communications channels.

[0008] It is a further object of the present invention to provide a picture and sound transmission system which allows the user to remotely select audio/video material from any location that has either telephone service or a computer.

[0009] A still further object of the present invention is to provide a picture and sound transmission system wherein the selected audio/video material is sent over any one of several existing communication channels in a fraction of real time to any location chosen by the user that has a specified receiver.

[0010] Another object of the present invention is to provide a picture and sound transmission system wherein the user may play back the selected audio/video material at any time selected by the user and retain a copy of the audio/video material for multiple playbacks in the future.

[0011] Another object of the present invention is to provide a picture and sound transmission system wherein the information requested by the user may be sent as only audio information, only video information, or as a combination of audio and video information.

[0012] Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

[0013] To achieve the objects in accordance with the purposes of the present invention, as embodied and described herein, the transmission and receiving system for providing information to remote locations comprises source material library means prior to identification and compression; identification encoding means for retrieving the information for the items from the source material library means and for assigning a unique identification code to the retrieved information; conversion means, coupled to identification encoding means, for placing the retrieved information into a predetermined format as formatted data; ordering means, coupled to the conversion means, for placing the formatted data into a sequence of addressable data blocks; compression means, coupled to the ordering means, for compressing the formatted and sequenced data; compressed data storing means, coupled to the compression means, for storing as a file the compressed sequenced data received from the compression means with the unique identification code assigned by the identification encoding means; and transmitter means, coupled to the compressed data storing means, for sending at least a portion of a specific file to a specific one of the remote locations.

[0014] The present invention further comprises a distribution method responsive to requests identifying information to be sent from a transmission system to a remote location, the method comprising the steps of storing audio and video information in a compressed data form; requesting transmission, by a user, of at least a part of the stored compressed information to the remote location; sending at least a portion of the stored compressed information to the remote location; receiving the sent information at the remote location; buffering the processed information at the remote location; and playing back the buffered information in real time at a time requested by the user.

[0015] Additionally, the present invention comprises a receiving system responsive to a user input identifying a choice of an item stored in a source material library to be

played back to the subscriber at a location remote from the source material library, the item containing information to be sent from a transmitter to the receiving system, and wherein the receiving system comprises transceiver means for automatically receiving the requested information from the transmitter as compressed formatted data blocks; receiver format conversion means, coupled to the transceiver means, for converting the compressed formatted data blocks into a format suitable for storage and processing resulting in playback in real time; storage means, coupled to the receiver format conversion means, for holding the compressed formatted data; decompressing means, coupled to the receiver format conversion means, for decompressing the compressed formatted information; and output data conversion means, coupled to the decompressing means, for playing back the decompressed information in real time at a time specified by the user.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate the presently preferred apparatus and method of the invention and, together with the general description given above and the detailed description of the preferred embodiment given below serve to explain the principles of the invention. In the drawings:

[0017] FIGS. 1a-1g are high level block diagrams showing different configurations of the transmission and receiving system of the present invention;

[0018] FIGS. 2a and 2b are detailed block diagrams of preferred implementations of the transmission system of the present invention;

[0019] FIG. 3 is a flowchart of a preferred method of ordering a selection from a library in accordance with the present invention;

[0020] FIG. 4 is a flowchart of a preferred method of user request via a user interface of the present invention;

[0021] FIG. 5 is a flowchart of a preferred method of implementing a queue manager program of the present invention;

[0022] FIG. 6 is a block diagram of a preferred implementation of the receiving system of the present invention;

[0023] FIG. 7 is a flowchart of a preferred method of distribution of the present invention; and

[0024] FIGS. 8a-8e are block diagrams of preferred implementations of data structures and data blocking for items in the audio and video distribution system of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] FIGS. 1a-1g are high level block diagrams showing different configurations of the transmission and receiving system of the present invention. FIGS. 1a, 1b, 1d, 1e, 1f, and 1g each show transmission system 100, described in more detail below with respect to FIGS. 2a and 2b. A user of the transmission and receiving system of the present invention preferably accesses transmission system 100 by calling a phone number or by typing commands into a

computer. The user then chooses audio and/or video material from a list of available items which he or she wants to listen to and/or watch.

[0026] As shown in FIG. 1a, the transmission and receiving system may preferably comprise a peer to peer configuration where one transmission system 100 communicates with one reception system 200. As shown in FIG. 1b, the transmission and receiving system of the present invention may alternatively comprise a plurality of reception systems 200, 200', 200'', and 200''', which are each associated with a single transmission system 100.

[0027] FIG. 1c shows a high level block diagram of the transmission and receiving system of the present invention including remote order processing and item database 300, described in more detail with respect to FIG. 3. Remote order processing and item database 300 preferably enables users to access desired items by remote communication. The remote order processing and item database 300 may communicate with a plurality of transmission systems 100, 100', 100'', and 100''', each of which communicates with a respective set of reception systems 200, 200', 200'', and 200'''. Each of the reception systems in sets 200, 200', 200'', and 200''' may preferably communicate with a plurality of users.

[0028] FIG. 1d shows a high level block diagram of the transmission and receiving system of the present invention including a transmission system 100 distributing to a plurality of users via a reception system 200 configured as a cable television system.

[0029] FIG. 1e shows a high level block diagram of the transmission and receiving system of the present invention including a transmission system 100 distributing to a plurality reception systems 200 and 200'. In the configuration shown in FIG. 1e, reception system 200 is a direct connection system wherein a user is directly connected to transmission system 100. Reception system 200' preferably includes a first cable television system 200a and a second cable television system 200b. Users of cable television system 200a and 200b are indirectly connected to transmission system 100.

[0030] FIG. 1f shows a high level block diagram of the transmission and receiving system of the present invention including transmission system 100 distributing via several channels to reception systems 200 and 200'. Reception system 200 is preferably non-buffering. In such a system, users are directly connected to transmission system 100, as in reception system 200 in FIG. 1e.

[0031] Reception system 200' shown in FIG. 1f is a cable television system, as shown in reception system 200' of FIG. 1e. In FIG. 1f, the reception system 200' is preferably buffering, which means that users may receive requested material at a delayed time. The material is buffered in intermediate storage device 200c in reception system 200'.

[0032] In the configuration of FIG. 1f, decompression of the requested material may preferably occur at the head end of a cable, television reception system 200'. Thus, distribution may be provided to users via standard television encoding methods downstream of the head end of the cable distribution system. This method is preferred for users who only have cable television decoders and standard television receivers.

[0033] FIG. 1g shows a high level block diagram of the transmission and receiving system of the present invention including transmission system 100 distributing to a reception system 200, which then preferably transmits requested material over airwave communication channels 200d, to a plurality of users. The transmission and receiving system shown in FIG. 1g may preferably transmit either compressed or uncompressed data, depending on the requirements and existing equipment of the user. The airwave transmission and receiving system shown in FIG. 1g may preferably employ either VHF, UHF or satellite broadcasting systems.

[0034] With respect to the transmission and receiving systems set forth in FIGS. 1a-1g, the requested material may be fully compressed and encoded, partly decompressed at some stage in transmission system 100, or fully decompressed prior to transmission. The reception systems 200 may either buffer the requested material for later viewing, or decompress in real time the requested material as it is distributed by transmission system 100. Alternatively, the reception systems 200 of the present invention may perform a combination of buffering and non-buffering by buffering some of the requested material and decompressing the remainder of the requested material for immediate viewing as it is distributed by transmission system 100.

[0035] In direct connection configurations, such as reception systems 200 shown in FIGS. 1e and 1f, the user preferably selects the reception system 200 to which the requested material is sent, and optionally selects the time playback of the requested material is desired. Accordingly, the user may remotely access the transmission system 100 from a location different than the location of reception system 200 where the material will be sent and/or played back. Thus, for example, a user may preferably call transmission system 100 from work and send a movie to their house to be played back after dinner or at any later time of their choosing.

[0036] In non-direct connection reception systems such as shown in reception system 200' of FIG. 1f, intermediate storage device 200c may preferably include, for example, sixteen hours of random access internal audio and video storage. A reception system with such storage is capable of storing several requested items future playback. The user could then view and/or record a copy of the decompressed requested material in real time, or compressed in non-real time, at a time of their choosing. Accordingly, the user would not have to make a trip to the store to purchase or rent the requested material.

[0037] In any of the transmission and receiving systems illustrated in FIGS. 1a-1g, the requested material may be copy protected. To achieve copy protection, the requested material, as an item, is encoded as copy protected during storage encoding in transmission system 100. The user may then play back the item only one time. The user may also optionally review select portions of the item prior to its automatic erasure from the memory of the reception system 200. In this way, requested material may be distributed to "view only" users and also to "view and copy" users who wish to retain copies of the distributed items.

[0038] Copy protected programs, when decompressed and played back, would have a copy protection technique applied to the analog and digital output signals. The analog

video output is protected from copying through the use of irregular sync signals, which makes the signal viewable on a standard television but not recordable on a audio/video recorder. Digital output protection is effected s through copy protect bit settings in the digital output signal, thus preventing a compatible digital recorder from recording the digital audio and/or video signal stream. A protected item will not be passed to the compressed data port of the digital recorder for off line storage.

[0039] FIGS. 2a and 2b illustrate detailed block diagrams of preferred implementations of the transmission system 100 of the present invention. Transmission system 100 may either be located in one facility or may be spread over a plurality of facilities. A preferred embodiment of transmission system 100 may preferably include only some of the elements shown in FIGS. 2a and 2b.

[0040] Transmission system 100 of a preferred embodiment of the present invention preferably includes source material library means for temporary storage of items prior to conversion and storage in a compressed data library means. The items of information may include analog and digital audio and video information as well as physical objects such as books and records which require conversion to a compatible media type before converting, compressing and storing their audio and video data in the compressed data library means.

[0041] As shown in FIG. 2a, the source material library means included in transmission system 100 preferably includes a source material library 111. The source material library 111 may include different types of materials including television programs, movies, audio recordings, still pictures, files, books, computer tapes, computer disks, documents of various sorts, musical instruments, and other physical objects. These materials are converted to or recorded on a media format compatible to the digital and analog inputs of the system prior to being compressed and stored in a compressed data library 118. The different media formats preferably include digital or analog audio and video tapes, laser disks, film images, optical disks, magnetic disks, computer tapes, disks and, cartridges.

[0042] The source material library 111, according to a preferred embodiment of the present invention may preferably include a single source material library or a plurality of source material libraries. If there are a plurality of source material libraries, they may be geographically located close together or may be located far apart. The plurality of source material libraries may communicate using methods and channels similar to the methods and channel types which libraries may employ for communication with the receiving system 200 of the user, or the source material libraries may communicated via any available method.

[0043] Prior to being made accessible to a user of the transmission and receiving system of the present invention, the item must be stored in at least one compressed data library 118, and given a unique identification code by identification encoder 112. Storage encoding, performed by identification encoder 112, aside form giving the item a unique identification code, optionally involves logging details about the item, called program notes, and assigning the item a popularity code. Storage encoding may be performed just prior to conversion of the item for transmission

to reception system **200**, at any time after starting the conversion process, or after storing the item in the compressed data library **118**.

[0044] In a preferred embodiment of the present invention, the method of encoding the information involves assigning a unique identification code and a file address to the item, assigning a popularity code, and inputting the program notes. This process is identical for the any of different media types stored in the source material library **111**.

[0045] The transmission system **100** of the present invention also preferably includes conversion means **113** for placing the items from source material library **111** into a predetermined format as formatted data. In the preferred embodiment, after identification encoding is performed by identification encoder **112**, the retrieved information is placed into a predetermined format as formatted data by the converter **113**. The items stored in source material library **111** and encoded by identification encoder **112** may be in either analog or digital form. Converter **113** therefore includes analog input receiver **127** and digital input receiver **124**. If items have only one format, only one type of input receiver **124** or **127** is necessary.

[0046] When the information from identification encoder **111** digital, the digital signal is input to the digital input receiver **124** or where it is converted to a proper voltage. A formatter **125** sets the correct bit rates and encodes into least significant bit (lsb) first pulse code modulated (pcm) data. Formatter **125** includes digital audio formatter **125a** and digital video formatter **125b**. The digital audio information is input into a digital audio formatter **125a** and the digital video information, if any, is input into digital video formatter **125b**. Formatter **125** outputs the data in a predetermined format.

[0047] When the retrieved information from identification encoder **112** is analog, the information is input to an analog-to-digital converter **123** to convert the analog data of the retrieved information into a series of digital data bytes. Converter **123** preferably forms the digital data bytes into the same format as the output of formatter **125**.

[0048] Converter **123** preferably includes an analog audio converter **123a** and an analog video converter **123b**. The analog audio converter **123a** preferably converts the retrieved audio signal into pcm data samples at a fixed sampling rate. The analog video converter **123b** preferably converts the analog video information, retrieved from identification encoder **123**, into pcm data also at fixed sampling rates.

[0049] If the retrieved information being converted contains only audio information, then the audio signal is fed to the appropriate digital audio input or analog audio input. When the retrieved information contains both audio and video information, the audio and video signals are passed simultaneously to the audio and video converter inputs. Synchronization between the audio and video data can be maintained in this way.

[0050] If, for example, the retrieved information to be converted from the source material library **111** is a motion picture film, the picture frames in the film are passed through a digital telecine device to the digital input receiver **124**. Format conversion is then preferably performed by digital video formatter **125b**. Accompanying audio information is

passed through an optical or magnetic digital playback device. This device is connected to digital audio formatter **125a**.

[0051] In some cases, such inter-library transfers, incoming materials may be in a previously compressed form so that there is no need to perform compression by precompression processor **115** and compressors **128** and **129**. In such a case, retrieved items are passed directly from identification encoder **112** to the compressed data formatter **117**. The item database records, such as the program notes may also be input from another system, to the compressed data formatting section **117**, where this data, if necessary, is reformatted to make it compatible with the material stored in compressed data library **118**. Such material may be received in the form of digital tapes or via existing communication channels and may preferably input directly to a short term storage **117'** in the compressed data formatting section **117**.

[0052] The transmission system **100** of the present invention also preferably includes ordering means for placing the formatted information into a sequence of addressable data blocks. As shown in **FIG. 2a**, the ordering means in the preferred embodiment includes time encoder **114**. After the retrieved information converted and formatted by the converter **113**, the information may be time encoded by the time encoder **114**. Time encoder **114** places the blocks of converted formatted information from converter **113** into a group of addressable blocks. The preferred addressing scheme employs time encoding. Time encoding allows realignment of the audio and video information in the compressed data formatting section **117** after separate audio and video compression processing by precompression processor **115** and compressor **116**.

[0053] The converted formatted information of the requested material is then preferably in the form of a series of digital data bytes which represent frames of video data and samples of the audio data. A preferred relationship of the audio and video bytes to each other is shown in **FIG. 8**. Incoming signals are input and converted in sequence, starting with the first and ending with the last frame of the video data, and starting with the first and ending with the last sample of the audio data. Time encoding by time encoder **114** is achieved by assigning relative time markers to the audio and video data as it passes from the converter **113** through the time encoder **114** to the precompression processor **115**. Realignment of audio and video data, system addressing of particular data bytes, and user addressing of particular portions of items are all made possible through time encoding.

[0054] Through the use of the address of an item and its frame number it is possible to address any particular block of audio or video data desired. From here, further addressing down to the individual byte is possible. Frames and groups of frames may preferably be further broken down, as necessary to the individual bytes and bits, as required for certain processing within the system.

[0055] User and system addressing requirements dictate the level of granularity available to any particular section of the system. Users are able to move through data in various modes, thus moving through frame addresses at various rates. For example, a user may desire to listen to a particular song. They may preferably enter the song number either when requesting the item from the compressed data library **118** and only have that song sent to their receiving system **200** or they may preferably select that particular song from

the items buffered in their receiving system **200**. Internal to the system, the song is associated with a starting frame number, which was indexed by the system operator via the storage encoding process. The system item database may contain information records for individual frames or groups of frames. These can represent still frames, chapters, songs, book pages, etc. The frames are a subset of, and are contained within, the items stored in the compressed data library **118**. Time encoding by time encoder **114** makes items and subsets of items retrievable and addressable throughout the transmission system **100**. Time encoding enables subsequent compression of the information to be improved because data reduction processes may be performed in the time dimension. This is described in greater detail below.

[**0056**] The transmission system **100** of the present invention also preferably includes data compression means for compressing the formatted and sequenced data. The sequence of addressable data blocks which was time encoded and output by time encoder **114** is preferably sent to precompression processor **115**. The data arriving from time encoder **114** may be at various frame rates and of various formats. Precompression processor **115** preferably includes audio precompressor **115a** and video precompressor **115b**.

[**0057**] Video precompression processor **115b** buffers incoming video data and converts the aspect ratio and frame rate of the data, as required by compression processor **116**. The frame buffer **131** of video precompression processor **115b** holds all incoming data until the data is compressed by the data compressor **116**. The incoming video data is processed for sample rate optimization, aspect ratio fitting and buffered in buffer **130** for compression processing by the video precompression processor **115b**.

[**0058**] Video precompression processor **115b** processes the incoming video data so that it fits into the aspect ratio of the transmission and receiving system of the present invention. When incoming material with a different aspect ratio than the aspect ratio of the system is selected, a chosen background is preferably placed around the inactive region of the video information. In this way, no data is lost to differences in the aspect ratio between incoming material, and the converted and compressed data stored in the transmission system **100**. Images resulting from a different aspect ratio may have an inactive region where background information is contained, or may be converted into a best fit arrangement. Output from the video precompression processor **115b** is stored in the frame buffer **131**, which is dual ported and is directly addressable by video compressor **129**.

[**0059**] The incoming audio data is processed for sample rate and word length optimization and is then buffered in buffer **130** for compression processing by the audio precompression processor **115a**. Audio precompression processor **115a** may preferably transcode incoming audio information, as required, to create the optimum sample rate and word lengths for compression processing. The output of the audio precompression processor **115a** is a constant sample rate signal of a fixed word length which is buffered in frame buffer **130**. The frame buffer **130** is dual ported and is directly addressable by audio compressor **128**. Blocking the audio data into frames at audio precompression processor **115a** makes it possible to work with the audio data as addressable packets of information.

[**0060**] Once precompression processing is finished, the frames are compressed by the data compressor **116**. Compressor **116** preferably comprises an audio data compressor **128** and a video data compressor **129**. The benefits of data compression performed by data compressor **116** are shortened transmission time, faster access time, greater storage capacity, and smaller storage space requirements. Compression processing performed by compressors **128** and **129** requires multiple samples of data to perform optimum compression. Audio and video information is preferably converted into blocks of data organized in groups for compression processing by audio compressor **128** and video compressor **129**, respectively. These blocks are organized as frames, and a number of frames are contained respectively in the buffers **130** and **131**. By analyzing a series of frames it is possible to optimize the compression process.

[**0061**] Audio data is preferably compressed by audio compressor **128** by application an adaptive differential pulse code modulation (ADPCM) process to the audio data. This compression process, which may be implemented by the apt-x 100 digital audio compression system, is manufactured by Audio Processing Technology (APT). Audio compression ratios of 8× or greater are achieved with the APT system.

[**0062**] Compression by compressor **116** may be performed on a group of 24 video frames may preferably be passed in sequence to the frame buffer **130** of the video precompression processor **115b** where they are analyzed by video compressor **129** which performs data reduction processing on the video data. Video compression is preferably performed by video compressor **129**. Video compression is achieved by the use of processors running algorithms designed to provide the greatest amount of data compression possible. Video data compression preferably involves applying two processes: a discrete cosine transform, and motion compensation. This process is described in "A Chip Set Core of Image Compression", by Artieri and Colavin. Multiple frames of video data may preferably be analyzed for patterns in the horizontal (H), vertical (V), diagonal (zigzag) and time (Z) axis. By finding repetition in the video data, redundancy may be removed and the video data may be compressed with a minimal loss of information.

[**0063**] In accordance with a preferred embodiment of the present invention, the transmission system **100** may further comprise compressed data storing means, coupled to the compression means, for storing as a file the compressed sequenced data with the unique identification code received from the data compression means. After compression processing by compressor **116**, the compressed audio and video data is preferably formatted and placed into a single file by the compressed data storage means **117**. The file may contain the compressed audio and/or video data, time markers, and the program notes. The file is addressable through the unique identification code assigned to the data by the identification encoder **112**.

[**0064**] Further, according to the present invention, the transmission system preferably includes compressed data library means for separately storing composite formatted data blocks for each of the files. The compressed data storage means preferably includes compressed data library **118**, as shown in FIG. 2b. After the data is processed into a file by the compressed data storage means **117**, it is preferably stored in a compressed data library **118**. In a preferred

embodiment, compressed data library **118** is a network of mass storage devices connected together via a high speed network. Access to any of the files stored in compressed data library **118** is available from multiple reception systems **200** connected to the transmission and receiving system.

[**0065**] Stored items are preferably accessed in compressed data library **118** through a unique address code. The unique address code is a file address for uniquely identifying the compressed data items stored in the compressed data library section of a library system. This file address, combined with the frame number, and the library system address allow for complete addressability of all items stored in one or more compressed data libraries **118**. Compressed data library addresses along with receiving system addresses are used to form a completely unique address for distribution system control.

[**0066**] The unique address code is an address assigned to the item by the system operator during storage encoding, which is preferably done prior to long term storage in the compressed data library **118**. In a preferred embodiment, the unique address code is used for requesting and accessing information and items throughout the transmission and receiving system. The unique address code makes access to the requested data possible.

[**0067**] The storage encoding process performed by encoder **112** also allows entry of item notes and production credits. Production credits may include the title, names of the creators of the item such as the producer, director, actors, etc. Other details regarding the item which may be of interest and which may make the items more accessible are kept in an item database.

[**0068**] Item addresses are mapped to item names by identification encoder **122** and may preferably be used as an alternative method of accessing items. The item names are easier to remember, thus making user access more intuitive by using item names. The storage encoding entry process performed in identification encoder **112** operates a program which updates a master item database containing facts regarding items in the compressed data library system. The storage encoding process may be run by the system operator whereby the system operator accesses the master item database to track and describe items stored in one or more compressed data libraries. The names and other facts in the item database may preferably be updated at any time via the storage encoding process. Changes made to the master item database may be periodically sent to the remote order processing and item database **300**.

[**0069**] As described in more detail later, a user may preferably access an item via its unique identification code, via its title, or the user may use other known facts for accessing an item. The user may access items in the compressed data library **118** directly using the unique address code or the user may obtain access via the remote order processing and item database **300**. Indirect access via the remote order processing and item database **300** is possible using, for example, a synthesized voice system, a query type of computer program interface, or customer assistance operators. In addition to providing interactive access to the remote order processing and item database **300**, a catalog listing some or all available titles may also preferably be published. With a published catalog, users may obtain the unique address code for an item very easily thereby allowing for retrieval from the compressed data library **118** without any help from an interactive system.

[**0070**] To achieve user access via an interactive system, facts about the items may be kept in files as a part of the items or the facts may be kept separately, for example, by systems which only to inform users of the available items and take orders. For example, in systems which have portions split in separate locations, the facts about the items may be separated from the items themselves and stored in separate files. A system of this type can distribute user orders to other portions of the transmission and receiving system for ultimate distribution to the requesting user. Further, to support a plurality of users, multiple versions of the item database may preferably reside either on multiple database servers, in catalogs, or on other computer systems.

[**0071**] The item database master may reside in the system control computer **1123** where may be is updated and kept current to the contents of the compressed data library **118**. The data stored in the item database master may be accessed by users via application programs, running on the system control computer **1123**, and on the reception system **200** of the user. Users may connect to the item database via any available telecommunication channels. Copies of the item database master may be updated and informed of new entries into compressed data library **118** at periodic intervals determined by the system manager.

[**0072**] Other copies of the item database master may also be made available to users from the remote order processing and item database **300** which batch processes and downloads user requests to the control computer **1123** of the compressed data library **118** via standard telecommunications or high speed communication channels. Moreover, multiple remote order processing and item database **300** sites make it possible for more locations to process orders than there are library facilities, and thus make order processing more efficient.

[**0073**] Preferably, access of a requested item via the remote order processing and item database **300** operates as follows. If the user does not know the title of the desired item, he or she may request the item by naming other unique facts related to the item. For example, a user would be able to access an item about Tibetan Medicine by asking for all items which include information about "Tibet" and include information about "Medicine." The remote order processing and item database **300** would then be searched for all records matching this request. If there is more than one item with a match, each of the names of the matching items are preferably indicated to the user. The user then selects the item or items that he or she desires. Upon selection and confirmation, by the user, a request for transmission of a particular item or items is sent to the distribution manager program of the system control computer **1123**. The request contains the address of the user, the address of the item, and optionally includes specific frame numbers, and a desired viewing time of the item.

[**0074**] The storage encoding process performed by identification encoder **112** also allows entry of a popularity code. The popularity code is preferably assigned on the basis of how often the corresponding item is expected to be requested from the compressed data library **118**. This popularity code can be used to determine the most appropriate form of media for storage of the compressed data in a mixed media system. Mixed media systems are preferably employed as more cost effective storage in very large

compressed data libraries **118**. Once assigned, the popularity code may be dynamically updated, by factoring item usage against system usage. Thus, stored items are dynamically moved to the most appropriate media over their life in the compressed data library **118**. If a particular item stored in compressed data library **118** is retrieved frequently by users, storage in compressed data library **118** is preferably on higher speed, more reliable, and probably more expensive media. Such media includes Winchester and magneto-optical disks.

[0075] If an item stored in compressed data library **118** is retrieved less frequently, it may be stored in the compressed data library **118** on a digital cassette tape. Examples of such cassette tapes are a Honeywell RSS-600 (Honeywell Inc. Minneapolis Minn.), Summus JukeBoxFilm and tape library (Summus Computer Systems, Houston, Tex. 800-255-9638), or equivalent cassette tapes. All items stored in the compressed data library **118** are on line and are connected to the high speed network. Thus, they may be readily accessed.

[0076] Instead of using a remote order processing and item database **300**, the compressed data library **118** may include the program notes which were input by the system operator. The program notes may preferably include the title of the item stored in the compressed data library **118**, chapter or song titles, running times, credits, the producer of the item, acting and production credits, etc. The program notes of an item stored in the compressed data library **118** may be thus contained within the compressed data file formed in the compressed data formatter **117**.

[0077] In some cases, where multiple compressed data libraries **118** are organized, the popularity code may dictate distribution of a particular item to multiple distribution systems. In such cases, a copy of the compressed data is sent to another library and the other library can then distribute the compressed data to users concurrently with the original compressed data library **118**.

[0078] The compressed data library **118** is composed of a network of storage devices connected through a High Performance Parallel Interface (HPPI) Super Controller (available from Maximum Strategy Inc., San Jose, Calif.). Therefore, multiple communication controllers may preferably access the large quantity of data stored in compressed data library **118** at very high speeds for transfer to a reception system **200** of a user upon request. For more details on this configuration see Ohrenstein, "Supercomputers Seek High Throughput and Expandable Storage", Computer Technology Review, pp. 33-39 April 1990.

[0079] The use of an HPPI controller allows file placement onto multiple mass storage devices of the compressed data library **118** with a minimum of overhead. Database management software controls the location and tracking of the compressed data library **118** which can be located across multiple clusters of file servers connected together by one or more high speed networks over multiple systems.

[0080] The transmission system **100** of the present invention may also preferably include library access/interface means for receiving transmission requests to transmit items and for retrieving formatted data blocks stored in the compressed data library **118** corresponding to the requests from users. The compressed audio and/or video data blocks, along with any of the information about the item stored in the compressed data library **118** may be accessed via library access interface **121**. The library access interface **121**

receives transmission requests either directly from the users or indirectly by remote order processing and item database **300**. The transmission format means **119** receives the request and retrieves the composite formatted data block of the requested item stored in compressed data library **118** and converts the compressed formatted data block into a format suitable for transmission. The requested item is then sent to the user via the transmitter **122** or directly via interface **121**.

[0081] In a preferred embodiment of the present invention, customer access of an item stored in compressed data library **118** via the library access interface **121** may be performed in various ways. The methods of requesting a stored item are analogous to making an airline reservation or transferring funds between bank accounts. Just as there are different methods available for these processes it is desirable to have several ordering methods available to the users of the system of the present invention. For example, telephone tone decoders and voice response hardware may be employed. Additionally, operator assisted service or user terminal interfaces may be used.

[0082] Customer access via telephone tone decoders and voice response hardware is completely electronic and may preferably be performed between a system user and a computer order entry system. The user may obtain help in ordering an item from a computer synthesized voice. With such an access method, the user will normally be accessing a dynamic catalog to assist them. Confirmation of selections and pricing information may preferably be given to the user prior to completion of the transaction.

[0083] This process of access, performed by remote order processing and item database configuration **300**, shown in FIG. 1c, preferably includes the following steps, shown in flowchart **3000** of FIG. 3. First, the user calls the system access number (step **3010**). Upon successfully dialing the system access number, the user receives instructions from the system (step **3020**). The instructions may preferably include steps the user must take in order to place an order. Preferably, the instructions may be bypassed by the experienced user who knows how to place an order.

[0084] The user then enters a customer ID code by which the system accesses the user's account, and indicates to the system that the user is a subscriber of the system (step **3030**). In response to the user entering his ID code in step **3030** the system confirms whether the user is in good standing (step **3040**). If the user is in good standing, the system queues the user to input his request (step **3050**).

[0085] The user request may preferably be made from a catalog sent to each of the subscribers of the system. The user will preferably identify his choice and enter the corresponding identification code of the item (step **3060**). The system then preferably confirmed the selection that the user has made and informs the user of the price of the selection (step **3070**).

[0086] The user then indicates whether the confirmation performed in step **3070** is correct (step **3080**). If the confirmation performed in step **3070** is correct, the user so indicates and then inputs a desired delivery time and delivery location (step **3090**).

[0087] If the confirmation performed in step **3070** does not result in the selection desired by the user, the user re-inputs the item identification code in step **3060** and the confirma-

tion steps **3070** and **3080** are repeated. Therefore, proper selection of the selected item is insured. Once there is confirmation, the user enters the playback time and destination in step **3090**.

[**0088**] The user then preferably confirms that the order is correct (step **3100**). The confirmation performed in step **3100** includes confirmation of the entire transaction including the selected item, the selected time of playback, and the location of playback. The transaction is then completed and the request is placed on a transmission queue at the appropriate source material library **111** (step **3110**).

[**0089**] Access by the users via operator assisted service includes telephone operators who answer calls from the users. The operators can sign up new customers, take orders, and help with any billing problems. The operators will preferably have computer terminals which give them access to account information and available program information. Operators can also assist a user who does not know a title by looking up information stored in files which may contain the program notes, as described above. Once the chosen program is identified, the operator informs the user of the price. After the user confirms the order, the user indicates the desired delivery time and destination. The operator then enters the user request into the system. The request is placed in the transmission queue.

[**0090**] Access by a user terminal interface method provides the user with access from various terminals including personal computers, and specialized interfaces built into the reception system **200** of the user. Such access allows a user to do a search of available programs from a computer screen. This process involves the steps **4000** shown in **FIG. 4**.

[**0091**] **FIG. 4** is a flowchart of a preferred method of user request via a user interface of the present invention. In the preferred method of **FIG. 4**, the user first logs onto the user terminal interface (step **4010**). After the user logs on, the user may preferably select a desired item by searching the database of available titles in the library system control computer **1123** or any remote order processing and item database **300** (step **4020**). The search may preferably be performed using the database containing the program notes, described above with respect to **FIGS. 2a** and **2b**. It is possible to process orders and operate a database of available titles at multiple locations remote of the source material library **111**. Users and order processing operators may preferably access such remote systems and may place transmission requests from these systems. Orders placed on these systems will be processed and distributed to the appropriate libraries. After the desired item is found, the user selects the item for transmission at a specific time and location (step **4030**).

[**0092**] To complete an order, the remote order processing and item database **300** preferably connects to the compressed data library **118** of choice via the library access interface **121** and communicates with the library system control computer **1123**. Preferably the user's account ID, identification of the item for transmission and the chosen destination for the item are communicated. Through employment of distributed order present systems of this type many orders may be processed with minimal library overhead.

[**0093**] All transmission requests from the access methods are placed into a transmission queue managed by the library system control computer **1123**. This queue is managed by a program that controls the distribution of the requested items

to the reception system **200** of the user. The queue manager program also operates in the system control computer and keeps track of the user ID, the chosen program and price, the user channel type, the number of requests for a given program, the latest delivery time, and the produced data library media type (for example, high speed or low speed). From this information, the queue manager program makes best use of the available distribution channels and media for efficient transmission and storage of the requested items.

[**0094**] The queue manager program also manages the file transmission process for multiple requests for a single file, stored in the compressed data library **118**. During a given time period, the queue manager program will optimize access to the compressed data library **118**, wherever possible it will place the data on multiple outputs for simultaneous transmission to more than one requesting user.

[**0095**] The conversion performed by transmission data converter **119** encodes the data for the transmission channel. The transmission data converter transfers the desired segments of data from the compressed data library **118** onto the communication channel which is used to deliver the data to the reception system **200**.

[**0096**] The transmission system **100** of the present invention preferably further includes transmitter means **122**, coupled to the compressed data library **118**, for sending at least a portion of a specific file to at least one remote location. The transmission and receiving system of the present invention preferably operates with any available communication channels. Each channel type is accessed through the use of a communications adaptor board or processor connecting the data stored in the transmission format converter **119** to the transmission channel.

[**0097**] A preferred embodiment of the present invention also includes means by which to access users via common access lines. These may include standard telephone, ISDN or B-ISDN, microwave, DBS, cable television systems, MAN, high speed modems, or communication couplers. Metropolitan Area Networks (MANs) which are common carrier or private communication channels are designed to link sites in a region. MANs are described by Morreale and Campbell in "Metropolitan-area networks" (IEEE Spectrum, May 1990 pp. 40-42). The communication lines are used to transmit the compressed data at rates up to, typically, 10 Mb/sec.

[**0098**] In order to serve a multitude of channel types, a preferred embodiment of the present invention includes a multitude of output ports of each type connected to one or more computers on the transmission and receiving system. The management of transmission is then distributed. That is, the computer controlling the transmission queue tells the transmission encoding computer its task and then the task is executed by the transmission encoding computer, independent of the transmission queue computer. The transmission queue computer provides the data for transmission by the file server which also distributes to other transmitters located in the same or other transmission encoding computers.

[**0099**] **FIG. 5** is a flowchart of a preferred method of implementing a queue manager program of the present invention. The queue manager program, in the distribution process, preferably confirms availability of an item from the compressed data library **118** and logically connects the item

stored in compressed data library **118** to the communications controller, illustrated in **FIG. 2a** (step **5010**). After availability is confirmed in step **5010**, the data awaits transmission by the transmitter **122**.

[**0100**] After availability is confirmed in step **5010**, the communications controller preferably makes the physical connection to the reception system **200** of the user (step **5020**). This is normally done by dialing the receiving device of the user. The reception system **200** preferably answers the incoming call and confirms the connection (step **5030**).

[**0101**] Once connected to the reception system **200**, in steps **5020** and **5030**, the data stored in compressed data library **118** is preferably transferred in data blocks from the compressed data library **118** to the communications controller (step **5040**). The data blocks are buffered by the communications controller. The buffered data is sent down the communications channel to the reception system **200** by transmitter **122** (step **5050**).

[**0102**] The transmitter **122** places the formatted data onto the communications channel. This is an electrical conversion section and the output depends upon the chosen communication path. The signal is sent to the reception system **200** in either a two way or a one way communication process. In a standard telephone connection, the transmitter **122** is preferably a modem. When using an ISDN, the transmitter **122** is preferably a data coupler.

[**0103**] In a preferred embodiment of a the present invention, many forms of communication channels may be employed. Distribution of information is by common carrier communication channels whenever possible. These channels include common telephone service, ISDN and Broadband ISDN, DBS cable television systems, microwave, and MAN.

[**0104**] In order that reception is performed efficiently, the reception system **200** confirms reception of the initial data block before receiving the remaining data blocks whenever possible (step **5060**). After all data blocks have been received and reception is confirmed, the communications controller breaks the physical connection to the reception system **200** (step **5070**). Then, confirmation of the transmission is sent to the queue manager (step **5080**). Finally, the queue manager updates the list and sends the information to the billing program, which updates the account of the user (step **5090**).

[**0105**] When item distribution occurs through a broadcasting method such as a communications satellite, the process is one way, with ongoing reception not being confirmed by the reception system **200**. In these situations, some further redundancy is included by transmission formatter **122** with the data blocks for error correction processing to be performed in the reception system **200**. In such one way communication situations, the queue manager program running in library system control computer **1123** confirms reception, via telephone line connection for example, to the reception system **200** after distribution. This should occur prior updating the user's account and the dispatch lists.

[**0106**] The real time output signals are output to a playback system such as an audio amplifier and/or television. This output may also be sent to an audio/video recorder for more permanent storage. Moreover, in the preferred embodiment only non-copy protected data can be recorded on an

audio/video recorder. Any material which is copy protected will be scrambled at the video output in a way which makes it viewable on a standard audio/video receiver but does not allow for recording of the material.

[**0107**] The reception system **200** has playback controls similar to the controls available on a standard audio/video recorder. These include: play, fast forward, rewind, stop, pause, and play slow. Since items are preferably stored on random access media, the fast forward and rewinding functions are simulations of the actual events which occur on a standard audio/video recorder. Frames do not tear as on an audio/video recorder, but in fast play modes they go by very quickly.

[**0108**] The library access interface **121** in the reception system **200** preferably includes a title window where a list of available titles are alphabetically listed. This window has two modes: local listing of material contained within the library system control computer **1123**, and library listing for all available titles which may be received from the available, remotely accessible libraries. The titles listed in this window are sent from the database on the library system control computer **1123** or the remote order processing and item database **300**.

[**0109**] The system may also preferably include dispatching control software which receives input from the remote order processing and item database **300** and sends distribution requests to the distribution systems. In instances where not all items are contained in each of the compressed data libraries **118**, the dispatching software will keep a list of the available titles in a particular compressed data library **118**. The dispatch software may also preferably coordinate network traffic, source material library **111** utilization, source material library **111** contents, and connection costs. By proper factoring of these variables, efficient use of the available distribution channels may be achieved.

[**0110**] **FIG. 6** illustrates a block diagram of a preferred implementation of the reception system **200** according to the present invention. The reception system **200** is responsive to user requests for information stored in source material library **111**. The reception system **200** includes transceiver **201** which receives the audio and/or video information transmitted by transmitter **122** of the transmission system **100**. The transceiver **201** automatically receives the information from the transmitter **122** as compressed formatted data blocks.

[**0111**] The transceiver **201** is preferably connected to receiver format converter **202**. The receiver format converter **202** converts the compressed formatted data blocks into a format suitable for playback by the user in real time.

[**0112**] In the reception system **200** of the present invention, the user may want to play back the requested item from the source material library **111** at a time later than when initially requested. If that is the case, the compressed formatted data blocks from receiver format converter **202** are stored in storage **203**. Storage **203** allows for temporary storage of the requested item until playback is requested.

[**0113**] When playback is requested, the compressed formatted data blocks are sent to data formatter **204**. Data formatter **204** processes the compressed formatted data blocks and distinguishes audio information from video information.

[0114] The separated audio and video information are respectively decompressed by audio decompressor 209 and video decompressor 208. The decompressed video data is then sent simultaneously to digital video output converter 211 and analog output converter 213. The decompressed audio data is sent simultaneously to digital audio output converter 212 and analog audio output converter 214. The outputs from converters 211-214 are produced in real time.

[0115] The real time output signals are output to a playback system such as a TV or audio amplifier. They may also be sent to an audio/video recorder of the user. By using the reception system 200 of the present invention, the user may utilize the stop, pause, and multiple viewing functions of the receiving device. Moreover, in a preferred embodiment of the present invention, the output format converters may be connected to a recorder which enables the user to record the requested item for future multiple playbacks.

[0116] FIG. 7 is a flow chart 400 of a preferred method of distribution of the present invention. The distribution method is preferably responsive to requests identifying information to be sent from the transmission system 100 to remote locations. Method 400 assumes that the items have already been stored in compressed data library 118.

[0117] As illustrated in FIG. 7, the first step of the distribution method 400 involves retrieving the information for selected items in the source material library 111, upon a request by a user of the distribution system (step 412). This is analogous to taking books off of a shelf at the local public library after the person has decided that he or she would like to read them.

[0118] After the information for the selected items is retrieved in step 412, the distribution method 400 of the present invention further comprises the step of processing the information for efficient transfer (step 413). The processing performed in step 413 preferably includes assigning a unique identification code to the retrieved information performed by identification encoder 112, shown and described with respect to FIG. 2a (step 413a). The processing also preferably includes placing the retrieved information into a predetermined format as formatted data by converter 113 (step 413b), and placing the formatted data into a sequence of addressable data blocks by ordering means 114 (step 413c).

[0119] Processing step 413 also includes compressing the formatted and sequenced data performed by data compressor 116 (step 413d), and storing as a file the compressed sequenced data received from the data compression means with the unique identification assigned by the identification encoding means (step 413e).

[0120] After the information is processed for efficient transfer, in substeps 413a-e of step 413, the distribution method 400 of the present invention preferably includes the step of storing the processed information in a compressed data library (step 414). Preferably, the compressed data library is analogous to compressed data library 118, described with respect to FIG. 2a.

[0121] After the information is stored in a compressed data library 118, the transmission and receiving system preferably waits to receive a transmission request (step 415). Upon receiving a transmission request, from transmission system 100, the compressed formatted data is preferably converted for output to a reception system 200, selected by the user. The information is preferably transmitted over an existing communication channel to a reception system 200,

and is received by that system (step 417). When the information is received in step 417, it is preferably formatted for the particular type of reception system 200 to which the information is sent.

[0122] The received information is preferably buffered (step 418) by storage means analogous to element 203 shown in FIG. 3. The information is preferably buffered so that it may be stored by the user for possible future viewings. The requested information is then played back to the reception system 200 of the user at the time requested by the user (step 419).

[0123] FIGS. 8a-8e are block diagrams of preferred implementations of data structures and data blocking for items in the audio and video distribution system. FIG. 8a shows the block structure of video data where a video frame 812 is composed of a plurality of video samples 811, and a second of video 813 is composed of a plurality of video frames 812.

[0124] FIG. 8b shows the block structure of audio data where an audio data frame 822 is composed of a plurality of audio samples 821, and a second of audio 823 is composed of a plurality of audio data frames 822. FIG. 8c shows the block structure of a data frame 832 composed of a plurality of data bytes 831. The combination of the audio frames 812, video frames 822, and data frames 832 comprise the elements of a single item. FIG. 8d shows a block representation of for three illustrative items which may be stored in the source material library 111. Each of items 1-3 contains its own arrangement of video frames 812, audio frames 822, and data frames 832.

[0125] FIG. 8e shows methods of distribution to reception systems 200 with both multiplexed and non-multiplexed signal paths, both addressed and non-addressed blocks of items. A block of an item may be an entire item or, alternatively, may be only a portion of an item, as selected by a user. Further, the blocks may be composed of either compressed, partially compressed, or fully decompressed data, as required by the configuration of the reception system 200.

[0126] As shown in FIG. 8e, the same block, for example, block 1, may be simultaneously transmitted over different distribution channels. The blocks when transmitted over one of the distribution channels may have receiver addresses appended to the blocks or the reception system 200 may have been preconfigured to receive the blocks comprising data frames for particular items from the active distribution channel.

[0127] Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with the true scope and spirit of the invention being indicated by the following claims.

What is claimed is:

1. A transmission system for providing information to remote locations, the transmission system comprising:

library means for storing items;

identification encoding means for retrieving the information for the items from the library means and for assigning a unique identification code to the retrieved information;

- conversion means, coupled to the identification encoding means, for placing the retrieved information into a predetermined format as formatted data;
- ordering means, coupled to the conversion means, for placing the formatted data into a sequence of addressable data blocks;
- compression means, coupled to the ordering means, for compressing the formatted and sequenced data;
- compressed data storing means, coupled to the data compression means, for storing as a file the compressed, sequenced data received from the data compression means with the unique identification code assigned by the identification encoding means; and
- transmitter means, coupled to the compressed data storing means, for sending at least a portion of a file to one of the remote locations.
- 2.** A transmission system as recited in claim 1, wherein the transmitter means includes:
- transmission format means for placing the composite formatted data block onto a communication path.
- 3.** A transmission system as recited in claim 1, wherein the information in the items includes analog signals, and wherein the conversion means further comprises:
- converting means, coupled to the identification encoding means, for A/D converting the analog data of the retrieved information into a series of digital data bytes; and
- formatting means, coupled to the converting means, for converting the digital data bytes into formatted data with a predetermined format.
- 4.** A transmission system as recited in claim 1, wherein the information in the items includes digital signals, and wherein the conversion means further comprises:
- digital input receiver means, coupled to the identification encoding means, for converting the digital data of the retrieved information into predetermined voltage levels; and
- formatting means, coupled to the digital input receiver means, for converting the predetermined voltage levels into formatted data with a predetermined format.
- 5.** A transmission system as recited in claim 3, wherein the information in the items includes digital signals, and wherein the conversion means further comprises:
- digital input receiver means, coupled to the identification encoding means, for converting the digital data of the retrieved information into predetermined voltage levels; and
- formatting means, coupled to the digital input receiver means, for converting the predetermined voltage levels into formatted data with the predetermined format.
- 6.** A transmission system as recited in claim 2, wherein the compressed data storing means further comprises:
- compressed data library means for separately storing composite formatted data blocks for each of the files converted and stored.
- 7.** A transmission system as recited in claim 6, further comprising:
- system control interface means, coupled to the transmission format means, for generating a visual listing of available items; and
- library access interface means, coupled to the transmission format means, for receiving transmission requests to transmit items, and for retrieving formatted data blocks stored in the compressed data library means corresponding to the requests from subscribers.
- 8.** A transmission system as recited in claim 1, further comprising:
- precompression data processing means, coupled to the ordering means, for storing the formatted data.
- 9.** A transmission system as recited in claim 1, wherein the information in the items includes analog audio information, and wherein the conversion means further comprises:
- audio converting means, coupled to the identification encoding means, for converting the analog audio signals into streams of digital audio data.
- 10.** A transmission system as recited in one of claims **1** and **9**, wherein the information in the items includes analog video information, and wherein the conversion means further comprises:
- video converting means, coupled to the identification encoding means, for converting the analog video signals into streams of digital video data.
- 11.** A transmission system as recited in one of claims **1** and **9**, wherein the information in the items includes partly encoded information, and wherein the conversion means further comprises:
- digital input means, coupled to the identification encoding means, for receiving partial encoded information in the items.
- 12.** A transmission system as recited in claim 1, wherein the data compression means comprises:
- means for performing a multi-dimensional analysis of the formatted data for inclusion in a predetermined algorithm; and
- compression processors for running the predetermined algorithm and for compressing the formatted data.
- 13.** A transmission system as recited in claim 1, wherein the compression means comprises:
- means for identifying repeating patterns in the formatted data for inclusion in a predetermined algorithm; and
- compression processors for running the predetermined algorithm and for compressing the formatted data.
- 14.** A transmission system as recited in claim 12, wherein the multi-dimensional analysis means includes means for performing the multi-dimensional analysis in the horizontal dimension.
- 15.** A transmission system as recited in claim 12, wherein the multi-dimensional analysis means includes means for performing the multi-dimensional analysis in the vertical dimension.
- 16.** A transmission system as recited in claim 12, wherein the multi-dimensional analysis means includes means for performing the multi-dimensional analysis in the time dimension.

17. A transmission system as recited in claim 12, wherein the multi-dimensional analysis means includes means for performing the multi-dimensional analysis in the zig-zag dimension.

18. A distribution method responsive to requests identifying information to be sent from a transmission system to remote locations, the method comprising the steps of:

storing audio and video information in a compressed data form;

requesting transmission, by a user, of at least a part of the stored compressed data to a remote location selected by the user;

sending at least a portion of the stored compressed information to the remote location;

receiving the sent information at the remote location;

buffering the received information at the remote location; and

playing back the buffered information in real time at a time requested by the user.

19. The distribution method as recited in claim 18, wherein the information in the items includes analog and digital signals, and wherein the step of processing further comprises the steps of:

converting analog signals of the information to digital components;

formatting the digital data signals of the information;

ordering the converted analog data and the formatted digital data in a predetermined sequence and;

compressing the ordered information.

20. The method of claim 18 wherein the step of storing the items includes the substep of storing the items in a plurality of compressed picture and sound information.

21. The method of claim 18 further comprising the steps of:

storing a list of items available to the user from at least one compressed data library; and

providing the user with the list so that the user may remotely select a particular item for transmission.

22. A receiving system responsive to a user input identifying a choice of an item stored in a source material library to be played back to the subscriber at a location remote from the source material library, the item containing information to be sent from a transmitter to the receiving system, the receiving system comprising:

transceiver means, for automatically receiving the requested information from the transmitter as compressed formatted data blocks;

receiver format conversion means, coupled to the transceiver means, for converting the compressed formatted data blocks into a format suitable for storage and processing for playback in real time;

storage means, coupled to the receiver format conversion means, for storing the compressed formatted data;

decompressing means, coupled to the receiver format conversion means, for decompressing the compressed formatted information; and

output data conversion means, coupled to the decompressing means, for playing back the decompressed information in real time at a time specified by the user.

23. A receiving system as recited in claim 22, further comprising:

user interface means for translating the input into a request for sending the requested information from the transmitter to the receiving system.

24. A receiving system as recited in claim 22, wherein the output data conversion means includes recording means which controls the playback.

25. A receiving system as recited in claim 22, wherein the storage means stores the formatted information until playback is requested by an operator.

26. A receiving system as recited in claim 22, wherein the decompression means further comprises:

video signal decompression means for decompressing video information contained in the compressed formatted information.

27. A receiving system as recited in claim 26, wherein the output data conversion means further comprises:

digital video output means, connected to the video signal decompression means, for outputting a digital video signal contained in the video information; and

analog video output means, connected to the video signal decompression means, for outputting an analog video signal contained in the video information.

28. A receiving system as recited in claim 27, wherein the video output means further comprises:

copy protection means for preventing copying by the user of protected information.

29. A receiving system as recited in claim 22, wherein the recompression means further comprises:

audio signal decompression means for decompressing audio information contained in the compressed formatted information.

30. A receiving system as recited in claim 29, wherein the output data conversion means further comprises:

digital audio output means, connected to the audio signal decompression means, for outputting a digital audio signal contained in the audio information; and

analog audio output means, connected to the audio signal decompression means, for outputting an analog audio signal contained in the audio information.

31. A receiving system as recited in claim 22, wherein the decompression means further comprises:

video signal decompression means for decompressing video information contained in the compressed formatted information; and

audio signal decompression means for decompressing audio information contained in the compressed formatted information.

32. A receiving system as recited in claim 22, wherein the transceiver means receives the information via any one of telephone, ISDN, broadband ISDN, satellite, common carrier, computer channels, cable television systems, MAN, and microwave.