

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61M 25/00		A2	(11) International Publication Number: WO 93/23108 (43) International Publication Date: 25 November 1993 (25.11.93)
(21) International Application Number: PCT/US93/04566 (22) International Filing Date: 12 May 1993 (12.05.93) (30) Priority data: 07/883,001 14 May 1992 (14.05.92) US (71) Applicant: BAXTER INTERNATIONAL INC. [US/US]; One Baxter Parkway, Deerfield, IL 60015 (US). (72) Inventors: LO, Ying-Cheng ; 225 Fox Run, Green Oaks, IL 60048 (US). PATEL, Indrajit, T. ; 1115 Riverwood Drive, Algonquin, IL 60102 (US). WOO, Lecon ; 1013 Shari Lane, Libertyville, IL 60048 (US). CHEUNG, Y., Wilson ; 90 Village Par, Apt. #90, Ahmerst, MA 01003 (US). LING, Michael, T., K. ; 343 Chesterfield Lane, Vernon Hills, IL 60061 (US).			(74) Agents: ROCKWELL, Amy, L., H. et al.; One Baxter Parkway, Deerfield, IL 60015 (US). (81) Designated States: AU, BR, CA, JP, KR, NO, NZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: COEXTRUDED MEDICAL GRADE PORT TUBING			
(57) Abstract The present invention provides an improved coextruded medical port tubing. The medical port tubing provides characteristics that are desirable in the medical industry and therefore can be used as a medical port tubing in, for example, renal therapy or blood donor tubes. To this end, the present invention provides a coextruded medical grade port tubing comprising: an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer; a tie layer; and a core layer comprising polyvinyl chloride.			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

- 1 -

S P E C I F I C A T I O NTITLE

"COEXTRUDED MEDICAL GRADE PORT TUBING"

BACKGROUND OF THE INVENTION

5 The present invention relates generally to materials for making medical grade products. More specifically, the present invention relates to medical grade port tubing.

10 It is known in the medical industry to house products such as fluids that are administered to a patient in plastic containers.

15 It is also known to use medical tubing, ports, to provide access either to a container or from a container. Such port tubing serves other purposes besides accessing the container, for example, as a conduit to a patient from a fluid source. Such medical port tubing has uses in such therapies as renal and blood.

20 Examples of therapies wherein flexible containers including port tubing are used include intravenous therapy, continuous ambulatory dialysis (CAPD), and blood therapy. In CAPD, the container includes a dialysis fluid that can be infused into the peritoneal of the patient through a tube, port, fused to the container.

25 Typically, for medical uses, there are a variety of characteristics that a medical port tube should have. Among the characteristics the port tube should exhibit is the ability to be RF (radio frequency) sealed to a material from which the container may be constructed. This allows the port tubing to be compatible with
30 equipment used in certain of the medical industries. It is also desirable that the port tubing can be solvent bondable. For example, it is known in manufacturing containers with a port tubing to bond such tubings to a

- 2 -

port closure (for example, PVC) using cyclohexanone to protect the sterility of the port tubing.

Furthermore, such port tubing should be sufficiently flexible as well as translucent. Additionally, the port tubing, if it is coextruded, must not easily delaminate.

Although most medical containers have been constructed from PVC, recently, much attention has been focussed on constructing non-PVC containers. Such port tubing, if it is to be used with a non-PVC container, must be compatible therewith.

SUMMARY OF THE INVENTION

The present invention provides an improved coextruded medical port tubing and materials for making same. The medical port tubing provides characteristics that are desirable in the medical industry and therefore can be used as a medical port tubing in, for example, renal therapy or blood donor tubes. Furthermore, the port tubing can be used with a non-PVC container.

To this end, the present invention provides a coextruded medical grade port tubing comprising: an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer; a tie layer; and a core layer comprising polyvinyl chloride.

In an embodiment, the tie layer comprises a blend of polyester, polypropylene copolymer, styrene-ethylene-butylene-styrene copolymer, and ethylene vinyl acetate. Preferably, the tie layer is a blend comprising: approximately 30 to about 60% by weight copolyester; approximately 0 to about 20% by weight polypropylene copolymer; approximately 30 to about 60% by weight styrene-ethylene-butylene-styrene copolymer; and approximately 0 to about 30% by weight ethylene vinyl acetate.

- 3 -

In an embodiment, the outer layer of the port tube comprises approximately 40 to about 99% by weight polypropylene copolymer and approximately 1 to about 60% by weight styrene-ethylene-butylene-styrene copolymer.

5 In an embodiment, the present invention provides a coextruded medical grade port tubing comprising: an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer; a tie layer comprising a blend of polyester, polypropylene copolymer,
10 styrene-ethylene-butylene-styrene copolymer, and ethylene vinyl acetate; and a core layer of polyvinyl chloride. This structure allows the outer layer to be bonded to polyolefin surface layer film and allows the inner layer to be solvent bonded to PVC material.

15 In an embodiment, the layers of the port tubing have the following thickness ratios: outer layer approximately 2.5 to about 30%; tie layer approximately 2.5 to about 20%; and core layer approximately 50 to about 95%. Preferably, the outer and tie layer are thin enough to
20 allow rapid and sufficient heat transfer from the PVC heat generation layer to the outer layer for welding.

Additional features and advantages of the present invention are described in, and will be apparent from, the detailed description of the presently preferred
25 embodiments and from the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a cross-sectional view of a coextruded port tube constructed pursuant to an embodiment of the present invention.

30 Figure 2 illustrates a perspective view of a container including the port tubing of the present invention.

- 4 -

DETAILED DESCRIPTION
OF THE PRESENTLY PREFERRED EMBODIMENTS

The present invention provides a coextruded medical grade port tubing and material for making same that achieves many of the characteristics that are desirable, in the medical industry, for such port tubing. For example, the port tubing, in an embodiment, exhibits RF sealability, ability to solvent bond, flexibility, translucence, and ability to not delaminate after severe bending or autoclaving.

Referring to Figure 1, the present invention provides a coextruded medical grade port tubing comprising: an outer layer 12 comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer; a tie layer 14 comprising preferably a blend of polyester, polypropylene copolymer, styrene-ethylene-butylene-styrene copolymer, and ethylene vinyl acetate; and a core layer 16 of polyvinyl chloride.

The medical grade port tubing 10 is autoclavable and can be RF sealable to a non-PVC container having a polyolefin blend or polyolefin surfaces. Additionally, the composition can be solvent bonded to a PVC closure using cyclohexanone, MEK (methyl ethyl ketone) or other solvent. In this regard, the outer layer 12 is able to bond to a polyolefin surface layer film while the core layer 16 can be bonded to a PVC material.

Preferably, the tie layer 14 is a blend of material comprising: approximately 30 to 60% copolyester by weight, for example, Hytrel available from DuPont; approximately 0 to 20% by weight polypropylene copolymer (approximately 2-6% by weight polyethylene); approximately 30 to about 60% by weight styrene-ethylene-butylene-styrene copolymer, for example, Kraton; and

- 5 -

approximately 0 to about 30% by weight ethylene vinyl acetate.

Preferably, the outer layer 12 comprises approximately 40 to 99% by weight polypropylene copolymer that includes approximately 2 to 6% by weight polyethylene, and approximately 1 to 60% by weight styrene-ethylene-butylene-styrene copolymer, for example, Kraton.

The core layer 16 can comprise PVC plasticized with DEHP, or other material. Likewise, the core layer 16 can comprise non-plasticized PVC.

Preferably, the medical grade port tubing 10 has a structure so that it has the following ratio of layer thicknesses: the outer layer 12 comprises approximately 2.5% to about 30% of the total cross-sectional thickness of the port tube; the tie layer 14 comprises approximately 2.5% to 20% of the total cross-sectional thickness of the tube; and the core layer 16 of the structure comprises approximately 50% to 95% of the total cross-sectional thickness of the structure. By providing thin outer and tie layers 12 and 14, the port tubing 10 can be R.F. sealed to a plastic film.

The resultant medical grade port tubing 10 is flexible and translucent. Accordingly, when used as a medical tubing, one can see air bubbles or needles, for example, through the port tubing. Additionally, the port tubing 10 does not easily delaminate even after severe bending either before or after autoclaving.

The port tubing 10 of Figure 1 can be used with a medical container 20 illustrated in Figure 2. In a preferred embodiment, the container 20 is constructed from a non-PVC material. In a preferred embodiment, the container is constructed from a four layer film

- 6 -

comprising: polypropylene copolymer, Kraton®/ethylene vinyl acetate/acid modified ethylene vinyl acetate/PCCE.

The port tubing 10 provides access to and away from an interior 22 of the container 20. The port tubing 10 of the present invention is believed to be particularly suitable for use in renal applications, especially CAPD. However, the port tubing 10 can be used to construct other medical products.

By way of example, and not limitation, examples of the present invention will now be given.

EXAMPLE NO. 1

Coextruded port tubings were constructed and evaluated as follows.

The following materials were used:

Core layer: DEHP Plasticized PVC;
Tie layer: 50 weight % Kraton G-1660 (Shell);
38 weight % Hytrel 4056 (DuPont);
10 weight % UE 697000 (Quantum); and
2 weight % Polypropylene copolymer 23M2 (El Paso);
Outer layer: 60 weight % Polypropylene copolymer-Fina 8473 (Fina);

and
40 weight % Styrene-ethylene-butylene-styrene - Kraton G-1652 (Shell).

The following processing conditions were used:

• Nominal Setting

Core Layer 1½" Davis Standard

Tie Layer 1: Davis Standard

<u>Barrel Zone #</u>	<u>Set</u>	<u>Barrel Zone #</u>	<u>Set</u>
1)	325°F	1)	450°F
2)	325°F	2)	450°F
3)	325°F	3)	450°F
4)	325°F		

- 7 -

	<u>Die Zone</u>	<u>#</u>	<u>Set</u>		<u>Die Zone</u>	<u>#</u>	<u>Set</u>
		1)	325°F			1)	450°F
		Adapter	325°F				
	Screw R.P.M.:	60	AMPS: 12		Screw R.P.M.:	21	AMPS: 4
5	Screw Type:		Pin		Screw Type		Maddox
	Screw Pack:		40-60-40		Screw Pack:		40-60-40
	Head Pressure:		5800 P.S.I.		Head Pressure		180 P.S.I.
	<u>Outer Layer 1" Davis-Standard</u>						
	<u>Barrel Zone</u>	<u>#</u>	<u>Set</u>		<u>(Tri Die Set-Up)</u>		
10		1)	400°F		Die Pin O.D.:		.300" O.D.
		2)	400°F		Die Bushing:		.375" I.D.
		3)	400°F				
	<u>Die Zone</u>	<u>#</u>	<u>Set</u>		<u>(Vacuum Tank Set-Up)</u>		
		1)	400°F		Sizer I.D.:		.390"
15					Water Temp.:		53.8"
					Vacuum:Pot. Setting		25.5
					Die to Tank:		1"
	Screw R.P.M.:	18	AMPS: 4		Pull or Setting:		33 f.P.M.
	Screw Type:		Barrier				
20	Screw Pack:		40-60-40				
	Head Pressure:		N/A				

The resultant port tubing included a core layer having a thickness of .71 mm, a tie layer of .05 mm, and an outer layer of .05 mm.

The port tubing was autoclaved. The port tubing characteristics were then evaluated, after autoclaving, and are set forth below in the table. The bonding force between the outer and tie layer was found to be strong. An initial separation between the outer and tie layer could not be initiated. The bonding force between the tie and core layer was 1.1 to 1.2 lbs./0.5 inches.

PORT TUBING MATERIAL EVALUATION

Tubing Materials	Tubing Characteristics			Post Autoclaving		COMMENTS
	Processing	Bond	Texture	Bond	Texture	
Example #1	Good	9	Smooth	9	Smooth	Very difficult to peel

- 8 -

1. Assume bonding strength of PVC to PVC by cyclohexanone is 10. Data results are subjective due to manual testing. (*)

5 Example No. 1 demonstrates that the port tubing of the present invention meets the necessary requirements of a port tubing. Indeed, the port tubing exhibits characteristics that are better than current PVC port tubing since a typical PVC port will not bond to a non-PVC container.

10 It should be understood that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications can be made without departing from the spirit and scope of the present invention and without diminishing its attendant
15 advantages. It is therefore intended that such changes and modifications be covered by the appended claims.

- 9 -

WE CLAIM:

1. A coextruded medical grade port tubing comprising:

5 an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer;

a tie layer; and

a core layer of polyvinyl chloride.

10 2. The coextruded medical grade port tubing of Claim 1 wherein the tie layer comprises a blend of polyester, polypropylene copolymer, styrene-ethylene-butylene-styrene copolymer, and ethylene vinyl acetate.

3. The coextruded medical grade port tubing of Claim 1 wherein the tie layer is a blend comprising:

15 approximately 30 to about 60% by weight copolyester;

approximately 0 to about 20% by weight polypropylene copolymer;

approximately 30 to about 60% by weight styrene-ethylene-butylene-styrene copolymer; and

20 approximately 0 to about 30% by weight ethylene vinyl acetate.

25 4. The medical grade port tubing of Claim 3 wherein the polypropylene copolymer of the tie layer includes approximately 2 to about 6% by weight polyethylene.

5. The coextruded medical port tubing of Claim 1 wherein the outer layer comprises:

approximately 40 to about 99% by weight polypropylene copolymer; and

30 approximately 1 to about 60% by weight styrene-ethylene-butylene-styrene copolymer.

6. The coextruded medical port tubing of Claim 1 wherein the outer layer comprises approximately 60% by

- 10 -

weight polypropylene copolymer and approximately 40% by weight styrene-ethylene-butylene-styrene.

7. The coextruded medical grade port tubing of Claim 1 wherein the polypropylene copolymer comprises approximately 2 to about 6% by weight polyethylene.

8. The coextruded medical grade port tubing of Claim 1 wherein the layers have the following thickness ratios:

outer layer approximately 2.5 to about 30% of the total cross-sectional thickness of the port tubing;

tie layer approximately 2.5 to about 20% of the total cross-sectional thickness of the port tubing; and

core layer approximately 50 to about 95% of the total cross-sectional thickness of the port tubing.

9. A coextruded medical grade port tubing that is sealable to an olefin film and solvent bondable to PVC comprising:

an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer;

a tie layer comprising approximately 30 to about 60% by weight copolyester, approximately 0 to about 20% by weight polypropylene copolymer, approximately 30 to about 60% by weight styrene-ethylene-butylene-styrene copolymer, and approximately 0 to about 30% by weight ethylene vinyl acetate; and

a core layer comprising polyvinyl chloride.

10. The coextruded medical port tubing of Claim 9 wherein the outer layer comprises:

approximately 40 to about 99% by weight polypropylene copolymer; and

approximately 1 to about 60% by weight styrene-ethylene-butylene-styrene copolymer.

- 11 -

11. The coextruded medical port tubing of Claim 9 wherein the outer layer comprises approximately 60% by weight polypropylene copolymer and approximately 40% by weight styrene-ethylene-butylene-styrene.

5 12. The coextruded medical grade port tubing of Claim 9 wherein the polyvinyl chloride includes a plasticizer.

10 13. The coextruded medical grade port tubing of Claim 9 wherein the polyvinyl chloride does not include a plasticizer.

14. A non-PVC medical container for housing medical fluid including a non-PVC coextruded medical grade port tubing comprising:

15 an outer layer comprising a blend of polypropylene copolymer and styrene-ethylene-butylene-styrene copolymer;

 a tie layer; and

 a core layer comprising a blend of polyvinyl chloride.

20 15. The medical container of Claim 14 wherein the tie layer of the port tubing comprises a blend of polyester, polypropylene copolymer, styrene-ethylene-butylene-styrene copolymer, and ethylene vinyl acetate.

25 16. The medical container of Claim 14 wherein the tie layer of the port tubing is a blend comprising:

 approximately 30 to about 60% by weight copolyester;

 approximately 0 to about 20% by weight polypropylene copolymer;

30 approximately 30 to about 60% by weight styrene-ethylene-butylene-styrene copolymer; and

 approximately 0 to about 30% by weight ethylene vinyl acetate.

- 12 -

17. The medical container of Claim 14 wherein the outer layer of the port tubing comprises:

approximately 40 to about 99% by weight polypropylene copolymer; and

5 approximately 1 to about 60% by weight styrene-ethylene-butylene-styrene copolymer.

18. The medical container of Claim 14 wherein the polyvinyl chloride of the port tubing includes a plasticizer.

10 19. The medical container of Claim 14 wherein the polyvinyl chloride of the port tubing does not include a plasticizer.

20. The medical container of Claim 14 wherein the layers of the port tubing have the following thickness ratios:

15 outer layer approximately 2.5 to about 30% of the total cross-sectional thickness of the port tubing;

tie layer approximately 2.5 to about 20% of the total cross-sectional thickness of the port tubing; and

20 core layer approximately 50 to about 95% of the total cross-sectional thickness of the port tubing.

1 / 1

FIG. 1

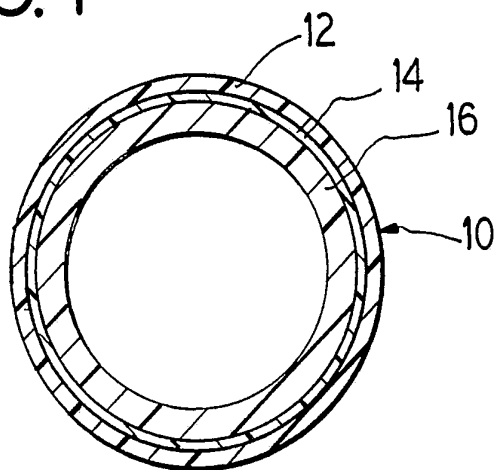


FIG. 2

