



(22) **Date de dépôt/Filing Date:** 2005/09/13

(41) **Mise à la disp. pub./Open to Public Insp.:** 2006/03/23

(45) **Date de délivrance/Issue Date:** 2019/04/30

(62) **Demande originale/Original Application:** 2 897 221

(30) **Priorité/Priority:** 2004/09/13 (US10/939,955)

(51) **Cl.Int./Int.Cl. G05D 1/08** (2006.01),
A63C 17/04 (2006.01), **A63C 17/12** (2006.01),
B60L 15/20 (2006.01), **B60L 50/50** (2019.01),
B62K 17/00 (2006.01), **B62K 3/00** (2006.01)

(72) **Inventeurs/Inventors:**

KAMEN, DEAN, US;
AMBROGI, ROBERT R., US;
DATTOLO, JAMES J., US;
DUGGAN, ROBERT J., US;
FIELD, J. DOUGLAS, US;
...


(73) **Propriétaire/Owner:**

DEKA PRODUCTS LIMITED PARTNERSHIP, US

(74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : CONTROLE DE TRANSPORTEUR PERSONNEL FONDE SUR UNE POSITION D'UTILISATEUR**

(54) **Title: CONTROL OF A PERSONAL TRANSPORTER BASED ON USER POSITION**

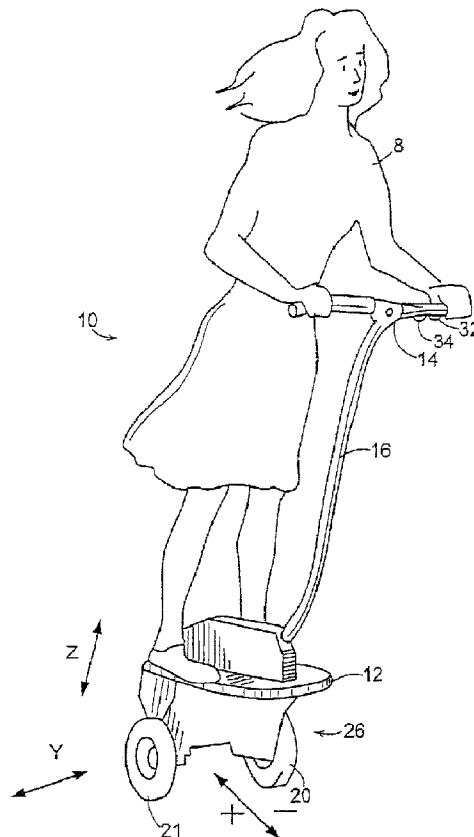

(57) **Abstrégé/Abstract:**

A controller for providing user input of a desired direction of motion or orientation for a transporter. The controller has an input for receiving specification by a user of a value based on a detected body orientation of the user. User-specified input may be

(72) **Inventeurs(suite)/Inventors(continued):** HEINZMANN, RICHARD KURT, US; MCCAMBRIDGE, MATTHEW M., US; MORRELL, JOHN B., US; PIEDMONTE, MICHAEL D., US; ROSASCO, RICHARD J., US

(57) **Abrégé(suite)/Abstract(continued):**

conveyed by the user using any of a large variety of input modalities, including: ultrasonic body position sensing; foot force sensing; handlebar lean; active handlebar; mechanical sensing of body position; and linear slide directional input. An apparatus that may include an active handlebar is provided for prompting a rider to be positioned on a vehicle in such a manner as to reduce lateral instability due to lateral acceleration of the vehicle.

ABSTRACT

A controller for providing user input of a desired direction of motion or orientation for a transporter. The controller has an input for receiving specification by a user of a value based on a detected body orientation of the user. User-specified input may be conveyed by the user using any of a large variety of input modalities, including: ultrasonic body position sensing; foot force sensing; handlebar lean; active handlebar; mechanical sensing of body position; and linear slide directional input. An apparatus that may include an active handlebar is provided for prompting a rider to be positioned on a vehicle in such a manner as to reduce lateral instability due to lateral acceleration of the vehicle.

Control of a Personal Transporter based on User Position

5

FIELD OF THE INVENTION

The present invention pertains to control of personal transporters, and more particularly to devices and methods for providing user input with respect to either directional or velocity control of such transporters (having any number of ground-
10 contacting elements) based on the position or orientation of a user.

BACKGROUND

Dynamically stabilized transporters refer to personal transporters having a control system that actively maintains the stability of the transporter while the transporter is
15 operating. The control system maintains the stability of the transporter by continuously sensing the orientation of the transporter, determining the corrective action to maintain stability, and commanding the wheel motors to make the corrective action.

For vehicles that maintain a stable footprint, coupling between steering control, on the one hand, and control of the forward motion of the vehicles is not an issue of concern
20 since, under typical road conditions, stability is maintained by virtue of the wheels being in contact with the ground throughout the course of a turn. In a balancing transporter, however, any torque applied to one or more wheels affects the stability of the transporter. Coupling between steering and balancing control mechanisms is one subject of U.S. Patent No. 6,789,640. Directional inputs that advantageously provide intuitive and
25 natural integration of human control with the steering requirements of a balancing vehicle are the subject of the present invention.

SUMMARY OF THE INVENTION

In accordance with preferred embodiments of the present invention, a controller is
30 provided that may be employed for providing user input of a desired direction of motion

or orientation for a transporter. The controller has an input for receiving specification by a user of a value based on a detected body orientation of the user.

User-specified input may be conveyed by the user using any of a large variety of input modalities, including: ultrasonic body position sensing; foot force sensing;
5 handlebar lean; active handlebar; mechanical sensing of body position; and linear slide directional input.

In those embodiments of the invention wherein the transporter is capable of balanced operation on one or more ground-contacting elements, an input is provided for receiving specification from the user of a desired direction of motion, or a desired
10 velocity value based on a detected body orientation of the user. A processor generates a command signal based at least on the user-specified direction and velocity value in conjunction with a pitch command signal that is based on a pitch error in such a manner as to maintain balance of the transporter in the course of achieving the specified direction and velocity. The input of a desired direction may also include a user-specified yaw
15 value, yaw rate value, or fore/aft direction.

In various other embodiments of the invention, the controller has a summer for differencing an instantaneous yaw value from the user-specified yaw value to generate a yaw error value such that the yaw command signal generated by the processor is based at least in part on the yaw error value. The input for receiving user specification may include
20 a pressure sensor disposed to detect orientation of the user, an ultrasonic sensor disposed to detect orientation of the user, or a force sensor disposed on a platform supporting the user for detecting weight distribution of the user. In yet other embodiments, the input for receiving user specification includes a shaft disposed in a plane transverse to an axis characterizing rotation of the two laterally disposed wheels, the desired direction and
25 velocity specified on the basis of orientation of the shaft.

In accordance with further embodiments of the invention, the balancing transporter may include a handlebar, and the controller may further have a powered pivot for positioning the handlebar based at least upon one of lateral acceleration and roll angle of the transporter. In particular, the controller may have a position loop for commanding a
30 handlebar position substantially proportional to the difference in the square of the velocity of a first wheel and the square of the velocity of a second wheel.

In accordance with yet other embodiments of the invention, an apparatus is provided for prompting a rider to be positioned on a vehicle in such a manner as to reduce lateral instability due to lateral acceleration of the vehicle. The apparatus has an input for receiving specification by the rider of a desired direction of travel and an indicating
 5 means for reflecting to the rider a desired instantaneous body orientation based at least on current lateral acceleration of the vehicle. The indicating means may include a handlebar pivotable with respect to the vehicle, the handlebar driven in response to vehicle turning.

BRIEF DESCRIPTION OF THE DRAWINGS

10 The foregoing features of the invention will be more readily understood by reference to the following detailed description, taken with reference to the accompanying drawings, in which:

Fig. 1 shows a personal transporter, as described in detail in U.S. Patent no. 6,302,230, to which the present invention may advantageously be applied;

15 Fig. 2 shows a block diagram showing the constitutive inputs and outputs of a yaw command in a system architecture to which the present invention may be advantageously applied;

Fig. 3A is an exploded view of components of a yaw control mechanism showing a yaw control grip coupled to a user interface of a personal transporter, in accordance
 20 with an embodiment of the present invention;

Fig. 3B shows a detailed exploded view of the yaw control grip of Fig. 3A;

Fig. 3C shows the integral yaw control sensor of the yaw control mechanism of Fig. 3A;

Fig. 4 shows a schematic block diagram of a yaw-feedback control system in
 25 accordance with embodiments of the present invention;

Fig. 5A is a schematic top view of a rider in positions indicating full square positioning, a tilt to the left, and a counterclockwise rotation, respectively;

Fig. 5B is a front view of a hip collar for detecting changes in rider orientation to control yaw in accordance with an embodiment of the present invention;

30 Fig. 5C is a diagram of an ultrasound transmitter/receiver configuration in accordance with various embodiments of the present invention;

Fig. 5D is a waveform timing display of ultrasound signals transmitted and received by components of embodiments of the present invention depicted in Fig. 4A;

Fig. 6A is a top view of the platform of a personal transporter with the pressure plate removed, indicating the placement of feet-force pressure sensors in accordance with various embodiments of the present invention;

Fig. 6B is a diagram of a pressure plate for application of force by a user in embodiments of the present invention depicted in Fig. 6A;

Fig. 6C is a schematic depicting the development of a yaw command signal from the foot-force sensors of Fig. 6A, in accordance with an embodiment of the present invention;

Fig. 6D shows a deadband in the command as a function of yaw input;

Fig. 6E shows a ramp function for switching yaw command in reverse as a function of wheel velocity;

Fig. 7A shows a handlebar lean device for control input to a personal transporter in accordance with embodiments of the present invention;

Fig. 7B shows a handlebar lean device with flexure coupling of the control stalk to the ground-contacting module for control input to a personal transporter in accordance with embodiments of the present invention;

Fig. 7C shows a further handlebar lean device with separated handles for control input to a personal transporter in accordance with embodiments of the present invention;

Fig. 7D shows a rotating handlebar device for control input to a personal transporter in accordance with embodiments of the present invention

Fig. 7E shows a handlebar lean device for control input to a personal transporter in accordance with embodiments of the present invention;

Fig. 7F shows a shock absorber and damping adjustment for use with the embodiment of the invention depicted in Fig. 7A;

Fig. 7G is a block schematic of a mixer block for combining yaw input and roll information in accordance with embodiments of the present invention;

Fig. 7H shows a handlebar bearing and détente allowing the rotational degree of freedom of the handlebar to be locked in accordance with an embodiment of the present invention;

Fig. 8A shows the response of the active handlebar to a roll disturbance, in accordance with an embodiment of the present invention;

Figs. 8B and 8C show front and back views of active handlebar response during a high-speed turn, in accordance with an embodiment of the present invention;

5 Figs. 9A and 9B show the basic mechanical hardware layout of the powered handlebar embodiment of Figs. 8A-8C;

Fig. 10A shows a front view of a knee position sensor for providing steering input to a personal transporter in accordance with embodiments of the present invention;

10 Fig. 10B shows a centering mechanism employed in conjunction with the knee position sensor of Fig. 10A;

Fig. 10C shows hip position sensors for providing user yaw input in accordance with an embodiment of the present invention;

Fig. 10D shows a torso position sensor for providing user yaw input in accordance with an embodiment of the present invention; and

15 Fig. 11 depicts a linear slide footplate mechanism in accordance with yet another embodiment of the present invention.

DETAILED DESCRIPTION

A personal transporter may be said to act as 'balancing' if it is capable of
20 operation on one or more wheels but would be unable to stand on the wheels but for operation of a control loop governing operation of the wheels. A balancing personal transporter lacks static stability but is dynamically balanced. The wheels, or other ground-contacting elements, that provide contact between such a personal transporter and the ground or other underlying surface, and minimally support the transporter with respect to
25 tipping during routine operation, are referred to herein as 'primary ground-contacting elements.'

Fig. 1 shows a balancing personal transporter, designated generally by numeral 10, and described in detail in U.S. Patent no. 6,302,230, as an example of a device to which the present invention may advantageously be applied. A subject 8 stands on a
30 support platform 12 and holds a grip 14 on a handle 16 attached to the platform 12. A control loop may be provided so that leaning of the subject results in the application of

torque to wheel 20 about axle 22 by means of a motor drive depicted schematically in Fig. 2, as discussed below, thereby causing an acceleration of the transporter. Transporter 10, however, is statically unstable, and, absent operation of the control loop to maintain dynamic stability, transporter 10 will no longer be able to operate in its typical operating orientation. "Stability" as used in this description and in any appended claims refers to the mechanical condition of an operating position with respect to which the system will naturally return if the system is perturbed away from the operating position in any respect.

Different numbers of wheels or other ground-contacting members may advantageously be used in various embodiments of the invention as particularly suited to varying applications. Thus, within the scope of the present invention, the number of ground-contacting members may be any number equal to, or greater than, one. A personal transporter may be said to act as 'balancing' if it is capable of operation on one or more wheels (or other ground-contacting elements) but would be unable to stand stably on the wheels but for operation of a control loop governing operation of the wheels. The wheels, or other ground-contacting elements, that provide contact between such a personal transporter and the ground or other underlying surface, and minimally support the transporter with respect to tipping during routine operation, may be referred to herein as 'primary ground-contacting elements.' A transporter such as transporter 10 may advantageously be used as a mobile work platform or a recreational vehicle such as a golf cart, or as a delivery vehicle.

The term "lean", as used herein, refers to the angle with respect to the local vertical direction of a line that passes through the center of mass of the system and the center of rotation of a ground-contacting element supporting the system above the ground at a given moment. The term "system" refers to all mass caused to move due to motion of the ground-contacting elements with respect to the surface over which the vehicle is moving.

"Stability" as used in this description and in any appended claims refers to the mechanical condition of an operating position with respect to which the system will naturally return if the system is perturbed away from the operating position in any respect.

One mechanism for providing user input for a yaw control system of a personal transporter is described in detail in US Patent Application Serial No. 10/308,850. As described therein and as shown in Figs. 3A-3C, a user mounted on the transporter may provide yaw control input to a yaw controller 502 (shown in Fig. 2) by rotating yaw grip assembly 800, shown in detail in Fig. 3B.

Fig. 2 depicts the differencing, in summer 522, of the current yaw value ψ with respect to the desired yaw value ψ_{desired} to obtain the current yaw error ψ_{err} . Desired yaw value ψ_{desired} is obtained from a user input, various embodiments of which are described herein. The current value ψ of yaw is derived from various state estimates, such as the differential wheel velocities, inertial sensing, etc. Derivation of the yaw command from the yaw error is provided by motor controller 72 according to various processing algorithms described, for example, in US Patent no. 6,288,505, and applied to left and right motors 28 and 30, respectively.

With particular reference to Fig. 3A, one embodiment of user interface 14 has twin hollow stalks 802, one on either side, either of which may serve interchangeably to support yaw grip assembly 800. Thus yaw may advantageously be controlled by a specified hand (right or left), either side of central control shaft 16. Yaw grip assembly 800 comprises a grip 804 which is rotated about an axis 806 coaxial with stalks 802. Spring damper 808 provides an opposing force to rotation of yaw grip 804 and returns yaw grip 804 to the central neutral position. Yaw grip 804 contains at least one magnet 810 (two are shown in Fig. 3B, in accordance with a preferred embodiment), the rotation of which about axis 806 allows the rotational orientation of grip 804 to be sensed by sensor unit 812 (shown in Fig. 3C) which is disposed within protruding stalk 802. Thus, user interface 14 may be sealed at its ends with fixed yaw grips 814 and the integral sealed nature of the user interface is not compromised by the yaw control input. Sensor unit 812 may contain Hall effect sensors which are preferably redundant to ensure fail-safe operation. Other magnetic sensors may also be employed within the scope of the present invention.

Fig. 4 shows a block diagram for the yaw feedback control system, in accordance with one embodiment of the invention. The LateralAccelScale function 42 reduces the effect of the yaw input 40 at higher wheel speeds and at higher centripetal acceleration.

Feedback 44, used to regulate the commanded yaw velocity, contains a yaw position term 45 to maintain yaw position, a velocity squared term 46 that will attempt to regulate the yaw velocity to zero, and a feedforward term 49 used to provide better yaw command response to the user.

5 From Fig. 4, it is apparent that the feedforward term 49 must dominate for rapid maneuvers in order to provide a responsive system. The velocity-squared feedback 46 deviates from linear control theory and has the effect of providing nonlinear yaw velocity damping.

Several alternatives to a twist grip input device for specifying user directional or
10 velocity input are now described.

Body Position Sensing

In accordance with various embodiments of the present invention, a device which detects the body position of the rider is employed to control fore/aft motion or steering of
15 a transporter. For purposes of yaw control, in accordance with various embodiments of the invention, sensors detect whether the hips or shoulders of a rider, shown schematically from above in Fig. 5A, are squarely aligned, or are translated in a lateral direction 51 or else rotated, such that one shoulder is thrust in a forward direction 52 while the opposing shoulder is thrust in a backward direction 53. These schemes can be
20 used independently or to provide directional input.

Any method of sensing of body position to control vehicle yaw or fore/aft motion is within the scope of the present invention and of any appended claims. One embodiment of the invention, described with reference to Fig. 5B, entails mechanical contact with the rider 8. Pads 54 are mounted on yoke 55 and contain pressure transducers that transmit
25 signals to the yaw controller based on changes in sensed position of the hips of the user. Other methods of sensing user position may rely upon optical or ultrasonic detection, an example of which is now described with reference to Figs. 5C and 5D.

In one embodiment, an ultrasonic beacon is worn by the rider, and an array of receivers mounted to the machine detect the position of the rider. Time of flight
30 information is obtained from transmitter to each receiver and used to calculate the lateral position of the user with respect to the center of the machine. To turn the machine to the

right, the user leans to the right, and similarly for turning left. In addition to the intuitive appeal of a mechanism which translates body motion to transporter control, as in the case of fore-aft motion control of a personal transporter of the sort described in US Patent no. 6,302,230, the body-control modality also advantageously positions the user's center of gravity (CG) correctly for high speed turns.

A body lean system described with reference to Figs. 5A and 5B consists of three distinct mechanical components – the transmitter beacon, the receiver array, and the processing electronics. In one embodiment of the invention, an ultrasonic(US)/RF transmitter beacon is worn by the rider, and an array of ultrasonic receivers and an RF receiver is mounted below the handlebars of the transporter, along with interface electronics. Various ultrasonic transmitters/receivers may be employed, such as those supplied by Devantech Ltd. of Norfolk, England. The transmitter beacon is a small piece of Delrin® acetal resin with three ultrasound transmitters, at a typical frequency of 40 kHz, mounted at 90 and ± 45 degrees. This produces a cone of sound of about 160 degrees. The driver electronics are mounted on a printed circuit board buried behind the transmitters, and a small RF transmitter is mounted below. A belt clip from a wireless phone attaches the transmitter to the user, while power is supplied by batteries.

The receiver array is a bar with receivers mounted at various locations. The ultrasound receivers are also mounted in small pieces of Delrin®, with the electronics located behind the bar at each location. To increase the size of the reception cone, 2 US receivers are used at each location, one mounted facing straight out and the other at 45 degrees to that. For the outboard sensors, the 45-degree receiver faced inward and for the inboard receivers, the 45 degree receiver faced outwards. This makes it possible to use the two outboard receivers (left and right) for location when the rider is at the center of the machine, but as the rider moves right, the two right sensors take over, and the same when the rider moves to the left.

An ultrasonic rangefinder, such as a Devantech Model SRF-04, may provide both the transmitter and receiver functions and circuitry, however modifications are within the scope of the present invention. The beacon portion consolidates three drivers onto a single board. In addition, the microcontroller code residing on the transmitter boards allows the board to transmit continuously.

The board designed to interface to the computer was breadboarded with microcontrollers of the same type as the Devantech boards. The function of this board is to create a square wave that represents the time difference of arrival between the RF pulse and the ultrasonic pulse (wave goes high when the RF pulse arrives, and low when the US pulse arrives), and correctly interface this wave to the computer circuitry. Since RF
 5 travels at the speed of light, and sound at the speed of sound, this scheme results in an accurate ultrasonic time of flight (TOF) signal.

With reference to Fig. 5D, the counter timer board residing in the computer chassis receives 4 waveforms representing the 4 TOF's from the transmitter to the 4
 10 receivers, and using a 400KHz clock, determines the duration of each pulse (in counts of the 400khz clock). This info is then passed to the algorithms for distance calculation and additional processing.

When a balancing transporter is traveling at any significant speed, the rider needs to lean into a commanded turn in order to counteract the centripetal accelerations due to
 15 the turn. This machine uses the body location sensors to turn the machine. When the rider is centered on the machine, no turn input is generated. When the rider leans to the left, a left turn is commanded, and the same for the right. Thus the turn is not initiated until the users CG is properly located. In addition, by knowing the users exact CG location (as by positioning the transmitter at the waist of the rider), the system is able to
 20 exactly match the wheel speed/turn rate to the angle the user is at, theoretically exactly canceling out the forces acting on the body. Thus the amount of turn is tuned for the CG location of the rider and wheel speed.

In accordance with the invention, time-of flight (TOF) information from an ultrasonic transmitter is transmitted to at least 2 ultrasonic receivers. Time of flight was
 25 calculated from the difference of a RF received pulse edge to a US received pulse edge. Since the speed of sound is substantially a constant (within the operation of the machine), distance can be calculated from its time of flight from transmitter to receiver. The law of cosines along with the known distances of the receivers from center and from each other is then used to calculate the location of the transmitter in the lateral direction. Because of
 30 the redundant receivers, the lateral location is unique, and immune to changes in height

and fore/aft distance from the bar (unless this change resulted in a loss of line-of sight (LOS)).

Feet Force

5 In accordance with another embodiment of the invention, yaw control input is provided to a transporter by sensing the rider's weight distribution by using force sensors on the foot plate. In order to steer, the rider leans in the direction of desired turn. Lean, right: turn right; lean left: turn left. Many variations can be derived from a base system containing many force sensors located at the foot plate.

10 A PCB board provides all signal conditioning for the force sensors. The sensor signals are output from the PCB board as zero to five volt analog signals. Spare A/D inputs on the amplifiers are used to read in the 8 analog signals and provide an 8-bit count to the software for each sensor.

The primary variation implemented and tested uses sensors on the left and sensors
15 on the right sides of the foot plate. When the person leans to the right, the right sensor signals become large, indicating a turn to the right. When the person leans to the left, the left sensor signals become large, indicating a turn to the left. A special foot plate was constructed to allow force distribution to be measured at four corners of a rigid plate.

The resulting system is advantageously very maneuverable at low speeds and a
20 rider may become more proficient at this yaw input than the twist grip yaw input. There is a tradeoff between the bandwidth of the device that enables the system handle disturbances better, and the perceived responsiveness of the system.

As a natural movement, when turning on a personal transporter, a user tends to shift weight in the direction of the turn. The reason for this is the centripetal force
25 generated by turning tends to push the person off the transporter. The same user movement is required when riding a 3-wheel or a 4-wheel all-terrain-vehicle (ATV). As a result, a natural input to turn that encourages good user position is to turn right when the user shifts their weight to the right. In this configuration, the user is in the ideal position to make a right turn.

30 Skiers and skaters tend to push off with their right foot to turn left. The reason for this is they shift their weight distribution from the right to the left by using their feet. On

a personal transporter in accordance with the present invention, users needs to shift their weight from right to left not using their feet, but using the handlebars for this input device. If the sign were reversed to accommodate the skiers and skaters' preference to lean right and turn left, an unstable system would result. As the user leans right, the transporter turns left, generating a centripetal force that pushes the user more to right,
 5 generating more left turn command.

Referring to Fig. 6A, the force sensing element is located at the end of the flexible ribbon in a circle about the size of a dime. With no force on the sensor, the resistance is around 800 Mohms. With 100 lbs on the sensor, the output is around 200 Mohms. To
 10 condition the signal, op-amps were used to create an active amplifier and an active anti-aliasing filter. The goal of the amplifier is to generate an output that is proportional to the change in resistance. The goal of the filter is to prevent measurements above 50 Hz from being measured. An inverting amplifier is used since it provides an output proportional to the change in resistance. An inverting lowpass filter is used as an anti-aliasing filter and
 15 to change to the voltage back to 0 to 5 volts. A +/- 12Volt supply is used to power the op-amps to remain within the linear safe regions of the op-amps.

The sensors are located under a metal foot-plate, one in each corner, as shown in Fig. 6A. A metal plate on top allows the standard rider-detect buttons to be pressed while providing a hard surface to press against each of the 4 sensors. The metal plate is shown
 20 in Fig. 6B.

The overall yaw command from the sensor measurements to the yaw command delivered to the control system is shown in Fig. 6C.

Since a user often shifts his weight slightly while standing in place, a deadband is added to the sensor processing. As shown in Fig. 6D, deadband 48 provides a region
 25 around zero yaw input where slight yaw inputs result in no yaw command.

To calculate the yaw command from the sensors, the following equation is used:

$$\dot{\psi}_{cmd} = \frac{(\text{right front} + \text{right rear})}{2} - \frac{(\text{left front} + \text{left rear})}{2}$$

where $\dot{\psi}_{cmd}$ is the commanded rate of change in yaw.

Each sensor provides 0 Volts, or 0 counts with no weight on it, and 5 Volts, or 255
 30 counts fully loaded. A deadband of around 40 counts provided smooth enough control

with enough room to feel comfortable. Additionally, filters may be employed to filter the command signal, with passbands typically centered from about 0.5 Hz to about 3 Hz.

When moving in reverse, if the same equations are used to generate the yaw command, the resulting system has positive feedback. When the transporter performs an “S-turn”, in reverse, if the user leans to the right, the transporter will turn to the left and create a centripetal force on the user, pushing the user to the right. To solve this issue, a “C-turn” may be implemented. A ramp function is used to reverse the yaw command when the transporter begins moving in reverse. To keep a consistent turning motion, when turning in place, the ramp only switches the direction of the yaw command when it moves in reverse. Fig. 6E shows the ramp function for switching yaw command in reverse as a function of wheel velocity. The rampRev function is used to modify the yaw velocity command as follows:

$$\dot{\psi}_{cmd} = \dot{\psi}_{cmd} + 2 \cdot \text{rampRevLFP} \cdot \dot{\psi}_{cmd}$$

The rampRev signal is lowpass filtered at 5.0 Hz to smooth the effects of the ramp.

A brake switch, such as brake switch 7 (shown in Fig. 3A) may be connected to turn the yaw command off when it is pressed. When the button is pressed, a yaw command multiplier of 0 is applied, whereas, if it is released, the yaw command multiplier is 1. A 0.5 Hz Low Pass Filter is used to smooth the transitions between on and off.

Handlebar Lean

One of the key properties of a good directional input device is its ability to provide directional input while managing lateral acceleration. High lateral acceleration turns require the user to lean into the turn to keep from falling off or tipping over the transporter. An optimal directional input device will require the user to have their body properly positioned when commanding a directional input. A twist grip yaw input, such as discussed above with reference to Fig. 3, encourages proper body positioning through the orientation of its rotation axis and the design of the knob and handle combination. It is possible, however, to make an uncoordinated input depending on the driver's technique

Another method of encouraging proper body positioning is to make one or more handlebars into a joystick. By pivoting the bar near the base of the machine, the user can move his or her body at high speeds and merely hold onto the handlebar and command an input. When properly tuned, the user's body is already in position to react against the lateral acceleration at the initiation of the turn, reducing the likelihood of an improperly coordinated turn.

In the handlebar lean machine, the yaw input is proportional to the handlebar angle with respect to the chassis. Preferably, the pivot axis is mounted as low as practical on the transporter ground-contacting module in order to allow the bar motion to follow the users body motion naturally, since a person leans most stably by pivoting at the ankles. In other words, a low pivot handlebar tracks the body kinematics. In this embodiment, the yaw input is converted into a yaw command using standard personal transporter algorithms, which apply a fixed gain to yaw input at low speeds, but scale the gain at higher speed to make the yaw input correspond to lateral acceleration instead of yaw rate. This works well with the handlebar lean device, since the desired lean angle is roughly proportional to lateral acceleration. The result is a very natural input method, where the user "thinks" right or left via leaning, and the machine follows.

$$\dot{\psi}_{cmd} = K (\Phi_{HB} - \Phi_{Roll})$$

where K is a constant;

Φ_{HB} is the handlebar angle with respect to the platform;

Φ_{Roll} is the platform lean with respect to gravity

$\dot{\psi}_{cmd}$ is the yaw command.

Other embodiments of the invention may have an inclined or horizontally mounted pivot handlebar. In machines with inclined pivots, the angle of the pivot with respect to the contact patch and surface provided interesting turning dynamics. Specifically, the axis of rotation may affect the dynamics of turning on a slope or on a flat surface. Preferably, the machine has a low horizontal pivot. A horizontal pivot can easily track the kinematics of the body during a turn.

In accordance with yet other embodiment of the invention, with the direction of travel as the reference point, the pivoted handlebar may be either mounted in the front or the rear of the transporter. The configuration of a rear mounted pivot handlebar enables a

user to steer the transporter with other parts of the body such as the knees, in addition to using a limb coupled to the handlebar. Furthermore, the transporter may include a feature that disables the lean steer when a user is mounting or dismounting. The feature may be activated when the transporter determines that a user is partially on/off the platform such
 5 that the transporter may not turn into or away from the user while mounting or dismounting.

Of the various mechanisms suited to provide for handlebar lean, a first is described with reference to Fig. 7A. Motion of handlebar 700 is constrained to a plane that is substantially transverse to the direction of forward motion of personal transporter
 10 10 by means of parallel link bars 702 that are pivotally coupled both to platform 12 and to handlebar 700. Motion of the handlebar may also be biased to a central position and/or damped by means of springs 704 or shock absorbers. In an alternate embodiment shown in Fig. 7B, handlebar 700 may be coupled to platform 12 of the transporter 10 by flexure elements 708, again constraining motion of the handlebar substantially to a plane
 15 transverse to the direction of forward motion and allowing tilting of the handlebar in an arc centered upon a virtual pivot at, or near, the plane of platform 12. In either of the embodiments of Figs. 7A and 7B, one or more sensors 710 detect the position of handlebar 700 or of members 702 coupling the handlebar to the rest of the transporter, either with respect to the vertical or with respect to a direction fixed with respect to the
 20 ground-contacting module. Sensor 710 may be a load cell, for example, disposed along control shaft 16. Furthermore, the springs or shock absorbers coupled to the handlebar may be used to limit the turning rate of the transporter if desired.

Preferably, the motion of the handlebar is not biased to a central position. In embodiments where the handlebar is not biased to a central position, there is no
 25 preloading around the center and thus a user can precisely and accurately steer the transporter.

In accordance with an embodiment depicted in Fig. 7C, two separate handlebar segments 720 and 722 may be moved separately, by leaning of the user 8, relative to platform 12 of the transporter. In the embodiment shown, the position of each handlebar
 30 segment is biased to a specified 'neutral' height within respective sleeves 724 and 726 by

means of springs, or otherwise. A relative height offset is transmitted to the yaw controller to control turning, as described in connection with other user input modalities.

Yet a further embodiment of the invention is depicted in Fig. 7D, where rotation in clockwise and counterclockwise directions 730 and 732 of handlebar 700 relative to support stalk 16 is sensed to generate a signal that transmits a user input to yaw controller 502 (shown in Fig. 2). A shock absorber 734 is preferably built in to the pivotal coupling of handlebar 700 about shaft 16.

A handlebar lean device in accordance with a further embodiment of the invention features a pivot mechanism shown in Fig. 7E. Pivot 70 is adjustable in both spring constant and preload, and has a fixed range of motion of $\pm 15^\circ$. Preferably, the pivot has an unlimited range of motion. The pivot is mounted as low as possible on the ground-contacting module chassis 26, and the handle 16 is mounted to the rotating portion of the mechanism. A pair of shock absorbers 74 may provide additional damping and stiffness. Shock absorbers 74 are mounted slightly off horizontal to maximize their perpendicularity to the control shaft 16 throughout the range of motion.

The shocks are adjustable in both spring constant and damping. The spring constant is adjustable by pressurizing the shock air reservoir. The damping adjustment is made with a knob that varies an orifice size internal to the shock. Shock absorbers 74 are shown in Figure 7F. Internal to the pivot mechanism is a cam and spring loaded follower. The cam compresses the follower springs, which generates the restoring spring force. To change the spring constant, a different cam is substituted in the pivot and some cases the number of Belleville springs is changed. The preload is adjusted externally using a screw, which moves a wedge to position the Belleville spring stack. Various degrees of stiffness may be provided by interchangeable cams.

With the stiffest cam installed and the shock absorbers at ambient pressure, a preload of approximately 8 lbs. results, as measured at the handlebar. Approximately 40 pounds of force are required to deflect the handlebar to its full 15° travel.

One issue that must be addressed in handlebar lean control is the effect of terrain sensitivity. If the machine is driven over obstacles or rough terrain, a roll disturbance is forced on the machine/rider system since the resulting change in position of the user may cause an unintended yaw input is put into the system. Yaw control modalities that depend

upon the overall body lean of a standing person are prone to be more sensitive to terrain than, say, yaw control by means of a twist grip.

To combat this roll sensitivity, a roll compensation algorithm may be employed. In such an algorithm, the yaw input is modified to compensate for the roll angle of the chassis, making the yaw input the angle of the handlebar with respect to gravity. Since it
5 is easier for the user to maintain body position with respect to gravity rather than the platform, this facilitates rejection of roll disturbances.

In accordance with certain embodiments of the invention, a method for reducing terrain sensitivity employs an algorithm for filtering yaw inputs based on the roll rate of the chassis. The instantaneous rate of rolling, referred to as Roll Rate, is readily available
10 from the Pitch State Estimator, such as that described, for example, in US Patent No. 6,332,103, which derives the orientation of the transporter based on one or more gyroscopes, an inclinometer, or combinations of the above. Large roll transients cause the rider to be accelerated and, if the roll transients were to be rigidly coupled, through
15 the rider, to the yaw control mechanism, they would cause unintended yaw input.

There are two distinct parts of the solution: rejecting terrain while riding straight and rejecting terrain while turning; the first is a special case of the second. While disabling yaw during periods of large roll rates would solve the problem for motion in a fixed direction, more input is required in order to decouple roll from steered motion.

An unknown input is an estimate of the "intended" yaw input from the rider, i.e. the intention, say, to ride around in a 20' circle. While this information is not directly available, it can be usefully inferred from the history of the yaw input. Simply low-pass filtering the data provides an estimate of yaw input. However, this causes a response delay that is noticeable to the rider. On the other hand, if low-pass filtered data are used
20 only when high roll rates are present, the rider is less likely to notice the delay. The algorithm, then, in accordance with a preferred embodiment of the invention, employs a mixer, controlled by roll rate, between direct yaw input and a heavily filtered version.

A transfer function models the amount of roll rate that will couple into the yaw signal. It is a function of various factors, including the design of the yaw input, the rider's ability, and how the rider is holding on to the yaw input. By using this mixing
30 method, the transfer function can largely be ignored or at most minimized through tuning.

The four main tuning points are: How fast the mixer slews to the filtered version, how fast the mixer slews back, what threshold the mix starts and ends, and the corner frequency of the low pass filter (LPF) on yaw input. There are limits to the amount of un-commanded yaw that can be removed due to setting the mix threshold. By setting it high
 5 there is more un-commanded yaw, by setting it low there are more false trips and the rider will begin to notice the time lag on the yaw signal. Setting the LPF frequency also has tradeoffs. If yaw is too heavily filtered, then there will be a noticeable delay and a possibility of yaw transients coupling in from the past. Setting it too low reduces the ability of the mixer to remove the transients.

10 Referring now to Fig. 7G, the mixer block is defined as:

$$\text{yaw command} = F * \text{Yaw Input} + (1-F) * \text{Yaw Filtered} ,$$

where F is the mixer function which is a continuously varying signal between 0.0 and 1.0.

In accordance with various further embodiments of the invention, unintended yaw control is reduced while reacting against the shaft to reposition the body of the rider. The
 15 center of rotation at the handlebar may be repositioned, allowing the user to pull laterally on the bar without causing any displacement. In another embodiment, shown in Fig. 7H, shaft 16 is free to move in two coupled degrees of freedom. The user is able lock the bar by limiting one DOF by engaging gears 78 when they are needed to react against the bar. A yaw command may be comprised of an admixture, linear or otherwise, of inputs
 20 derived from torque of shaft 16 about its axis and from motion of shaft 16 with respect to the vertical direction.

Alternatively, a force or torque input may be used. A lateral force load cell allows the user to torque the bar in order to reposition it. Likewise, a torque sensitive bar may be provided to allow the user to pull laterally on the bar.

25 Another issue that must be addressed in handlebar lean control is the effect of turning while moving backwards or in reverse. As described *supra*, the system may deal with lean turning while moving backward, by switching the direction of the yaw command, to perform a "S-turn" or a "C-turn". Preferably, the system performs a "S-Turn". The system may further compensate for the dynamics of turning while moving
 30 backward by desensitizing the lean steering movement. Desensitizing the lean steering

while reversing can advantageously facilitate using the same equations to generate the yaw command, the resulting system has positive feedback.

Any of these foregoing embodiments may be combined, within the scope of the present invention, with a rotary yaw control input device such as that depicted in Figs.

- 5 3A-3C. In this arrangement the rotary control is used for low speed yaw, and the lean device would be used to command lateral acceleration at higher speeds.

Active Handlebar

- In accordance with further embodiments of the invention, an active handlebar system provides for active control of the handlebar angle with respect to the chassis. The handlebar is mounted on a powered pivot. The handlebar is positioned with respect to the chassis based on lateral acceleration and roll angle of the chassis. If the user maintains good coupling with the handlebar, the bar provides assistance in positioning their body to improve lateral stability. A skilled user leans automatically with the bar, exerting almost
- 10 no lateral force. If an unexpected obstacle or turn is made, however, the active bar can provide assistance to even the most experienced operator. This system is also particularly useful on slopes, both while traversing and during turning maneuvers.

- In order to keep the user most stable, the bar should be positioned parallel the resultant vector of lateral acceleration and gravity. In the system described here, lateral acceleration was determined only using the wheel velocities, without taking advantage of
- 20 any other available state estimator information. Lateral acceleration is given by the equation:

$$a_{lat} = \omega v \quad ,$$

- where ω is the yaw rate and v is the velocity of the transporter. ω is based on the difference in wheel velocities (V_l and V_r) and the wheel track, T .
- 25

$$\omega = \frac{V_l - V_r}{T}$$

v is determined by the average wheel velocity:

$$v = \frac{V_l + V_r}{2} \quad .$$

Combining these equations gives:

$$a_{lat} = \frac{V_l - V_r}{T} \cdot \frac{V_l + V_r}{2} = \frac{V_l^2 - V_r^2}{2T}$$

Since $\tan(a_{lat}) \approx a_{lat}$ for small angles, the bar position from vertical is proportional
 5 to the difference in the square of each wheel speed. This position must be compensated
 by adding the roll angle of the chassis, which results in a handlebar position based on the
 vector sum of lateral acceleration and the acceleration due to gravity.

The operation of the active handlebar is further described as follows. The user
 commands yaw, such as with the rotary yaw input shown in Figs. 3A-3C. The user may
 10 allow the active bar to assist in the user's positioning by rigidly coupling to the handlebar
 with his arms, or he can maintain a softer coupling and use the active bar to provide him
 with feedback. In another embodiment, the user preferably commands yaw with the lean
 of the handlebar as shown in Figs. 8A-8C. Figures 8A-8C show the handlebar response
 to roll and turning events. Note, in Fig. 8C, the alignment of the handlebar with the
 15 user's legs.

Figs. 9A and 9B show the basic mechanical hardware layout of a powered pivot.
 The powered pivot is made up of a harmonic drive reduction unit 92 powered by an
 electric motor 90. The output of the drive is coupled to the control shaft via an adapter
 94. The powered pivot creates a torque between the chassis 12 and the control shaft 16
 20 (shown in Fig. 8A), which can be regulated to provide the position control required by the
 active handlebar system. A harmonic drive is a very compact high reduction ratio gear
 set that is efficient and backdriveable. It works by using an elliptical bearing, called the
 "wave generator", to "walk" a slightly smaller flexible gear 96, called the "flex spline"
 around the inside of a larger rigid gear, called the "circular spline". Suitable harmonic
 25 drives are available from HD Systems, Inc. of Hauppauge, NY and are described in the
 appended pages.

The active handlebar system uses standard algorithms to control the wheels. The
 handlebar is controlled with a position loop that commands a position proportional to the
 difference in the square of the wheel velocities. Although a theoretical gain can be

calculated and converted to the proper fixed point units, in practice it was determined empirically.

The position loop is a standard PID loop using motor encoder data for feedback. The tuning objectives are good ramp tracking, minimum settling time, and minimum
 5 overshoot. The loop was tuned using a modified triangle wave.

The handlebar controller used the position at startup as the zero (center) position. The user had to position the bar and hold it centered at startup. Absolute position feedback may be provided to allow the bar to self-center.

Some filtering and dead banding are done to the command before commanding
 10 the motor. In a specific embodiment, the filtering was ultimately needed to smooth out any noise on the wheel speeds and dead banding was used to keep the bar still when turning in place on slightly inclined terrains. A 1Hz first order filtered estimate of lateral acceleration is multiplied by a first gain (typically, on the order of 0.001) and roll compensated by adding roll angle multiplied by a second gain (typically, on the order of
 15 0.15). Afterwards a software induced dead band, and later compensation, of 15% of the max motor position command (typically, 400 counts.) The final result is filtered by a .2Hz filter. This filter may be used to round out the knee introduced at the dead band and to slow down the movement of the handlebar.

20 Further Mechanical Sensing of Body Position

In accordance with other embodiments of the invention, the position of the rider's body, or of one or more parts thereof, may be sensed mechanically as a means to command yaw or fore/aft motion of a personal transporter. One such embodiment has been described with reference to Fig. 5B. In accordance with another such embodiment,
 25 described with reference to Fig. 10A, body sensing is accomplished by a device 910 that tracks the motion of the right knee through a pivot 912 in line with the ankle. Pivot 912 is instrumented with a potentiometer 914, with potentiometer gains adjusted appropriately to the range of motion of the knee. A controller distinguishes between rider motion intended as account for input anomalies caused by terrain. The rider commands a yaw
 30 input by shifting his body in the direction he would like to turn, as an experienced rider of a personal transporter would do, shifting his center of gravity towards the inside of the

turn to prevent the centripetal acceleration of the powerbase from pulling his feet from under him.

The yaw input device tracks body position by recording the motion of the right knee as it rotates about a longitudinal axis through the right ankle. The rider interacts
 5 with the device through a cuff 910 which fits closely around the upper shin just below the knee. The cuff is height-adjustable and padded to allow a snug fit without discomfort. The cuff is attached via an arm to a pivot ahead of the foot, located such that its axis runs longitudinally in relation to the chassis, and in line with the ankle. (Anthropometric data from Dreyfuss Associates' The Measure of Man and Woman suggested the ankle pivot
 10 should be approximately 4" from the baseplate for an average rider wearing shoes). A potentiometer records the angle of the arm in a manner very similar to the twist-grip yaw input device described above with reference to Figs. 3A-3C.

A mechanical body position yaw input device incorporates a centering mechanism that is described with reference to Fig. 10B. A centering mechanism 920 returns the
 15 device to neutral (no yaw input) position when the rider is not in contact with the mechanism, and provides tactile feedback to the user as to the location of the neutral position. Preload (adjustable by adding or subtracting washers) was set such that the rider needed to exert a force of 1kg to move the device from center. At maximum travel (25° in either direction) the rider experiences a force of approximately 2kg.

20 In addition to the pivot axis on which the potentiometer is located, there is another non-encoded axis at ankle height, perpendicular to the first, which allows the cuff to move with the knee as the rider bends knees and ankles during active riding. A torsion spring acts about this non-encoded axis to keep the cuff pressed firmly against the rider. The spring is not preloaded and generates approximately 20 kg/mm per degree, such that
 25 the rider experiences a force of 1.5 kg at his knee in a typical riding posture (25° forward of unloaded position) and 3kg at full forward travel (50°). At full forward position there is a stop which allows the rider to command pitch torque to the chassis through forward knee pressure.

Due to variations in the underlying terrain, there are situations in which the rider's
 30 body position does not necessarily correlate to intended yaw input. One situation is

traversing a sideslope, during which time the rider will need to lean uphill to stay balanced. Another situation is striking an obstacle with one wheel, which may cause the machine to roll sharply while the rider stays upright. During both of these situations the potentiometer will record that the body position has moved relative to the machine, which
 5 is normally interpreted as a yaw command. While terrain-induced body position presents a challenge to a system which translates body position into yaw, steps can be taken to mitigate these situations. A system discussed below addresses the terrain-induced yaw inputs described above with separate algorithms for side slopes and sudden wheel impacts.

10 On machines with yaw inputs derived from body position it is necessary to compensate for the difference in roll angle to the bodies' natural tendency to line up with gravity. The only exception to this is the case where there is a sufficient restoring force on the yaw input to overcome the rider's natural tendency to keep the yaw input in-line with their body.

15 In order to roll compensate the yaw input a calculation needs to be made. This calculation entails measuring the amount of roll angle that couples into the yaw input. The following function is used to calculate a roll compensated yaw input:

$$\begin{aligned} &\text{roll compensated yaw input} = \\ 20 \quad &\text{yaw input} - (\text{Gain_RollContributionToYawInput} * \text{roll}) \end{aligned}$$

For example: $\text{Gain_RollContributionToYawInput} = (1.44/1.0)$, where 1 count of roll gives 1.44 counts of yaw.

In accordance with another embodiment of the invention, the rider may hit a
 25 button which resets their current knee position as neutral. Although there is no measurable backlash in the centering device, the mechanism can flex before overcoming the centering device preload. This translates to about 1° of knee motion in either direction which does not command a yaw. This can be reduced by increasing the stiffness of the structure relative to the preload. A loose fit between the knee cuff and the
 30 knee adds an additional 1-2° of motion that does not produce a signal. Additionally, the potentiometer may exhibit hysteresis, which may be compensated by addition of a

software dead band. Dead band has the advantage of allowing the rider a small amount of motion, which reduces fatigue. However, precision and slalom performance is compromised by dead band. User-adjustable or speed-sensitive deadband may also be embodied.

5 Asymmetrical gains may be useful to compensate for the asymmetry inherent in measuring the motion of one of two legs. Since body position determines yaw input, appropriate mapping of rider position to lateral acceleration at speed is more significant in this device than in a hand-steered device.

In accordance with another embodiment of the invention, described with reference
10 to Fig. 10C, two steel “whiskers” 930 (approximately 50 cm long and 35 cm apart), are provided at approximately hip height. Leaning left or right pushes on the whiskers and twist the potentiometer (gains are doubled in software). The length of the whiskers is preferred so that the rider, in the course of leaning backwards and forwards, does not exit the device and lose yaw input capability.

15 Another embodiment of the invention, discussed with reference to Fig. 10D, employs two body torso position sensors 940 with handgrips 942 bolted to either side of the chassis. Smooth planks 944 (approximately 60 cm long and adjustably spaced), are attached to a leaning shaft on either side of the rider’s ribcage to sense body position above the waist so as to account for body lean accomplished by bending at the waist. A
20 longitudinal axis of rotation advantageously eliminates lean-sensitive gains that might be present in other designs.

Linear Slide Directional Input

The “linear slide” directional input device is a shear force sensitive means of
25 steering a personal transporter. The device has a platform that can slide in the lateral direction of the machine, directly in line with lateral accelerations seen during turning.

During a turn the user feels a lateral acceleration in the vehicle frame of reference. The lateral acceleration causes a shear force between the user and the vehicle, which is reacted through the footplate and the handlebar. Because the user has two points to react
30 this force, one can be used as a directional input driven through the other. In this implementation the user reacts on the handlebar. The linear slide mechanism measures

this reaction through displacement of the platform, and uses it as a directional command. This input method is directly coupled to lateral acceleration, with the user modulating the coupling by reacting off the handlebar. At zero lateral acceleration, the user can create a directional input by pushing laterally on the handlebar. At non-zero acceleration, the

5 user's handlebar force adds to the lateral acceleration force to create the input.

The linear slide mechanism was designed to sit on top of the chassis of a personal transporter, replacing the foot mat assembly. It is marginally smaller than the existing foot plate area to allow for plate displacement. The platform wraps around the control shaft base. The maximum platform travel is approx +/- 1 inch. The footplate mechanism

10 950 is shown in Fig. 11.

The assembly is clamped to the platform of a human transporter with four blocks that capture the base plate of the slide. The blocks allow the assembly to move vertically in order to activate the rider detect switches. Because the weight of the assembly alone is sufficient to activate the switches, it is counterbalanced with two ball plungers. These

15 insure that the rider detect switches only activate when a rider is on the transporter.

The upper platform rides on 1/2 inch linear ball bearings which, in turn, ride on a ground rod mounted to the lower platform. A spring and stop arrangement provides preloaded centering force.

A linear potentiometer converts the platform position to an analog voltage, which

20 is input to the user interface circuit board in place of the potentiometer employed in conjunction with the twist grip embodiment described above with reference to Fig. 3.

Algorithms for operation of the linear slide yaw input are essentially those of the twist grip yaw input, as described in detail in US Patent No. 6,789,640, albeit with an opposite yaw gain polarity.

25 Several embodiments of the invention are related to the device just described. In accordance with one embodiment, individual pivoting footplates are shear sensitive and pivot at a point above the surface of the plate, preferably 4 to 6 inches above the surface. This allows some lateral acceleration coupling, but give the user the ability to stabilize the coupling through leg or ankle rotation.

30 Alternatively, the linear slide may be moved to the handlebar. This allows a user to use his legs for reacting to lateral accelerations without commanding input. However,

since most of the lateral acceleration is reacted in the legs, coupling with lateral acceleration is largely lost by moving the linear slide to the handlebar.

The described embodiments of the invention are intended to be merely exemplary and numerous variations and modifications will be apparent to those skilled in the art. In
5 particular, many of the controllers and methods of direction and speed control described herein may be applied advantageously to personal transporters that are not balancing personal transporters. Balancing transporters present particular requirements for combining yaw and balance controls, as discussed in the foregoing description and in US Patent No. 6,789,640. All such variations and modifications are intended to be within the
10 scope of the present invention as defined in any appended claims.

CLAIMS:

1. A vehicle for carrying a user, the vehicle comprising:
a ground-contacting module, the ground-contacting module including a platform, two laterally disposed wheels, and a motorized drive arrangement imparting a torque to the two laterally disposed wheels, the ground-contacting module being unstable with respect to tipping when the motorized drive arrangement is not powered;
a plurality of sensors, the plurality of sensors including a sensor arrangement detecting a weight distribution on the platform; and
a controller maintaining the vehicle in an automatically balanced state, the controller maintaining a plurality of control modes including at least a first mode specifying if the vehicle is transporting the user, the controller determining the torque to be applied to the two laterally disposed wheels to maintain the transporting of the user in a desired direction when the vehicle is in the first mode, the torque depending at least in part on data from the weight distribution.
2. The vehicle of claim 1, wherein at least one of the sensor arrangement comprises an inertial sensor.
3. The vehicle of claim 1, wherein the vehicle further comprises a battery supplying power to at least the motorized drive arrangement and controller.
4. The vehicle of claim 1, wherein the plurality of sensors comprises at least one load sensor sensing the presence of the user on the platform.
5. The vehicle of claim 4, wherein the at least one load sensor comprises a foot activated switch.

6. The vehicle of claim 4, wherein the controller transitions the vehicle into an alternate mode of the plurality of control modes based at least in part on data from the at least one load sensor indicating an absence of the user on the platform.
7. The vehicle of claim 6, wherein the controller, when in the alternate mode, determines the torque to be applied to the two laterally disposed wheels to maintain the vehicle balanced in place, the controller automatically applying the torque if the vehicle is in the alternate mode.
8. The vehicle of claim 1 further comprising a seat disposed upon the vehicle, the seat being electronically coupled with the sensor arrangement.
9. The vehicle of claim 1, wherein the plurality of sensors comprises at least one sensor sensing a tilt of at least a portion of the platform.
10. The vehicle of claim 1, wherein the plurality of sensors comprises at least one sensor sensing a turning command input signal to the vehicle, the controller determining the torque required to move the vehicle, the torque based at least in part on the turning command input signal and a pitch sensed by at least one of the plurality of sensors.
11. A battery powered vehicle for carrying a user, the vehicle comprising:
 - a ground-contacting module, the ground-contacting module including a platform supporting the user, two laterally disposed wheels, and a motorized drive arrangement imparting a torque to the two laterally disposed wheels, the ground-contacting module being unstable with respect to tipping;
 - a plurality of sensors including
 - at least one sensor arrangement detecting a differential pressure exerted on the platform by the user;
 - at least one pitch sensor sensing the pitch of at least a portion of the vehicle;

at least one load sensor sensing the presence of the user on the platform;
at least one steering input sensor sensing a desired steering input signal of the vehicle; and
at least one inertial sensor; and
a controller automatically maintaining the vehicle in a balanced state, the controller maintaining a plurality of control modes, the control modes including at least a transporting mode specifying if the vehicle is transporting the user in a desired direction, the controller executing, when in the transporting mode, a control loop coupled to the motorized drive arrangement, the control loop determining the torque, the torque depending at least in part on the pitch, the differential pressure, and the desired steering input signal,
wherein the controller transitions the vehicle into a kickstand mode if the at least one load sensor senses an absence of the user on the platform, the control loop determining the torque to maintain the vehicle balanced in place when the vehicle is in the kickstand mode.

12. A method for transporting a user by a vehicle, the vehicle including a ground-contacting module including a platform, two laterally disposed wheels, a motorized drive arrangement, a plurality of sensors, and a controller in electronic communications with the plurality of sensors and the motorized drive arrangement, the ground-contacting module being unstable with respect to tipping when the motorized drive arrangement is not powered, the method comprising:

receiving, by the plurality of sensors, a weight distribution on the platform;
maintaining, by the controller, a plurality of control modes including a first mode specifying if the vehicle is transporting the user;
determining, by the controller, a torque to be applied to the two laterally disposed wheels by the motorized drive arrangement, the torque being applied when the vehicle is in the first mode, the torque maintaining the vehicle moving in a desired direction and in a balanced state, the torque based at least in part on the weight distribution; and

automatically commanding, by the controller, the motorized drive arrangement to supply the torque.

13. The method of claim 12, wherein at least one of the plurality of sensors comprises an inertial sensor.

14. The method of claim 12 further comprising:
receiving, by at least the controller and the motorized drive arrangement, power from a battery.

15. The method of claim 12 further comprising:
detecting, by the plurality of sensors, a no weight condition on the platform.

16. The method of claim 12 further comprising:
detecting, by the plurality of sensors, a no weight condition on the platform;
determining, by the controller, the torque to maintain the vehicle balanced in place when the no weight condition exists on the platform; and
commanding, by the controller, the motorized drive arrangement to supply the torque.

17. The method of claim 12 further comprising:
detecting, by the plurality of sensors, tilt of a seat disposed upon the vehicle.

18. The method of claim 12 further comprising:
sensing, by the plurality of sensors, a desired turning command input signal specifying a desired direction of travel;
determining, by the controller, the torque to maintain the desired direction of travel, the torque based at least in part on the desired turning command input signal and a pitch sensed by at least one of the plurality of sensors; and

commanding, by the controller, the motorized drive arrangement to supply the torque.

1/21

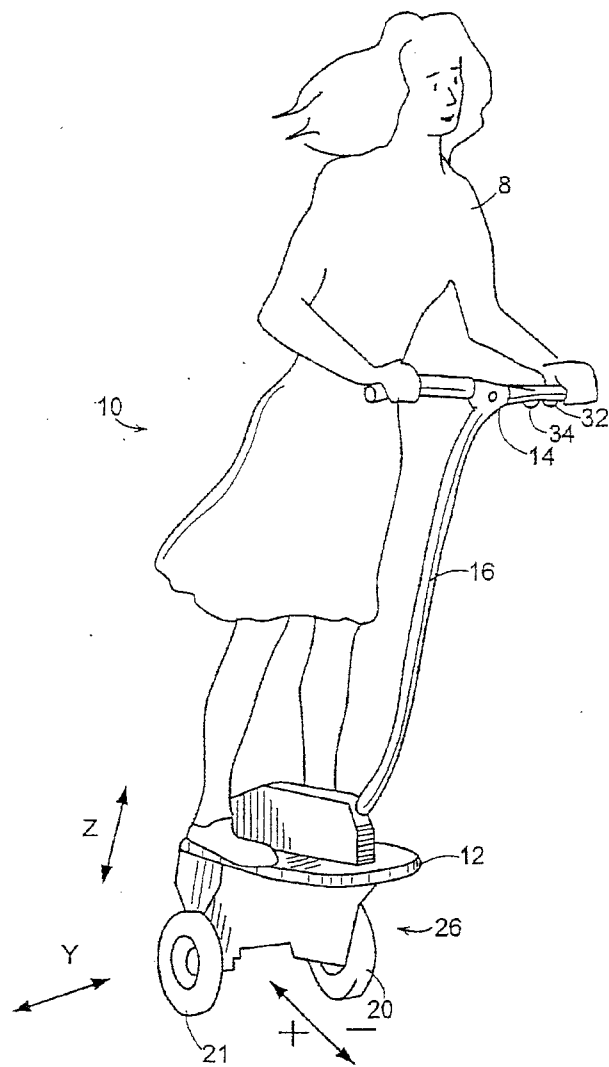


FIG. 1

2/21

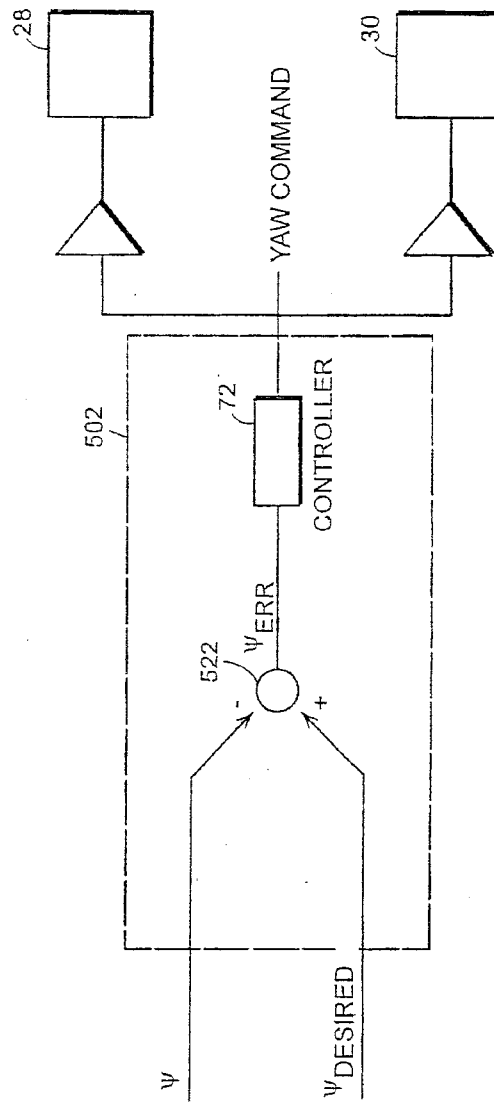
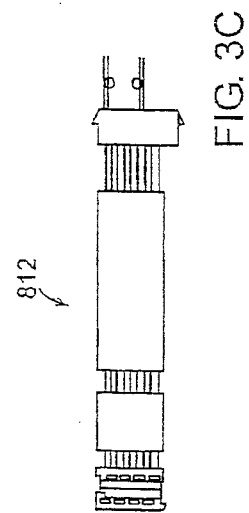
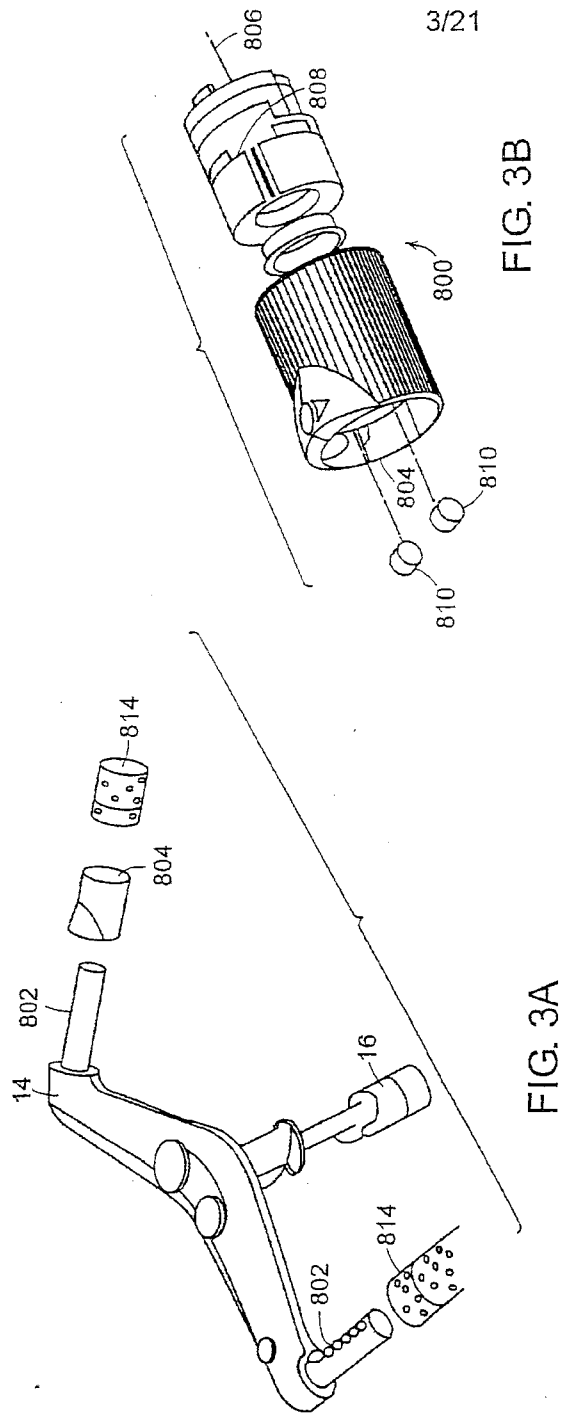


FIG. 2



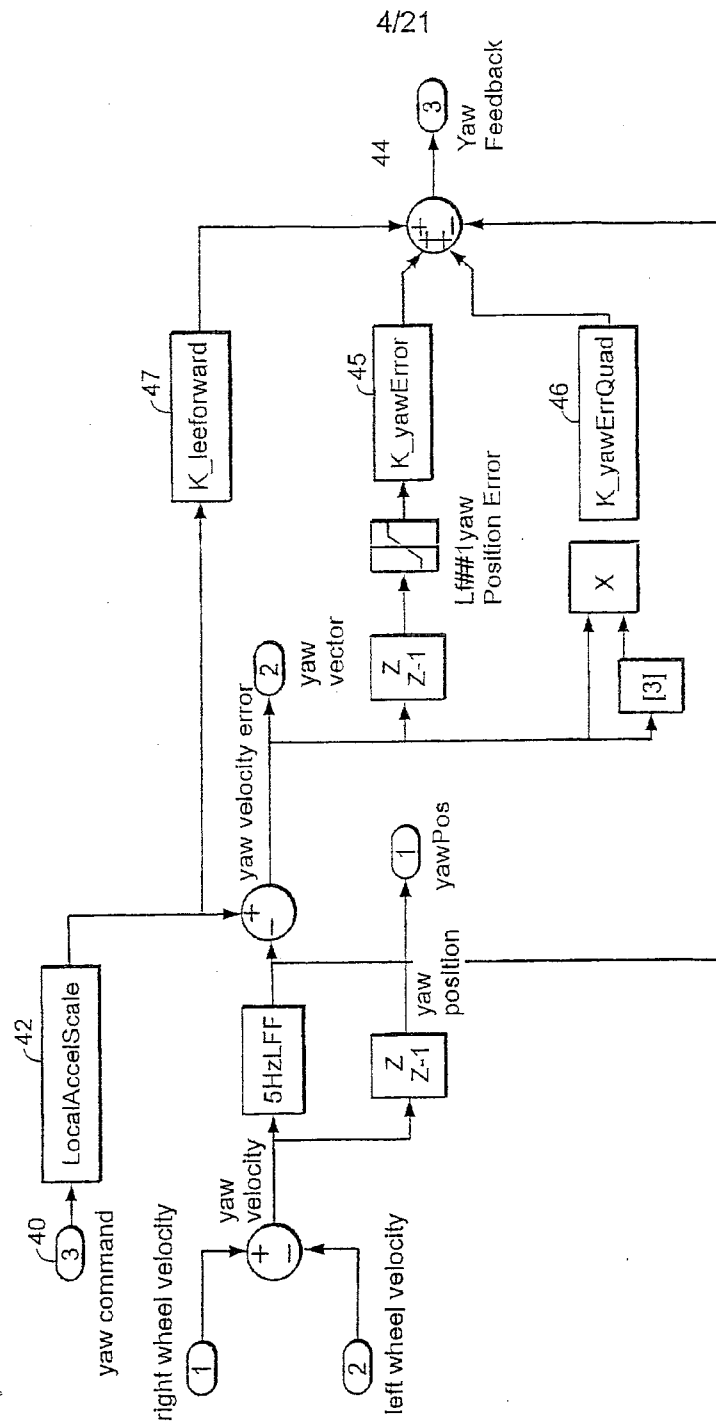


FIG. 4

5/21

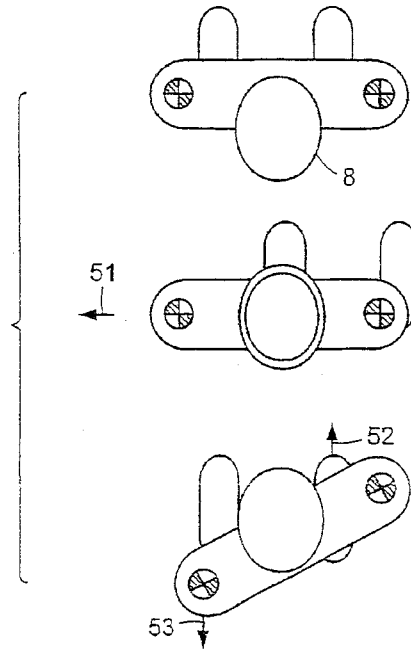


FIG. 5A

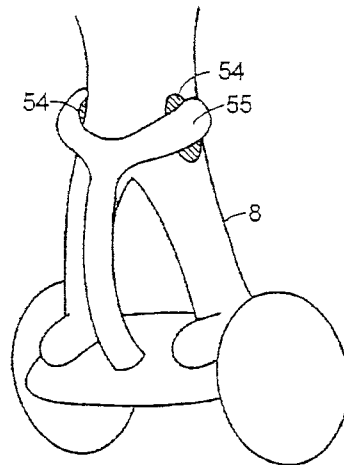


FIG. 5B

6/21

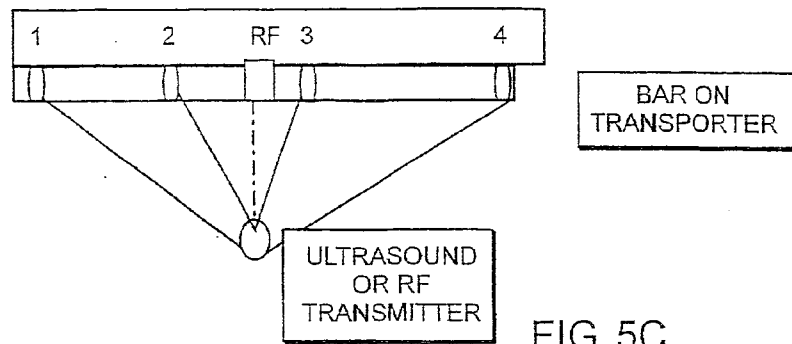


FIG. 5C

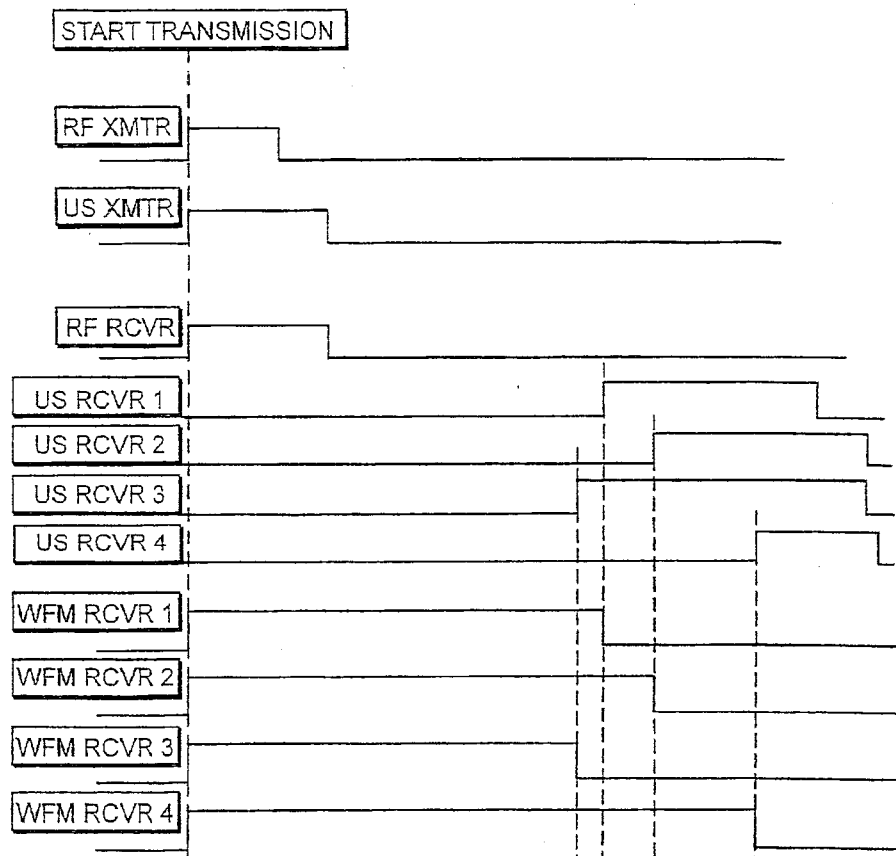


FIG. 5D

7/21

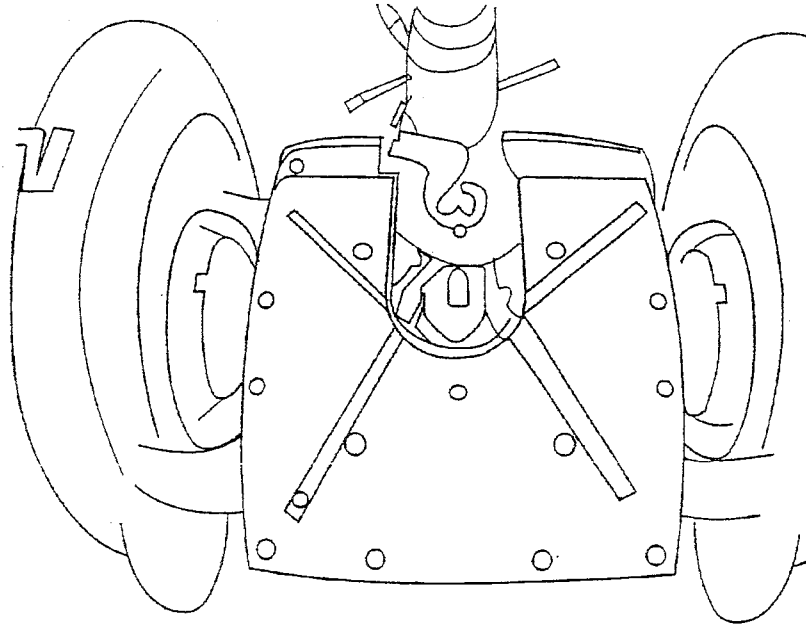


FIG. 6A

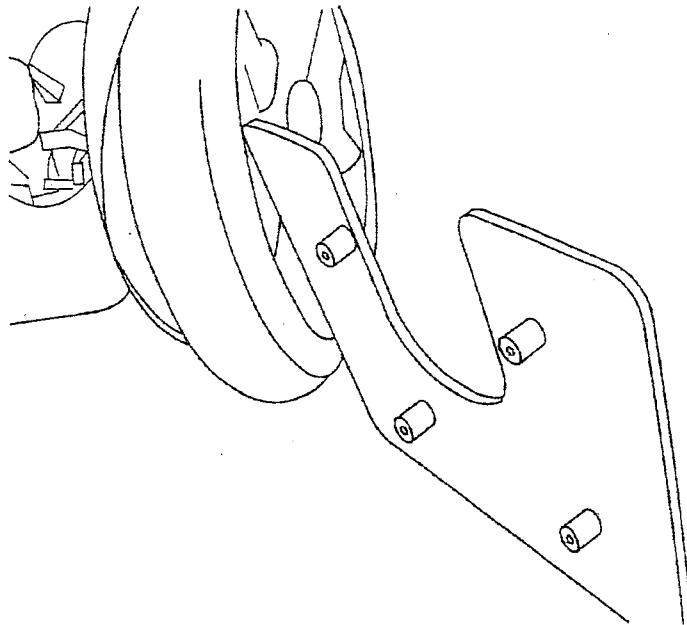


FIG. 6B

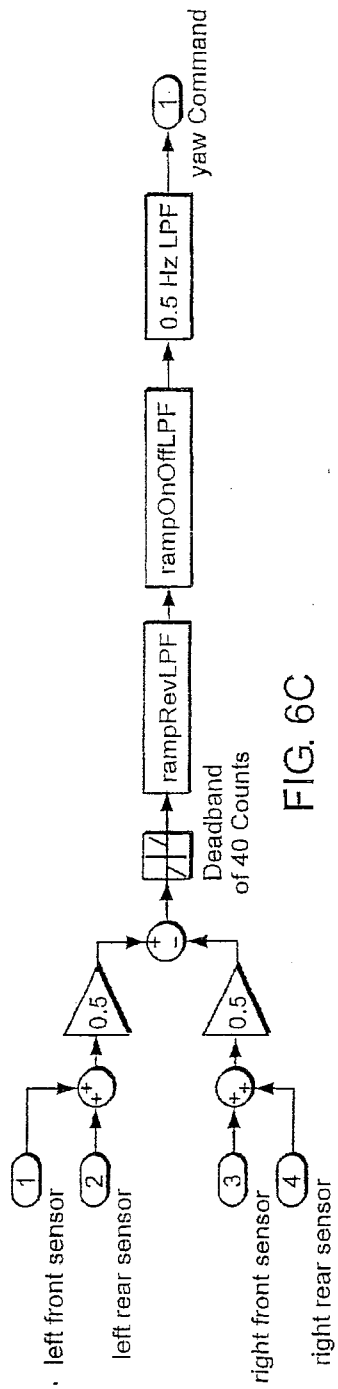


FIG. 6C

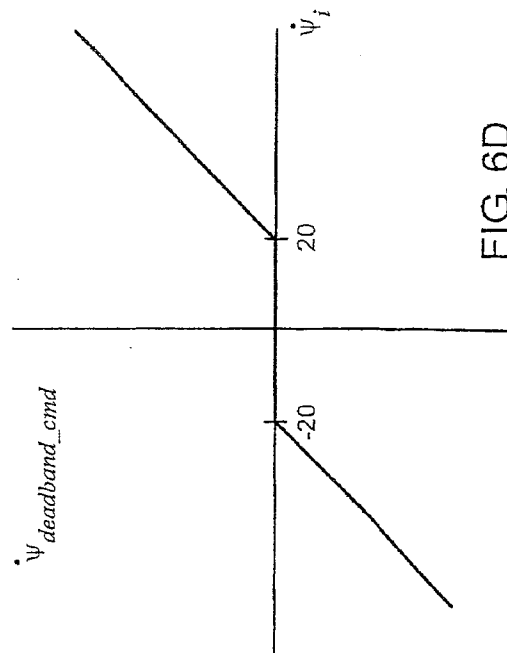


FIG. 6D

8/21

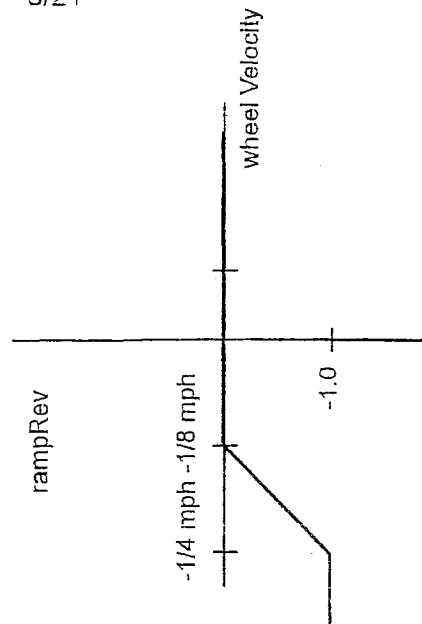


FIG. 6E

9/21

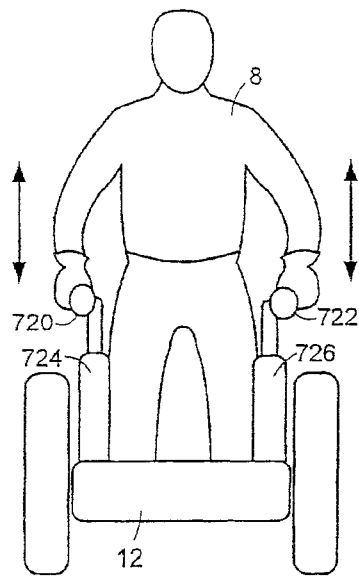
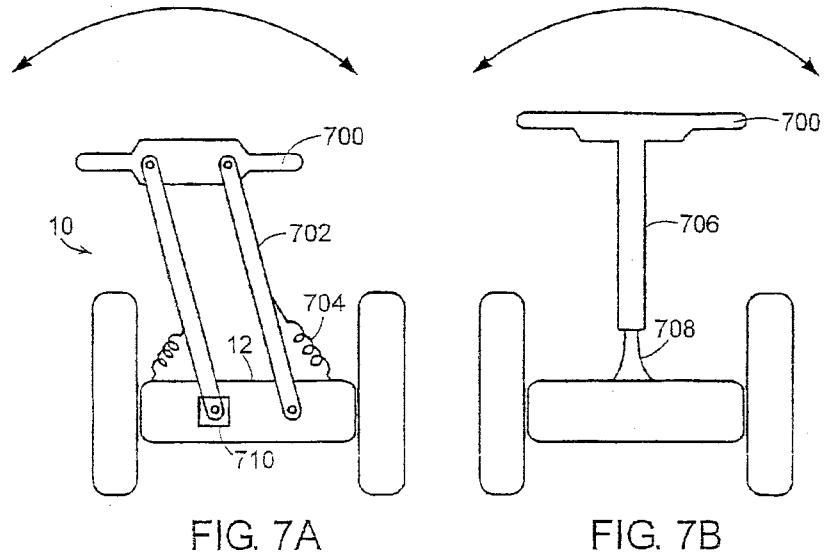


FIG. 7C

10/21

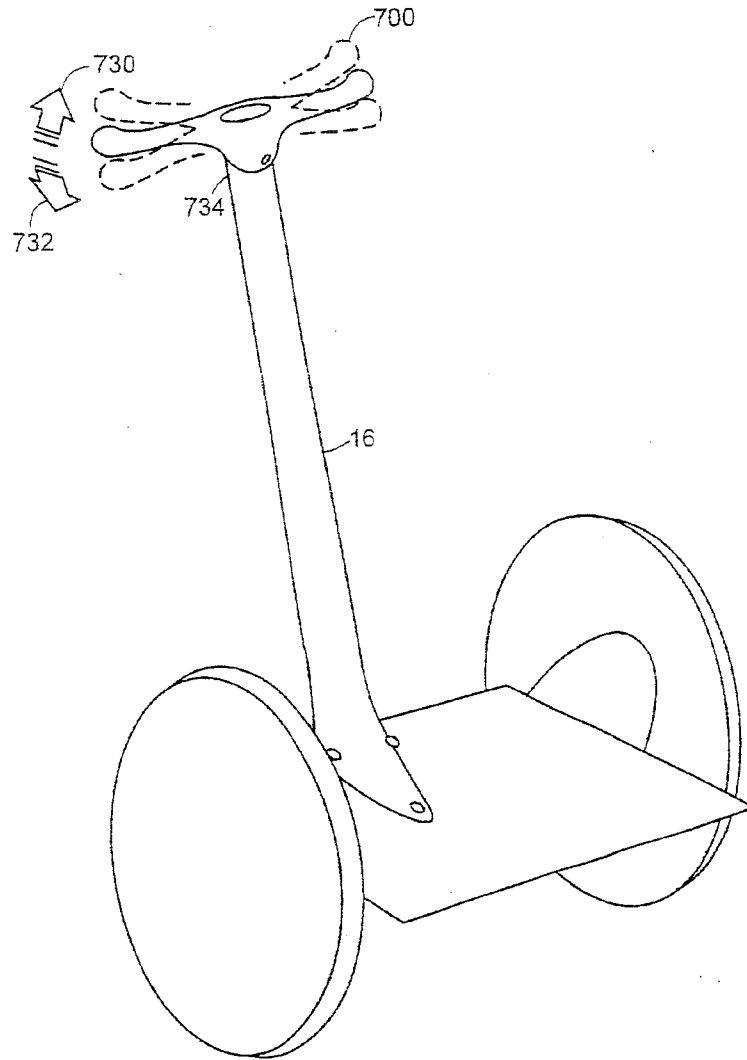


FIG. 7D

11/21

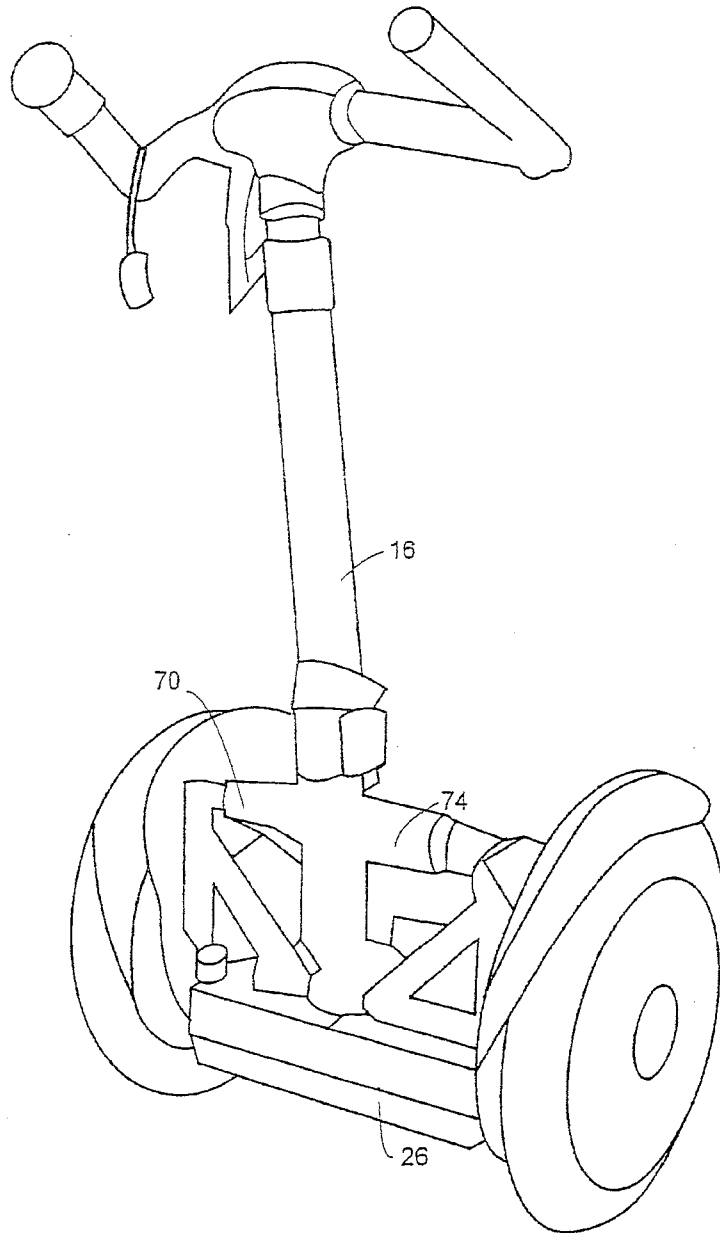


FIG. 7E

12/21

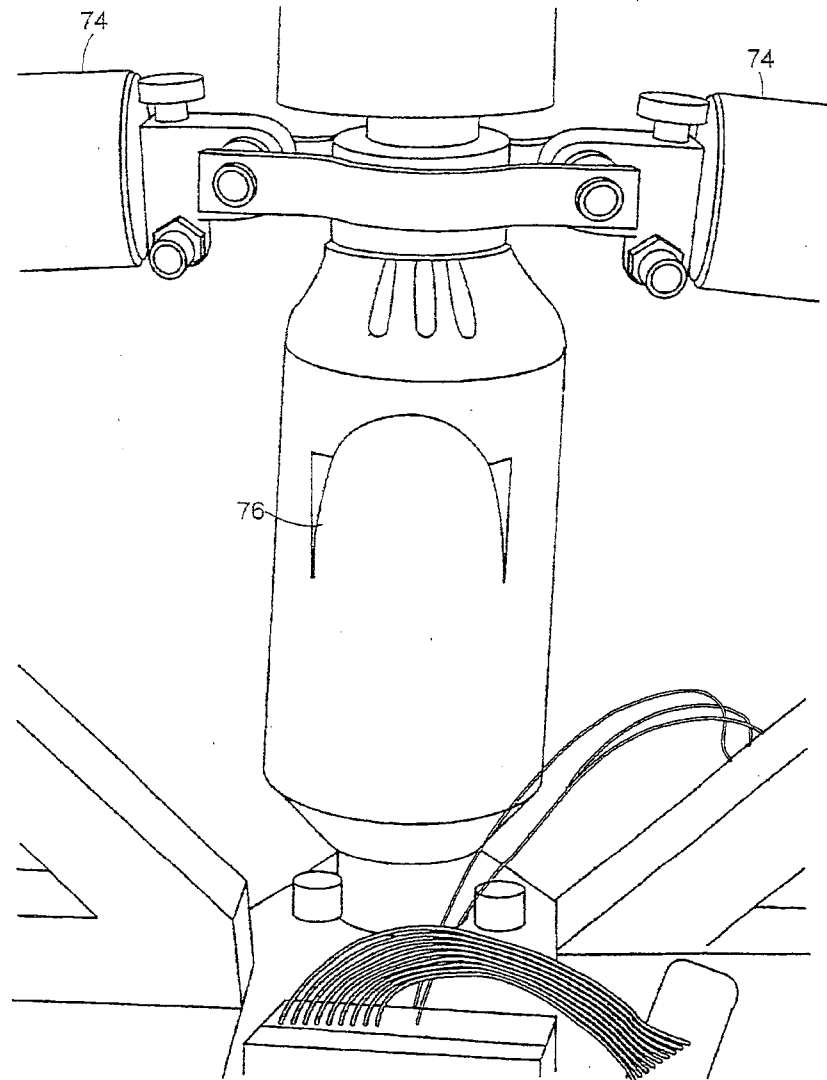


FIG. 7F

13/21

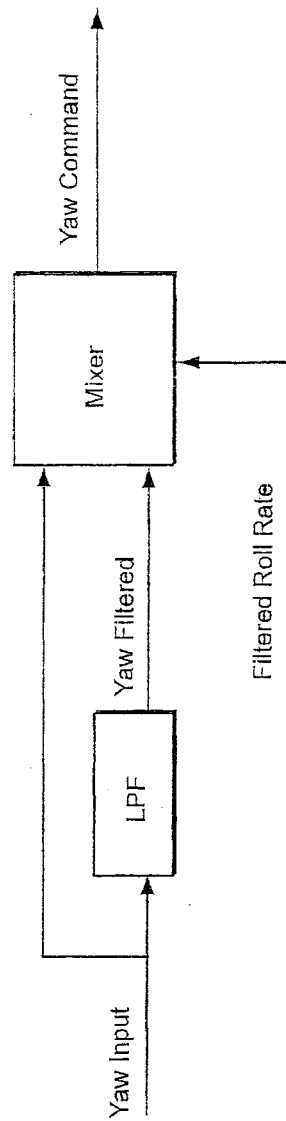


FIG. 7G

14/21

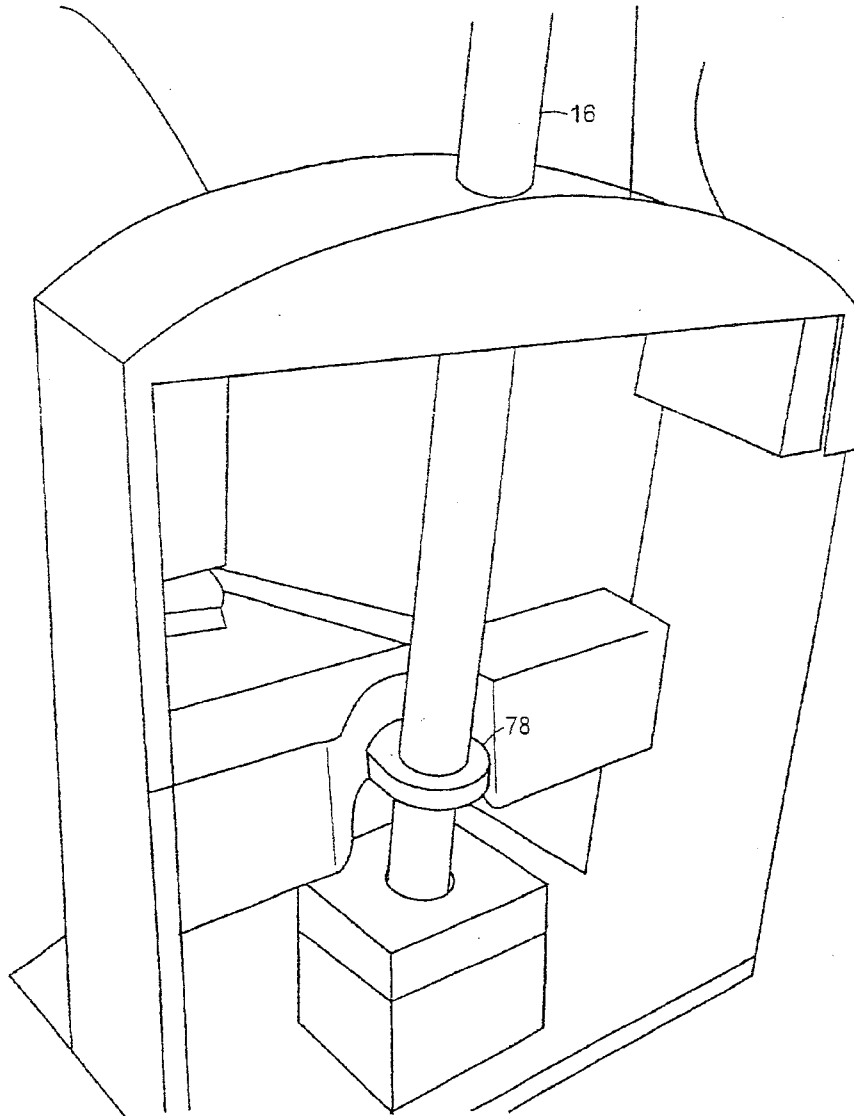


FIG. 7H

15/21

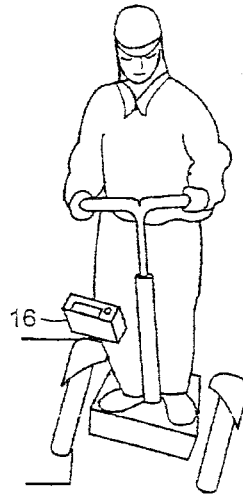


FIG. 8A

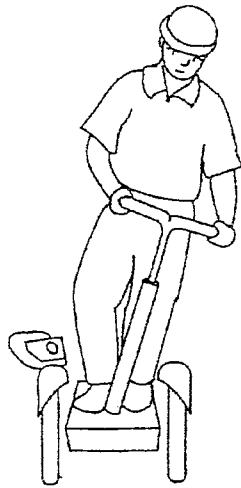


FIG. 8B



FIG. 8C

16/21




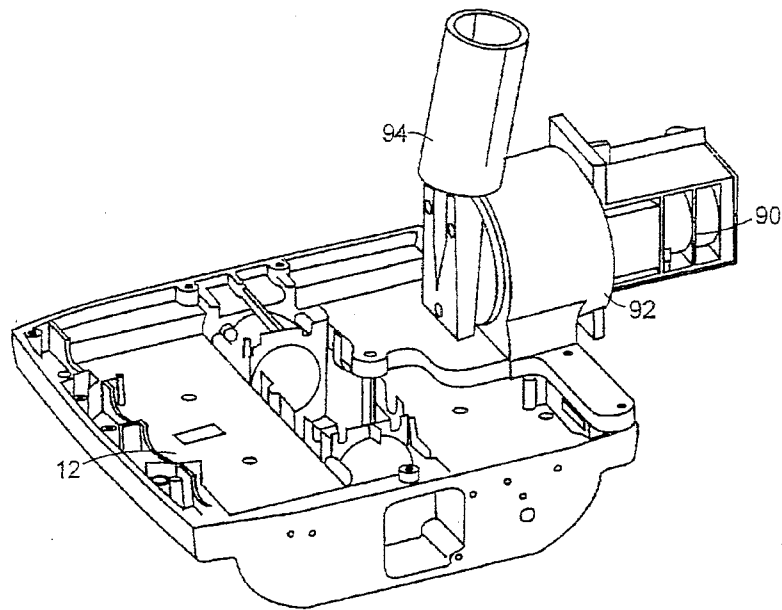


FIG. 9A

17/21

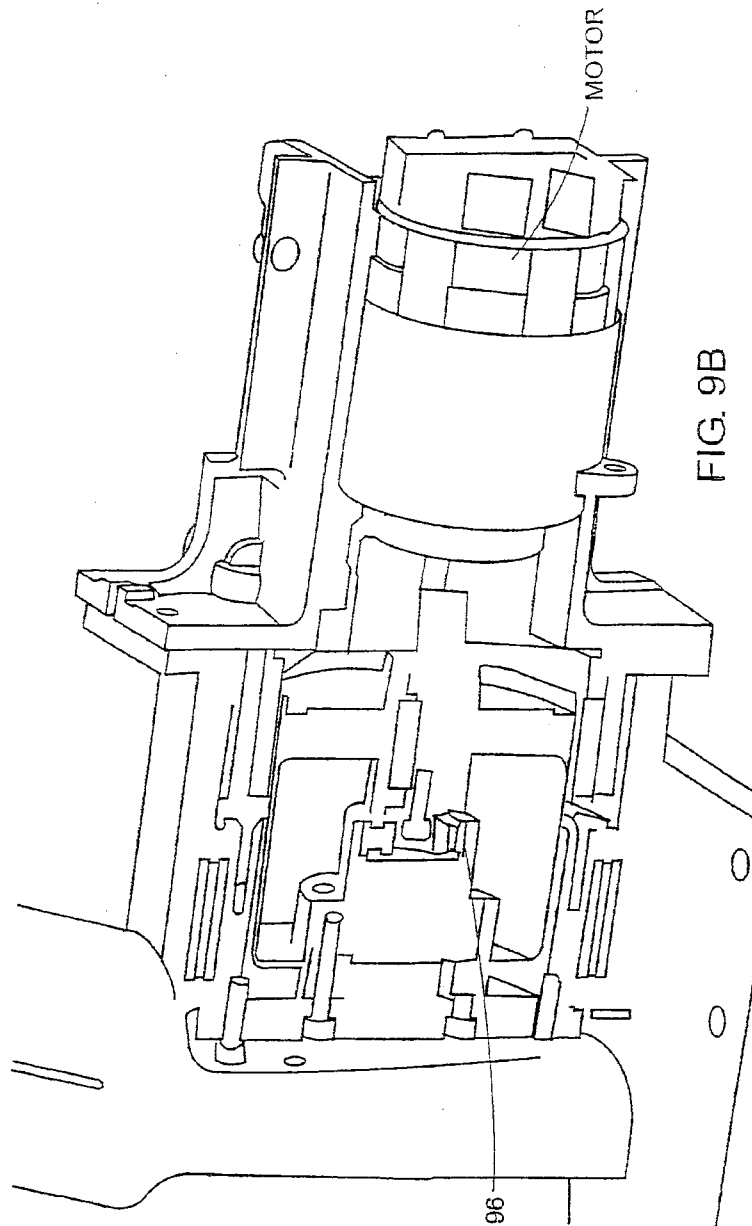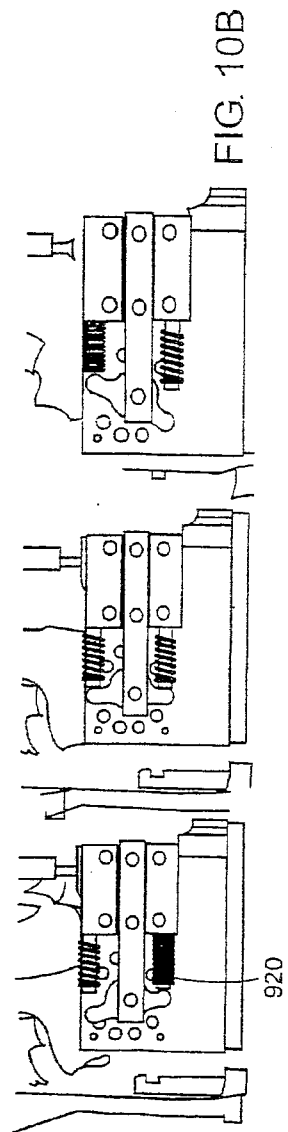

18/21

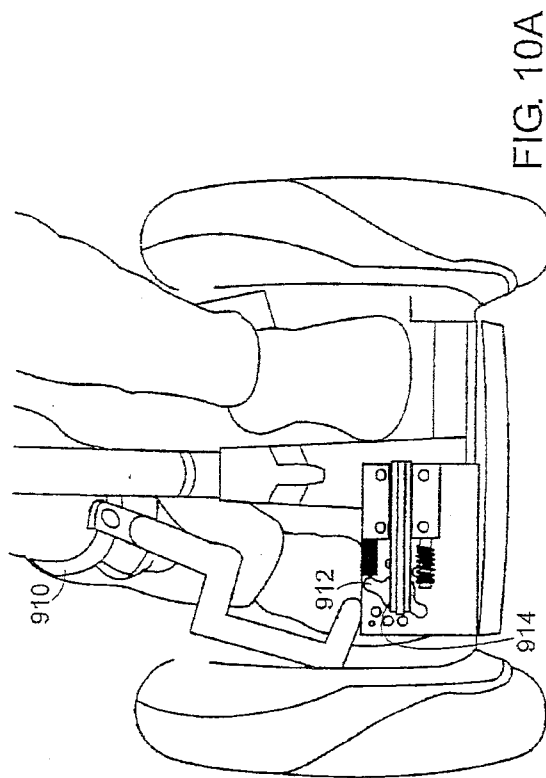

19/21

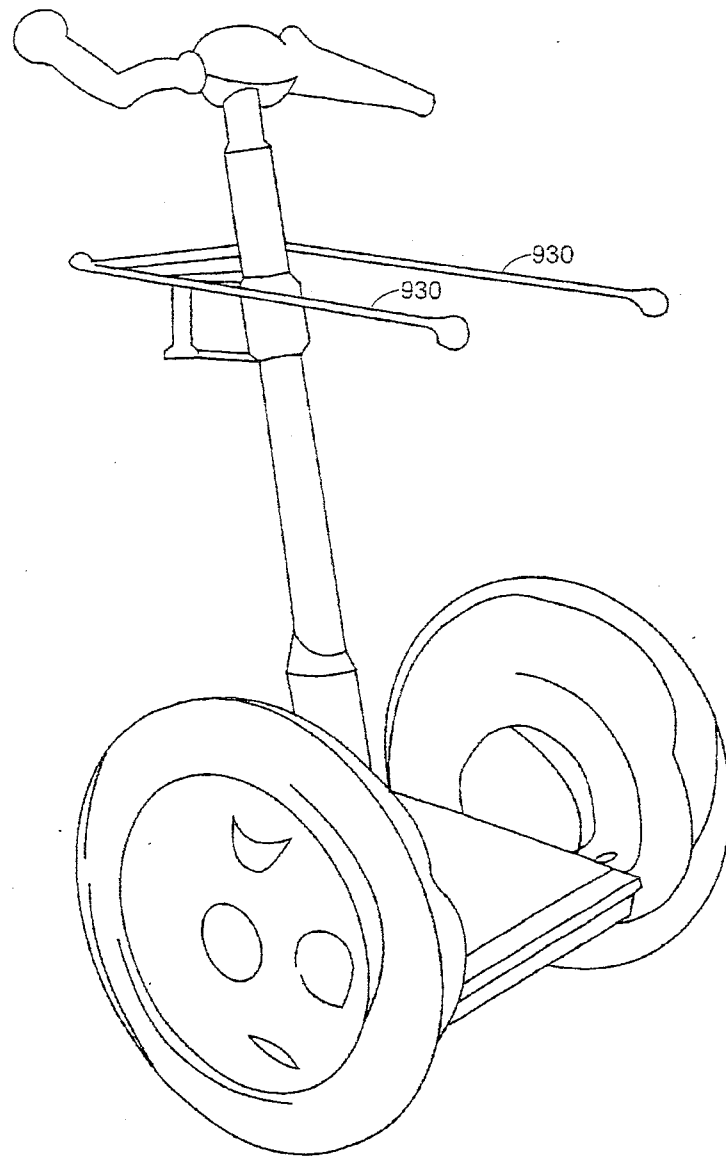


FIG. 10C

20/21

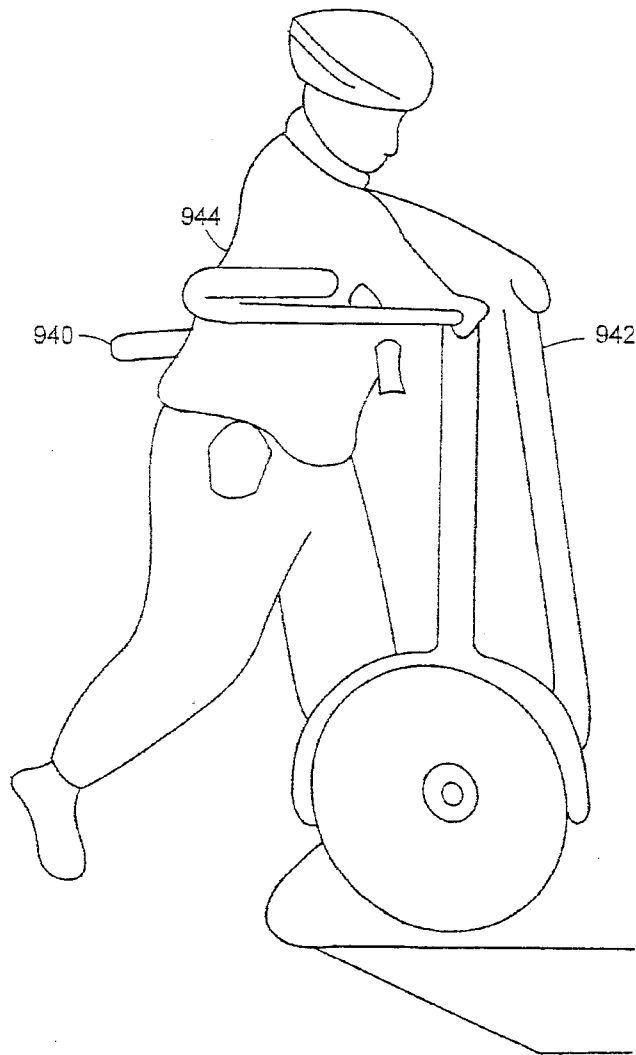


FIG. 10D

21/21

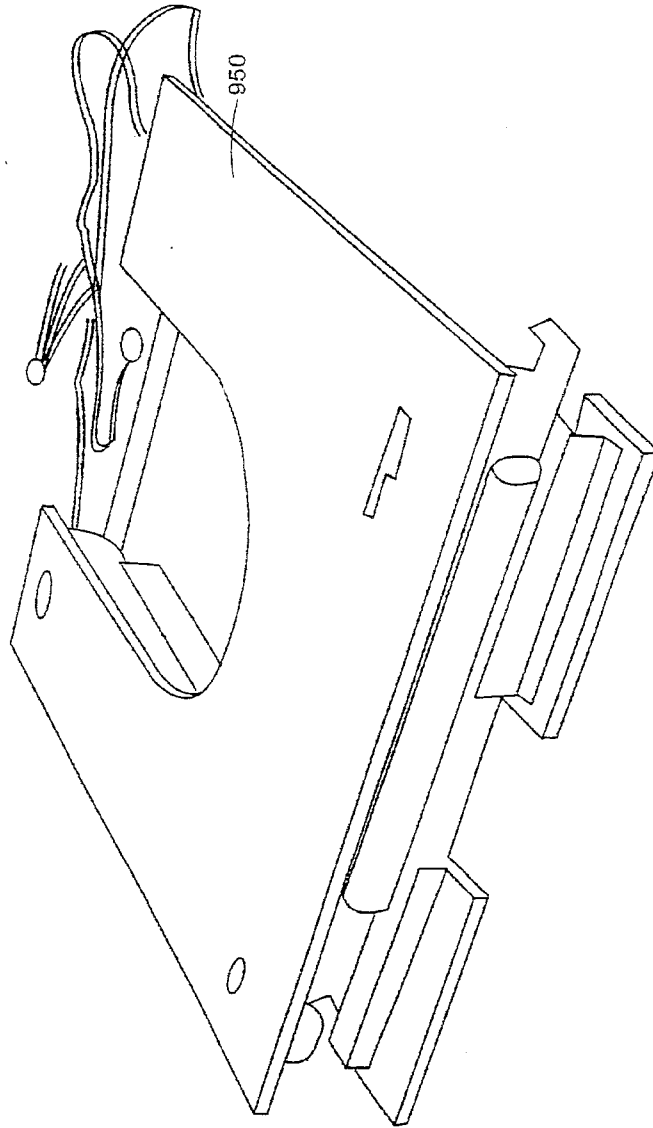


FIG. 11

