

J. F. KELLEY.
Mechanical-Device.

No. 168,645.

Patented Oct. 11, 1875.

Fig. 1.

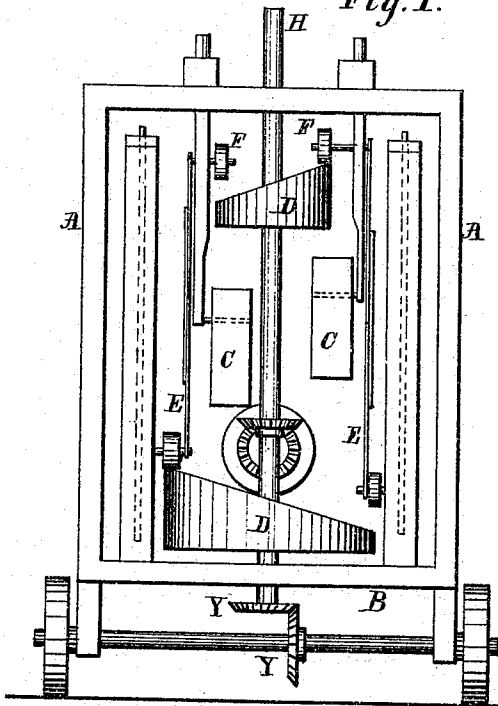


Fig. 2.


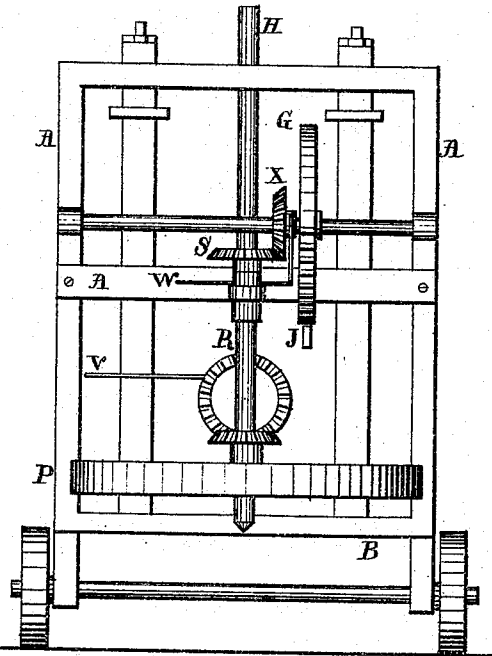


Fig. 4.

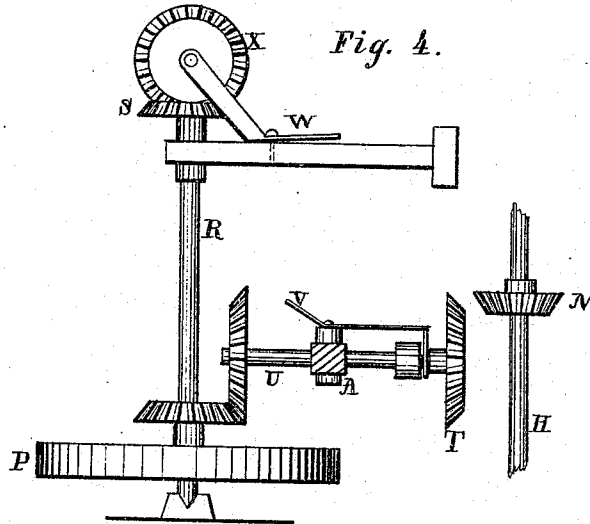

Witnesses.

W. E. Chaffee
T. C. Smith

Inventor
Joseph F. Kelley

By.

J. H. Regan Attorney.

J. F. KELLEY.
Mechanical-Device.

No. 168,645.

Patented Oct. 11, 1875.

Fig. 3.

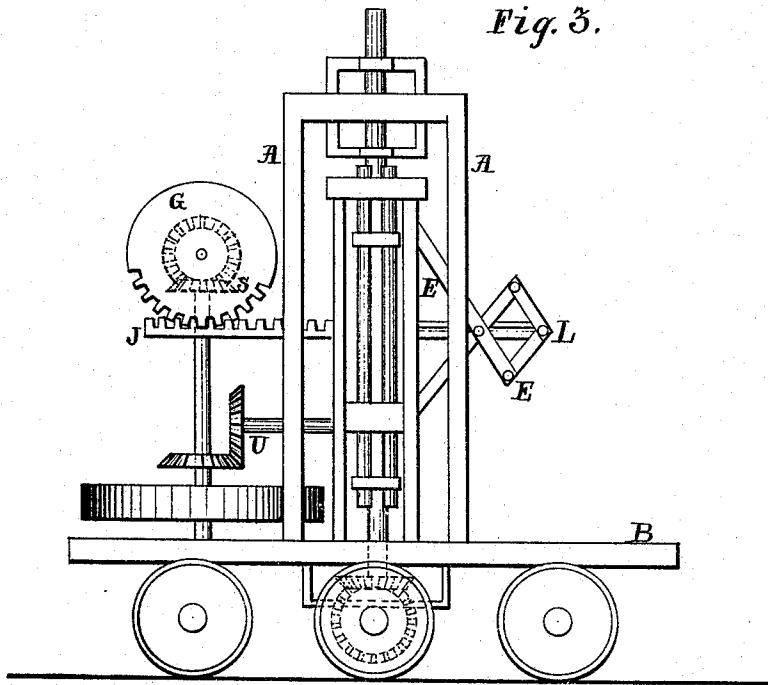


Fig. 5.


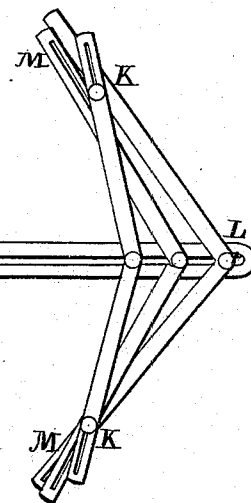


Fig. 6.

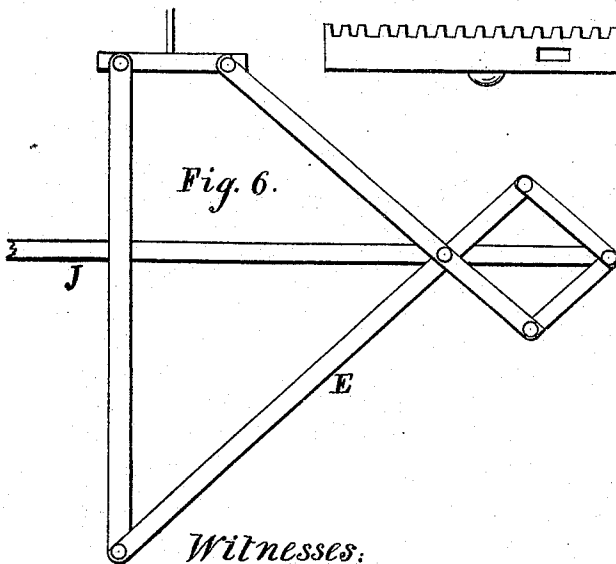

Witnesses:

W. E. Chaffee.
T. C. Smith.

Inventor

Joseph F. Kelley

By J. E. Riggs

Attorney.

UNITED STATES PATENT OFFICE.

JOSEPH F. KELLEY, OF WASHINGTON, DISTRICT OF COLUMBIA.

IMPROVEMENT IN MECHANICAL DEVICES.

Specification forming part of Letters Patent No. **168,645**, dated October 11, 1875; application filed August 18, 1875.

To all whom it may concern:

Be it known that I, JOSEPH F. KELLEY, a resident of Washington city, District of Columbia, have invented a new and Improved Mechanical Device; and I do hereby declare the following to be an exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification, in which—

Figure 1 represents a front view of the machine or mechanical device; Fig. 2, a rear view; Fig. 3, a side elevation; Fig. 4, a detail view of the devices for gearing and ungearing the machinery from the fly-wheel at any time required. Fig. 5 represents the toggle-levers, two or more; and Fig. 6 shows the shape of such toggle-levers.

The nature of my invention consists in the arrangement and combination of the weighted guide-rods, incline planes, toggle-levers, and fly-wheel gearing, as hereinafter described.

The object of my invention is to apply this mechanical device to street-cars, vessels, and machinery.

A represents the square upright frame; B, the horizontal floor-frame or platform; C C, the weights, as shown at Fig. 1; D D, the upper and lower incline planes and friction-rollers F F, operating the levers E E. G G are the cog-wheels that engage rack-bar J alternately on each side of the center vertical shaft H. The toggle-levers E E expand and contract during their movement. Each lever E (there being two or more) has a slot, M, at each end, that makes it adjustable upon the journal of the friction-roller F. The wheel G may be operated by a crank on the end of its axle, by hand or any other power. The center vertical shaft H revolves with the in-

cline planes D D, and the bevel-gearing Y Y transmits motion to gearing on the car-wheel axle below, as shown at Figs. 1 and 3. The weights C C move up and down alternately with their guide-rods and friction-rollers, which rise and descend upon the incline planes D D. The fly-wheel P operates horizontally; it is located upon one end of the shaft R, and the bevel-wheel S is at the other end of the shaft R. The bevel-wheel T is movable upon the horizontal shaft U, and is geared into or ungeared with the bevel-wheel N of shaft H by shifting the bevel-wheel T backward or forward by means of the horizontal lever V, and the horizontal lever W gears or ungears the bevel-wheel X with the bevel-wheel S, by which means the wheel G is stopped, as also that of the levers E. The fly-wheel P regulates the motion of shafts R, U, and H, and by this arrangement all the machinery can be easily geared or ungeared from the fly-wheel shaft, though under full speed the motion of the machinery will be retarded or checked, while the fly-wheel continues its rapid revolution for some minutes, when, by again gearing the bevel-wheels N, S, and T, the force of the revolving fly-wheel instantly starts and hastens the progress of the machine.

What I claim as my invention, and desire to secure by Letters Patent, is—

The vertical shaft H, with its incline planes D D, friction-rollers F F, weights C C, toggle-levers E E, rack J, cog-wheel G, bevel-gearing N, S, T, and Y, and fly-wheel P, all arranged, combined, and operating as herein described, and for the purposes set forth.

JOS. F. KELLEY.

Witnesses:

A. F. Fox,

J. FRED. KELLEY.