



(43) International Publication Date  
18 September 2014 (18.09.2014)

(51) International Patent Classification:  
*F21V 17/00* (2006.01)

(21) International Application Number:  
PCT/US2014/028652

(22) International Filing Date:  
14 March 2014 (14.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/787,420 15 March 2013 (15.03.2013) US  
61/888,866 9 October 2013 (09.10.2013) US  
61/914,238 10 December 2013 (10.12.2013) US

(71) Applicant: **MOLEX INCORPORATED** [US/US]; 2222  
Wellington Court, Lisle, Illinois 60532 (US).

(72) Inventors; and

(71) Applicants : **ZADEREJ, Victor** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US). **MCGOWAN, Daniel B.** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US).

(74) Agent: **SHELDON, Stephen L.**; Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: LED ASSEMBLY

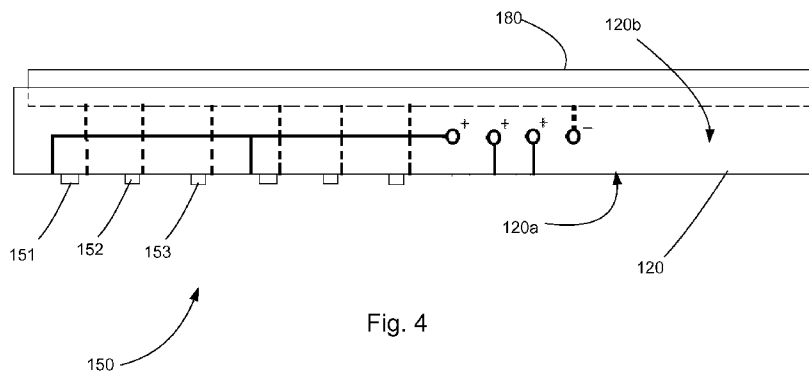


Fig. 4

(57) Abstract: An LED assembly is provided that includes a plurality of LEDs placed along a frame. The plurality of LEDs can include red LEDs, green LEDs and blue LEDs. In an embodiment, the frame can include a common ground and a separate power trace for each color so that the output of each color can be controlled separately. A connector can be integrated into the frame. Terminals can be molded into the frame. Traces can be connected to the terminals so as to provide a three-dimensional circuit.

## LED Assembly

### RELATED APPLICATIONS

[0001] This application claims priority to United States Provisional Appln. No. 61/787,420, filed 15 March 2013, to United States Provisional Appln. No. 61/888,866, filed 9 October 2013, and to United States Provisional Appln. No. 61/914,238, filed 10 December 2013, all of which are incorporated herein by reference in their entirety.

### FIELD OF THE INVENTION

[0002] The present invention relates to field of light emitting diodes (LEDs), more specifically to designs directed toward illumination with LEDs.

### DESCRIPTION OF RELATED ART

[0003] LEDs are useful for a number of applications. One application that has been quite successful in implementing LEDs is in displays. LEDs, because of their long life, tend to be quite beneficial for use in applications such as large flat-screen TVs, mobile devices and anything in between. For mobile devices, one major concern is the efficiency of the display as there is a limited ability to provide power. This has become more interesting to manufactures as mobile device are designed with larger screens so that users can do more with their mobile devices.

[0004] Many mobile devices tend to use a back-lit LCD display with LEDs on the edge to provide the illumination (e.g., an edge-lit design). This currently entails supporting a number of LEDs and ensuring that the LEDs are configured so that their output is directed toward a light guide that is intended to provide a uniform white light emission behind a number of LCD elements that filter the light (so as to emit the desired color on the display). Because the LCD elements control the color, it is desirable to have the light from the LEDs be white. As most LEDs emit light in a fairly narrow band (e.g., are blue or red or green), this can be done by having a phosphor convert light from LEDs into white. This is somewhat inefficient, however, and therefore, if the LEDs are red, bluer and green then by allow the different colors of light to mix in the light guide it is possible to provide white light without the loses inherent in a phosphor-type solution. Packaging all the LEDs on the side, however, remains

problematic. Certain individuals, therefore, would appreciate a design that could provide high levels of efficiency in a more convenient package.

#### BRIEF SUMMARY

[0005] An LED assembly is provided that includes a plurality of LEDs mount on a frame. The plurality of LEDs can include red LEDs, green LEDs and blue LEDs. In an embodiment the frame can include a common ground and a separate power trace for each color so that the output of each color can be controlled separately. If desired, the LEDs can be selectively controlled so that different LEDs on the frame provide different levels of illumination. A connector can be integrated into the frame. Terminals can be insert-molded into the frame and extend into the integral connector or out a back side of the frame. The traces can be connected to the terminals with vias to form desired circuit patterns. The traces can be electroplated. In an embodiment, a flex member can be used in place of terminals.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The present invention is illustrated by way of example and not limited in the accompanying figures in which like reference numerals indicate similar elements and in which:

[0007] Fig. 1 illustrates a perspective view of an embodiment of an LED assembly.

[0008] Fig. 2 illustrates an enlarged perspective view of the embodiment depicted in Fig. 1.

[0009] Fig. 3 illustrates a simplified perspective view of the embodiment depicted in Fig. 2.

[0010] Fig. 4 illustrates a schematic diagram of an embodiment of an LED assembly.

[0011] Fig. 5 illustrates another schematic diagram of an embodiment of an LED assembly.

[0012] Fig. 6 illustrates a perspective view of an embodiment of an LED assembly.

[0013] Fig. 7 illustrates an enlarged perspective view of the embodiment depicted in Fig. 6.

[0014] Fig. 8A illustrates a simplified perspective view of the embodiment depicted in Fig. 6.

[0015] Fig. 8B illustrates another simplified perspective view of the embodiment depicted in Fig. 6.

[0016] Fig. 9 illustrates a schematic diagram of an embodiment of an LED assembly.

[0017] Fig. 10 illustrates another schematic diagram of an embodiment of an LED assembly.

[0018] Fig. 11 illustrates another schematic diagram of an embodiment of an LED assembly.

[0019] Fig. 12 illustrates an elevated side view of an embodiment of an LED assembly.

[0020] Fig. 13 illustrates a perspective view of the LED assembly depicted in Fig. 12.

[0021] Fig. 14 illustrates a plan view of the LED assembly depicted in Fig. 12.

[0022] Fig. 15 illustrates an elevated side view of an embodiment of an LED assembly mounted on a circuit board.

[0023] Fig. 16 illustrates an enlarged plan view of the embodiment depicted in Fig. 15.

[0024] Fig. 17 illustrates a perspective view of an embodiment of an LED assembly with a light guide.

[0025] Fig. 18 illustrates a perspective view of the LED assembly depicted in Fig. 17.

[0026] Fig. 19 illustrates a partially exploded perspective view of the LED assembly depicted in Fig. 18.

[0027] Fig. 20 illustrates a perspective view of the LED assembly depicted in Fig. 18.

[0028] Fig. 21 illustrates another perspective view of the LED assembly depicted in Fig. 18.

[0029] Fig. 22 illustrates an enlarged perspective view of the LED assembly depicted in Fig. 21.

[0030] Fig. 23 illustrates a perspective view of another embodiment of LED assembly.

[0031] Fig. 24 illustrates another perspective view of the embodiment depicted in Fig. 23.

[0032] Fig. 25 illustrates an enlarged perspective view of the embodiment depicted in Fig. 23.

[0033] Fig. 26 illustrates another perspective view of the embodiment depicted in Fig. 25.

[0034] Fig. 27A illustrates a schematic representation of an embodiment of an LED assembly.

[0035] Fig. 27B illustrates another schematic representation of an embodiment of an LED assembly.

#### DETAILED DESCRIPTION

[0036] The detailed description that follows describes exemplary embodiments and is not intended to be limited to the expressly disclosed combination(s). Therefore, unless otherwise noted, features disclosed herein may be combined together to form additional combinations that were not otherwise shown for purposes of brevity.

[0037] As can be appreciated, the depicted embodiments help provide a compact design that allows for high levels of control of LEDs (thus local dimming is readily attainable) while still ensuring desirable levels of efficiency. Compared to convention designs it is expected that the disclosed designs can offer improvements of more than 10% efficiency and many cases the improvements can be greater than 20%, depending on the performance of the LEDs being used. Thus, the depicted designs have the potential to allow for a substantial increase in usable life of an end device and will also allow the end device to be made more compactly.

[0038] Figs. 1-3 illustrate features of an exemplary embodiment of a LED assembly 2 that may be coupled to a light guide so as to provide a light panel. The light guide can be a convention construction such as a silicone-based material that is configured to direct light provided on the edges toward a face in a relatively even and consistent manner (e.g., can be a

printed, etched, V-groove or microlens constructions). The LED assembly 2 would thus be mounted against a side of the light guide and be configured to direct light in to an edge of the light guide in a first direction A while light would emit from the light guide in a second direction B (such as is depicted in Fig. 17). As can be appreciated, different levels of assemblies are possible. A simple configuration could have LEDs positioned along only one edge of a light guide. Alternatively, LEDs could be positioned on two or more sides. Naturally, increasing the number of LED assemblies would increase costs but should not have a significant impact on efficiency as each of the LED assemblies could output less light and thus could be driven at lower power levels. Thus, for some designs it may be more desirable to have LED assemblies on two sides or four sides of the light guide (particularly if local dimming is desirable). As the design and construction of light panels with light guides is known, additional discussions regarding the resultant light panels is not included herein.

[0039] The depicted LED assembly 2 includes a strip 5 that can be formed of a standard metal alloy (such as a copper-based alloy). A dielectric frame 20 is provided on the strip. The frame can be less than 1 mm thick while having a length of more than 50 mm. It is expected that the frame will have a length to thickness ratio of greater than 20 to 1 and more likely will be greater than 50 to 1. The frame 20 includes a mounting side 20a. In an embodiment, traces are placed on the dielectric frame with a laser direct structuring (LDS) process and electroless plating. The traces can all be electrically connected to the strip 5, either by terminals 64 or by fingers 7, so that an electrical potential can be applied to all the traces and they can then be electroplated. Thus, the depicted embodiments can include electroplated traces rather than just electroless plated traces. One benefit of this is that it is possible to provide traces that can carry more current for a given width using electroplated traces because the thickness of the coating can be readily increased.

[0040] The frame 20 includes an integral connector 60 with the terminals 64, the terminals 64 being insert-molded into the frame 20. In operation, the traces can be arranged so that they are connected to the terminals 64 in the desired pattern. As can be appreciated, depending on the size of the frame there will only be a limited amount of area to route traces. Therefore, for increased granularity of control (e.g., if it is desirable to selectively turn off or dim certain LEDs) it may be desirable to have more than one connector and associated terminals.

[0041] Once the traces are formed, LEDs are placed on the mounting side of the frame 20 and connected to the appropriate traces to form the desired electrical circuit. Exemplary embodiments of potential circuit designs are depicted schematically in Figs. 4-6. As can be appreciated, Fig. 4 illustrates schematically that LEDs 151, 152, 153 mounted on the mounting side 120a of frame 120 and the frame 120 includes certain traces that are also positioned on top surface 120b. A bar 180 connects the various cathodes together. Thus Fig. 4 illustrates the use of a common negative trace and just uses separate anodes for each LED. Naturally, an anode can be shared with a group of LEDs of a particular color or location.

[0042] Fig. 5 illustrates a schematic representation of three sides of frame (a mounting side 120a, a top side 120b and a bottom side 120c). As depicted, LEDs 151, 152, 153 are mounted on the mounting side 120a. Traces 171, 172 and 173 are provided on the mount surface 120a and one of either the top side 120b or the bottom side 120c and serve, in connection with common trace 174, to power the LEDs. As can be appreciated, each of the traces 171, 172, 173 are configured to actuate two LEDs. If the LEDs are arranged to provide an RGB output then LED 151 could be red, LED 152 could be green and LED 153 could be blue. The depicted embodiment thus allows the red, green and blue level to be separately controlled for two sets of LEDs (a set could include one red, one green and one blue LED), however, it is not possible with this configuration to separately control the red, green and blue output for each set of LEDs as the red, green and blue LEDs of the two sets of LEDs are connected in parallel.

[0043] As can be appreciated, the actual circuit design will vary depending on the number of LEDs, whether there are multiple colors of LEDs, whether one or more of the LEDs need to be connected in series, and the granularity of control over the LEDs that is desired. The connection between the LEDs and the traces can be provided via conventional wire bonds. As noted above, the traces can be connected to terminals that are formed into a connector that is integral with the frame and if additional granularity is desired then additional terminals can be used.

[0044] It should be noted that while the use of three separate colors are discussed (e.g., the depicted design is suitable for a typical RGB solution), solutions with additional LED colors are also contemplated. As can be appreciated, having a good red, green and blue LED is sufficient to provide a white light but depending on the performance of the different colors of

LEDs it may be desirable to have one or more additional colors incorporated into the solution. In addition, if the LEDs are configured to provide white light (e.g., blue pumps configured to activate a phosphor coating, for example, or include die that can produce multiple wavelengths of light) then only one type of LED color (white) would be needed and a simpler circuit couple be used. If local dimming is desirable, however, then even with the use of white light producing LEDs it may be desirable to have regions of LEDs separately controllable. Thus, the depicted circuit configurations are not intended to be limiting.

[0045] Figs. 6-8B illustrate another embodiment of an LED assembly 202 is disclosed. A frame 220 includes an LED array 250 connected to traces 270 that are originally connected to strip 205 so that the traces 270 can be electroplated as discussed above. It should be noted that once the traces are fully plated the strip 205 can be removed and the internal structure of terminals and the pattern of traces can be used to provide the desired electrical circuit.

[0046] Fig. 7 illustrates an enlarged view of the frame 220, which includes a mounting side 220a, a top side 220b and a bottom side 220c. Traces 270 include trace 270a, 270b, 270c and 270d. As can be appreciated, each trace extends along two sides (e.g., trace 270a extends along mounting side 220a and 220b). The traces 270 are connected to terminals by vias 277. The traces 270 are configured to provide power to LEDs 251, 252, 253, which are arranged as a red, green and blue LEDs. It should be noted that while each is depicted as a different size, that size different is mainly for purposes of illustration. The LEDs could be different sizes or all the same size, depending on the efficacy of each LED and the desired amount of power provided to each LED. A strip 205 with apertures 206 is used to support the frame during the construction process and allows for the electroplating discussed above.

[0047] As can be appreciated from Figs. 8-9B, terminals 207a, 207b, 207c extend from strip 205 and are connected to the traces by the vias 277. Once electroplated, the strip 205 can be removed so that the terminals 207 can be isolated and the traces 270 and terminals 207 can be used together to provide the desired electrical pattern. The LEDs 251, 252, 253 can be secured to the frame 220 and/or to the traces 270 and can electrically connected to the traces 270 with conventional wire bonding techniques. It should be noted certain traces can be electrically connected to other traces by having both traces electrically connected to the same terminal. In addition, a single trace, such as trace 270b, can be electrically connected to multiple LEDs. Thus, as can be appreciated, relatively complex structures are possible and

the configuration can provide a three-dimensional circuit. The actual structure will depend on the desired circuit.

[0048] Figs. 9-11 provide three schematics of potential diagrams that could be used. In Fig. 9, a mounting side 320a, a top side 320b and a bottom side 320c are depicted. LEDs 351, 352 and 353 are provided and each of these LEDs is a different color. Trace 371 connects LED 351 to a via 377 on the top side while traces 372, 373 connect LEDs 352, 353 to vias on the bottom side 320c. A common trace 374 (which can extend along a back of a frame or be provided internally in the frame) connects all the LEDs to via 377, thus there is a common cathode while the anodes are each separate.

[0049] Figs. 10 and 11 illustrate variations of the embodiment depicted in Fig. 9. Both illustrate a schematic representation with a mounting side 420a, a top side 420b and a bottom side 420c. Both have the same LED 451 used multiple times (thus LED 451 is an example of a white light LED). The difference is that while both have vias 477a, 477b, 477c, 477d connected as the anode for different LEDs 451, the cathode via 477e is shared in Fig. 10 while there are separate cathode vias 477e associated with each LED 451 in Fig. 11. Thus, the same LED array 450 can be powered by different configurations of traces.

[0050] Figs. 12-16 illustrate an embodiment that can advantage of separate traces for each LED. An LED assembly 502 includes a carrier 520 and terminals 507 insert molded into the carrier while an LED array 550 is provided on a mounting side 520a and the LED array 550 includes sets of LEDs 551, 552, 553 that can each be configured to provide a different color (e.g., red, green, blue) as previously discussed. Traces 570, which can be configured in complex shapes as discussed above with respect to Figs. 6-8B, are provided on a top side 520b and a bottom side 520c of the carrier 520. The terminals 507, which can be configured similarly with different lengths and shapes like what was depicted in Figs. 6-8B, can be connected to the traces 570 with vias 577 and extend out a back side 520d of the carrier 520 and can be configured to be soldered directly onto pads 504 on a PCB 503. As can be appreciated, such a construction avoids the need for distinct connectors to a PCB 503, which generally is needed to support a controller and other driver components. In addition, the ability to have a substantial portion of the PCB positioned within the frame of the carrier allows for a very low profile system where the entire solution is less than three times the

thickness of the PCB. Furthermore, it is possible to control the LEDs with a very high degree of granularity. Thus, a number of benefits can be realized by such a construction.

[0051] Figs. 17-22 illustrate an embodiment of an LED assembly 602 that includes a flex member 610 and the LED assembly 602 is coupled to a light guide 695. In general, light guides are planar and are typically configured so that light is emitted from the surface of the light guide in a substantially uniform nature. Thus, in general, light is directed into an edge of the light guide by an LED assembly (e.g., in an A direction) and then is directed out of a planar surface (e.g., in a B direction) by the light guide. As depicted, for example, light is directed from the LED assembly 602 by a light ramp 690, which includes a mating surface 694 that presses against the light guide and light emits from planar surface 696 of the light guide 695 due to internal features of the light guide (not shown).

[0052] As can be appreciated, providing a light ramp that directs light from the LED array on the frame to the light guide can help improve performance of the overall system. Notably, if the light ramp has a mating surface that is configured to press against the light guide and that interface is compliant then it is possible to provide a better optical interface (e.g., an interface with less loss of light) between the LEDs and the light guide.

[0053] A light ramp 690 is shown separable from the frame 620 and in an embodiment the light ramp 690 could be formed separately and then pressed onto the frame. Alternatively, the light ramp 690 could be formed of a compliant silicon material that is molded over a mounting side 620a of the frame 620 and is configured to optically couple the LEDs to the light guide. The light ramp 690 preferable will be configured so as to provide internal reflections for the wave lengths being emitted from the LED array 650 wherever the light ramp 690 is not pressed up against the light guide 695.

[0054] The frame 620 includes top side 620b and bottom side 620c and traces 670 and vias 677 can be provided on the frame 620 in manner similar to the embodiments discussed above so as to provide the desired electrical pattern. One difference is that a flex member 610 is insert-molded into the frame instead of terminals. Traces 670 are thus connected to conductive lines 611 by the vias 677. Flex member 610 can be a multi-layer flex that includes multiple conductive lines 611 but unlike a PCB, the flex member 610 is flexible and thus can be bent or shaped into a desired orientation. As can be appreciated, for displays where it is desirable to have the visual screen extend to nearly the edge of the device, such a

construction will allow the flex member 610 to be folded over and just the frame and light guide can be positioned outside of the actual display. Thus can allow for a relatively thin bezel (the frame and light ramp can be configured to be in the range of about 5 mm or less from the back of the frame to the front of the light ramp) around the display.

[0055] Thus, while the depicted embodiment of the flex member shows the conductive lines extend toward an edge (e.g., they make a 90 degree turn to one side), the conductive lines in the flex member could extend straight back and due to the ability to bend the flex member, the flex member could connect to a circuit board in a manner similar to that depicted in Figs. 27A or 27B.

[0056] For example, a frame 820 could be coupled to a PCB 803 by a curved flex member 810 or by a flex member 810' that has sharper angles formed into it. As the use of flex members are well known, no further discussion regarding the design and construction of them is provided herein.

[0057] Unlike the configuration depicted in Figs. 12-016, the conductive lines 611 can be provided in groups 610a, 610b that are configured to control sets of LEDs. Thus one conductive line (assuming the cathode was a shared line as discussed above) could power one, two or more LEDs at the same time and the LEDs being powered could each be in parallel or in series. For example, the embodiment depicted in Figs. 17-22 is provided with enough conductors to control 8 sets of LEDs. As can be appreciated, a portion of the LED assembly with 8 sets of LEDs can be configured so as to have 24 LEDs spaced apart so that the sets of LEDs, where each set of LEDs includes one red, one green and one blue LED, are provided every 2.5 mm. If the colors are controlled separately, the controlling 8 sets of LEDs at the same time can provide granularity of about 20 mm (e.g., the amount of red, green and/or blue light being emitted could be controlled separately over a 20 mm distance). Thus, the granularity of control would be about 20 mm. Alternatively, if each set of LEDs was controlled separately then the granularity could be 2.5 mm. Depending on the configuration of the display and the desirability/use of local dimming the increased granularity may or may not be beneficial.

[0058] Figs. 23-26 illustrate an embodiment of an LED assembly 702 that has a frame 720 that supports an LED array 750. The frame 720 supports sets of terminals 707 that are configured to be solder attached to a printed circuit board. The frame 720 includes traces 770

on top side 720b and bottom side 720c and includes vias 777 that connect the traces 770 to other traces or to internal conductors so as to allow for control of LEDs 751, 752, 753 (which are depicted as being arranged in sets of red, green and blue LEDs) that are provided on a mounting side 720a of the frame 720. As can be appreciated, the number of terminals is similar to the number of conductive lines provided in the embodiment depicted in Figs. 17-22. Thus, the use of separate terminals for each LED, such as depicted in Figs. 12-16 can be replaced with an embodiment that uses a lesser number of terminals that are electrically connected to a plurality of LEDs (either in series or in parallel) such as is provided in LED assembly 702 depicted in Figs. 23-26. Such an LED assembly will naturally provide less granularity regarding the ability to control each LED individually but will also require less connections to a supporting board, thus application level design issues will likely dictate which approach is to be used.

[0059] Thus, as can appreciated from the depicted circuits, a large degree of flexibility is enabled by the depicted features and they can be combined together so as to provide a large number of different combinations. Thus, as noted above, the particular configurations depicted, unless otherwise noted, are not intended to be limiting.

[0060] The disclosure provided herein describes features in terms of preferred and exemplary embodiments thereof. Numerous other embodiments, modifications and variations within the scope and spirit of the appended claims will occur to persons of ordinary skill in the art from a review of this disclosure.

We claim:

1. An LED assembly, comprising:  
a frame extending in a first direction, the frame having a length and a thickness so as to define a mounting side, the frame further including a top surface and a bottom surface;  
a plurality of traces provided on the frame, the traces being electroplated, at least one of the plurality of traces being provided on one of the top surface and the bottom surface; and  
a plurality of LED positioned in a row on the mounting side, the plurality of LEDs connected to the electroplated traces.
2. The LED assembly of claim 1, further comprising a connector integrally formed into the frame, the connector including a plurality of terminals that are electrically connected to the electroplated traces.
3. The LED assembly of claim 2, wherein the plurality of terminals extend out a back side of the frame.
4. The LED assembly of claim 3, further comprising a circuit board with a plurality of contact pads positioned on a first surface, wherein the terminals are soldered to the contact pads.
5. The LED assembly of claim 2, wherein the plurality of LEDs includes sets of LEDs and the plurality of terminals are provided in pairs, wherein each pair of the terminals is electrically connected to at least two LEDs of the plurality of LEDs, the at least two LEDs being connected in series.
6. The LED assembly of claim 1, further comprising a flex member positioned in the frame, the flex member including line conductors that are electrically connected to the electroplated traces.
7. The LED assembly of claim 6, wherein at least two LEDs of the plurality of LEDs are connected in series, the at least two LEDs being configured to be powered by a pair of line conductors provided by the flex member.
8. An LED assembly, comprising:

a frame extending in a first direction, the frame having a length and a thickness so as to define a mounting side;

traces provided on the frame, the traces being electroplated;

a plurality of LEDs positioned in a row on the mounting side, the plurality of LEDs connected to the electroplated traces; and

a light ramp provided over the LEDs, the light ramp including a mating surface configured, in operation, to mate with a light guide, the light ramp configured to direct light emitted by the plurality of LEDs toward a mating surface, the mating surface being compliant.

9. The LED assembly of claim 8, wherein the frame supports a plurality of terminals and all the traces are electrically connected to at least one of the plurality of terminals.

10. The LED assembly of claim 9, wherein the terminals are configured to provide a plurality of anodes and cathodes and the plurality of LEDs are configured so that at least two LEDs of the plurality of LEDs are electrically connected between each anode and cathode.

11. The LED assembly of claim 10, wherein the at least two LEDs are connected in series.

12. The LED assembly of claim 8, wherein the frame supports a flex circuit that includes a plurality of conductors and all the traces are electrically connected to at least one of the plurality of conductors.

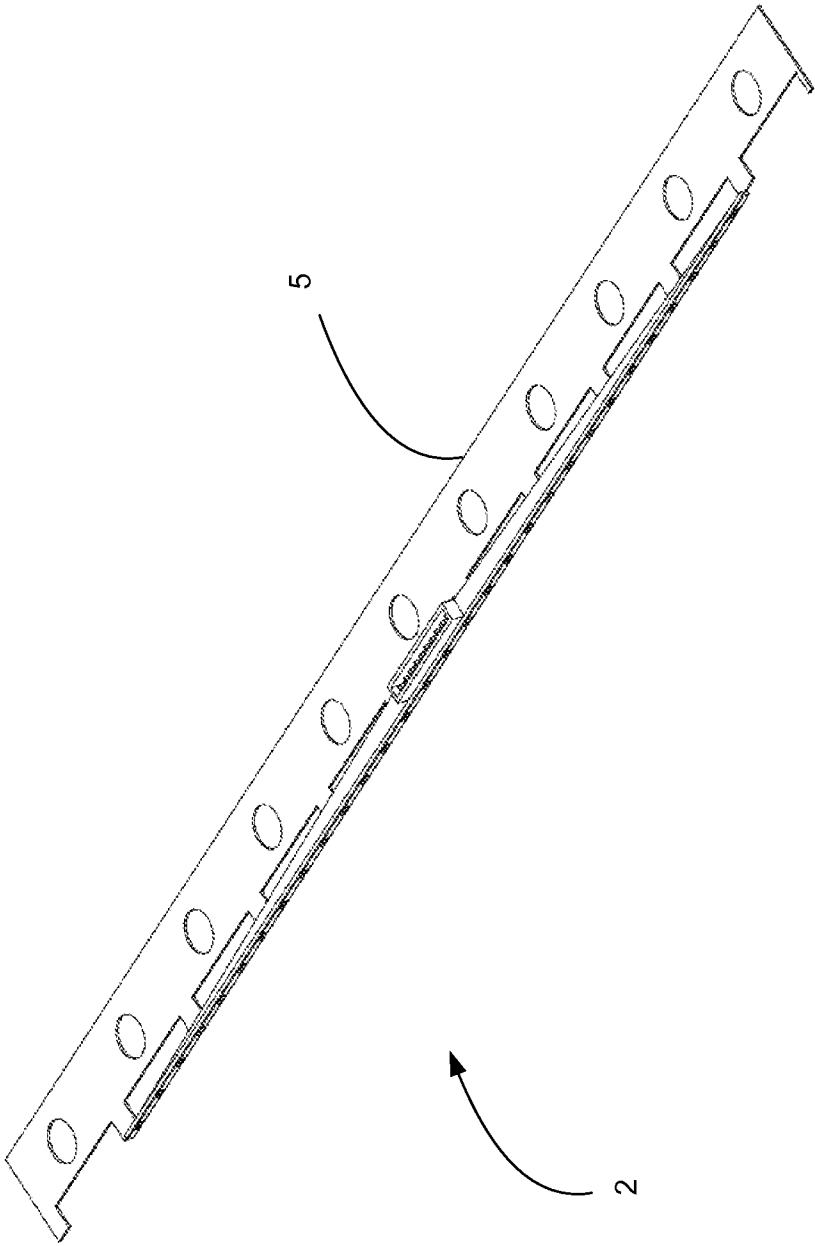


Fig. 1

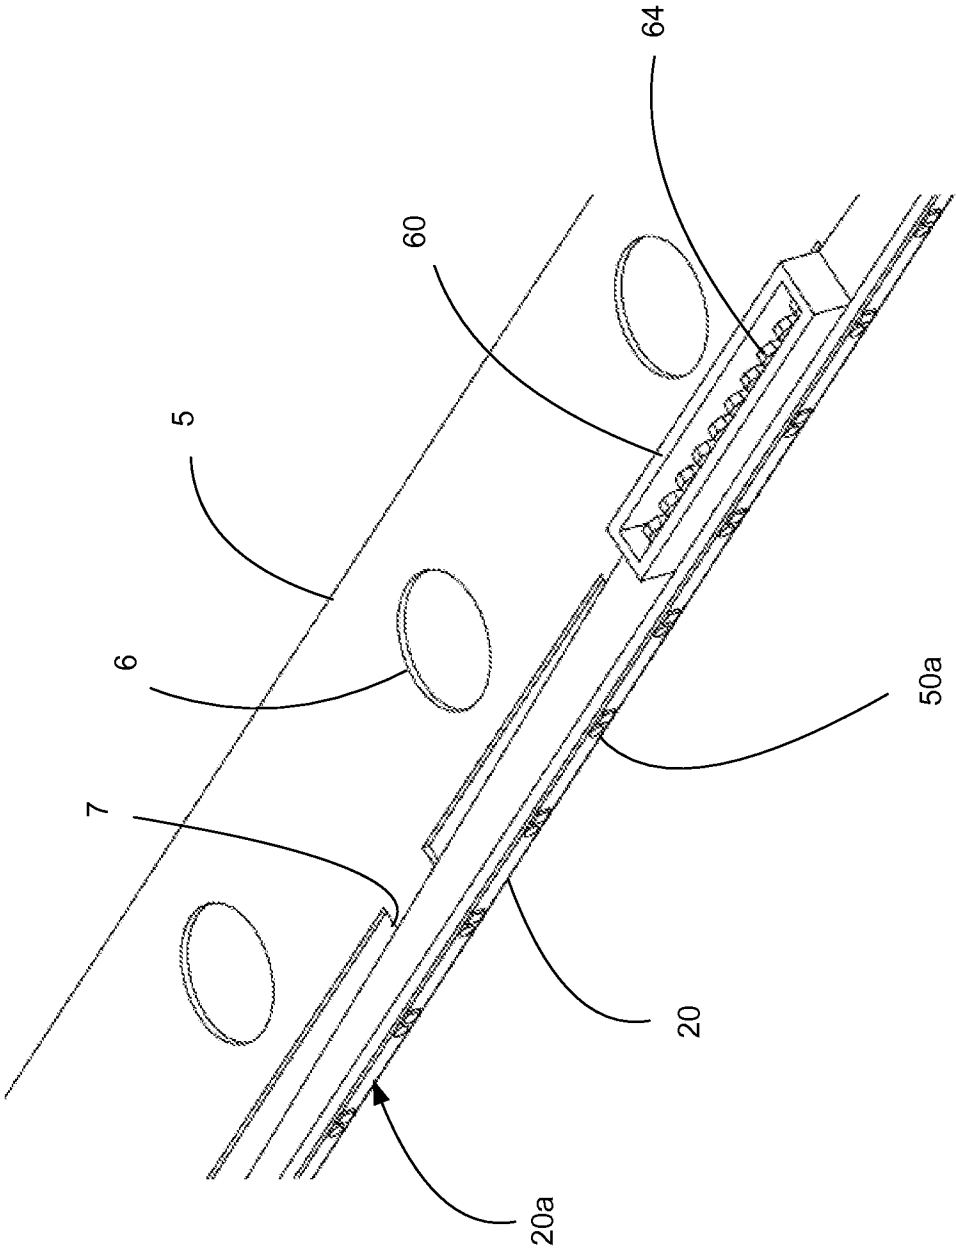


Fig. 2

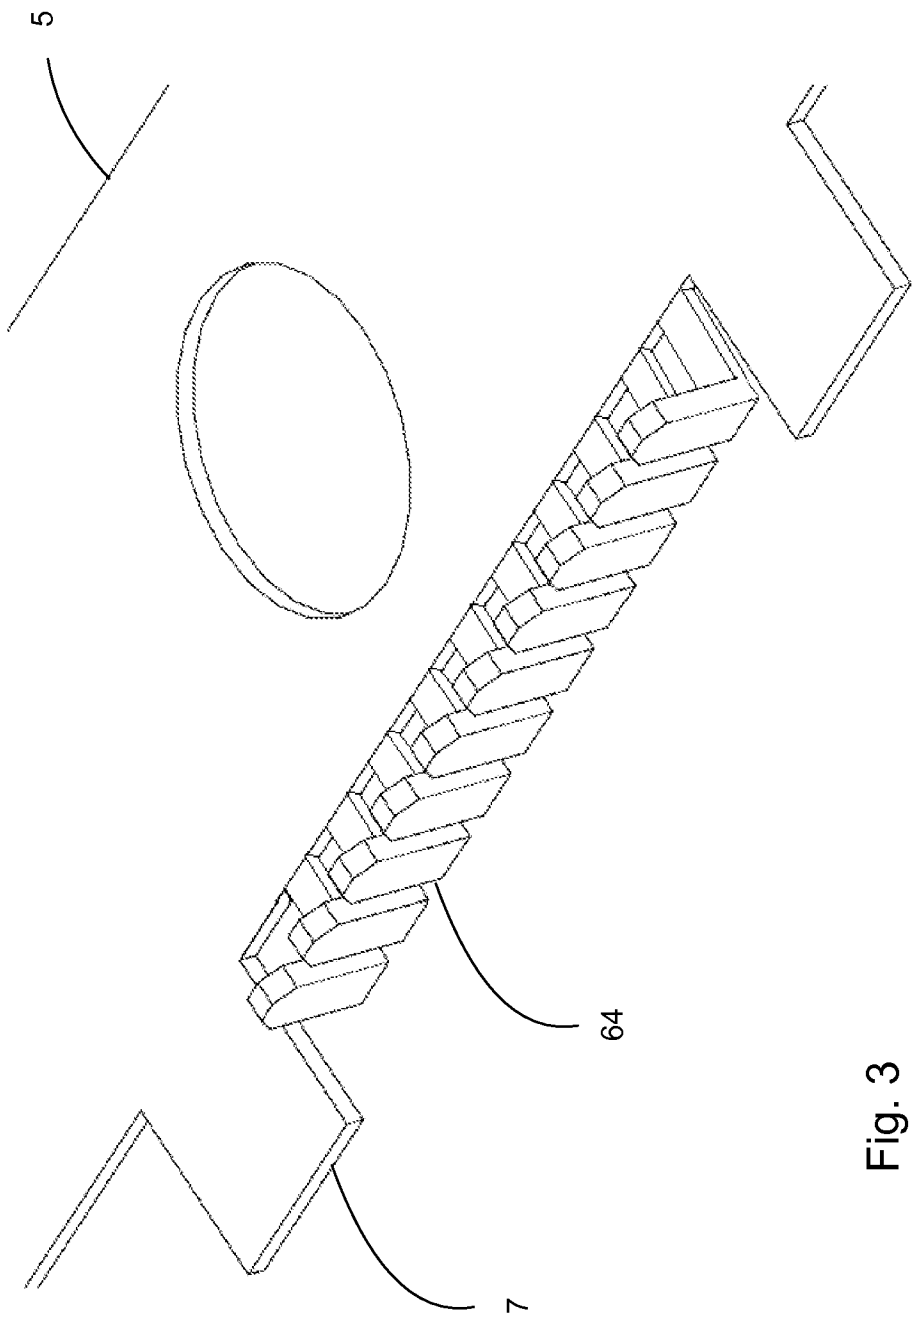


Fig. 3

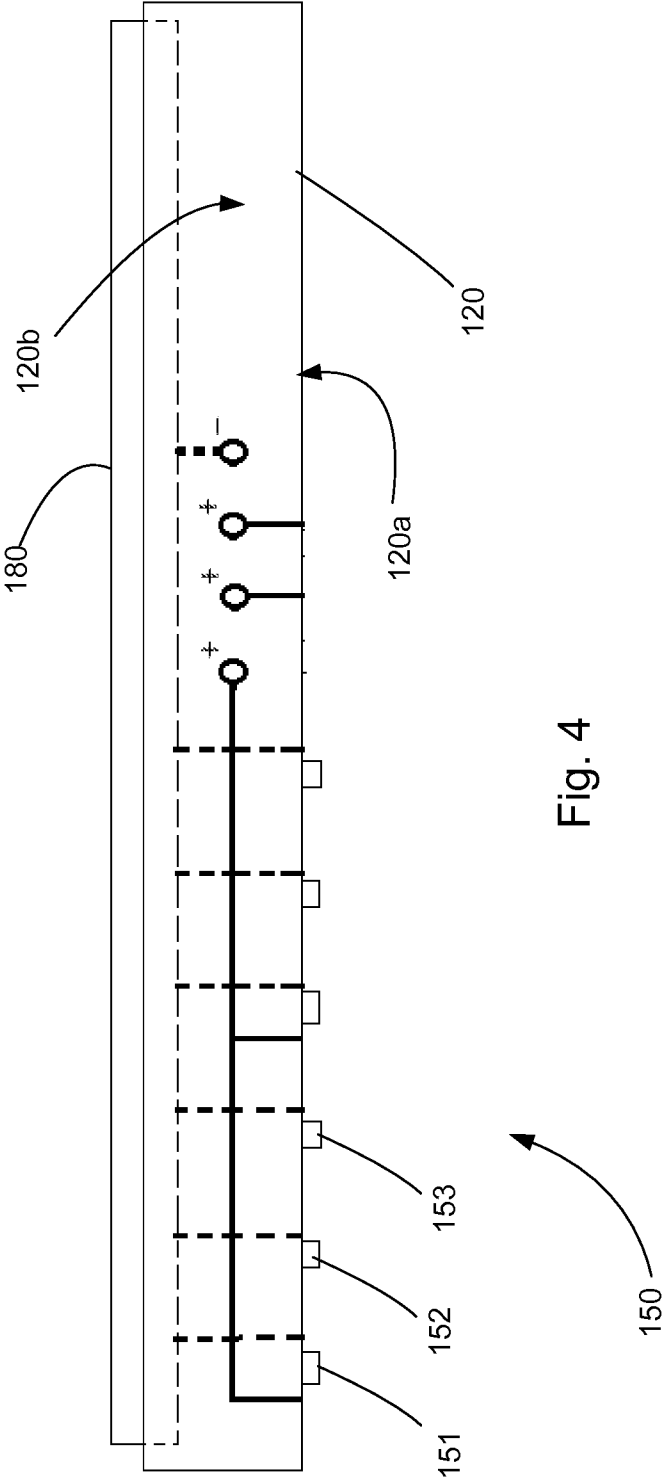


Fig. 4

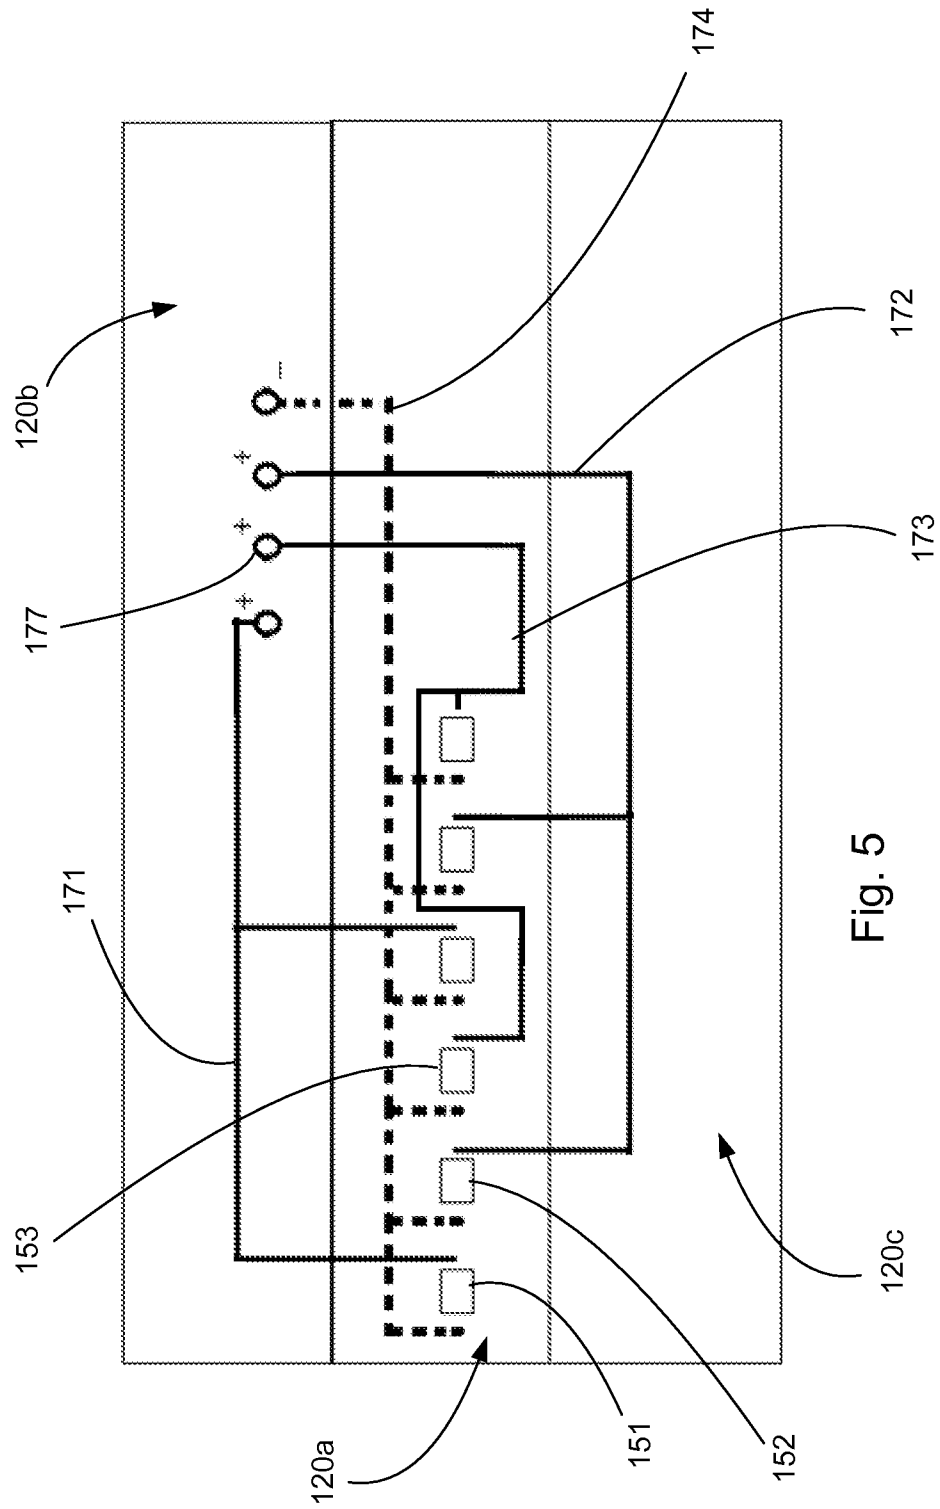
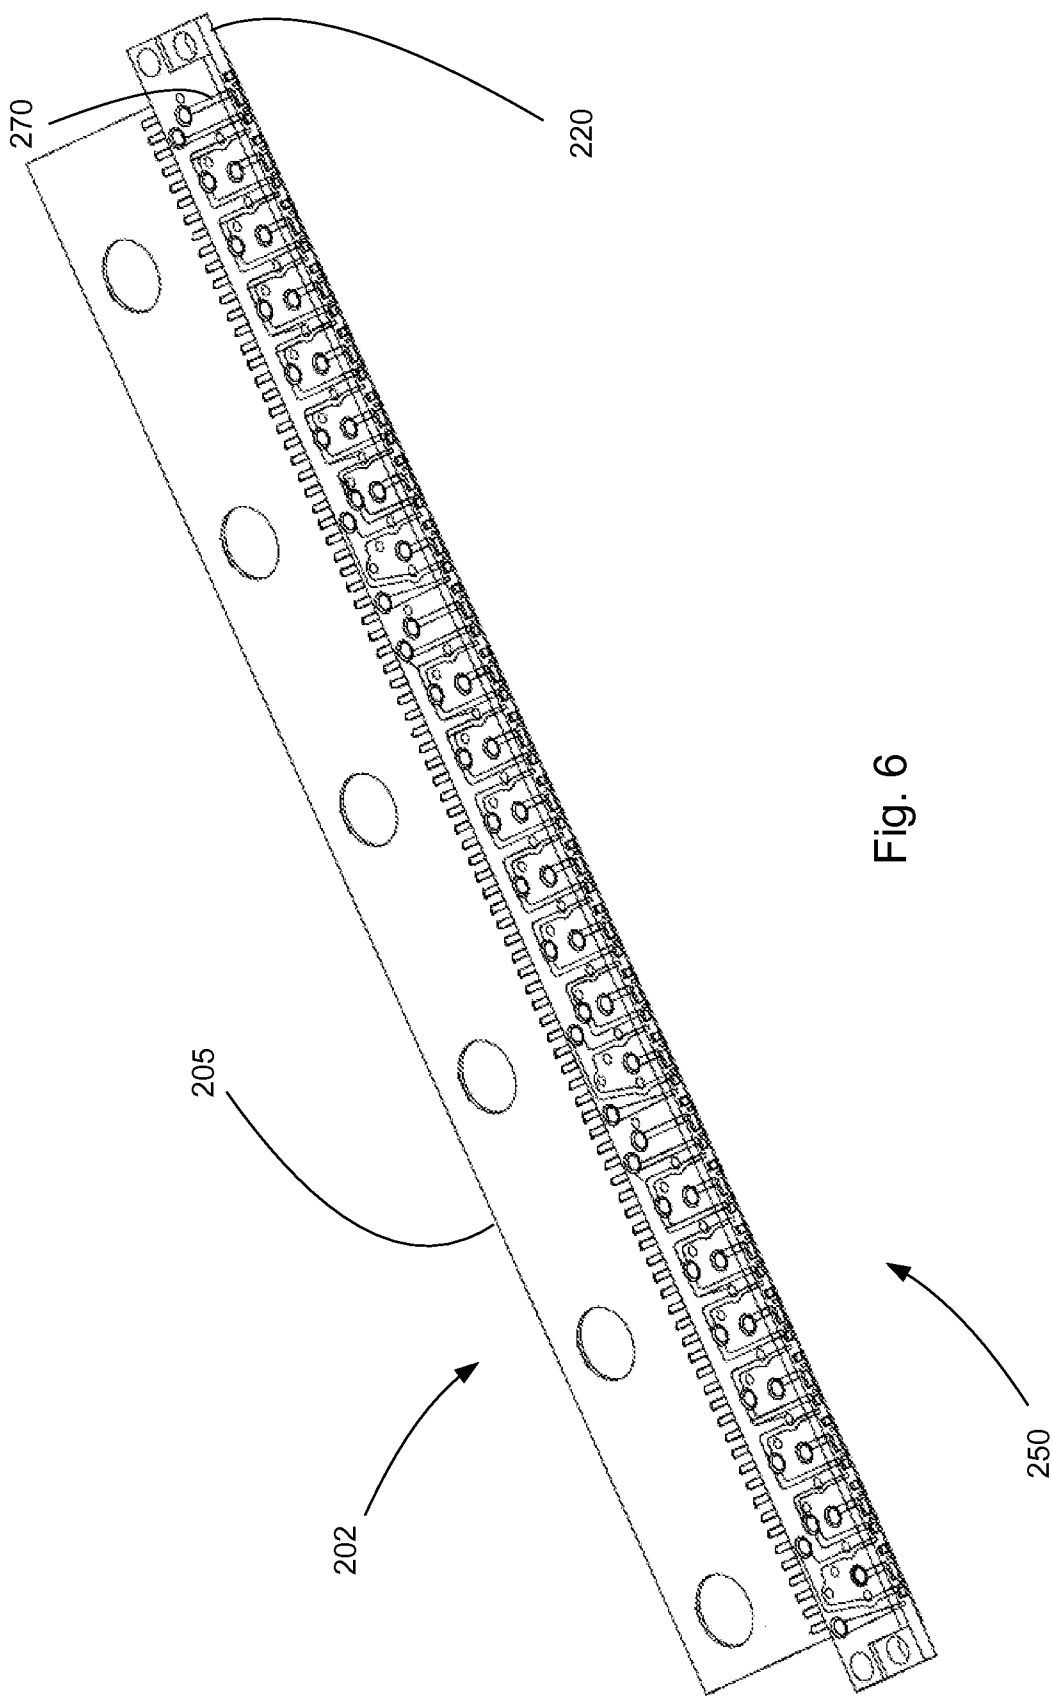
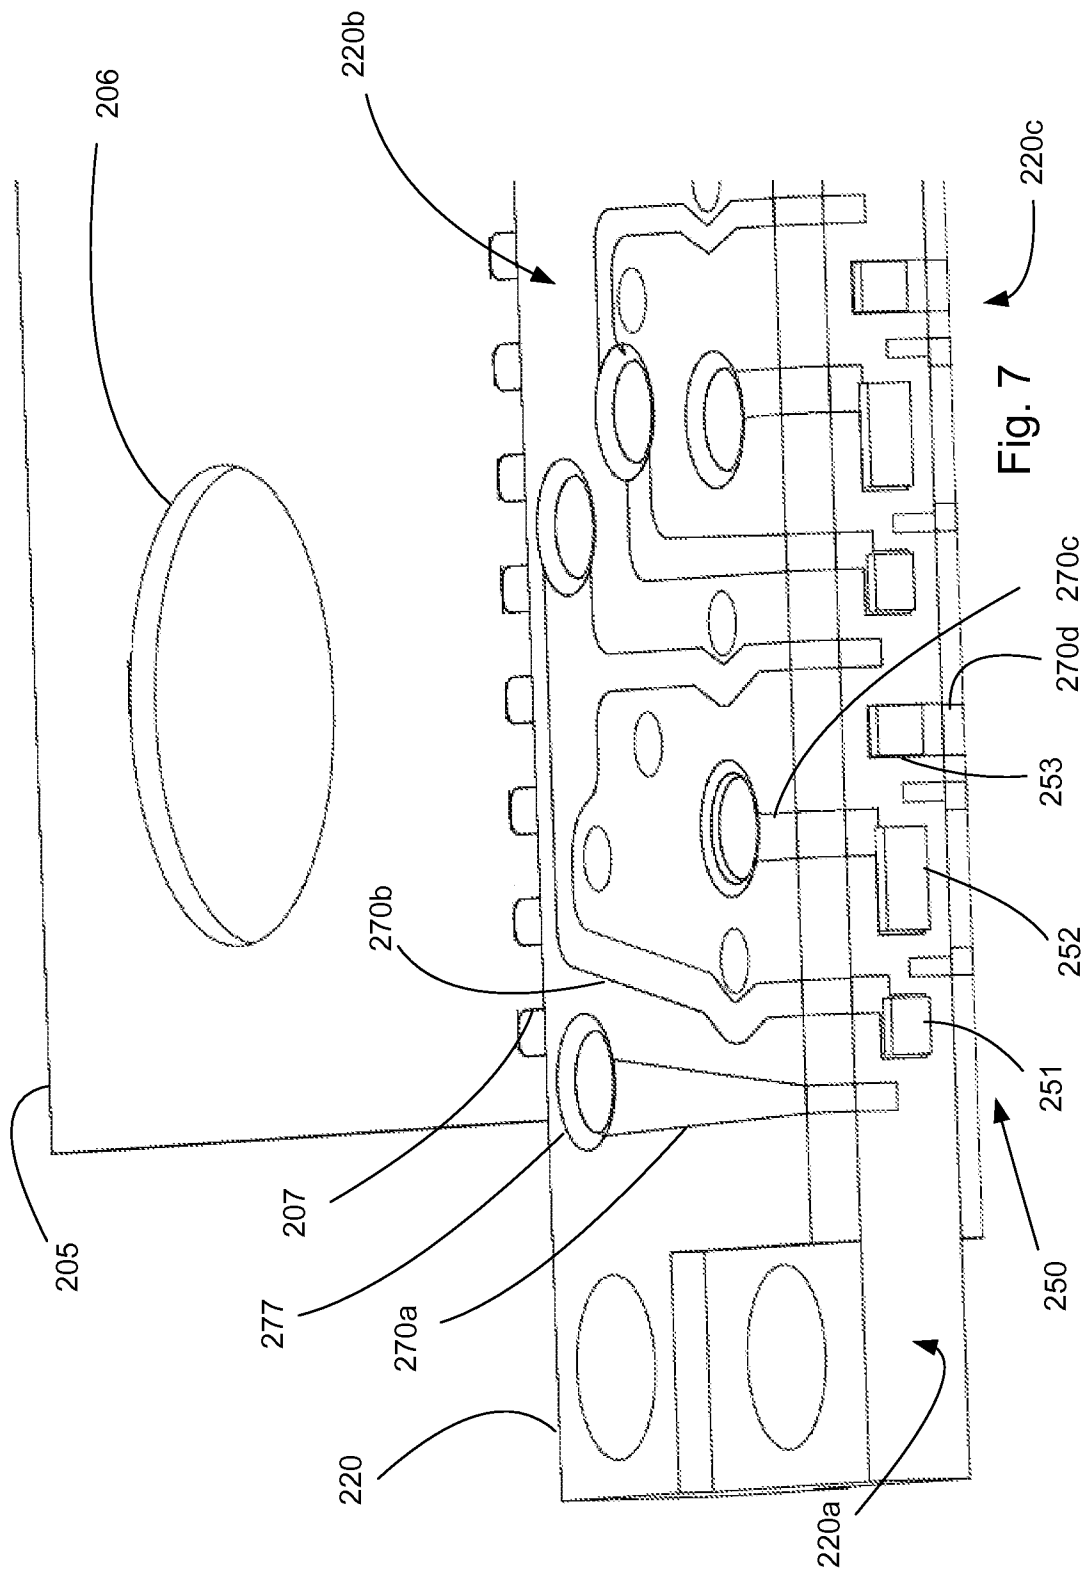


Fig. 5





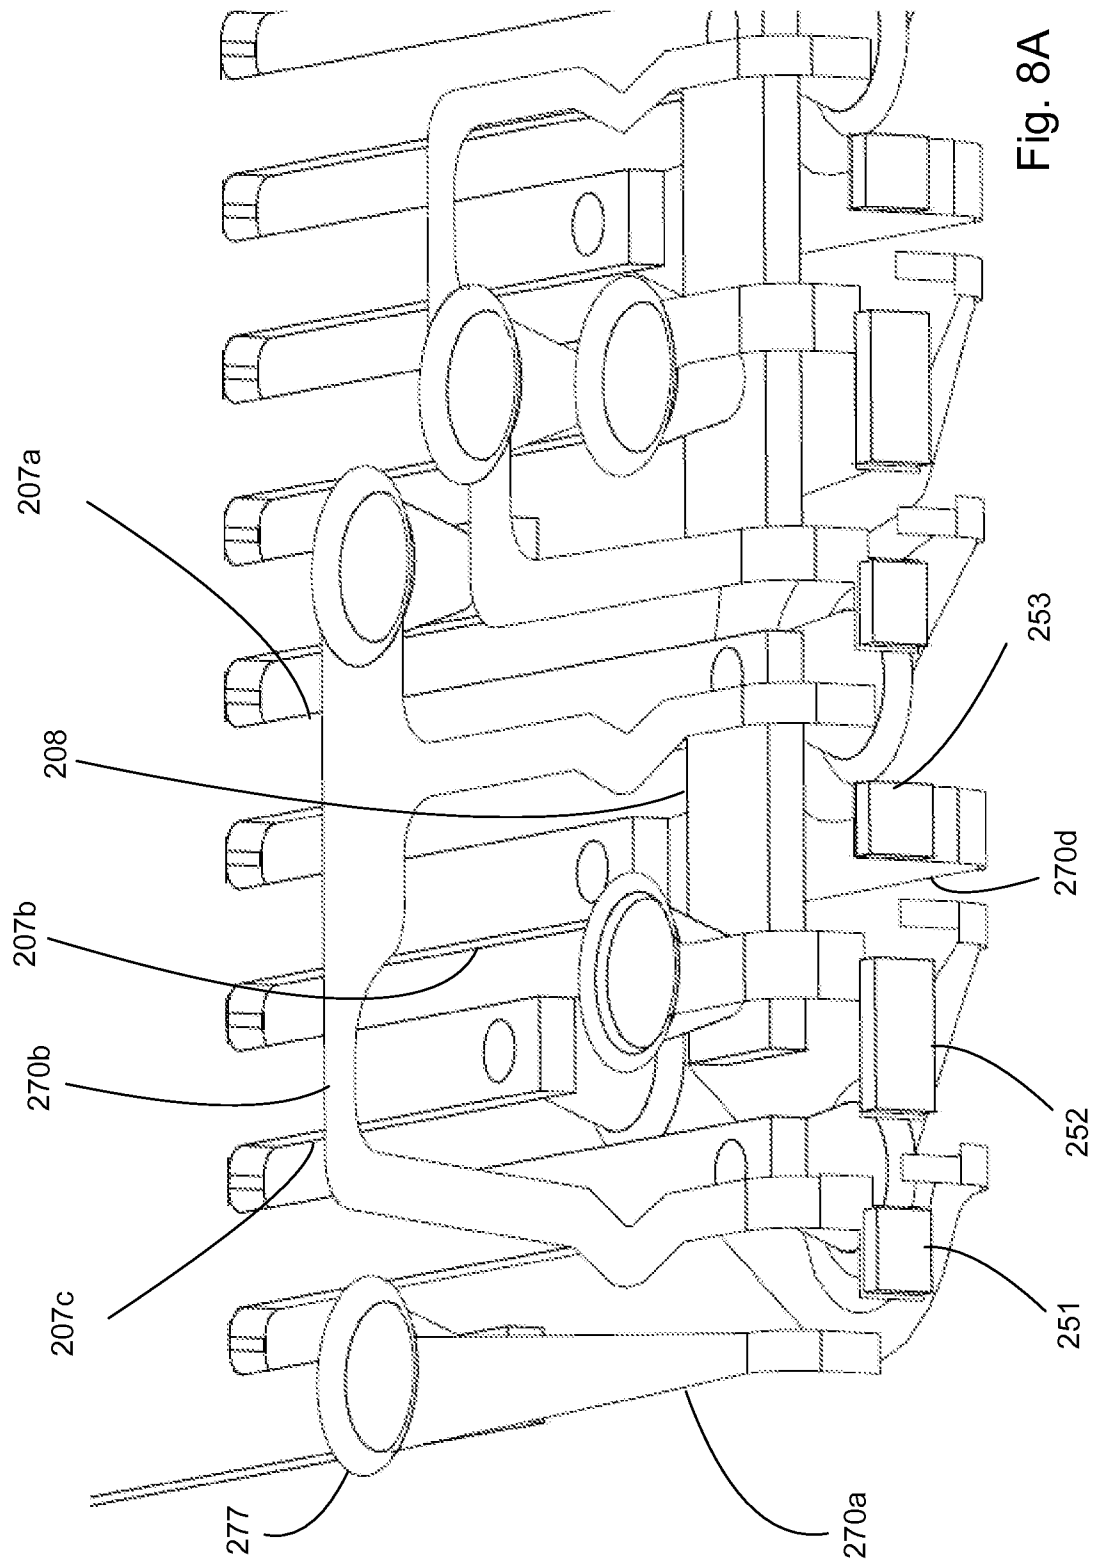
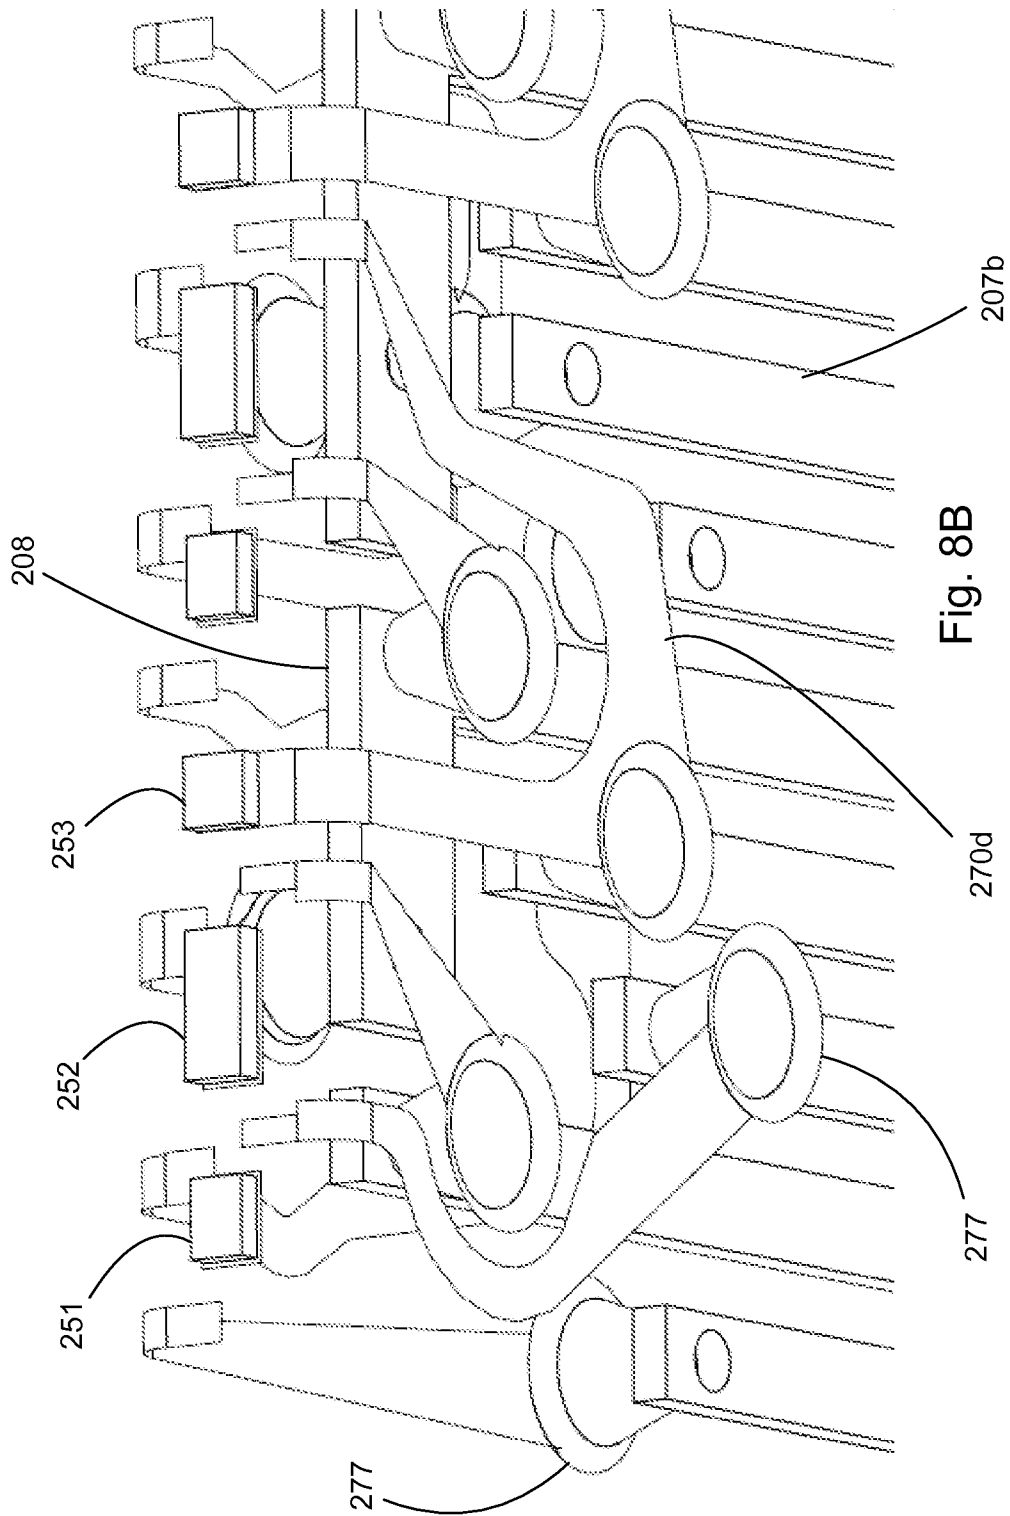


Fig. 8A



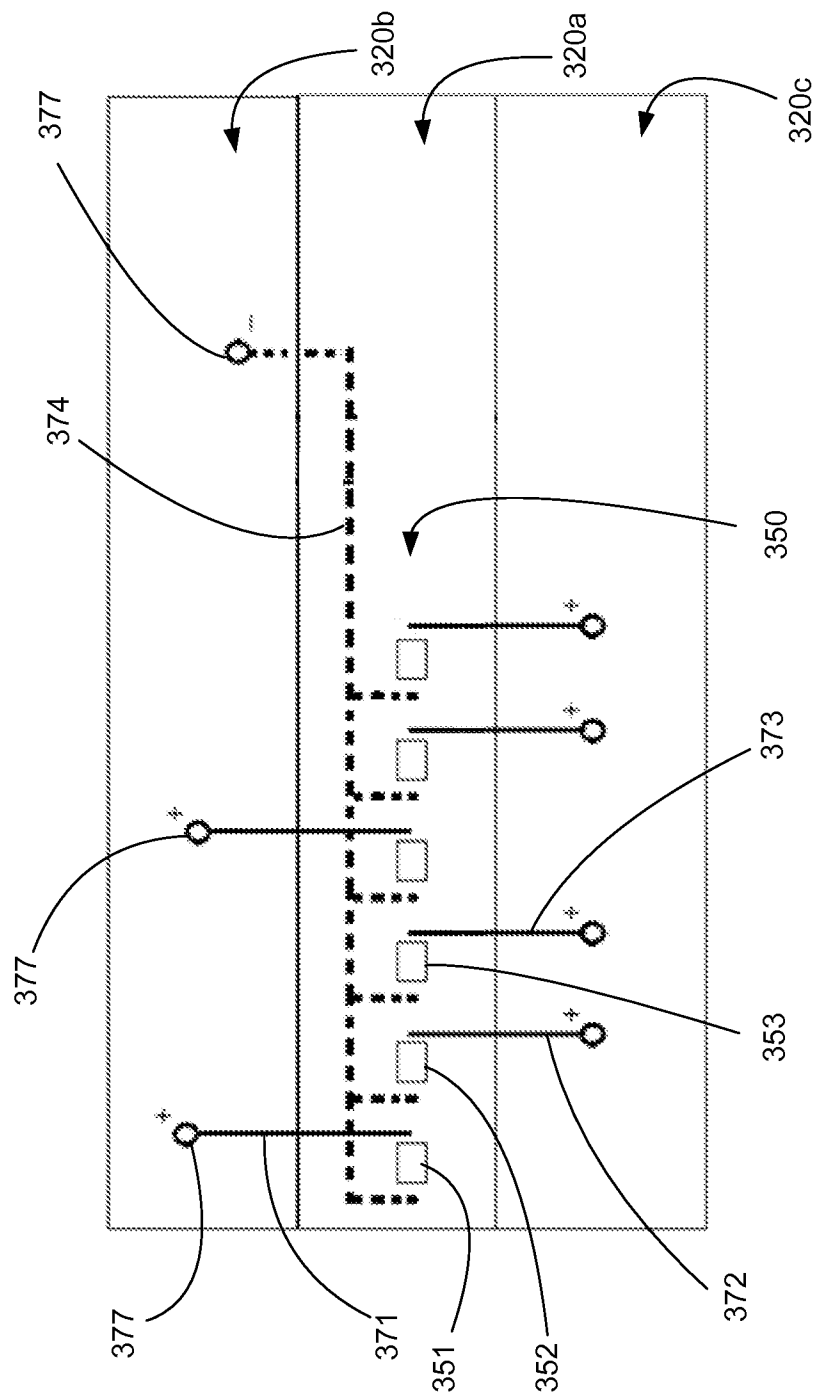
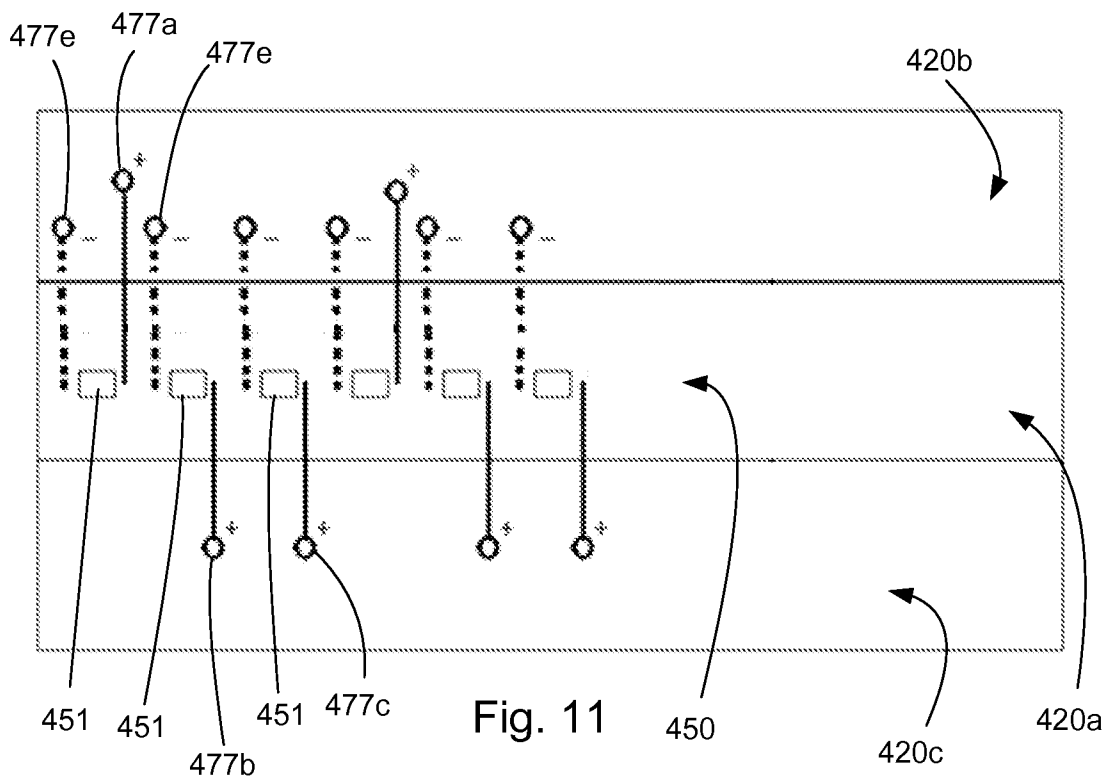
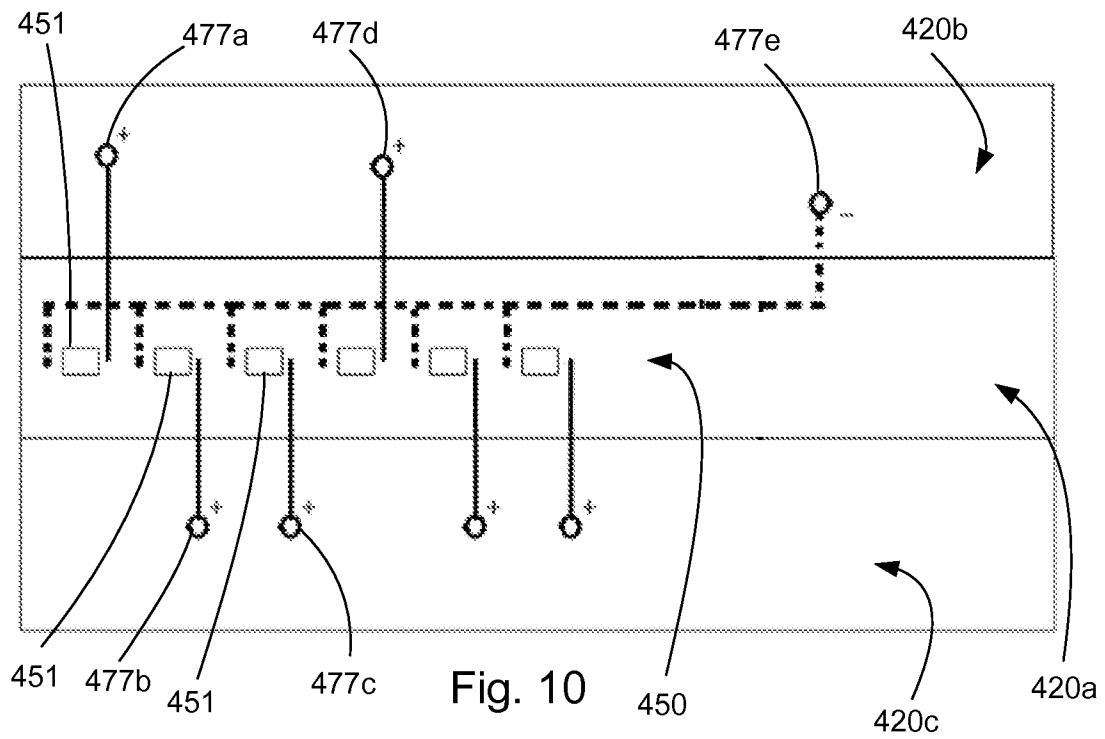
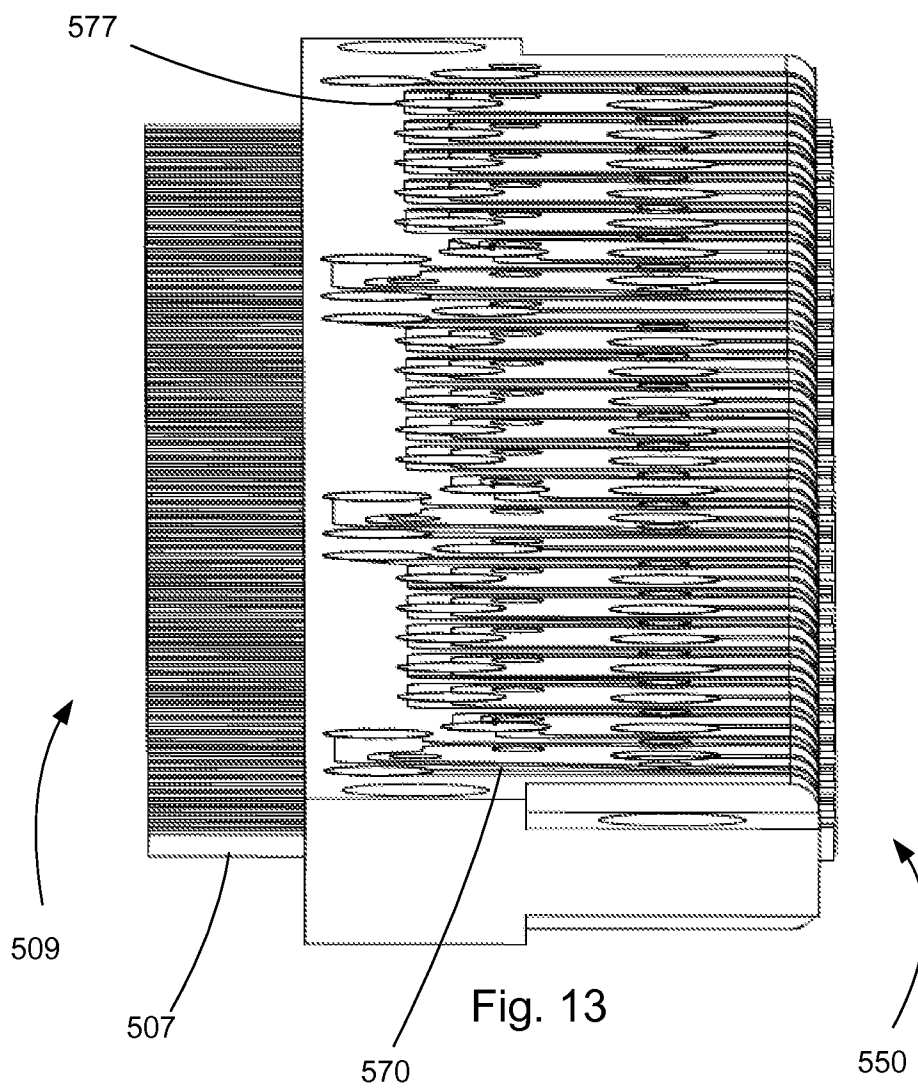
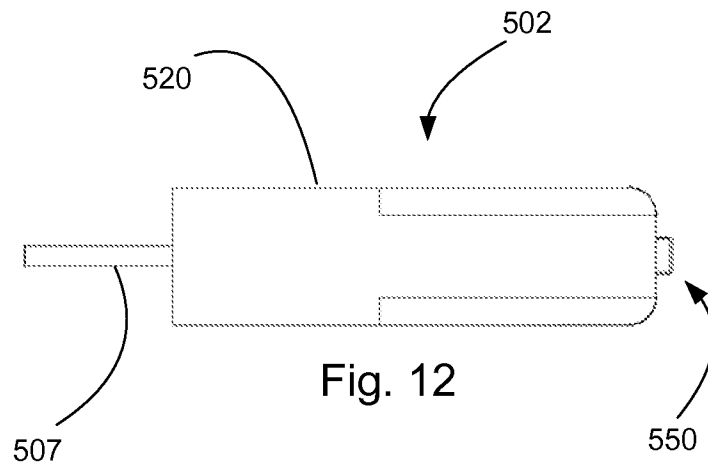


Fig. 9





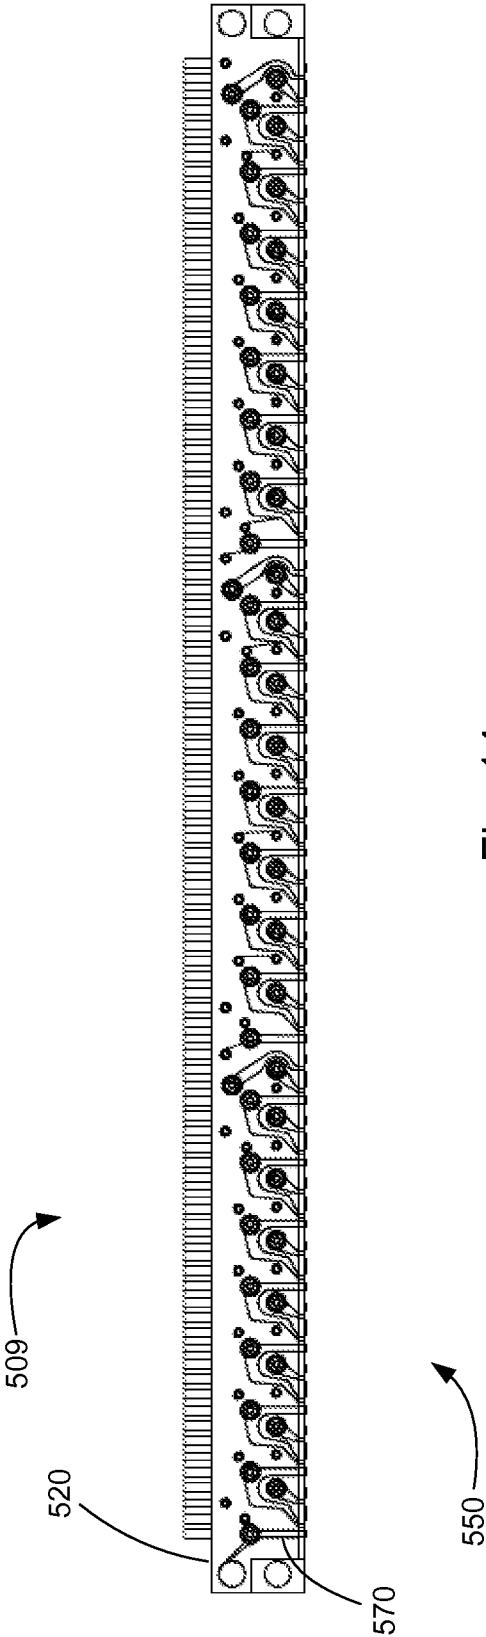


Fig. 14

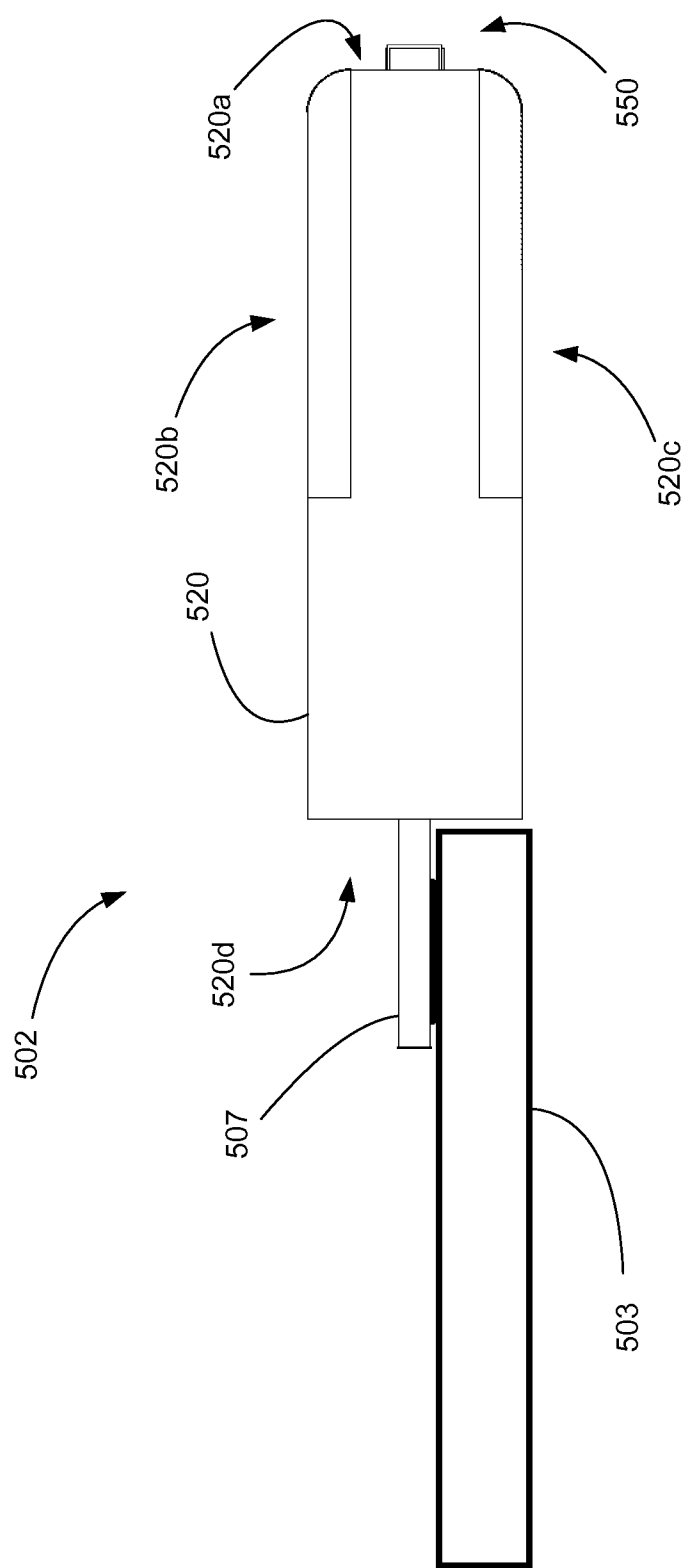
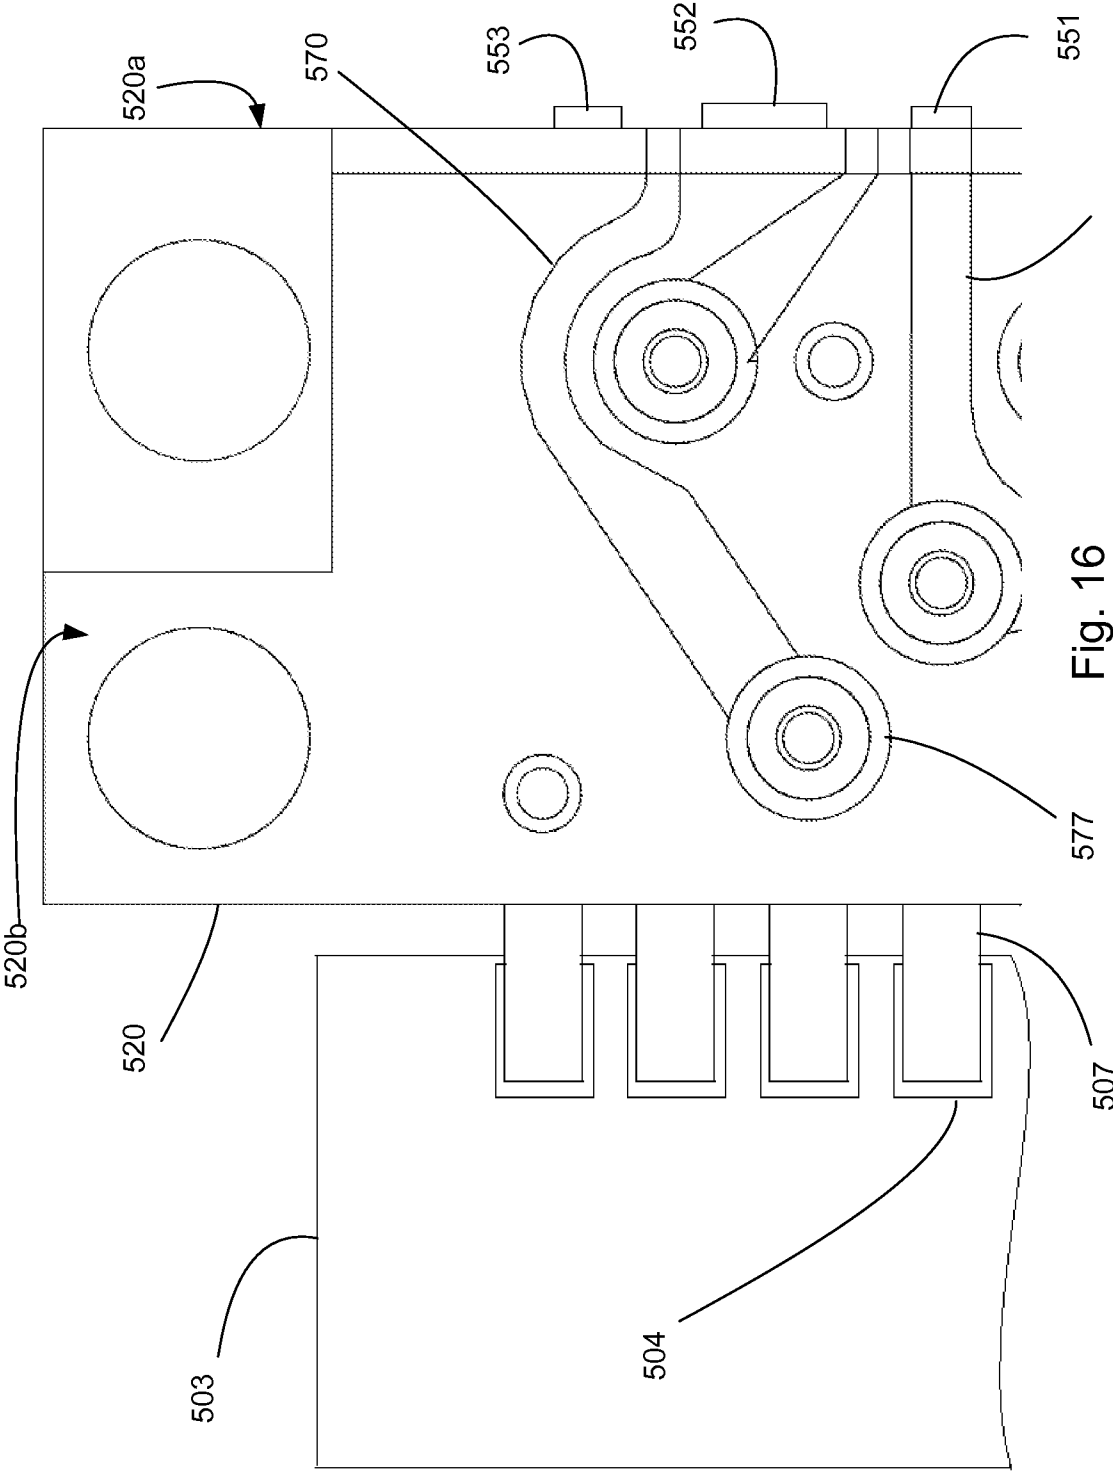
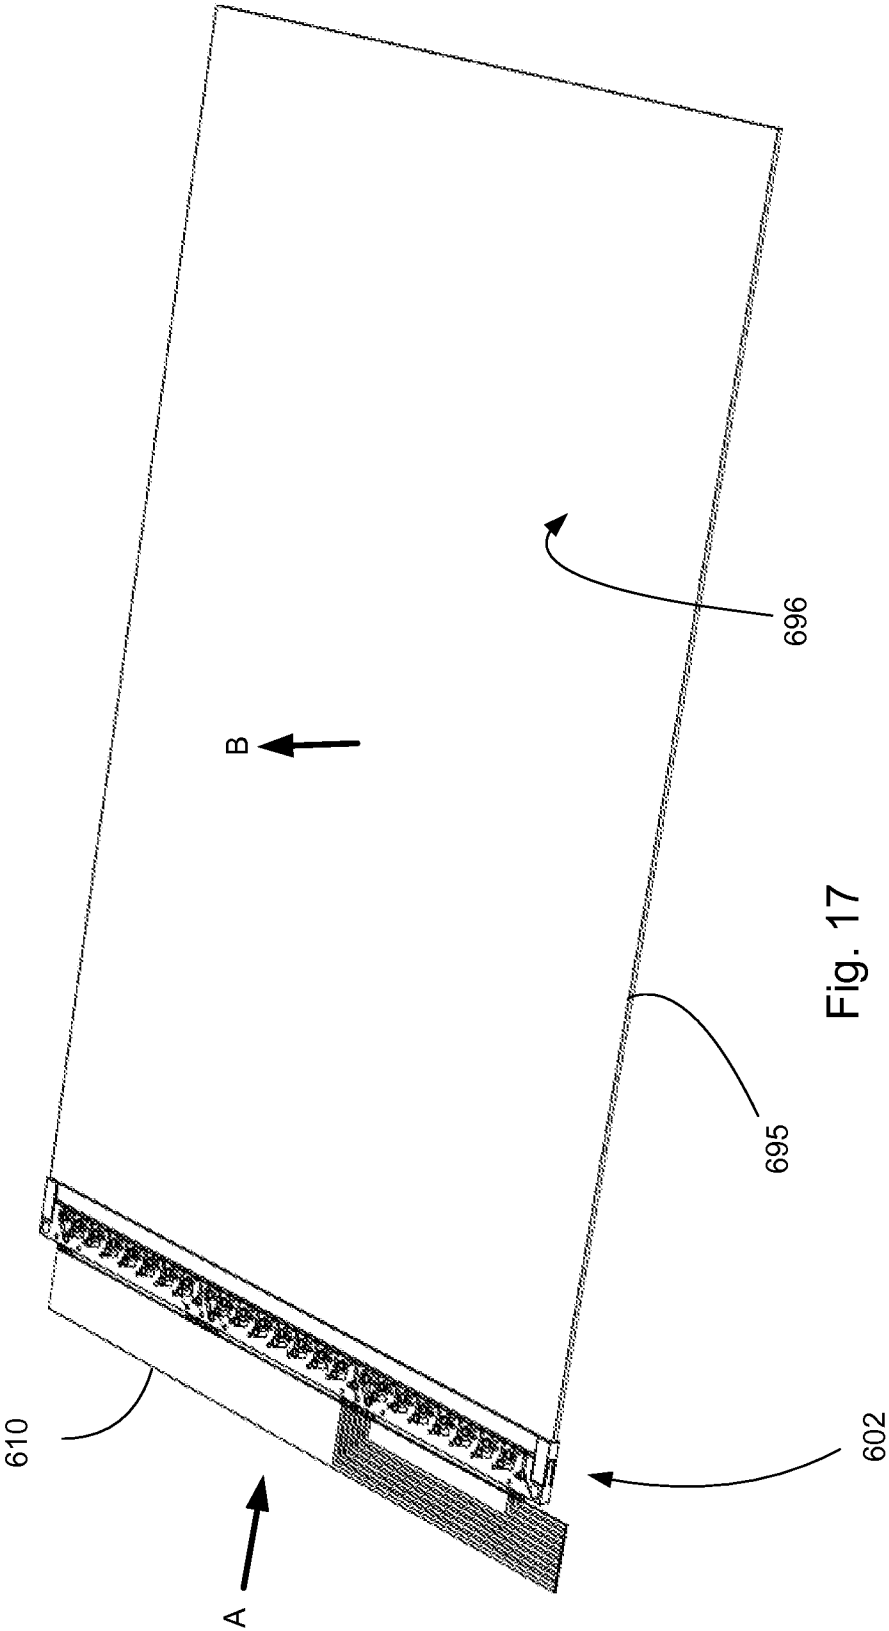


Fig. 15





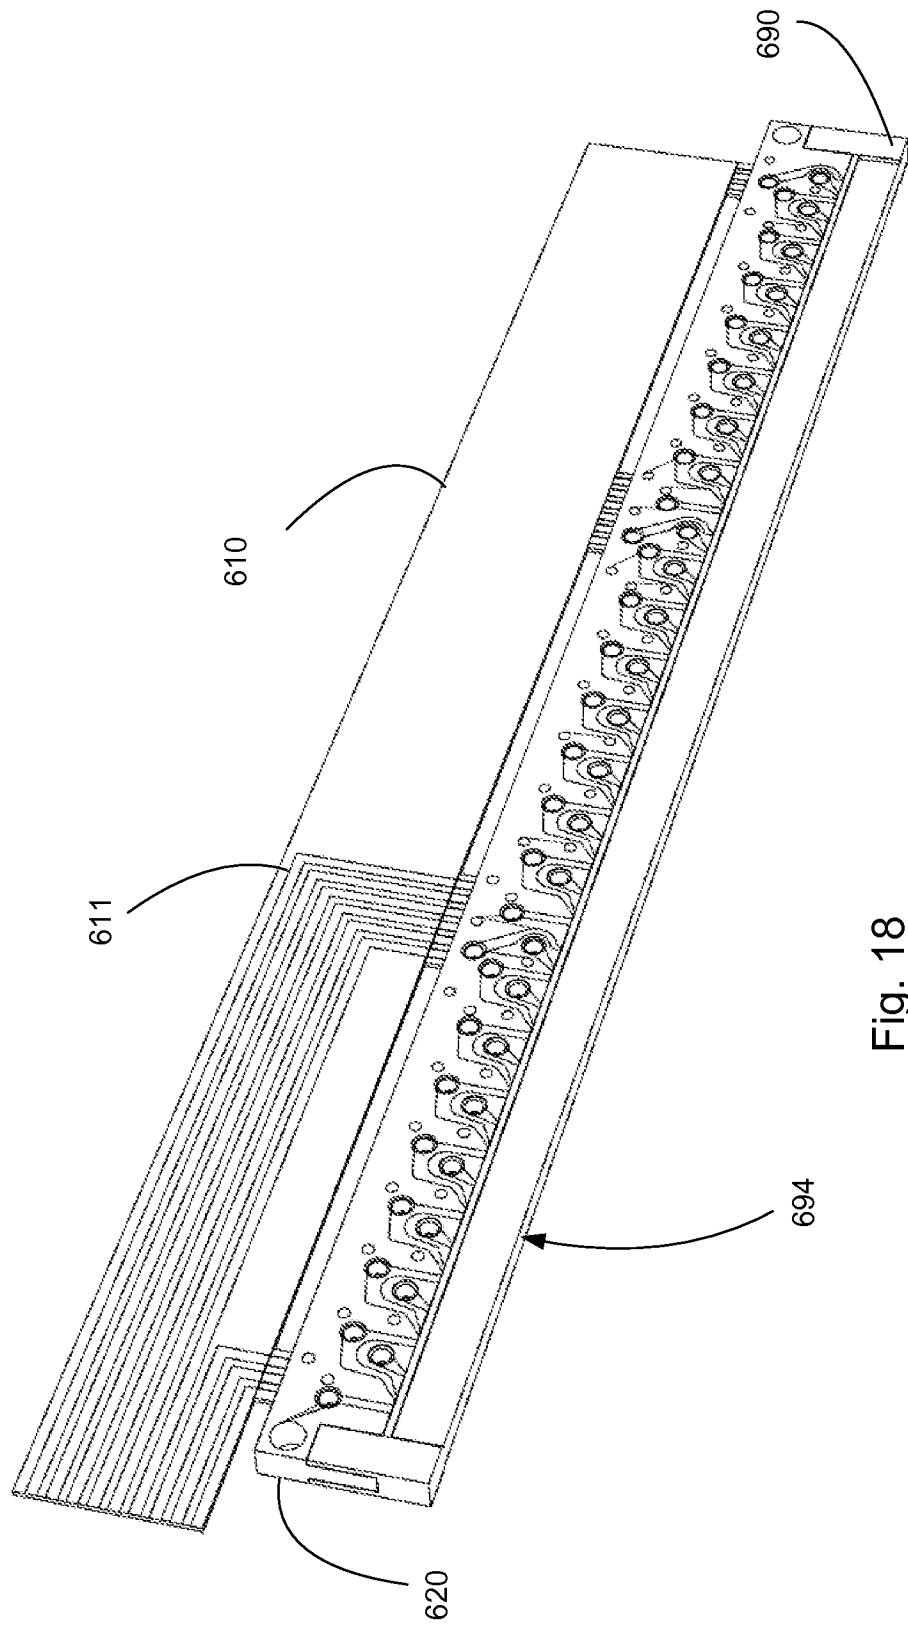


Fig. 18

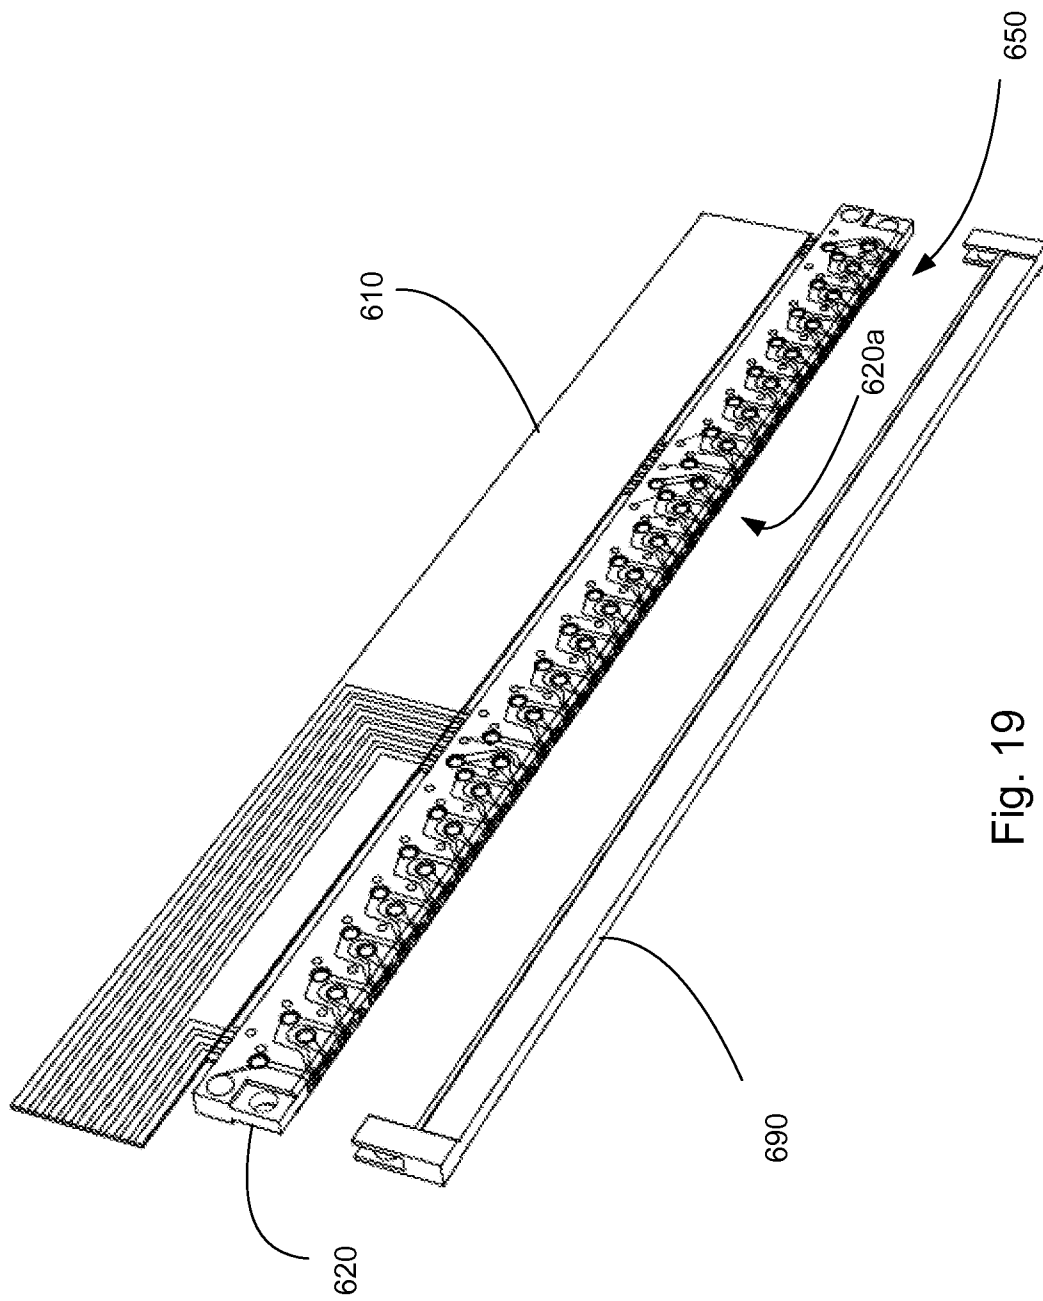
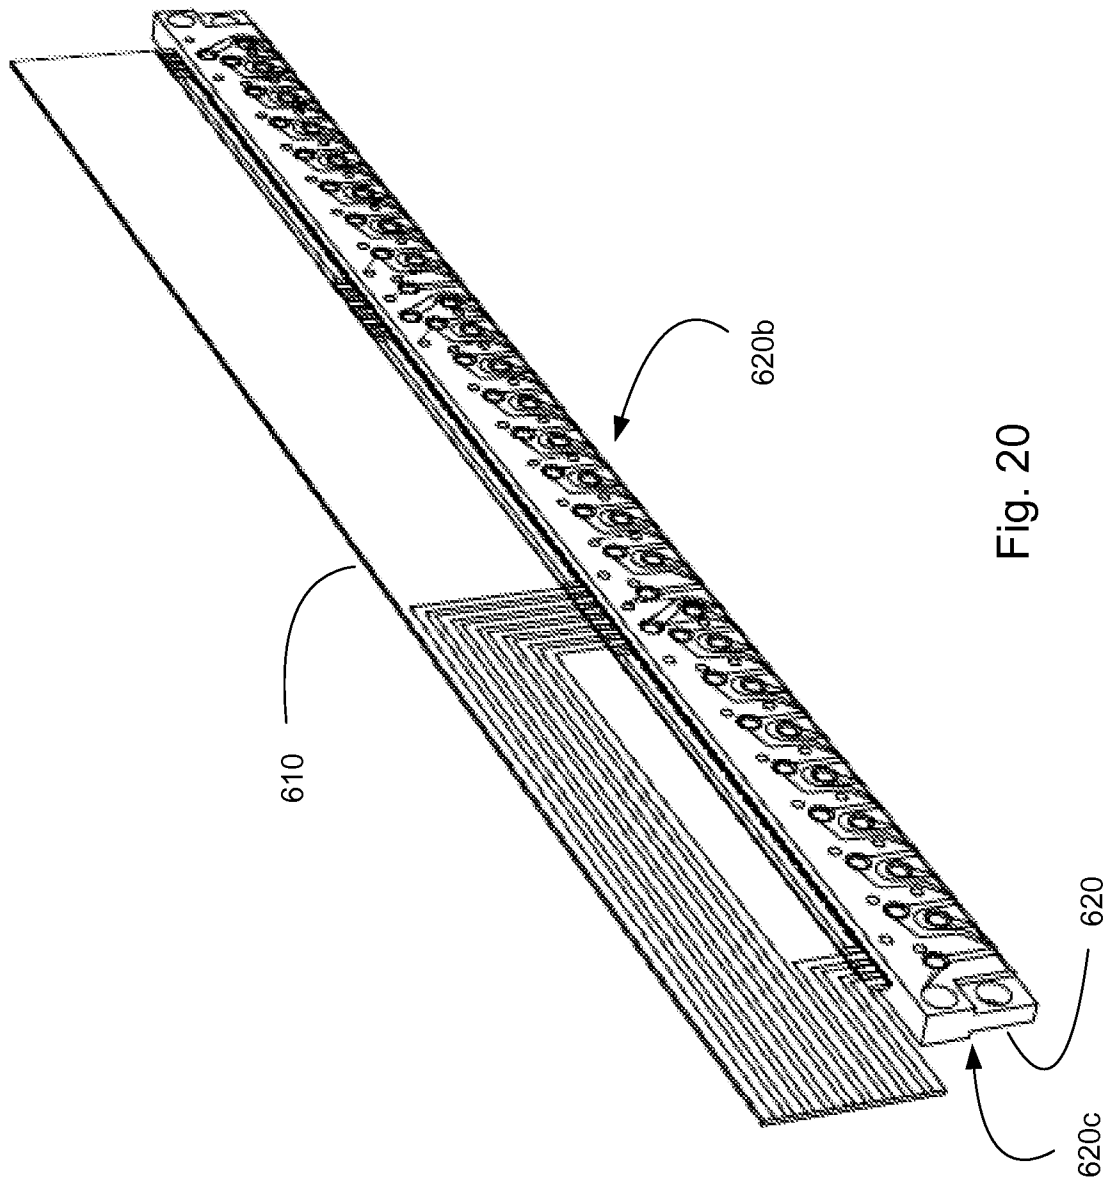


Fig. 19



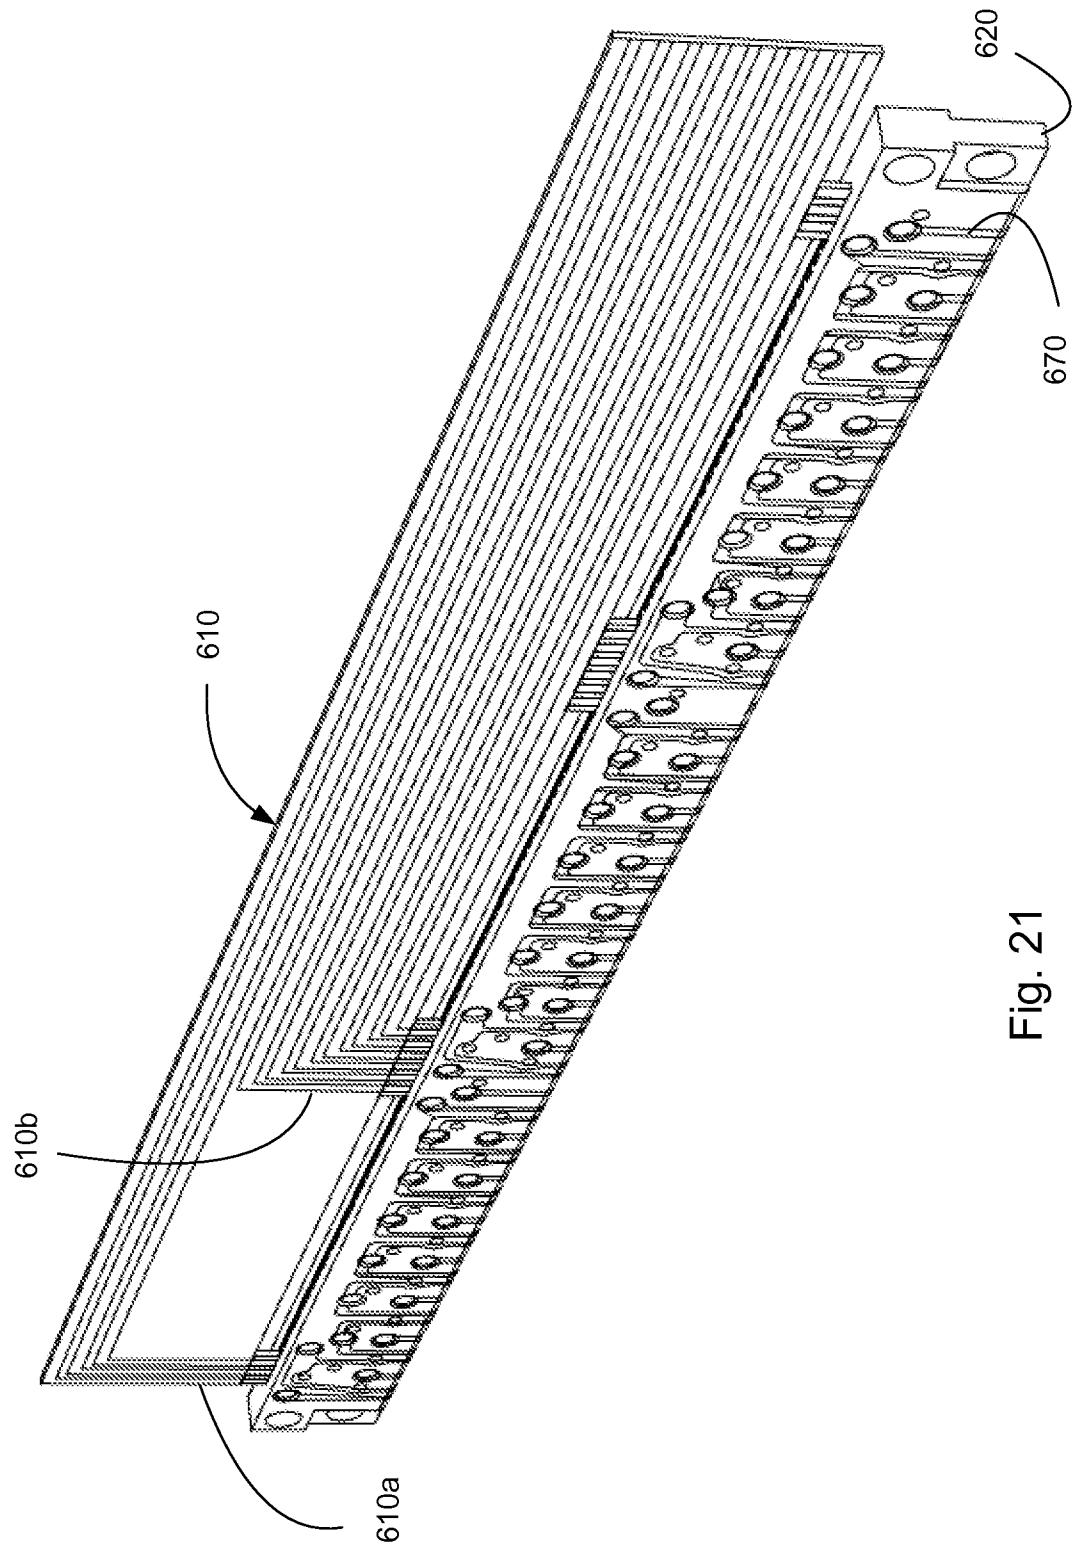


Fig. 21

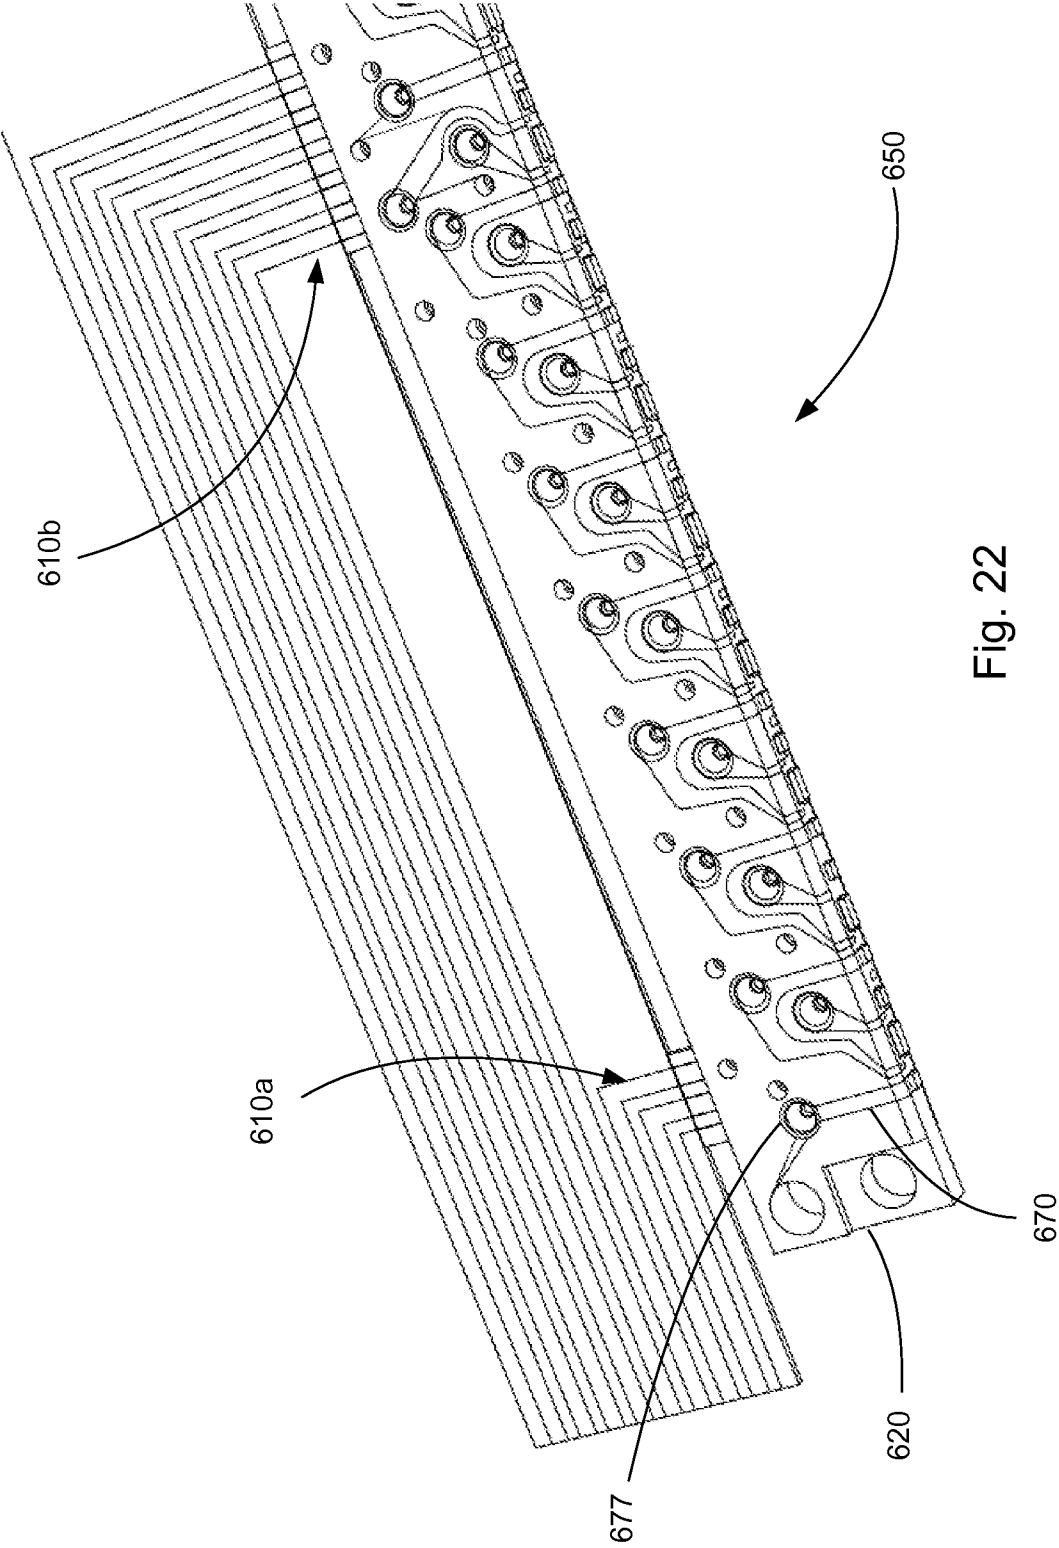


Fig. 22






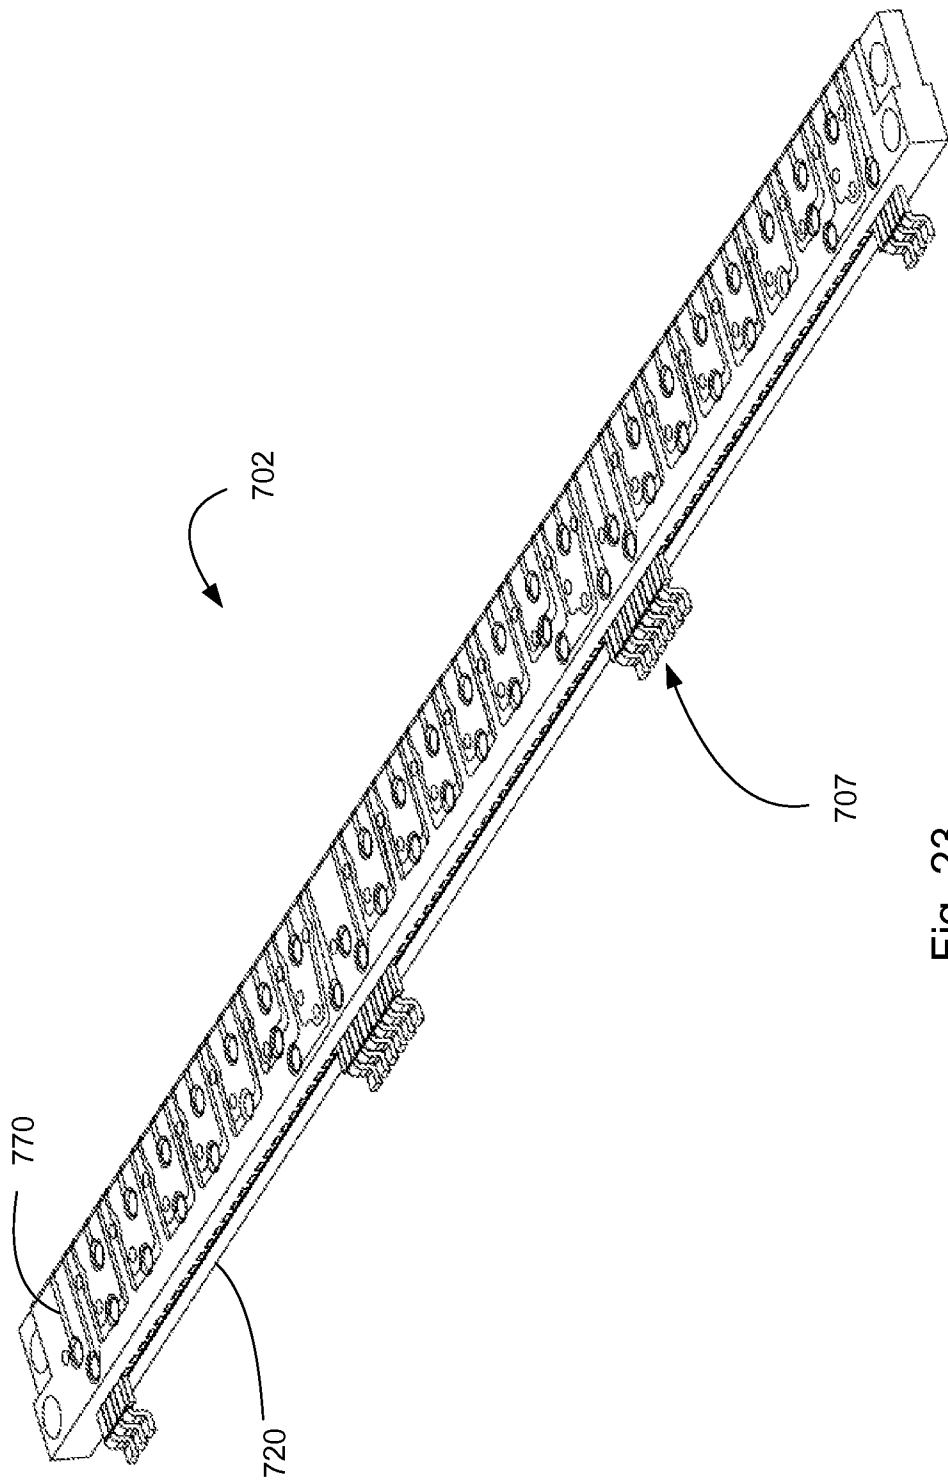


Fig. 23

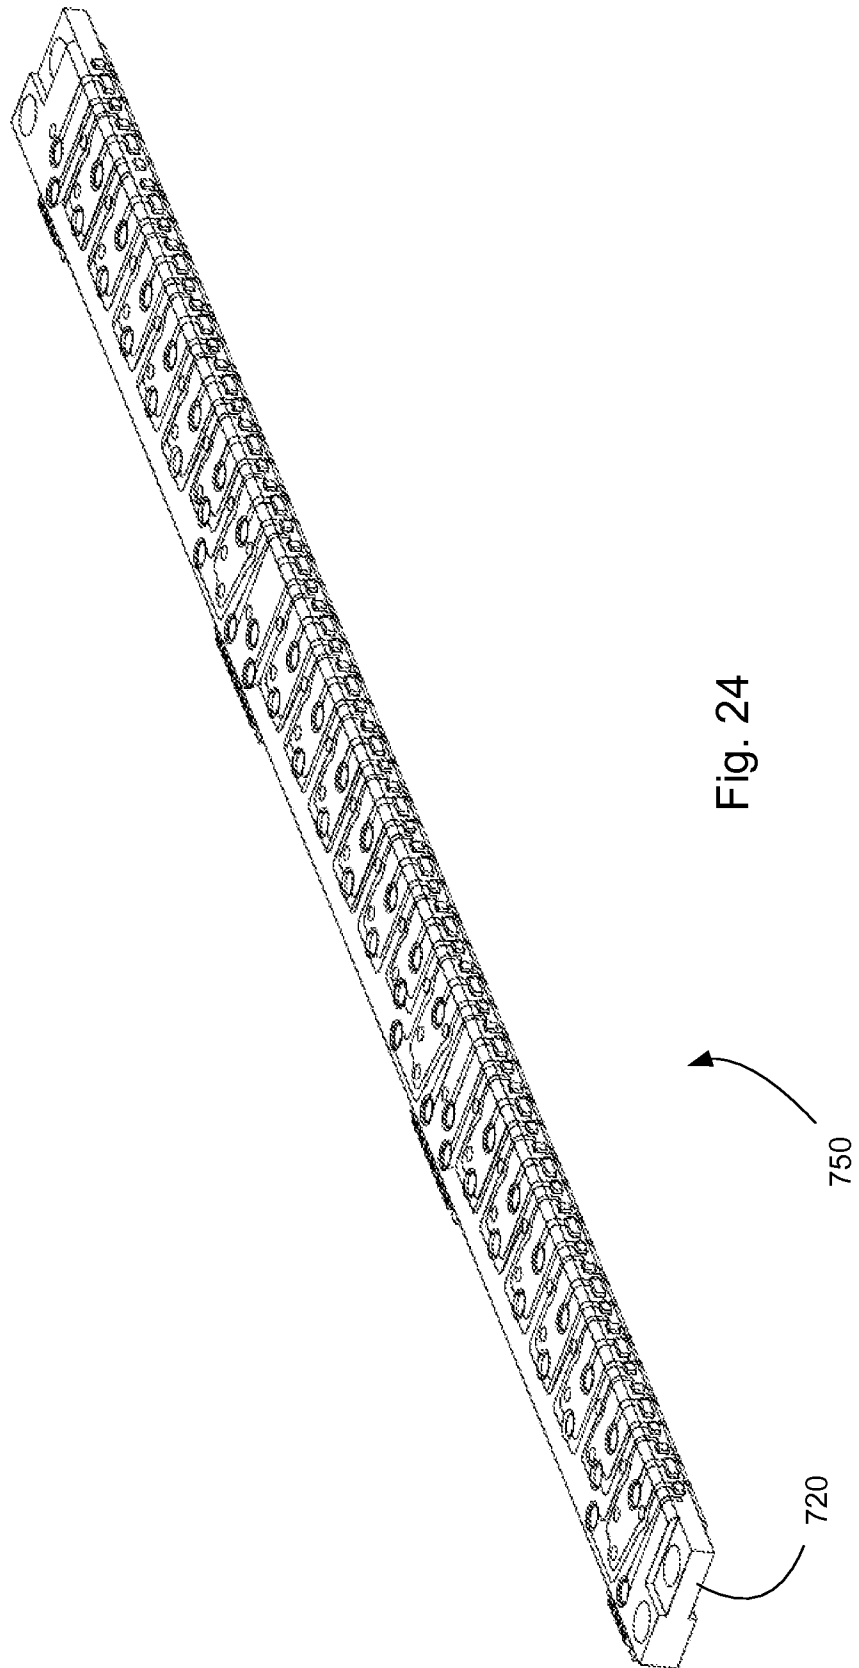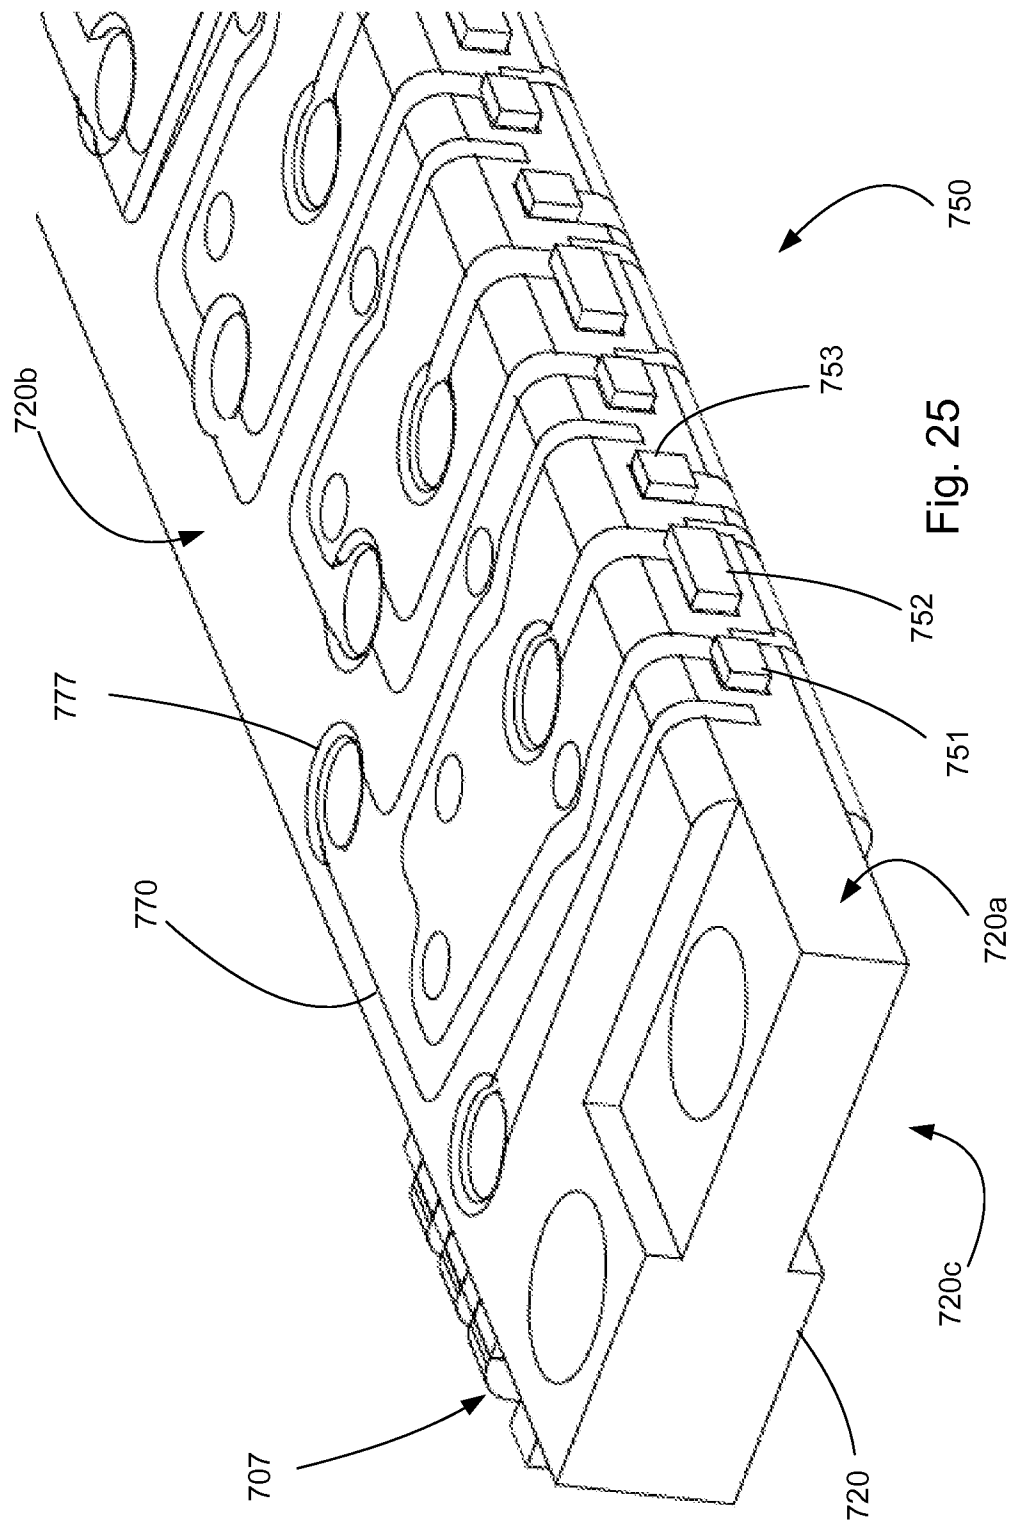

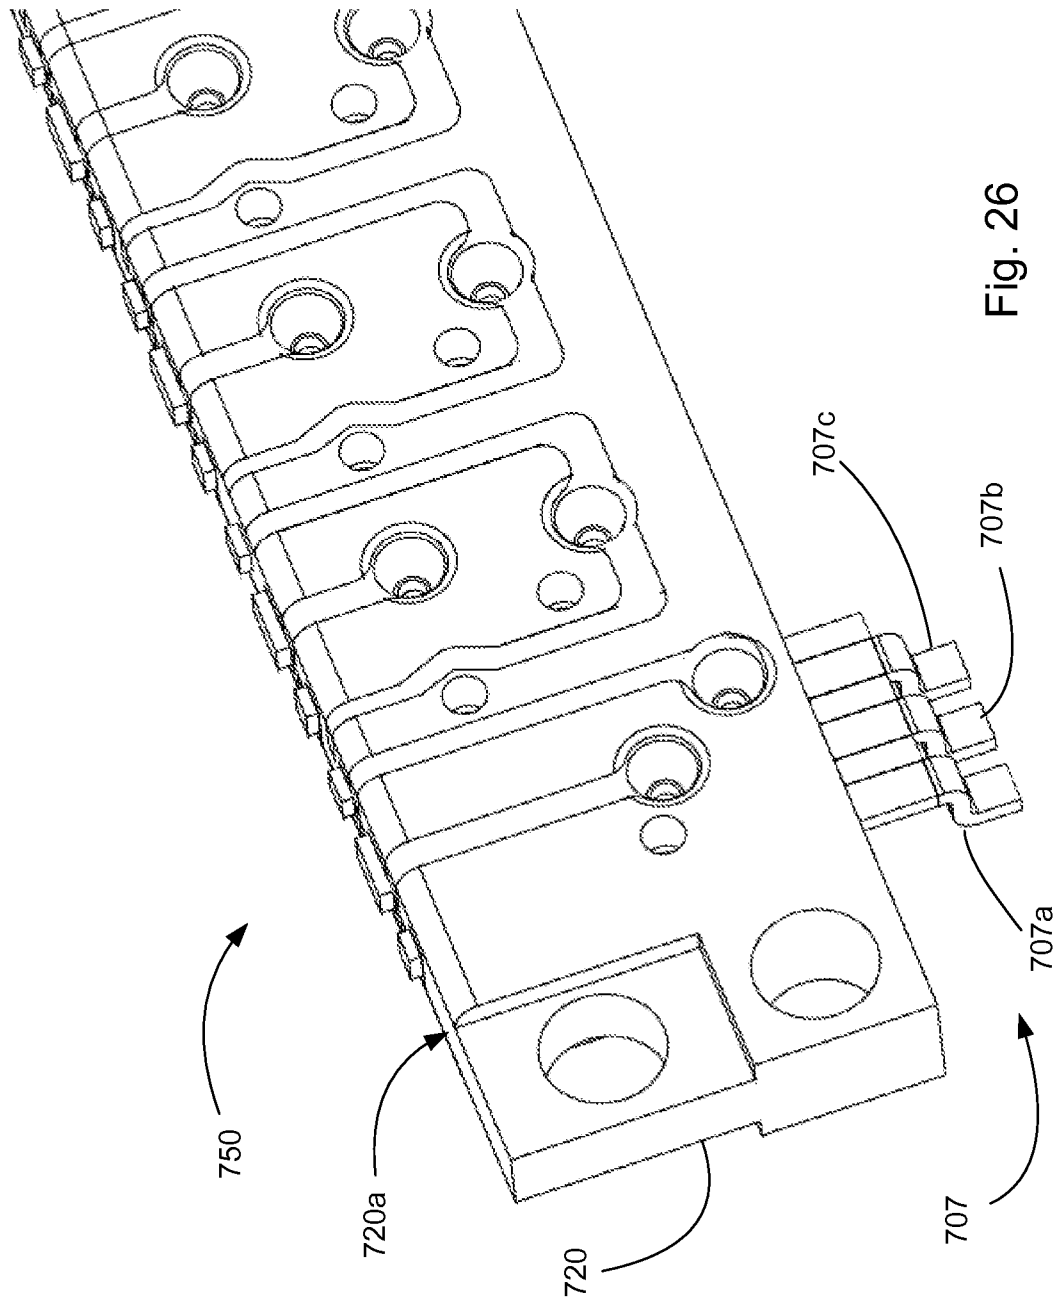

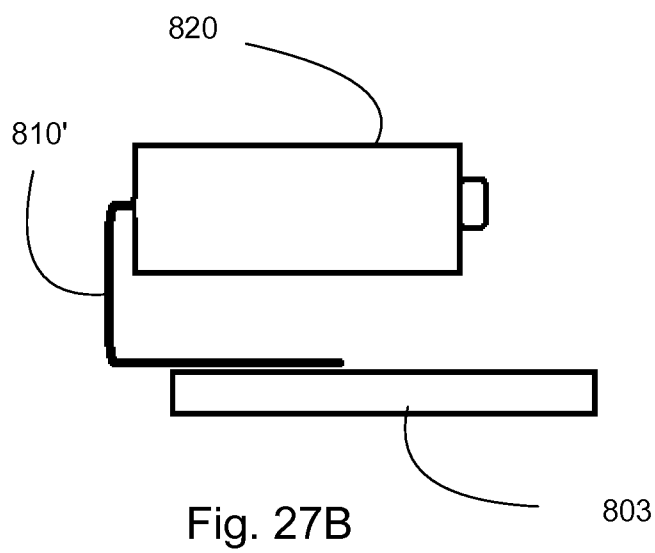

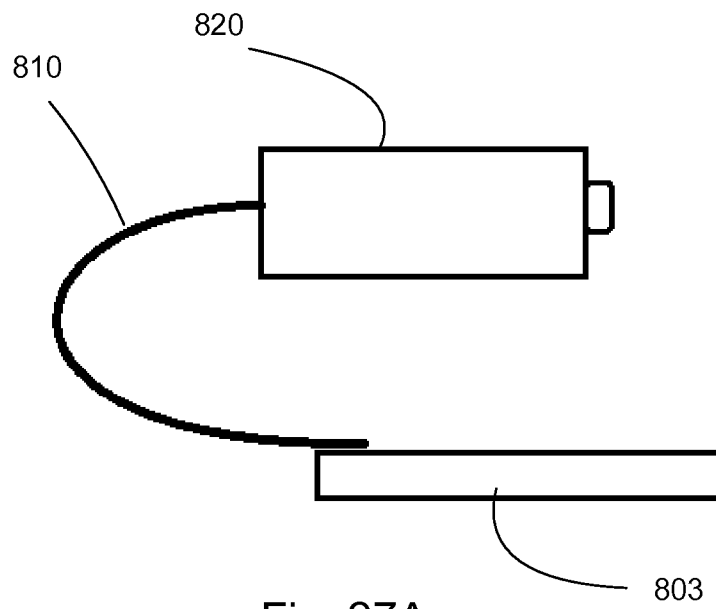

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2014/028652****A. CLASSIFICATION OF SUBJECT MATTER****F21V 17/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

F21V 17/00; F21S 2/00; F21V 5/00; H01L 33/60; H05K 1/14; G02F 1/1345; G02F 1/1335; H01L 33/62

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: frame, electroplated trace, mounting side, LED assembly

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                    | Relevant to claim No. |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | WO 2011-129202 A1 (NICHIA CORPORATION et al.) 20 October 2011<br>See abstract, paragraphs [0030]-[0058], claims 1-12 and figures 1-3. | 1-12                  |
| A         | WO 2012-049600 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V. et al.) 19 April 2012<br>See claims 14-23 and figures 3-5.                    | 1-12                  |
| A         | WO 2009-004894 A1 (SHARP KABUSHIKI KAISHA et al.) 08 January 2009<br>See abstract, claims 1-11 and figures 1-5.                       | 1-12                  |
| A         | KR 10-2011-0095868 A (CREE INC.) 25 August 2011<br>See pages 11-16 and figures 4-6.                                                   | 1-12                  |
| A         | US 2012-0182497 A1 (JUN QI et al.) 19 July 2012<br>See claims 1-25 and figures 4-11.                                                  | 1-12                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

28 July 2014 (28.07.2014)

Date of mailing of the international search report

**28 July 2014 (28.07.2014)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,  
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HWANG, Jae Youn

Telephone No. +82-42-481-8701



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2014/028652**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                                                                                                                               | Publication<br>date                                                                                          |
|-------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| WO 2011-129202 A1                         | 20/10/2011          | CN 103098247 A<br>EP 2560219 A1<br>KR 10-2013-0087374 A<br>TW 201203631 A<br>US 2013-0038246 A1                                                          | 08/05/2013<br>20/02/2013<br>06/08/2013<br>16/01/2012<br>14/02/2013                                           |
| WO 2012-049600 A1                         | 19/04/2012          | CN 103155189 A<br>EP 2628194 A1<br>JP 2013-545288 A<br>KR 10-2013-0138801 A<br>TW 201230416 A<br>US 2013-0248913 A1                                      | 12/06/2013<br>21/08/2013<br>19/12/2013<br>19/12/2013<br>16/07/2012<br>26/09/2013                             |
| WO 2009-004894 A1                         | 08/01/2009          | CN 101682987 A<br>EP 2164310 A1<br>EP 2164310 A4<br>US 2010-0182293 A1                                                                                   | 24/03/2010<br>17/03/2010<br>05/01/2011<br>22/07/2010                                                         |
| KR 10-2011-0095868 A                      | 25/08/2011          | CN 102203495 A<br>EP 2350520 A1<br>JP 2012-507139 A<br>TW 201025557 A<br>TW 201029146 A<br>US 2010-0103660 A1<br>US 2010-0127283 A1<br>WO 2010-047798 A1 | 28/09/2011<br>03/08/2011<br>22/03/2012<br>01/07/2010<br>01/08/2010<br>29/04/2010<br>27/05/2010<br>29/04/2010 |
| US 2012-0182497 A1                        | 19/07/2012          | US 8605232 B2                                                                                                                                            | 10/12/2013                                                                                                   |