



(51) International Patent Classification:

A61B 18/12 (2006.01) A61B 17/138 (2006.01)
A61B 17/285 (2006.01)

(21) International Application Number:

PCT/CN2015/077339

(22) International Filing Date:

24 April 2015 (24.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **COVIDIEN LP** [US/US]; c/o Covidien, 15
Hampshire Street, Mansfield, Massachusetts 02048 (US).

(72) Inventor; and

(71) Applicant (for MG only): **DING, Weijiang** [CN/CN]; 789
Puxing Road, Building 10 Pujiang, Minhang District,
Shanghai 201114 (CN).

(72) Inventor: **LIU, Kai**; 16 Group, Tianmashan Village, Hexi-
angqiao Town, Longhui, Hunan 722203 (CN).

(74) Agent: **CCPIT PATENT AND TRADEMARK LAW
OFFICE**; 8th Floor, Vantone New World Plaza, 2
Fuchengmenwai Street, Xicheng District, Beijing 100037
(CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTIFUNCTIONAL VESSEL SEALING AND DIVIDER DEVICE

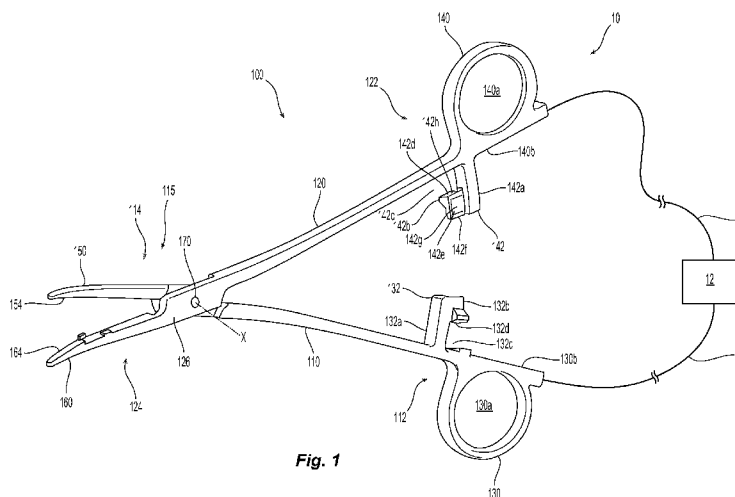


Fig. 1

(57) Abstract: An electrosurgical forceps (100) includes an end effector (115) including a first jaw member (150) having a proximal portion (150a) including a first jaw guide member (152b) and a distal portion (150b) including a first tissue contacting surface (154), and a second jaw member (160) having a proximal portion (160a) including a second jaw guide member (162b) and a distal portion (160b) including a second tissue contacting surface (164). The first and second tissue contacting surfaces (154, 164) each includes a shear edge (154d, 164d) disposed between stepped surfaces (154a, 154b, 164a, 164b). The jaw members (150, 160) are vertically movable between an open position and a first approximated position in which the tissue contacting surfaces (154, 164) vertically oppose and laterally align with each other, and laterally movable between the first approximated position and a second approximated position to laterally displace the tissue contacting surfaces (154, 164) with respect to each other. The jaw guide members (152b, 162b) control an open angle between the jaw members (150, 160) during movement between the first and second approximated positions.

MULTIFUNCTIONAL VESSEL SEALING AND DIVIDER DEVICE

BACKGROUND

1. Background of Related Art

[0001] The present disclosure relates to energy-based surgical instruments and, more particularly, to energy-based surgical forceps configured for treating and/or cutting tissue.

2. Technical Field

[0002] A forceps or hemostat is a plier-like instrument which relies on mechanical action between its jaws to grasp, clamp, and constrict tissue. Energy-based forceps utilize both mechanical clamping action and energy, e.g., electrosurgical energy, ultrasonic energy, light energy, microwave energy, heat, etc., to affect hemostasis by heating tissue to coagulate and/or cauterize tissue. Certain surgical procedures require more than simply cauterizing tissue and rely on the unique combination of clamping pressure, precise energy control, and gap distance (i.e., distance between opposing jaws when closed about tissue) to “seal” tissue. Typically, once tissue is sealed, the surgeon has to accurately sever the tissue along the newly formed tissue seal. Accordingly, many tissue sealing instruments have been designed to incorporate a blade that is movable with respect to a blade slot disposed in a jaw of the tissue sealing instrument to sever the tissue after forming a tissue seal.

[0003] Tissue sealing instruments that include a blade and blade slot, however, are typically single-use devices as the blade and blade slot may be difficult to clean, and the blade may wear and dull with repeated use. The incorporation of a blade slot into a jaw of a tissue sealing instrument may reduce the sealing strength of the jaw, and the

width of the blade slot may increase the width of the jaw which, in turn, may result in a reduction in the dissection capabilities of the tissue sealing instrument. Accordingly, such tissue sealing instruments may be suitable for blunt dissection, and a separate instrument, such as shears, may be needed for sharp dissection of tissues and/or vessels.

SUMMARY

[0004] The present disclosure is directed to reusable energy-based surgical instruments having movable, opposed jaw members that are configured for grasping, sealing, and blunt and fine dissecting of tissue.

[0005] In accordance with aspects of the present disclosure, an electrosurgical forceps includes an end effector including first and second jaw members. The first jaw member has a proximal portion including a first jaw guide member and a distal portion including a first tissue contacting surface. The second jaw member has a proximal portion including a second jaw guide member and a distal portion including a second tissue contacting surface. Each of the first and second tissue contacting surfaces have a shear edge disposed between stepped surfaces. The first and second jaw members are vertically movable between an open position and a first approximated position in which the first and second tissue contacting surfaces vertically oppose and laterally align with each other, and laterally movable between the first approximated position and a second approximated position to laterally displace the first and second tissue contacting surfaces with respect to each other. The first and second jaw guide members control an open angle between the first and second jaw members during

movement between the first approximated position and the second approximated position to aid in cutting tissue disposed therebetween.

[0006] In embodiments, the stepped surface of each of the first and second tissue contacting surfaces includes a base surface laterally disposed relative to a raised surface. The base and raised surfaces are connected by an intermediate wall that forms the shear edge at an intersection with the raised surface. In some embodiments, the distal portions of the first and second jaw members curve longitudinally and laterally away from the proximal portions of the first and second jaw members.

[0007] In embodiments, the first and second guide surfaces include opposed oblique walls that slide laterally relative to each other during movement from the first approximated position to the second approximated position. In some embodiments, the proximal portion of the first jaw member includes a slot defined in an outer edge thereof and the proximal portion of the second jaw member includes a complementary tab for reception within the slot.

[0008] The electrosurgical forceps may further include first and second elongated shaft members that cooperate to define the end effector. The first jaw member is disposed on a distal end portion of the first elongated shaft member and the second jaw member is disposed on a distal end portion of the second elongated shaft member. The first and second elongated shaft members are coupled together by a pivot pin extending through openings defined in respective first and second intersection portions of the first and second elongated shaft members. At least one of the first and second elongated shaft members is pivotable with respect to the other of the first and second shaft members about at least two axes.

[0009] In some embodiments, the pivot pin includes a semispherical head disposed within the opening defined in the first intersection portion and a cylindrical shaft extending through the opening defined in the second intersection portion. In some embodiments, the pivot pin includes a hemi-cylindrical head disposed within the opening defined in the first intersection portion and a cylindrical shaft extending through the opening defined in the second intersection portion.

[0010] In embodiments, the first intersection portion includes an inner surface having a substantially flat proximal portion, an oblique distal portion, and a convex portion disposed at a distal end of the oblique distal portion, and the second intersection portion includes a substantially flat inner surface and a concave surface disposed at a distal end of the substantially flat inner surface. In some embodiments, the first intersection portion includes a cam face disposed between the substantially flat proximal portion and the oblique distal portion.

[0011] Proximal end portions of the first and second elongated shaft members may include first and second handle members, respectively. The first handle member includes a first guide member and the second handle member includes a second guide member. Each of the first and second guide members includes a body portion extending generally vertically from an inner surface of the respective first and second handle member, a leg portion extending substantially perpendicularly from the body portion, and a gap defined between an upper surface of the leg portion and the inner surface of the respective first and second handle member. The leg portions of the first and second guide members are longitudinally aligned and laterally offset with respect to each another.

[0012] In embodiments, when the first and second handle members are in the open position the first and second guide members are spaced apart, and when the first and second handle members are in the first approximated position, the inner surfaces of the leg portions of the first and second guide members contact with each other. In some embodiments, when the first and second handle members are in the first approximated position, the inner surfaces of the legs portions of the first and second guide members are locked relative to each other. In some embodiments, when the first and second handle members are in the first approximated position, a bottom surface of the body portion of the first guide member contacts an inner surface of the second elongated shaft member. In embodiments, when the first and second handle members are in the second approximated position, the upper surfaces of the leg portions of the first and second guide members contact each other. In embodiments, outer surfaces of the leg portions of the first and second guide members each include a protrusive surface to prevent movement of the first and second handle members from the open position to the first approximated position when the outer surfaces are aligned with each other.

[0013] In accordance with aspects of the present disclosure, a method of treating tissue includes: vertically moving at least one of first and second handle members of an electrosurgical forceps towards the other of the first and second handle members to move first and second jaw members of the electrosurgical forceps from an open position to a first approximated position in which first and second tissue contacting surfaces are opposed and substantially aligned with each other to grasp tissue therebetween; and laterally moving at least one of the first and second handle members towards the other

of the first and second handle members from the first approximated position to a second approximated position to cut tissue disposed between the first and second jaw members by crossing shear edges defined on the first and second tissue contacting surfaces.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Various aspects and features of the present disclosure are described herein with reference to the drawings wherein corresponding reference characters indicate corresponding parts throughout the drawings, and wherein:

[0015] FIG. 1 is a side, perspective view of a surgical system including an open electrosurgical forceps connected to an electrosurgical energy source in accordance with an embodiment of the present disclosure;

[0016] FIG. 2 is a perspective view of the forceps of FIG. 1 with parts separated;

[0017] FIG. 3 is a perspective view of inner surfaces of first and second elongated shaft members of the forceps of FIG. 2;

[0018] FIG. 4 an enlarged, perspective view of a distal end portion of the forceps of FIG. 1;

[0019] FIG. 5A is a side, perspective view of the forceps of FIG. 1 during movement from an open position towards a first approximated position;

[0020] FIG. 5B is an enlarged view of a portion of the forceps of FIG. 5A shown along the area of detail 5B identified in FIG. 5A;

[0021] FIG. 6A is a side, perspective view of the forceps of FIG. 1 in a first approximated position;

[0022] FIG. 6B is an enlarged view of a portion of the forceps of FIG. 6A shown along the area of detail 6B identified in FIG. 6A;

[0023] FIG. 6C is an enlarged view of a portion of the forceps of FIG. 6A shown along the area of detail 6C identified in FIG. 6A during movement towards the first approximated position;

[0024] FIG. 6D is an enlarged view of the portion of the forceps shown in FIG. 6C in a locked state in the first approximated position;

[0025] FIG. 6E is an enlarged view of a portion of the forceps of FIG. 6A shown along the area of detail 6E identified in FIG. 6A;

[0026] FIG. 6F is a cross-sectional view a portion of the forceps of FIG. 6A taken along line 6F-6F of FIG. 6A;

[0027] FIG. 7A is a side, perspective view of a proximal end portion of a forceps in accordance with another embodiment of the present disclosure;

[0028] FIG. 7B is an enlarged view of a portion of the forceps of FIG. 7A shown along the area of detail 7B identified in FIG. 7A;

[0029] FIG. 7C is an enlarged front view of the portion of the forceps of FIG. 7B;

[0030] FIG. 8A is a side, perspective view of the forceps of FIG. 1 during movement from the first approximated position to a second approximated position;

[0031] FIG. 8B is an enlarged view of a portion of the forceps of FIG. 8A shown along the area of detail 8B identified in FIG. 8A;

[0032] FIG. 8C is an enlarged view of a portion of the forceps of FIG. 8A shown along the area of detail 8C identified in FIG. 8A;

[0033] FIG. 9 is a top view, in partial cross-section, of the forceps of FIG. 8A in the second approximated position;

[0034] FIGS. 10A-10C are top and side views of jaw members of a forceps in accordance with another embodiment of the present disclosure in a first approximated position, during movement from the first approximated position to a second approximated position, and in the second approximated position, respectively;

[0035] FIGS. 11A-11C are top and side views of jaw members of a forceps in accordance with yet another embodiment of the present disclosure in a first approximated position, during movement from the first approximated position to a second approximated position, and in the second approximated position, respectively;

[0036] FIGS. 12A-12C are top and side views of jaw members of a forceps in accordance with another embodiment of the present disclosure in a first approximated position, during movement from the first approximated position to a second approximated position, and in the second approximated position, respectively;

[0037] FIGS. 13A-13C are top and side views of jaw members of a forceps in accordance with another embodiment of the present disclosure in a first approximated position, during movement from the first approximated position to a second approximated position, and in the second approximated position, respectively;

[0038] FIG. 14A is a side perspective view the forceps of FIG. 1 with misaligned handle members;

[0039] FIG. 14B is an enlarged view of a portion of the forceps of FIG. 14A shown along the area of detail 14B identified in FIG. 14A;

[0040] FIG. 15A is a side, perspective view of a forceps in accordance with another embodiment of the present disclosure;

[0041] FIG. 15B is a perspective cross-sectional view of a portion of the forceps of FIG. 15A taken along line 15B-15B of FIG. 15A;

[0042] FIG. 16 is a side perspective view of the forceps of FIG. 15A with parts separated; and

[0043] FIG. 17 is a schematic illustration of a work station configured for use with a forceps of the present disclosure.

DETAILED DESCRIPTION

[0044] In this disclosure, the term “proximal” refers to a portion of a structure closer to an operator, while the term “distal” refers to a portion of the same structure further from the operator. As used herein, the term “subject” refers to a human patient or animal. The term “operator” refers to a doctor (e.g., a surgeon), a nurse, and other clinicians or care providers, and may include support personnel. The terms “generally,” “substantially,” and “about” shall be understood as words of approximation that take into account relatively little to no variation in the modified term(s). Reference terms, such as “horizontal,” “vertical,” “upper,” “lower,” “above,” “below,” and the like, are intended to ease description of the embodiments and are not intended to have any limiting effect on the ultimate orientations of the surgical instruments, or any parts thereof.

[0045] Referring now to FIGS. 1-4, an energy-based surgical system 10 in accordance with the present disclosure is configured for grasping, electrically sealing, mechanically cutting, and dissecting tissue and/or vessels in open and/or laparoscopic surgical procedures. The energy-based surgical system 10 includes a reusable forceps 100 releasably connected to an electrosurgical energy source 12 via cable 14 and 16.

[0046] The forceps 100 includes a first elongated shaft member 110 pivotably coupled to a second elongated shaft member 120. The first elongated shaft member 110 includes proximal and distal end portions 112 and 114, respectively, and the second elongated shaft member 120 includes proximal and distal end portions 122 and 124, respectively. The proximal end portions 112 and 122 of the first and second shaft members 110 and 120 include first and second handle members 130 and 140, respectively. The first and second handle members 130 and 140 are configured to allow an operator to effect movement of at least one of the first and second shaft members 110 and 120 relative to the other. The distal end portions 114 and 124 of the first and second shaft members 110 and 120 cooperate to define an end effector assembly 115 having opposed first and second jaw members 150 and 160.

[0047] The first and second handle members 130 and 140 each define a finger hole 130a and 140a, respectively, therethrough for receiving a finger of an operator. The finger holes 130a and 140a facilitate movement of the first and second handle members 130 and 140 relative to each other. The first and second handle members 130 and 140 are each monolithically formed with its respective shaft member 110 and 120. Alternatively, the first and second handle members 130 and 140 may each be engaged with its respective shaft member 110 and 120 in any suitable configuration, e.g., via mechanical engagement, molding, adhesion, etc.

[0048] The first handle member 130 includes a first guide member 132 extending from an inner surface 130b of the first handle member 130 towards the second handle member 140. The first guide member 132 includes a body portion 132a extending generally vertically towards the second handle member 140 and a leg portion 132b

extending substantially perpendicularly from the body portion 132a such that the body portion 132a and the leg portion 132b have a general L-shaped configuration and define a gap 132c between the inner surface 130b of the first handle member 130 and an upper surface 132d of the leg portion 132b of the first guide member 132. The leg portion 132b includes an inner surface 132e (see e.g., FIG. 2) having a curved lower surface 132f, a substantially flat intermediate surface 132g, and a recessed upper surface 132h. The leg portion 132b also includes an outer surface 132i (see e.g., FIG. 3) having a substantially flat lower surface 132j and a protrusive upper surface 132k.

[0049] Similarly, the second handle member 140 includes a second guide member 142 extending from an inner surface 140b of the second handle member 140 towards the first handle member 130. The second guide member 142 includes a body portion 142a extending generally vertically towards the second handle member 140 and a leg portion 142b extending substantially perpendicularly from the body portion 142a such that the body portion 142a and the leg portion 142b have a general L-shaped configuration and define a gap 142c between the inner surface 140b of the first second member 140 and an upper surface 142d of the leg portion 142b of the second guide member 142. The leg portion 142b includes an inner surface 142e having a curved lower surface 142f, a substantially flat intermediate surface 142g, and a recessed upper surface 142h. The leg portion 142b also includes an outer surface 142i (see e.g., FIG. 2) having a substantially flat lower surface 142j and a protrusive upper surface 142k.

[0050] The first and second guide members 132 and 142 are disposed on the first and second handle members 130 and 140 with the body portions 132a and 142a longitudinally offset and laterally spaced with respect to one another and the leg

portions 132b and 142b aligned such that the leg portions 132b and 142b interact with each other upon movement of the first and second handle members 130 and 140, as described in further detail below.

[0051] The first shaft member 110 intersects the second shaft member 120 at intersection portions 116 and 126 of the first and second shaft members 110 and 120, respectively. The intersection portion 116 of the first shaft member 110 defines an opening 116a therethrough. As best seen in FIG. 3, an inner surface 116b of the intersection portion 116 includes a substantially flat proximal portion 116c, an oblique distal portion 116d, a cam face 116e disposed at the intersection of the proximal portion 116c with the distal portion 116d, and a convex plate 116f attached to a distal end of the distal portion 116d.

[0052] As best seen in FIG. 3, the intersection portion 126 of the second shaft member 120 includes an opening 126a defined through a substantially flat inner surface 126b of the intersection portion 126 and a concave plate 126c attached to a distal end of the inner surface 126b that is complementary in shape with the convex plate 116f of the intersection portion 116 of the first shaft member 110. It should be understood that in lieu of the convex and concave plates 116f and 126c, the inner surfaces 116b and 126b of the intersection portions 116 and 126 may be contoured to include surface geometries corresponding to that of the convex and concave plates 116f and 126c.

[0053] A pivot pin 170 is positioned through the openings 116a and 126a defined in the intersection portions 116 and 126 of the first and second shaft members 110 and 120 such that movement of the first and second handle members 130 and 140 effect corresponding movement of the first and second jaw members 150 and 160 relative to

each other. As best seen in FIG. 2, the pivot pin 170 includes a substantially semispherical head 172 disposed in the opening 116a of the first shaft member 110 and a cylindrical shaft 174 extending through the opening 126a defined in the second shaft member 120 such that the second shaft member 120 pivots about the cylindrical shaft 174 about an "x" axis (FIG. 1) and the first shaft member 110 is pivotable about the semispherical head 172.

[0054] The first and second jaw members 150 and 160 extend distally from the intersection portions 116 and 126 of the first and second shaft members 110 and 120. Proximal portions 150a and 160a of the first and second jaw members 150 and 160 extend longitudinally from the intersection portions 116 and 126, and distal portions 150b and 160b include curved first and second tissue contacting surfaces 154 and 164, respectively, that distally extend longitudinally and laterally away from the proximal portions 150a and 160a of the first and second jaw members 150 and 160.

[0055] As best seen in FIG. 4, the proximal portion 150a of the first jaw member 150 includes a substantially flat inner surface 152, a slot 152a defined in an outer edge of the inner surface 152 and disposed adjacent to the distal portion 150b of the first jaw member 150, and a jaw guide 152b disposed on the inner surface 152 and having an oblique wall 152c extending from the inner surface 152 of the first jaw member 150 to a raised surface 152d of the jaw guide 152b. The proximal portion 160a of the second jaw member 160 includes a substantially flat inner surface 162 and a tab 162a extending from an outer edge of the inner surface 162 that is substantially aligned with the slot 152a of the first jaw member 150. Together, the slot 152a and the tab 162a act as a positioning mechanism to ensure that the first and second jaw members 150 and

160 are properly aligned when approximated. The proximal portion 160a also includes a jaw guide 162b disposed on the inner surface 162 and having an oblique walls 162c extending from the inner surface 162 of the second jaw member 160 to a raised surface 162d of the jaw guide 162b. The oblique walls 152c and 162c are complementary in shape and are aligned with each other. The oblique walls 152c and 162c and/or the raised surfaces 152d and 162d are configured to mate with each other upon movement of the first and second handle members 130 and 140 to control an open angle between the first and second jaw members 150 and 160, as described in further detail below.

[0056] The first and second tissue contacting surfaces 154 and 164 of the first and second jaw members 150 and 160 define complementary stepped surfaces which together grasp, seal, and/or cut tissue disposed therebetween. The first tissue contacting surface 154 includes a lower, base surface 154a and an upper, raised surface 154b that are laterally disposed relative to each other. An intermediate wall 154c extends perpendicular to, and connects, the base and raised surfaces 154a and 154b. A shear edge 154d is formed at the intersection of the raised surface 154b and the intermediate wall 154c.

[0057] Similarly, as described above with respect to the first tissue contacting surface 154, the second tissue contacting surface 164 includes a lower base surface 164a laterally disposed relative to an upper, raised surface 164b, and an intermediate wall 164c extending between and connecting the base and raised surfaces 164a and 164b. A shear edge 164d is disposed at the intersection of the raised surface 164b and the intermediate wall 164c.

[0058] The forceps 100 are formed from an electrically conductive material, e.g., a metal such as stainless steel, and is configured to conduct electrosurgical energy therethrough. The forceps 100 are covered in an insulative coating, such as a heat insulating paint, except on the tissue contacting surfaces 154 and 164 of the first and second jaw members 150 and 160. Accordingly, the forceps 110 are insulated at all surfaces that contact each other except at the tissue contacting surfaces 154 and 164 of the first and second jaw members 150 and 160 which together constitute a pair of electrodes for sealing tissue. In embodiments, the portions of the forceps 100 that contact other portions of the forceps 100, such as the intersection portions 116 and 126 and the first and second guide members 130 and 140 may be covered in a wear-resistant insulation material, such as an insert, sheet, or other suitable layer of material.

[0059] In one method of using the energy based surgical system 10 of the present disclosure, the forceps 100 is placed at a desired surgical site and the first and second jaw members 150 and 160 are positioned in an open position around desired tissue and/or vessel(s). As shown in FIG. 1, in the open position, the first and second handle members 130 and 140 and the first and second jaw members 150 and 160 are spaced apart from each other. As discussed above, the first and second jaw members 150 and 160 are movable relative to each other in response to movement of the first and second handle members 130 and 140.

[0060] The forceps 100 is moved into a first, approximated position by pivoting at least one of the first and second handle members 130 and 140 towards the other about the "x" axis to grasp and/or seal tissue disposed between the first and second jaw members 150 and 160. As shown in FIGS. 5A and 5B, as the first and second handle

members 130 and 140 are moved vertically towards one another in the direction of arrows A and B, respectively, the convex plate 116f of the first elongated shaft member 110 abuts the inner surface 126b of the second elongated shaft member 120 so that the first and second elongated shaft members 110 and 120 are only rotatable about the “x” axis. Upon further closing, as shown in FIGS. 6A-6E, the convex plate 116f of the first elongated shaft member 110 contacts the concave plate 126c of the second elongated shaft member 120 (FIG. 6B) at about the same time that the inner surfaces 132e and 142e of the first and second guide members 130 and 140 (FIG. 6C) contact each other so that the first and second elongated shaft members 110 and 120 continue to rotate only about the “x” axis. As shown in FIG. 6D, the first and second guide members 130 and 140 may be latched together by locking the recessed upper surfaces 132h and 142h of the first and second guide members 130 and 140 relative to each other. In this first approximated position, as shown in FIG. 6E and 6F, the first and second jaw members 150 and 160 are approximated such that the slot 152a of the first jaw member 150 receives the tab 162a of the second jaw member 160, and the tissue contacting surfaces 154 and 164 are diametrically opposed to one another such that the base surface 154a of the first jaw member 150 is aligned with the raised surface 164b of the second jaw member 160 and the raised surface 154b of the first jaw member 150 is aligned with the base surface 164a of the second jaw member 160.

[0061] In the first approximated position, the electrosurgical energy source 12 (FIG. 1) may be activated to apply electrosurgical energy to tissue grasped between the first and second tissue contacting surfaces 154 and 164 of the first and second jaw members 150 and 160. The electrosurgical energy source 12 may be manually

activated/deactivated by actuating a trigger, button, foot pedal, among other switches within the purview of those skilled in the art.

[0062] When sealing is complete and the electrosurgical energy source 12 is shut off, the first and second handle members 130 and 140 may be returned to the open position (FIG. 1) to release tissue held between the first and second tissue contacting surfaces 154 and 164 of the first and second jaw members 150 and 160, or the first and second jaw members 150 and 160 may be moved to a second approximated position to cut the tissue disposed therebetween.

[0063] Alternatively, as shown in FIGS. 7A-7C, the electrosurgical energy source 12 (FIG. 1) may be automatically activated/deactivated upon movement of the first and second handle members 130 and 140 relative to each other. The electrosurgical energy source 12 is activated by pressing a bottom surface 142m of the body portion 142a of the second guide member 142 into contact with an inner surface 130c of the first handle member 130 to close the electrical circuit and energize the tissue contacting surfaces of the first and second jaw members 150 and 160 (FIG. 6A) to seal tissue disposed therebetween. In such embodiments, the bottom surface 142m of the body portion 142a of the second guide member 142 and the corresponding portion of the inner surface 130c of the first handle member 130 is free of insulative material. The electrosurgical energy source 12 is deactivated when the first and second handle members 130 and 140 are opened or moved to the second approximated position.

[0064] As shown in FIGS. 8A-8C, to move the forceps 100 to the second approximated position, the first and second handle members 130 and 140 are pressed in the directions of arrows C and D, respectively, and pivot around a “y” axis which is

substantially perpendicular to the “x” axis such that the upper surfaces 132d and 142d of the first and second guide members 132 and 142 abut and substantially align (FIG. 8B). The inner surface 126b of the second elongate shaft 120 presses against the cam face 116e of the first elongated shaft 110 during movement of the first and second handle members 130 and 140 to prevent the first and second elongated shaft members 110 and 120 from moving in other directions (see e.g., FIG. 9). This lateral movement of the first and second handle member 130 and 140 causes corresponding movement of the first and second jaw members 150 and 160 such that the oblique walls 152c and 162c of the jaw guides 152b and 162b slide relative to each other (FIG. 8C) to open the first and second jaw members 150 and 160 at an angle “ α ” with respect to each other. At the same time, the shear edges 154d and 164d of the tissue contacting surfaces 154 and 164 start to cut tissue (not shown) from a leading end portion of the first and second jaw members 150 and 160. As shown in FIG. 9, in the second, approximated position, the oblique distal portion 116d of the intersection portion 116 of the first elongated shaft member 110 abuts the inner surface 126b of the intersection portion 126 of the second elongated shaft member 120 and the tissue contacting surfaces 154 and 164 are laterally offset with respect to each another such that the shear edges 154d and 164d cross each other to cut tissue. When cutting is complete, the first and second handle members 130 and 140 are moved back to the open position (FIG. 1).

[0065] As shown in FIGS. 10A-13C, the relationship between the flat and raised surfaces of the first and second tissue contacting surfaces 152 and 162 may be arranged in a variety of configurations to change the force and/or distance required to move the first and second handle members 130 and 140 from the first approximated

position to the second approximated position. For example, as shown in FIGS. 10A-10C, leading end portions 151' and 161' of first and second tissue contacting surfaces 152' and 162' of first and second jaw members 150' and 160' are configured to be at an angle with respect to each other when in the first approximated position, and to start cutting tissue at the leading end portions 151' and 161' of the first and second tissue contacting surfaces 152' and 162'. As shown in FIGS. 11A-11C, first and second tissue contacting surfaces 152'' and 162'' are configured to be substantially parallel in the first approximated position and to start cutting tissue at leading end portions 151'' and 161'' of the first and second tissue contacting surfaces 152'' and 162'' of the first and second jaw members 150'' and 160''. The first and second jaw members 150' and 160' of FIGS. 10A-10C require minimal force to cut tissue, but require movement over a greater distance than the first and second jaw members 150'' and 160'' of FIGS. 11A-11C, which require more force to cut but less lateral movement. The first and second tissue contacting surfaces 152''' and 162''' of the first and second jaw members 150''' and 160''' of FIGS. 12A-12C cut tissue along the entire length of the shear edges of the first and second tissue contacting surfaces 152''' and 162''' at the same time and require more force and less lateral movement. The first and second jaw members 150''' and 160''' of FIGS. 13A-13C are configured to start cutting tissue from the trailing end portions 153''' and 163''' of the first and second tissue contacting surfaces 152''' and 162''', the angle that the jaw members 150''' and 160''' open being inverse to that of FIGS. 10A-10C.

[0066] As shown in FIGS. 14A-14B, the first and second guide members 132 and 142 of the first and second handle members 130 and 140 prevent misalignment of the first and second jaw members 150 and 160 during closure of the forceps 100. If the first

and second handle members 130 and 140 are misaligned, the protrusive upper surfaces 132k and 142k on the outer surfaces 132i and 142i of the first and second guide members 132 and 142 prevent movement of the first and second handle members 130 and 140 toward the first approximated position.

[0067] Turning now to FIGS. 15A-16, a forceps 100' in accordance with another embodiment of the present disclosure includes a first elongated shaft member 110 pivotably connected to a second elongated shaft member 120 via a pivot pin 170'. The pivot pin 170' includes a hemi-cylindrical head 172' defining an opening 172a therethrough and a cylindrical shaft 174' including a first end 174a configured to be secured within the opening 172a of the head 172' and a flanged second end 174b. The hemi-cylindrical head 172' is positioned in the opening 116a defined in the first intersection portion 116 of the first elongated shaft member 110 and the shaft 174' is positioned through the opening 126a defined in the intersection portion 126 of the second elongated shaft member 120 such that the flanged second end 174b secures the shaft 174' to the second elongated shaft member 120. The hemi-cylindrical head 172' ensures that the first elongated shaft member 110 can only rotate around an axis that is substantially perpendicular to the "x" axis during cutting and cannot sway in other directions, and the shaft 174' ensures that the second elongated shaft member 120 is rotatable only about the "x" axis. In some embodiments, as shown in FIG. 15B, an insulation insert or sheet 176 may be positioned between the intersection portions 116 and 126 of the first and second elongated shaft members 110 and 120 to electrically isolate the first and second elongated shaft members 110 and 120 from each other.

[0068] The embodiments disclosed herein may also be configured to work with robotic surgical systems and what is commonly referred to as “Telesurgery.” Such systems employ various robotic elements to assist the operator and allow remote operation (or partial remote operation) of surgical instrumentation. Various robotic arms, gears, cams, pulleys, electric and mechanical motors, etc. may be employed for this purpose and may be designed with a robotic surgical system to assist the operator during the course of an operation or treatment. Such robotic systems may include remotely steerable systems, automatically flexible surgical systems, remotely flexible surgical systems, remotely articulating surgical systems, wireless surgical systems, modular or selectively configurable remotely operated surgical systems, etc.

[0069] The robotic surgical systems may be employed with one or more consoles that are next to the operating theater or located in a remote location. In this instance, one team of surgeons or nurses may prep a subject (e.g., a patient) for surgery and configure the robotic surgical system with one or more of the instruments disclosed herein while another surgeon (or group of surgeons) remotely control the instruments via the robotic surgical system. As can be appreciated, a highly skilled surgeon may perform multiple operations in multiple locations without leaving his/her remote console which can be both economically advantageous and a benefit to the patient or a series of patients.

[0070] The robotic arms of the surgical system are typically coupled to a pair of master handles by a controller. The handles can be moved by the surgeon to produce a corresponding movement of the working ends of any type of surgical instrument (e.g., end effectors, graspers, knives, scissors, etc.) which may complement the use of one or

more of the embodiments described herein. The movement of the master handles may be scaled so that the working ends have a corresponding movement that is different, smaller or larger, than the movement performed by the operating hands of the surgeon. The scale factor or gearing ratio may be adjustable so that the operator can control the resolution of the working ends of the surgical instrument(s).

[0071] The master handles may include various sensors to provide feedback to the surgeon relating to various tissue parameters or conditions, e.g., tissue resistance due to manipulation, cutting or otherwise treating, pressure by the instrument onto the tissue, tissue temperature, tissue impedance, etc. As can be appreciated, such sensors provide the surgeon with enhanced tactile feedback simulating actual operating conditions. The master handles may also include a variety of different actuators for delicate tissue manipulation or treatment further enhancing the surgeon's ability to mimic actual operating conditions.

[0072] As shown in FIG. 17, a medical work station is shown generally as work station 1000 and generally may include a plurality of robot arms 1002 and 1003; a control device 1004; and an operating console 1005 coupled with control device 1004. Operating console 1005 may include a display device 1006, which may be set up in particular to display three-dimensional images; and manual input devices 1007 and 1008, by means of which an operator (not shown), for example a surgeon, may be able to telemanipulate robot arms 1002 and 1003 in a first operating mode.

[0073] Each of the robot arms 1002 and 1003 may include a plurality of members, which are connected through joints, and an attaching device 1009 and 1011, to which may be attached, for example, a surgical tool "ST" supporting an end effector 1100, in

accordance with any one of several embodiments disclosed herein, as will be described in greater detail below.

[0074] Robot arms 1002 and 1003 may be driven by electric drives (not shown) that are connected to control device 1004. Control device 1004 (e.g., a computer) may be set up to activate the drives, in particular by means of a computer program, in such a way that robot arms 1002 and 1003, their attaching devices 1009 and 1011 and thus the surgical tool (including end effector 1100) execute a desired movement according to a movement defined by means of manual input devices 1007 and 1008. Control device 1004 may also be set up in such a way that it regulates the movement of robot arms 1002 and 1003, and/or of the drives.

[0075] Medical work station 1000 may be configured for use on a patient 1013 lying on a patient table 1012 to be treated in a minimally invasive manner by means of end effector 1100. Medical work station 1000 may also include more than two robot arms 1002 and 1003, the additional robot arms likewise being connected to control device 1004 and being telemanipulatable by means of operating console 1005. A medical instrument or surgical tool (including an end effector 1100) may also be attached to the additional robot arm. Medical work station 1000 may include a database 1014, in particular coupled to control device 1004, in which are stored, for example, pre-operative data from patient/living being 1013 and/or anatomical atlases.

[0076] While several embodiments of the disclosure have been shown in the drawings and described herein, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be

construed as limiting, but merely as examples of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

WHAT IS CLAIMED IS:

1. An electrosurgical forceps, comprising:

an end effector including first and second jaw members, the first jaw member having a proximal portion including a first jaw guide member and a distal portion including a first tissue contacting surface having stepped surfaces, the second jaw member having a proximal portion including a second jaw guide member and a distal portion including a second tissue contacting surface having stepped surfaces, each of the first and second tissue contacting surfaces having a shear edge disposed between the stepped surfaces,

the first and second jaw members vertically movable between an open position and a first approximated position in which the first and second tissue contacting surfaces vertically oppose and laterally align with each other, and laterally movable between the first approximated position and a second approximated position to laterally displace the first and second tissue contacting surfaces with respect to each other, the first and second jaw guide members controlling an open angle between the first and second jaw members during movement between the first approximated position and the second approximated position.

2. The electrosurgical forceps according to claim 1, wherein the stepped surface of each of the first and second tissue contacting surfaces includes a base surface laterally disposed relative to a raised surface, the base and raised surfaces connected by an intermediate wall that forms the shear edge at an intersection with the raised surface.

3. The electrosurgical forceps according to claim 1, wherein the distal portions of the first and second jaw members curve longitudinally and laterally away from the proximal portions of the first and second jaw members.
4. The electrosurgical forceps according to claim 1, wherein the first and second guide surfaces include opposed oblique walls that slide laterally relative to each other during movement from the first approximated position to the second approximated position.
5. The electrosurgical forceps according to claim 1, wherein the proximal portion of the first jaw member includes a slot defined in an outer edge thereof and the proximal portion of the second jaw member includes a complementary tab for reception within the slot.
6. The electrosurgical forceps according to claim 1, further comprising first and second elongated shaft members that cooperate to define the end effector, the first jaw member disposed on a distal end portion of the first elongated shaft member and the second jaw member disposed on a distal end portion of the second elongated shaft member, the first and second elongated shaft members coupled together by a pivot pin extending through openings defined in respective first and second intersection portions of the first and second elongated shaft members, at least one of the first and second elongated shaft members pivotable with respect to the other of the first and second shaft members about at least two axes.

7. The electrosurgical forceps according to claim 6, wherein the pivot pin includes a semispherical head disposed within the opening defined in the first intersection portion and a cylindrical shaft extending through the opening defined in the second intersection portion.

8. The electrosurgical forceps according to claim 6, wherein the pivot pin includes a hemi-cylindrical head disposed within the opening defined in the first intersection portion and a cylindrical shaft extending through the opening defined in the second intersection portion.

9. The electrosurgical forceps according to claim 6, wherein the first intersection portion includes an inner surface having a substantially flat proximal portion, an oblique distal portion, and a convex portion disposed at a distal end of the oblique distal portion, and the second intersection portion includes a substantially flat inner surface and a concave surface disposed at a distal end of the substantially flat inner surface.

10. The electrosurgical forceps according to claim 9, wherein the first intersection portion includes a cam face disposed between the substantially flat proximal portion and the oblique distal portion.

11. The electrosurgical forceps according to claim 6, wherein proximal end portions of the first and second shaft members of the forceps include first and second handle members, respectively, the first handle member including a first guide member and the

second handle member including a second guide member, each of the first and second guide members including a body portion extending generally vertically from an inner surface of the respective first and second handle member, a leg portion extending substantially perpendicularly from the body portion, and a gap defined between an upper surface of the leg portion and the inner surface of the respective first and second handle member, the leg portions of the first and second guide members longitudinally aligned and laterally offset with respect to each another.

12. The electrosurgical forceps according to claim 11, wherein when the first and second handle members are in the open position, the first and second guide members are spaced apart, and when the first and second handle members are in the first approximated position, the inner surfaces of the leg portions of the first and second guide members contact with each other.

13. The electrosurgical forceps according to claim 12, wherein when the first and second handle members are in the first approximated position, the inner surfaces of the legs portions of the first and second guide members are locked relative to each other.

14. The electrosurgical forceps according to claim 11, wherein when the first and second handle members are in the first approximated position, a bottom surface of the body portion of the first guide member contacts an inner surface of the second elongated shaft member.

15. The electrosurgical forceps according to claim 11, wherein when the first and second handle members are in the second approximated position, the upper surfaces of the leg portions of the first and second guide members contact each other.

16. The electrosurgical forceps according to claim 9, wherein outer surfaces of the leg portions of the first and second guide members each include a protrusive surface to prevent movement of the first and second handle members from the open position to the first approximated position when the outer surfaces are aligned with each other.

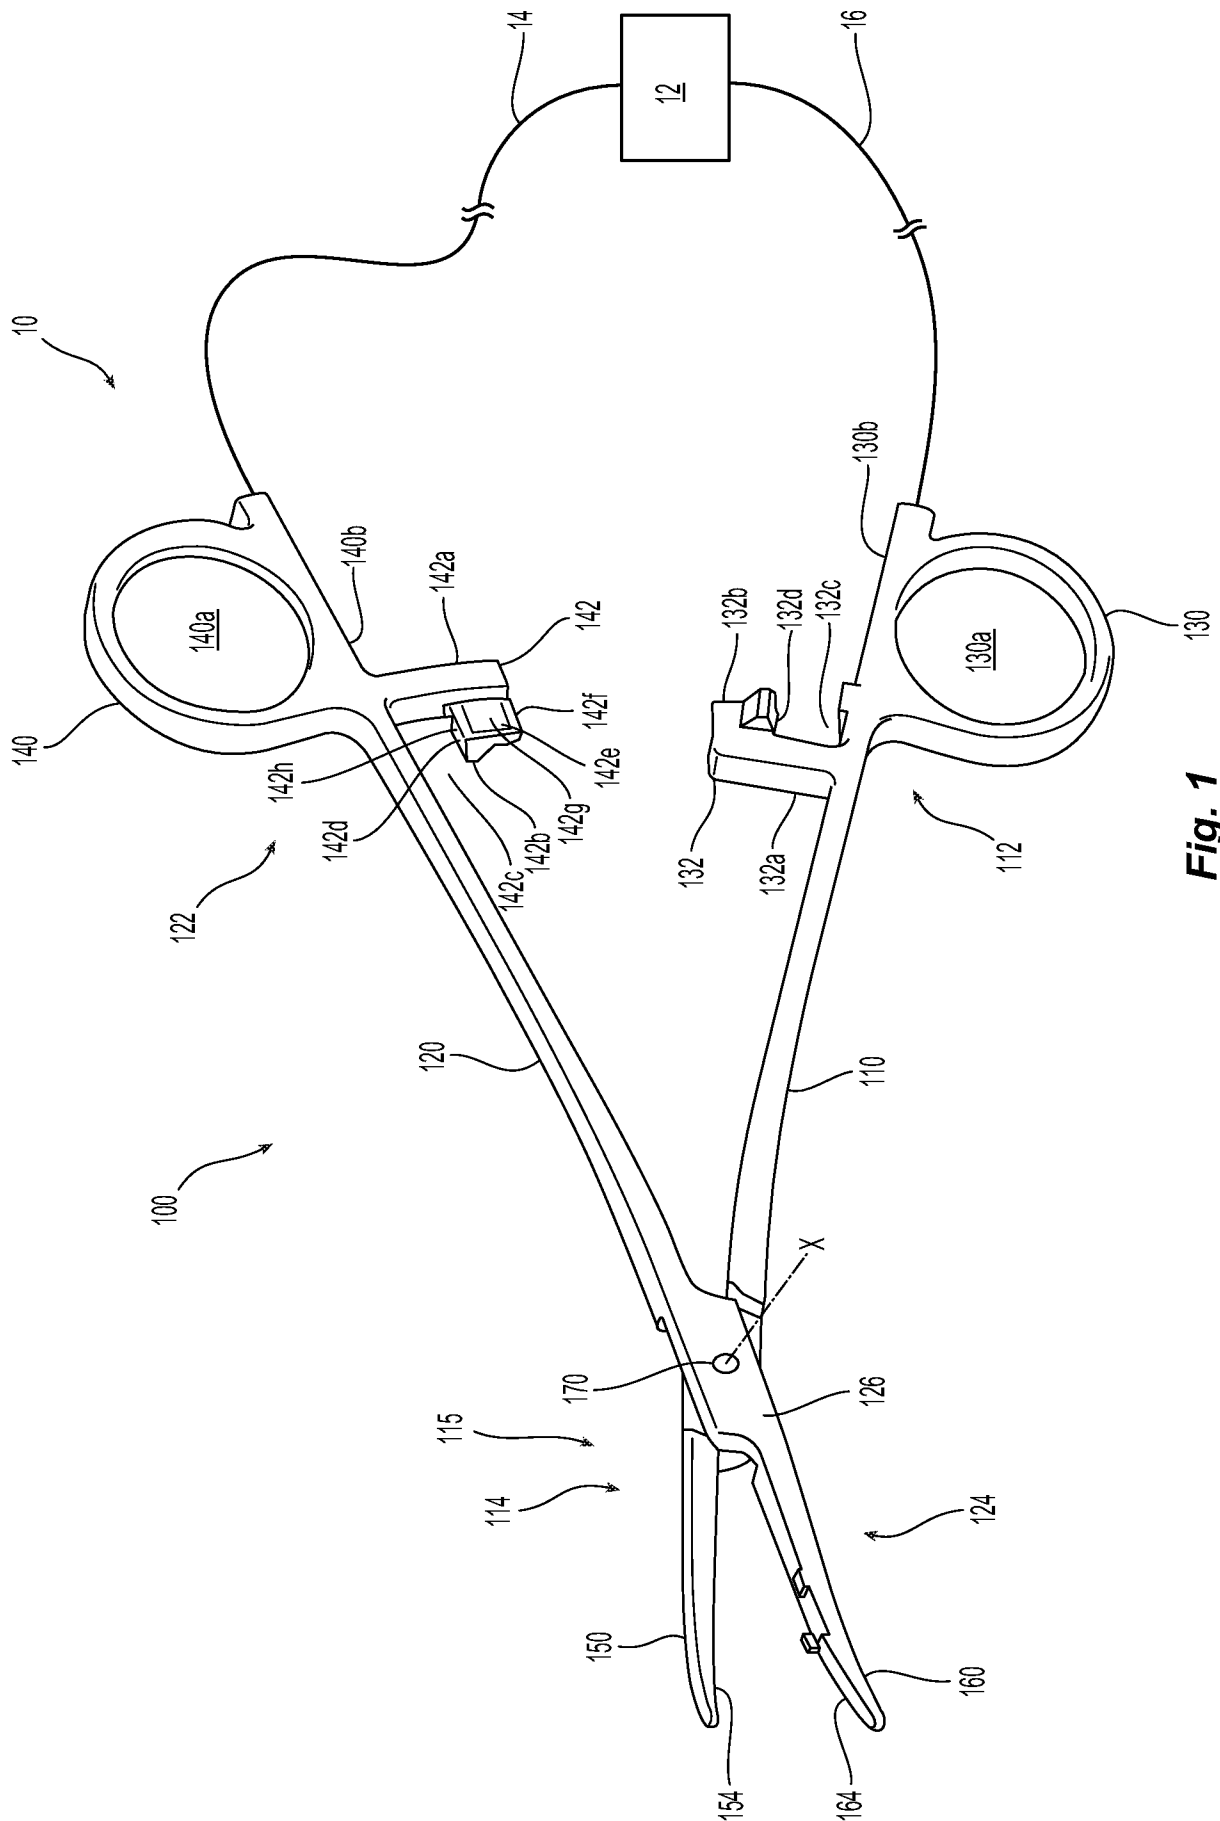


Fig. 1

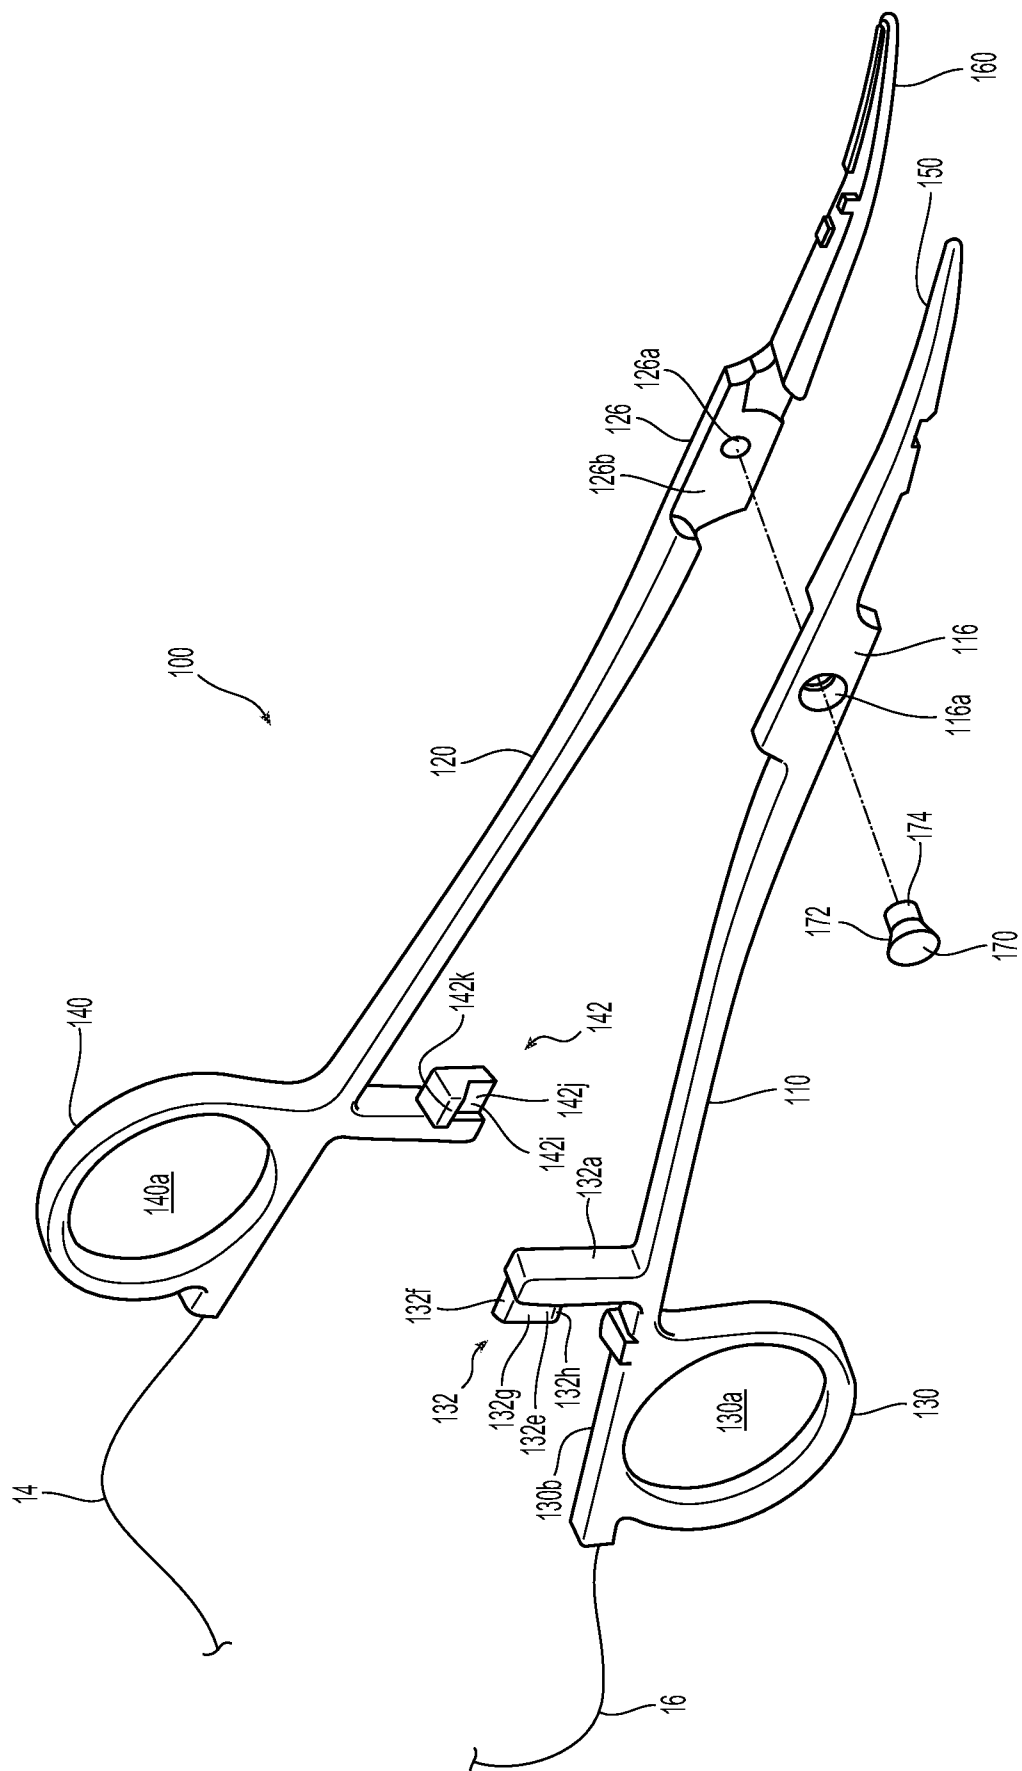
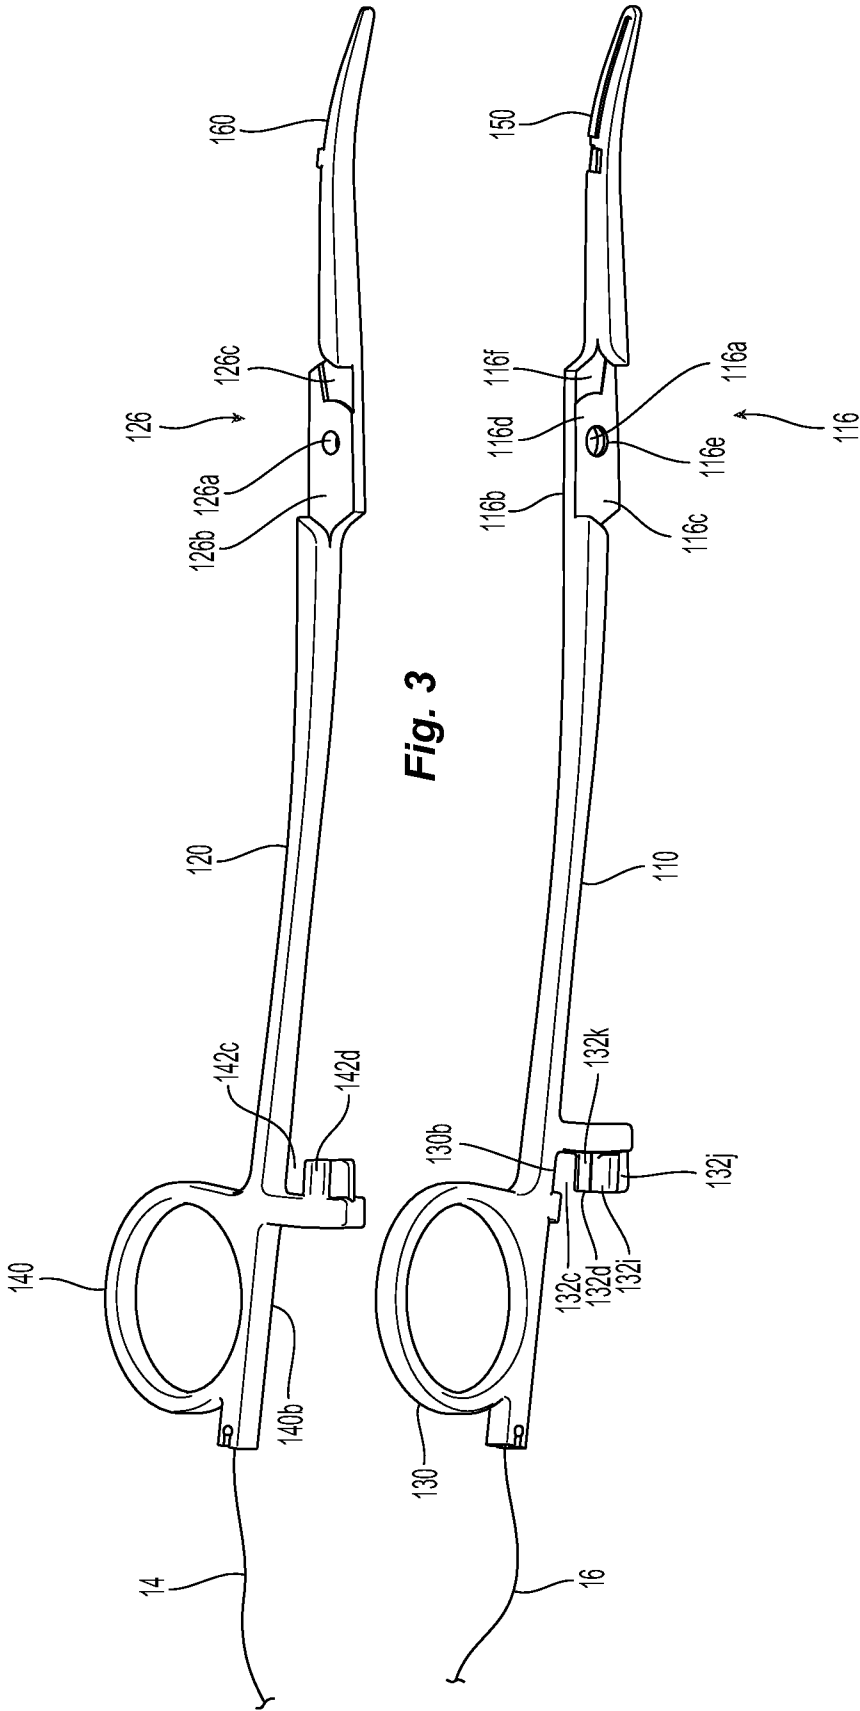


Fig. 2



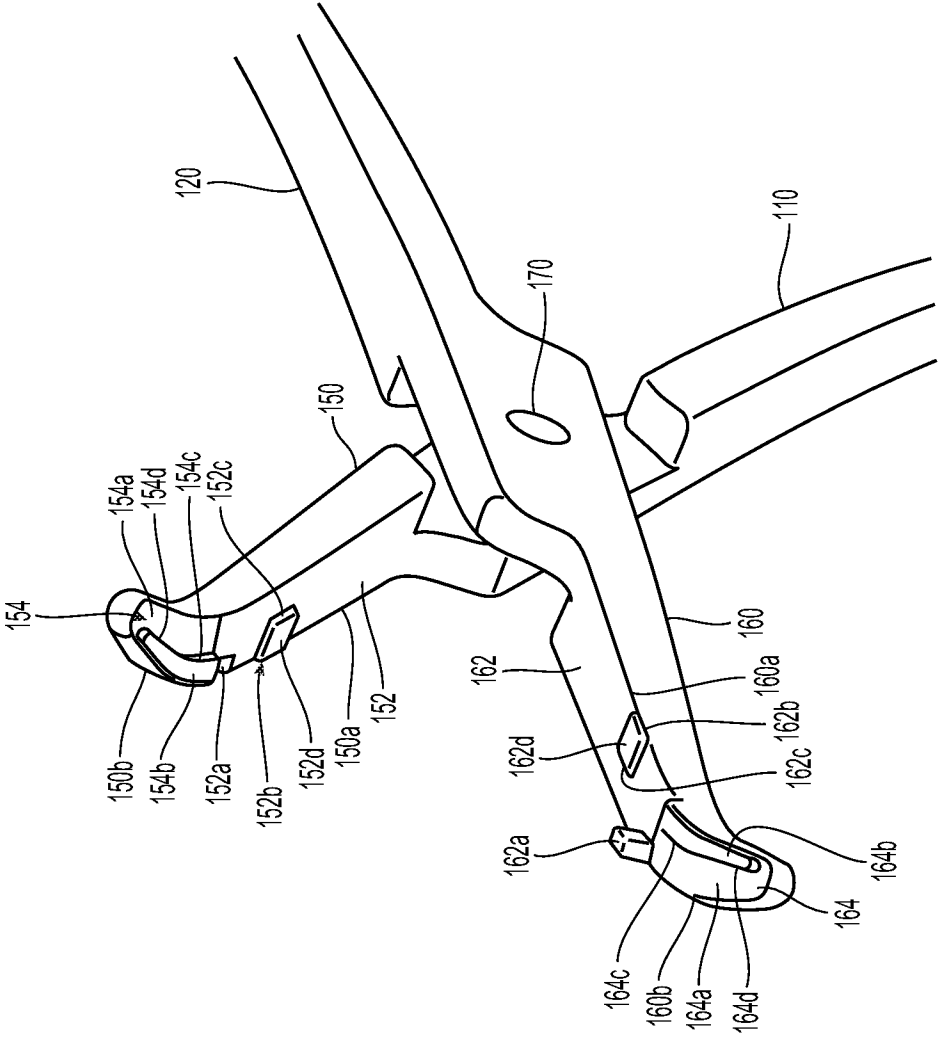


Fig. 4

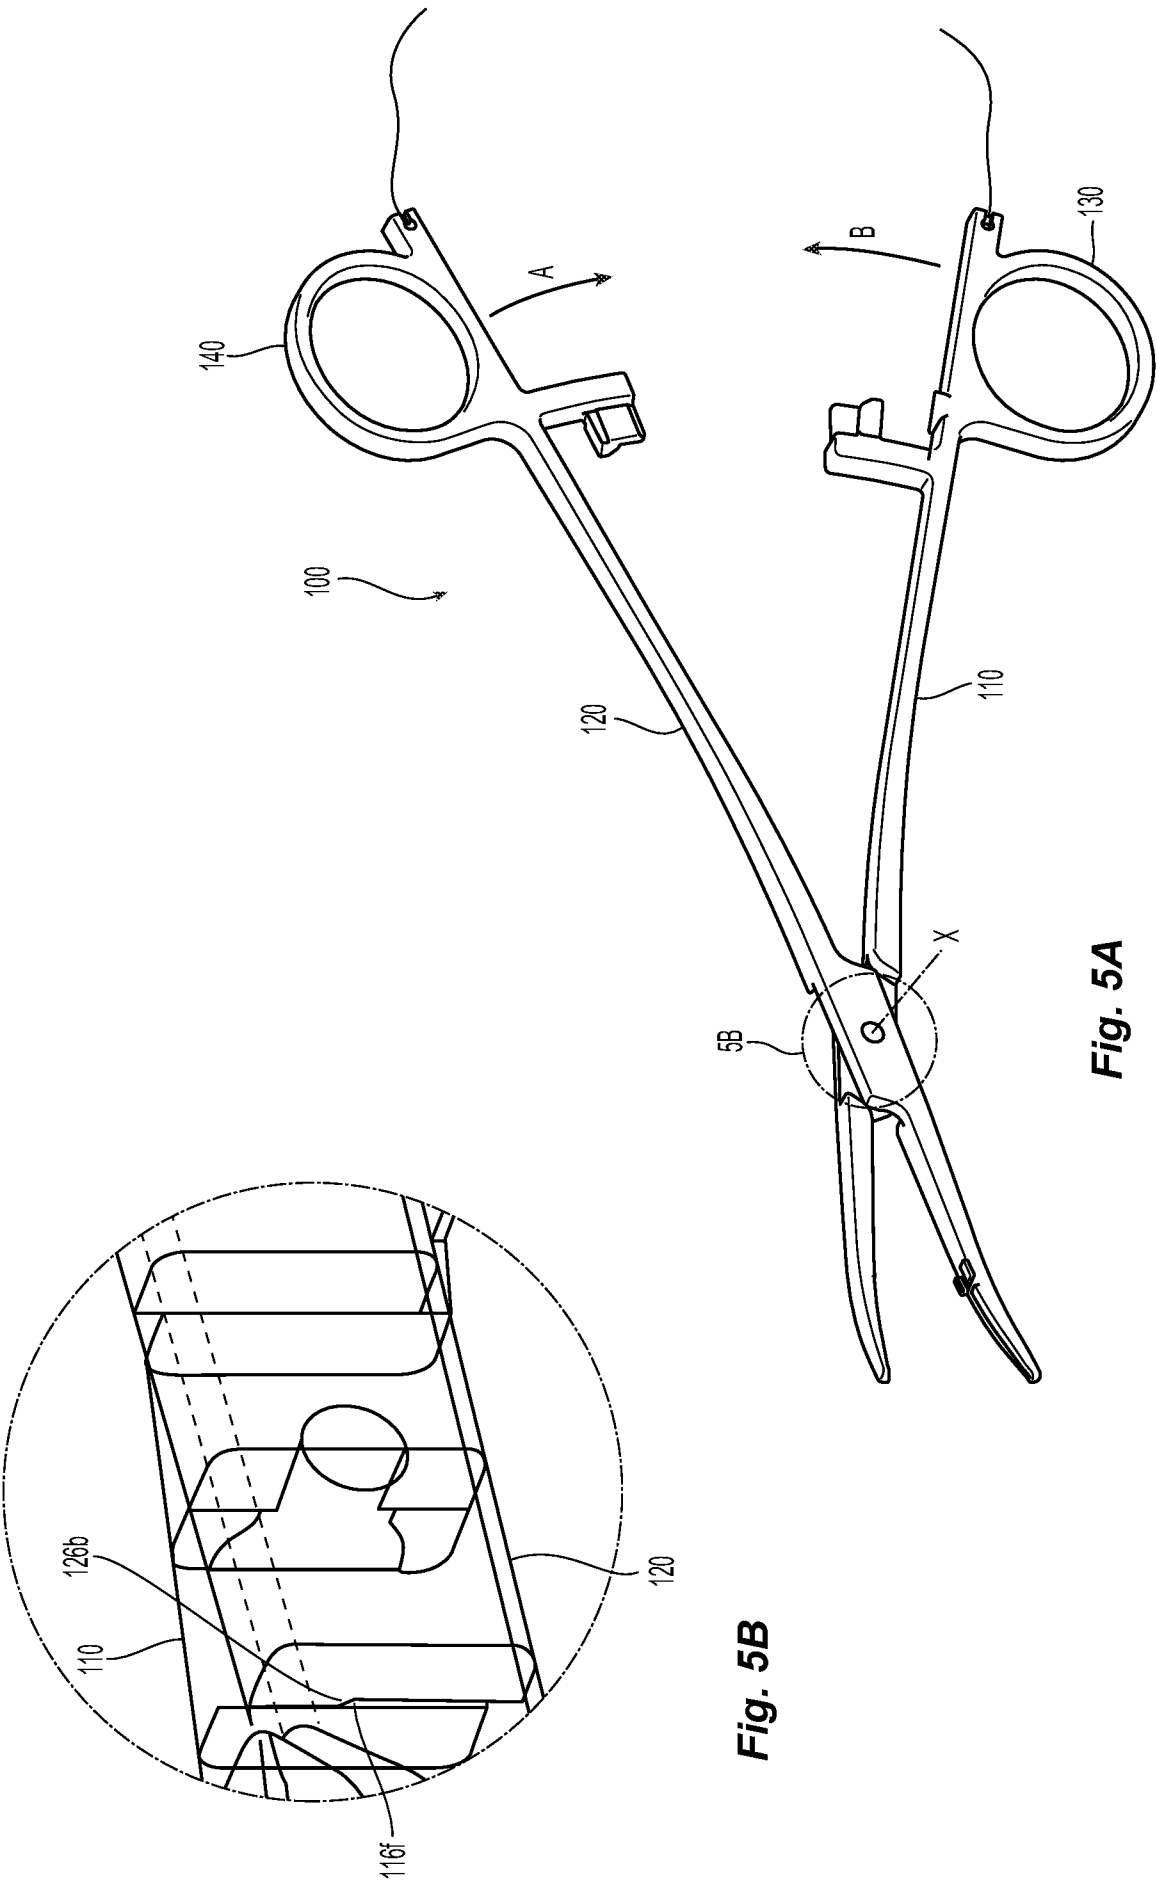
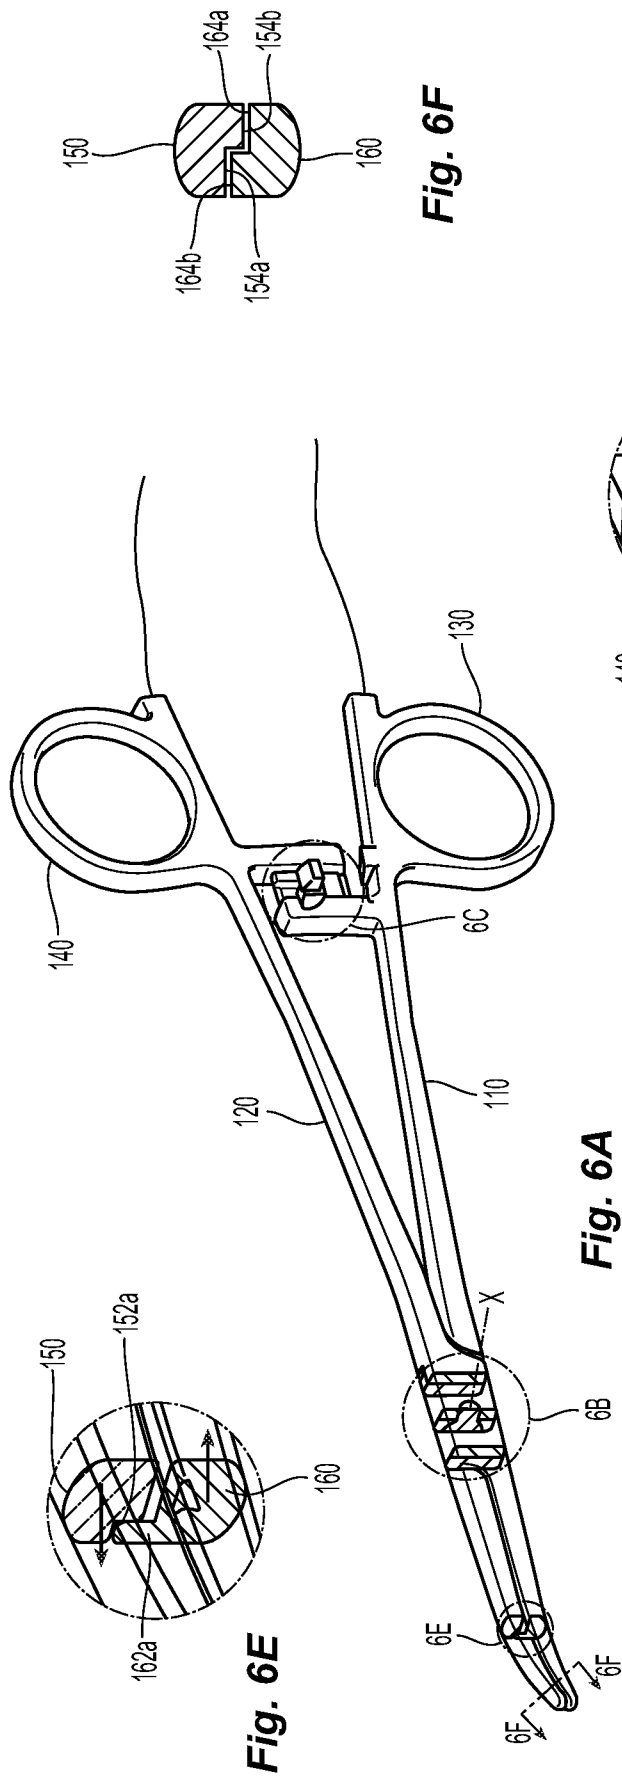


Fig. 5A

Fig. 5B



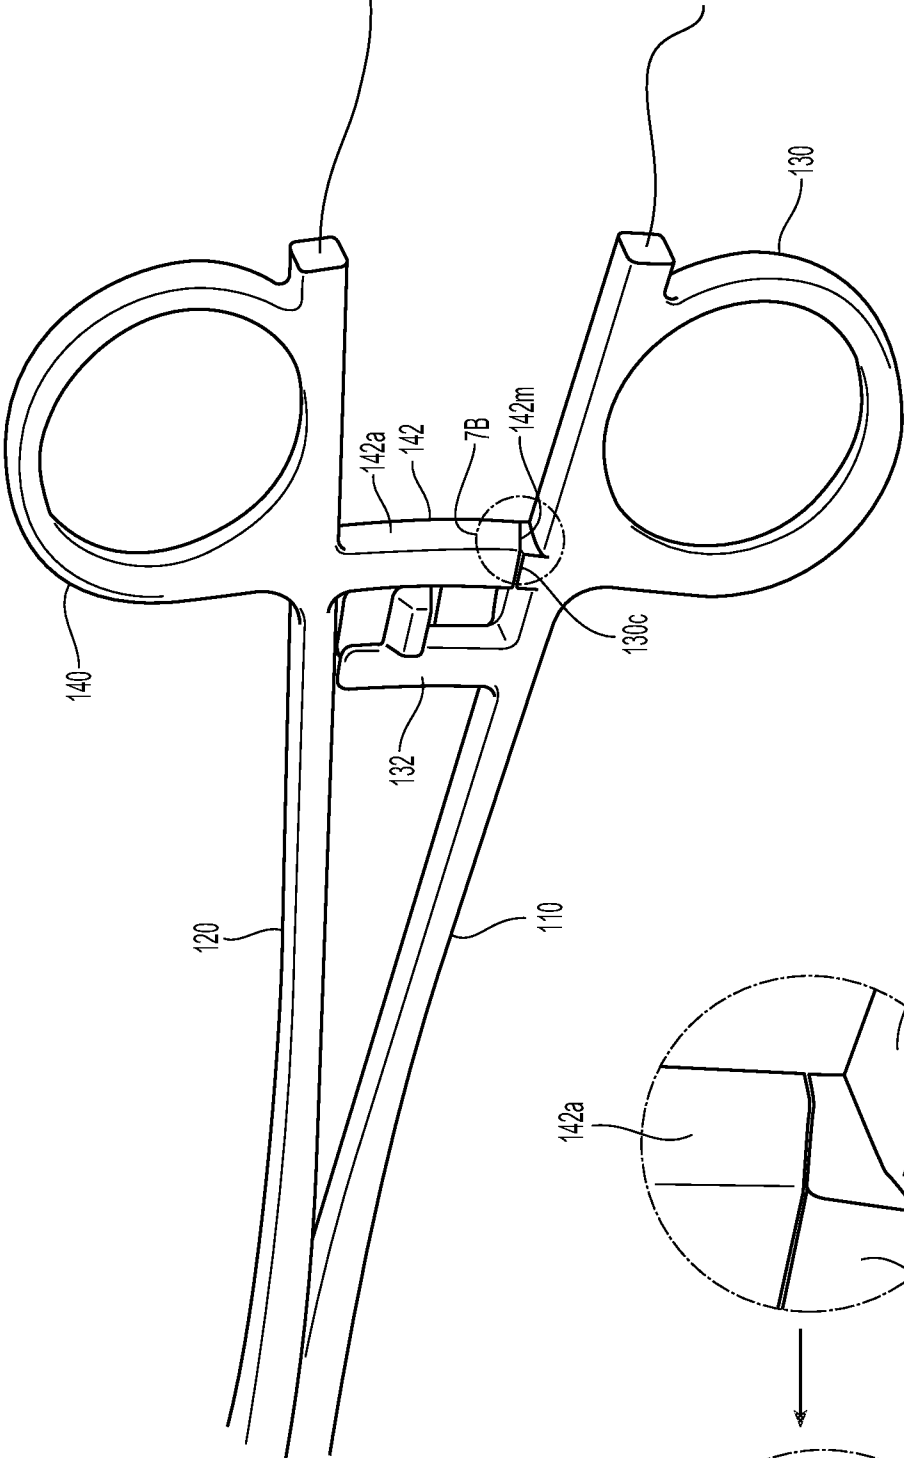


Fig. 7A

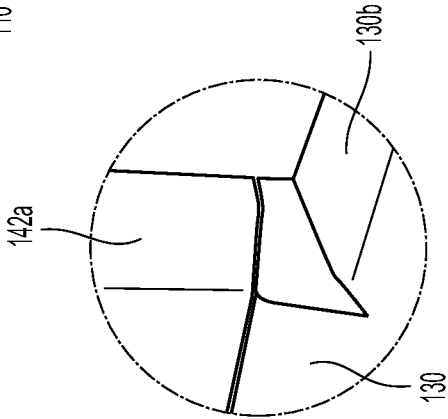


Fig. 7B

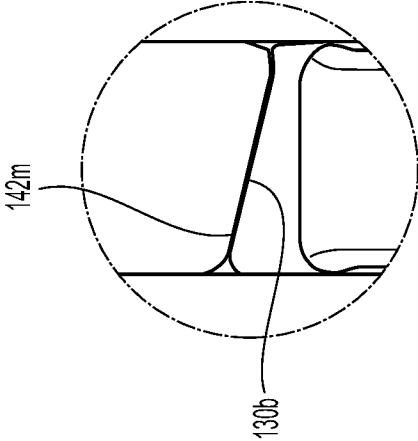


Fig. 7C

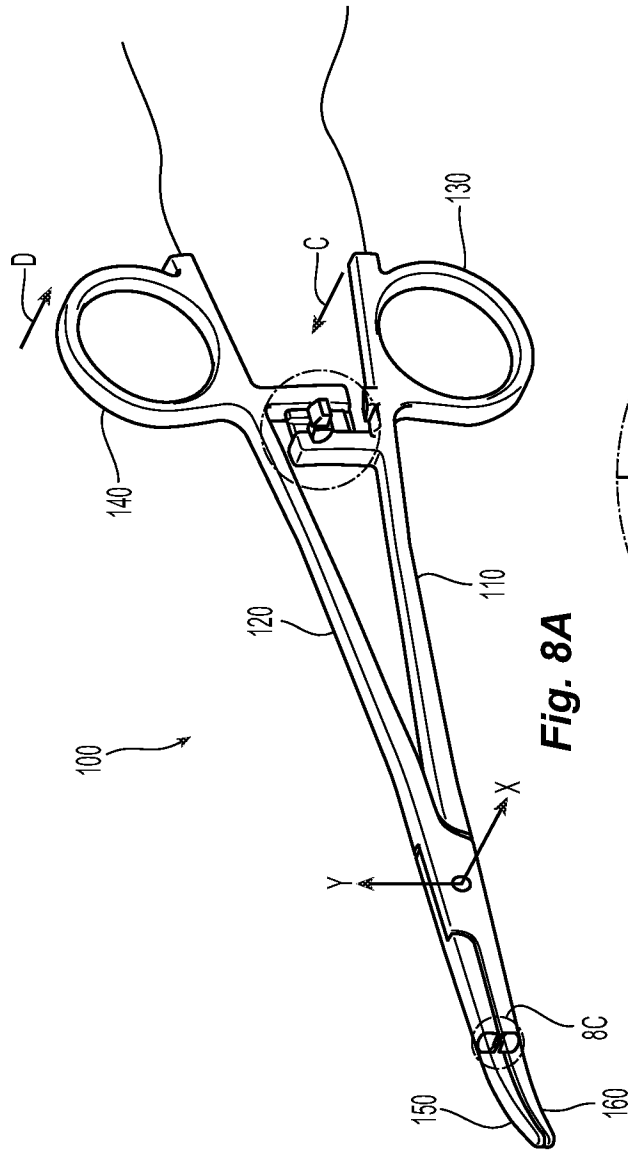


Fig. 8A

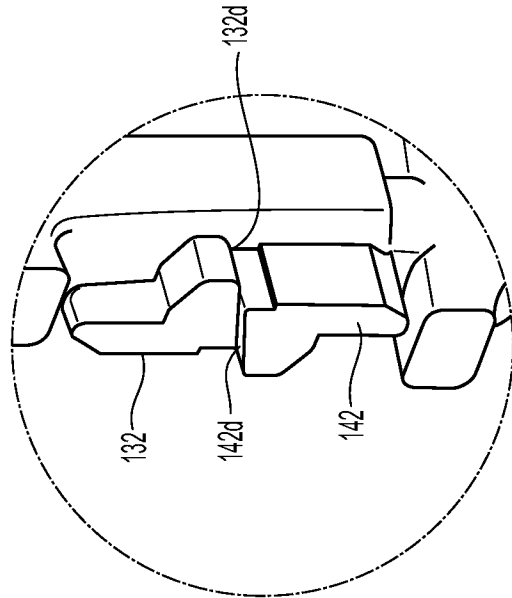


Fig. 8B

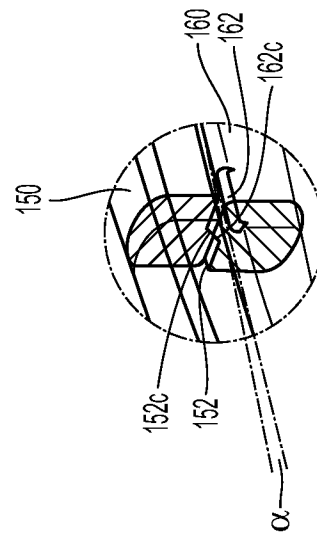


Fig. 8C

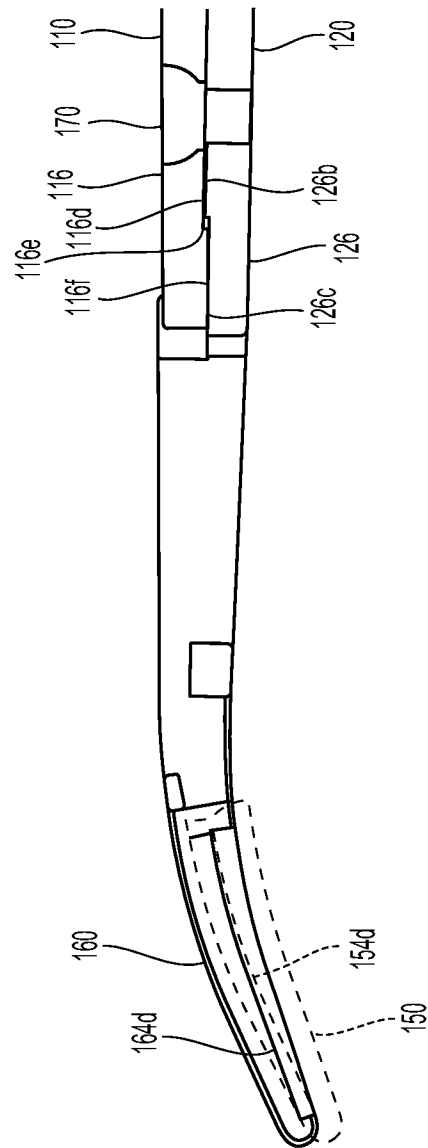


Fig. 9

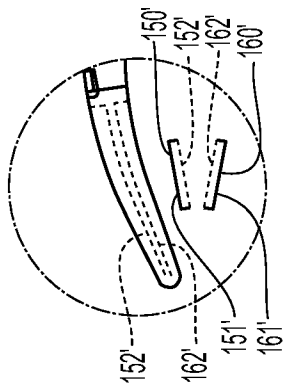


Fig. 10A

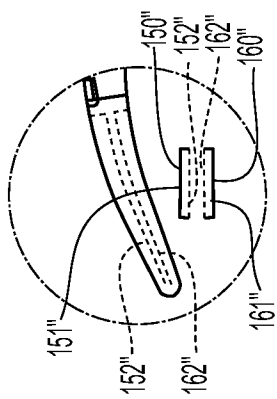


Fig. 11A

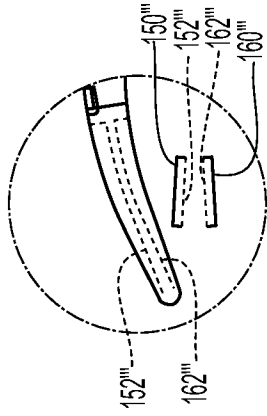


Fig. 12A

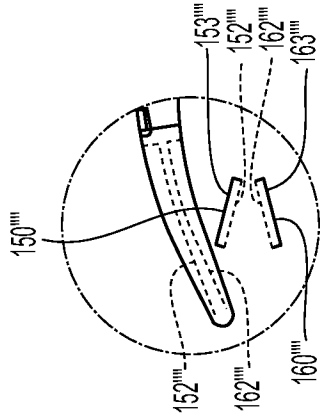


Fig. 13A

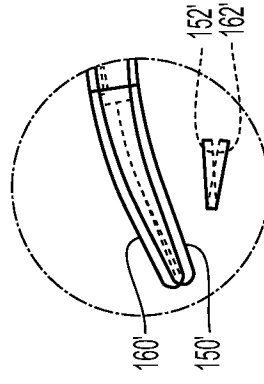


Fig. 10B

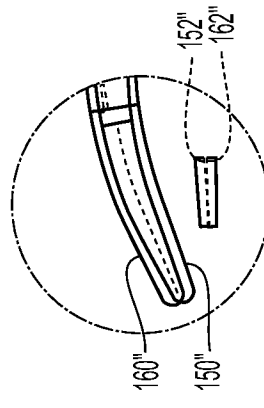


Fig. 11B

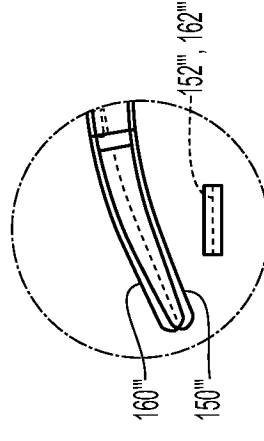


Fig. 12B

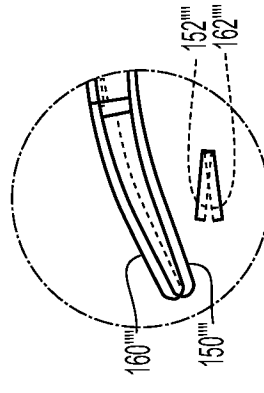


Fig. 13B

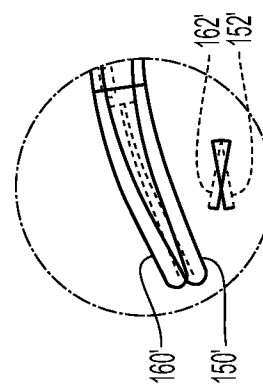


Fig. 10C

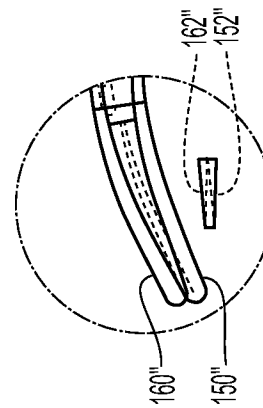


Fig. 11C

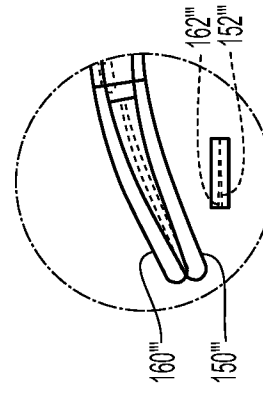


Fig. 12C

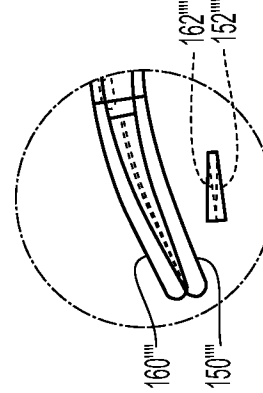


Fig. 13C

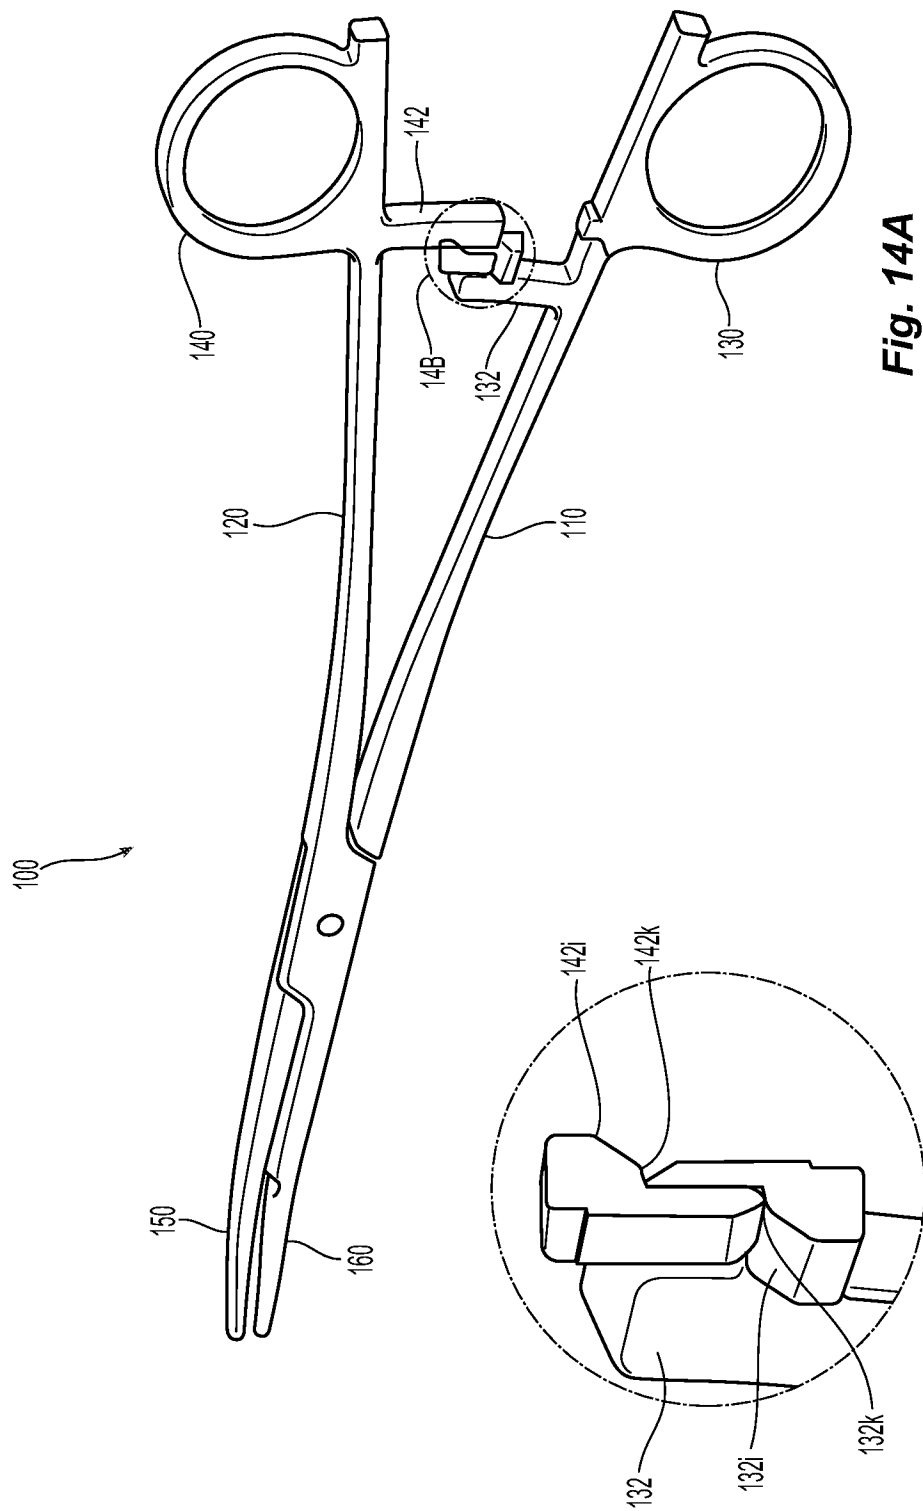
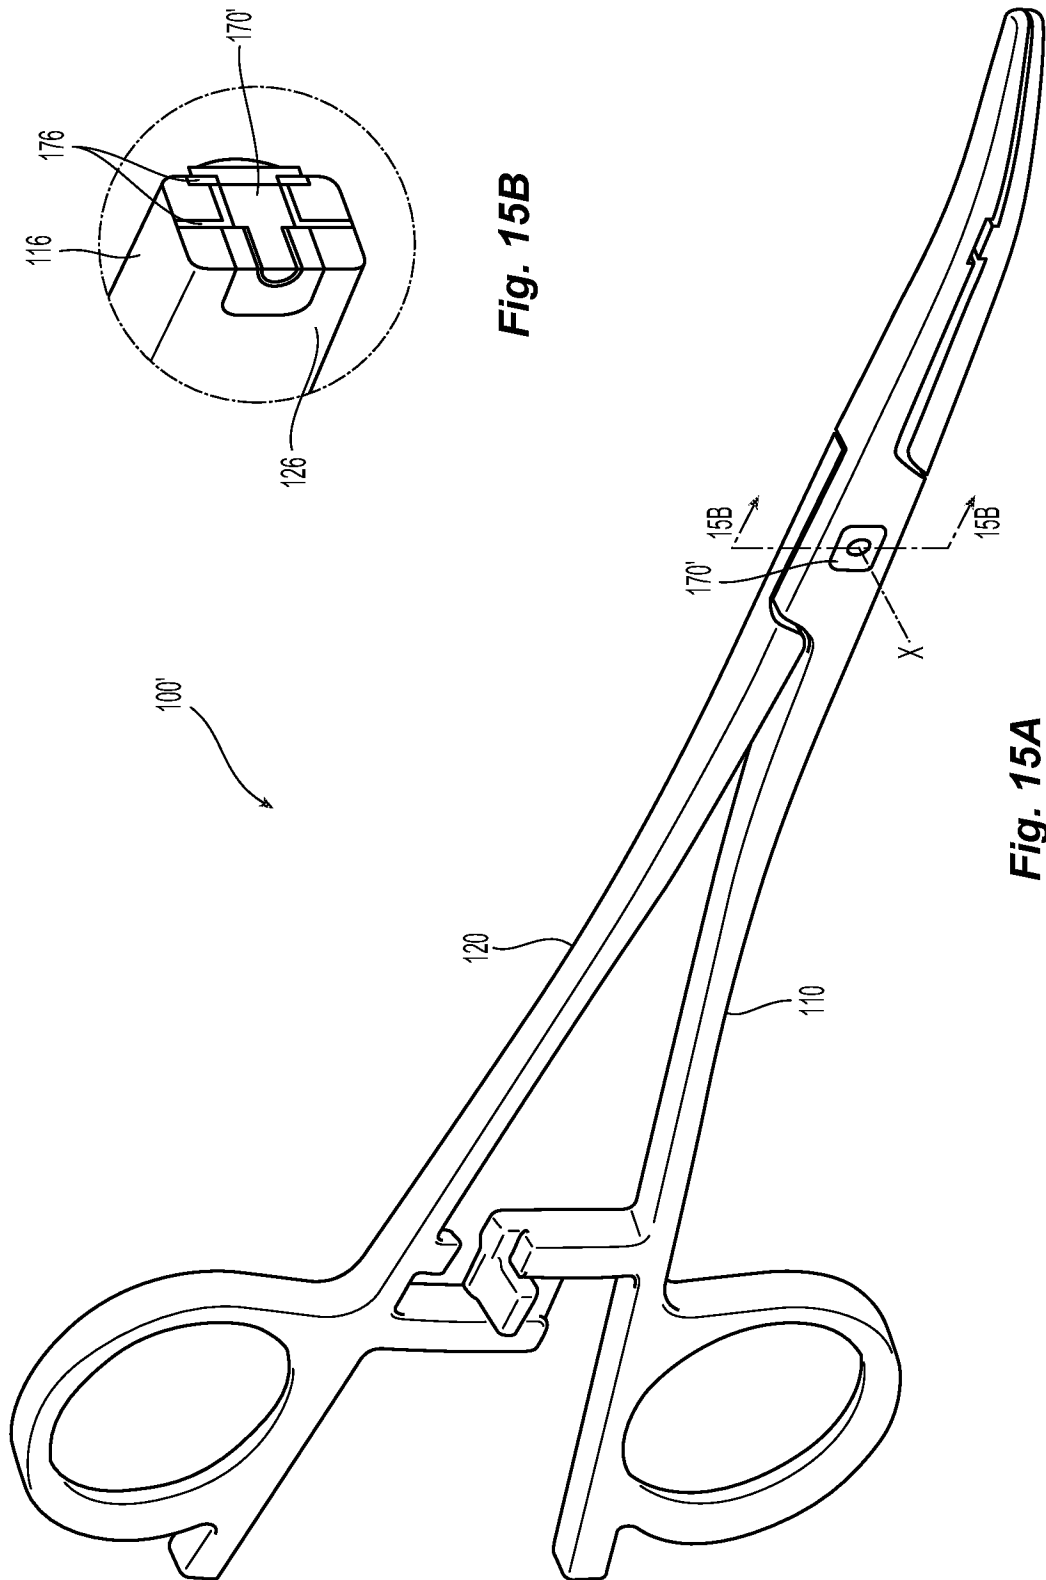


Fig. 14B



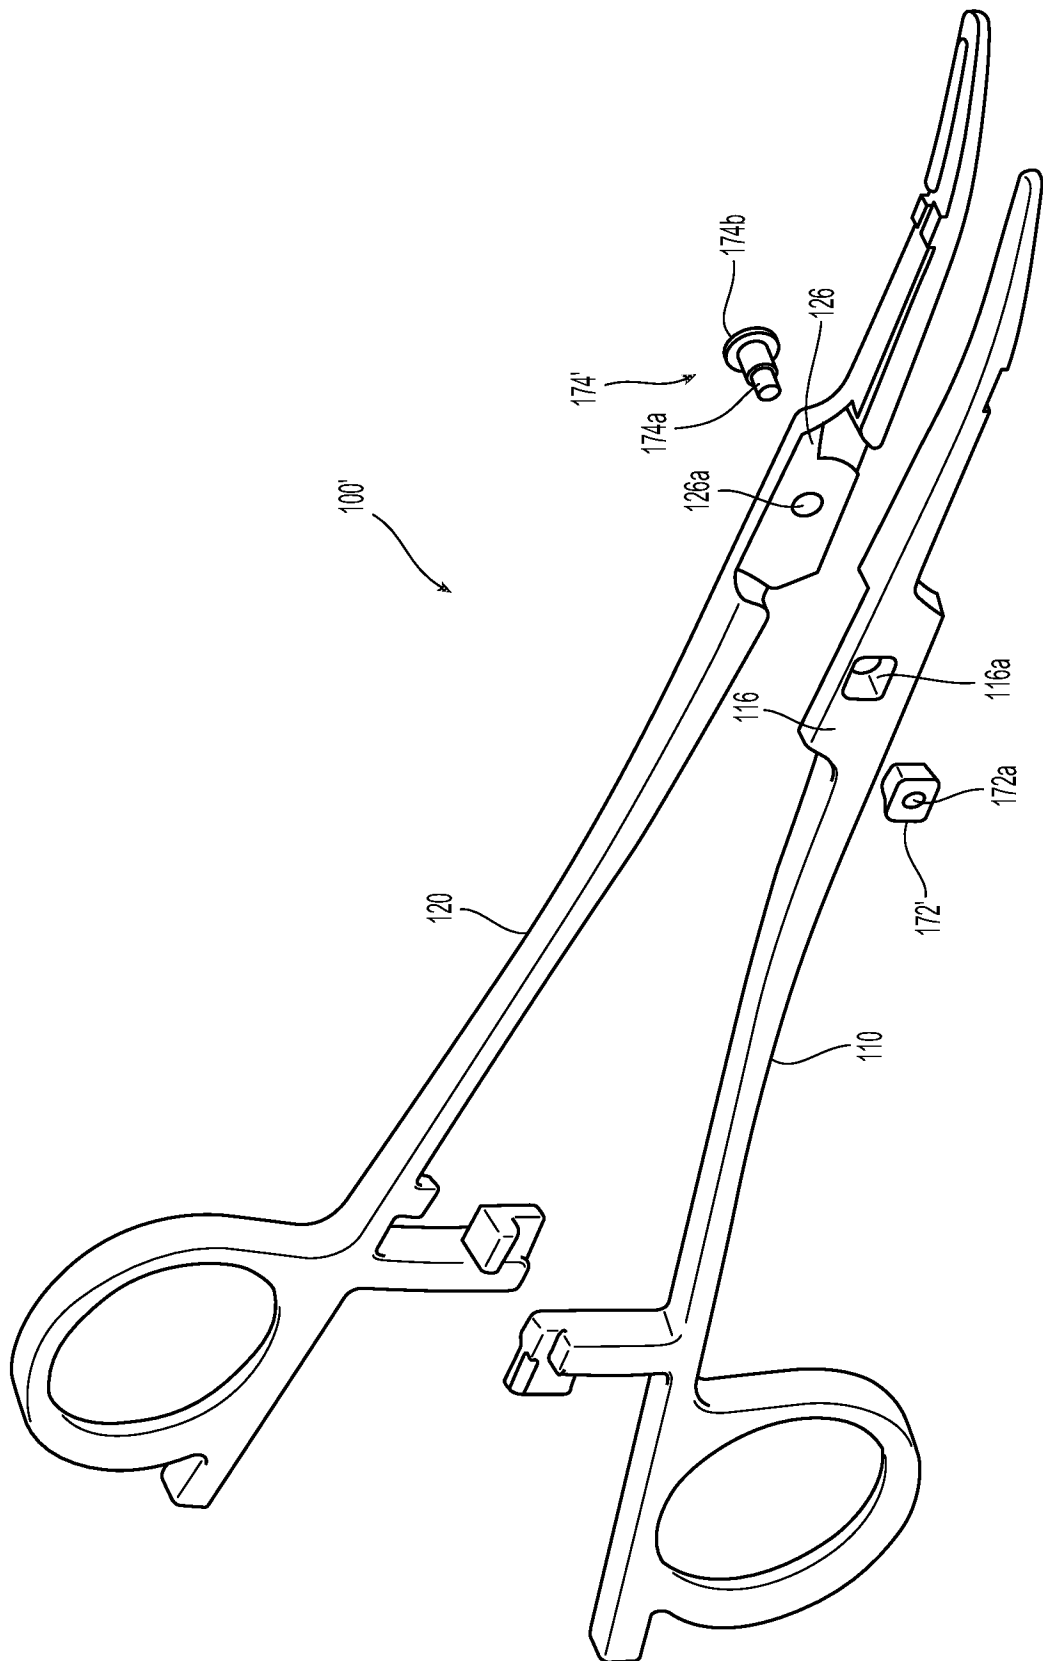
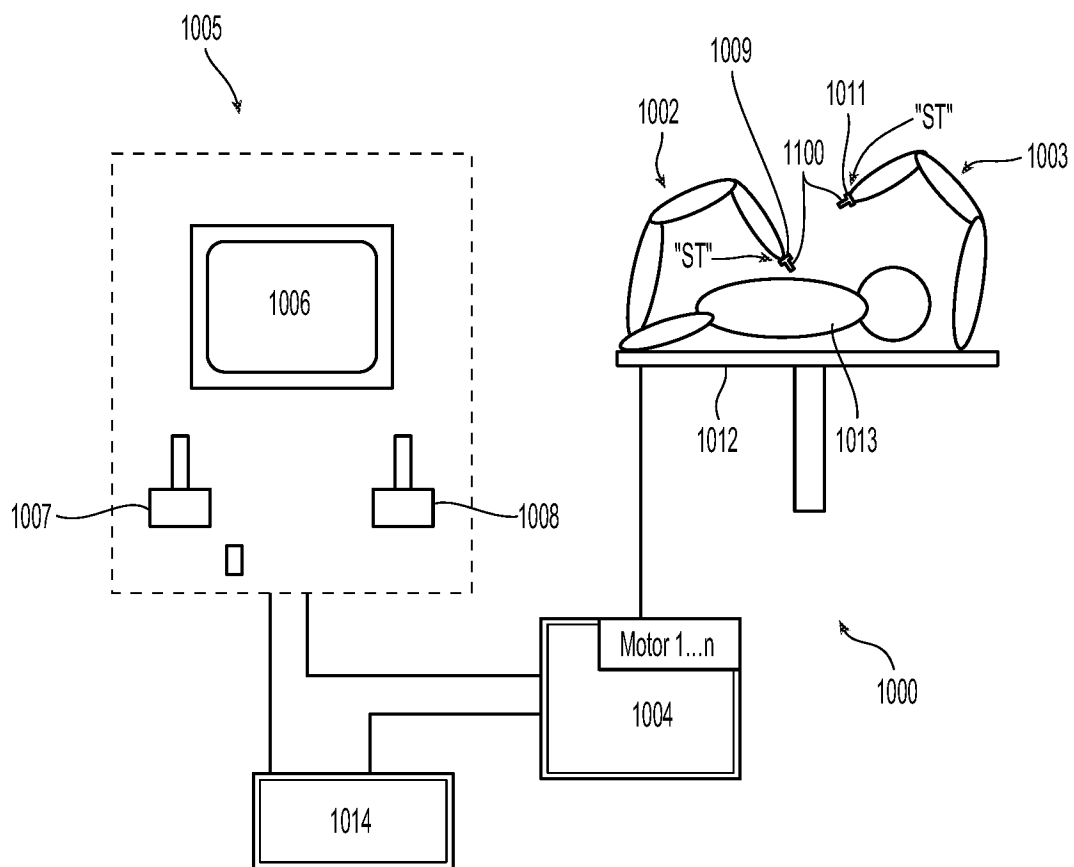


Fig. 16

**Fig. 17**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/077339

A. CLASSIFICATION OF SUBJECT MATTER

A61B 18/12(2006.01)i; A61B 17/285(2006.01)i; A61B 17/138(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, EPODOC, WPI, CNKI: COVIDIEN LP, forcep?, plier?, surgec+, cut, cutting, severe, severing, shear, edge, lateral??. move, movable, hemosta+, heat, heat???, effector, jaw, contacting, surface

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004006340 A1 (GYRUS MEDICAL, INC.) 08 January 2004 (2004-01-08) description, paragraphs [0018]-[0026], figures 1-3	1-16
A	US 2006079891 A1 (ARTS, GENE H. ET AL.) 13 April 2006 (2006-04-13) the whole document	1-16
A	CN 202184759 U (SHANGHAI CHANGZHENG HOSPITAL) 11 April 2012 (2012-04-11) the whole document	1-16
A	CN 103648413 A (COVIDIEN LP.) 19 March 2014 (2014-03-19) the whole document	1-16
A	CN 204147117 U (CHANGZHOU YANLING ELECTRONIC EQUIPMENT CO., LTD.) 11 February 2015 (2015-02-11) the whole document	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

13 August 2015

Date of mailing of the international search report

24 August 2015

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

LIU,Chao

Facsimile No. (86-10)62019451

Telephone No. (86-10)82245601

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/077339

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2004006340	A1	08 January 2004	US	2004049185	A1	11 March 2004
				US	7033356	B2	25 April 2006
US	2006079891	A1	13 April 2006	US	2008312653	A1	18 December 2008
				JP	5137303	B2	06 February 2013
				JP	2011235119	A	24 November 2011
				US	7955332	B2	07 June 2011
				US	8123743	B2	28 February 2012
				EP	1645238	B1	24 March 2010
				JP	2006102515	A	20 April 2006
				AU	2005220187	B2	15 September 2011
				ES	2341258	T3	17 June 2010
				CA	2522317	A1	08 April 2006
				EP	1645238	A1	12 April 2006
				AU	2005220187	A1	27 April 2006
				DE	602005020097	E	06 May 2010
				CA	2522317	C	23 June 2015
				US	2006074417	A1	06 April 2006
				US	7500975	B2	10 March 2009
				US	2009149854	A1	11 June 2009
				US	8303586	B2	06 November 2012
CN	202184759	U	11 April 2012	None			
CN	103648413	A	19 March 2014	EP	2731514	A2	21 May 2014
				US	8628557	B2	14 January 2014
				WO	2013009756	A2	17 January 2013
				US	2013018411	A1	17 January 2013
				US	2014128867	A1	08 May 2014
CN	204147117	U	11 February 2015	None			