



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2280774 C 2004/05/25

(11)(21) 2 280 774


(12) BREVET CANADIEN  
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 1998/02/13  
(87) Date publication PCT/PCT Publication Date: 1998/08/20  
(45) Date de délivrance/Issue Date: 2004/05/25  
(85) Entrée phase nationale/National Entry: 1999/08/16  
(86) N° demande PCT/PCT Application No.: BE 1998/000020  
(87) N° publication PCT/PCT Publication No.: 1998/035578  
(30) Priorité/Priority: 1997/02/17 (9700146) BE

(51) Cl.Int.<sup>6</sup>/Int.Cl.<sup>6</sup> A45D 2/00  
(72) Inventeur/Inventor:  
SMAL, HENRI, BE  
(73) Propriétaire/Owner:  
CONAIR CORPORATION, US  
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PINCE A COIFFER  
(54) Title: HAIR STYLING TONGS

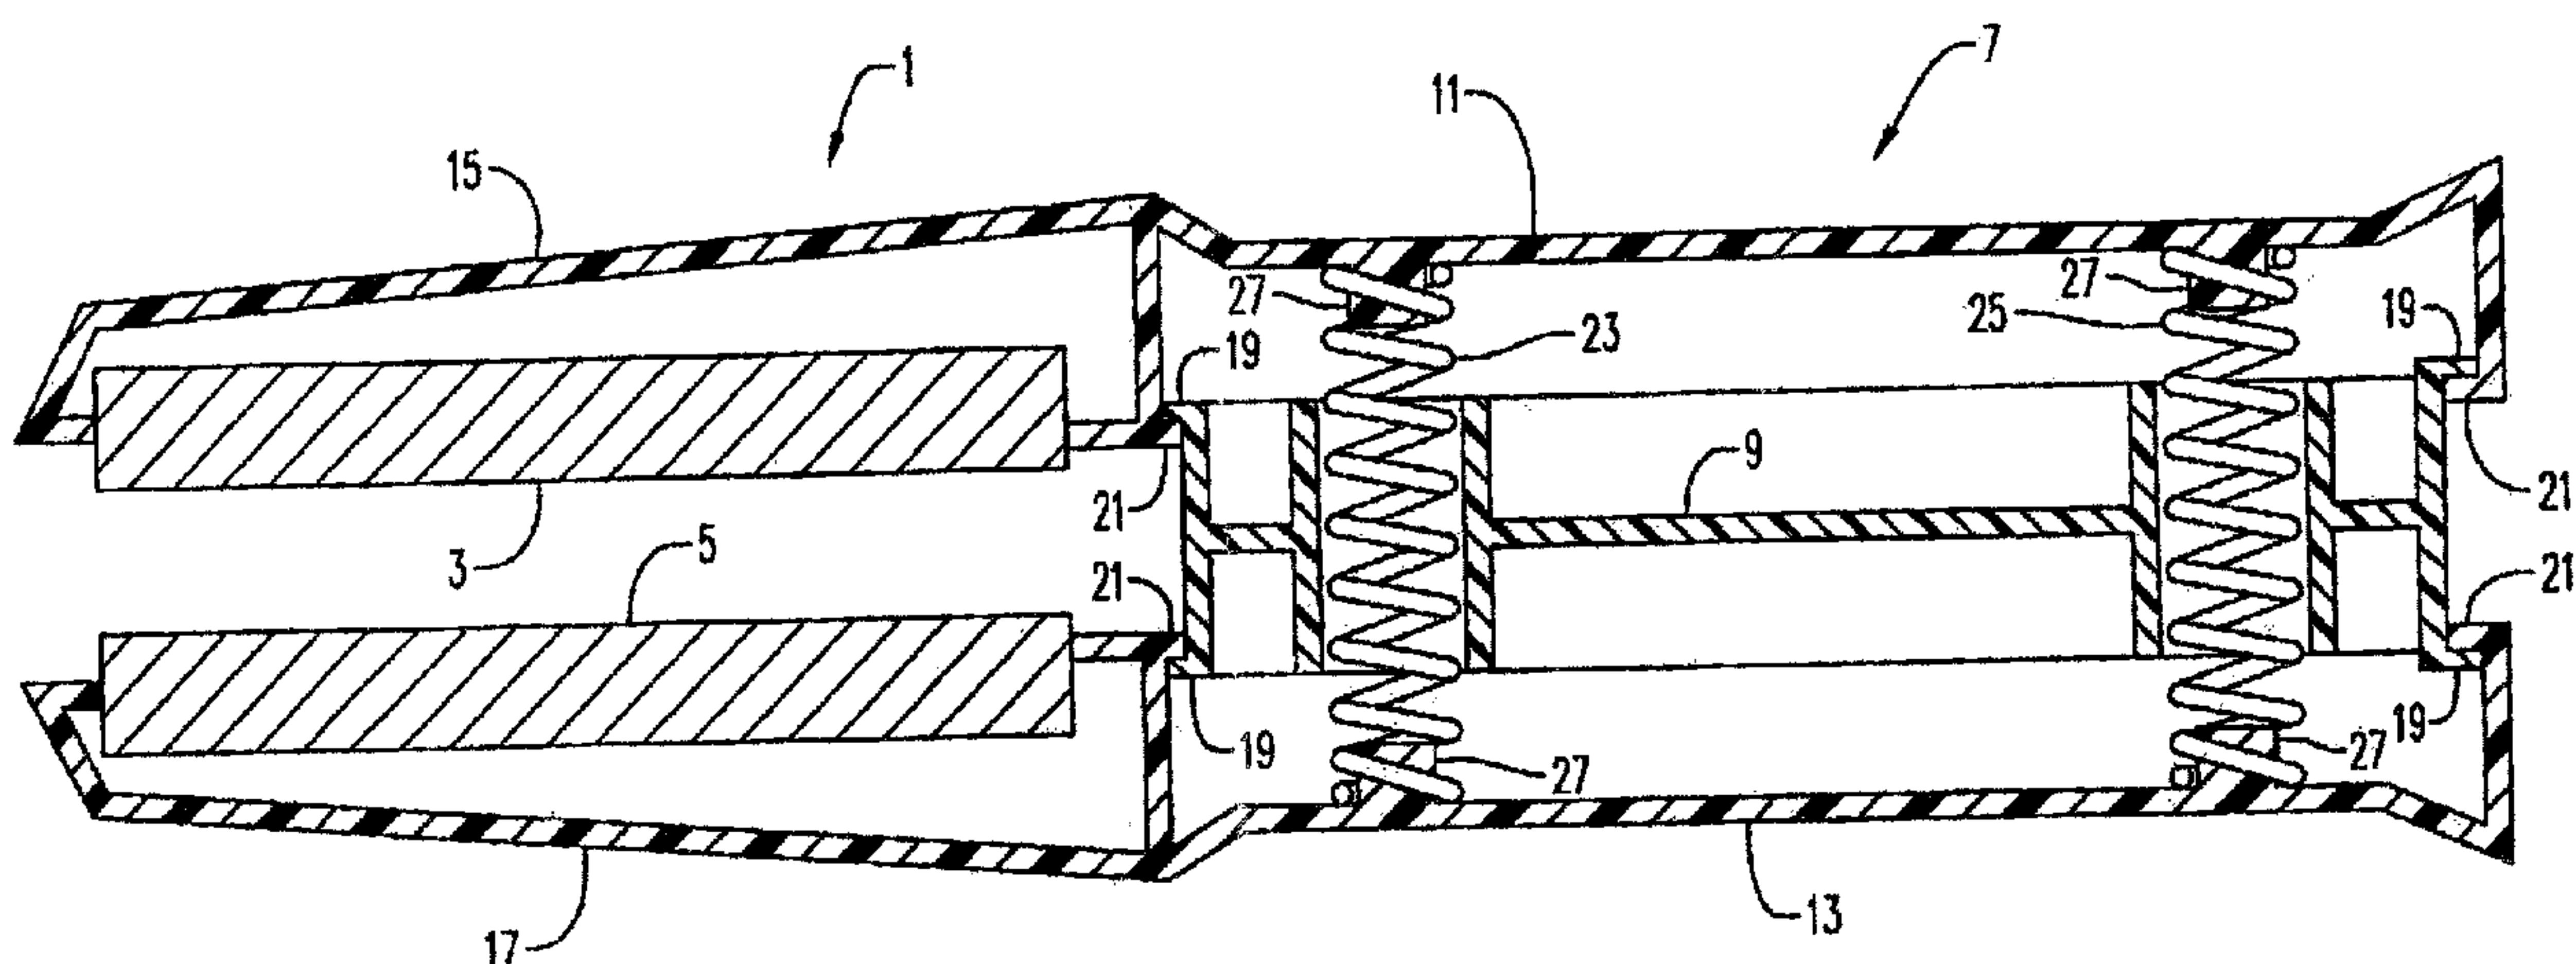

(57) Abrégé/Abstract:

Hairdressing tongs (1) comprising heating pads (3 and 5) fixed to the end of two arms (11 and 13) of a handle (7). According to the invention, a central element (9) of the handle (7) serves as a guide for the arms (11 and 13) which can be moved from a completely contracted position, bringing the two heating pads (3 and 5) into complete contact, to a position of maximum separation, bringing the two arms (11 and 13) into a position of contact with the stops (19) of the central element (9), spring elements (23) maintaining the maximum separation of the arms (11 and 13) in the absence of action on the arms (11 and 13). Used for straightening/styling, allowing the dexterity of the user to be exercised by modifying the relative position of the pads, either in parallel position or favouring contact at the front or at the rear.

ABSTRACT

## HAIRDRESSING TONGS

Hairdressing tongs (1) comprising heating pads (3 and 5) fixed to the end of two arms (11 and 13) of a handle (7). According to the invention, a central element (9) of the handle (7) serves as a guide for the arms (11 and 13) which can be moved from a completely contracted position, bringing the two heating pads (3 and 5) into complete contact, to a position of maximum separation, bringing the two arms (11 and 13) into a position of contact with the stops (19) of the central element (9), spring elements (23) maintaining the maximum separation of the arms (11 and 13) in the absence of action on the arms (11 and 13).

Used for straightening/styling, allowing the dexterity of the user to be exercised by modifying the relative position of the pads, either in parallel position or favouring contact at the front or at the rear.

[Fig. 1]

## HAIRDRESSING TONGS

SUBJECT OF THE INVENTION

The invention relates to hairdressing tongs for  
5 straightening/styling.

TECHNICAL BACKGROUND

Hairdressing tongs which consist of two heating pads and can be equipped with a water reservoir for simultaneous emission of steam have already been offered 10 on the market. The pads, fixed to the end of two handle arms connected by a pivot and a spring, hold the two arms apart from one another in the rest position.

By acting on the handle using the hand, it is possible, starting from a position of maximum opening, 15 to move the two arms, and therefore the pads which are integral therewith, towards one another through a variable acute angle to, at the end of travel, bring the pads into contact and in principle into a parallel position.

20 Locks of hair are gripped between the heating pads and the hair can thus be smoothed by making it slide between the hot pads, if necessary with an emission of steam obtained from water originating from a reservoir incorporated in the support of one heating 25 pad, in contact with which the water evaporates.

This type of angular-opening tongs has the fundamental disadvantage that it cannot easily be adapted to different types of hair and in particular, with a constant lock thickness, that it acts on the 30 gripped hair on one side more than the other. In fact, in the case of arms articulated about a common axis, the angle between the pads varies constantly according to the separation. The pads therefore follow only imperfectly the shape of the locks of hair. This device 35 also does not allow the user to achieve all the desired shaping effects.

THE AIM OF THE INVENTION

The aim of the present invention is to avoid the abovementioned disadvantages and in particular it seeks 40 to make it possible for the two arms constituting the

handle to be opened otherwise than solely angularly.

In particular, the aim is to provide hairdressing tongs which allow the user to modify the gripping effect according to the hairdressing effects it is desired to achieve.

#### CHARACTERISTIC FEATURES OF THE INVENTION

The hairdressing tongs according to the invention comprise, in a conventional manner, heating pads fixed to the end of two arms of a handle. The two arms are, however, mounted in a floating manner in the sense that a central element of the handle serves as a guide for these arms which can thus be moved transversely from a completely contracted position, the hand being closed and the two heating pads being brought into complete contact, to a position of maximum separation, bringing the arms into a position of contact with the stops of the central element, spring elements maintaining this maximum separation in the absence of action on the arms of the handle, that is to say in the rest position.

By holding, with the hand, the rear face of the arms in a completely pushed-in position and by pushing the front face of these arms in gradually, the tongs are closed in the conventional, that is to say angular, manner. However, it is possible to press in an identical manner on the front and rear faces of the arms of the handle, in this case closing the pads in a parallel manner and perfectly in contact with the entire lock of hair. By accentuating the pressure towards the front, the pads move towards one another at the tip, which makes it possible, for example, to deal accurately with very short hair or to make adjustments.

This method of articulation makes it possible to transmit all the dexterity of the user to the pads.

Depending on whether the pressure is balanced on the front or the rear of the handle, or whether the pressure is accentuated towards the front or towards the rear, the pads move towards one another in a parallel manner or favouring contact towards the front or the

rear. They can thus follow perfectly the shape of the lock of hair whatever the thickness and regularity of the latter.

Advantageously, the arms of the handle have the 5 shape of half-shells surrounding the central handle element.

The central handle element is perforated by two 10 openings, one at the front and the other at the rear, which allow the passage of a spring working under compression. Each spring pushes the two arms away from one another until contact is made with a stop on the central element. Preferably, a stud or other fixing element retains the end of the spring in place.

Various accessories which facilitate the 15 hairdressing operation can be incorporated in the tongs which have just been described as will emerge from the description below of a preferred embodiment of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 shows a view in section of hairdressing tongs according to the invention (limited to the essential components);

Figs 2A, 2B and 2C show hairdressing tongs according to the invention in three positions of use;

25 Figs 3A, 3B and 3C illustrate different possibilities for mounting the pads on the hairdressing tongs, and

Fig. 4 illustrates the possibility of mounting accessories on the hairdressing tongs.

30 The same reference numbers are used in the various figures for identical or similar elements.

#### DESCRIPTION OF AN EMBODIMENT OF THE INVENTION

The hairdressing tongs shown by the general reference 1 comprise two heating pads 3 and 5 connected 35 to a handle 7. These pads are provided with electric resistors (not shown) fed by an electric wire running through the handle 7. This handle 7 consists of a central element 9 and two arms 11 and 13.

The arm 11 extends in a nose 15 in which the

- 4 -

heating pad 3 is mounted while the arm 13 extends in a nose 17 in which the heating pad 5 is mounted.

The central element 9 comprises stops 19 at its ends for steps 21 formed on the arms 11 and 13.

5 The springs 23 and 25, at the front and rear end respectively of the handle 7, are held by studs and separate the arms 11 and 13, and consequently also the heating pads 3 and 5, from one another.

It is easy to see that by pressing (see Fig. 2A) 10 on the rear of the tongs evenly, on the front and the rear (Fig. 2B) or on the front (Fig. 2C), the tongs and, more precisely, the heating pads can assume a position of angular separation, a parallel position or a position of gripping at the front of the heating pads. Other 15 intermediate positions are possible, thus affording the user the possibility of carrying out all shaping styles.

The two arms 11 and 13 preferably have the shape of half-shells covering two lateral walls integral with the central element 9, the handle also being closed at 20 its front end and at its rear end.

The upper nose 15 of the tongs can be provided with a reservoir 31 which can be removed to allow it to be filled and which communicates with the pad 3 in order, subject to the action of a control positioned for 25 example on the handle 7, to give rise to the emission of steam on or between the pads.

Figure 3A shows noses 15 and 17 which extend the arms 11 and 13 and in which the pads 3 and 5 are mounted, the noses thus forming protection shells for 30 the pads.

In the case of Figure 3B, the heating pads 3 and 5 are mounted in a projecting manner on the end of the arms 11 and 13.

According to another variant shown in Figure 3C, 35 the heating pads 3 and 5 are slipped onto rods 33 and 35 integral with the arms 11 and 13.

The heating pads can be fixed or interchangeable and have any appropriate shape, namely flat, convex, concave, undulating etc.

- 5 -

The pads may also be axially orientable or reversible, depending on the requirements of users.

As Figure 4 indicates, the nose 15 can be shaped so as to be capable of being provided with one or more 5 adaptable elements 37 equipped for example with a double row of comb teeth.

Numerous variants are of course possible according to the invention while remaining within its scope as defined by the claims below.

- 6 -

CLAIMS

1. Hairdressing tongs comprising:

a pair of arms extending from handles, each arm having a heating pad affixed thereto, said handles having opposed openings;

5 a central element positioned between said handles and fitted within said openings such that said handles are slidable towards said central element, said central element including at least two guide openings; and

10 spring means positioned in each of said at least two guide openings for biasing apart said handles, said spring means enabling hand pressure to move said handles and said pair of arms together from a completely open position to a completely closed position, wherein said spring means in absence of said hand pressure maintains said handles and said 15 pair of arms in relatively parallel configuration biased against stops of said central element.

2. Hairdressing tongs according to claim 1, wherein each said handle is in the shape of a half-shell that fits about 20 said central element.

3. Hairdressing tongs according to claim 1, wherein said heating pads are mounted so as to project from said pair of arms.

25

4. Hairdressing tongs according to claim 1, wherein said heating pads are positioned on rods that are integral with said pair of arms.

30

5. Hairdressing tongs according to claim 1, wherein said heating pads are changeable.

- 7 -

6. Hairdressing tongs according to claim 1, wherein said at least two guide openings are two guide openings, and wherein said spring means are two springs, each guide opening including one said spring.

5

7. Hairdressing tongs according to claim 1, further comprising:

10 a reservoir for holding water in communication with at least one of said heating pads, an aperture in at least one of said pair of arms enabling emission of steam therefrom.

8. Hairdressing tongs according to claim 1, further comprising a removable toothed element that slidably fits on at least one said arm.

15

9. Hairdressing tongs comprising:

20 a central element including at least two guide openings; a pair of half-shell shaped handles each having a front end and a back end, wherein said handles fit about said central element such that said handles are slidable toward said central element;

a pair of arms extending from said front ends of said handles, each arm having a heating pad affixed thereto;

25 spring means positioned within each of said at least two guide openings biasing said handles apart against stops of said central element, said spring means enabling hand pressure applied to said back end of said handles to move a first portion of said pair of arms together from a completely open position to a completely closed position and enabling hand pressure applied to said front end of said handles to move a second portion of said pair of arms together from a completely open position to a completely closed position.

30

- 8 -

10. Hairdressing tongs according to claim 9, wherein said heating pads are mounted to project from said pair of arms.

11. Hairdressing tongs according to claim 9, wherein said 5 heating pads are positioned on rods that are integral with said pair of arms.

12. Hairdressing tongs according to claim 9, wherein said heating pads are changeable.

10

13. Hairdressing tongs according to claim 9, wherein said at least two guide openings comprises two guide openings, and wherein said spring means comprises two springs, each one of said two guide openings includes one of said springs.

15

14. Hairdressing tongs according to claim 9, further comprising:

a reservoir for holding water in communication with at least one said heating pads; and

20

an aperture in at least one of said pair of arms to enable emission of steam therefrom.

25

15. Hairdressing tongs according to claim 9, further comprising a removable toothed element that slidably fits on at least one of said pair of arms.

30

16. Hairdressing tongs comprising heating pads fixed to the end of two arms of a handle, characterized in that a central element of the handle serves as a guide for the arms which can be moved transversely from a completely contracted position with the two heating pads in complete contact, to a position of maximum separation, bringing the two arms into a position of contact with one or more stops of the central

- 9 -

element, spring elements maintaining the maximum separation of the arms at a rest position, in the absence of action on the arms.

- 5 17. Hairdressing tongs according to Claim 16, characterized in that the arms of the handle have the shape of half-shells surrounding the central element of the handle.
- 10 18. Hairdressing tongs according to Claim 16, characterized in that the heating pads are mounted in a projecting manner on the end of the arms.
- 15 19. Hairdressing tongs according to Claim 16, characterized in that the heating pads are slipped onto rods integral with the arms.
- 20 20. Hairdressing tongs according to any one of Claims 16 to 19, characterized in that the heating pads are fixed and of a shape selected from the group consisting of: flat, convex, concave and undulating.
- 25 21. Hairdressing tangs according to any one of Claims 18 to 20, characterized in that the element is perforated by at least one hole at the front and another at the rear, in which a first spring element and a second spring element respectively pass through.
- 30 22. Hairdressing tongs according to any one of claims 16 to 21, characterized in that it is equipped with a reservoir of liquid, which makes it possible to emit steam obtained from water contained in the reservoir.


- 10 -

23. Hairdressing tongs according to any one of claims 16 to 22, characterized in that it is equipped with an element removably fitted to one of said heating pads, said element being provided with a double row of teeth.

5

24. Hairdressing tongs according to any one of Claims 16 to 19, characterized in that the heating pads are interchangeable and of a shape selected from the group consisting of: flat, convex, concave and undulating.

1 / 4

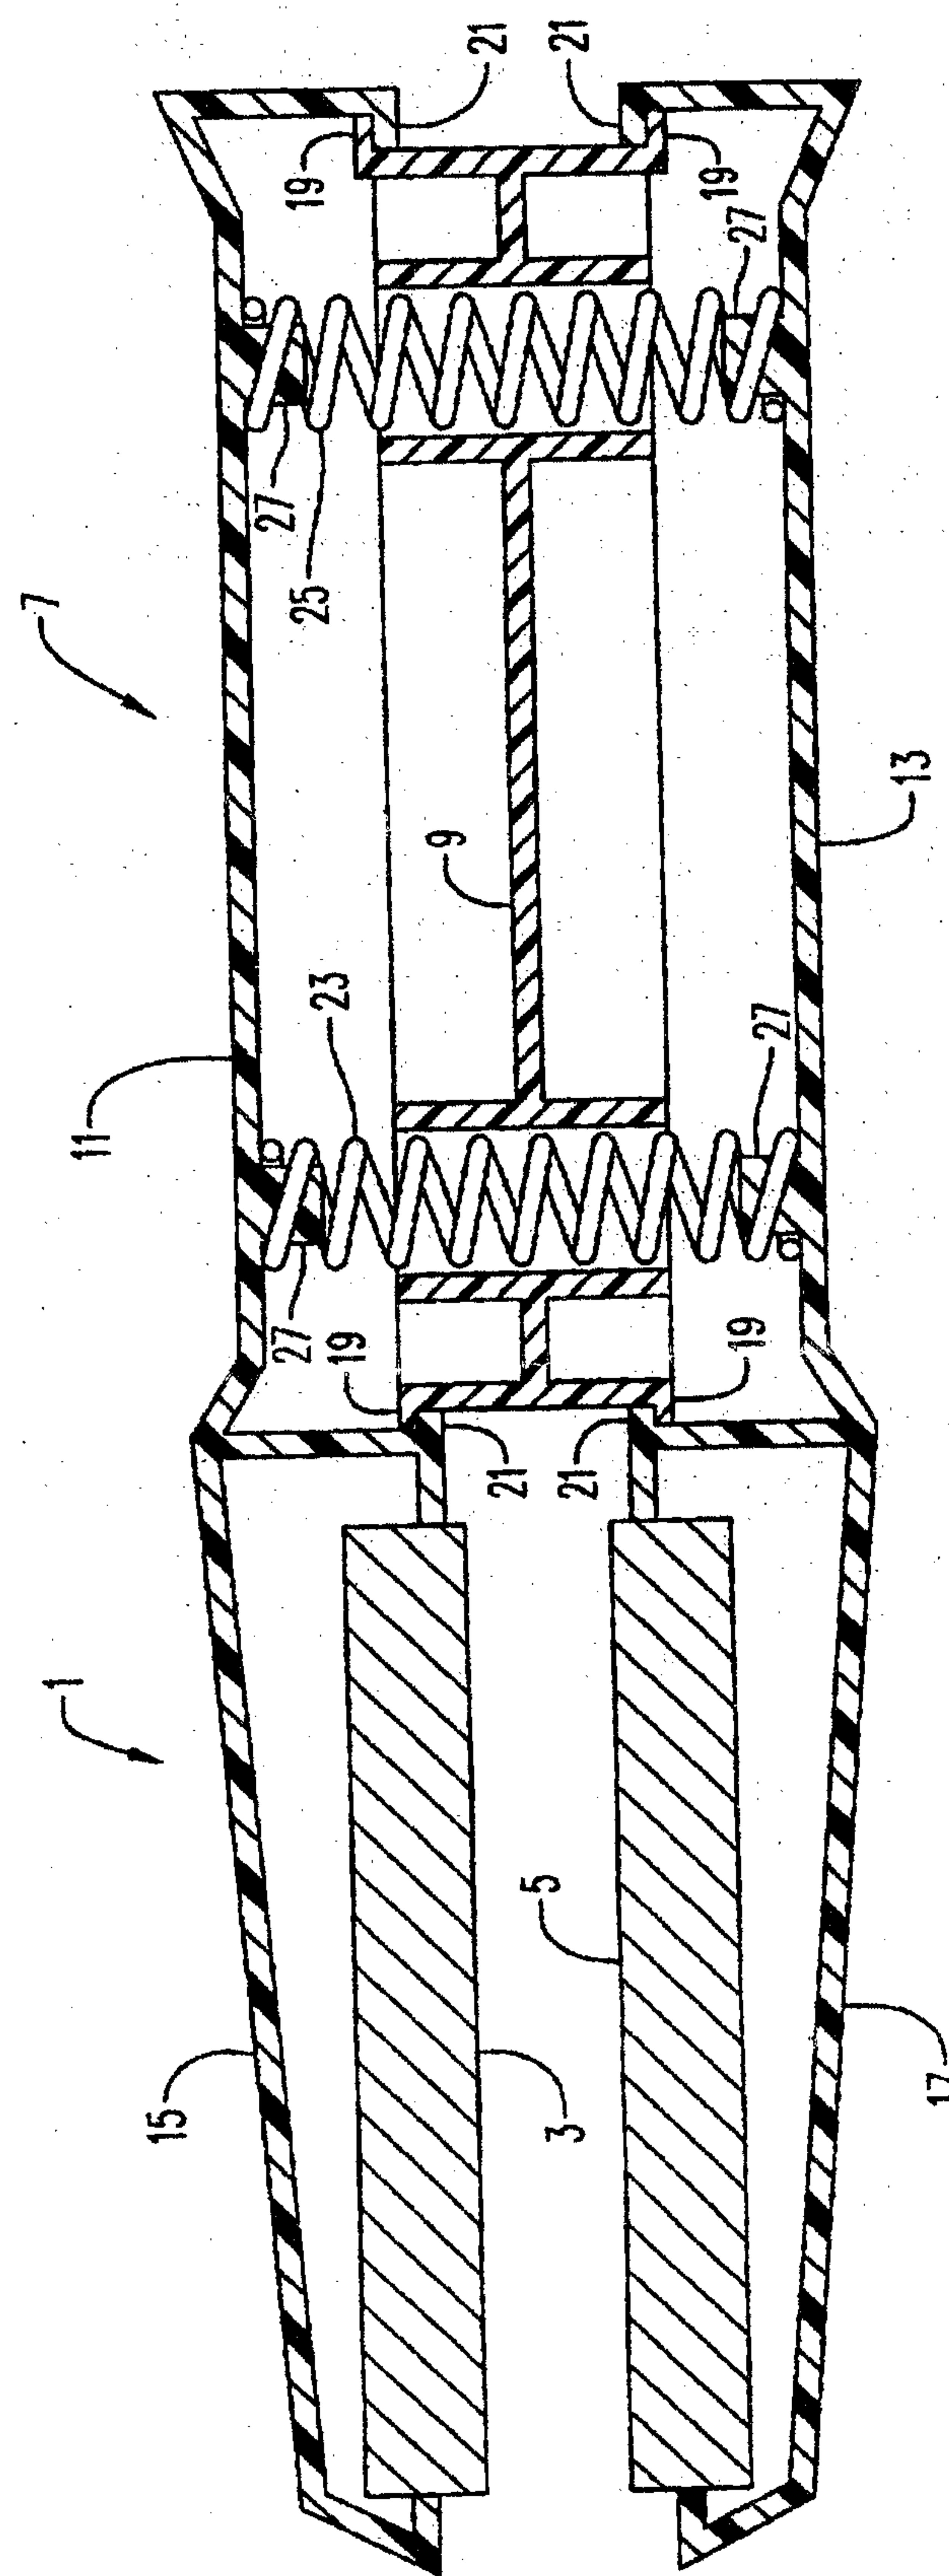

५८

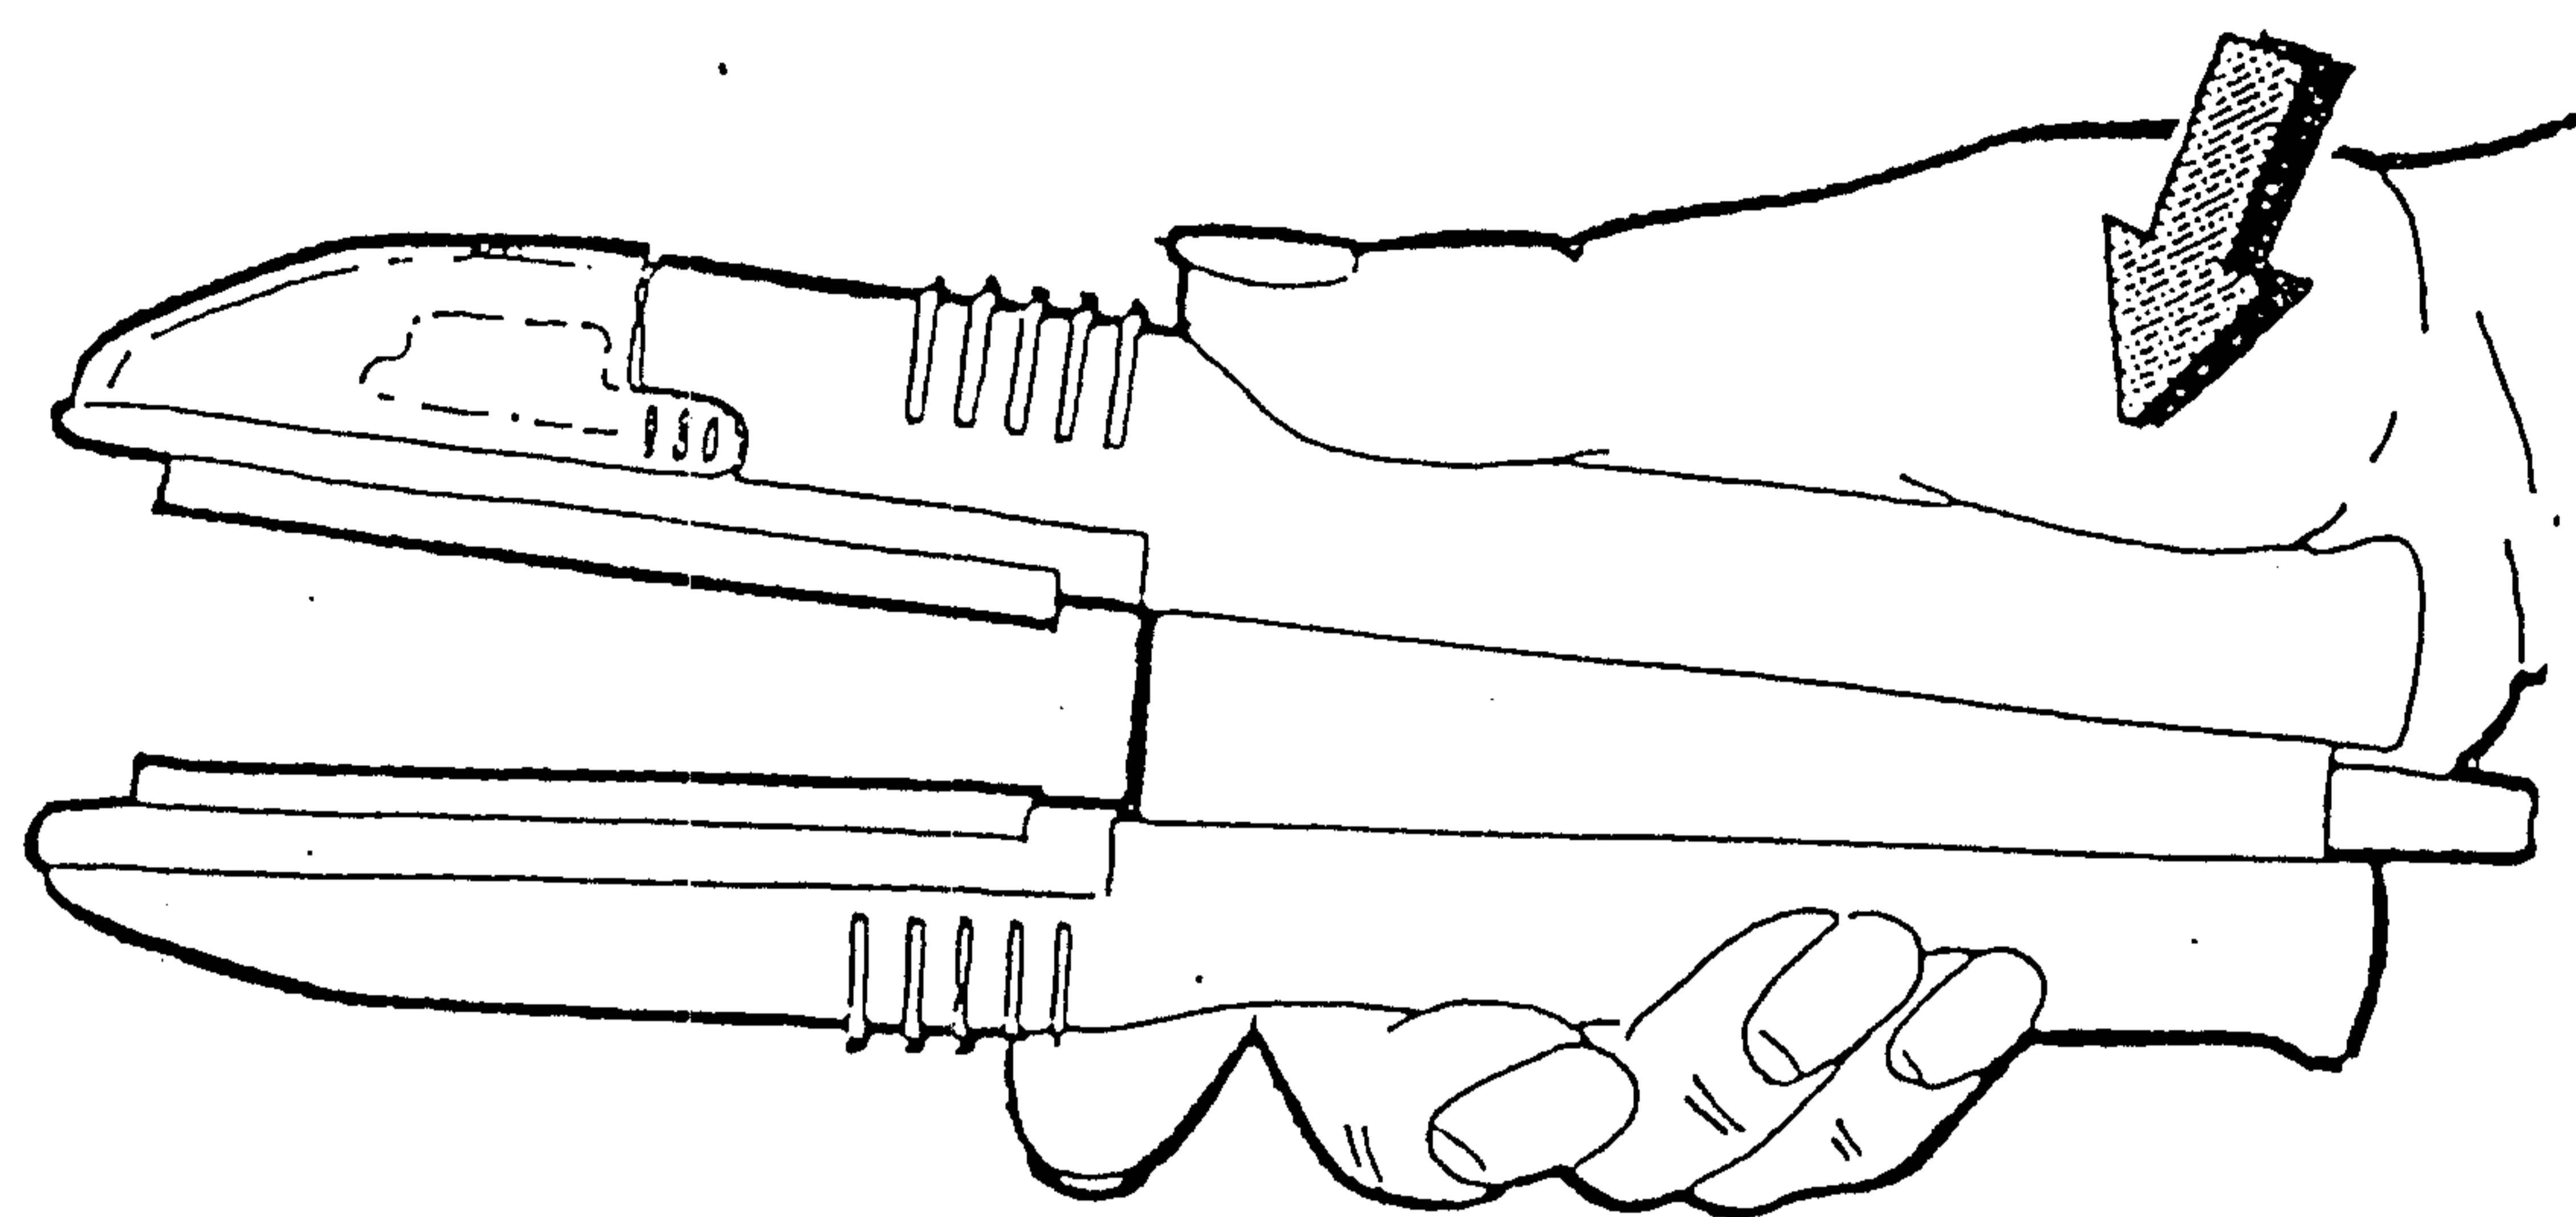


FIG. 2A

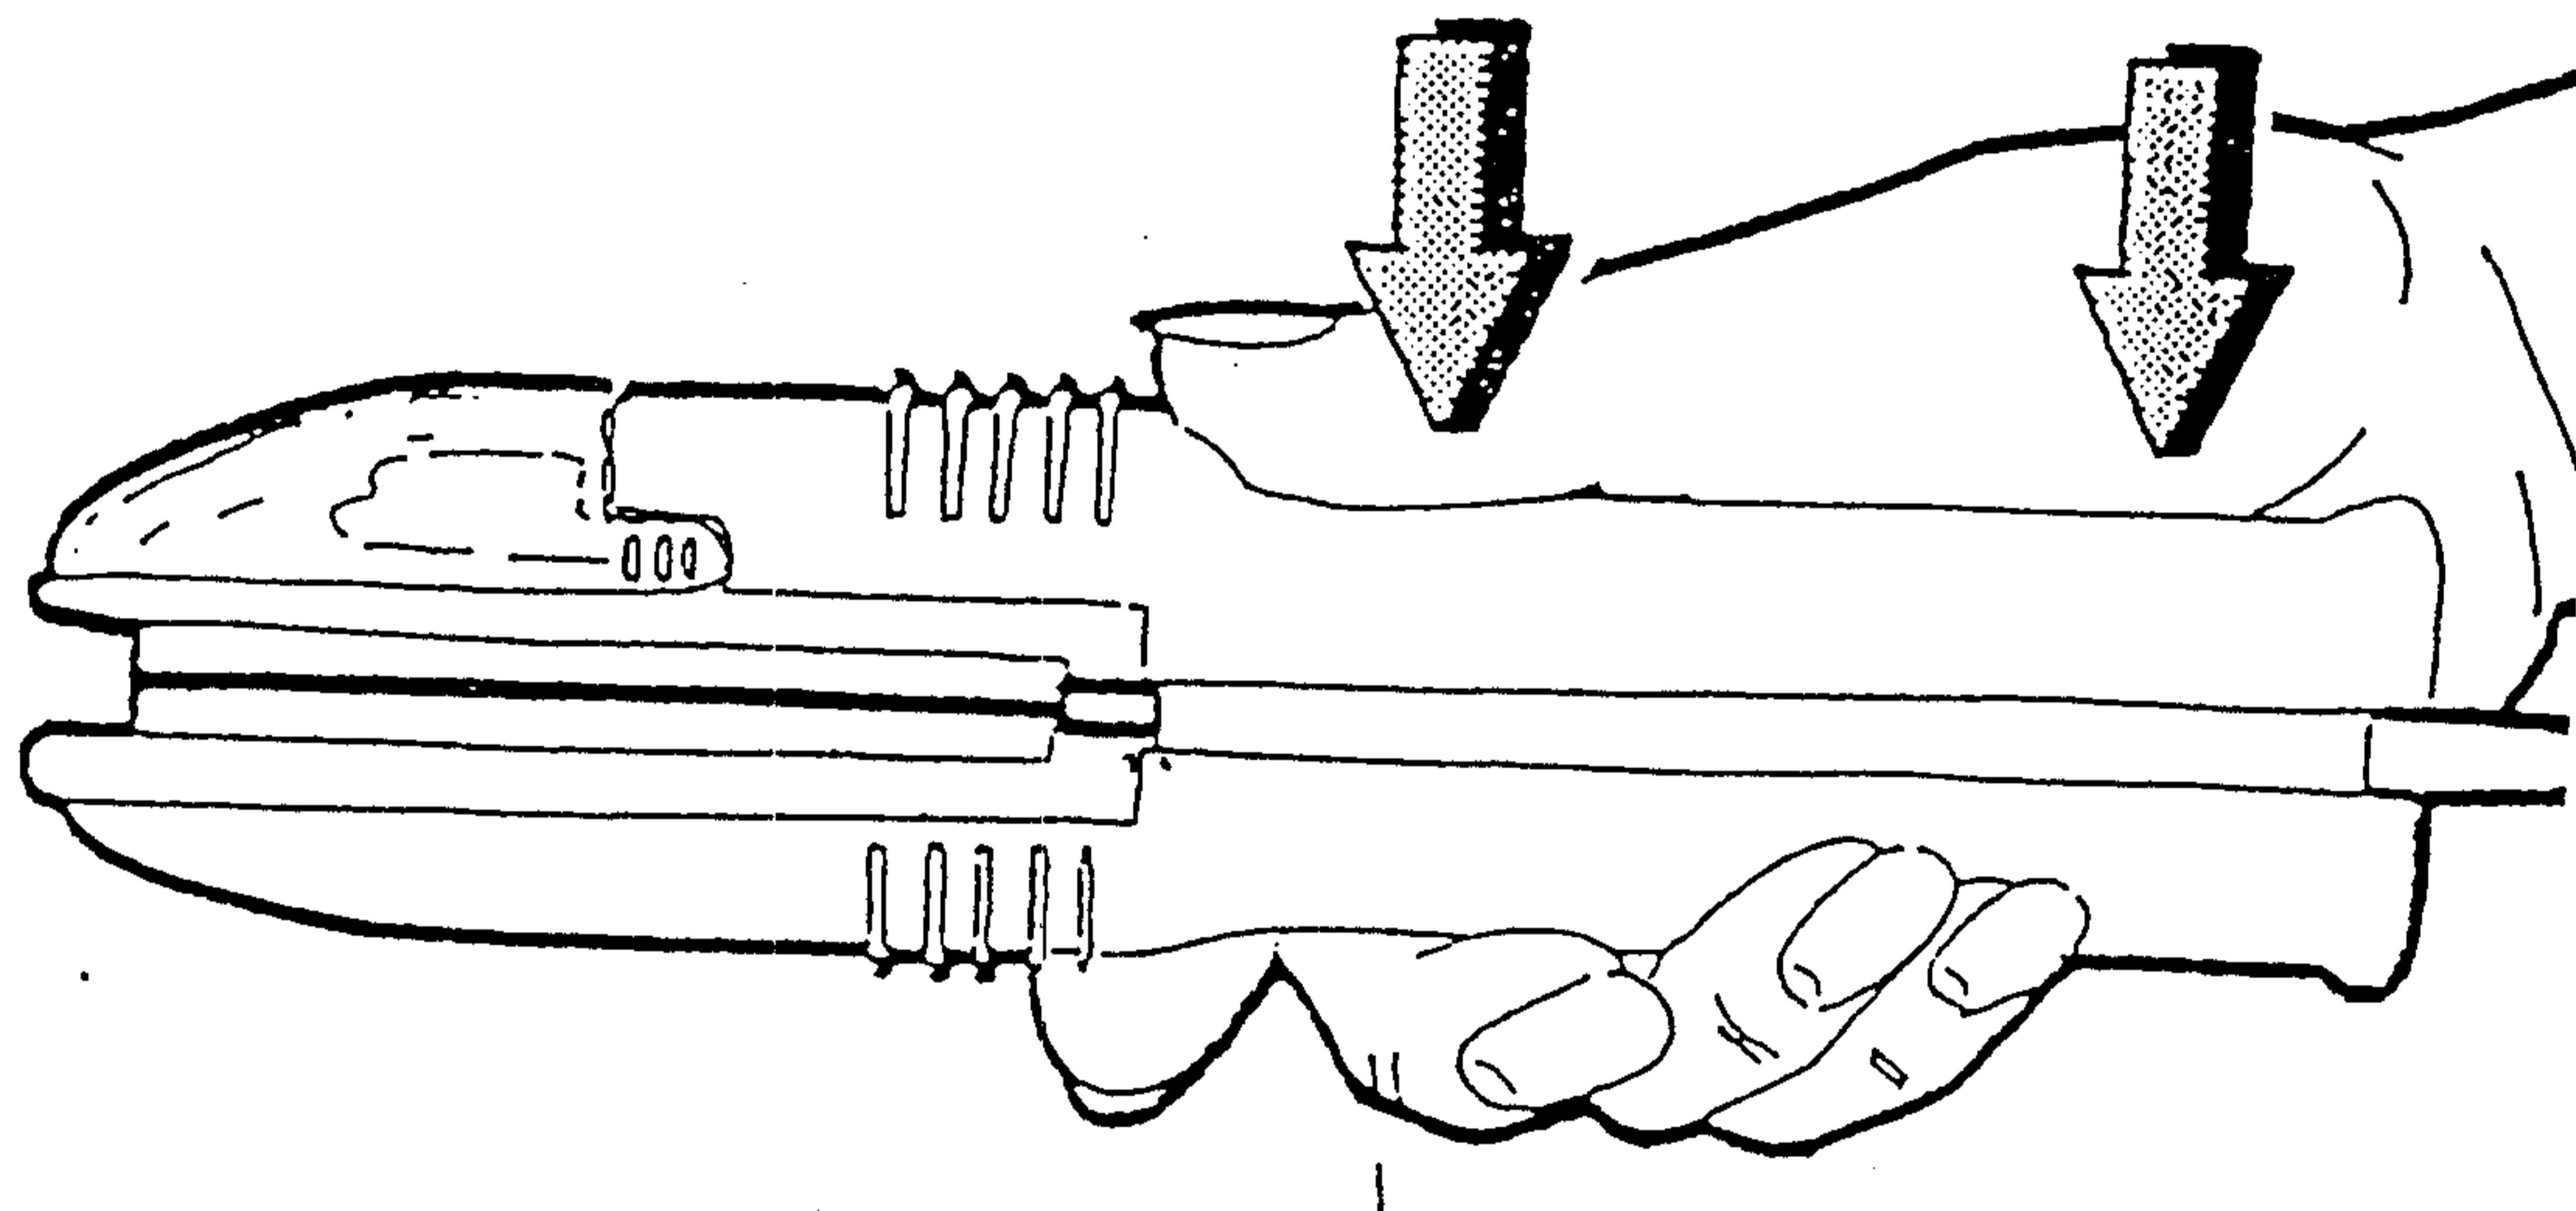


FIG. 2B

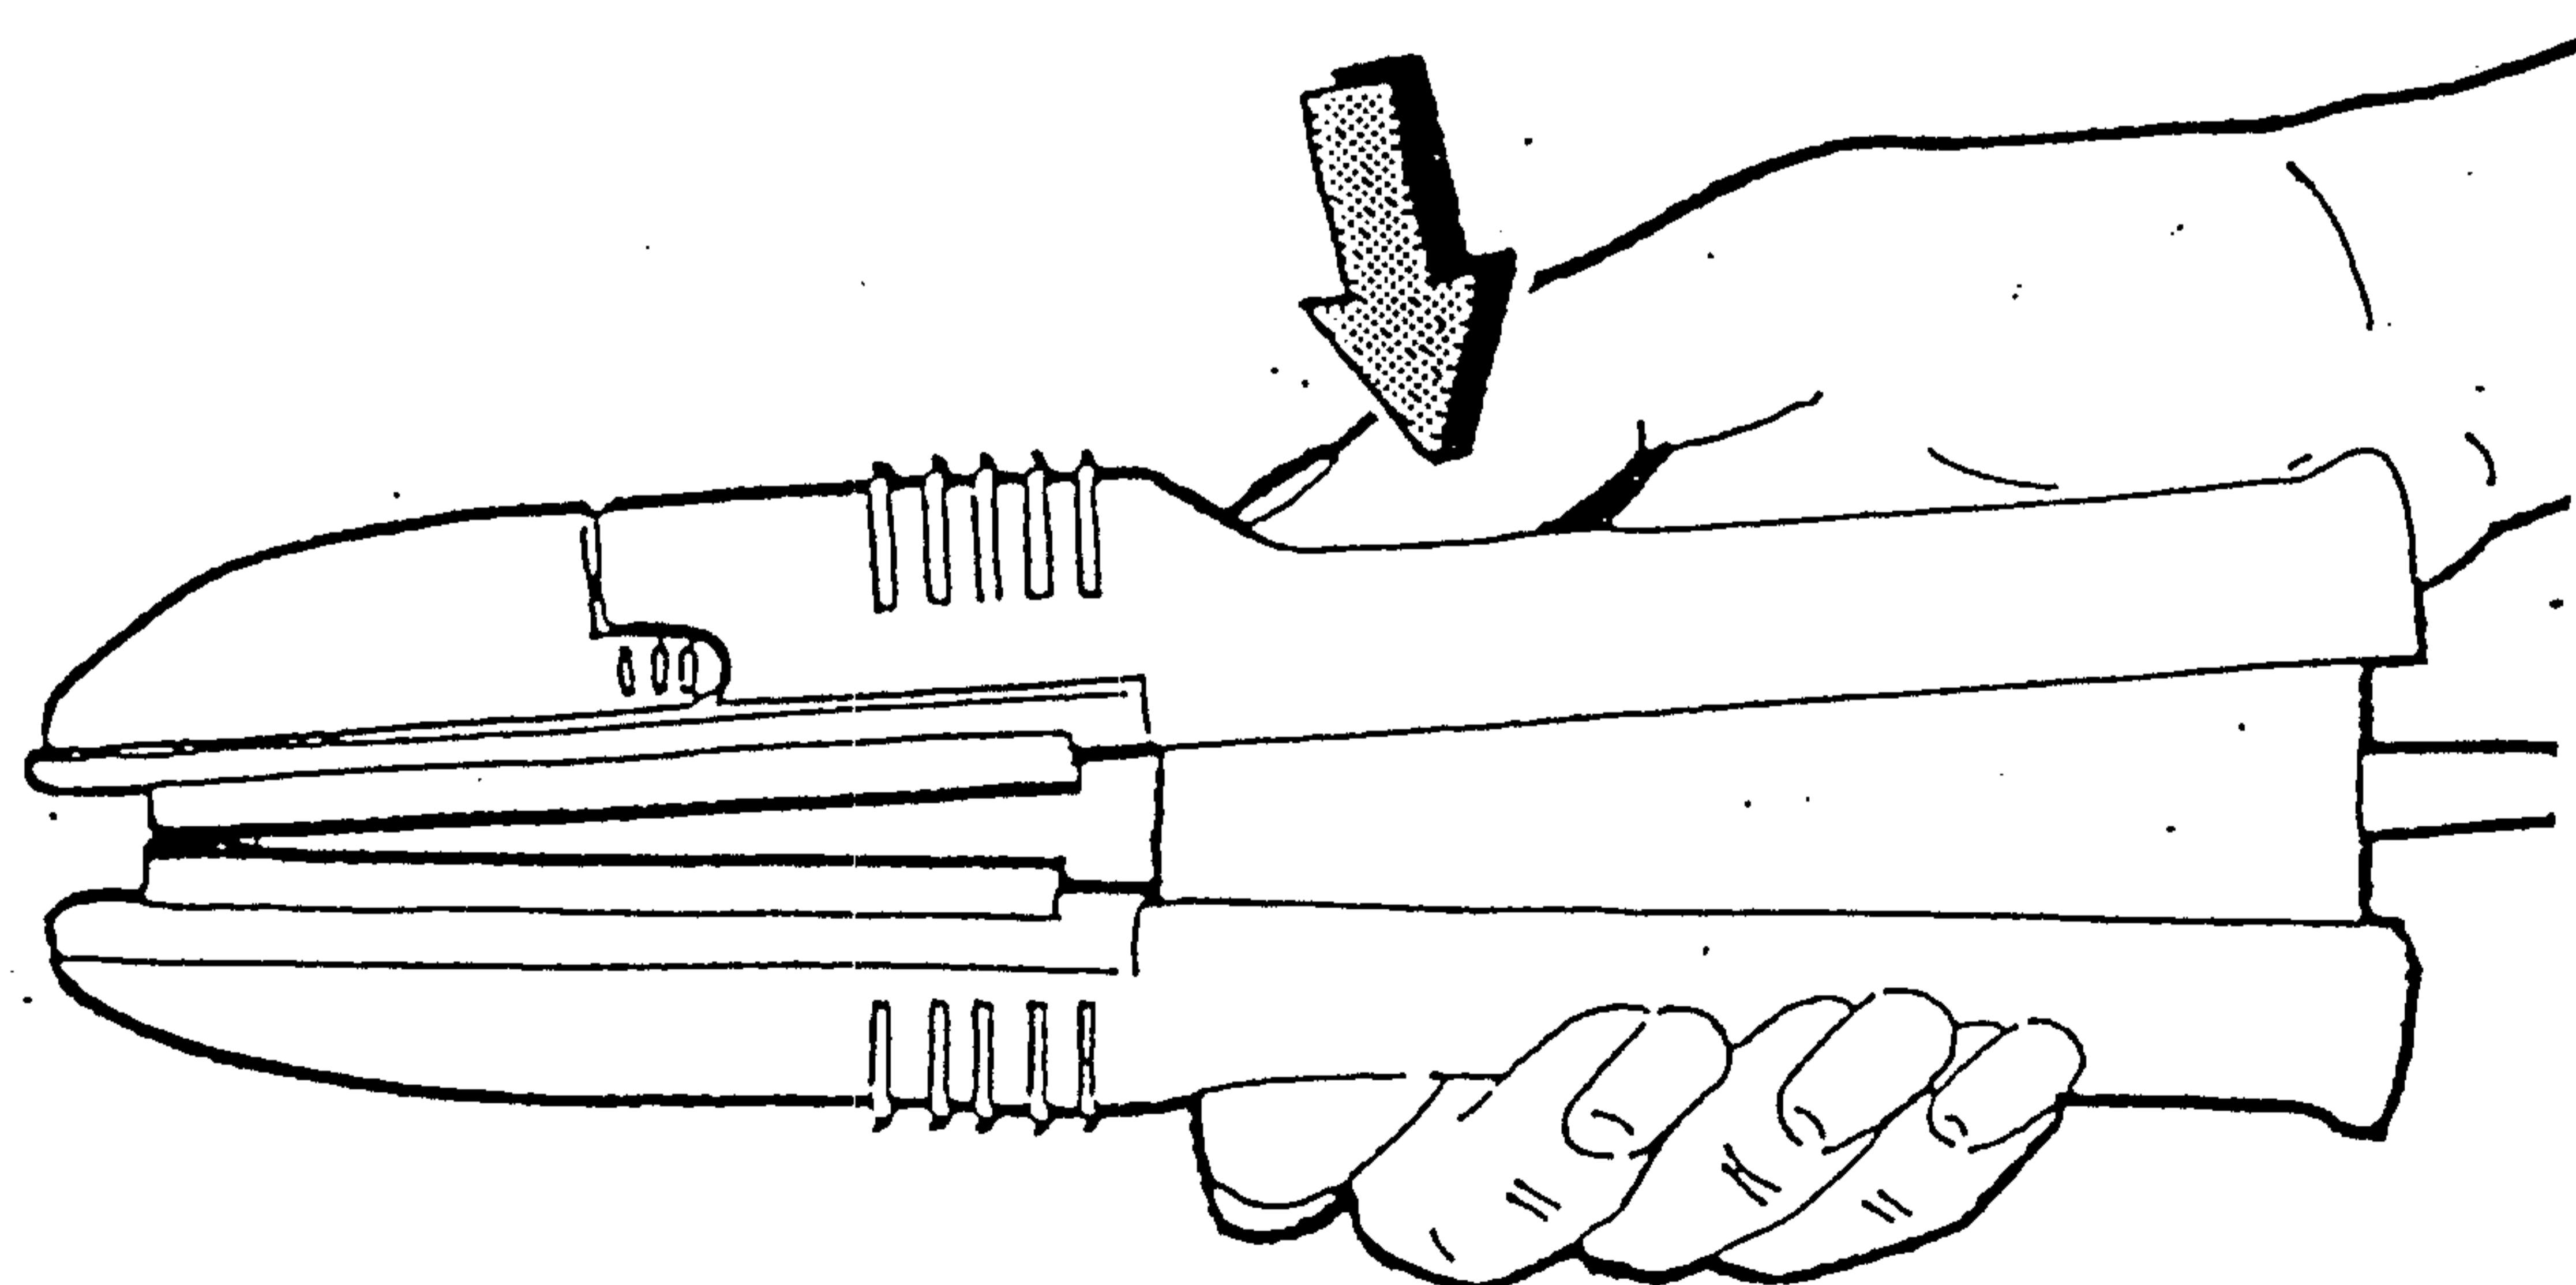
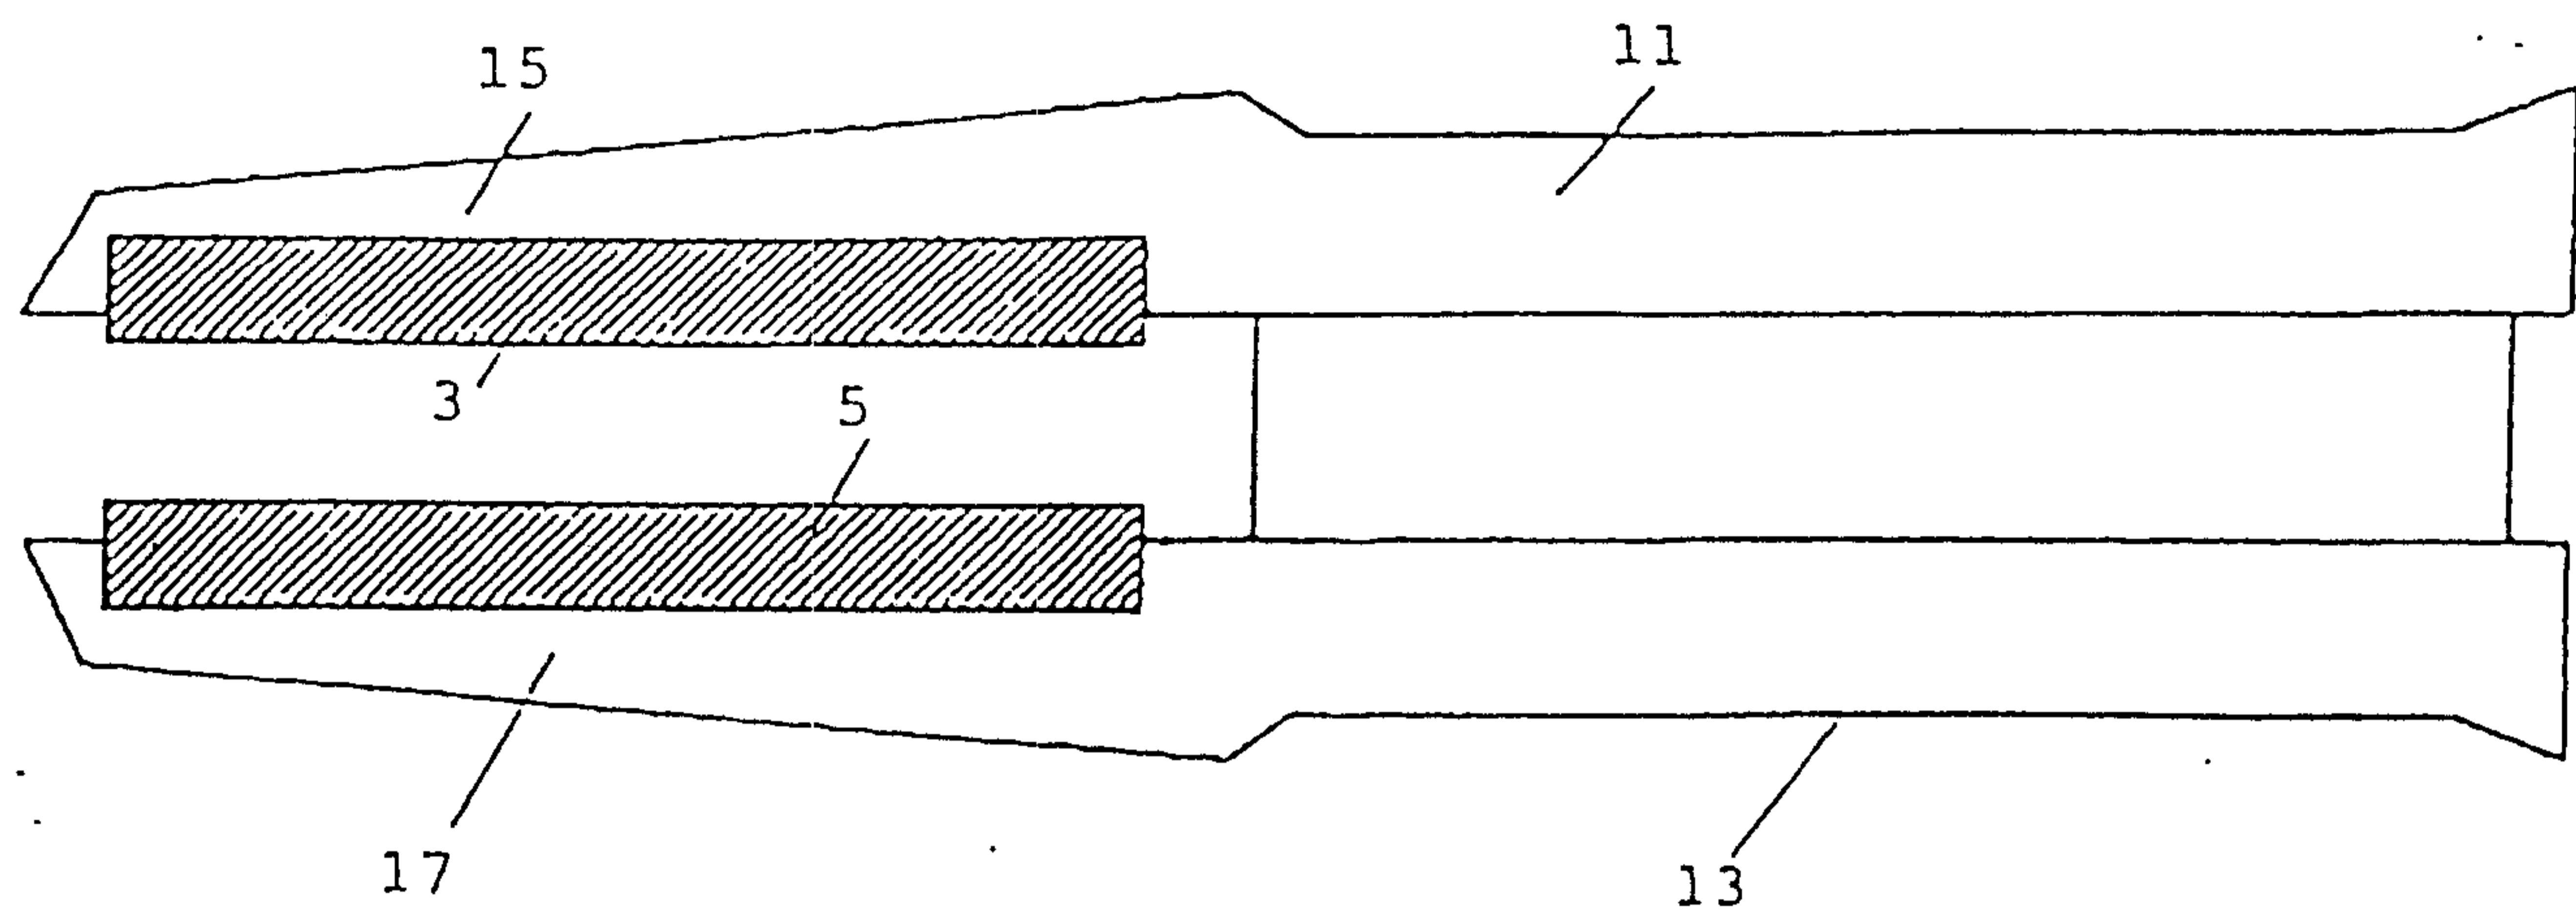
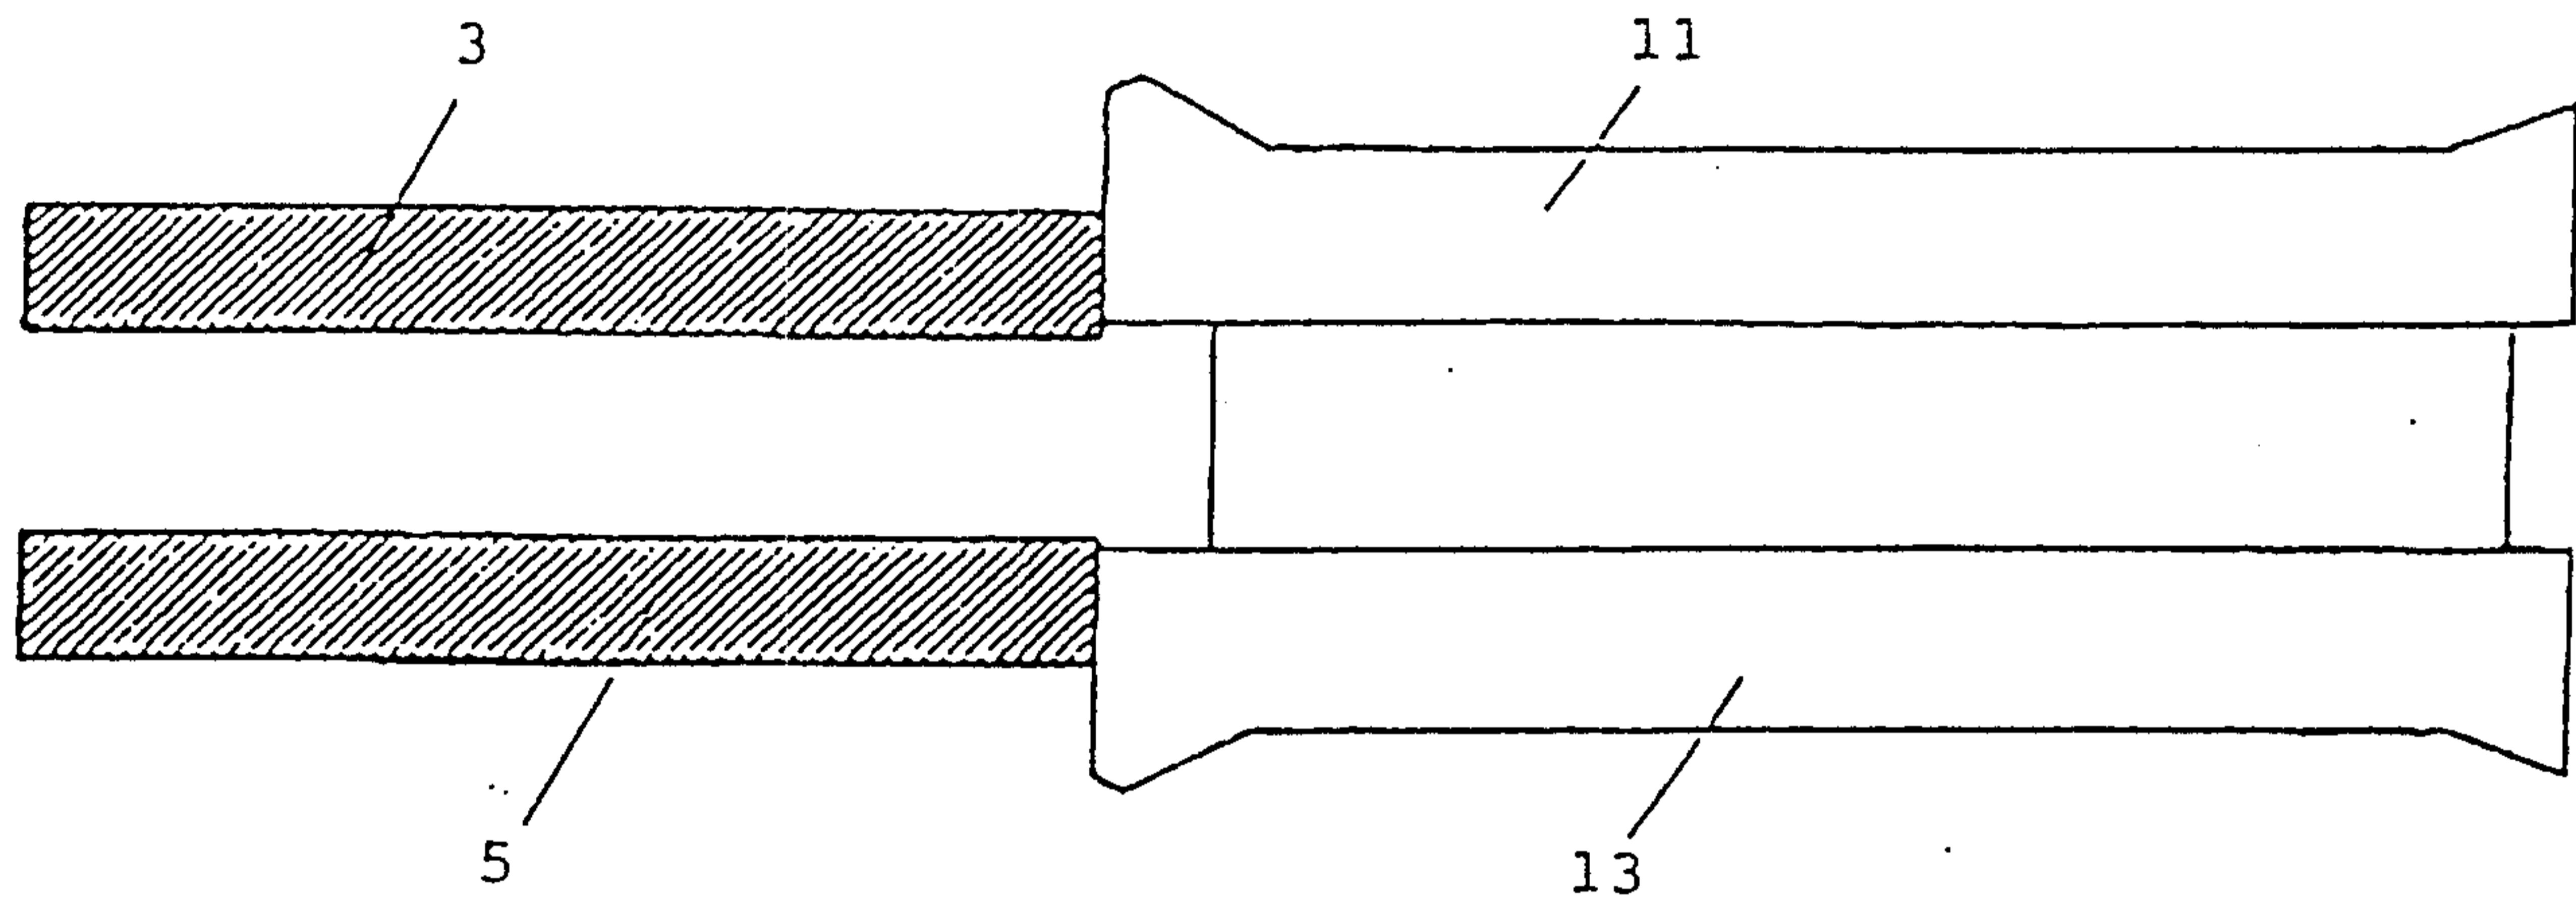
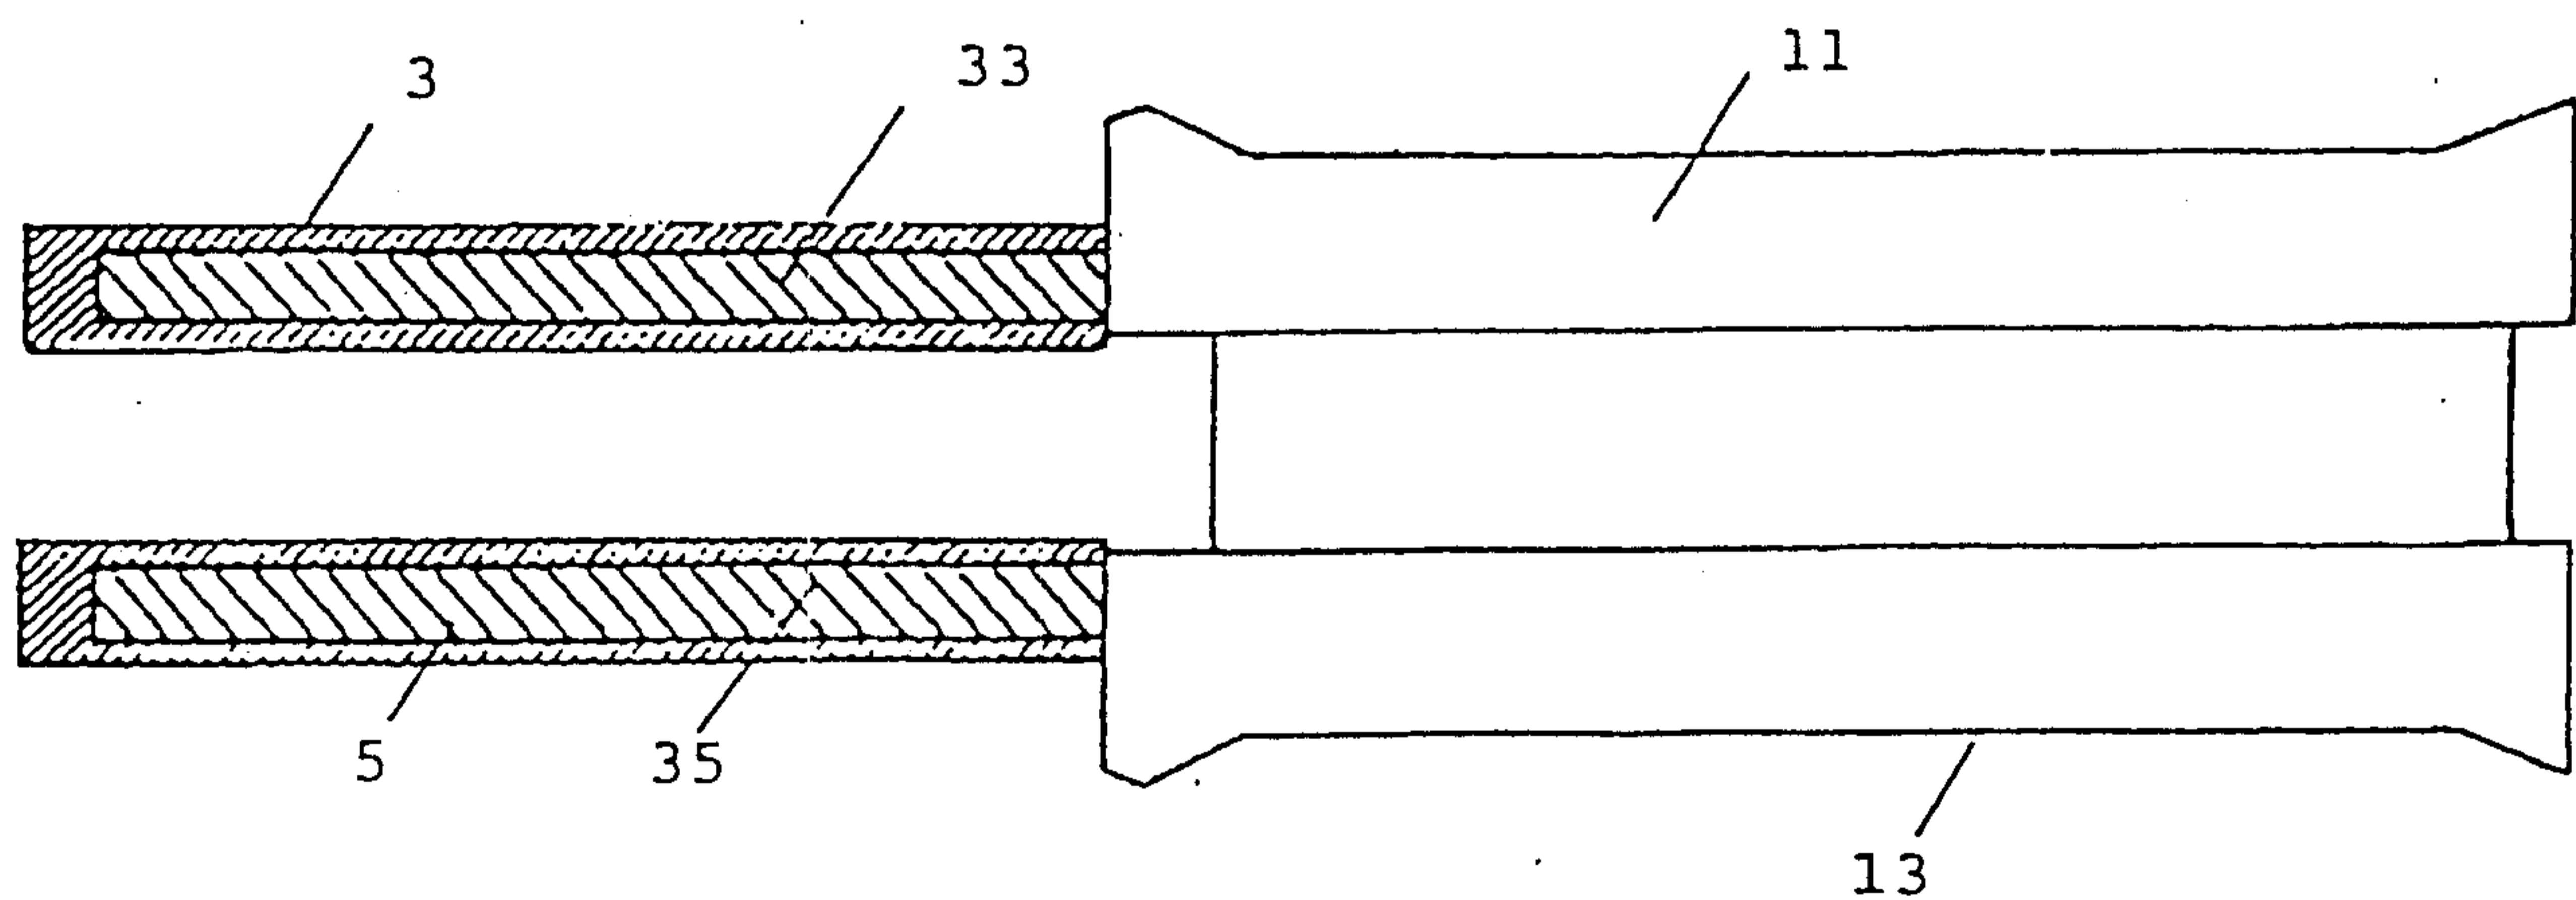


FIG. 2C

Gowling, Strathy &amp; Henderson

3/4

FIG. 3AFIG. 3BFIG. 3C

4 / 4

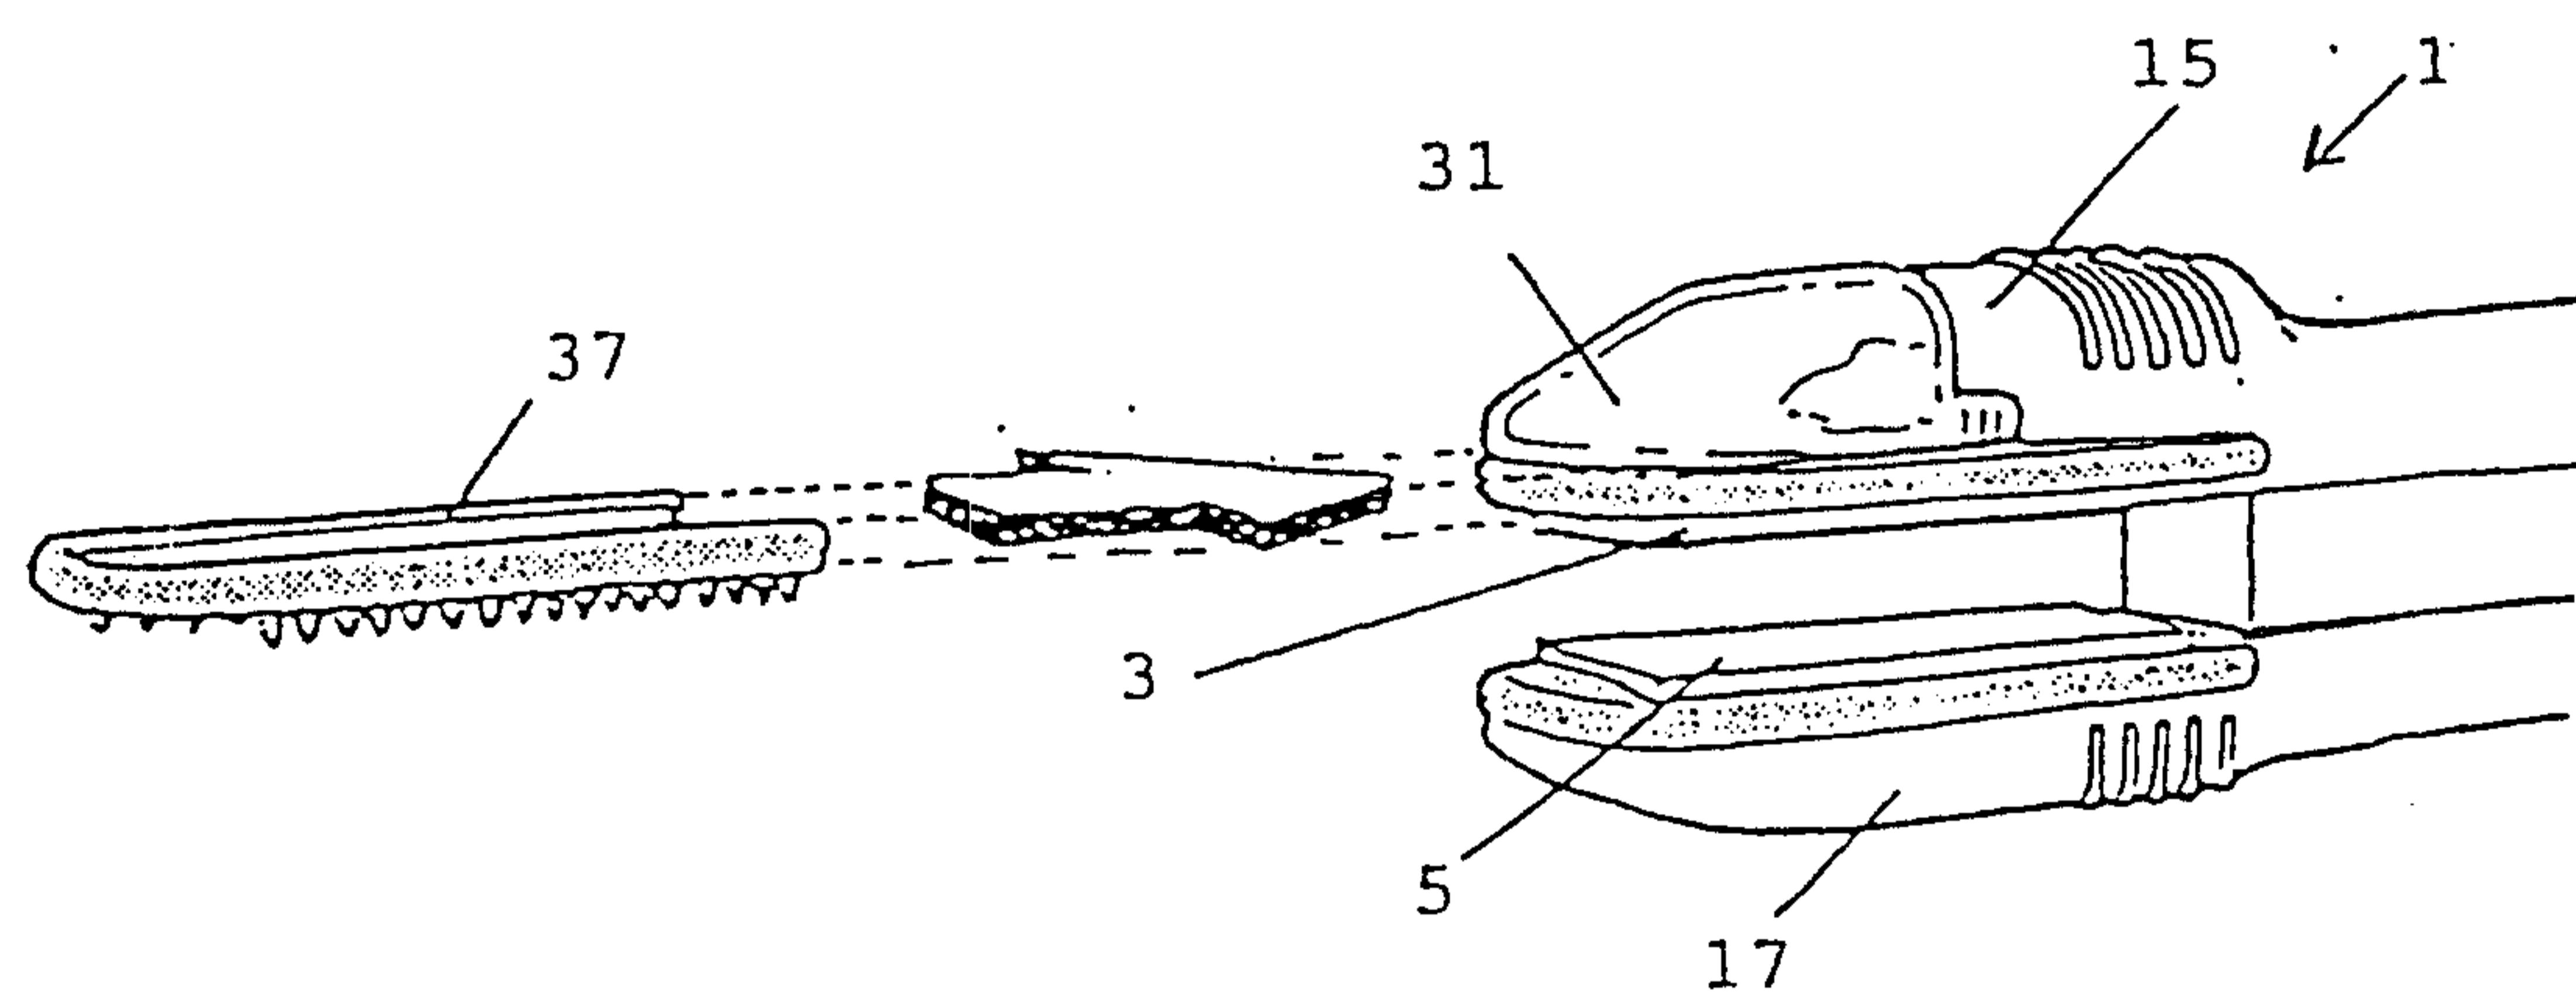


FIG. 4

