



(51) International Patent Classification:
B64C 3/44 (2006.01) **B64C 3/14** (2006.01)

(21) International Application Number:
PCT/IL2009/000903

(22) International Filing Date:
16 September 2009 (16.09.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
194156 17 September 2008 (17.09.2008) IL
194155 17 September 2008 (17.09.2008) IL

(71) Applicant (for all designated States except US): **ISRAEL AEROSPACE INDUSTRIES LTD.** [IL/IL]; Ben Gurion International Airport, 70100 Lod (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHEPSH-ELOVICH, Michael** [IL/IL]; 9 Golan Street, 55900 Ganei Tikva (IL). **ABRAMOV, Danny** [IL/IL]; 8 Yechiel Paldi Street, 76248 Rehovot (IL).

(74) Agent: **REINHOLD COHN & PARTNERS**; 26A Habarzel Street, P.O.B. 13239, 61131 Tel-Aviv (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: AEROFOILS

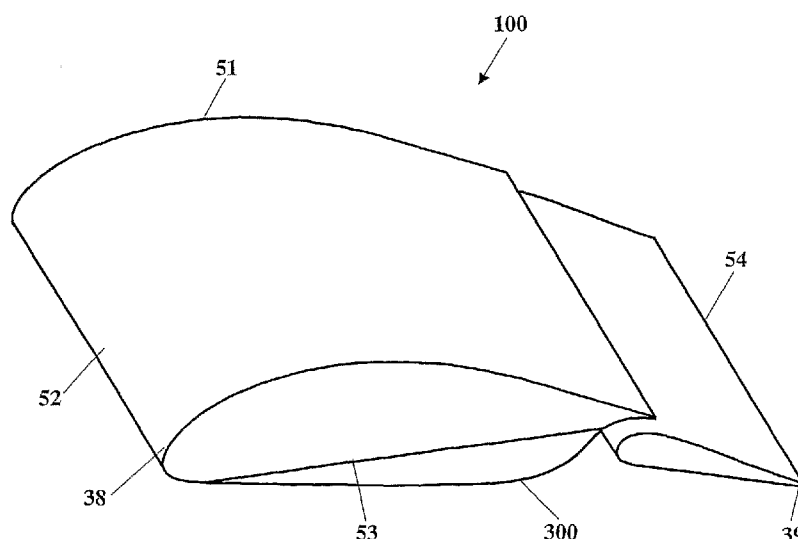


Fig. 2.

(57) Abstract: A two element aerofoil, and wing element based thereon, is provided, including a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil. A gap is provided between the primary aerofoil element and the secondary aerofoil element. The primary aerofoil element has at least one of a profile, orientation and location with respect to a respective at least one of a profile, orientation and location of the secondary aerofoil element that is configured for minimizing or avoiding accretion of contaminant on the secondary aerofoil element when subjected to an airflow that includes the contaminant, at least at one design set of conditions. A method for designing a two element aerofoil is also provided.



AEROFOILS

FIELD OF THE INVENTION

This invention relates to aerofoils and wings based on aerofoils, and in particular to methods and devices for reducing or preventing contamination of the same.

5 BACKGROUND OF THE INVENTION

Contaminants, for example ice, rain, water droplets, sand, smoke particles, dust particles, or other contaminants that may accumulate on external surfaces of aircraft, particularly aerofoils and other aerodynamic surfaces, can seriously affect the aerodynamic performance, in particular the lift and drag characteristics, of the aircraft,
10 and can also change the weight and centre of gravity of the aircraft.

For laminar wings, relatively minor wing contamination or flow disturbances (depending on Reynolds number) can produce a complete loss of laminar flow on the wing surfaces, and the loss of laminar flow results in drag penalties and to deterioration of maximum lift. However, strong contamination with the ensuing more significant flow
15 disturbances, may go beyond simple loss of laminar flow and may result in fully turbulent flow on the wing surfaces. For turbulent wings, increase of flow disturbances produce a further deterioration of maximum lift and a further increase of drag penalties. If contamination and the flow disturbances continue to increase, the wings may become unflyable.

20 De-icing apparatus are known and operate by periodically removing ice after it accumulates, by thermal, chemical or mechanical means. Anti-icing apparatus are also known, and attempt to prevent the formation of ice in the first place.

Thermal anti-icing systems include bleed air systems that use exhaust gas from the aircraft to heat air which is circulated in ducts running along areas of the aircraft
25 where it is wished to prevent the ice build up, preventing the ice from forming or melting the same. Electro-thermal systems use electrically powered heating elements on these areas of the aircraft.

Other anti-icing systems use a chemical such as antifreeze, injected to the ice-prone surfaces to prevent the ice from forming. For example, by way of general

- 2 -

background, in US 5,322,246 a chemical or thermal deicing or running wet anti-icing device is located in or on the airfoil upstream of an aft facing step situated across the span of a single element airfoil, and causes water to run back towards the step. The step suddenly reduces the thickness of the airfoil chord section, which causes a disturbance
5 in the boundary layer across the span of the airfoil downstream of the step. According to the patent, the aforementioned disturbance causes runback water to form droplets and be blown clear of the airfoil surface downstream of the step.

Known anti-icing systems are generally directed to single aerofoil element, and are not directed to wings based on two-element slotted aerofoils, in particular to the
10 accumulation of ice, rain or other contaminants on the second element of such aerofoils.

Solutions for dealing with other types of contaminants with respect to aerofoils or wing surfaces are not generally known or used.

SUMMARY OF THE INVENTION

15 The present invention relates to methods and devices for reducing or preventing contamination, in particular ice accretion, heavy rain or other contaminants, on slotted aerofoils.

Herein, the term "slotted airfoil" refers to two-element airfoils composed of a first element (also referred to herein as a primary aerofoil element), the main aerofoil body,
20 and a second element (also referred to herein as a secondary aerofoil element), in the form of a flap or aileron segment. The second element of slotted airfoils is permanently separated from the main body by a slot which is substantially open for the airflow at any deflection of the flap, and the second element does not retract to a retracted position that results in the substantially closed aerodynamic contours of a single-element airfoil. A
25 feature of this structure is that it facilitates actuation of the second element through positive or negative deflection angles. Another feature of this structure is that a box-like relatively rigid construction may be achieved. With the second aerofoil element optionally coupled to actuators, the slotted airfoils of the invention provide the features of adjustable geometry and have built-in options for operating as take-off/landing flaps,
30 ailerons, airbrake and for providing decambering at maximum speed flight. Slotted

- 3 -

airfoils according to the invention are mission-adaptive, two-element, high-lift arrangements, and are inherently high-lift airfoils that are particularly suitable for development of long endurance UAV and other aircraft, loitering at high lift coefficients, in particular under unfavorable conditions in which contaminants could
5 potentially cause an accretion problem and/or increase turbulent flow.

Slotted airfoils according to at least some embodiments of the invention are essentially high-lift wing sections, that benefit from the airflow through the slot of two-element arrangement to achieve high maximum lift, and in which passage of contaminants through the gap and onto the second element is minimized or avoided.
10 Positive flap deflections of the second element of these airfoils may produce a further enhancement of maximum lift, and an improvement in minimizing or avoiding accretion of contaminants, but this may be accompanied with some degradation of their stall characteristics.

According to one aspect of the invention there is provided a two element aerofoil
15 comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and comprising a gap (also referred to herein as a slot or as a permanent slot) between said primary aerofoil element and said secondary aerofoil element, the primary aerofoil element having at least one parameter (e.g including one or more of a profile, orientation and
20 location) with respect to a respective at least one parameter (e.g. including one or more of a respective a profile, orientation and location) of said secondary aerofoil element configured for minimizing or avoiding accretion of contaminant on said secondary aerofoil element when subjected to an airflow comprising said contaminant, at least at one design or predetermined set of conditions. Such a parameter may be a geometric
25 parameter and/or an aerodynamic parameter. Such a design or predetermined set of conditions may comprise, for example, a range of flight conditions, or the range of lift coefficients covering certain mission stages, for example loitering and/or cruising.

The contaminant may be in the form of particulate matter flowing in a downstream direction with respect to said leading edge of said aerofoil, for example the
30 particulate matter may comprise at least one of ice, snow, rain, water droplets, sand, smoke particles or dust particles.

- 4 -

The pressure surface of said primary aerofoil element may comprise a pressure surface profile configured for minimizing accretion of said particulate matter on said secondary aerofoil element. The pressure surface profile may be configured for minimizing flow into said gap of said particulate matter that may be flowing over said pressure surface. The pressure surface profile may be configured for minimizing or preventing flow into said gap of said particulate matter that may be flowing along or proximate to a boundary layer over said pressure surface.

The pressure surface profile may be further configured to enable airflow through said gap for enabling aerodynamic operation of said two element aerofoil. The airflow through said gap may be generally consistent with providing high lift aerodynamic characteristics to said aerofoil.

The aerofoil may comprise a profile configured to ensure that, i.e. compelling, at least some streamlines proximate to said pressure surface of said primary aerofoil element follow a path including over a suction surface of said secondary aerofoil element via said gap, while concurrently providing, i.e. imparting, a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil element such as to cause said particulate matter to overshoot said gap.

In at least some embodiments, the pressure surface profile extends outwardly along at least a portion of the chord of said primary aerofoil element with respect to a baseline pressure surface profile. In at least one embodiment, the pressure surface profile comprises a generally convex curvature along a portion of the chord of said primary aerofoil element, said portion being intermediate between said leading edge of the aerofoil and a trailing end of said primary aerofoil element. Such a generally convex curvature may comprise any suitable outwardly-curved profile, and is not restricted to a rounded curvature as in the outside of a cylinder. In at least another embodiment, the pressure surface profile comprises a generally concave portion configured for imparting a centrifugal force component to said particulate matter, and a downstream generally convex portion joined thereto at an inflexion point. The generally concave portion may comprise any suitable inwardly-curved profile, and is not restricted to a rounded curvature as in the inside of a cylinder. In yet another embodiment, the primary element comprises a first cross-sectional thickness that effectively overlaps a second cross-sectional thickness of the secondary element when viewed from the flow direction upstream of the aerofoil, at angles of attack of at least zero and close thereto, and, as

- 5 -

before, the generally concave portion may comprise any suitable inwardly-curved profile, and is not restricted to a rounded curvature as in the inside of a cylinder. The extent and curvature of each of the convex and concave portions may be determined on a case-by-case basis. In some embodiments, the primary element may comprise a first cross-sectional thickness having a boundary corresponding to the pressure side of the primary element that effectively overlaps at least an upstream portion of the pressure surface of the secondary element when viewed from the flow direction upstream of the aerofoil.

For example, the secondary element may be configured for selective deflection in the range between about +25° and about -25° degrees.

In at least some embodiments, the extent to which the main aerofoil element can provide shielding to the secondary element generally depends on the flight regime in which the aircraft/wing is flying, and thus on the respective lift coefficient and angle of attack of the wing. (It is to be noted that in practice a wing is often mounted onto a fuselage at some positive incidence, increasing the lift at zero angle of attack (CL₀) and decreasing actual flight angles of attack measured with respect to the body, and that 3-dimensional effects of real wings often need to be taken into account when considering wing performance based on 2-dimensional models.) Such flight regimes may include, for example, loitering at high lift coefficients (CL~1.5-1.7), cruising flight at medium lift (CL~1.0-1.2) and high speed flight at small lift coefficients (CL~0.3-0.5). In some embodiments, the aircraft comprising wings based on such aerofoils may be designed for high loitering lift coefficients, flying at relatively high positive angles of attack – for example a UAV. At such conditions, the second aerofoil element may be exposed to the airflow with contaminants such as ice, or water droplets, and the shielding effect provided by the main aerofoil element may not be very high. This situation may be alleviated in a number of ways. For example, the angle of attack at loitering may be decreased, flying the aircraft at smaller lift coefficients while trying to provide some shielding effect on the second element by means of the main aerofoil element. This option, however, reduces the loitering efficiency of high-lift flight.

Another option for enhancing shielding effect of the main aerofoil element is reducing the angle of attack while compensating with concurrently providing positive deflection angle of the secondary aerofoil element – this provides the required lift coefficient for high-lift loitering flight, and provides an additional benefit in shielding

- 6 -

effect, relative to providing the required lift coefficient by means of angle of attack only with zero deflection of the secondary element. Note, that for flight at difficult weather conditions, the flow over the wing is expected to be turbulent with resulting degradation of maximum lift of the aircraft. Considering speed safety margin, the loitering lift
5 coefficients are often reduced accordingly, helping, at the same time, to improve the shielding effect. For this case, positive flap deflections help to recover the maximum lift of configuration and decrease further a required loitering angle of attack.

The range of design angles of attack that may provide shielding may vary for different design cases, depending on airfoil geometry (especially the shape of lower
10 surface), design loitering lift coefficient, lift coefficient at zero angle of attack (C_{L0}), wing incidence on fuselage (i_w), etc. Once an acceptable level of shielding effect at high loitering lift coefficient is achieved for an aerofoil design (typically the most difficult case because of flap exposure to airflow is maximum), shielding of the secondary aerofoil element at other flight regimes such as cruise and maximum speed flight is
15 automatically achieved because of reduced angles of attack in these regimes.

As discussed, another option according to the present invention is to provide a pressure surface contour that provides shielding by inducing particle trajectories for contaminants that effectively overshoot the leading edge of the secondary element, even at positive angles of attack. In one variation of this option a removable panel is provided
20 at the aft portion of the pressure surface of the main aerofoil element, while in another variation, the main aerofoil body is integrally formed with such a pressure surface contour. This may be further supported by also providing positive secondary element deflections for reduction of required loitering angle of attack.

Alternatively, such panels may be designed for installation at mid and forward
25 portions of the pressure surface of the main aerofoil element.

In some embodiments, the aerofoil may be configured as a high lift two element aerofoil.

According to another aspect of the invention, the aerofoil may comprise at least one of the aforesaid features and elements according to the first aspect of the invention,
30 and furthermore, the leading edge of said primary aerofoil element is blunt having a first leading edge radius, wherein a ratio of said first radius to a chord of said aerofoil is greater than a threshold value, said threshold value representing a minimum radius to chord ratio obtained from geometric data of NACA 4-digit aerofoils at a comparable

- 7 -

value of thickness to chord ratio to that of said aerofoil. Optionally, a leading edge of said secondary aerofoil element may also be blunt having a second leading edge radius, wherein a ratio of said second radius to a chord of said second element is greater than a threshold value, said threshold value representing a minimum radius to chord ratio
5 obtained from geometric data of NACA 4-digit aerofoils at comparable value of thickness to chord ratio to that of said second element.

According to other aspects of the invention, there is provided a wing wherein at least a span portion thereof is based on at least one aerofoil as defined herein.

According to other aspects of the invention, there is provided an air vehicle
10 comprising a wing wherein at least a span portion thereof is based on at least one aerofoil as defined herein. The wings may be the main lift-producing wings of said air vehicle. For example, the air vehicle may be an Unmanned Air Vehicle (UAV), in particular adapted for long range endurance and loitering.

According to yet another aspect of the invention there is provided a method for
15 minimizing or avoiding accretion of contaminant on a two element aerofoil, said aerofoil comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and a gap therebetween, the method comprising providing the primary aerofoil element with at least one of a profile, orientation and location with respect to a respective at least one of
20 a profile, orientation and location of said secondary aerofoil element such as to minimizing or avoiding accretion of contaminant on said secondary aerofoil element when subjected to an airflow comprising said contaminant, at least at one design set of conditions.

The method may comprise aligning said primary aerofoil element at an angle of
25 attack, and aligning said secondary aerofoil element at a deflection angle with respect to the primary aerofoil element, such as to ensure some streamlines proximate to a pressure surface of said primary aerofoil element follow a path to a suction surface of said secondary aerofoil element via said gap, while concurrently providing a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil
30 element such as to cause said particulate matter to overshoot said gap and not impinge on the leading edge of the secondary aerofoil element. Optionally, said angle of attack and said deflection angle are such as to enable said primary aerofoil element to effectively shield the secondary aerofoil element from said particulate matter. For

example, said angle of attack may be non-positive, and said deflection angle may be positive.

According to yet another aspect of the invention there is provided a method for designing a two element aerofoil comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and a gap therebetween, the method including the step of generating an aerofoil profile such as to ensure that at least some streamlines proximate to a pressure surface of said primary aerofoil element follow a path including over a suction surface of said secondary aerofoil element via said gap, while concurrently providing a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil element such as to cause said particulate matter to overshoot said gap.

According to yet another aspect of the invention there is provided a method for operating an air vehicle comprising:

- providing said air vehicle with wings according to some aspects of the invention;
- flying the air vehicle at adverse conditions including contaminants in the air flow.

A feature of at least some embodiments of the invention is that in adverse icy conditions, for example, ice accretion on the second aerofoil element is reduced or altogether avoided, which could otherwise produce severe deterioration of control of, and/or of the efficiency or lift generated by, the aerofoil – which in extreme cases could prevent rotation of the second element and lead to complete loss of control power. The profile of the main element of the aerofoil with respect to the secondary element, and/or one or both of the location and orientation of the secondary element with respect to the primary aerofoil element can provide a beneficial shielding effect on the secondary element, preventing ice formation on the leading edge thereof. At the same time, this is achieved while providing attached flow around the primary and secondary elements, and through the slot.

By convex, or generally convex, is meant that a surface bulges in a generally outward direction, though the shape of the surface is not necessarily cylindrical, and thus the terms convex or generally convex include any surface in which the rate of change of slope of the surface is generally reducing towards the peak of the surface. Conversely, by concave, or generally concave, is meant that a surface bulges in a

- 9 -

generally inward direction, or that a surface bulges in an outward direction but in a manner in which the rate of change of slope of the surface is generally increasing towards the peak of the surface, though the shape of the surface is not necessarily cylindrical. Thus, when referring to a surface or a cross-section of a surface, the terms

5 convex or generally convex are herein also taken to refer to a profile of the surface or cross-section of the surface wherein normals to the profile along consecutive or adjacent points on the profile generally diverge from one another, while the terms concave or generally concave are herein also taken to refer to a profile of the surface or cross-section of the surface wherein normals to the profile along consecutive or adjacent

10 points on the profile generally converge towards one another.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, embodiments will now be described, by way of non-limiting example only,

15 with reference to the accompanying drawings, in which:

Fig. 1 illustrates an aerofoil section according to a first embodiment of the invention.

Fig. 2 is an isometric view of a wing element based on the aerofoil embodiment of Fig. 1.

20 **Fig. 3** schematically illustrates a variation of the embodiment of Fig. 1.

Fig. 4 schematically illustrates another variation of the embodiment of Fig. 1.

Fig. 5 schematically illustrates operation of the embodiment of Fig. 1 in the presence of particular contaminants in the airflow.

Fig. 6(a) illustrates a threshold of leading edge radius to chord ratio vs. thickness to chord ratio, obtained from NACA 4-digit aerofoils; **Fig. 6(b)** illustrates leading edge geometry of the embodiment of Fig. 1, including a large leading edge radius and a protection area (region of reduced curvature) downstream of the leading edge radius along the suction surface.

25

Fig. 7 illustrates an aerofoil section according to a second embodiment of the invention.

30

Fig. 8(a) and **Fig. 8(b)** respectively compare lift coefficients and drag polars, between the embodiment of Fig. 1 and a baseline aerofoil, which are comparatively illustrated in **Fig. 8(c)**.

Fig. 9(a) and **Fig. 9(b)** compare for lift coefficients of 1.7 and 0.6, respectively, pressure distributions obtained with the embodiment of Fig. 1 and a baseline aerofoil.

Fig. 10(a) provides distributions of skin friction coefficients obtained with a baseline aerofoil (illustrated in **Fig. 10(b)**) at a number of lift coefficients.

Fig. 11(a) provides distributions of skin friction coefficients obtained with the embodiment of Fig. 1 (also illustrated in **Fig. 11(b)**) at a number of lift coefficients.

Fig. 12(a) and **Fig. 12(b)** respectively compare lift coefficients and drag polars, between the embodiment of Fig. 7 and a baseline aerofoil, which are comparatively illustrated in **Fig. 12(c)**.

Fig. 13(a) and **Fig. 13(b)** compare for lift coefficients of 1.7 and 0.6, respectively, pressure distributions obtained with the embodiment of Fig. 7 and a baseline aerofoil.

Fig. 14(a) provides distributions of skin friction coefficients obtained with the embodiment of Fig. 7 (also illustrated in **Fig. 14(b)**) at a number of lift coefficients.

Fig. 15 compares the geometric profiles of the embodiments of Fig. 1 and Fig. 7 with the geometric profile of a baseline aerofoil.

Fig. 16(a) and **Fig. 16(b)** compare preliminary calculations of ice accretion profiles obtained with the embodiment of Fig. 7 and a baseline aerofoil, respectively, at conditions of: $C_l=1.5$; Velocity = 36m/s; exposure time = 30 minutes.

Fig. 17 lists normalized coordinates of the datum aerofoil of Fig.1.

Fig. 18 lists normalized coordinates of the aerofoil according to the first embodiment of the invention.

Fig. 19 lists normalized coordinates of the aerofoil according to the second embodiment of the invention.

Figs. 20(a) and **20(b)** compare the lift coefficients obtained with a baseline aerofoil and with the embodiment of Fig. 7, for a range of positive and negative deflection angles for the secondary aerofoil element in each case.

DETAILED DESCRIPTION OF EMBODIMENTS

According to a first embodiment of the invention, and referring to Fig. 1, a slotted aerofoil generally designated **300** may be based on a baseline aerofoil **200**, or at least may be referenced to baseline aerofoil **200** for convenience, the baseline aerofoil **200** having substantially similar geometrical properties with respect to aerofoil **300**. The main geometrical difference between the slotted aerofoil **300** and the baseline aerofoil **200** is that in the slotted aerofoil **300** the primary aerofoil element thereof has a profile configured for minimizing accretion of contaminant on the secondary aerofoil element, while the baseline aerofoil **200** is designed based on design rules that do not include specifically providing the primary aerofoil element thereof with a profile specifically configured for minimizing accretion of contaminant on the secondary aerofoil element. The baseline aerofoil **200** may be regarded as having a geometrically substantially identical suction surface and secondary element as for the aerofoil **300**.

Slotted aerofoil **300** may be provided for any suitable wings, for example high lift wings of an aircraft, in particular a fixed wing of an aircraft. For the purpose of example, such an aircraft is described herein as a fixed-wing aircraft, comprising a regular subsonic/transonic configuration, having a fuselage section, main wings, empennage (e.g. tailplane, vertical stabilizer), and a propulsion system, but may instead include, *mutatis mutandis*, any other type of aircraft, for example: rotor-wing aircraft including helicopters; gliders; subsonic/transonic aircraft having canards rather than a tailplane; general aviation aircraft, cruise missiles or other air-delivered ordinance, and so on.

By way of non-limiting example, and referring to Fig. 2, a wing element **100** of a wing is illustrated, based on aerofoil **300**, the wing having for example a substantially rectangular plan shape. The wing element **100** may comprise a portion of the span of the wing, or the full span of the wing (port and/or starboard) of the aircraft. The leading edge **52** of the wing element **100** is substantially rectilinear and has a substantially zero sweep angle. The wing element **100** is illustrated having a taper of about 1.0, between the two lateral ends thereof, referred to as the root **51** and the tip **53** of wing element **100**. The trailing edge **54** of the wing element **100** is also substantially rectilinear and comprises a substantially zero sweep angle. In alternative variations of this embodiment, the wing element **100** may have a different plan form, for example: swept-back or swept forward, and/or with a different taper ratio (along the full wing, or

- 12 -

different taper ratios for different wing elements); and/or having a different plan form, including curved leading edges and/or trailing edges such as an elliptical form, for example; and/or at least some portion of the wing may have a positive, negative or zero dihedral angle; and so on, as appropriate.

5 Referring also to Fig. 1, the wing element **100** is based on two-element slotted aerofoil **300**, having a substantially static primary aerofoil element **32** and an optionally pivotable secondary aerofoil element **34**. The primary element **32** comprises the leading edge **38** of the aerofoil, which coincides with the leading edge **52** of the wing element **100**, and major portions **31a**, **33a**, of the suction surface **31** and pressure surface **33**
10 thereof, respectively, and a trailing end **38a**. The secondary element **34** comprises the trailing edge **39** of the aerofoil, which coincides with the trailing edge **54** of the wing **10**, and minor portions **31b**, **33b**, of the suction surface **31** and pressure surface **33** thereof, respectively. A slot **55** separates the leading edge **35** of the secondary element **34** from the trailing portion **36** of the primary element **32**. For example, the slot **55** may
15 have a width of between about 1% to about 2%, or more, of the aerofoil chord in a non-deflected position of the flap element, though the precise form and width size of the slot **55** may generally depend on the particular mode of operation of the wing. Optionally, the hinge point **59** of the secondary element **34** is outwardly displaced with respect to the lower (pressure) surface of the secondary element **34**. A suitable actuation
20 mechanism (not shown) may optionally be provided for actuating the secondary element **34** to adopt the range of positive and/or negative deflection angles desired to enable the same to function as ailerons, flaps and so on. Additionally or alternatively, the secondary element **34** may be spatially and/or rotationally fixed with respect to the primary element **32**, and further optionally, the secondary element **34** may comprise or
25 may constitute control surfaces such as ailerons, flaps and so on, that are pivotable with respect to the secondary element **34**.

The primary element **32** comprises a profile, in relation to the secondary element **34** for at least one range of design angle of attack and at least one range of secondary element deflection angle, such that the leading edge **35** of the secondary element **34** is
30 effectively shielded with respect to particulate matter that may be flowing along the pressure surface **33a** of the primary element **32**.

In the embodiment of Fig. 1, the pressure surface **33a** of the primary element **32** extends outwardly with respect to a baseline pressure surface profile **233** associated

- 13 -

with said baseline aerofoil **200**. It is apparent that in this embodiment the thickness **t** of the primary element **32** just upstream of the gap **55** is greater than and overlaps the maximum thickness of the secondary element **34**, as seen along the general flow direction **F**, and thus the secondary element **34** is not outwardly displaced with respect to the lower (pressure) surface of the secondary element **34** in a direction generally orthogonal to direction **F**, for a range of angles of attack α starting from 0 degrees or greater.

The profile of pressure surface **33a** comprises an outwardly extending or generally convex curvature, with respect to the corresponding profile of the baseline pressure surface profile **233**, along at least a portion **X1** of the pressure surface **33a**, said portion **X1** being intermediate between the leading edge **38** and a trailing end **38a** of the primary aerofoil element **32**. In this embodiment, this portion **X1** is a downstream portion, wherein the profile of the pressure surface **33a** begins to depart from that of baseline pressure surface profile **233** at a point **A** downstream of the leading edge **38**, peaks at point **B**, within the second half of the chord of the main aerofoil element, and returns to the baseline pressure surface profile **233** at point **C** proximate to the trailing end **38a**. The additional thickness Δt of the pressure surface **X1** with respect to surface profile **233** thus increases smoothly from nominally zero at **A** to a maximum at **B** and back to nominally zero again at **C** smoothly, providing a generally convex surface.

In particular, and referring also to Fig. **5**, the profile of aerofoil **300**, specially of the portion **X1** of the pressure surface is such as to ensure that the airflow over the aerofoil is still maintained – i.e., the flow represented by some streamlines proximate to the pressure surface **33a** of the primary aerofoil element **32** follow a path close to the pressure surface **33a**, some streamlines **72** close to the pressure surface **33a** passing through gap **55** and proceeding over the suction surface **31b** of said secondary aerofoil element **34**, thereby avoiding separation of the flow with respect to the pressure surface **33a** and gap **55**, while other streamlines **73** further outboard pass over the pressure surface **33b** of the secondary element **34**. At the same time, the profile or form of the portion **X1** is such as to concurrently provide a trajectory **71** to particulate matter **p** flowing proximate to the pressure surface **33a**, for example along streamline **72**, such as to cause said particulate matter to overshoot the gap **55** and flow over the pressure surface **33b** of the secondary element **34**. This configuration for the aerofoil **300**, and particularly the pressure surface **33a**, enables the aerofoil **300** to operate as a two-

element aerofoil, in a similar manner to the baseline aerofoil **200** (possibly with less performance), but at the same time avoids entrainment of particulate matter **p** towards the gap **55**, and therefore minimizes the possibility or degree of impact and accretion of such matter on the leading edge **35** of the secondary element **34**.

5 While in this embodiment, portion **X1** is envisaged as the actual pressure surface of the aerofoil **300** and integral therewith, it is to be noted that aerofoil **300** may instead be constructed by adding a suitably-shaped aerofoil accessory or attachment **350** having an external profile corresponding to that of portion **X1**, to fit onto the aerofoil **200**, such as to essentially replace part of the pressure surface of the aerofoil **200** with a profile
10 provided by the attachment **350**. Thus a wing portion based on aerofoil **200** may be converted, permanently or temporarily, to a wing portion based on aerofoil **300** by mounting or otherwise attaching to the pressure surface of the wing a wing accessory based on attachment **350**, to effectively change the profile of the wing from that corresponding to aerofoil **200**, to that corresponding to aerofoil **300**.

15 In alternative variations of this embodiment, and as illustrated in Fig. 3 and Fig. 4, the profile of pressure surface **33a** may comprise an outwardly extending convex curvature, with respect to the corresponding profile of the baseline pressure surface profile **233**, along at least a portion **X2** or **X3**, respectively, of the pressure surface **33a**, rather than the aforesaid portion **X1**. While portion **X2** or portion **X3** are also
20 intermediate between the leading edge **38** and a trailing end **38a** of the primary aerofoil element **32**, portion **X2** is a generally upstream portion, and **X3** is a mid portion. In portion **X2**, the profile of the pressure surface **33a** begins to depart from that of baseline pressure surface profile **233** at or close to the leading edge **38**, peaking close thereto, within the first half of the chord of the main aerofoil element, and returning to the
25 baseline pressure surface profile **233** at point upstream of the trailing end **38a**. In portion **X3**, the profile of the pressure surface **33a** begins to depart from that of baseline pressure surface profile **233** at a point downstream of the leading edge **38**, peaking at a point approximately intermediate of the chord of the main element **32**, and returning to the baseline pressure surface profile **233** at point upstream of the trailing end **38a**.

30 While the following is directed to the first embodiment based on the portion **X1**, it applies, *mutatis mutandis*, also to alternative variations of the first embodiment based on portion **X2** or portion **X3**, for example. The streamline **72** and particle trajectory **71** follow different paths at a particular region **70**, in which there is a gradual deviation of

- 15 -

the trajectories of water droplet or other particulate matter **p** from the general airflow direction, on the pressure surface **33a**, and, without being bound to theory, may utilize the different inertial properties of air and of the particulate matter **p**, for example in the form of water droplets, snow or ice fragments, etc. This region **70** may be characterized
5 in providing a change in the flow direction that is too sharp to be negotiated by the particulate matter **p**, while providing a positive pressure gradient, or at least a sufficiently mild adverse pressure gradient that would not cause the corresponding airflow to become detached from the pressure surface **33a** and to flow directly to the pressure surface **33b**, rather than to flow through gap **55**.

10 Thus, in the embodiment of Fig. 4, and more so with the embodiment of Fig. 3, *mutatis mutandis*, the corresponding deviation point or region, **70'** and **70''**, respectively, is further upstream with respect to the leading edge **38** than in the embodiment of Fig. 1. Further, it is to be noted that at high speed flight there is a particular beneficial shielding effect provided by the primary aerofoil element because
15 of the generally small (and sometimes even negative) angle of attack, and the embodiment of Fig. 4 and particularly the embodiment of Fig. 3, may provide enhanced shielding in these conditions, relative to the embodiment of Fig. 1.

In the embodiment of Fig. 1, region **70** is relatively close to the second aerofoil element – this provides an advantage in that it is more difficult for the particles in the air
20 stream to follow the fast change in geometry, in particular the surface contour, and thus for the trajectory of the particles to recover and reemerge with the original streamlines. At the same time, aerodynamic contouring of the portion **X1** is made such as to ensure that there is still attached flow through the slot, and thus minimize loss of aileron efficiency provided by rotation of the secondary element.

25 By providing the region **70** at the mid or forward position along the pressure surface, as exemplified at **70''** and **70'** in the embodiments of Fig. 4 and 3, respectively, aerodynamic shaping is easier for minimizing said loss of aileron efficiency. On the other hand the greater distance to the secondary element from the respective region **70'** or **70''** increases the possibility of the particles to return to the airstream trajectories, and
30 thus potentially reduces the shielding effect of the corresponding portions **X3**, **X2**, respectively. The optimal position for the region – whether **70**, **70'** or **70''** - may depend on a number of factors, including one or more of air vehicle size (the length of wing

- 16 -

chords), flight airspeeds, the size of water droplets or other contaminants, initial shape of the lower surface of the main aerofoil element, and so on.

Thus, the location and local geometry of this region **70** may vary depending on a number of conditions, and in general, the region **70** may be associated with point **B**, for example at point **B** or a relatively short distance upstream or downstream with respect thereto.

For example, the larger the size and mass of the particles, the more upstream the region **70** will tend to be, and the more moderate the curvature of the pressure surface needs to be to provide the required deviation of particles so as to overshoot the gap.

Other conditions may include:-

- Speed and/or momentum (or size) of the particulate matter p flowing over the pressure surface **33a**; the higher the speed and/or momentum (or size), the further upstream point **70** may be and/or the less severe the change in direction of stream line **72** at and past point **70** needs to be.
- The location and geometry of the secondary element **34** with respect to the primary element **32**.
- The size and shape of the gap **55**.

Furthermore, limitations on maximum flight airspeed and effect of the portion **X1** (or **X2** or **X3**) on the effectiveness of the second element operating as an aileron or flap may also influence the position of profile of the portion **X1** (or **X2** or **X3**, depending on the particular embodiment).

Figs. 8(a) and 8(b) compare the lift coefficient as a function of angle of attack α , and drag polars, respectively, obtained with a baseline aerofoil and an aerofoil according to the first embodiment of the invention (for convenience also illustrated in Fig. 8(c)), based on CFD methods. The coordinates of the two aerofoils are given in Figures 18 and 17, respectively. Figs. 9(a) and 9(b) compare the pressure distributions obtained with a baseline aerofoil and an aerofoil according to the first embodiment of the invention, based on CFD methods, at lift coefficient of 1.7 and 0.6, respectively. Fig. 10(a) provides, for the baseline aerofoil (for convenience also illustrated in Fig. 10(b)), skin friction coefficient as a function of chord, for lift coefficients of 0.2, 0.5 and 1.0, based on CFD methods. Fig. 11(a) provides, for the aerofoil according to the first embodiment of the invention (for convenience also illustrated in Fig. 11(b)), skin

friction coefficient as a function of chord, for lift coefficients of 0.6, 1.0, 1.7, based on CFD methods.

Alternatively or additionally, the position of the second element **34**, and/or its thickness, relative to the position and/or thickness of the primary element **32** may also
5 be modified such that the primary element **32** effectively shields the secondary element **34** from the flow trajectory of the particulate matter, the local geometry of the two elements still being sufficient form enabling the airflow to flow over the same and through the gap.

By way of non-limiting example, the datum aerofoil **300** may comprise an 18%
10 thickness ratio, and has $Re_{design}=1.0*10^6$, though clearly the datum aerofoil may comprise other characteristics, *mutatis mutandis*, such as design lift coefficient ($C_{l,design}=1.7$ in the case of datum airfoil), different main body/flap chord ratios (for datum airfoil the flap chord is 30% of the total airfoil chord), etc.

Aerofoil **300** may be designed or generated in a number of ways. For example,
15 the baseline aerofoil **200** is first designed according to the regular criteria to provide the desired performance to the aerofoil **200** in the absence of contaminants such as for example rain, ice, snow, and so on.

Then a number of iteration loops are conducted. In each loop, the profile of the pressure surface **33a** is extended in at outward direction by a predefined increment, and
20 for example this may take the form of a percentage of the thickness of the main element **32**, at a particular position – point **B** or close to a candidate point **70** (Fig. 5) – the extension of the surface decreasing on either side of this point towards points **A** and **C** in a generally smooth manner. The performance of the modified aerofoil is then estimated using known methods – for example CFD programs, wind tunnel testing and
25 so on. The trajectory of particulate matter flowing close to the pressure surface **33a** is also calculated, using for example two-phase flow (e.g., air and water droplets) CFD programs having an inertia option for the flow. If the performance of the modified aerofoil and/or the trajectory of the particulate matter *p* is not acceptable, the aerofoil profile is again changed, for example by changing one or more of the amount of the
30 projection, the location of the maximum projection and the profile of the pressure surface **33a** between point **B** and points **A** and **C**. The trial and error approach may be continued until a suitable compromise between aerofoil performance and particulate trajectory is achieved. Of course, in some cases it may also be possible to change other

- 18 -

parameters of the aerofoil, such as for example the chord and/or thickness of the main element **32**, the position and/or profile of the second element **34**, and so on.

Furthermore, the above iteration procedure may be repeated for a range of angles of attack of the aerofoil, wherein small or negative angles of attack may provide the desired effect in particulate trajectory, though at a performance penalty compared with higher angles of attack.

The possibility of flow separation at the slot region is a factor that additionally may be analyzed and corrected if necessary at each design iteration. In general, at small lift coefficients there is a conflict between the requirement to avoid ice accretion on secondary element, which may be configured for operating as flaps and/or ailerons, for example, and the desirability to minimize drag penalties due to flow separation and resulting limitation on maximum speed flight. On the other hand, at high lift coefficients, due to angle of attack effect, the second element is more exposed, relatively speaking, to the airflow, carrying particulate matter, such as water droplets etc., for example, and at least according to one aspect of the invention this may be considered as a baseline case for ice accretion on the secondary element, and most of iterative design efforts may correspondingly be directed to such a case, for example. In the high lift case, flow separation at the slot region is generally highly unlikely because of favorable accelerating pressure gradient.

Thus, such an iterative design process can be focused on providing a compromise between accretion at high lift coefficients (loitering flight) and flow separation at small lift coefficients (maximum speed flight). The compromise may include the limitations on maximum speed flight and may also include the limitations on minimum speed flight also.

Furthermore, in variations of the first embodiment in which the second element **34** may be deflected, the above iteration process may be repeated for a number of different deflection angles, wherein relatively large positive deflections may provide the desired effect in particulate trajectory. Negative deflections of the second element **34** (effectively resulting in wing decambering) are generally beneficial for drag recovery at high-speed flight (small lift coefficients). However, increased angle of attack is required to provide the same lift coefficient as for the non-deflected case, and this is unfavorable for accretion on the second element, for example ice accretion, because the second element **34** is then more exposed to the airflow with water droplets. On the other hand,

positive deflection of the second element **34** decreases the required angle of attack for a given lift coefficient, effectively improving the favorable shielding effect of the main body at all angles of attack. However, at small lift coefficients (high-speed flight), this may accelerate flow separation on the lower surface of the main body **32**, while at high lift coefficients, ice or other particulate accretion on positively deflected flap segment (second element **34**) may trigger the stall of this element and stall of the wing. Accordingly, the iterative design positive is preferably augmented with suitable wind tunnel and other testing of a design for the aerofoil.

It is to be noted that the wing element **100** may comprise the same aerofoil profile **300** along the span thereof, or alternatively, the aerofoil profile may vary along the span. In the latter case, the aerofoil shape itself may remain the same, but the size thereof may vary – for example the chord may increase from tip **53** to root **51**, or alternatively, the shape may also change, for example providing a different thickness chord ratio at the tip **53** to that at the root **51**. In each case, the corresponding aerofoil sections may be designed as disclosed herein for aerofoil **300**, *mutatis mutandis*.

According to another aspect of the invention, the leading edge **38** of the main element **32** and/or the leading edge **35** of the secondary element **34** may comprise a relatively large radius to minimize accretion thereat.

Referring to Figs. 6(a) and 6(b), the leading edge radius of the leading edge **38**, as a percentage of the aerofoil chord, i.e., ratio (r/c) of aerofoil **300**, may be greater than that provided by the threshold **Q**, for a given thickness to chord ratio (t/c) for the aerofoil **300**. For example, for a t/c ratio of about 15%, the r/c ratio can be greater than about 2.5%. Similarly, Fig. 6(a) can also be used to provide, *mutatis mutandis*, an indication of leading edge **35** radius of the secondary element **34** according to this aspect of the invention, wherein the leading edge radius of the leading edge **35**, as a percentage of the second element chord (r'/c') may be greater than that provided by the threshold **Q**, for a given thickness to chord ratio (t'/c') for the second element, and for example, for a t'/c' of about 15%, the r'/c' ratio can be greater than about 2.5%.

The threshold **Q** is defined herein as a best fit curve through a series of data points relating to the leading edge radius to chord ratio and thickness to chord ratio of the NACA 4-digit series of aerofoils. Threshold **Q** may be approximated by two linear distributions: distribution **Q1** for t/c less than about 10%, and distribution **Q2** for t/c greater than about 11%.

- 20 -

Furthermore, the leading edge geometry for the leading edge **38** and/or the leading edge **35** may include a circular arc portion **AC** associated with the corresponding relatively large leading edge radius, and a "protection area" or "protection region" **AP** on the suction surface immediately downstream of the leading edge circular portion having an increased local radius (reduced curvature) with respect to portion **AC**, and which serves to prevent or reduce a leading edge suction peak at high lift coefficients, providing high values of maximum lift for the aerofoil. This leading edge geometry may also be beneficial in reducing the effect of particulate accretion, in particular ice accretion or the like, facilitating spreading of the ice around the leading edge and delaying formation of horn ice on the leading edge.

Referring to Fig. 7, a slotted aerofoil 400 according to a second embodiment of the invention comprises all the elements as disclosed for the first embodiment, *mutatis mutandis*, the main difference being that in the second embodiment, the primary element is configured for providing a stronger shielding effect to the second element of the aerofoil than with the first embodiment. Similarly, a wing element may be based on aerofoil 400, *mutatis mutandis*.

Thus aerofoil 400, which can also be compared to or based on reference aerofoil 200, and comprises a substantially static primary aerofoil element **432** (comprising leading edge **438**, major portions **431a**, **433a**, of the suction surface **431** and pressure surface **433** thereof, respectively, and a trailing end **438a**), and an optionally pivotable secondary aerofoil element **434** (comprising the trailing edge **439** of the aerofoil, and minor portions **431b**, **433b**, of the suction surface **431** and pressure surface **433** thereof, respectively) and a slot **455** separating the leading edge **435** of the secondary element **434** from the trailing portion **436** of the primary element **432**.

In the second embodiment, the profile of pressure surface **433a** also comprises an outwardly extending curvature, with respect to the corresponding profile of the baseline pressure surface profile **233**, along a portion **X4** of the pressure surface **433a**, said portion **X4** being intermediate between the leading edge **438** and a trailing end **438a** of the primary aerofoil element **432**, from a point **A'** downstream of the leading edge **438**, and returns to the baseline pressure surface profile **233** at point **C'** proximate to the trailing end **438a**. However, in this embodiment, the portion **X4** comprises an upstream generally concave part **X5** that smoothly dovetails into a downstream convex part **X6** at

point of inflexion **B'**. **X5** thus resembles a curved surface that is generally facing towards a focal point or region thereof (away from the direction of the aerofoil), with the rate of change of slope of the contour of **X5** generally increasing up to point **B'**. The generally concave portion **X5** is configured for imparting a centrifugal acceleration to
5 particulate matter **p**, such as for example water droplets carried by the airstream, for example as represented by streamline **72**, thus directing the particulate matter **p** in a trajectory **71'** away from the second element **434**. On the other hand, the generally convex portion **X6** is configured for turning the airflow (for example streamline **72**) towards the slot **455**, but presents too steep a turn for the particulate matter **p**, due to the
10 inertial properties thereof which are different from the inertial properties of air, and thus overshoot past the stagnation point **435'** of the secondary element **434**, and away from the pressure surface **433b** of the secondary element **434**. **X6** thus resembles a curved surface that is generally facing away from a focal point or region thereof.

Figs. 12(a) and 12(b) compare the lift coefficient as a function of angle of attack
15 α , and drag polars, obtained with a baseline aerofoil and an aerofoil according to the second embodiment of the invention (for convenience also illustrated in Fig. 12(c)), based on CFD methods. The coordinates of the two aerofoils are given in Figs. 19 and 17, respectively. Figs. 13(a) and 13(b) compare the pressure distributions obtained with a baseline aerofoil and an aerofoil according to the second embodiment of the invention,
20 based on CFD methods, at lift coefficient of 1.7 and 0.6, respectively. Fig. 14(a) provides, for the aerofoil according to the second embodiment of the invention (for convenience also illustrated in Fig. 14(b)), skin friction coefficient as a function of chord, for lift coefficients of 0.6, 1.0, 1.7, based on CFD methods.

Figs. 20(a) and 20(b) compare the lift coefficients obtained with a baseline
25 aerofoil and an aerofoil according to the second embodiment of the invention, based on CFD methods, for a range of positive and negative deflection angles for the secondary aerofoil element in each case, at $Re = 10^6$.

Fig. 15 graphically compares the profiles of aerofoils **300** and **400** with baseline aerofoil **200**.

30 Regarding the first and second embodiments, there may be some lift and drag penalties of the aerofoils according to these embodiments relative to the reference airfoil. However, it is contemplated that the critical trade-off will be between possible adverse influence of the enlarged pressure surface on efficiency and travel of the

- 22 -

secondary element as an aileron, and the ability of the primary element to provide a shielding effect on the second element. Preliminary theoretical calculations of ice accretion obtained with the second embodiment are illustrated in Fig. 16(a) and Fig. 16(b), and as may be seen from these figures, at high loitering lift coefficient (for example, $C_L=1.5$), the region of ice accretion may move to the lower surface of the secondary element, allowing for rotation of the second aerofoil element and retaining aileron efficiency, in contrast with the datum aerofoil, where similar conditions result in ice accretion on the leading edge of the secondary element, reducing aileron efficiency and travel.

10 In the method claims that follow, alphanumeric characters and Roman numerals used to designate claim steps are provided for convenience only and do not imply any particular order of performing the steps.

Finally, it should be noted that the word “comprising” as used throughout the appended claims is to be interpreted to mean “including but not limited to”.

15 While there has been shown and disclosed example embodiments in accordance with the invention, it will be appreciated that many changes may be made therein without departing from the spirit of the invention.

CLAIMS:

1. Two element aerofoil comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and comprising a gap between said primary aerofoil element and said
5 secondary aerofoil element, the primary aerofoil element having at least one of a profile, orientation and location with respect to a respective at least one of a profile, orientation and location of said secondary aerofoil element configured for minimizing or avoiding accretion of contaminant on said secondary aerofoil element when subjected to an airflow comprising the contaminant, at least at one design set of conditions.
- 10 2. Aerofoil according to claim 1, wherein the contaminant is in the form of particulate matter flowing in a downstream direction with respect to said leading edge of said aerofoil.
3. Aerofoil according to claim 2, wherein a pressure surface of said primary aerofoil element comprises a pressure surface profile configured for minimizing
15 accretion of said particulate matter on said secondary aerofoil element.
4. Aerofoil according to any one of claims 2 or 3, wherein said pressure surface profile is configured for minimizing flow into said gap of said particulate matter that may be flowing over said pressure surface.
5. Aerofoil according to claim 4, wherein said pressure surface profile is
20 configured for minimizing or preventing flow into said gap of said particulate matter that may be flowing along or proximate to a boundary layer over said pressure surface.
6. Aerofoil according to any one of claims 2 to 5, wherein said pressure surface profile is further configured to enable airflow through said gap for enabling aerodynamic operation of said two element aerofoil.
- 25 7. Aerofoil according to claim 6, wherein said airflow through said gap is generally consistent with providing high lift aerodynamic characteristics to said aerofoil.
8. Aerofoil according to any one of claims 2 to 7, wherein said aerofoil comprises a profile configured to ensure that at least some streamlines proximate to said pressure surface of said primary aerofoil element follow a path including over a suction surface
30 of said secondary aerofoil element via said gap, while concurrently providing a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil element such as to cause said particulate matter to overshoot said gap.

9. Aerofoil according to any one of claims 2 to 8, wherein said particulate matter comprises at least one of ice, snow, rain, water droplets, sand, smoke particles or dust particles.

10. Aerofoil according to any one of claims 2 to 9, wherein said pressure surface
5 profile extends outwardly along at least a portion of the chord of said primary aerofoil element with respect to a baseline pressure surface profile.

11. Aerofoil according to any one of claims 2 to 10, wherein said pressure surface profile comprises a convex curvature along a portion of the chord of said primary
10 aerofoil element, said portion being intermediate between said leading edge of the aerofoil and a trailing end of said primary aerofoil element.

12. Aerofoil according to any one of claims 2 to 10, wherein said pressure surface profile comprises a concave portion configured for imparting a centrifugal force component to said particulate matter, and a downstream convex portion joined thereto at an inflexion point.

13. Aerofoil according to any one of claims 2 to 12, wherein said primary element
15 comprises a first cross-sectional thickness that effectively overlaps a second cross-sectional thickness of the secondary element when viewed from the flow direction upstream of the aerofoil.

14. Aerofoil according to any one of claims 2 to 13, wherein said primary element
20 comprises a first cross-sectional thickness having a boundary corresponding to the pressure side of the primary element that effectively overlaps at least an upstream portion of the pressure surface of the secondary element when viewed from the flow direction upstream of the aerofoil.

15. Aerofoil according to claim 13 or claim 14, wherein said secondary element
25 comprises a deflection in the range between about +25 degree and about -25 degrees.

16. Aerofoil according to any one of claims 1 to 15, wherein said aerofoil is configured as a high lift two element aerofoil.

17. Aerofoil according to any one of claims 1 to 16, wherein a leading edge of said primary aerofoil element is blunt having a first leading edge radius, wherein a ratio of
30 said first radius to a chord of said aerofoil is greater than a threshold value, said threshold value representing a minimum radius to chord ratio obtained from geometric data of NACA 4-digit aerofoils at a comparable value of thickness to chord ratio to that of said aerofoil.

- 25 -

18. Aerofoil according to any one of claims 1 to 17, wherein a leading edge of said secondary aerofoil element is blunt having a second leading edge radius, wherein a ratio of said second radius to a chord of said second element is greater than a threshold value, said threshold value representing a minimum radius to chord ratio obtained from
5 geometric data of NACA 4-digit aerofoils at comparable value of thickness to chord ratio to that of said second element.
19. A wing wherein at least a span portion thereof is based on at least one aerofoil as defined in any one of claims 1 to 18.
20. An air vehicle comprising at least one wing according to claim 19.
- 10 21. Air vehicle according to claim 20, wherein said air vehicle is a UAV.
22. A method for minimizing or avoiding accretion of contaminant on a two element aerofoil, said aerofoil comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and a gap therebetween, the method comprising providing the primary aerofoil element
15 with at least one of a profile, orientation and location with respect to a respective at least one of a profile, orientation and location of said secondary aerofoil element such as to minimizing or avoiding accretion of contaminant on said secondary aerofoil element when subjected to an airflow comprising said contaminant, at least at one design set of conditions.
- 20 23. Method according to claim 22, comprising aligning said primary aerofoil element at an angle of attack, and aligning said secondary aerofoil element at a deflection angle with respect to the primary aerofoil element, such as to ensure some streamlines proximate to a pressure surface of said primary aerofoil element follow a path to a suction surface of said secondary aerofoil element via said gap, while
25 concurrently providing a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil element such as to cause said particulate matter to overshoot said gap.
24. Method according to claim 23, wherein said angle of attack and said deflection angle are such as to enable said primary aerofoil element to effectively shield the
30 secondary aerofoil element from said particulate matter.
25. Method according to claim 23 or claim 24, wherein said angle of attack is non-positive, and said deflection angle is positive.

- 26 -

26. A method for designing a two element aerofoil comprising a primary aerofoil element including a leading edge of the aerofoil and a secondary aerofoil element including a trailing edge of the aerofoil, and a gap therebetween, the method including the step of generating an aerofoil profile such as to ensure that at least some streamlines proximate to a pressure surface of said primary aerofoil element follow a path including over a suction surface of said secondary aerofoil element via said gap, while concurrently providing a trajectory to particulate matter flowing proximate to said pressure surface of said primary aerofoil element such as to cause said particulate matter to overshoot said gap.
- 10 27. Method for operating an air vehicle comprising:
- providing an air vehicle as defined in claim 20 or claim 21;
 - flying the air vehicle at adverse conditions including contaminants in the air flow.

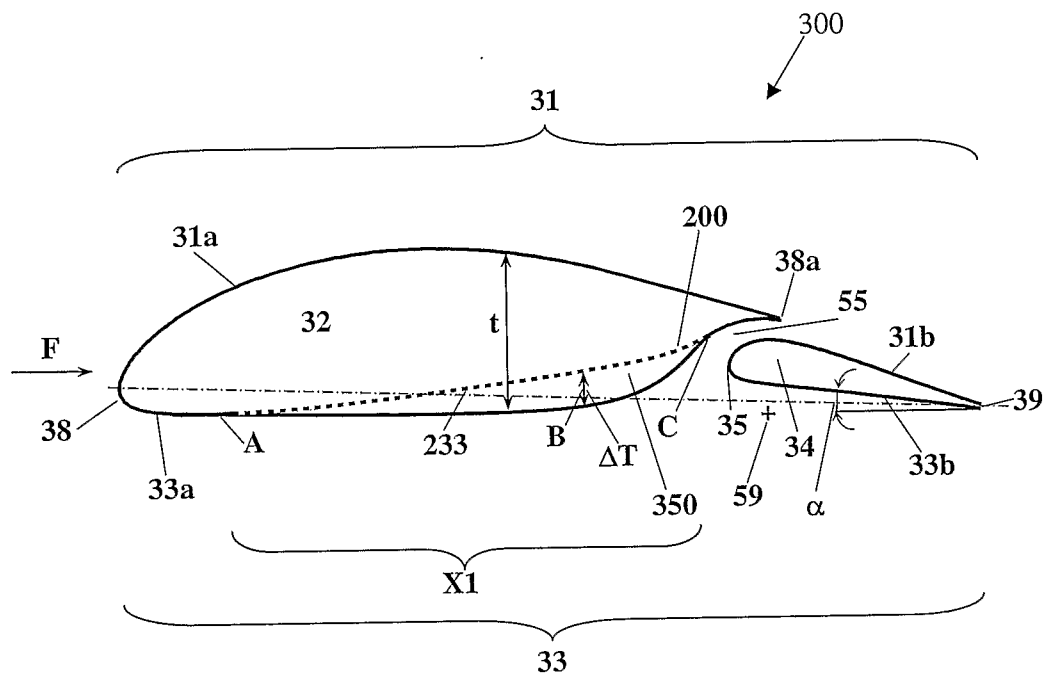


Fig. 1.

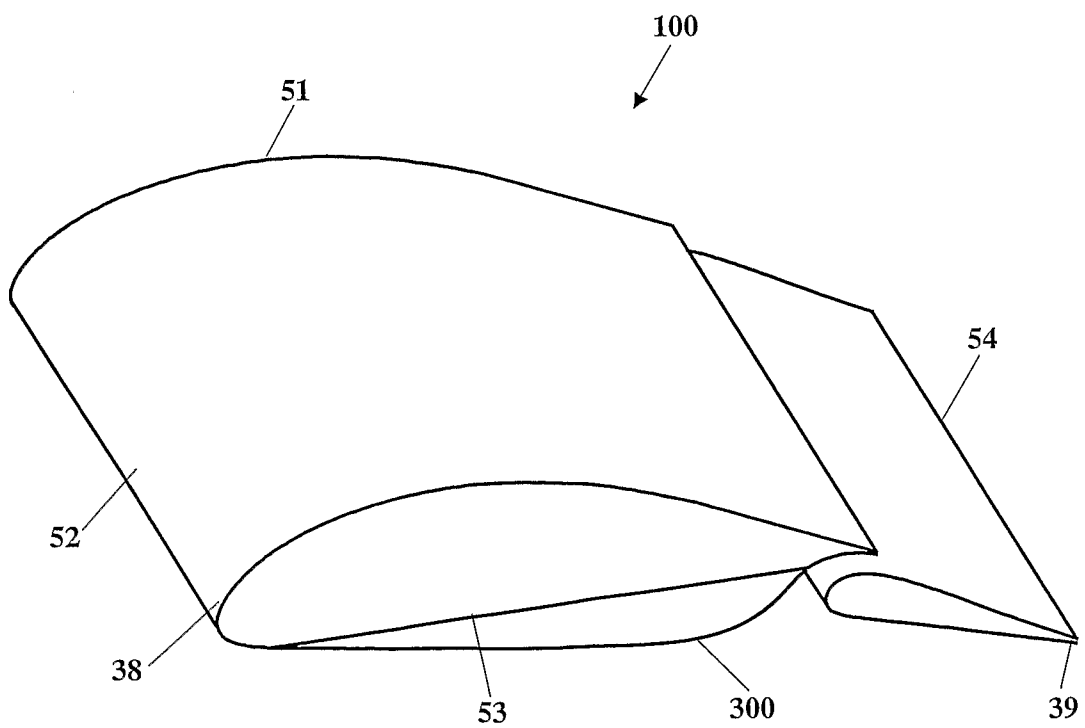


Fig. 2.

2/13

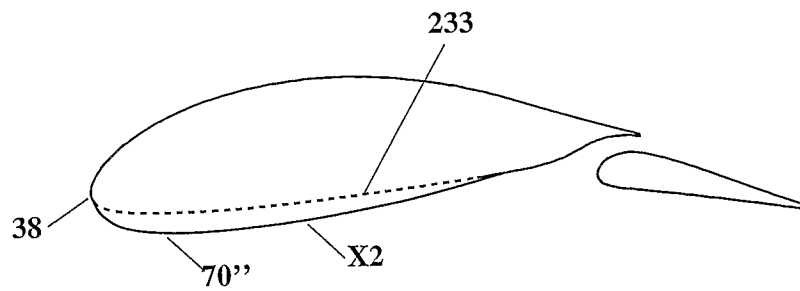


Fig. 3.

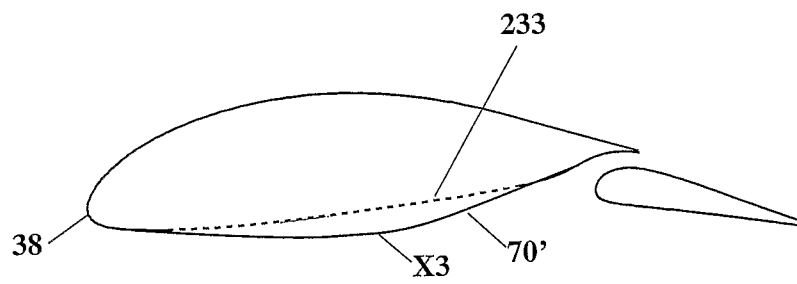


Fig. 4.

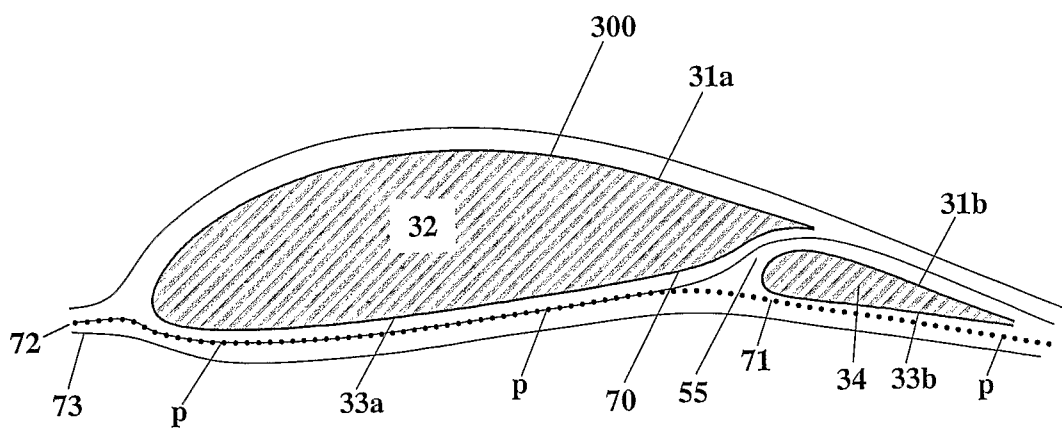


Fig. 5.

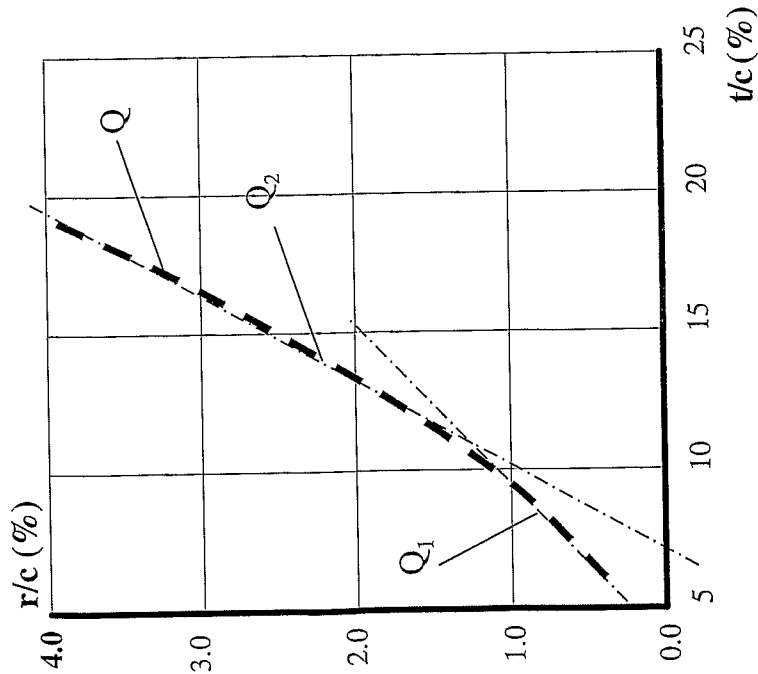


Fig. 6(a)

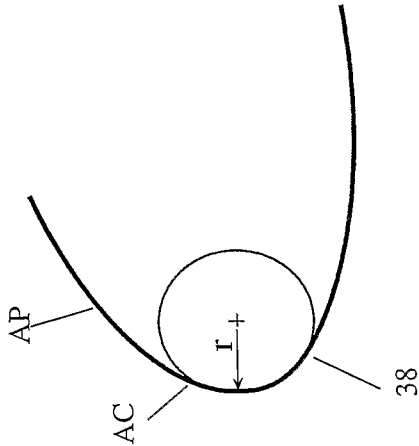


Fig. 6(b)

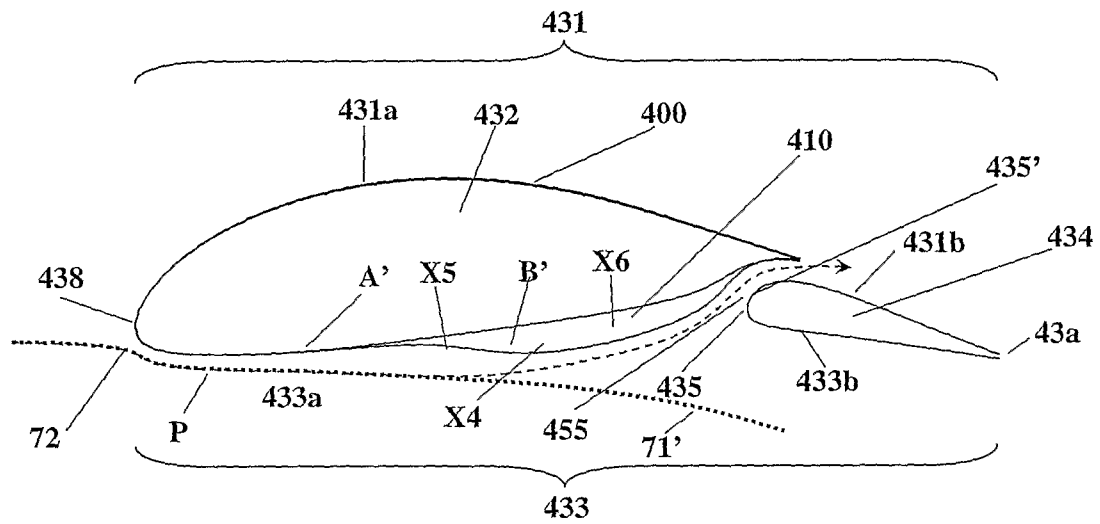


Fig. 7

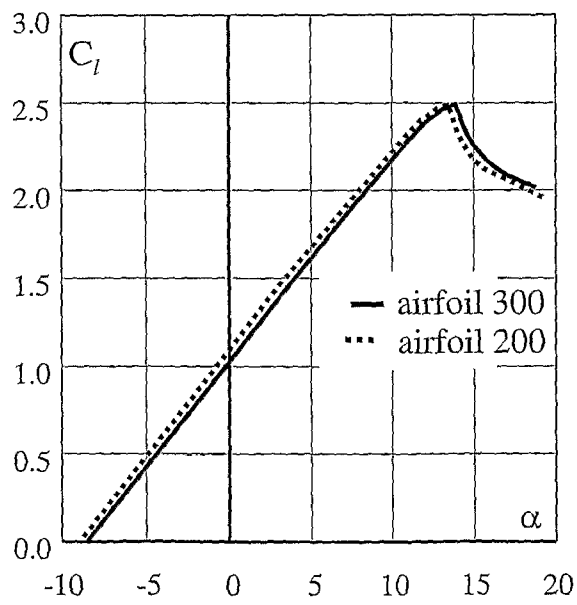


Fig 8(a)

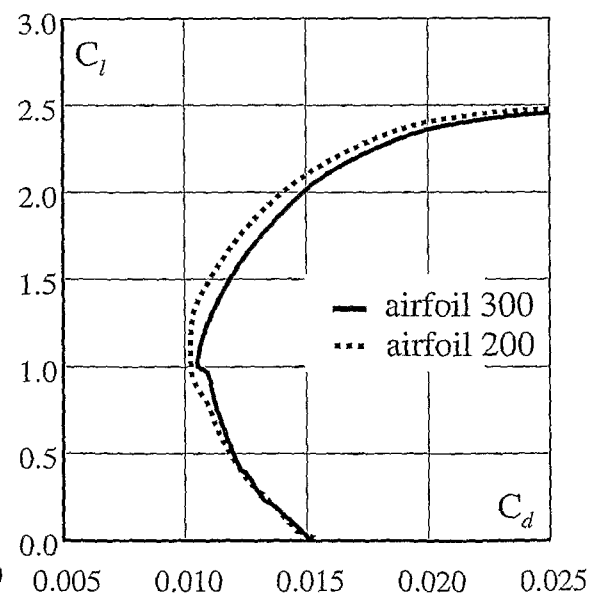


Fig 8(b)

5/13



Fig 8(c)

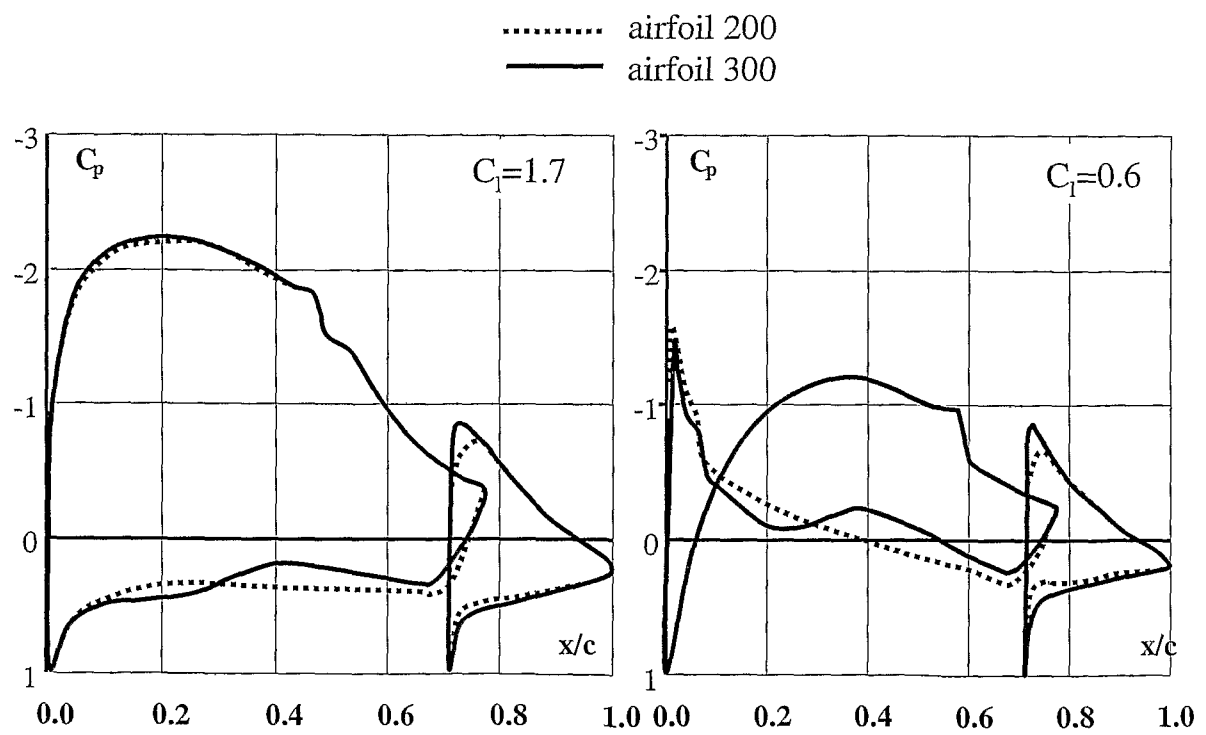


Fig 9(a)

Fig 9(b)

6/13

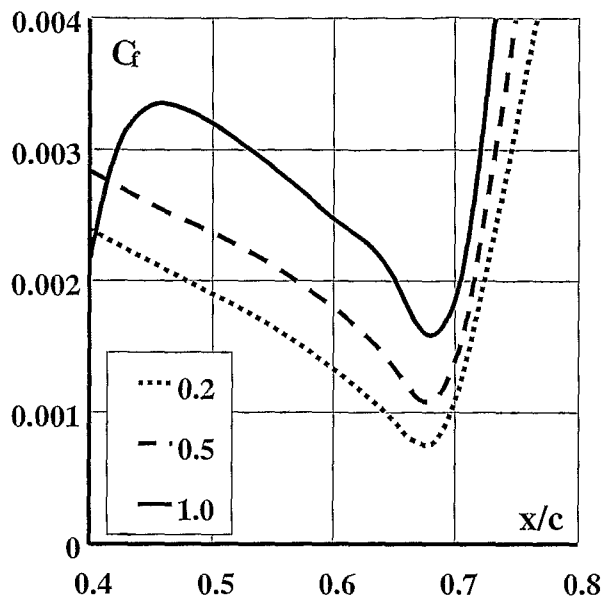


Fig. 10(a)

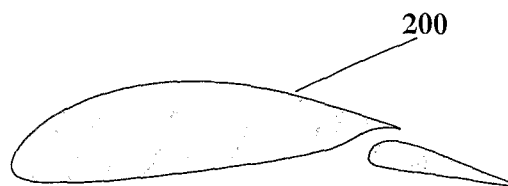


Fig. 10(b)

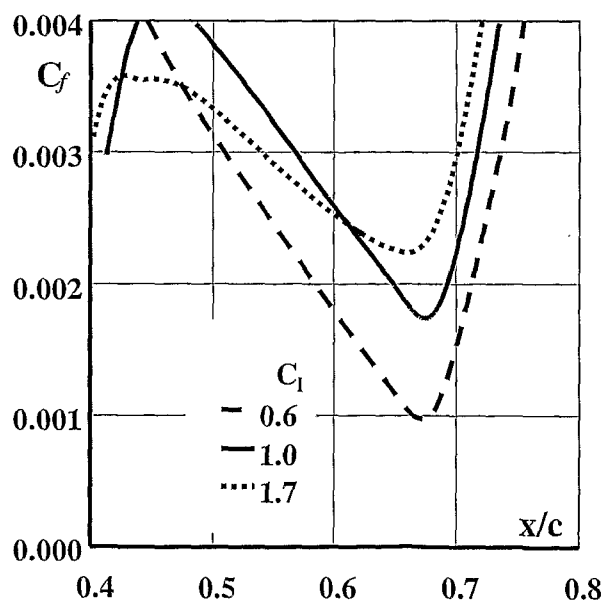


Fig. 11(a)

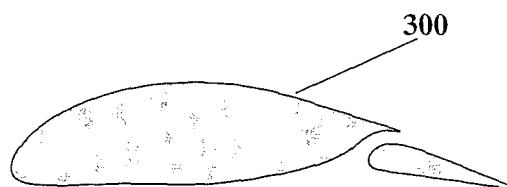


Fig. 11(b)

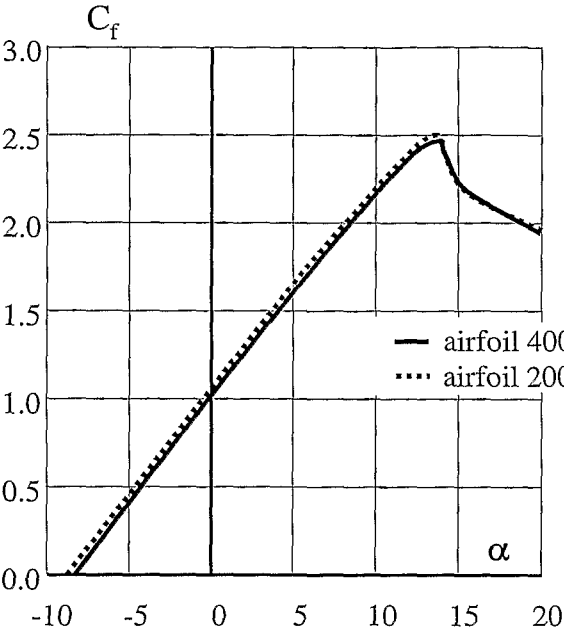


Fig 12(a)

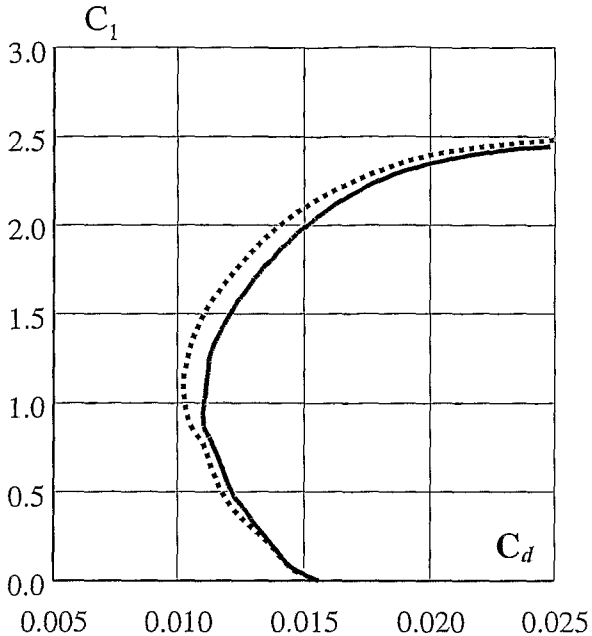


Fig 12(b)



Fig 12(c)

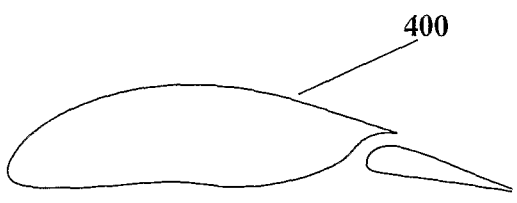
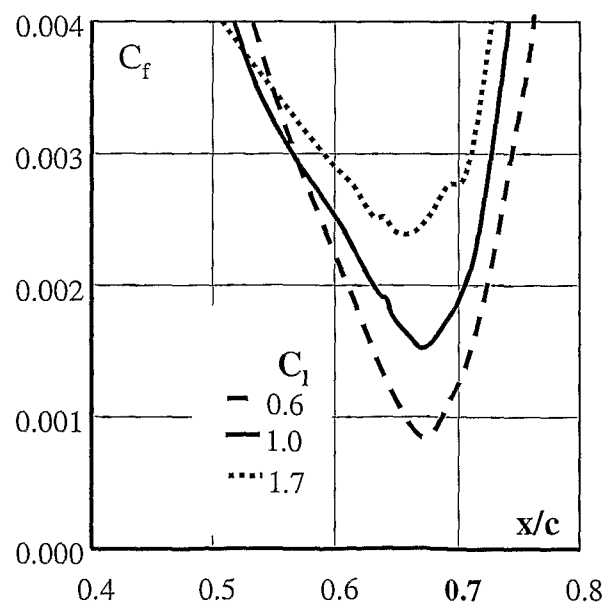
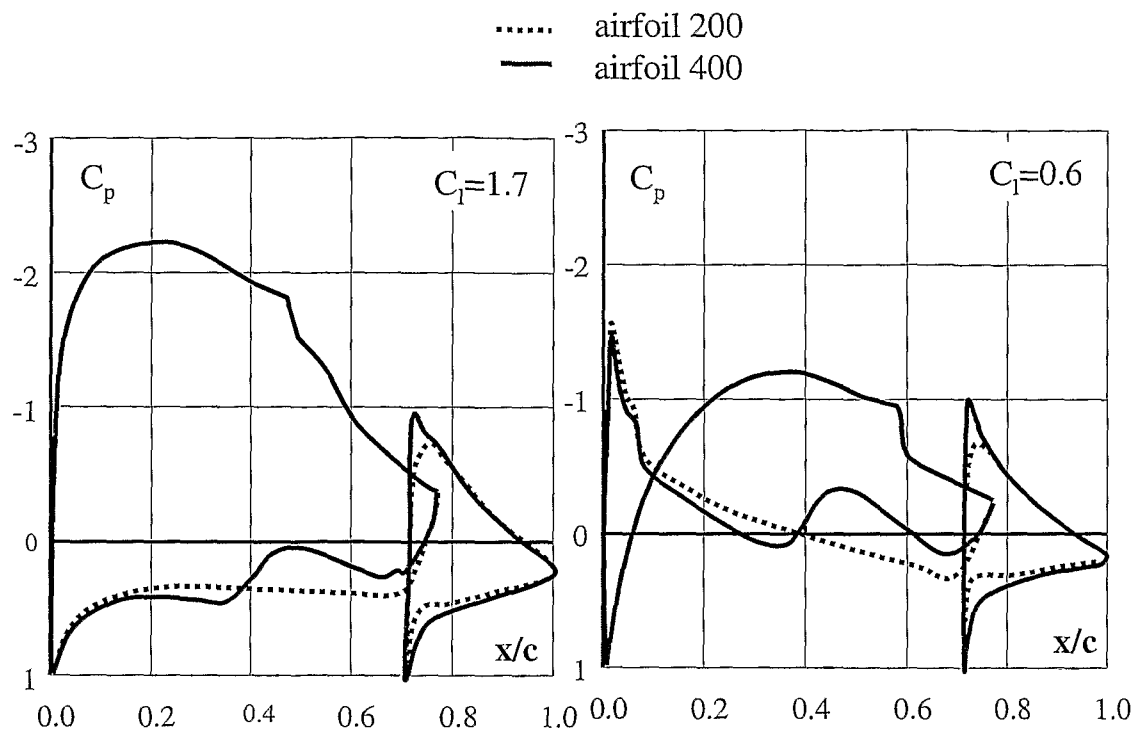


Fig 14(b)

9/13

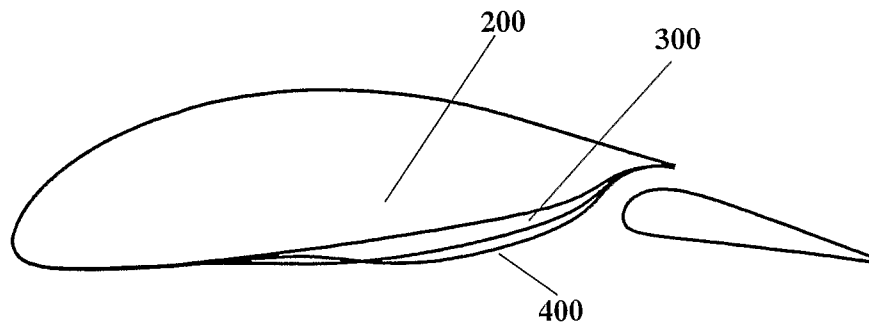


Fig 15

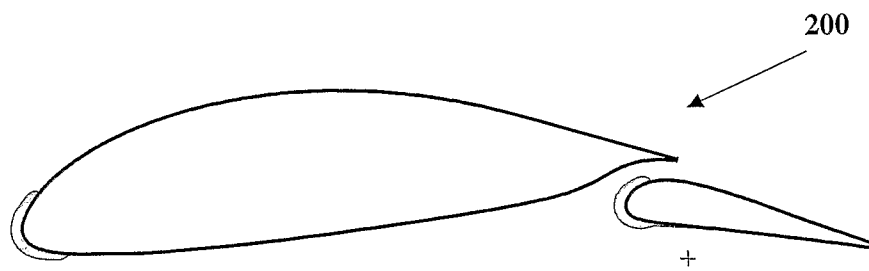


Fig. 16(a)

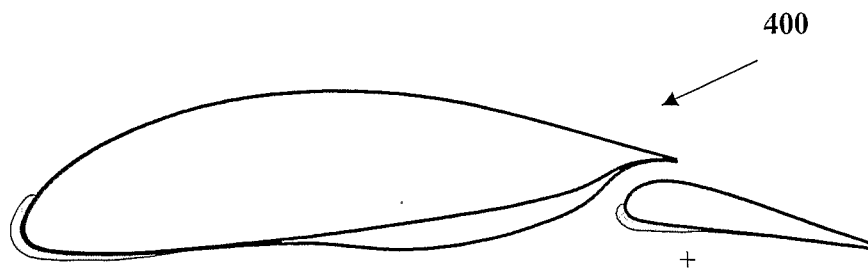


Fig. 16(b)

10/13

Primary airfoil element				Secondary airfoil element						
X	Z	X	Z	X	Z	X	Z	X	Z	Z
0.773999	0.065165	0.021159	0.032428	0.581939	0.013517					
0.589334	0.120141	0.012229	0.01915	0.618779	0.020734					
0.546163	0.131705	0.006268	0.006462	0.63975	0.025896					
0.507946	0.139903	0.004429	-0.0003	0.660112	0.032697					
0.479144	0.14471	0.003993	-0.00667	0.67779	0.040772					
0.433853	0.150103	0.004752	-0.01146	0.697568	0.051655					
0.401482	0.152358	0.006527	-0.016	0.712665	0.05859					
0.366138	0.153214	0.009704	-0.02062	0.728204	0.062969					
0.33079	0.152311	0.016486	-0.02602	0.74605	0.065084					
0.292273	0.149233	0.02469	-0.02954	0.76374	0.064698					
0.252607	0.143666	0.035641	-0.03242	0.773691	0.063318					
0.213387	0.135579	0.049127	-0.03456							
0.184339	0.127772	0.068951	-0.03609							
0.154336	0.117881	0.09698	-0.03678							
0.12502	0.106107	0.141483	-0.03617							
0.103385	0.095788	0.182789	-0.03422							
0.084502	0.085366	0.244653	-0.02951							
0.066344	0.073739	0.324938	-0.02132							
0.049182	0.060777	0.41686	-0.01027							
0.03132	0.044217	0.509745	0.002157							

Primary airfoil element				Secondary airfoil element						
X	Z	X	Z	X	Z	X	Z	X	Z	Z
1.000000	-0.03892	0.72736	0.032897	0.74291	-0.00874					
0.958080	-0.0225	0.724716	0.031159	0.754936	-0.01059					
0.929166	-0.01188	0.721969	0.028949	0.772895	-0.01285					
0.873351	0.009196	0.719764	0.026745	0.81918	-0.01829					
0.847721	0.018571	0.717787	0.024282	0.852651	-0.02251					
0.833255	0.023584	0.71608	0.021572	0.912544	-0.03058					
0.819804	0.027975	0.714616	0.018464	0.962786	-0.03762					
0.807159	0.031801	0.713687	0.015625	0.992038	-0.04206					
0.795786	0.034911	0.713135	0.012704	1.000000	-0.0439					
0.78554	0.037325	0.713018	0.01024							
0.779363	0.038531	0.713189	0.00827							
0.773243	0.039484	0.713615	0.006344							
0.767474	0.040117	0.714304	0.004494							
0.761809	0.040448	0.715322	0.002647							
0.756143	0.040452	0.716402	0.001217							
0.751168	0.040149	0.717655	-6.6E-05							
0.746746	0.0396	0.719636	-0.0016							
0.742401	0.038768	0.722739	-0.00334							
0.738157	0.037632	0.72638	-0.00481							
0.732992	0.035748	0.730788	-0.00614							
0.730127	0.03442	0.736613	-0.00752							

Fig. 17

Primary airfoil element				Secondary airfoil element			
x	z	x	z	x	z	x	z
0.773999	0.065165	0.004429	-0.000299	0.481095	-0.024943	1.000000	-0.038924
0.589334	0.120141	0.003993	-0.006671	0.506928	-0.020856	0.95808	-0.0225
0.546163	0.131705	0.004752	-0.011455	0.531282	-0.016463	0.929166	-0.011882
0.507946	0.139903	0.006527	-0.015999	0.554163	-0.011821	0.873351	0.009196
0.479144	0.14471	0.009704	-0.020616	0.575477	-0.006994	0.847721	0.018571
0.433853	0.150103	0.016486	-0.026021	0.595124	-0.002063	0.833255	0.023584
0.401482	0.152358	0.02469	-0.029538	0.613039	0.00294	0.819804	0.027975
0.366138	0.153214	0.035641	-0.032423	0.629147	0.00803	0.807159	0.031801
0.33079	0.152311	0.049127	-0.034561	0.643375	0.013242	0.795786	0.034911
0.292273	0.149233	0.068951	-0.036089	0.655634	0.018569	0.78554	0.037325
0.252607	0.143666	0.09698	-0.036781	0.665883	0.02391	0.779363	0.038531
0.213387	0.135579	0.141483	-0.03617	0.674243	0.029089	0.773243	0.039484
0.184339	0.127772	0.176111	-0.034793	0.68127	0.034078	0.767474	0.040117
0.154336	0.117881	0.210734	-0.033414	0.69155	0.042029	0.761809	0.040448
0.12502	0.106107	0.242939	-0.032964	0.702995	0.050304	0.756143	0.040452
0.103385	0.095788	0.270461	-0.033278	0.713986	0.05649	0.751168	0.040149
0.084502	0.085366	0.29815	-0.033923	0.725122	0.06089	0.746746	0.0396
0.066344	0.073739	0.329812	-0.034713	0.736686	0.063709	0.742401	0.038768
0.049182	0.060777	0.362364	-0.034872	0.748682	0.065025	0.738157	0.037632
0.03132	0.044217	0.394103	-0.033909	0.760601	0.064962	0.732992	0.035748
0.021159	0.032428	0.424697	-0.031723	0.771285	0.063756	0.730127	0.03442
0.012229	0.01915	0.453709	-0.02862	0.773691	0.063318	0.72736	0.032897
0.006268	0.006462					0.724716	0.031159
						0.721969	0.028949
						0.719764	0.026745
						0.717787	0.024282

Fig. 18

12/13

Primary airfoil element				Secondary airfoil element			
x	z	x	z	x	z	x	z
0.773999	0.065165	0.183802	0.127612	0.377934	-0.029476	1.000000	-0.038924
0.75693	0.070189	0.162195	0.120666	0.404639	-0.032612	0.95808	-0.0225
0.73617	0.076338	0.141059	0.112832	0.434178	-0.035288	0.929166	-0.011882
0.713447	0.083107	0.120505	0.10408	0.463059	-0.035684	0.873351	0.009196
0.689783	0.090188	0.100667	0.094376	0.490707	-0.03414	0.847721	0.018571
0.666145	0.09728	0.081727	0.083702	0.517243	-0.031005	0.833255	0.023584
0.642775	0.104295	0.063921	0.072041	0.54153	-0.026894	0.819804	0.027975
0.619083	0.111379	0.047522	0.059393	0.563937	-0.022191	0.807159	0.031801
0.595655	0.118307	0.032914	0.045872	0.584728	-0.017063	0.795786	0.034911
0.5726	0.124856	0.020674	0.031798	0.603798	-0.011615	0.78554	0.037325
0.549824	0.13081	0.011506	0.017863	0.621099	-0.005866	0.779363	0.038531
0.527128	0.136055	0.005933	0.005488	0.636489	0.000072	0.773243	0.039484
0.504339	0.140567	0.003971	-0.004544	0.649811	0.006148	0.767474	0.040117
0.481368	0.144378	0.005876	-0.014642	0.660965	0.012296	0.761809	0.040448
0.458244	0.147519	0.014458	-0.024766	0.669974	0.018361	0.756143	0.040452
0.435035	0.149995	0.030711	-0.031285	0.677093	0.02413	0.751168	0.040149
0.411804	0.151788	0.054298	-0.0351	0.684199	0.030823	0.746746	0.0396
0.388587	0.152869	0.084632	-0.036605	0.694241	0.040975	0.742401	0.038768
0.3654	0.153214	0.119283	-0.036697	0.703894	0.049468	0.738157	0.037632
0.342256	0.152802	0.1556	-0.035633	0.713464	0.055619	0.732992	0.035748
0.319174	0.151617	0.192108	-0.03363	0.723644	0.060121	0.730127	0.03442
0.296177	0.149647	0.2284	-0.031344	0.734585	0.063183	0.72736	0.032897
0.273299	0.146883	0.263922	-0.029235	0.746191	0.064816	0.724716	0.031159
0.250579	0.143313	0.297654	-0.027654	0.758004	0.065068	0.721969	0.028949
0.228058	0.138921	0.327275	-0.026887	0.768898	0.064127	0.719764	0.026745
0.205781	0.133692	0.353259	-0.027368	0.773691	0.063318	0.717787	0.024282

Fig. 19

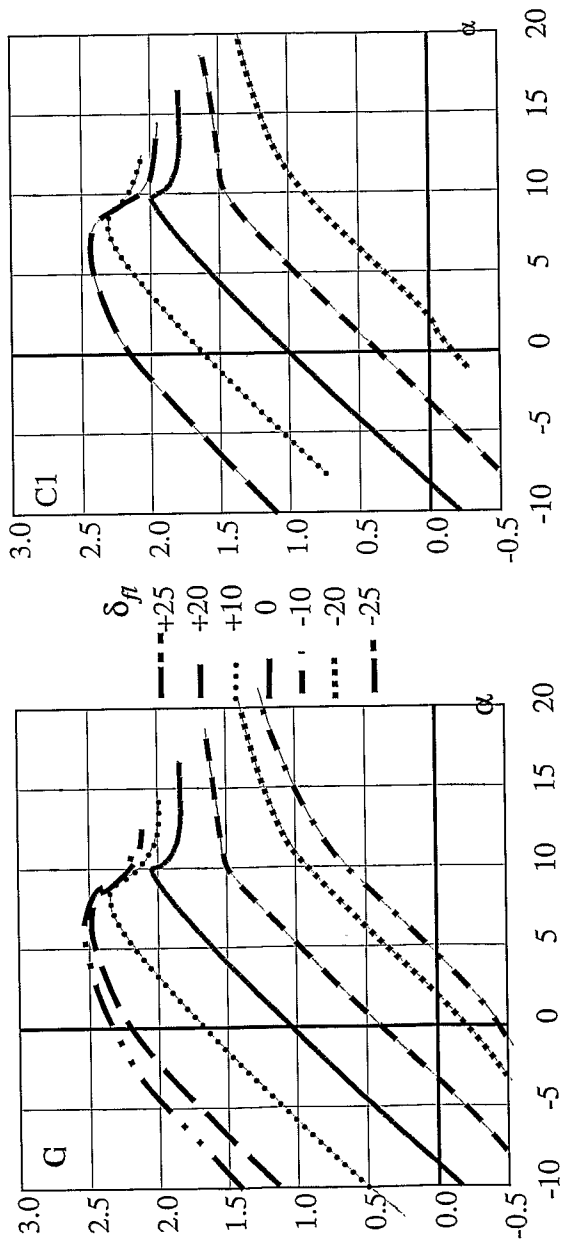


Fig. 20(a)

Fig. 20(b)