

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2007 (27.09.2007)

PCT

(10) International Publication Number
WO 2007/108018 A1

(51) International Patent Classification:
F16C 33/78 (2006.01)

(21) International Application Number:
PCT/IT2006/000171

(22) International Filing Date: 20 March 2006 (20.03.2006)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US): **AK-TIEBOLAGET SKF** [SE/SE]; S-415 50 Goteborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FOTI, Claudio** [IT/IT]; Corso IV Novembre, 2, 1-14010 Dusino San Michele (IT). **SERAFINI, Andrea** [IT/IT]; Via Vecchia di Buriasso, 12/D, 1-10064 Pinerolo (IT). **BRUNETTI, Marco** [IT/IT]; Via Chambery 91/8, 1-10142 Torino (IT).

(74) Agents: **JORIO, Paolo** et al.; c/o Studio Torta S.r.L, Via Viotti, 9, 1-10121 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(48) Date of publication of this corrected version:

27 March 2008

(15) Information about Correction:
see Notice of 27 March 2008

(54) Title: ANNULAR SEALING ASSEMBLY, IN PARTICULAR FOR WHEEL HUBS

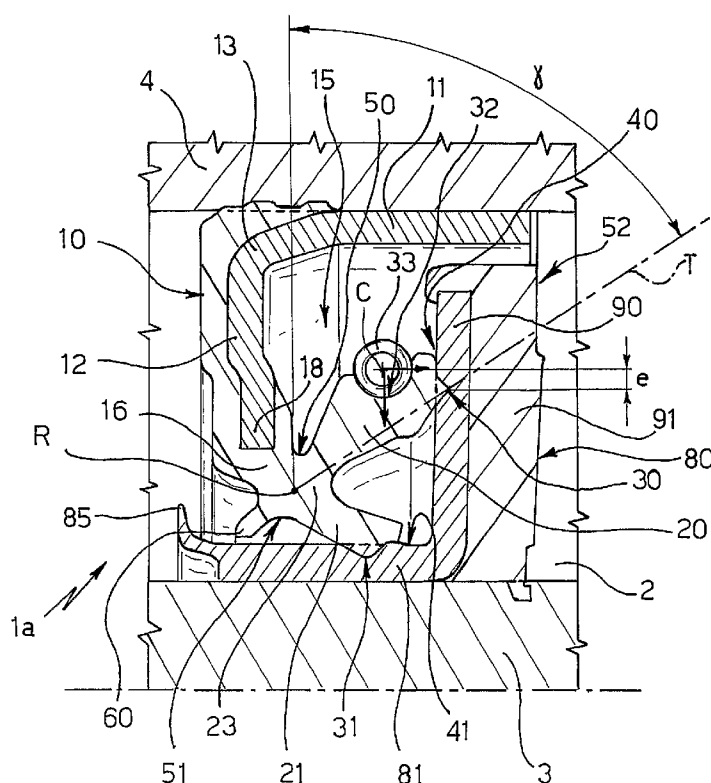

(57) Abstract: A sealing assembly (1a, 1b) including: a first annular shield (10) presenting a sleeve portion (11) and a flange portion (12) which extends radially from a first end (13) of the sleeve portion; and a sealing member (15) made of elastomeric material presenting an annular root portion (16) which extends radially and overhangingly from a peripheral edge (18) of the flange portion and a first axial annular sealing lip (20) in which the sealing member presents a second radial annular sealing lip (21), the lips (20, 21) axially and overhangingly extending from the opposite side of the first end of the sleeve portion, on a same side as a thinned end (23) of the root portion and being reciprocally spread to form a radial V-shaped section having vertex facing the root portion and axis parallel to the sleeve portion; the first lip presenting a radial seat (32) facing the opposite side of the second lip and accommodating a toroidal spring (33) applying an offset radial stress to an elastic hinge defined by the thinned end of the root portion, the sealing lips may be coupled to a second and a third annular shields selectively arrangeable coaxial to the first shield (50, 50') and having similar dimensions.