

(43) International Publication Date
11 December 2014 (11.12.2014)

- (51) International Patent Classification:
B63H 1/14 (2006.01) *F04D 29/58* (2006.01)
- (21) International Application Number:
PCT/US2014/025324
- (22) International Filing Date:
13 March 2014 (13.03.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/790,175 15 March 2013 (15.03.2013) US
- (71) Applicants: **PRESIDENT AND FELLOWS OF HARVARD COLLEGE** [US/US]; 17 Quincy Street, Cambridge, Massachusetts 02138 (US). **ROLLS-ROYCE CANADA, LTD.** [CA/CA]; 9500 Cote de Liesse Road, Lachine, Montreal, Québec H8T 1A2 (CA).
- (72) Inventors: **BERTOLDI, Katia**; 47 Houghton Street, #2, Somerville, Massachusetts 02143 (US). **TAYLOR, Michael**; 79 Brookings Street, Medford, Massachusetts 02155 (US). **SHANIAN, Ali**; 3600 Park Av., Apt. 711, Montreal, Québec H2X 3R2 (CA). **GERENDAS, Miklos**; Bahnhof-sallee 4, 15838 Am Mellensee (DE). **CARSON, Carl**; 537 Av Westhill, Beaconsfield, Québec H9W 2G5 (CA).
- (74) Agents: **PEGG, William, D.** et al.; Nixon Peabody LLP, 300 S. Riverside Plaza, 16th floor, Chicago, Illinois 60606 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

[Continued on next page]

(54) Title: VOID STRUCTURES WITH REPEATING ELONGATED-APERTURE PATTERN

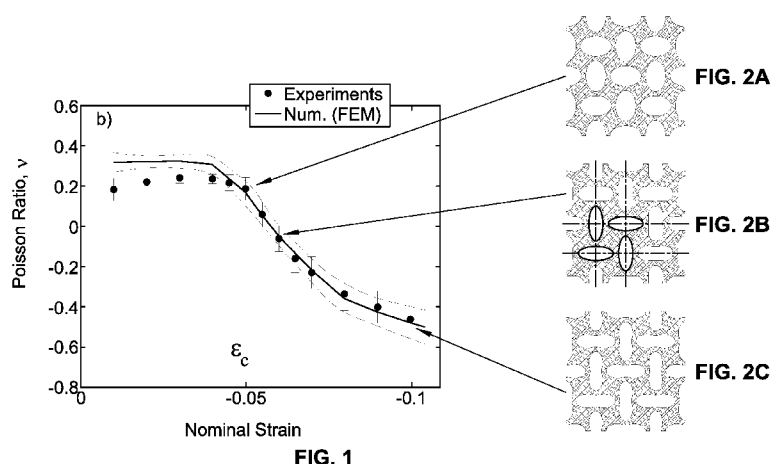

(57) Abstract: Void structures, systems and devices with void structures, and methods of fabricating void structures are disclosed. A void structure is disclosed with a repeating elongated-aperture pattern designed to provide negative Poisson's Ratio behavior under macroscopic stress and strain loading. The pattern can include horizontal and vertical elliptically shaped apertures that are arranged on horizontal and vertical lines in a way that the lines are equally spaced in both dimensions. The centers of each aperture is on a crossing point of two of the lines. The vertical and horizontal elliptically shaped apertures alternate on the vertical and horizontal lines such that any vertical aperture is surrounded by horizontal apertures along the lines (and vice versa), and the next vertical apertures are found on both diagonals. The voids can also act as cooling and/or damping holes and, due to their arrangement, also as stress reduction features.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

VOID STRUCTURES WITH REPEATING ELONGATED-APERTURE PATTERN

TECHNICAL FIELD

[0001] The present disclosure relates generally to void structures and cellular solids. More particularly, aspects of this disclosure relate to materials possessing a repeating-aperture pattern that leads to unusual mechanical properties, such as negative Poisson's Ratio, as well as systems, method and devices using such materials.

BACKGROUND

[0002] When materials are compressed along a particular axis they are most commonly observed to expand in directions orthogonal to the applied load. The property that characterizes this behavior is the Poisson's Ratio, which can be defined as the ratio between the negative transverse and longitudinal strains. The majority of materials are characterized by a positive Poisson's Ratio, which is approximately 0.5 for rubber and 0.3 for glass and steel. Materials with a negative Poisson's Ratio will contract (or expand) in the transverse direction when compressed (or stretched) and, although they can exist in principle, demonstration of practical examples is relatively recent. Materials that exhibit negative Poisson's Ratio behavior are oftentimes referred to as "auxetics". The results of many investigations suggest that the auxetic behavior involves an interplay between the microstructure of the material and its deformation. Examples of this are provided by the discovery that metals with a cubic lattice, natural layered ceramics, ferro- electric polycrystalline ceramics, and zeolites may all exhibit negative Poisson's Ratio behavior. Moreover, several geometries and mechanisms have been proposed to achieve negative values for the Poisson's Ratio, including foams with reentrant structures, hierarchical laminates, polymeric and metallic foams. Negative Poisson's Ratio effects have also been demonstrated at the micrometer scale using complex materials which were fabricated using soft lithography and at the nanoscale with sheets assemblies of carbon nanotubes.

[0003] A significant challenge in the fabrication of materials with auxetic properties is that it usually involves embedding structures with intricate geometries within a host matrix. As such, the manufacturing process has been a bottleneck in the practical development towards applications. A structure which forms the basis of many auxetic materials is that of a

- 2 -

cellular solid and research into the deformation of these materials is a relatively mature field with primary emphasis on the role of buckling phenomena, on load carrying capacity, and energy absorption under compressive loading. Very recently, the results of a combined experimental and numerical investigation demonstrated that mechanical instabilities in 2D periodic porous structures can trigger dramatic transformations of the original geometry. Specifically, uniaxial loading of a square array of circular holes in an elastomeric matrix is found to lead to a pattern of alternating mutually orthogonal ellipses while the array is under load. This results from an elastic instability above a critical value of the applied strain. The geometric reorganization observed at the instability is both reversible and repeatable and it occurs over a narrow range of the applied load. Moreover, it has been shown that the pattern transformation leads to unidirectional negative Poisson's Ratio behavior for the 2D structure, i.e., it only occurs under compression.

[0004] U.S. Patent No. 5,233,828 ("828 Patent"), to Phillip D. Napoli, shows an example of an engineered structural member - a combustor liner - utilized in high temperature applications. Combustor liners are generally used in the combustion section of a gas turbine. Combustor liners can also be used in the exhaust section or in other sections of or components of the gas turbine, such as the turbine blades. In operation, the combustors burn gas at intensely high temperatures, such as around 3,000°F or higher. To prevent this intense heat from damaging the combustor before it exits to a turbine, the combustor liner is provided in the interior of the combustor to insulate the surrounding engine. To minimize temperature and pressure differentials across the combustor liners, cooling slots have conventionally been provided, such as is shown in '828 Patent. The '828 Patent shows a portion of an annular combustor liner having spaced cooling holes disposed in a continuous pattern, angled through the wall of the liner. As another example, U.S. Patent No. 8,066,482 B2, to James Page Strohl et al., shows another example of an engineered structural member having shaped cooling holes to enhance the cooling of a desired region of a gas turbine and to reduce stress levels in and around the cooling holes. European Patent No. EP 0971172 A1, to Dr. Jakob Keller, likewise shows another example of a perforated liner used in a combustion zone of a gas turbine. In yet another example, U.S. Patent Application Pub. No. 2010/0009120 A1, to Mary C. Boyce et al., discloses a number of transformative periodic structures which include elastomeric or elasto-plastic periodic solids that experience transformation in the structural configuration upon application of a critical macroscopic stress or strain. All of the foregoing

patent documents are incorporated herein by reference in their respective entireties for all purposes.

SUMMARY

[0005] Aspects of the present disclosure are directed towards void structures with repeating elongated-aperture patterns that provide negative Poisson's Ratio behavior (also known as "auxetic materials"). Guided by the collapsed-void shapes found in rubber specimens under external load, further aspects are directed to materials with void shapes that are generated in a stress-free state in order to achieve negative Poisson's Ratio behavior in the material without collapsing the material in manufacturing. Other aspects of the present disclosure are directed to multi-functional air passages in the hot section of a gas turbine. Additional aspects are directed towards gas turbine combustors that are made with walls from a material with a specific void structure that provides particular thermal, damping and/or acoustic functionalities. Such functionalities include, for example, acoustic attenuation (or noise damping), stress reduction (or load damping), and thermal cooling (or heat damping).

[0006] According to one aspect of the present disclosure, a void structure is disclosed. The void structure includes a rigid or semi-rigid body with a first plurality of first elongated apertures and a second plurality of second elongated apertures. Each of the elongated apertures has a major axis and a minor axis. The major axes of the first elongated apertures are perpendicular to the major axes of the second elongated apertures. The first and second pluralities of elongated apertures are arranged in an array of rows and columns. Each of the rows and each of the columns alternate between the first and the second elongated apertures. That is, each row and each column may include 100 apertures - 50 vertically oriented apertures that are interspersed with 50 horizontally oriented apertures. The apertures are cooperatively configured to achieve negative Poisson's Ratio behavior under stress or strain, or both.

[0007] Other aspects of the present disclosure are directed to a method of manufacturing a void structure. The method includes: providing a rigid or semi-rigid body; and adding first elongated apertures and second elongated apertures into the rigid or semi-rigid body. Each of the elongated apertures has a major axis and a minor axis. The major axes of the first elongated apertures are perpendicular to the major axes of the second elongated apertures. The elongated apertures are arranged in an array of rows and columns. Each of the rows and

- 4 -

each of the columns alternates between the first and the second elongated apertures. The apertures are cooperatively configured to achieve negative Poisson's Ratio behavior under stress or strain, or both. The first and second elongated apertures can be added into the rigid or semi-rigid body in any known manner, including via microfabrication, interference lithography, laser cutting, or electron-beam cutting, or any combination thereof.

[0008] In accordance with another aspect of this disclosure, a gas turbine combustor is disclosed. The gas turbine combustor includes a metallic wall with a plurality of vertically elongated apertures and a plurality of horizontally elongated apertures. Each of the elongated apertures has a major axis that is perpendicular to a minor axis. The major axes of the vertically elongated apertures are perpendicular to the major axes of the horizontally elongated apertures. The elongated apertures are arranged in an array of equidistant rows that are perpendicular to equidistant columns. Each of the rows and each of the columns alternates between the vertically and the horizontally elongated apertures. The elongated apertures have a predetermined porosity and a predetermined aspect ratio that are cooperatively configured to achieve negative Poisson's Ratio behavior under macroscopic stress and strain loadings.

[0009] The above summary is not intended to represent each embodiment or every aspect of the present disclosure. Rather, the summary merely provides an exemplification of some of the novel features presented herein. The above features and advantages, and other features and advantages of the present disclosure, will be readily apparent from the following detailed description of exemplary embodiments and modes for carrying out the present invention when taken in connection with the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a graph of Poisson's Ratio against Strain illustrating the negative Poisson's Ratio behavior of various representative void structures according to aspects of the present disclosure.

[0011] FIGS. 2a-2c are images of three different square arrays of elliptical voids demonstrating different negative Poisson's Ratio behavior according to aspects of the present disclosure.

- 5 -

[0012] FIG. 3 provides three time-sequenced images of a square array of collapsed-hole voids reducing the thermal stresses caused by a hot spot in the domain according to aspects of the present disclosure.

[0013] FIG. 4 is an image of a square array of horizontally and vertically aligned elliptically shaped apertures in a stress-free state that provides negative Poisson's Ratio behavior in accordance with aspects of the present disclosure.

[0014] FIG. 5 is an image of a square array of horizontally and vertically aligned double-T shaped apertures in a stress-free state that provides negative Poisson's Ratio behavior in accordance with aspects of the present disclosure.

[0015] FIGS. 6-8 illustrate different representative aperture shapes in accordance with aspects of the present disclosure.

[0016] While aspects of this disclosure are susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION

[0017] This invention is susceptible of embodiment in many different forms. There are shown in the drawings and will herein be described in detail representative embodiments of the invention with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the broad aspects of the invention to the embodiments illustrated. To that extent, elements and limitations that are disclosed, for example, in the Abstract, Summary, and Detailed Description sections, but not explicitly set forth in the claims, should not be incorporated into the claims, singly or collectively, by implication, inference or otherwise. For purposes of the present detailed description, unless specifically disclaimed: the singular includes the plural and vice versa; the words "and" and "or" shall be both conjunctive and disjunctive; the word "all" means "any and all"; the word "any" means "any and all"; and the words "including" and "comprising" mean "including without limitation." Moreover, words of approximation,

such as “about,” “almost,” “substantially,” “approximately,” and the like, can be used herein in the sense of “at, near, or nearly at,” or “within 3-5% of,” or “within acceptable manufacturing tolerances,” or any logical combination thereof, for example.

[0018] Aspects of the present disclosure are directed towards void structures which, in a steady-state environment sans macroscopic loading, include repeating elongated-aperture patterns that provide negative Poisson’s Ratio (NPR) behavior. Poisson’s Ratio (or “Poisson coefficient”) can be generally typified as the ratio of transverse contraction strain to longitudinal extension strain in a stretched object. Poisson’s Ratio is generally positive since most materials, including many polymer foams and cellular solids, become thinner in cross section when stretched. The void structures disclosed herein exhibit a negative Poisson’s Ratio behavior. These types of materials are also referred to as being “auxetic” or as “auxetic materials”.

[0019] In some of the disclosed embodiments, when the structure is compressed in the Y direction, because of the way the adjacent apertures are arranged, the Y-direction strain results in a moment around the center of each cell, causing the cells to rotate. Each cell rotates in a direction opposite to that of its immediate neighbors. This rotation results in a reduction in the X-direction distance between horizontally adjacent cells. In other words, compressing the structure in the Y direction causes it to contract in the X direction. Conversely, tension in the Y direction results in expansion in the X direction. At the scale of the entire structure, this mimics the behavior of an auxetic material. But many of the structures disclosed herein are composed of conventional materials. The “pseudo-auxetic” behavior is an emergent property of the structure. Put another way, the material itself may have a positive Poisson’s Ratio, but by modifying the structure with the introduction of the elongated-aperture patterns disclosed herein, the structure microscopically behaves as having a negative Poisson’s Ratio.

[0020] FIG. 1 is a graph of Poisson’s Ratio against Strain illustrating the Poisson’s Ratio behavior of three representative void structures shown in FIGS. 2a-2c. The chart of FIG. 1 shows the Poisson Ratio (PR) of a test piece under load. At a certain level of deformation the “instantaneous” PR can be determined and plotted against a parameter (e.g., nominal strain) representing the level of deformation. When a designer has a desired NPR for an intended application, the level of deformation corresponding to that PR can be looked up and the

geometry of the holes at that condition determined. This hole shape pattern can then be machined (manufactured) on an unstressed part to achieve a component with the desired PR.

[0021] As seen in FIGS. 2b and 2c, the NPR elongated-aperture patterns can consist of horizontally oriented and vertically oriented elliptical holes (also referred to as “apertures” or “ellipses”). The ellipses are arranged on horizontal and vertical lines (e.g., rows and columns of a square array) in a way that the vertical lines are equally spaced and the horizontal in both dimensions lines are equally spaced (also $\Delta x = \Delta y$). The center of each aperture is on the crossing point of two of the lines. Horizontally oriented and vertically oriented ellipses alternate on the vertical and horizontal lines such that any vertical ellipse is surrounded by horizontal ellipses along the lines (and vice versa), while the next vertical ellipses are found on both diagonals. The voids can also act as cooling and/or damping holes and, due to their arrangement, also as stress reduction features.

[0022] Also disclosed is a gas turbine combustor that is made with walls from a material with any of the specific void structures disclosed herein. In some embodiments, the aperture shapes are generated in a metal body directly in a stress-free state such that the apertures are equivalent in shape to collapsed void shapes found in rubber under external load in order to get negative Poisson’s Ratio behavior in the metal without collapsing the metallic structure in manufacturing. Various manufacturing routes can be used to replicate the void patterns in the metallic component. The manufacturing does not necessarily contain buckling as one of the process steps. The void structures disclosed herein are not limited to the combustor wall; rather, these features can be incorporated into other sections of a turbine (e.g., a blade, a vein, etc.).

[0023] If the porosity of a single sheet is judged to be too high for a specific combustor application, two or more sheets are stacked in an offset manner in order to have the optimum void fraction of the single sheet to get the intended behavior and to have the optimum air flow through the sheet in order to get the intended level of cooling and/or damping. For example, two sheets with the same (or a similar) pattern of apertures can be juxtaposed such that the apertures are aligned (e.g., have a common central axis) or intentionally misaligned (e.g., central axes of adjacent apertures are radially offset) to cooperatively achieve a desired thermal, mechanical, and/or acoustic function.

[0024] The combustor wall has an advantageous behavior of an appeared (macroscopic) negative Poisson’s Ratio. Even when this structure is made from conventional metal, it will

contract in a lateral direction when it is put under an axial compressive load, without the material itself being made from a material having a negative Poisson's Ratio. The behavior is triggered by the specific void structure.

[0025] In a conventional combustor wall, the holes used for providing cooling air flow and damping also act as stress risers. In some of the disclosed embodiments, as the wall material at a hot spot presses against its surrounding material, e.g., in a vertical direction, the negative Poisson's Ratio will make the wall material contract in the horizontal direction, and vice versa. This behavior will reduce the stresses at the hotspot significantly. This effect is stronger than just the impact of the reduced stiffness. Stress at hot spot gets reduced by 50% leading to an increase in stress fatigue life by several orders of magnitude. The stress reduction by the NPR behavior does not increase the air consumption of the combustor wall. The longer life could be used as such or the wall material could be replaced by a cheaper one in order to reduce cost significantly.

[0026] We also have demonstrated that the replacement of circular combustor cooling holes with a fraction of elliptical air passages of 2-3% reduces thermo-mechanical stress by a factor of at least five, while maintaining the cooling and damping performance. For example, elliptical cooling holes in the combustor have been predicted to result in a five-fold decrease in the worst principal stress. By inducing NPR behavior, we have added a further functionality to our cooling holes. Five-fold reduction in worst principal stress resulting from modification of cooling holes to impart negative Poisson ratio behavior. In stress fatigue of a combustor-specific superalloy, halving the component stress increases the fatigue life by more than an order of magnitude. In some embodiments, the superalloy may be a nickel-based superalloy, such as Inconel (e.g. IN100, IN600, IN713), Waspaloy, Rene alloys (e.g. Rene 41, Rene 80, Rene 95, Rene N5), Haynes alloys, Incoloy, MP98T, TMS alloys, and CMSX (e.g. CMSX-4) single crystal alloys.

[0027] It has been shown that lower porosity offers increased cooling function. As used herein, "porosity" can be defined to mean the surface area of the apertures, A_A , divided by the surface area of the structure, A_S , or $\text{Porosity} = A_A / A_S$. It may be desirable, in some embodiments, that the porosity of a given void structure be approximately 1-4% or, in some embodiments, approximately 2-3% or, in some embodiments, approximately 2%. Many prior art arrangements require a porosity of 40-50%.

[0028] There may be a predetermined optimal aspect ratio for the elongated apertures to provide a desired NPR behavior. As used herein, “aspect ratio” of the apertures can be defined to mean the length divided by the width of the apertures, or the length of the major axis divided by the length of the minor axis of the apertures. It may be desirable, in some embodiments, that the aspect ratio of the apertures be approximately 5-40 or, in some embodiments, approximately 30-40. An optimal NPR can be, for example, -0.5. Aspects of the disclosed invention can be demonstrated on structural patterns created with a pattern lengthscale at the millimeter, and are equally applicable to structures possessing the same periodic patterns at a smaller lengthscale (e.g., micrometer, submicrometer, and nanometer lengthscales).

[0029] The geometry of the apertures can take on a variety of shapes, sizes and orientations. FIGS. 2b and 2c illustrate the apertures taking on an elliptical form. FIGS. 7 and 9 illustrate the apertures taking on an elliptical form with a higher aspect ratio than those shown in FIGS. 2a-2c. FIG. 3 illustrates the apertures taking on a collapsed-hole shape. FIGS. 8 and 11 show the apertures taking on an I-shaped or double-T-shaped form. FIG. 10 illustrates the apertures taking on a barbell shape with two stop holes connected by a straight slot or stem. The shapes can be modified and/or evolved from one application to another. Moreover, these shapes can be changed due to the manufacturing process that is employed. The NPR behavior works with any configuration where the cells rotate in the manner described hereinabove.

[0030] While many embodiments and modes for carrying out the present invention have been described in detail above, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention within the scope of the appended claims.

CLAIMS

What is claimed is:

1. A void structure comprising:

a rigid or semi-rigid body with a first plurality of first elongated apertures and a second plurality of second elongated apertures, each of the elongated apertures having a major axis and a minor axis, the major axes of the first elongated apertures being perpendicular to the major axes of the second elongated apertures, the first and second pluralities of elongated apertures being arranged in an array of rows and columns, each of the rows and each of the columns alternating between the first and the second elongated apertures, the apertures being cooperatively configured to achieve negative Poisson's Ratio behavior under stress or strain, or both.
2. The void structure of claim 1, wherein the first and second elongated apertures are elliptical.
3. The void structure of claim 1, wherein the first and second elongated apertures are I-shaped.
4. The void structure of claim 1, wherein the first and second elongated apertures each includes spaced holes connected by a stem.
5. The void structure of claim 1, wherein the body comprises a metallic wall.
6. The void structure of claim 1, wherein the major and minor axes of each elongated slot are perpendicular.
7. The void structure of claim 1, wherein the rows are equally spaced from each other and the columns are equally spaced from each other.
8. The void structure of claim 1, wherein each of the elongated apertures includes a center at the intersection of the major and minor axes, the center of each of the elongated apertures being located at a respective intersection point of one of the rows and one of the columns of the array.
9. The void structure of claim 1, wherein the apertures are cooperatively configured to provide predetermined thermal cooling and acoustic damping characteristics.
10. The void structure of claim 1, wherein the elongated apertures have a predetermined porosity and a predetermined aspect ratio that are cooperatively configured to achieve negative Poisson's Ratio behavior under macroscopic stress and strain loadings.

- 11 -

11. The void structure of claim 1, wherein the elongated apertures are present in the rigid or semi-rigid body when in a stress-free state.

12. The void structure of claim 1, wherein the elongated apertures have a predetermined porosity of approximately 1-4%.

13. The void structure of claim 1, wherein each of the elongated apertures has an aspect ratio of approximately 5-40.

14. A method of manufacturing a void structure, the method comprising:

providing a rigid or semi-rigid body; and


adding first elongated apertures and second elongated apertures into the rigid or semi-rigid body, wherein each of the elongated apertures having a major axis and a minor axis, the major axes of the first elongated apertures being perpendicular to the major axes of the second elongated apertures, the elongated apertures being arranged in an array of rows and columns, each of the rows and each of the columns alternating between the first and the second elongated apertures, the apertures being cooperatively configured to achieve negative Poisson's Ratio behavior under stress or strain, or both.

15. The method of claim 14, wherein the adding the first and second elongated apertures into the rigid or semi-rigid body is via microfabrication, interference lithography, laser cutting, or electron-beam cutting, or any combination thereof.

16. A gas turbine combustor comprising:

a metallic wall with a plurality of vertically elongated apertures and a plurality of horizontally elongated apertures, each of the elongated apertures having a major axis perpendicular to a minor axis, the major axes of the vertically elongated apertures being perpendicular to the major axes of the horizontally elongated apertures, the pluralities of elongated apertures being arranged in an array of equidistant rows perpendicular to equidistant columns, each of the rows and each of the columns alternating between the vertically and the horizontally elongated apertures,

wherein the elongated apertures have a predetermined porosity and a predetermined aspect ratio that are cooperatively configured to achieve negative Poisson's Ratio behavior under macroscopic stress and strain loadings.

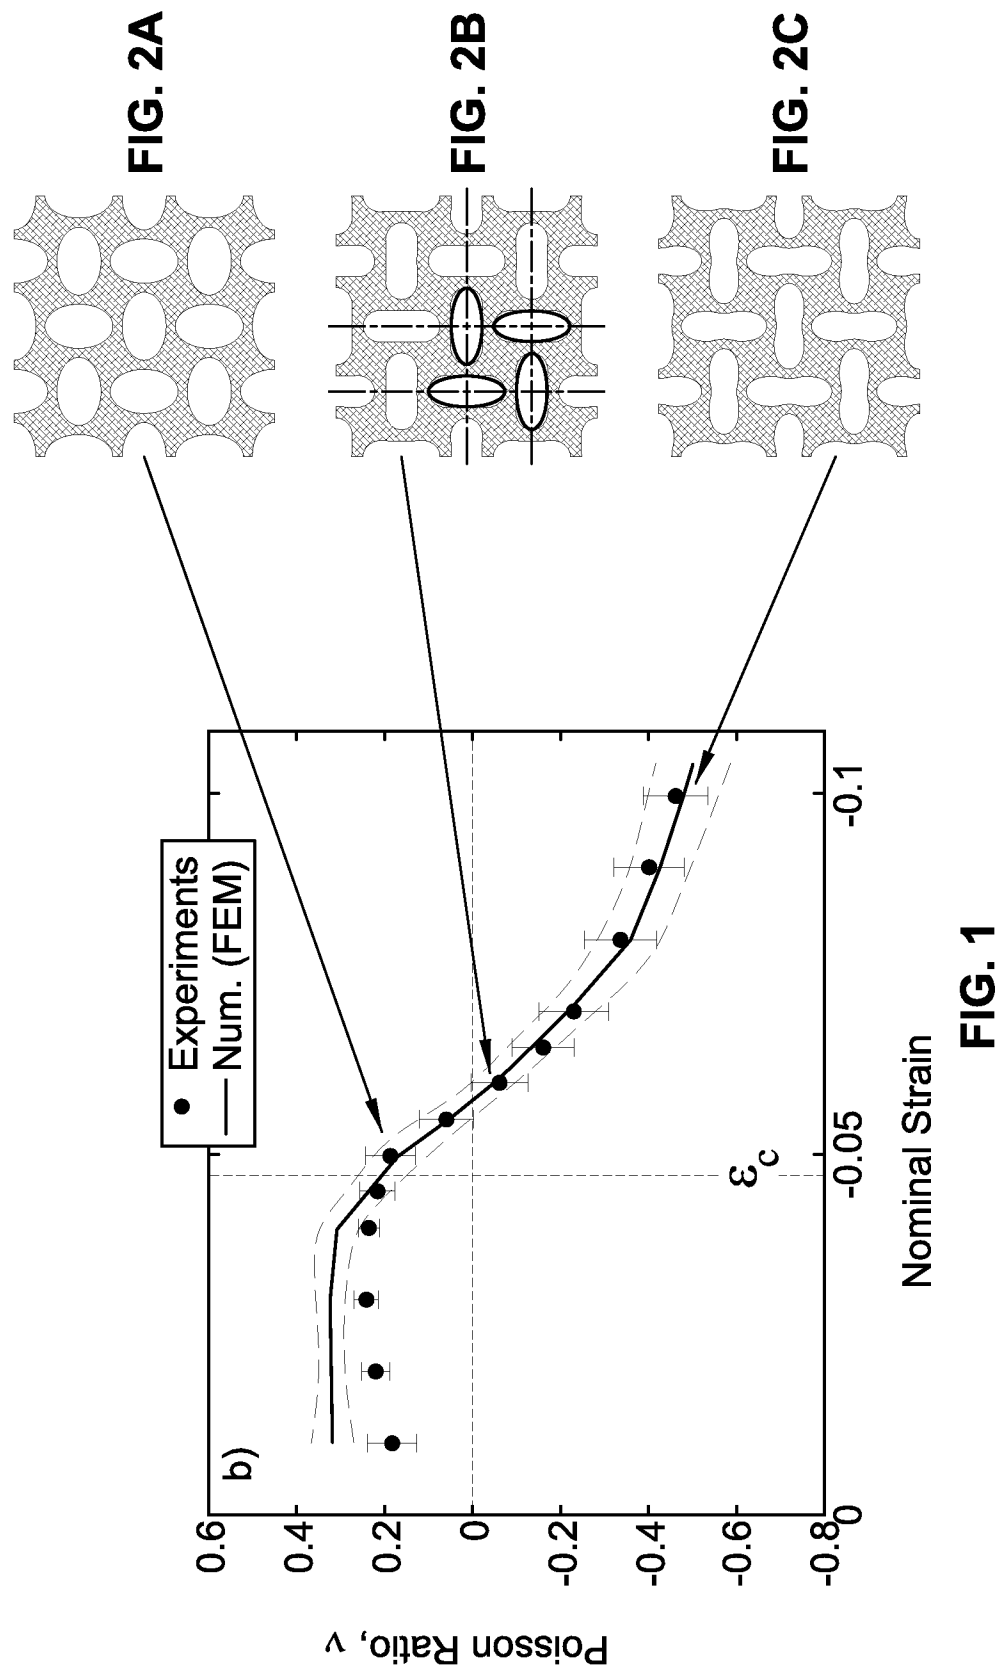

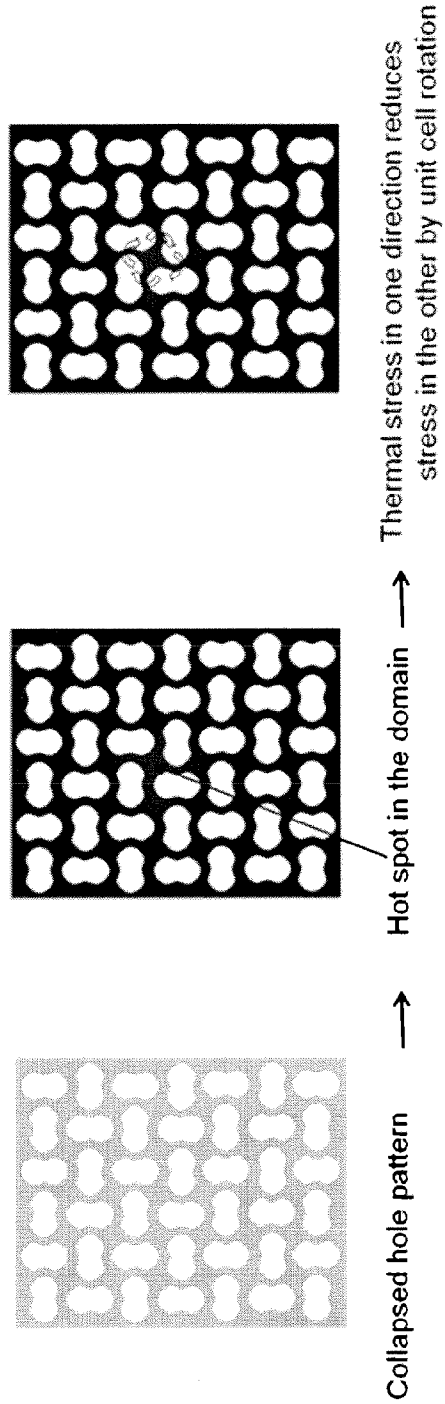


FIG. 3

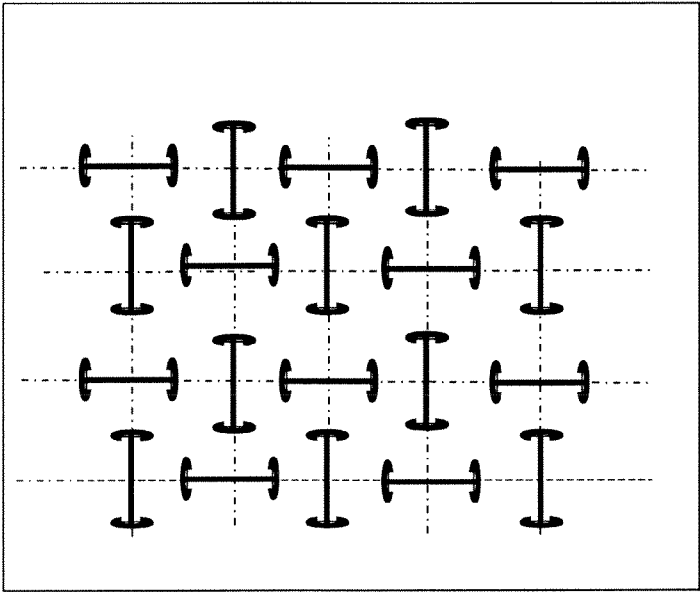


FIG. 5

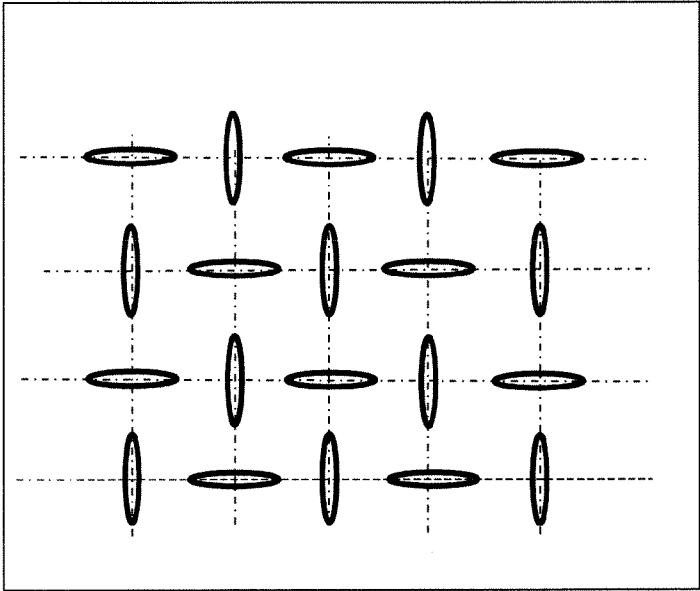


FIG. 4



FIG. 6



FIG. 7

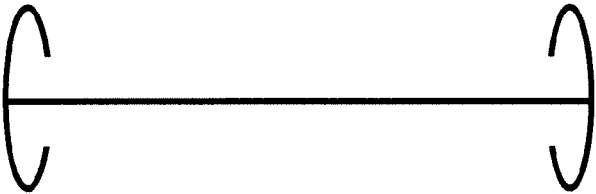


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 14/25324

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B63H 1/14; F04D 29/58 (2014.01)

CPC - F05D 2240/81; F01D 5/186

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B63H 1/14; F04D 29/58 (2014.01)

CPC: F05D 2240/81; F01D 5/186

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (USPT,PGPB,JPAB,EPAG); Google

Search Terms: Void rigid body metal aperture hole major minor shape dimension elliptical circular elongated columns rows alternate wall stem spaced poisson's ratio stress strain

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010/0009120 A1 (Boyce et al.) 14 Jan 2010 (14.01.2010), entire document especially abstract, para [0036]-[0037], [0048], [0049]; claims 1, 6-9 and 13; fig. 1A, 3	1-16
Y	US 2009/0041978 A1 (Sogard et al.) 12 Feb 2009 (12.02.2009), entire document especially abstract, claims 1 and 9	1-16

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

09 November 2014 (09.11.2014)

Date of mailing of the international search report

18 NOV 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774