

(19)



(11)

EP 4 240 682 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

05.06.2024 Bulletin 2024/23

(21) Application number: **21824320.2**

(22) Date of filing: **30.11.2021**

(51) International Patent Classification (IPC):
B65H 75/36 ^(2006.01)

(52) Cooperative Patent Classification (CPC):
B65H 75/366; B65H 2701/33

(86) International application number:
PCT/EP2021/083640

(87) International publication number:
WO 2022/179730 (01.09.2022 Gazette 2022/35)

(54) **HOSE STORAGE UNIT FOR STORING HOSE**

SCHLAUCHLAGEREINHEIT ZUR LAGERUNG EINES SCHLAUCHS

UNITÉ DE STOCKAGE DE TUYAUX POUR LE STOCKAGE DE TUYAUX

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **24.02.2021 EP 21158863**

(43) Date of publication of application:
13.09.2023 Bulletin 2023/37

(73) Proprietor: **HUSQVARNA AB**
561 82 Huskvarna (SE)

(72) Inventors:

• **FREY, Reiner**
89231 Neu-Ulm (DE)

• **SAUTER, Thomas**
89150 Laichingen (DE)

(74) Representative: **Finkele, Rolf**
Gardena Manufacturing GmbH
Hans-Lorensen-Straße 40
89079 Ulm (DE)

(56) References cited:
WO-A1-2017/148522 KR-A- 20110 024 876
US-A- 2 111 811 US-A- 2 569 857
US-A1- 2009 272 857

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present invention relates to a hose storage unit for storing a hose.

BACKGROUND

[0002] A hose storage device for storing a hose, specifically a water hose, is well-known. Such hose storage devices are generally mounted on a wall, a cabinet, and the like, which may increase components associated with the hose storage devices. This additional mounting of such components of the hose storage device may be challenging in some situations. The hose storage device typically includes a hose trolley or a hose box. The hose trolleys or the hose boxes require increased space on a floor or may have to be firmly mounted to the wall. Typically, such arrangements are not useful for short hoses. Further, the hose trolleys or the hose boxes are expensive which increase an overall cost associated with the hose storage device.

[0003] Additionally, different hose storage devices have been developed for storing the water hose around a water tap. Such hose storage devices generally include a hose holder or hanger which is coupled to the water tap. However, such hose storage device also face constraints due to involvement of a large number of components, connection joints, attachments, and the like. The hose holder or hanger may also put pressure on connection of the hose storage device with the tap. Thus, there is a need for an improved design of the hose storage device which provides a simple and cost-effective means for hose storage and can be used for different (say short) hoses.

[0004] Korean patent 20110024876 reference (hereinafter referred to as '876 reference) discloses a fire hose hanger which includes a cylindrical rotating body at one end of a long supporting stand. Further, a tubular hanger portion is formed at other end of the support frame to hang a tubular portion. A fire hose is provided between the cylindrical rotary body and the tubular hanger portion. The fire hose hanger is mounted on a cylindrical rotary body. However, the '876 reference relies on auxiliary components such as springs, and a separation prevention ring for assembly of the coupling with the fire hose hanger and the fire hose.

[0005] US2569857 patent reference discloses a body and a hose rack assembly. The body includes a fluid discharge portion and two correspondingly shaped flanges. These flanges are arranged substantially in the same plane, and each is apertured to receive a bolt member. Each bolt member extends into a wall. The hose rack is attached to the body via these two correspondingly shaped flanges. The rack is preferably formed by bending a single elongated rod intermediate its ends to form a cradle for receiving and supporting a coiled hose. Fur-

ther, US2111811 reference discloses a fire hose rack. The hose rack includes a standpipe outlet valve assembled with the wall. The standpipe outlet valve controls the flow of water from a standpipe through a union or a nipple. The nipple passes through a hole provided in the frame also supports a U-shaped frame and a hose which is in position as it will be held by spring when in place. The hose rack is adapted to swing in a horizontal plane about the nipple. The hose is secured to the nipple by means of a coupling. A nut is threaded to one end of the nipple and serves to support the frame. The frame is provided with a pin extending from one arm of the frame to the other which serves to lock the spring in the frame.

[0006] An example of a hose holder is provided in WO Patent Application 2017/148,522 (hereinafter referred to as '522 reference). The '522 reference discloses the hose holder for storing a hose at a water tap. The hose holder includes a connection portion for connecting a holding device with the water tap and a holding portion for receiving the hose. The connection portion includes a tap connection portion for mechanically and fluidly coupling the hose holder with the water tap. The holding portion includes a hose receiving area for supporting the coiled hose in a hanging position such that the windings of the coiled hose are arranged in a vertical plane. However, in this type of the hose holder a weight of the hose is directly supported by the tap connection portion, which may lead to unintended disassembly or accidents. Moreover, hoses having a longer length are generally heavier which may damage the tap connection portion leading to leakage or complete break-off.

SUMMARY

[0007] In view of the above, it is an objective of the present invention to solve or at least reduce the drawbacks discussed above. The objective is at least partially achieved by a new design of a hose storage unit for storing a hose at a tap. The hose storage includes a storage hook to receive the hose. The hose storage also includes a tap connector to fluidly connect the hose and the tap. The hose storage unit is characterized in that an adaptor is removably coupled with the tap and engaged with the tap connector. The adaptor fluidly couples the tap with the tap connector. Further, the storage hook is associated with the adaptor.

[0008] The present invention provides an improved design of the hose storage unit in accordance with claim 1 which allows quick and easy installation of the hose at the tap. The new design of the hose storage unit can be installed in a compact space and is readily compatible. Further, the hose storage unit does not require an external structure such as a wall for mounting the hose storage units or components thereof. The hose storage unit includes fewer parts thus making the assembly simple and cost effective. Further, the storage hook is directly connected to the adaptor which acts as a screw element. Therefore, a liquid can be fed directly into the hose

through the adaptor, and the tap connector. A circular arrangement of the hose storage unit allows the storage hook to rotate around a central axis of the adaptor which makes the hose storage unit user friendly and provides improved ergonomics. Further, the tap connector includes a sealing element that provides tightness of the hose storage unit with an existing tap. Moreover, the hose is stored on the storage hook which is associated (or coupled) to the adaptor hence a weight of the hose is supported by the adaptor which prevents damage and breakdown at the hose connection.

[0009] According to an embodiment of the present invention, the storage hook is associated with the adaptor by coupling the storage hook around the adaptor. This may allow implementation benefits along with ease of assembly or disassembly of the storage hook with the adaptor.

[0010] According to an embodiment of the present invention, the storage hook is associated with the adaptor by fixing the storage hook with the adaptor.

[0011] According to an embodiment of the present invention, the coupling between the adaptor and the tap connector is a thread coupling. The coupling may be any type of coupling such as the thread coupling which provides ease in assembly and rigidity to a connection between the adaptor and the tap connector.

[0012] According to an embodiment of the present invention, the adaptor is threadably coupled with the tap. The thread coupling provides ease in assembly and rigidity to a connection between the adaptor and the tap, though the coupling may be any coupling such as snap-fit, press-fit or any other as used or known in the art.

[0013] According to an embodiment of the present invention, the storage hook is removably coupled around the adaptor and the tap connector. Such a removable coupling provides flexibility to use the hose storage unit for different taps thereby providing a versatile and modular hose storage unit. Further, the hose storage unit may be quickly dissembled when not in use.

[0014] The storage hook includes a hose receiving portion to receive the hose. The hose receiving portion allows the user to store (say winding or looping) the hose on the storage hook.

[0015] According to an embodiment of the present invention, the hose receiving portion of the storage hook is substantially horizontal. The substantially horizontal hose receiving portion provides a larger and stable area for holding of the hose in a horizontal configuration.

[0016] The hose receiving portion of the storage hook is inclined with respect to the central axis of the adaptor. Such an inclined hose receiving portion allows the hose to be stored in an inclined configuration which provides easy and secure storage of the hose.

[0017] According to an embodiment of the present invention, the storage hook has a "U" shape. The storage hook may have any shape (say "V", "L" and like shapes), size, type as per application requirements. This arrangement (i.e., the "U" shape of the present disclosure) of the

storage hook may provide easy, stable, and secure storage of the hose.

[0018] The storage hook includes a hole to receive the adaptor. This arrangement provides easy assembly of the storage hook around the adaptor and thereby with the tap.

[0019] Other features and aspects of this disclosure will be apparent from the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The disclosure will be described in more detail with reference to the enclosed drawings, wherein:

FIG. 1 illustrates a side view of a hose storage unit, according to an embodiment of the present disclosure;

FIG. 2 illustrates an exploded view of the hose storage unit, according to an embodiment of the present disclosure;

FIG. 3 illustrates a top view of the hose storage unit, according to an embodiment of the present disclosure;

FIG. 4A illustrates a perspective view of the hose storage unit and a tap in a first position, according to an embodiment of the present disclosure;

FIG. 4B illustrates a perspective view of the hose storage unit and the tap in a second position, according to an embodiment of the present disclosure;

FIG. 4C illustrates a perspective view of the hose storage unit and the tap in a third position, according to an embodiment of the present disclosure;

FIG. 4D illustrates a perspective view of the hose storage unit and the tap in a fourth position, according to an embodiment of the present disclosure; and

FIG. 5 illustrates a perspective view of the hose storage unit and a hose, according to an embodiment of the present disclosure.

DESCRIPTION OF EMBODIMENTS

[0021] The present disclosure will be described more fully hereinafter with reference to the accompanying drawings, in which example embodiments of the invention incorporating one or more aspects of the present disclosure are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention as claimed to those skilled in the art. In the drawings, like numbers refer to like elements.

[0022] Certain terminology is used herein for convenience only and is not to be taken as a limitation on the disclosure. For example, "upper", "lower", "front", "rear", "side", "longitudinal", "lateral", "transverse", "upwards",

"downwards", "forward", "backward", "sideward", "left," "right," "horizontal," "vertical," "upward", "inner", "outer", "inward", "outward", "top", "bottom", "higher", "above", "below", "central", "middle", "intermediate", "between", "end", "adjacent", "proximate", "near", "distal", "remote", "radial", "circumferential", or the like, merely describe the configuration shown in the Figures. Indeed, the components may be oriented in any direction and the terminology, therefore, should be understood as encompassing such variations unless specified otherwise.

[0023] FIG. 1 illustrates a hose storage unit 100 for storing a hose 102 (as shown in FIG. 5) at a tap 104 (as shown in FIG. 5). The hose storage unit 100 may be used to store hoses 102 having different lengths and types. The length and the type of the hose 102 may vary depending upon application requirements. The hose 102 may be used for a number of indoor and outdoor applications. Further, the tap 104 may supply any type of liquid, without limiting the scope of the present invention. In the illustrated embodiment, the tap 104 supplies water. In application, water from the tap 104 may flow through the hose 102. The tap 104 may include any type of tap such as a wall mounted tap, a pillar tap, a mixer tap, and the like.

[0024] The hose storage unit 100 includes a storage hook 106 to receive the hose 102. The storage hook 106 has a substantially C-shaped, or U-shaped structure. The storage hook 106 includes a first end 108, a second end 110, and a vertical portion 112. The vertical portion 112 extends between the first and second ends 108, 110. The storage hook 106 also includes a first surface 114 and a second surface 116. The first surface 114 and second surface 116 include a generally curved shaped profile. The first end 108 defines a first thickness "T1". The storage hook 106 defines a through hole 118 (as shown in FIG. 3) proximate the first end 108 to receive a screw lock 120 (as shown in FIG. 3). In some embodiments, the screw lock 120 may allow selective locking i.e., rotational locking of the storage hook 106. The screw lock 120 may allow selective locking of the storage hook 106 at any angular position or orientation with respect to a central axis "A1" of an adaptor 130. In some embodiments, the screw lock 120 may be movable within the through hole 118 to allow locking of the storage hook 106 with one or more of the adaptor 130, and the tap 104.

[0025] The second end 110 defines a second thickness "T2". Further, in some embodiments, the second thickness "T2" is greater than the first thickness "T1". Alternatively, the second thickness "T2" may be equal to the first thickness "T1". The storage hook 106 may be manufactured using a material such as a synthetic plastic, a metal alloy, and the like. It should be noted that the material of the storage hook 106 does not limit the scope of the present invention.

[0026] The storage hook 106 further includes a hose receiving portion 122 to receive the hose 102. The hose receiving portion 122 is disposed proximate the second end 110 of the storage hook 106. The hose receiving

portion 122 may include a rough surface (or elements or features such as knurling) to promote gripping and/or inadvertent movement of the stored hose 102. Further, the hose receiving portion 122 receives the hose 102 in a coiled or wound form. The hose 102 may be folded into a number of coils to store the coiled hose 102 on the hose receiving portion 122. In the illustrated embodiment, the hose receiving portion 122 of the storage hook 106 is inclined with respect to the central axis "A1" of an adaptor 130 (as shown in FIG. 2). Further, the inclination of the hose receiving portion 122 with respect to the central axis "A1" may vary between 0 degree to 90 degrees. In some embodiments, the inclination of the hose receiving portion 122 with respect to the central axis "A1" may lie between 35 degrees and 70 degrees. In some embodiments, the hose receiving portion 122 of the storage hook 106 is substantially horizontal. In such an example, the hose receiving portion 122 may be substantially perpendicular to the vertical portion 112. In yet other embodiments, the storage hook 106 has a "U" shape. In such an example, the second end 110 may be disposed substantially parallel to the vertical portion 112.

[0027] Referring to FIG. 2, the storage hook 106 includes a hole 132 to receive the adaptor 130. The hole 132 may be embodied as a through-hole. The hole 132 may define an internal threading (not shown). The hole 132 may include a counterbore hole, a countersink hole, and the like. The hole 132 is disposed proximate the first end 108 of the storage hook 106. The hole 132 defines a hole diameter "D1". A shape and a size of the hole 132 is designed based on the shape and size of the adaptor 130.

[0028] The hose storage unit 100 also includes a tap connector 134 to fluidly connect the hose 102 (see FIG. 5) and the tap 104 (see FIG. 5). The tap connector 134 includes a first coupling portion 138 to couple the tap connector 134 with the adaptor 130 and a second coupling portion 140 forming a liquid outlet. The second coupling portion 140 receives a hose connector 142 (as shown in FIG. 5). Further, a washer 136 may be provided within the first coupling portion 138 to provide a liquid-tight connection between the tap connector 134 and the adaptor 130.

[0029] The hose storage unit 100 further includes the adaptor 130. The adaptor 130 fluidly couples the tap 104 with the tap connector 134. The adaptor 130 is removably coupled with the tap 104 and engaged with the tap connector 134. In particular, the adaptor 130 is threadably coupled with the tap 104. The adaptor 130 receives an outlet portion 144 (as shown in FIGS. 4A and 4B) of the tap 104. Furthermore, the coupling between the adaptor 130 and the tap connector 134 is a thread coupling, or any other coupling such as a press-fit, a snap-fit and like coupling as used or known in the art.

[0030] The adaptor 130 includes a first portion 146 defining a diameter "D2" and a thickness "T3". The first portion 146 may define a blind hole to receive the screw lock 120 (see FIG. 3). The first portion 146 may also

define a number of internal threads (not shown). The adaptor **130** also includes a second portion **148** defining a diameter "D3" and a thickness "T4". Further, the diameter "D2" of the first portion **146** is greater than the diameter "D3" of the second portion **148**. Moreover, the second portion **148** defines a number of external threads **152**. In the illustrated embodiment, the tap connector **134** receives the second portion **148** of the adaptor **130**. The adaptor **130** further includes a sealing element **154** disposed between the first portion **146** thereof and the outlet portion **144** of the tap **104** for a leak-proof coupling between the adaptor **130** and the tap **104**. The sealing element **154** may include one or more washers, seals and the like and provides water as well as connection tightness at a connection between the adapter **130** and the tap **104**.

[0031] As shown in **FIGS. 1** and **3**, the storage hook **106** may be secured to the adaptor **130** using the screw lock **120**. Further, the storage hook **106** is associated with (say coupled around) the adaptor **130**. In the illustrated embodiment, the storage hook **106** is removably coupled around the adaptor **130** and the tap connector **134**. More particularly, the storage hook **106** is coupled around the adaptor **130** proximate the first end **108** of the storage hook **106**. The adaptor **130** is received by the hole **132** of the storage hook **106** since the diameter "D2" of the first portion **146** of the adaptor **130** is approximately equal to the hole diameter "D1" of the hole **132**. The hole **132** may partially receive the adaptor **130** since the thickness "T3" of the first portion **146** of the adaptor **130** is greater than the thickness "T1" of the first end **108** of the storage hook **106**. Further, the counterbore or countersink profile of the hole **132** may receive the second portion **148** of the adaptor **130**. A combined thickness "T2", "T3" of the adapter **130** is greater than the first thickness "T1" of the first end **108** of the storage hook **106**. Further, a portion of the adapter **130** at the first portion **146** extends out partially in an upward direction from the storage hook **106** to couple with the outlet portion **144** of the tap **104** and a portion of the adapter **130** at the second portion **148** extends out partially in a downward direction from the storage hook **106** to receive the tap connector **134** (see **FIG. 5**). Furthermore, the thickness "T4" of the second portion **148** of the adaptor **130** is greater than the thickness "T1" of the first end **108** of the storage hook **106**.

[0032] In some embodiments, the storage hook **106** may be coupled around the adaptor **130**. This may allow implementation benefits along with ease of assembly or disassembly of the storage hook **106** with the adaptor **130**. In some embodiments, the storage hook **106** may be fixed with the adaptor **130**. The fixing of the storage hook **106** with the adaptor **130** may allow selective locking or rotation of the storage hook **106** with respect to the adaptor **130**. The present disclosure allows any association, arrangement, coupling, fixing, and the like between the storage hook **106** and the adaptor **130**, within the scope of the present invention as claimed.

[0033] **FIGS. 4A, 4B, 4C, and 4D** show the assembly of the hose storage unit **100** with the tap **104** (see **FIG. 5**). Referring to **FIG. 4A**, in a first position, the adaptor **130**, the storage hook **106**, the tap connector **134**, and the tap **104** are shown in an unassembled configuration. Referring to **FIG. 4B**, in a second position, the adaptor **130** is threadably coupled to the outlet portion **144** of the tap **104**. The outlet portion **144** of the tap **104** may define external threads (not shown) for threadable coupling of the adaptor **130**. Referring to **FIG. 4C**, in a third position, the storage hook **106** is coupled around the adaptor **130**. This removable coupling of the storage hook **106** allows the storage hook **106** to be rotated at 360 degrees about the central axis "A1" of the adaptor **130**. Referring to **FIG. 4D**, in a fourth position, the tap connector **134** is threadably coupled to the second portion **148** of the adaptor **130** to fluidly connect the tap connector **134** (and thereby the hose **102**, see **FIG. 5**) and the tap **104**. As shown in **FIG. 5**, the hose connector **142** is coupled to the second coupling portion **140** of the tap connector **134**. The hose connector **142** may include a body portion (not shown) having an arrangement such as threads that allow engagement of the hose **102** with the hose connector **142**.

[0034] The present invention provides an improved and simplified design of the hose storage unit **100** which allows easy installation. The new design of the hose storage unit **100** can be accommodated in compact spaces. Further, the hose storage unit **100** does not require an external structure such as a wall for mounting the hose storage unit **100** or components thereof and can be directly stored proximate the tap **104**. The hose storage unit **100** includes fewer parts thus making the assembly simple in design and cost effective. Further, the storage hook **106** is directly connected to the adaptor **130** as a screw element. Therefore, a liquid can be fed directly into the hose **102** through the adaptor **130**.

[0035] Moreover, the storage hook **106** can be rotated relative to the tap **104** around the central axis "A1" of the adaptor **130**, thereby allowing storage of the hose **102** at various positions relative to the tap **104**. Such a design makes the hose storage unit **100** user friendly and improves ergonomics. Additionally, the hose **102** can be quickly assembled and disassembled from the tap **104** using the hose storage unit **100** described herein. Further, the adaptor **130** includes the sealing element **154** that provides tightness between the hose storage unit **100** and the tap **104**. Moreover, the hose **102** is stored on the storage hook **106** which is coupled to the adaptor **130** hence the weight of the hose **102** is supported by the adaptor **130** thereby preventing damage and breakdown at the hose connection.

[0036] In the drawings and specification, there have been disclosed preferred embodiments and examples of the disclosure and, although specific terms are employed, they are used in a generic and descriptive sense only and not for the purpose of limitation of the scope of the invention being set forth in the following claims.

LIST OF ELEMENTS

[0037]

100	Hose Storage Unit	5
102	Hose	
104	Tap	
106	Storage Hook	
108	First End	
110	Second End	10
112	Vertical Portion	
114	First Surface	
116	Second Surface	
118	Through Hole	
120	Screw Lock	15
122	Hose Receiving Portion	
130	Adaptor	
132	Hole	
134	Tap Connector	
136	Washer	20
138	First Coupling Portion	
140	Second Coupling Portion	
142	Hose Connector	
144	Outlet Portion	
146	First Portion	25
148	Second Portion	
152	External Threads	
154	Sealing Element	
A1	Central Axis	
D1	Hole Diameter	30
D2	Diameter of First Portion	
D3	Diameter of Second Portion	
T1	Thickness of First End	
T2	Thickness of Second End	
T3	Thickness of First Portion	35
T4	Thickness of Second Portion	

Claims

1. A hose storage unit (100) for storing a hose (102) at a tap (104), comprising:

a storage hook (106) adapted to receive the hose (102);
a tap connector (134) adapted to fluidly connect the hose (102) and the tap (104); and
an adaptor (130) removably coupled with the tap (104) and engaged with the tap connector (134), wherein the adaptor (130) fluidly couples the tap (104) with the tap connector (134), and wherein the storage hook (106) is associated with the adaptor (130);
wherein a portion of the adapter (130) at a first portion (146) extends out partially in an upward direction from the storage hook (106) to couple with an outlet portion (144) of the tap (104) and a portion of the adapter (130) at a second portion

(148) extends out partially in a downward direction from the storage hook (106) to receive the tap connector (134); and
wherein the storage hook (106) includes a first end (108) and a second end (110), and a hose receiving portion (122) proximate to the second end (110); wherein the hose receiving portion (122) of the storage hook (106) is inclined with respect to a central axis ("A1") of the adaptor (130);
wherein the storage hook (106) further includes a hole (132) to receive the adaptor (130), wherein the hole (132) is disposed proximate the first end (108) of the storage hook (106),
characterized in that:
a vertical portion (112) extends between the first and the second end (108, 110),
wherein the storage hook (106) comprises a through hole (118) proximate to the first end (108), wherein the through hole (118) is configured to receive a screw lock (120) allowing selective locking of the storage hook (106),
wherein the storage hook (106) further comprises a first surface (114) and a second surface (116), wherein the first surface (114) and the second surface (116) include a generally curved shaped profile.

2. The hose storage unit (100) of claim 1, wherein the storage hook (106) is associated with the adaptor (130) by coupling the storage hook (106) around the adaptor (130).
3. The hose storage unit (100) of claim 2, wherein the storage hook (106) is removably coupled around the adaptor (130) and the tap connector (134).
4. The hose storage unit (100) of claim 1, wherein the storage hook (106) is associated with the adaptor (130) by fixing the storage hook (106) with the adaptor (130).
5. The hose storage unit (100) of any of the preceding claims, wherein the coupling between the adaptor (130) and the tap connector (134) is a thread coupling.
6. The hose storage unit (100) of any of the preceding claims, wherein the adaptor (130) is threadably coupled with the tap (104).
7. The hose storage unit (100) of any one of the preceding claims, wherein the hose receiving portion (122) of the storage hook (106) is substantially horizontal.

8. The hose storage unit (100) of any of the preceding claims,
wherein the storage hook (106) has a "U" shape.

Patentansprüche

1. Schlauchaufbewahrungseinheit (100) zum Aufbewahren eines Schlauchs (102) an einem Hahn (104), umfassend:

einen Aufbewahrungshaken (106), der angepasst ist, um den Schlauch (102) aufzunehmen; einen Hahnverbinder (134), der angepasst ist, um den Schlauch (102) und den Hahn (104) fluidisch zu verbinden; und einen Adapter (130), der mit dem Hahn (104) abnehmbar gekoppelt ist und mit dem Hahnverbinder (134) in Eingriff steht, wobei der Adapter (130) den Hahn (104) mit dem Hahnverbinder (134) fluidisch koppelt und wobei der Aufbewahrungshaken (106) mit dem Adapter (130) verknüpft ist; wobei sich ein Abschnitt des Adapters (130) an einem ersten Abschnitt (146) in einer Aufwärtsrichtung von dem Aufbewahrungshaken (106) teilweise heraus erstreckt, um mit einem Auslassabschnitt (144) des Hahns (104) zu koppeln, und sich ein Abschnitt des Adapters (130) an einem zweiten Abschnitt (148) in einer Abwärtsrichtung von dem Aufbewahrungshaken (106) teilweise heraus erstreckt, um den Hahnverbinder (134) aufzunehmen; und wobei der Aufbewahrungshaken (106) ein erstes Ende (108) und ein zweites Ende (110) und einen Schlauchaufnahmeabschnitt (122) nahe des zweiten Endes (110) einschließt; wobei der Schlauchaufnahmeabschnitt (122) des Aufbewahrungshakens (106) hinsichtlich einer Mittelachse ("A1") des Adapters (130) geneigt ist; wobei der Aufbewahrungshaken (106) ferner ein Loch (132) einschließt, um den Adapter (130) aufzunehmen, wobei das Loch (132) nahe des ersten Endes (108) des Aufbewahrungshakens (106) angeordnet ist, **dadurch gekennzeichnet, dass:**

sich ein vertikaler Abschnitt (112) zwischen dem ersten und dem zweiten Ende (108, 110) erstreckt, wobei der Aufbewahrungshaken (106) ein Durchgangsloch (118) nahe des ersten Endes (108) umfasst, wobei das Durchgangsloch (118) konfiguriert ist, um eine Schraubensicherung (120), die ein selektives Sichern des Aufbewahrungshakens (106) ermöglicht, aufzunehmen, wobei der Aufbewahrungshaken (106) fer-

ner eine erste Oberfläche (114) und eine zweite Oberfläche (116) umfasst, wobei die erste Oberfläche (114) und die zweite Oberfläche (116) ein im Allgemeinen kurvenförmiges Profil einschließen.

5

10

15

20

25

30

35

40

45

50

55

2. Schlauchaufbewahrungseinheit (100) nach Anspruch 1, wobei der Aufbewahrungshaken (106) mit dem Adapter (130) durch Koppeln des Aufbewahrungshakens (106) um den Adapter (130) herum verknüpft ist.
3. Schlauchaufbewahrungseinheit (100) nach Anspruch 2, wobei der Aufbewahrungshaken (106) um den Adapter (130) und den Hahnverbinder (134) herum abnehmbar gekoppelt ist.
4. Schlauchaufbewahrungseinheit (100) nach Anspruch 1, wobei der Aufbewahrungshaken (106) mit dem Adapter (130) durch Befestigen des Aufbewahrungshakens (106) mit dem Adapter (130) verknüpft ist.
5. Schlauchaufbewahrungseinheit (100) nach einem der vorstehenden Ansprüche, wobei die Kupplung zwischen dem Adapter (130) und dem Hahnverbinder (134) eine Gewindekupplung ist.
6. Schlauchaufbewahrungseinheit (100) nach einem der vorstehenden Ansprüche, wobei der Adapter (130) mit dem Hahn (104) gewindegekoppelt ist.
7. Schlauchaufbewahrungseinheit (100) nach einem der vorstehenden Ansprüche, wobei der Schlauchaufnahmeabschnitt (122) des Aufbewahrungshakens (106) im Wesentlichen horizontal ist.
8. Schlauchaufbewahrungseinheit (100) nach einem der vorstehenden Ansprüche, wobei der Aufbewahrungshaken (106) eine "U"-Form aufweist.

Revendications

1. Unité de stockage de tuyau (100) destinée à stocker un tuyau (102) au niveau d'un robinet (104), comprenant :
- un crochet de stockage (106) adapté pour recevoir le tuyau (102) ;
- un raccord de robinet (134) adapté pour raccorder fluidiquement le tuyau (102) et le robinet

(104) ; et

un adaptateur (130) accouplé de manière amovible au robinet (104) et en prise avec le raccord de robinet (134),

dans laquelle l'adaptateur (130) accouple fluidiquement le robinet (104) avec le raccord de robinet (134), et

dans laquelle le crochet de stockage (106) est associé à l'adaptateur (130) ;

dans laquelle une partie de l'adaptateur (130) au niveau d'une première partie (146) s'étend partiellement dans une direction vers le haut depuis le crochet de stockage (106) pour s'accoupler avec une partie de sortie (144) du robinet (104) et une partie de l'adaptateur (130) au niveau d'une seconde partie (148) s'étend partiellement dans une direction vers le bas depuis le crochet de stockage (106) pour recevoir le raccord de robinet (134) ; et

dans laquelle le crochet de stockage (106) comporte une première extrémité (108) et une seconde extrémité (110), et une partie de réception de tuyau (122) à proximité de la seconde extrémité (110) ; dans laquelle la partie de réception de tuyau (122) du crochet de stockage (106) est inclinée par rapport à un axe central (« A1 ») de l'adaptateur (130) ;

dans laquelle le crochet de stockage (106) comporte en outre un trou (132) pour recevoir l'adaptateur (130), dans laquelle le trou (132) est disposé à proximité de la première extrémité (108) du crochet de stockage (106),

caractérisée en ce que :

une partie verticale (112) s'étend entre la première et la seconde extrémité (108, 110),

dans laquelle le crochet de stockage (106) comprend un trou traversant (118) à proximité de la première extrémité (108), dans laquelle le trou traversant (118) est conçu pour recevoir un verrou à vis (120) permettant le verrouillage sélectif du crochet de stockage (106),

dans laquelle le crochet de stockage (106) comprend en outre une première surface (114) et une seconde surface (116), dans laquelle la première surface (114) et la seconde surface (116) comportent un profil généralement incurvé.

2. Unité de stockage de tuyau (100) selon la revendication 1,

dans laquelle le crochet de stockage (106) est associé à l'adaptateur (130) par accouplement du crochet de stockage (106) autour de l'adaptateur (130).

3. Unité de stockage de tuyau (100) selon la revendication 2,

dans laquelle le crochet de stockage (106) est accouplé de manière amovible autour de l'adaptateur (130) et du raccord de robinet (134).

4. Unité de stockage de tuyau (100) selon la revendication 1,

dans laquelle le crochet de stockage (106) est associé à l'adaptateur (130) en fixant le crochet de stockage (106) à l'adaptateur (130).

5. Unité de stockage de tuyau (100) selon l'une quelconque des revendications précédentes, dans laquelle l'accouplement entre l'adaptateur (130) et le raccord de robinet (134) est un accouplement fileté.

6. Unité de stockage de tuyau (100) selon l'une quelconque des revendications précédentes, dans laquelle l'adaptateur (130) est accouplé de manière fileté au robinet (104).

7. Unité de stockage de tuyau (100) selon l'une quelconque des revendications précédentes, dans laquelle la partie de réception de tuyau (122) du crochet de stockage (106) est sensiblement horizontale.

8. Unité de stockage de tuyau (100) selon l'une quelconque des revendications précédentes, dans laquelle le crochet de stockage (106) a une forme en « U ».

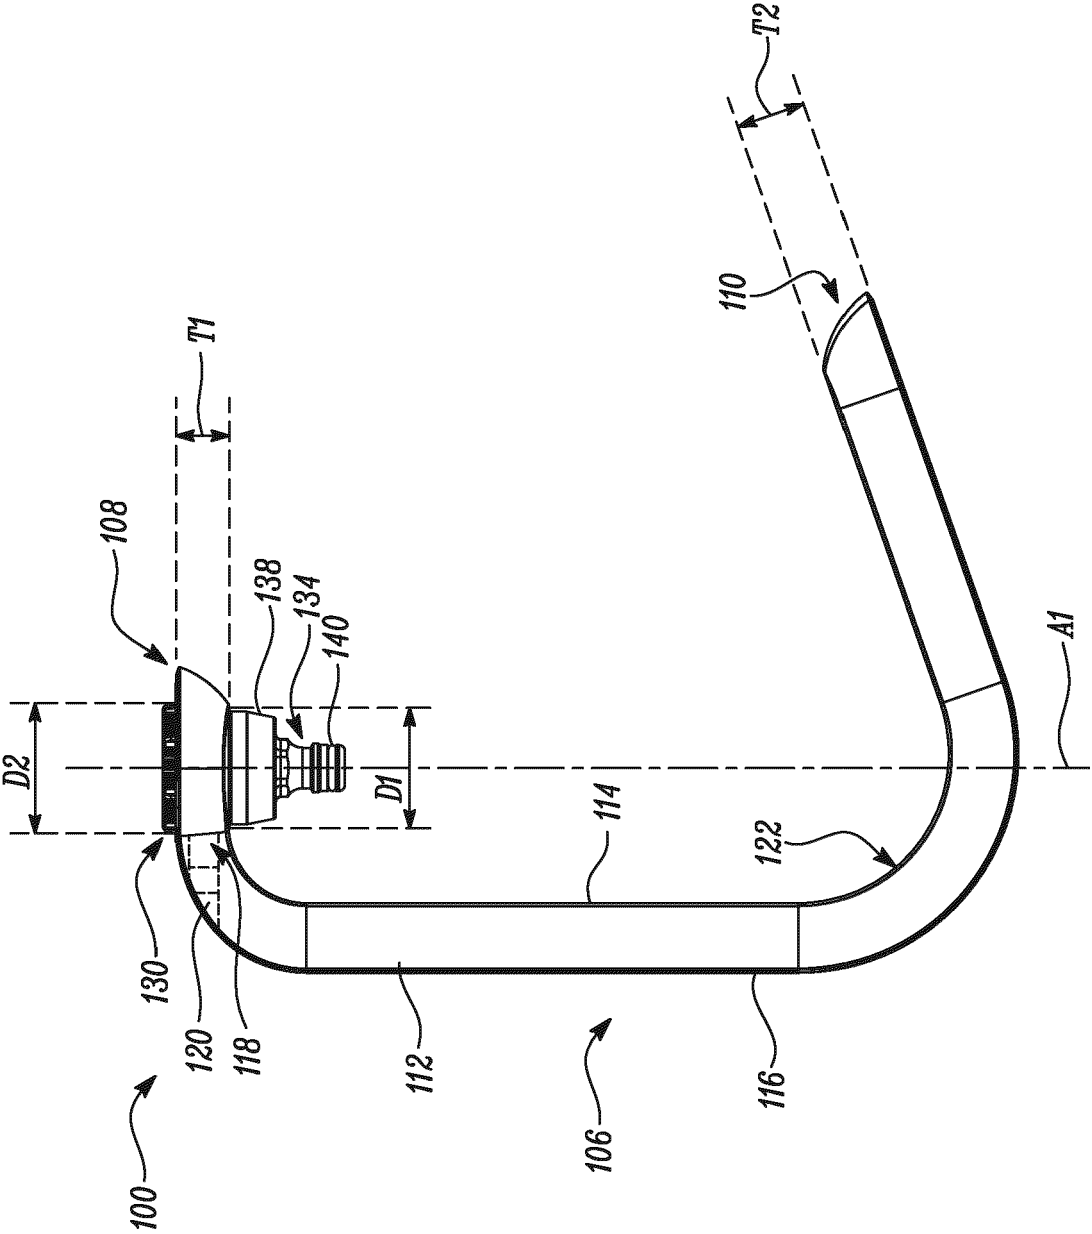


FIG. 1

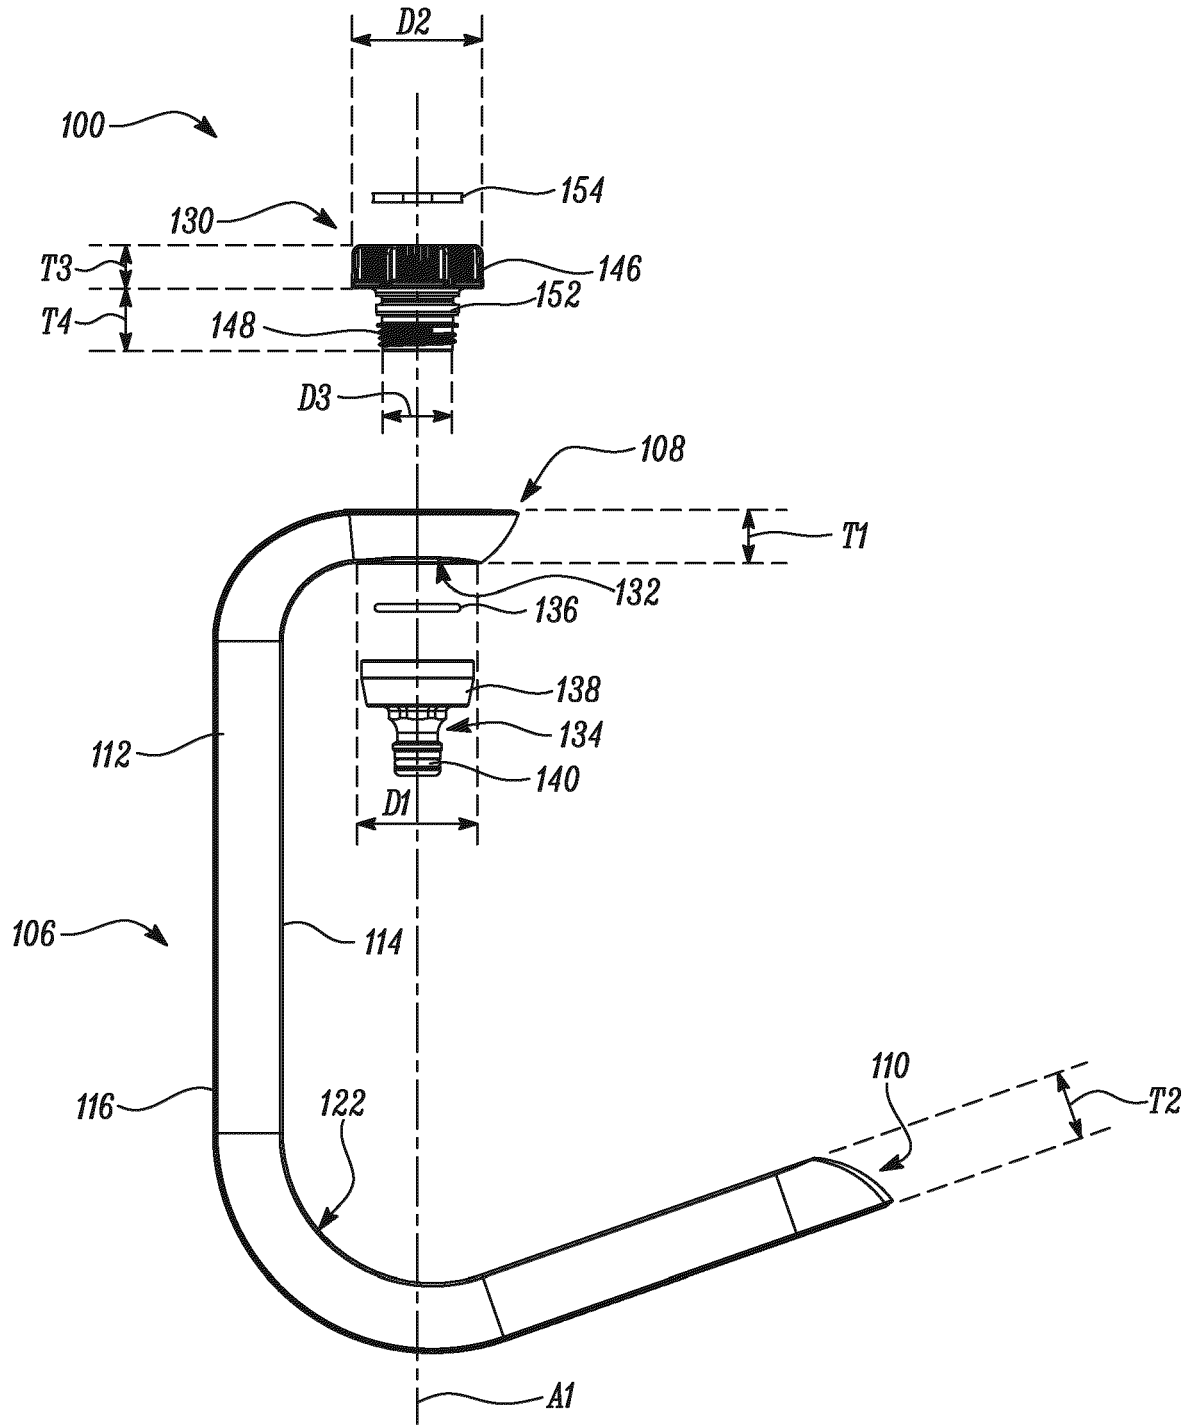


FIG. 2

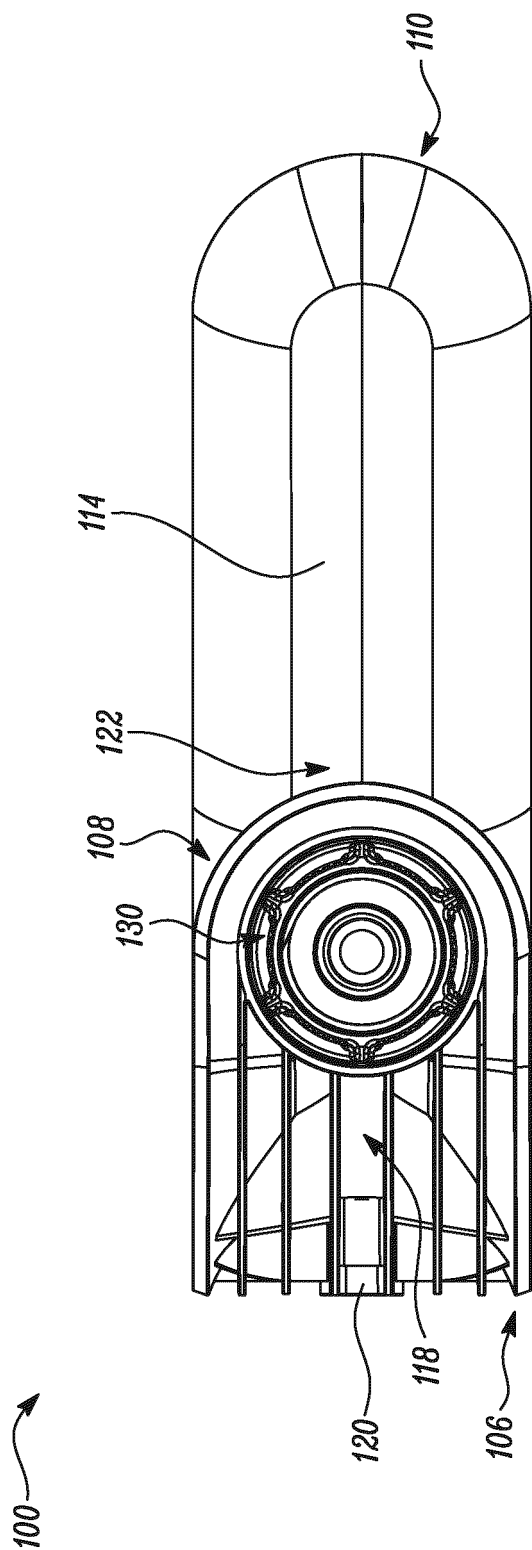


FIG. 3

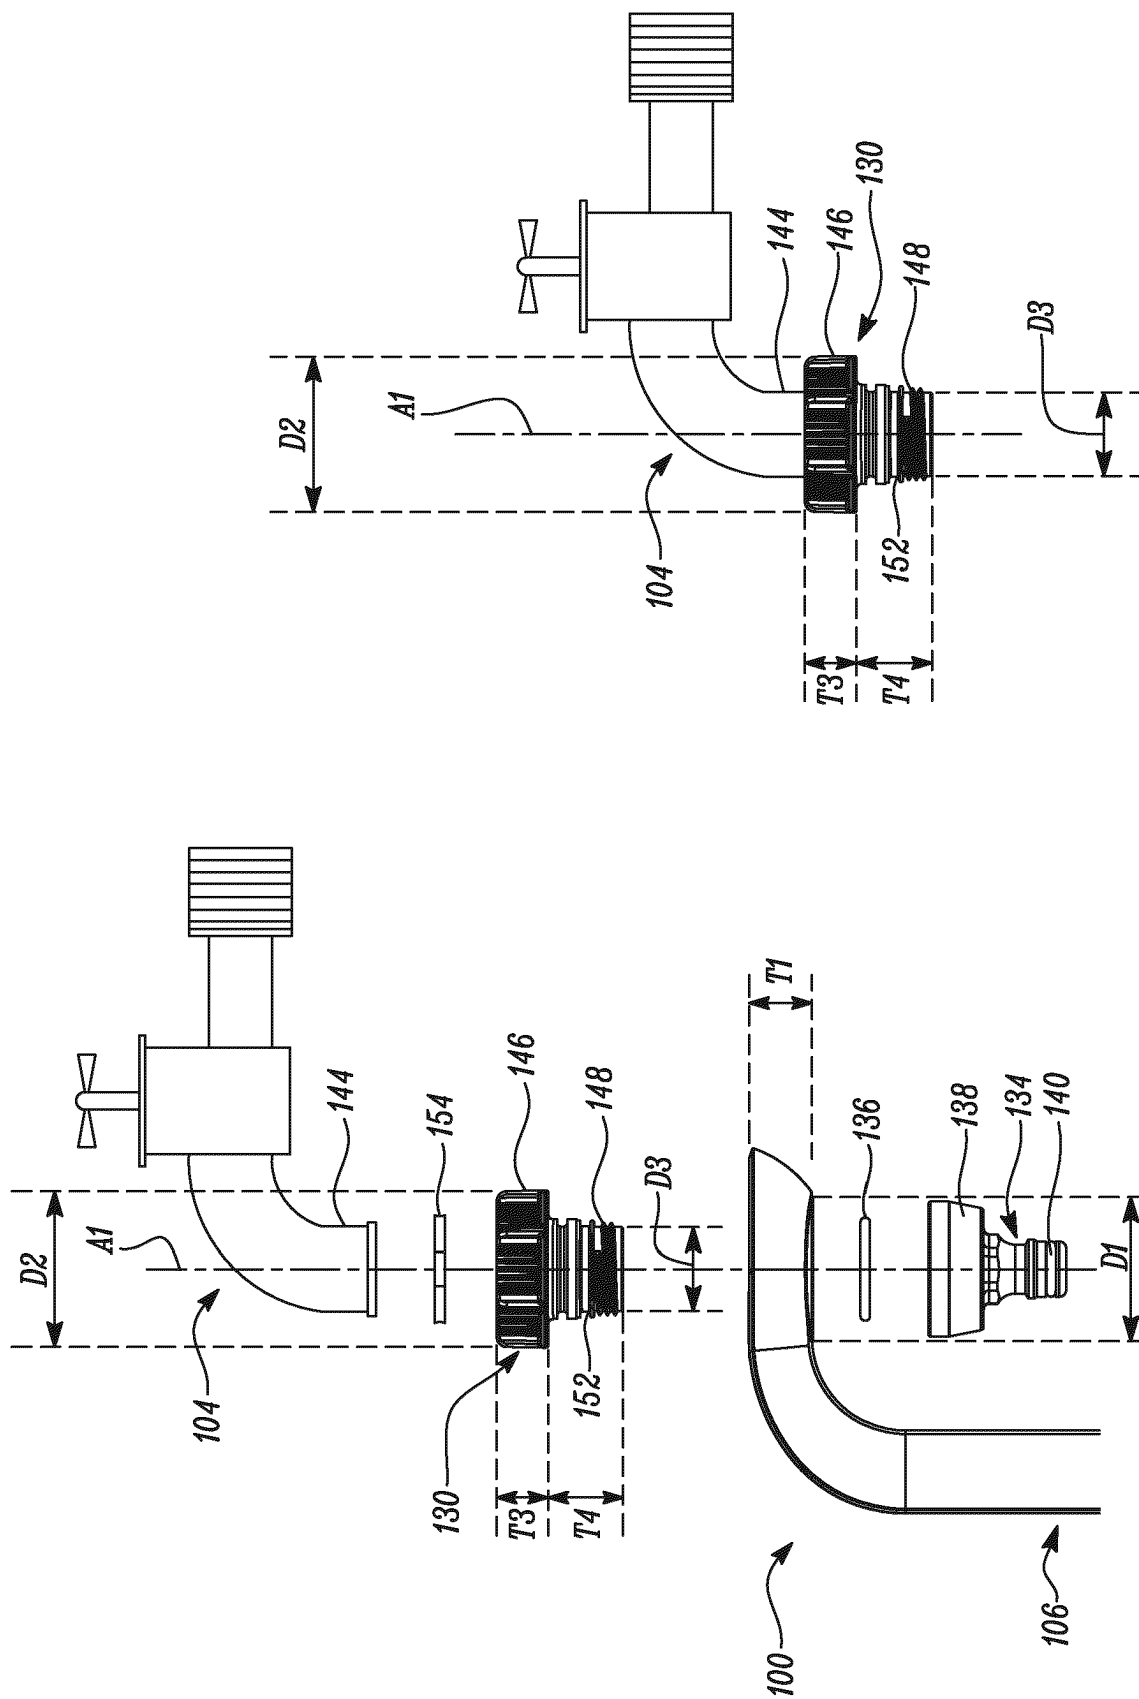


FIG. 4B

FIG. 4A

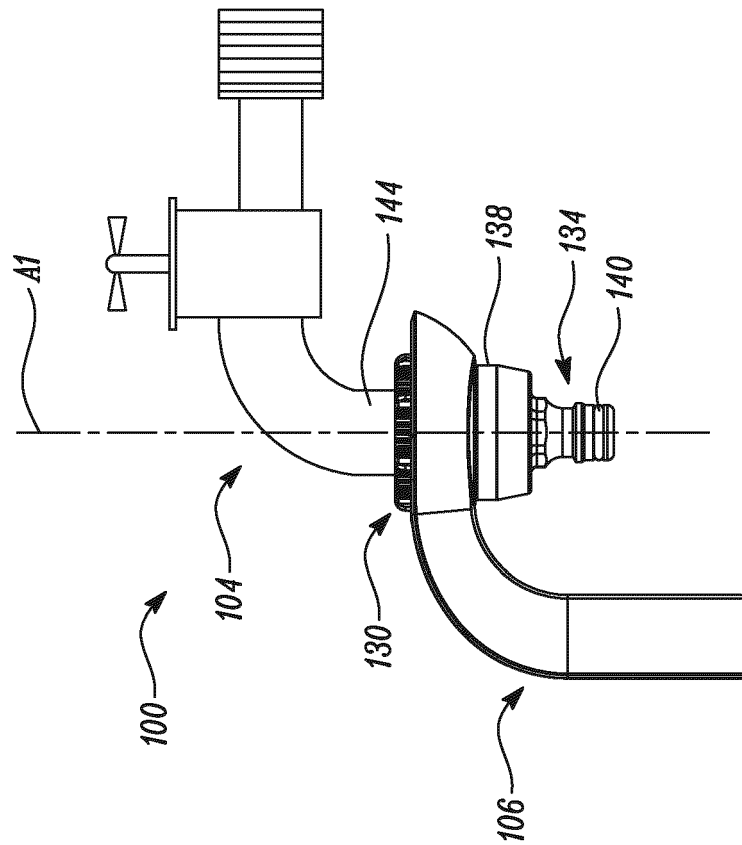


FIG. 4D

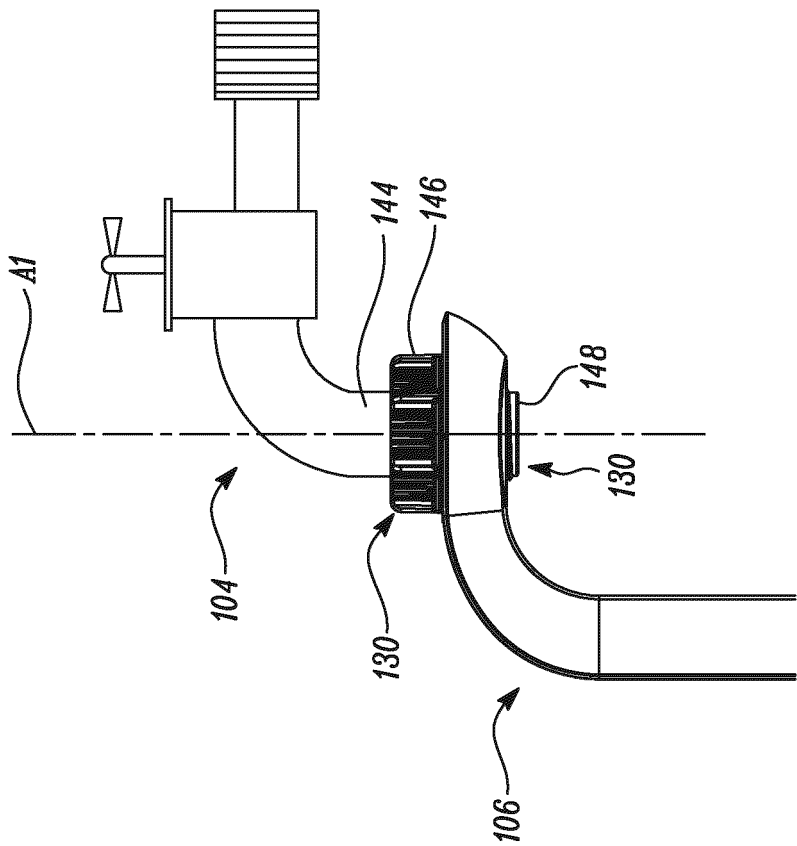


FIG. 4C

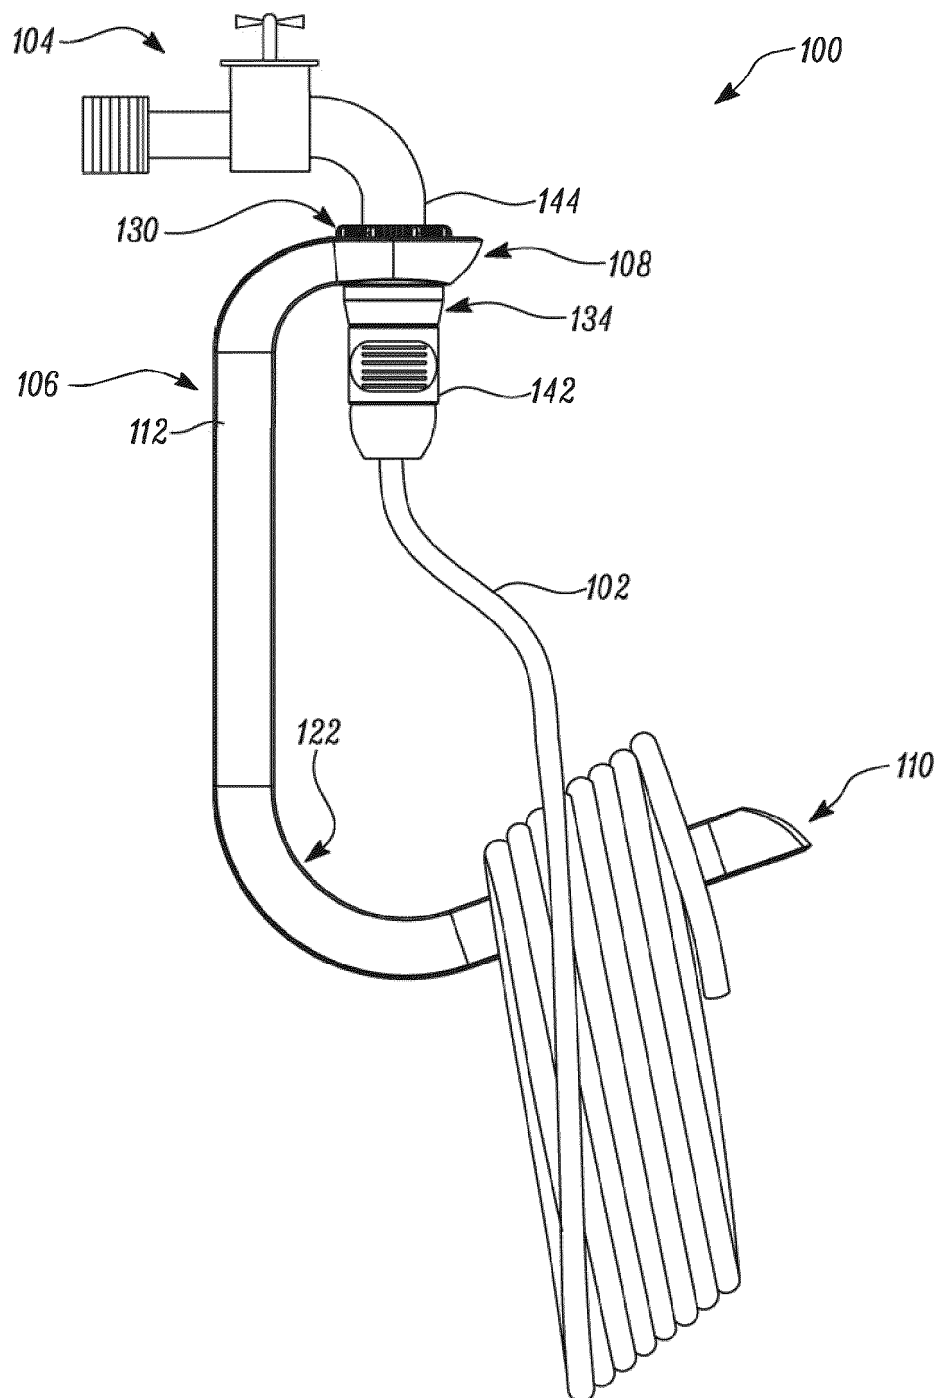


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 20110024876 [0004]
- US 2569857 A [0005]
- US 2111811 A [0005]
- WO 2017148522 A [0006]