



(72) BARNHOLTZ, STEVEN LEE, US

(71) THE PROCTER & GAMBLE COMPANY, US

(51) Int.Cl.⁶ D21H 23/22, D21H 23/58, D21H 23/56

(30) 1997/11/13 (08/970,036) US

(54) **PROCEDE ET DISPOSITIF DE TRAITEMENT D'UN
REVETEMENT DISCONTINU SUR UN SUBSTRAT**

(54) **METHOD AND APPARATUS FOR PROCESSING A
DISCONTINUOUS COATING ON A SUBSTRATE**

(57) La présente invention concerne un dispositif de fabrication d'une nappe continue, à revêtement sélectif. Ce dispositif comprend des moyens d'application d'un revêtement sur une nappe continue, dans plusieurs régions revêtues, ces régions étant espacées de plusieurs régions non revêtues et parallèles à celles-ci. L'invention concerne en outre des moyens de support de la nappe continue, après revêtement de celle-ci, ces moyens comprenant plusieurs éléments de support, chacun situé en face d'une région non revêtue. Dans un mode de réalisation préféré, le revêtement d'une émulsion bénéfique s'applique par extrusion, dans des régions choisies. L'invention concerne encore un procédé de formation d'une nappe continue revêtue, sans constitution de dépôt de matière de revêtement sur des rouleaux porteurs. Ce procédé comprend les étapes consistant: (a) à revêtir une nappe continue dans plusieurs régions revêtues, ces régions revêtues étant espacées de régions non revêtues et étant parallèles à celles-ci, (b) à installer des éléments de support, en les alignant de façon que chacun soit situé en face d'une région non revêtue, et (c) à guider la nappe continue revêtue de manière à la maintenir en contact avec les éléments de supports de façon que chacun de ceux-ci soit situé en face d'une région non revêtue de cette nappe.

(57) The present invention comprises an apparatus for making a selectively-coated web. The apparatus comprises a coating means for applying a coating to a web in a plurality of coated regions, the coated regions being in spaced, parallel relationship to a plurality of uncoated regions. The present invention further comprises support means for supporting the web after coating, the support means comprising a plurality of support members, each of the support members being in registry with an uncoated region. In a preferred embodiment the coating of a beneficial emulsion is applied in selected regions by extrusion. A method of forming a coated web without producing buildup of coating material on idler rollers is also disclosed. The method comprises the steps of: (a) coating a web in a plurality of coated regions, the coated regions being in parallel spaced apart relationship to uncoated regions; (b) providing support members, each of the support members being aligned in registry with an uncoated region; and (c) guiding the coated web in contact with the support members such that each support member is in registry with an uncoated region of said web.



6926

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D21H 23/22 // 23:56, 23:58	A1	(11) International Publication Number: WO 99/25923 (43) International Publication Date: 27 May 1999 (27.05.99)
(21) International Application Number: PCT/US98/23859 (22) International Filing Date: 9 November 1998 (09.11.98) (30) Priority Data: 08/970,036 13 November 1997 (13.11.97) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventor: BARNHOLTZ, Steven, Lee; 6493 Jayfield Drive, Hamilton, OH 45011 (US). (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: METHOD AND APPARATUS FOR PROCESSING A DISCONTINUOUS COATING ON A SUBSTRATE (57) Abstract The present invention comprises an apparatus for making a selectively-coated web. The apparatus comprises a coating means for applying a coating to a web in a plurality of coated regions, the coated regions being in spaced, parallel relationship to a plurality of uncoated regions. The present invention further comprises support means for supporting the web after coating, the support means comprising a plurality of support members, each of the support members being in registry with an uncoated region. In a preferred embodiment the coating of a beneficial emulsion is applied in selected regions by extrusion. A method of forming a coated web without producing buildup of coating material on idler rollers is also disclosed. The method comprises the steps of: (a) coating a web in a plurality of coated regions, the coated regions being in parallel spaced apart relationship to uncoated regions; (b) providing support members, each of the support members being aligned in registry with an uncoated region; and (c) guiding the coated web in contact with the support members such that each support member is in registry with an uncoated region of said web.		

METHOD AND APPARATUS FOR PROCESSING A DISCONTINUOUS COATING ON A SUBSTRATE

FIELD OF THE INVENTION

5 This invention relates to the processing of continuous sheets or webs of materials such as nonwoven substrates. In particular, this invention relates to processing of discontinuous coatings onto continuous webs, for example cellulosic fibrous paper.

BACKGROUND OF THE INVENTION

10 Nonwoven webs or sheets made of paper find extensive use in modern society. Paper webs are commonly processed as tissues, wipes, and other disposable absorbent articles. Paper towels, for example, are a staple item of commerce which have long been used to wipe up liquid spills and to remove stains and/or soil from hard surfaces such as window glass, countertops, sinks, porcelain and metal fixtures,
15 walls and the like, and from other surfaces such as carpeting or furniture.

 Nonwoven web substrates having lotions and other coatings are well known in the art. Lotions are often used in conjunction with substrates to soften the substrate. Lotions can also be used to soothe the skin when the substrate is used, for example, as a facial tissue. Examples of substrates having lotion and useful in the facial
20 tissue art are found in U.S. Patent 4,426,418, issued Jan. 17, 1984 to Coleman et al. and commonly assigned U.S. Patent 4,481,243, issued Nov. 6, 1984 to Allen, the disclosure of which Allen patent is incorporated herein by reference.

 Products, such as wipes, have been developed. Certain wipes have a significant advantage over earlier prior art cleaning products for removing soiling,
25 particularly from the perianal region. Such wipes comprise a substrate (e.g., a nonwoven or tissue) treated with a water-in-lipid emulsion. The water-in-lipid emulsion provides water in a solid external wax phase that avoids water loss until use. In use the wax phase is ruptured by pressure, releasing the internal water phase. Therefore, these wipes release significant quantities of water during use for
30 comfortable, more effective cleaning. Such wipes are particularly advantageous for cleaning, especially when provided in the form of wet-like cleansing wipes used to remove perianal soils. An example of such wipes and their manufacture is found in commonly assigned World Patent Application WO 96/14835, published May 23,

1996, in the names of Mackey et al., the disclosure of which is hereby incorporated
35 herein by reference.

The mechanism to transfer the water from the emulsion to the surface to be
cleaned involves several steps. First, the water is released or expressed from the
emulsion due to pressure imparted by the user. The pressure ruptures the emulsion's
external phase, freeing the internal water phase. The water then saturates the
40 substrate. Upon saturation, the water penetrates the substrate in the Z-direction.
Excess water, which is that water in excess of the local absorbent capacity of the
substrate, is then transferred from the wipe to the surface.

One potential approach to the problem of providing sufficient quantities of
water to saturate the substrate and transfer the water to the surface is to dispose a
45 continuous layer of emulsion on the substrate. A continuous layer of emulsion may
contain a greater quantity of water than a discontinuous layer of the emulsion. This
potential approach has several drawbacks. First, a thin continuous layer of emulsion
may not exceed the local capacity of the substrate. Second, excessive lipid phase in
the emulsion causes a build up and may not be well received by the user and
50 contribute to manufacturing difficulties. Third, if the amount of the emulsion
becomes too great, it can be difficult to rupture the emulsion and release the water
therefrom. Such difficulty occurs due to a greater quantity of the lipid phase being
present. As the amount of lipid phase increases, slippage of the emulsion relative to
itself occurs, rather than rupture of the emulsion. Fourth, the surface area to volume
55 ratio is far from optimal. Finally, the cost of the wipe increases directly with the
amount of emulsion provided.

In addition to the aforementioned drawbacks, it has unexpectedly been found
that a continuous coating of the emulsion on the substrate does not provide the most
efficacious cleaning, particularly when it is desired to clean human skin. Rather,
60 discontinuous pattern of emulsion on the substrate provides a more effective
cleaning mechanism. One such discontinuous pattern of the emulsion on the
substrate is disclosed in commonly assigned US Ser. No. 08//909,449 filed August
11, 1997, which is hereby incorporated herein by reference.

During cleaning, water is released from the emulsion to remove dirt from the
65 skin. The area of the skin wetted by the water and from which dirt is removed is
then wiped dry with the regions of the substrate free of the emulsion. Similar
benefits occur when the wipe is used to clean other surfaces, such as window glass,
countertops, sinks, porcelain and metal fixtures, walls and the like, and from other
surfaces, such as carpeting or furniture.

70 One drawback to coating nonwoven or cellulosic substrates with materials
such as emulsions is that the emulsion, once applied to the substrate, may be wiped,
or scraped off by the downstream web processing elements. For example, the
emulsion may collect on rollers, such as idler rollers, as the web is guided during
processing. Emulsion collected on idler rollers represents waste and the buildup on
75 rollers must eventually be cleaned off, resulting in undesirable equipment downtime
and production disruption.

In addition to producing waste and production inefficiencies, roller contact
disturbs the emulsion on the substrate. This is particularly undesirable if the
emulsion is required to remain a certain thickness on the surface of the substrate.
80 Likewise, if the emulsion is required to remain in a certain pattern on the substrate,
any rubbing or abrasion due to contact with a guide roller in the process should be
minimized. For example, if the coating also serves a decorative or aesthetic purpose,
smearing or removal of the coating is undesirable. Further, if a water-in-lipid
emulsion is applied to the web, rubbing or scraping during web processing will
85 likely cause rupturing of the solid wax phase, resulting in premature water release.

While these drawbacks are particularly undesirable in the context of
application of emulsion onto webs, they may be equally undesirable in the context of
coatings in general, including liquid inks and dyes, extruded polymers, liquid
adhesives, and the like. Once applied as a liquid coating to a web, such materials are
90 susceptible to being wiped or rubbed off, or otherwise disturbed by further
processing over guide rollers, driven rollers, idler rollers, and the like. As a result,
the original placement of material on the web is altered, and an unwanted buildup of
material forms on the downstream rollers of the coating apparatus.

Accordingly, it would be desirable to apply a coating to a web substrate and
95 further process the web in a manner that avoids disruption of the coating.

Additionally, it would be desirable to apply a coating to a web substrate in
predetermined patterns without the coating or pattern being disturbed during
subsequent processing of the substrate.

Further, it would be desirable to apply an emulsion to a cellulosic web
100 substrate in a predetermined pattern or amount, without the predetermined pattern or
amount being altered during subsequent processing of the web.

SUMMARY OF THE INVENTION

The present invention comprises an apparatus for making a selectively-coated
web. The apparatus comprises a coating means for applying a coating to a web in a

105 plurality of coated regions, the coated regions being in spaced, parallel relationship
to a plurality of uncoated regions. The present invention further comprises support
means for supporting the web after coating, the support means comprising a plurality
of support members, each of the support members being in registry with an uncoated
region. In a preferred embodiment the coating of a beneficial emulsion is applied in
110 selected regions by extrusion.

A method of forming a coated web without producing buildup of coating
material on idler rollers is also disclosed. The method comprises the steps of: (a)
coating a web in a plurality of coated regions, the coated regions being in parallel
spaced apart relationship to uncoated regions; (b) providing support members, each
115 of the support members being aligned in registry with an uncoated region; and (c)
guiding the coated web in contact with the support members such that each support
member is in registry with an uncoated region of said web.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and
120 distinctly claiming the present invention, it is believed that the present invention will
be better understood from the following description in conjunction with the
accompanying Drawing Figures, in which like reference numerals identify like
elements, and wherein:

Fig. 1 is a schematic side view representation of a web coating apparatus
125 according to the present invention;

Fig. 2 is a side view of a gravure printer roller representative of a printer roller
of the present invention;

Fig. 3 is a side view of an idler roller support means of the present invention
supporting a selectively coated web.

130 FIG. 4 is a plan view of a shaft and roller support means.

FIG. 5 is an end view of a swing-arm shaft and roller support means.

FIG. 6 is a side view of a swing-arm shaft and roller support means.

FIG. 7 is a side view of an air-permeable shaft and roller support means.

FIG. 8 is a detail of the air-permeable shaft and roller shown in FIG. 7.

135 FIG. 9 is a plan view of an embodiment of a selectively-coated substrate
processed by the method and apparatus of the present invention.

FIG. 10 is a plan view of another embodiment of a selectively-coated substrate processed by the method and apparatus of the present invention.

FIG. 11 is a schematic side view representation of an extrusion coating
140 apparatus of the present invention.

FIG. 12 is a plan view of a preferred embodiment of a selectively-coated substrate processed by the method and apparatus of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

While the following disclosure describes the method and apparatus of the
145 present invention primarily in relation to cellulosic substrates being coated with a beneficial emulsion, it is to be understood that neither the method nor the apparatus of the present invention is limited to the processing of such webs. The method and apparatus of the present invention may be useful for the processing of any substrate and coating. For example, coating may be performed by printing, extruding, or
150 otherwise partially or fully coating a substrate with ink, dyes, emulsions, adhesives or other powdered or liquid coatings. Substrates may include any materials that may be processed as webs, including paper, fabrics, textiles, polymeric films, nonwovens, or other sheet materials.

As used herein, "substrate" refers to the material, and in particular, the web
155 material processed by the method and apparatus of the present invention. For example, substrates suitable for use in the present invention include cellulosic paper, fabrics, textiles, polymeric films, nonwovens, or other sheet materials, including sheet metal. The terms "substrate" and "web" are used herein interchangeably.

As used herein, the terms "coat" or "coating", as verbs, includes covering,
160 overlaying, finishing, or otherwise applying a layer of material to a substrate. For example, "coating" includes printing, spraying, extruding, and laminating materials onto a substrate in a predetermined, controlled manner. Suitable materials include liquid materials, as well as powdered materials that may be applied as a coating in much the same manner as liquid materials.

As used herein, the terms "coat" or "coating", as nouns, refer to the material on
165 the substrate, after the process of applying the material to the substrate. The coating according to the present invention is generally applied in a discontinuous pattern. As used herein, a "discontinuous pattern" of the coating is a pattern having regions of the substrate free of the coating intermediate regions of the substrate upon which
170 the coating is disposed. For example, extruding spaced-apart beads of an emulsion

onto a substrate would produce a discontinuous pattern, as would printing a regular pattern of spaced-apart adhesive dots on a nonwoven.

As used herein, "selectively-coated" refers to a web having a coating selectively applied at predetermined regions of a substrate. According to the present invention, the predetermined coated regions are in spaced apart generally parallel relationship to uncoated regions which are in registry with the web support means, as described fully below. For example, a web having a discontinuous pattern of substantially parallel stripes or bands separated by stripes or bands of uncoated regions is selectively coated. Furthermore, the stripes or bands forming coated regions on a selectively-coated web may themselves be applied in a discontinuous pattern. For example, a discontinuous pattern of spaced-apart adhesive dots may collectively form a stripe or band of coating.

As used herein, the term "wipe" refers to a substrate, preferably coated with performance-enhancing materials, used for cleaning. For example, the wipe may be used as a facial tissue, bath tissue, paper towel, a baby wipe, an adult wipe, a hard surface cleaner, etc. The intended use of the wipe, however, does not limit the final product.

As mentioned above, the method and apparatus of the present invention may be practiced in a wide variety of applications and end uses. For purposes of illustrating its features and advantages, the present invention is described in detail below in relation to a preferred embodiment of a cellulosic paper substrate selectively coated with a beneficial emulsion.

The Apparatus

FIG. 1 shows schematically a typical configuration of an apparatus 1 of the present invention. In general, the apparatus 1 comprises coating means 2, for example print roller 6, and support means 4, for example idler roller 16, in operative relationship. As used herein, "operative relationship" means that during web processing the coating means 2 and support means 4 are configured such that the coating means 2 selectively coats a web substrate 10 and the support means 4 subsequently supports the web with support members 18 in registry with uncoated portions of the selectively-coated web.

The coating 11 may be applied to and disposed on the substrate 10 by any suitable means that allow selective areas of application, such as gravure printing, flexographic printing, screen printing, spraying, and extruding. Preferably, coating 11 is an emulsion (as described more fully below with reference to FIGS. 10-12),

applied to the substrate by a gravure printing process. More preferably, the emulsion is extruded as a series of continuous cylindrically shaped beads. A continuous cylindrical shape is preferred for the emulsion because this shape reduces the surface area to volume ratio of the emulsion.

210 In a preferred embodiment, the coating means comprises a gravure print roll 20, as shown in FIG. 2, and the support means comprises a "tiered" roller, such as idler roller 16, as shown in FIG. 3. As used herein "tiered" means that the idler roller is formed such that the roller has at least two diameters, with a plurality of tiers 14 of greater diameter being in spaced relationship, as shown in FIG. 3. The
215 tiers 14 of greater diameter are preferably the same diameter, such that they serve as support members 18 for a relatively planar web substrate 10 during processing. In a preferred embodiment, and as used herein, rollers are typically idler rollers or guide rollers. The present invention is not limited to idler rollers, however; the rollers may be driven to aid in transporting the web during processing without departing from
220 the scope of the present invention.

The gravure print roll 20 operates as part of a gravure printing apparatus (not shown). The gravure roll 20 may be configured to print various patterns, including a regular pattern of generally square "dots" 22, as shown in FIG. 2. In general, for any given pattern, the gravure printing roll is designed to selectively coat web 10 such
225 that non-printing portions 24 correspond to uncoated regions 34 (as discussed below with reference to FIGS. 4 and 5) of a selectively-coated web processed by the method and apparatus of the present invention. Likewise, printing portions 26 correspond to coated regions 36 of a selectively-coated web processed by the method and apparatus of the present invention. As shown by the regularly spaced
230 dots 22 in FIG. 2, coated regions 36 may comprise a discontinuous pattern of material, that collectively forms a stripe, or band, of coated region 36.

The tiers 14 of idler roller 16 are in spaced relationship such that they serve as support members 18, contacting the web in registry with uncoated regions 34 of the selectively coated web. By contacting the web at uncoated regions only, the support
235 members 18 do not accumulate a buildup of coating, and the coating in the coated regions is not disturbed. Therefore, the coating remains on the web in the specific pattern and amount desired, and the support means 4, for example idler roller 16, remains free of coating material that would otherwise be deposited upon it during web processing.

240 The width and spacing of coated regions 36 (or conversely, uncoated regions 34) of web substrate 10 may be adjusted as desired, with the only requirement that

upon subsequent support by support means 4, the support members 18 contact the web in uncoated regions 34. It is not necessary, however, that there be one support member associated with every uncoated region. Depending on the width of the coated and uncoated regions, it may be desirable to have more than one support member in some uncoated regions, or, conversely, to have some uncoated regions unsupported. For example, it may be desirable to have a minimum number of support members necessary for adequate web support, with the ability to vary the number of coated/uncoated regions between web support members. In this manner, the amount and placement of material on the web may be changed for various product requirements without necessarily having to correspondingly change the support means.

FIG. 3 shows the preferred embodiment for support means 4 as tiered idler roller 16. In the preferred embodiment, tiered idler roller 16 serves as a rolling support member, with tiers 14 preferably making non-sliding contact with web substrate 10, particularly in the uncoated regions of a selectively-coated substrate. In other words, it is generally undesirable to have sliding, abrasive, or rubbing contact between the idler roller and a selectively-coated cellulosic web. By using rolling support, there is reduced, and preferably not any, relative motion between the circumferential surface of tiers 14 and web substrate 10. If necessary, the circumferential surface of tiers 14 may be treated with a non-stick, high coefficient of friction coating to assure rolling contact with web substrate 10. As mentioned above, an idler roller is a preferred embodiment for support means 4. However, support means 4 may comprise a driven roller as necessary to process the selectively coated web.

As shown in FIG. 3, tiers 14 may be described as web contacting disks, and may be formed integrally with idler roller 16 by appropriately machining a length of round stock or tubing. For example, in a preferred embodiment, a length of aluminum tubing having an outside diameter approximately equal to the diameter of tiers 14 is machined, as with a lathe, to remove material between tiers 14. At least enough material is removed to permit the applied coating 11 to pass between tiers without contacting roller 16. Once complete, tiers 14 comprise web contacting disks integral with the idler roller, that is, they are immovable, permanently placed upon the roller. Alternatively, web contacting disks may be formed as annular, circular, disk-shaped members, and affixed to an appropriately-sized roller shaft. For example, the annular members may be press-fit upon the shaft, or fitted with set screw means for affixing into stationary position upon an idler roller shaft.

Another alternative for providing a rolling support for selectively-coated web substrate 10 is shown in partial cut-away view in FIG. 4. As shown, rolling support
280 may be provided by positioning discrete rolling members, for example, rollers 42, upon a non-rotating shaft 40. Bearings 44 in rollers 42 assure smooth, free rotation of rollers 42. Bearings 44 may be press-fit upon shaft 40, or alternatively affixed by any means known in the art, including the use of set screws. Rollers 42 may be coated with a non-stick, high coefficient of friction coating material 15 as necessary
285 for rolling contact. As with idler roller 16, the rollers 42 are axially spaced apart and placed so as to be in registry with uncoated regions 34 of selectively-coated web substrate 11.

The shaft and roller embodiment shown in FIG. 4 may be particularly desirable for use as a Mount Hope roll in a web processing apparatus. A Mount Hope roll is a
290 web spreading device which creates a cross-direction tension on the web to pull out loose wrinkles. Such rolls are known in the web processing art and generally comprise a bent shaft producing an upwardly-oriented bow that forces the web to be spread taut as it passes over rollers placed upon the shaft. The roller of the present invention may be adapted to be a Mount Hope roll by selective placement of rollers
295 upon a bent shaft.

Other support means, both rolling and non-rolling, may be used with good results, depending on the substrate material. For example, for some substrates, such as polymer films, a non-rolling support means may be adequate. For example, instead of employing an idler roller or discrete rollers on a shaft, support means may
300 simply comprise rigid or spring-loaded fingers or tabs (not shown) that smoothly contact the moving web substrate in sliding contact. The only requirement for purposes of the present invention is that the sliding contact be made in registry with uncoated regions of the selectively-coated web substrate.

Additionally, variations on the rolling support means are contemplated. For
305 example, discrete rolling members may be placed at the end of adjustable arms onto a stationary shaft as shown in FIGS. 5 and 6. Stationary, non-rotating shaft 50 serves as a mounting surface for a plurality of rotatably-adjustable roller support arms 52. In one embodiment, roller support arms 52 may be adjustably mounted by tightening a mating clamping member 53 by fastening means 56. In this manner,
310 roller support arms 52 are adjustable both axially along shaft 50 and rotatably about shaft 50, as shown in FIG. 5. Discrete rollers 54 may be mounted to support arms 52. To accommodate different coating patterns, various roller support arms 52 may

be rotated into web-contacting position, or out of web-contacting position, shown in FIGS. 5 and 6 as 52'.

315 For certain substrates, particularly very flexible, elastic, or low-strength substrates, the rolling support means 4 may be altered to provide air support to the web between support members 18. A preferred roller for this purpose is depicted in FIG. 7. As shown in FIG. 7, some web substrates may be prone to sag or dip between support members. Therefore, a porous, air-permeable roller 17 having an
320 air supply fitting 19 may be employed. Air pressure enters through axially-mounted air supply fitting 19 and exits through air-permeable roller 17 as a layer of air pressure about the circumference of the roller between support members 18. As depicted in FIG. 8, air layer 21, 21' cushions web 10 in the areas between support members 18, and prevents contact between roller 17 and web 10, or coating 11.

325 A preferred air-permeable roller 17 is a Mott Air Film Roll specifically designed to guide a web on an air cushion during transport. The preferred air-permeable roller is formed sintered metal to allow even air flow through the roll. The roll may be air-permeable about the entire circumference, but it is preferred to "mask" a portion of the non-active surface area of the roll. By masking non-active
330 portions of the roll, compressed air is only released through the roll in the regions proximate the web being transported. Non-active surface area includes the areas not in the proximity of the web being transported. For example, in FIG. 8, air cushion layer 21 is shown in the proximity of web 11, and is, therefore, in an active area. Air cushion layer 21' is not in the proximity of web 11, and is, therefore, in a non-active
335 area. Actual extent of active and non-active areas will depend on the wrap angle of the web over the roller.

The method of masking air-permeable roller 17, if used, depends on the configuration of the shaft and rolling support means 14. If support members 18 are mounted (e.g., by press fit) on shaft 17 so that shaft and support members rotate as
340 one unit, a non-rotating, internal mask is preferred. If support members 18 are rotatably mounted (e.g., upon roller bearings) so that support members 18 rotate upon a non-rotating shaft 17, other means of masking may be used, including painting the mask areas with a removable paint or grinding down the porous metal so that the pores are closed.

345 As shown in FIGS. 9 and 10, the coating may be applied in virtually any pattern, including decorative patterns. The only limitation to pattern choice is that the pattern be delimited within a banded region, shown by broken lines 38. The bands of printed patterns, then, inherently leave bands or stripes of uncoated regions,

shown in FIGS. 5 and 6, also delimited by broken lines 38. Although not strictly
350 necessary, for purposes of the present invention, it is highly preferred that the bands
of uncoated regions be in generally parallel spaced apart relationship in the machine
direction of the web substrate. The machine direction is parallel to the longitudinal
L axis, as shown in FIG. 9, and perpendicular to the transverse direction, T.

As shown in FIG. 9, the coating 11, which is preferably a beneficial emulsion
355 12, may be applied in a non-linear fashion, that is, varying in width or position in the
transverse direction within the bounds of coated region 36. The only limitation to
the transverse positioning of coating 11 is that a minimum width of uncoated region
34 should remain, with each uncoated region 34 being in generally linear, parallel
relationship to other uncoated regions 34. The minimum width of uncoated region
360 34 is dependent upon, and should be at least equal to, or greater than, the width of
support members 18.

As shown in FIG. 10, the coating 11 may be applied in visually attractive
patterns that give the substrate a beneficial aesthetic appearance. For example, an
emulsion 12 may be applied in the shape of flowers in a repeating pattern to form a
365 band of discontinuous coating forming coated region 36. Each coated region 36 of
repeating patterns is separated by uncoated regions 34, as shown by broken lines 38.
Virtually limitless variations of discontinuous patterns are possible by the method
and apparatus of the present invention. For example, if the gravure roller of FIG. 2
is employed, the pattern produced on the substrate would be bands or stripes of
370 coated regions comprising a discontinuous coating of spaced apart square "dots".
Although the dots are spaced apart, thereby producing a discontinuous coating,
collectively they form strips, or bands, of coated regions 36.

In a more preferred embodiment coating 11, preferably an emulsion 12, is
applied by extrusion, as shown in FIG. 11. As web substrate 10 is provided from a
375 supply roll 62 it is selectively-coated by a plurality of spaced-apart extrusion heads
60. As depicted in FIG. 11, support means 4 may include support for forces other
than that of gravity. For example, as shown, as the selectively-coated web is
processed, it may be necessary to guide it directionally, requiring support means, for
example, an idler roller support 16, typical of that shown in FIG. 3. At any point in
380 the processing of the selectively coated web that the web must change direction, as
shown in FIG. 11, the support means 4 of the present invention may be necessary.
Extrusion of the preferred emulsion in a selectively-coated pattern is preferably
accomplished by use of standard processing equipment configured for extrusion of
hot melt adhesives.

385 Referring again to FIGS. 3, 9-10, the selectively-coated web processed by the method and apparatus of the present invention preferably comprises a substrate 10 and a coating 11 selectively disposed thereon. The substrate 10 is preferably cellulosic, particularly a tissue, a nonwoven, a foam, or any combination thereof. The coating 11 is preferably a beneficial emulsion 12, for example a lotion.
390 Preferred substrates 10, emulsions 12, and patterns are now described below with respect to a preferred wipe 30, as shown in FIG. 12, produced from a preferred web substrate 10.

A Preferred Substrate

Suitable cellulosic substrates 10 are described in U.S. Patents 5,245,025,
395 issued Sept. 14, 1993 to Trokhan et al.; 5,503,715, issued April 2, 1996 to Trokhan et al.; 5,534,326, issued July 9, 1996 to Trokhan et al.; 4,637,859 issued Jan. 20, 1987 to Trokhan; 4,514,345, issued April 30, 1985 to Johnson et al.; 4,529,480, issued July 16, 1985 to Trokhan; 5,328,565, issued July 12, 1994 to Rasch et al.; 4,191,609, issued March 4, 1980 to Trokhan; 4,300,981, issued Nov. 17, 1981 to
400 Carstens; 4,513,051, issued April 23, 1985 to Lavash; 4,637,859, issued Jan. 20, 1987 to Trokhan; 5,143,776, issued Sept. 1, 1992 to Givens; 5,637,194, issued June 10, 1997 to Ampulski et al.; 5,609,725, issued March 11, 1997 to Phan; and 5,628,876, issued May 13, 1997 to Ayers et al., the disclosures of which patents are incorporated herein by reference.

405 A suitable tissue substrate 10 has a basis weight of about 7 to 25 pounds per 3,000 square feet per ply, preferably about 8 to 10 pounds per 3,000 square feet per ply, and most preferably about 8-1/2 pounds per 3,000 square feet per ply for bath tissue applications, and about 18 to 22 pounds per 3,000 square feet per ply for hard surface cleaning applications. A multi-basis weight substrate 10 is feasible for the
410 claimed invention. A multi-basis weight substrate 10 has regions of high and low basis weight juxtaposed together, and optionally intermediate basis weight regions. The high basis weight regions provide strength. The low basis weight regions provide for transfer of water released from the emulsion to the surface. In a degenerate case, the low basis weight regions may be apertures, to increase the
415 transfer of water to the surface. If a multi-basis weight substrate 10 is used, the macro-basis weight of the substrate 10, averaging both high and low basis weight regions or high, intermediate and low basis weight regions, is considered.

If a multi-basis weight substrate 10 is desired, such a substrate 10 may be made according to commonly assigned U.S. Patents 5,277,761, issued Jan. 11, 1994
420 to Phan et al.; 5,443,691, issued Aug. 22, 1995 to Phan et al.; and 5,614,061, issued

March 25, 1997 to Phan et al., the disclosures of which patents are incorporated herein by reference. If a multi-basis weight substrate 10 having radially oriented fibers is desired, such a substrate 10 may be made according to commonly assigned U.S. Patents 5,245,025, issued Sept. 14, 1993 to Trokhan et al.; 5,503,715, issued
425 April 2, 1996 to Trokhan et al.; 5,527,428, issued June 18, 1996 to Trokhan et al.; or 5,534,326, issued July 9, 1996 to Trokhan et al., the disclosures of which patents are incorporated herein by reference.

If one desires to use a more durable or nonwoven substrate 10 for a wipe 30, such a substrate 10 may be made according to commonly owned U.S. Patents
430 4,097,965, issued July 4, 1978 to Gotchel et al.; 4,130,915, issued Dec. 26, 1978 to Gotchel et al.; 4,296,161, issued Oct. 20, 1981 to Kaiser et al.; and 4,682,942, issued July 28, 1987 to Gotchel et al., the disclosures of which patents are incorporated herein by reference.

A Preferred Emulsion Coating

435 The preferred coating 11 is a beneficial emulsion 12. The preferred emulsion 12 comprises: (1) a continuous solidified lipid phase; (2) an emulsifier that forms the emulsion 12 when the lipid phase is fluid; and (3) an internal polar phase dispersed in the lipid phase. This emulsion 12 ruptures when subjected to low shear during use, e.g., wiping of the skin or other surface, so as to release the internal polar
440 phase.

1. External Lipid Phase

The continuous solidified lipid phase provides the essential stabilizing structure for the high internal phase inverse emulsions 12 of the present invention. In particular, this continuous lipid phase is what keeps the dispersed internal phase
445 from being prematurely released prior to use of the article, such as during storage.

The continuous lipid phase can comprise from about 2 to about 60% of the emulsion 12 of the present invention. Preferably, this continuous lipid phase will comprise from about 5 to about 30% of the emulsion 12. Most preferably, this lipid phase will comprise from about 6 to about 15% of the emulsion 12.

450 The major constituent of this continuous lipid phase is a waxy lipid material. This lipid material is characterized by a melting point of about 30°C or higher, i.e., is solid at ambient temperatures. Preferably, the lipid material has a melting point of about 50°C or higher. Typically, the lipid material has a melting point in the range of from about 40° to about 80°C, more typically in the range of from about 50° to
455 about 70°C.

Although this waxy lipid material is solid at ambient temperatures, it also needs to be fluid or plastic at those temperatures at which the high internal phase inverse emulsion 12 is applied to the carrier. Moreover, even though the lipid material is fluid or plastic at those temperatures at which the emulsion 12 is applied
460 to the carrier substrate 10, it should still desirably be somewhat stable (i.e., minimal coalescence of emulsion 12 micro-droplets) for extended periods of time at elevated temperatures (e.g., about 50°C or higher) that are normally encountered during storage and distribution of the articles of the present invention. This lipid material also needs to be sufficiently brittle at the shear conditions of use of the article such
465 that it ruptures and releases the dispersed internal polar phase. These lipid materials should also desirably provide a good feel to the skin when used in personal care products such as wet-like cleansing wipes 30 and tissue used in perianal cleaning.

Suitable waxy lipid materials for use in the high internal phase inverse emulsion 12 of the present invention include natural and synthetic waxes, as well as
470 other oil soluble materials having a waxy consistency. As used herein, the term "waxes" refers to organic mixtures or compounds that are generally water-insoluble and tend to exist as amorphous or microcrystalline or crystalline solids at ambient temperatures (e.g., at about 25°C). Suitable waxes include various types of hydrocarbons, as well as esters of certain fatty acids and fatty alcohols. They can be
475 derived from natural sources (i.e., animal, vegetable or mineral) or they can be synthesized. Mixtures of these various waxes can also be used.

Some representative animal and vegetable waxes that can be used in the present invention include beeswax, carnauba, spermaceti, lanolin, shellac wax, candelilla, and the like. Particularly preferred animal and vegetable waxes are
480 beeswax, lanolin and candelilla. Representative waxes from mineral sources that can be used in the present invention include petroleum-based waxes such as paraffin, petrolatum and microcrystalline wax, and fossil or earth waxes such as white ceresine wax, yellow ceresine wax, white ozokerite wax, and the like. Particularly preferred mineral waxes are petrolatum, microcrystalline wax, yellow ceresine wax,
485 and white ozokerite wax. Representative synthetic waxes that can be used in the present invention include ethylenic polymers such as polyethylene wax, chlorinated naphthalenes such as "Halowax," hydrocarbon type waxes made by Fischer-Tropsch synthesis, and the like. Particularly preferred synthetic waxes are polyethylene waxes.

490 Besides the waxy lipid material, the continuous lipid phase can include minor amounts of other lipophilic or lipid-miscible materials. These other

lipophilic/lipid-miscible materials are typically included for the purpose of stabilizing the emulsion 12 to minimize loss of the internal polar phase or for improving the aesthetic feel of the emulsion 12 on the skin. Suitable materials of this type that can be present in the continuous lipid phase include hot melt adhesives such as Findley 193-336 resin, long chain alcohols such as cetyl alcohol, stearyl alcohol, and cetaryl alcohol, water-insoluble soaps such as aluminum stearate, silicone polymers such as polydimethylsiloxanes, hydrophobically modified silicone polymers such as phenyl trimethicone, and the like. Other suitable lipophilic/lipid miscible materials include polyol polyesters. By "polyol polyester" is meant a polyol having at least 4 ester groups. By "polyol" is meant a polyhydric alcohol containing at least 4, preferably from 4 to 12, and, most preferably from 6 to 8, hydroxyl groups. Polyols include monosaccharides, disaccharides and trisaccharides, sugar alcohols and other sugar derivatives (e.g., alkyl glycosides), polyglycerols (e.g., diglycerol and triglycerol), pentaerythritol, and polyvinyl alcohols. Preferred polyols include xylose, arabinose, ribose, xylitol, erythritol, glucose, methyl glucoside, mannose, galactose, fructose, sorbitol, maltose, lactose, sucrose, raffinose, and maltotriose. Sucrose is an especially preferred polyol. With respect to the polyol polyesters useful herein, it is not necessary that all of the hydroxyl groups of the polyol be esterified, however disaccharide polyesters should have no more than 3, and more preferably no more than 2 unesterified hydroxyl groups. Typically, substantially all (e.g., at least about 85%) of the hydroxyl groups of the polyol are esterified. In the case of sucrose polyesters, typically from about 7 to 8 of the hydroxyl groups of the polyol are esterified.

By "liquid polyol polyester" is meant a polyol polyester from the hereinbefore described groups having a fluid consistency at or below about 37°C. By "solid polyol polyester" is meant a polyol polyester from the hereinbefore described groups having a plastic or solid consistency at or above about 37°C. Liquid polyol polyesters and solid polyol polyesters may be successfully employed as emollients and immobilizing agents, respectively, in emulsions 12 of the present invention. In some cases, solid polyol polyesters may also provide some emolliency functionality.

2. Internal Polar Phase

Typically, the major component of the high internal phase inverse emulsions 12 of the present invention is the dispersed internal polar phase. In preferred embodiments, the polar phase will contain a significant percentage of water,

preferably at least about 60%, by weight of the emulsion 12, more preferably at least about 75%, by weight, still more preferably at least about 90%, by weight.

530 The internal polar phase can provide a number of different benefits when released. For example, in wet-like cleaning wipes 30 for perianal cleaning where the internal polar phase is water, it is this released water that provides the primary cleansing action for these wipes 30.

535 In a preferred embodiment of the present invention, the internal polar phase (preferably comprising water as a major constituent) is a disinfecting polar phase comprising an antimicrobial compound, preferably an essential oil or an active thereof, and a bleach, preferably a peroxygen bleach. Disinfecting wipes 30 comprising such an internal disinfecting polar phase provide effective disinfecting performance on a surface while being safe to the surface treated.

540 By "effective disinfecting performance" it is meant herein that the disinfecting wipes 30 of the present invention allow significant reduction in the amount of bacteria on an infected surface. Indeed, effective disinfection may be obtained on various microorganisms including Gram positive bacteria like *Staphylococcus aureus*, and Gram negative bacteria like *Pseudomonas aeruginosa*, as well as on more resistant micro-organisms like fungi (e.g., *Candida albicans*) present
545 on infected surfaces.

Another advantage of the disinfecting wipes 30 according to the present invention is that besides the disinfection properties delivered, good cleaning is also provided as the disinfecting polar phase may further comprise surfactants and/or solvents.

550 An essential element of the preferred internal disinfecting polar phase is an antimicrobial compound typically selected from the group consisting of an essential oil and an active thereof, paraben (e.g., methyl paraben, ethyl paraben), glutaraldehyde and mixtures thereof. Essential oils or actives thereof are the preferred antimicrobial compounds to be used herein.

555 Suitable essential oils or actives thereof to be used herein are those essential oils which exhibit antimicrobial activity and more particularly antibacterial activity. By "actives of essential oils" it is meant herein any ingredient of essential oils that exhibits antimicrobial/antibacterial activity. A further advantage of said essential oils and actives hereof is that they impart pleasant odor to the disinfecting wipes 30
560 according to the present invention without the need of adding a perfume. Indeed, the

disinfecting wipes 30 according to the present invention deliver not only excellent disinfecting performance on infected surfaces but also good scent.

Such essential oils include, but are not limited to, those obtained from thyme, lemongrass, citrus, lemons, oranges, anise, clove, aniseed, cinnamon, geranium, roses, mint, lavender, citronella, eucalyptus, peppermint, camphor, sandalwood and cedar and mixtures thereof. Actives of essential oils to be used herein include, but are not limited to, thymol (present for example in thyme), eugenol (present for example in cinnamon and clove), menthol (present for example in mint), geraniol (present for example in geranium and rose), verbenone (present for example in vervain), eucalyptol and pinocarvone (present in eucalyptus), cedrol (present for example in cedar), anethol (present for example in anise), carvacrol, hinokitiol, berberine, terpineol, limonene, methyl salicylate and mixtures thereof. Preferred actives of essential oils to be used herein are thymol, eugenol, verbenone, eucalyptol, carvacrol, limonene and/or geraniol. Thymol may be commercially available for example from Aldrich, eugenol may be commercially available for example from Sigma, Systems - Bioindustries (SBI) - Manheimer Inc.

Typically, the antimicrobial compound or mixtures thereof will be present in the internal polar phase at a level of from 0.001% to 5%, preferably from 0.001% to 3%, more preferably from 0.005% to 1%, by weight of total internal polar phase.

An important element of the internal disinfecting polar phase is a bleach or mixtures thereof. Any bleach known to those skilled in the art may be suitable to be used herein including any chlorine bleach as well as any peroxygen bleach. The presence of the bleach, preferably the peroxygen bleach, in the disinfecting wipes 30 of the present invention contribute to the disinfection properties of the wipes 30.

Suitable chlorine bleaches to be used herein include any compound capable of releasing chlorine when said compound is in contact with water. Suitable chlorine bleaches include alkali metal dichloroisocyanurates as well as alkali metal hypohalites like hypochlorite and/or hypobromite. Preferred chlorine bleaches are alkali metal hypochlorites. Various forms of alkali metal hypochlorite are commercially available, for instance sodium hypochlorite.

Preferred bleaches for use herein are peroxygen bleaches, more particularly hydrogen peroxide, or a water soluble source thereof, or mixtures thereof. Hydrogen peroxide is particularly preferred.

Peroxygen bleaches like hydrogen peroxide are preferred herein as they are
595 generally well accepted from an environmental point of view. For example the
decomposition products of hydrogen peroxide are oxygen and water.

As used herein, a hydrogen peroxide source refers to any compound which
produces perhydroxyl ions when said compound is in contact with water. Suitable
water-soluble sources of hydrogen peroxide for use herein include percarbonates,
600 persilicates, persulphates such as monopersulfate, perborates, peroxyacids such as
diperoxydodecandioic acid (DPDA), magnesium perphthalic acid, dialkylperoxides,
diacylperoxides, performed percarboxylic acids, organic and inorganic peroxides
and/or hydroperoxides and mixtures thereof.

Typically, the bleach or mixtures thereof is present at a level of from 0.001%
605 to 15% by weight of the total internal polar phase, preferably from 0.001% to 5%,
and more preferably from 0.005% to 2%.

The internal disinfecting polar phase may further comprise a deterative
surfactant or a mixture thereof. Typically, the surfactant or mixtures thereof is
present at a level of from 0.001% to 40% by weight of the total internal polar phase,
610 preferably from 0.01 % to 10% and more preferably from 0.05% to 2%.

Suitable deterative surfactants to be used in the present invention include any
surfactant known to those skilled in the art like nonionic, anionic, cationic,
amphoteric and/or zwitterionic surfactants. Preferred deterative surfactants to be
used herein are the amphoteric and/or zwitterionic surfactants.

615 Suitable amphoteric deterative surfactants to be used herein include amine
oxides of the formula $R^1R^2R^3NO$, wherein each of R^1 , R^2 and R^3 is independently
a saturated, substituted or unsubstituted, linear or branched hydrocarbon chain
having from 1 to 30 carbon atoms. Preferred amine oxide surfactants to be used
according to the present invention are amine oxides of the formula $R^1R^2R^3NO$,
620 wherein R^1 is an hydrocarbon chain having from 1 to 30 carbon atoms, preferably
from 6 to 20, more preferably from 8 to 16, most preferably from 8 to 12, and
wherein R^2 and R^3 are independently substituted or unsubstituted, linear or
branched hydrocarbon chains having from 1 to 4 carbon atoms, preferably from 1 to
3 carbon atoms, and more preferably are methyl groups. R^1 may be a saturated,
625 substituted or unsubstituted, linear or branched hydrocarbon chain. Suitable amine
oxides for use herein are for instance natural blend C₈-C₁₀ amine oxides as well as
C₁₂-C₁₆ amine oxides commercially available from Hoechst. Amine oxides are

preferred herein as they deliver effective cleaning performance and further participate to the disinfecting properties of the disinfecting wipes 30 herein.

630 Suitable zwitterionic surfactants to be used herein contain both cationic and anionic hydrophilic groups on the same molecule at a relatively wide range of pH's. The typical cationic group is a quaternary ammonium group, although other positively charged groups like phosphonium, imidazolinium and sulfonium groups can be used. The typical anionic hydrophilic groups are carboxylates and sulfonates, 635 although other groups such as sulfates, phosphonates, and the like can be used. A generic formula for some zwitterionic surfactants to be used herein is




wherein R^1 is a hydrophobic group; R^2 and R^3 are each C_1 - C_4 alkyl, hydroxy alkyl or other substituted alkyl group which can also be joined to form ring 640 structures with the N; R^4 is a moiety joining the cationic nitrogen atom to the hydrophilic group and is typically an alkylene, hydroxy alkylene, or polyalkoxy group containing from 1 to 10 carbon atoms; and X is the hydrophilic group which is preferably a carboxylate or sulfonate group. Preferred hydrophobic groups R^1 are alkyl groups containing from 1 to 24, preferably less than 18, more preferably less 645 than 16 carbon atoms. The hydrophobic group can contain unsaturation and/or substituents and/or linking groups such as aryl groups, amido groups, ester groups and the like. In general, the simple alkyl groups are preferred for cost and stability reasons.

Highly preferred zwitterionic surfactants include betaine and sulphobetaine 650 surfactants, derivatives thereof or mixtures thereof. Said betaine or sulphobetaine surfactants are preferred herein as they help disinfection by increasing the permeability of the bacterial cell wall, thus allowing other active ingredients to enter the cell.

Furthermore, due to the mild action profile of said betaine or sulphobetaine 655 surfactants, they are particularly suitable for the cleaning of delicate surfaces, e.g., hard surfaces in contact with food and/or babies. Betaine and sulphobetaine surfactants are also extremely mild to the skin and/or surfaces to be treated.

Suitable betaine and sulphobetaine surfactants to be used herein are the betaine/sulphobetaine and betaine-like detergents wherein the molecule contains 660 both basic and acidic groups which form an inner salt giving the molecule both cationic and anionic hydrophilic groups over a broad range of pH values. Some common examples of these detergents are described in U.S. Pat. Nos. 2,082,275,

2,702,279 and 2,255,082, incorporated herein by reference. Preferred betaine and sulphobetaine surfactants herein are according to the formula

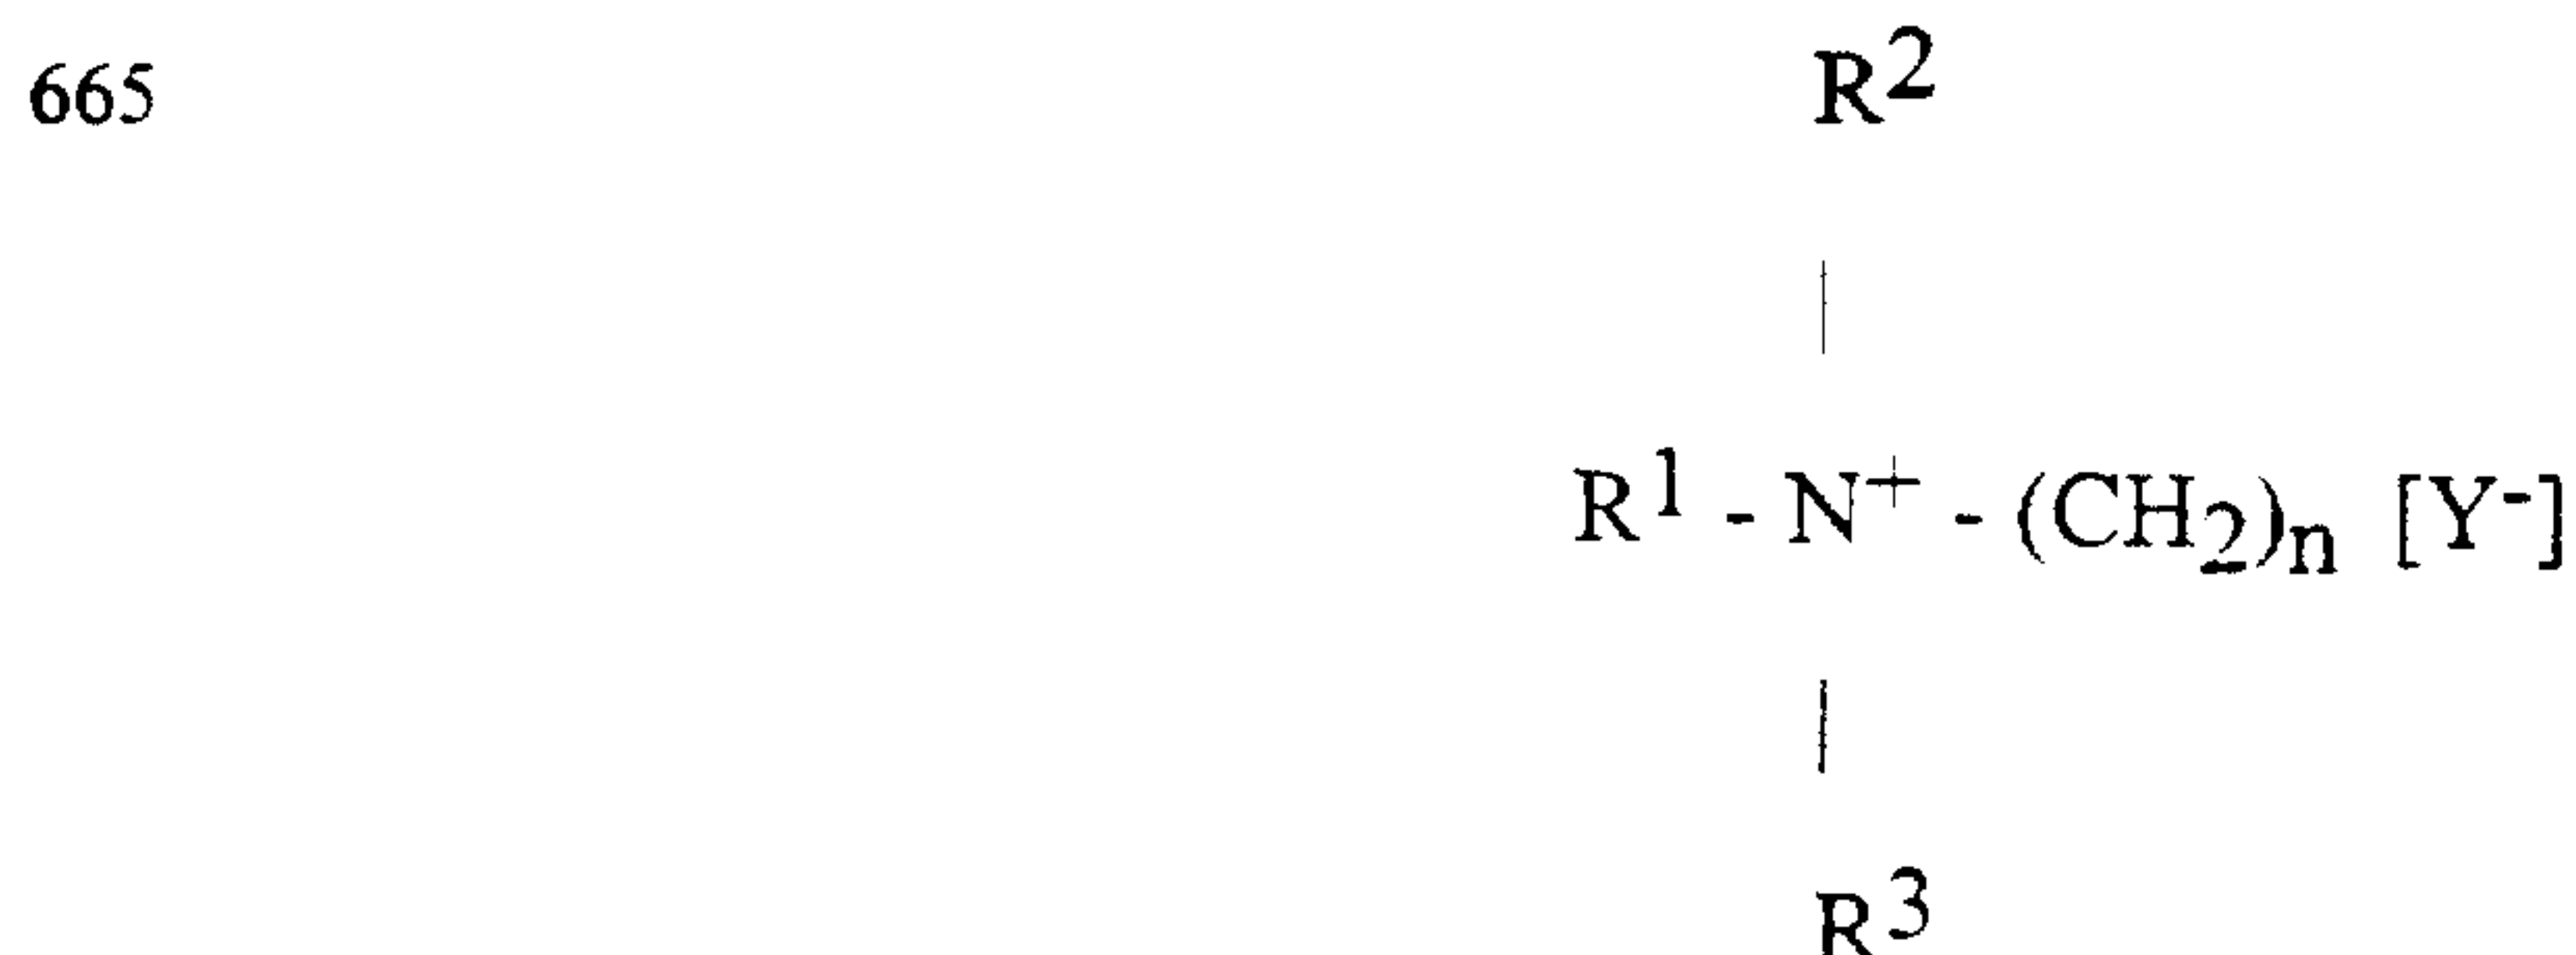


670

wherein R^1 is a hydrocarbon chain containing from 1 to 24 carbon atoms, preferably from 8 to 18, more preferably from 12 to 14, wherein R^2 and R^3 are hydrocarbon chains containing from 1 to 3 carbon atoms, preferably 1 carbon atom, wherein n is an integer from 1 to 10, preferably from 1 to 6, more preferably is 1, Y is selected from the group consisting of carboxyl and sulfonyl radicals and wherein the sum of R^1 , R^2 and R^3 hydrocarbon chains is from 14 to 24 carbon atoms, or mixtures thereof.

Examples of particularly suitable betaine surfactants include C_{12} - C_{18} alkyl dimethyl betaine such as coconut-betaine and C_{10} - C_{16} alkyl dimethyl betaine such as laurylbetaine. Coconutbetaine is commercially available from Seppic under the trade name of Amonyl 265®. Laurylbetaine is commercially available from Albright & Wilson under the trade name Empigen BB/L®.

Other specific zwitterionic surfactants have the generic formulas:

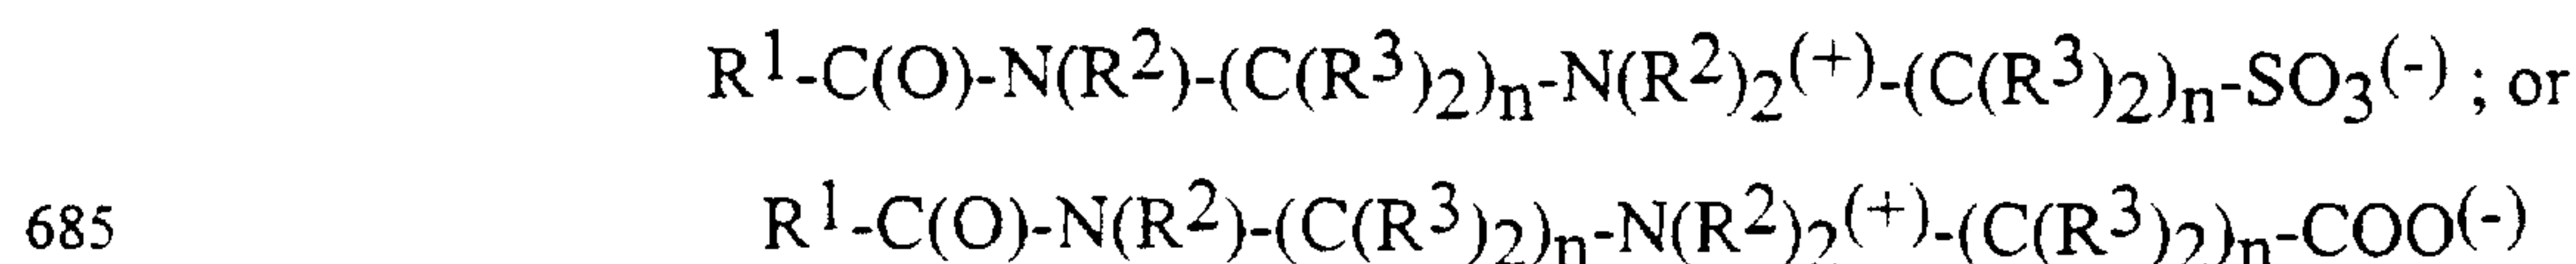

wherein each R^1 is a hydrocarbon, e.g. an alkyl group containing from 8 up to 20, preferably up to 18, more preferably up to 16 carbon atoms, each R^2 is either a hydrogen (when attached to the amido nitrogen), short chain alkyl or substituted alkyl containing from 1 to 4 carbon atoms, preferably groups selected from the group consisting of methyl, ethyl, propyl, hydroxy substituted ethyl or propyl and mixtures thereof, preferably methyl, each R^3 is selected from the group consisting of hydrogen and hydroxy groups and each n is a number from 1 to 4, preferably from 2 to 3, more preferably 3, with no more than one hydroxy group in any $(\text{C}(\text{R}^3)_2)$ moiety. The R^1 groups can be branched and/or unsaturated. The R^2 groups can also be connected to form ring structures. A surfactant of this type is a C_{10} - C_{14} fatty

acylamidopropylene-(hydroxypropylene)sulfobetaine that is available from the Sherex Company under the trade name Varion CAS sulfo-betaine®.

Suitable nonionic surfactants to be used herein are fatty alcohol ethoxylates and/or propoxylates which are commercially available with a variety of fatty alcohol
700 chain lengths and a variety of ethoxylation degrees. Indeed, the HLB values of such alkoxylated nonionic surfactants depend essentially on the chain length of the fatty alcohol, the nature of the alkoxylation and the degree of alkoxylation. Surfactant catalogues are available which list a number of surfactants, including nonionics, together with their respective HLB values.

705 Particularly suitable for use herein as nonionic surfactants are the hydrophobic nonionic surfactants having an HLB (hydrophilic-lipophilic balance) below 16 and more preferably below 15. Those hydrophobic nonionic surfactants have been found to provide good grease cutting properties.

Preferred nonionic surfactants for use herein are nonionic surfactants
710 according to the formula $RO-(C_2H_4O)_n(C_3H_6O)_mH$, wherein R is a C_6 to C_{22} alkyl chain or a C_6 to C_{28} alkyl benzene chain, and wherein $n+m$ is from 0 to 20 and n is from 0 to 15 and m is from 0 to 20, preferably $n+m$ is from 1 to 15 and n and m are from 0.5 to 15, more preferably $n+m$ is from 1 to 10 and n and m are from 0 to 10. The preferred R chains for use herein are the C_8 to C_{22} alkyl chains.
715 Accordingly, suitable hydrophobic nonionic surfactants for use herein are Dobanol R 91-2.5 (HLB= 8.1; R is a mixture of C_9 and C_{11} alkyl chains, n is 2.5 and m is 0), or Lutensol R TO3 (HLB=8; R is a C_{13} alkyl chains, n is 3 and m is 0), or Lutensol R AO3 (HLB=8; R is a mixture of C_{13} and C_{15} alkyl chains, n is 3 and m is 0), or Tergitol R 25L3 (HLB= 7.7; R is in the range of C_{12} to C_{15} alkyl chain length, n is
720 3 and m is 0), or Dobanol R 23-3 (HLB=8.1; R is a mixture of C_{12} and C_{13} alkyl chains, n is 3 and m is 0), or Dobanol R 23-2 (HLB=6.2; R is a mixture of C_{12} and C_{13} alkyl chains, n is 2 and m is 0), or Dobanol R 45-7 (HLB=11.6; R is a mixture of C_{14} and C_{15} alkyl chains, n is 7 and m is 0) Dobanol R 23-6.5 (HLB=11.9; R is a mixture of C_{12} and C_{13} alkyl chains, n is 6.5 and m is 0), or Dobanol R 25-7
725 (HLB=12; R is a mixture of C_{12} and C_{15} alkyl chains, n is 7 and m is 0), or Dobanol R 91-5 (HLB=11.6; R is a mixture of C_9 and C_{11} alkyl chains, n is 5 and m is 0), or Dobanol R 91-6 (HLB=12.5; R is a mixture of C_9 and C_{11} alkyl chains, n is 6 and m is 0), or Dobanol R 91-8 (HLB=13.7; R is a mixture of C_9 and C_{11} alkyl chains, n is 8 and m is 0), Dobanol R 91-10 (HLB=14.2; R is a mixture of C_9 to C_{11}
730 alkyl chains, n is 10 and m is 0), or mixtures thereof. Preferred herein are Dobanol R 91-2.5, or Lutensol R TO3, or Lutensol R AO3, or Tergitol R 25L3, or Dobanol R

23-3, or Dobanol R 23-2, or Dobanol R 23-10, or mixtures thereof. DobanolR surfactants are commercially available from SHELL. LutensolR surfactants are commercially available from BASF and the Tergitol R surfactants are commercially available from UNION CARBIDE.

Suitable anionic surfactants to be used herein include water soluble salts or acids of the formula ROSO_3M wherein R is preferably a $\text{C}_6\text{-C}_{24}$ hydrocarbyl, preferably an alkyl or hydroxyalkyl having a $\text{C}_8\text{-C}_{20}$ alkyl component, more preferably a $\text{C}_8\text{-C}_{18}$ alkyl or hydroxyalkyl, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

Other suitable anionic surfactants to be used herein include alkyl-diphenyl-ether-sulphonates and alkyl-carboxylates. Other anionic surfactants can include salts (including, for example, sodium, potassium, ammonium, and substituted ammonium salts such as mono-, di- and triethanolamine salts) of soap, $\text{C}_9\text{-C}_{20}$ linear alkylbenzenesulfonates, $\text{C}_8\text{-C}_{22}$ primary or secondary alkanesulfonates, $\text{C}_8\text{-C}_{24}$ olefinsulfonates, sulfonated polycarboxylic acids prepared by sulfonation of the pyrolyzed product of alkaline earth metal citrates, e.g., as described in British patent specification No. 1,082,179, $\text{C}_8\text{-C}_{24}$ alkylpolyglycoethersulfates (containing up to 10 moles of ethylene oxide); alkyl ester sulfonates such as C_{14-16} methyl ester sulfonates; acyl glycerol sulfonates, fatty oleyl glycerol sulfates, alkyl phenol ethylene oxide ether sulfates, paraffin sulfonates, alkyl phosphates, isethionates such as the acyl isethionates, N-acyl taurates, alkyl succinamates and sulfosuccinates, monoesters of sulfosuccinate (especially saturated and unsaturated $\text{C}_{12}\text{-C}_{18}$ monoesters) diesters of sulfosuccinate (especially saturated and unsaturated $\text{C}_6\text{-C}_{14}$ diesters), acyl sarcosinates, sulfates of alkylpolysaccharides such as the sulfates of alkylpolyglucoside (the nonionic nonsulfated compounds being described below), branched primary alkyl sulfates, alkyl polyethoxy carboxylates such as those of the formula $\text{RO}(\text{CH}_2\text{CH}_2\text{O})_k\text{CH}_2\text{COO-M}^+$ wherein R is a $\text{C}_8\text{-C}_{22}$ alkyl, k is an integer from 0 to 10, and M is a soluble salt-forming cation. Resin acids and hydrogenated resin acids are also suitable, such as rosin, hydrogenated rosin, and resin acids and hydrogenated resin acids present in or derived from tall oil. Further examples are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A variety of such surfactants are also generally

disclosed in U.S. Patent 3,929,678, issued December 30, 1975 to Laughlin, et al. at Column 23, line 58 through Column 29, line 23 (herein incorporated by reference).

770 Preferred anionic surfactants for use herein are the alkyl benzene sulfonates, alkyl sulfates, alkyl alkoxyated sulfates, paraffin sulfonates and mixtures thereof.

The internal disinfecting polar phase according to the present invention has a pH of from 1 to 12, preferably from 3 to 10, and more preferably from 3 to 9. The pH can be adjusted by using alkalinizing agents or acidifying agents. Examples of
775 alkalinizing agents are alkali metal hydroxides, such as potassium and/or sodium hydroxide, or alkali metal oxides such as sodium and/or potassium oxide. Examples of acidifying agents are organic or inorganic acids such as citric or sulfuric acid.

Solvents may be present in the internal disinfecting polar phase according to the present invention. These solvents will, advantageously, give an enhanced
780 cleaning to the disinfecting wipes 30 of the present invention. Suitable solvents for incorporation herein include propylene glycol derivatives such as n-butoxypropanol or n-butoxypropoxypropanol, water-soluble CARBITOL® solvents or water-soluble CELLOSOLVE® solvents. Water-soluble CARBITOL® solvents are compounds of the 2-(2-alkoxyethoxy)ethanol class wherein the alkoxy group is derived from ethyl,
785 propyl or butyl. A preferred water-soluble carbitol is 2-(2-butoxyethoxy)ethanol also known as butyl carbitol. Water-soluble CELLOSOLVE® solvents are compounds of the 2-alkoxyethoxyethanol class, with 2-butoxyethoxyethanol being preferred. Other suitable solvents are benzyl alcohol, methanol, ethanol, isopropyl alcohol and diols such as 2-ethyl-1,3-hexanediol and 2,2,4-trimethyl-1,3-pentanediol and mixture
790 thereof. Preferred solvents for use herein are n-butoxypropoxypropanol, butyl carbitol® and mixtures thereof. A most preferred solvent for use herein is butyl carbitol®.

The internal disinfecting polar phase herein may further comprise other optional ingredients including radical scavengers, chelating agents, thickeners,
795 builders, buffers, stabilizers, bleach activators, soil suspenders, dye transfer agents, brighteners, anti dusting agents, enzymes, dispersant, dye transfer inhibitors, pigments, perfumes, and dyes and the like.

Suitable radical scavengers for use herein include the well-known substituted mono and di hydroxy benzenes and derivatives thereof, alkyl- and aryl carboxylates
800 and mixtures thereof. Preferred radical scavengers for use herein include di-tert-butyl hydroxy toluene (BHT), p-hydroxy-toluene, hydroquinone (HQ), di-tert-butyl hydroquinone (DTBHQ), mono-tert-butyl hydroquinone (MTBHQ), tert-butyl-

hydroxy anisole, p-hydroxy-anisole, benzoic acid, 2,5-dihydroxy benzoic acid, 2,5-dihydroxyterephthalic acid, toluic acid, catechol, t-butyl catechol, 4-allyl-catechol, 4-acetyl catechol, 2-methoxy-phenol, 2-ethoxy-phenol, 2-methoxy-4-(2-propenyl)phenol, 3,4-dihydroxy benzaldehyde, 2,3-dihydroxy benzaldehyde, benzylamine, 1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl) butane, tert-butyl-hydroxy-aniline, p-hydroxy aniline as well as n-propyl-gallate. Highly preferred for use herein is di-tert-butyl hydroxy toluene, which is for example commercially available from SHELL under the trade name IONOL CP®.

Typically, the radical scavenger, or a mixture thereof, is present in the internal water phase up to a level of 5% by weight, preferably from 0.001% to 3% by weight, and more preferably from 0.001% to 1.5%.

Suitable chelating agents to be used herein may be any chelating agent known to those skilled in the art such as the ones selected from the group consisting of phosphonate chelating agents, amino carboxylate chelating agents or other carboxylate chelating agents, or polyfunctionally-substituted aromatic chelating agents and mixtures thereof.

Such phosphonate chelating agents may include etidronic acid (1-hydroxyethylidene-bisphosphonic acid or HEDP) as well as amino phosphonate compounds, including amino alkylene poly (alkylene phosphonate), alkali metal ethane 1-hydroxy diphosphonates, nitrilo trimethylene phosphonates, ethylene diamine tetra methylene phosphonates, and diethylene triamine penta methylene phosphonates. The phosphonate compounds may be present either in their acid form or as salts of different cations on some or all of their acid functionalities. Preferred phosphonate chelating agents to be used herein are diethylene triamine penta methylene phosphonates. Such phosphonate chelating agents are commercially available from Monsanto under the trade name DEQUEST®.

Polyfunctionally-substituted aromatic chelating agents may also be useful herein. See U.S. Patent 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxydisulfobenzenes such as 1,2-dihydroxy -3,5-disulfobenzene.

A preferred biodegradable chelating agent for use herein is ethylene diamine N,N'- disuccinic acid, or alkali metal, or alkaline earth, ammonium or substitutes ammonium salts thereof or mixtures thereof. Ethylenediamine N,N'- disuccinic acids, especially the (S,S) isomer have been extensively described in US patent 4,704, 233, November 3, 1987 to Hartman and Perkins. Ethylenediamine N,N'-

disuccinic acid is, for instance, commercially available under the tradename ssEDDS® from Palmer Research Laboratories.

840 Suitable amino carboxylate chelating agents useful herein include ethylene diamine tetra acetate, diethylene triamine pentaacetate, diethylene triamine pentaacetate (DTPA), N-hydroxyethylethylenediamine triacetate, nitrilotri-acetate, ethylenediamine tetrapropionate, triethylenetetraaminehexa-acetate, ethanoldiglycine, propylene diamine tetracetic acid (PDTA) and methyl glycine di-
845 acetic acid (MGDA), both in their acid form, or in their alkali metal, ammonium, and substituted ammonium salt forms. Particularly suitable to be used herein are diethylene triamine penta acetic acid (DTPA), propylene diamine tetracetic acid (PDTA) which is, for instance, commercially available from BASF under the trade name Trilon FS® and methyl glycine di-acetic acid (MGDA).

850 Further carboxylate chelating agents to be used herein includes malonic acid, salicylic acid, glycine, aspartic acid, glutamic acid, dipicolinic acid and derivatives thereof, or mixtures thereof.

Typically, the chelating agent, or a mixture thereof, is present in the internal polar phase at a level of from 0.001% to 5% by weight, preferably from 0.001% to
855 3% by weight and more preferably from 0.001% to 1.5%.

The disinfecting wipes 30 according to the present invention are suitable for disinfecting various surfaces including animate surfaces (e.g. human skin) as well as inanimate surfaces including any hard-surfaces.

Regardless of its composition, the internal polar phase will preferably
860 comprise from about 67 to about 92% of the emulsion 12. Most preferably, the internal polar phase will comprise from about 82 to about 91% of the emulsion 12.

Where the internal polar phase comprises water as a major component, the internal phase can comprise water-soluble or dispersible materials that do not adversely affect the stability of the high internal phase inverse emulsion 12. One
865 such material that is typically included in the internal water phase is a water-soluble electrolyte. The dissolved electrolyte minimizes the tendency of materials present in the lipid phase to also dissolve in the water phase. Any electrolyte capable of imparting ionic strength to the water phase can be used. Suitable electrolytes include the water soluble mono-, di-, or trivalent inorganic salts such as the water-
870 soluble halides, e.g., chlorides, nitrates and sulfates of alkali metals and alkaline earth metals. Examples of such electrolytes include sodium chloride, calcium chloride, sodium sulfate, magnesium sulfate, and sodium bicarbonate. The

electrolyte will typically be included in a concentration in the range of from about 1 to about 20% of the internal water phase.

875 Other water-soluble or dispersible materials that can be present in the internal polar phase include thickeners and viscosity modifiers. Suitable thickeners and viscosity modifiers include polyacrylic and hydrophobically modified polyacrylic resins such as Carbopol and Pemulen, starches such as corn starch, potato starch, tapioca, gums such as guar gum, gum arabic, cellulose ethers such as hydroxypropyl
880 cellulose, hydroxyethyl cellulose, carboxymethyl cellulose, and the like. These thickeners and viscosity modifiers will typically be included in a concentration in the range of from about 0.05 to about 0.5% of the internal phase.

Again, where water is a major constituent of the internal polar phase, water-soluble or dispersible materials that can be present in the internal phase include
885 polycationic polymers to provide steric stabilization at the polar phase-lipid phase interface and nonionic polymers that also stabilize the emulsion 12. Suitable polycationic polymers include Reten 201, Kymene[®] 557H and Acco 711. Suitable nonionic polymers include polyethylene glycols (PEG) such as Carbowax. These polycationic and nonionic polymers will typically be included in a concentration in
890 the range of from about 0.1 to about 1.0% of the polar phase.

3. Emulsifier

Another key component of the high internal phase inverse emulsion 12 of the present invention is an emulsifier. In the emulsions 12 of the present invention, the emulsifier is included in an effective amount. What constitutes an "effective
895 amount" will depend on a number of factors including the respective amounts of the lipid and internal polar phase components, the type of emulsifier used, the level of impurities present in the emulsifier, and like factors. Typically, the emulsifier comprises from about 1 to about 10% of the emulsion 12. Preferably, the emulsifier will comprise from about 3 to about 6% of the emulsion 12. Most preferably, the
900 emulsifier will comprise from about 4 to about 5% of the emulsion 12. While the singular "emulsifier" is used to describe this component, more than one emulsifier may be used when forming the emulsion 12. Indeed, as discussed below, it may be desirable to utilize both a primary and a secondary emulsifier when certain materials are employed. Though not intended to limit the scope of the invention, where two
905 emulsifiers are utilized, preferred is where the primary emulsifier comprises from about 1 to about 7%, more preferably from about 2 to about 5%, most preferably from about 2 to about 4%, by weight of the emulsion 12; and the secondary emulsifier comprises from about 0.5 to about 3%, more preferably from about 0.75

to about 2%, most preferably from about 0.75 to about 1.5%, by weight of the
910 emulsion 12.

The emulsifier needs to be substantially lipid-soluble or miscible with the lipid phase materials, especially at the temperatures at which the lipid material melts. It also should have a relatively low HLB value. Emulsifiers suitable for use in the present invention have HLB values typically in the range of from about 2 to about 5
915 and can include mixtures of different emulsifiers. Preferably, these emulsifiers will have HLB values in the range of from about 2.5 to about 3.5.

Preferred emulsifiers for use in the present invention include silicone polymer emulsifiers such as alkyl dimethicone copolyols (e.g., Dow Corning Q2-5200 laurylmethicone copolyol). Such emulsifiers are described in detail in co-
920 pending U.S. Patent Application Number 08/767,120, filed Jan. 14, 1997 by L. Mackey (Case 5653C), which is incorporated by reference herein.

Other suitable emulsifiers are described in co-pending U.S. Patent Application Serial No. 08/336,456, filed November 9, 1994 by L. Mackey et al. (Case 5478), and U.S. Patent Application Serial No. 08/761,097, filed Dec. 5, 1996
925 by L. Mackey et al. (Case 5478R), both of which are incorporated by reference herein. Emulsifiers described therein include certain sorbitan esters, preferably the sorbitan esters of C₁₆-C₂₂ saturated, unsaturated or branched chain fatty acids. Because of the manner in which they are typically manufactured, these sorbitan esters usually comprise mixtures of mono-, di-, tri-, etc. esters. Representative
930 examples of suitable sorbitan esters include sorbitan monooleate (e.g., SPAN[®] 80), sorbitan sesquioleate (e.g., Arlacel[®] 83), sorbitan monoisostearate (e.g., CRILL[®] 6 made by Croda), sorbitan stearates (e.g., SPAN[®] 60), sorbitan triooleate (e.g., SPAN[®] 85), sorbitan tristearate (e.g., SPAN[®] 65) and sorbitan dipalmitates (e.g., SPAN[®] 40). Laurylmethicone copolyol is a particularly preferred emulsifier for use
935 in the present invention. Other suitable emulsifiers described therein include certain glyceryl monoesters, preferably glyceryl monoesters of C₁₆-C₂₂ saturated, unsaturated or branched chain fatty acids such as glyceryl monostearate, glyceryl monopalmitate, and glyceryl monobehenate; certain sucrose fatty acid esters, preferably sucrose esters of the C₁₂-C₂₂ saturated, unsaturated, and branched chain
940 fatty acids such as sucrose trilaurate and sucrose distearate (e.g., Crodesta[®] F10), and certain polyglycerol esters of C₁₆-C₂₂ saturated, unsaturated or branched fatty acids such as diglycerol monooleate and tetraglycerol monooleate. In addition to these primary emulsifiers, coemulsifiers can be used to provide additional water-in-lipid emulsion 12 stability. Suitable coemulsifiers include phosphatidyl cholines

945 and phosphatidyl choline-containing compositions such as the lecithins; long chain
C₁₆-C₂₂ fatty acid salts such as sodium stearate, long chain C₁₆-C₂₂ dialiphatic,
short chain C₁-C₄ dialiphatic quaternary ammonium salts such as ditallow dimethyl
ammonium chloride and ditallow dimethyl ammonium methylsulfate; long chain
C₁₆-C₂₂ dialkoyl(alkenoyl)-2-hydroxyethyl, short chain C₁-C₄ dialiphatic
950 quaternary ammonium salts such as ditallowoyl-2-hydroxyethyl dimethyl
ammonium chloride, the long chain C₁₆-C₂₂ dialiphatic imidazolinium quaternary
ammonium salts such as methyl-1-tallow amido ethyl-2-tallow imidazolinium
methylsulfate and methyl-1-oleyl amido ethyl-2-oleyl imidazolinium methylsulfate;
short chain C₁-C₄ dialiphatic, long chain C₁₆-C₂₂ monoaliphatic benzyl quaternary
955 ammonium salts such as dimethyl stearyl benzyl ammonium chloride, and synthetic
phospholipids such as stearamidopropyl PG-dimonium chloride (Phospholipid PTS
from Mona Industries). Interfacial tension modifiers such as cetyl and stearyl
alcohol for closer packing at the water-lipid interface can also be included.

Other emulsifiers useful in making the articles of the present invention
960 include the high viscosity emulsifiers described in co-pending U.S. Patent
Application Serial No. 08/759,547, filed Dec. 5, 1996 by L. Mackey and B. Hird,
which is incorporated by reference herein. These emulsifiers preferably have a
viscosity at 55°C of at least about 500 centipoise. (Viscosity can be measured using
a Lab-Line Instruments Brookfield-type rotating disc viscometer.) That application
965 describes specifically the use of emulsifiers such as those designated by The
Lubrizol Corporation (Wickliffe, OH) as OS-122102, OS-121863, OS-121864, OS-
80541J and OS-80691J, which are reaction products of (i) a hydrocarbyl-substituted
carboxylic acid or anhydride (preferably a polyisobutylene-substituted succinic acid
or anhydride); and (ii) an amine or alcohol, to form an ester or amide product. The
970 materials, and methods for their manufacture, are described in U.S. Patent Number
4,708,753, issued November 24, 1987 to Forsberg [see especially Column 3, lines
32-38; and Column 8, line 10, to Column 26, line 68], and U.S. Patent Number
4,844,756, issued July 4, 1989 to Forsberg, both of which are incorporated by
reference herein.

975 Other materials believed to be useful in the present invention include
hydrocarbon-substituted succinic anhydrides such as those described in U.S. Patent
3,215,707, issued November 2, 1965 to Rense; U.S. Patent 3,231,587, issued
January 25, 1996 to Rense; U.S. Patent Number 5,047,175, issued to Forsberg on
September 10, 1991; and World Patent Publication Number WO 87/03613,

980 published by Forsberg on June 18, 1987. These publications are all incorporated by reference herein.

Still other materials useful as the emulsifier, particularly as a co-emulsifier with a high viscosity primary emulsifier, are ABA block copolymers of 12-hydroxystearic acid and polyethylene oxide. Such materials are described in U.S.
985 Patent 4,875,927, issued to T. Tadros on October 24, 1989, which is incorporated by reference herein. A representative material of this class useful as an emulsifier herein is available from Imperial Chemical Industries PLC as Arlacel P135.

While all the above-described materials may be used as a single emulsifier, it may be desired to employ more than one emulsifier when forming the emulsion 12.
990 In particular, where a high viscosity emulsifier is used, a certain "tacky" feel may result when the treated article is subjected to in-use shear pressures that break the emulsion 12. In this case, it may be desirable to use a relatively lower viscosity co-emulsifier with the primary emulsifier, to allow use of a lower amount of the main emulsifier, thereby alleviating tackiness. In one preferred embodiment of the present
995 invention, a primary emulsifier available from Lubrizol (i.e., reaction product of polyisobutylene-substituted succinic acid and an amine) and a secondary emulsifier that is an ABA block copolymer of poly-12-hydroxystearic acid and polyethylene oxide (e.g., ICI's Arlacel P135) are used to provide an emulsion 12 with improved water retention levels over time, as well as beneficial reduced tackiness (via
1000 reduction in level of primary emulsifier). The skilled artisan will recognize that different desired end-uses will dictate whether multiple emulsifiers are appropriate, and the appropriate relative amounts of each if appropriate. Such a determination will require only routine experimentation by the skilled artisan in view of the present disclosure.

1005 4. Optional Emulsion Components

The high internal phase inverse emulsions 12 of the present invention can also comprise other optional components typically present in moisture containing solutions of this type. These optional components can be present in either the continuous lipid phase or the internal polar phase and include perfumes,
1010 antimicrobial (e.g., antibacterial) actives, pharmaceutical actives, deodorants, opacifiers, astringents, skin moisturizers, and the like, as well as mixtures of these components. All of these materials are well known in the art as additives for such formulations and can be employed in effective, appropriate amounts in the emulsions 12 of the present invention. A particularly preferred optional component

1015 that is included in the emulsions 12 of wet-like cleansing wipes 30 according to the present invention is glycerin as a skin conditioning agent.

The emulsion 12 component of the articles of the present invention is described and claimed herein in terms of components, and corresponding amounts of the components, that are present after emulsion 12 formation. That is, when the
1020 stable emulsion 12 is formed and applied to the carrier. It is understood that the description (components and amounts) of the emulsion 12 also encompasses emulsions 12 formed by combining the described components and levels, regardless of the chemical identity of the components after emulsification and application to the carrier.

1025 C. Other Optional Article Components

Besides the high internal phase inverse emulsion 12, there are other optional components that can be included in the articles of the present invention, typically for the purpose of improving the cleaning performance of the article when the internal polar phase of the emulsion 12 is released. Certain of these optional components
1030 cannot be present in the emulsion 12 at significant levels (e.g., greater than 2% of the internal phase) because they can cause premature disruption of the emulsion 12. These include various anionic detergent surfactants that have relatively high HLB values (e.g., HLBs of from about 10 to about 25), such as sodium linear alkylbenzene sulfonates (LAS) or alkyl ethoxy sulfates (AES), as well as nonionic
1035 detergent surfactants such as alkyl ethoxylates, alkyl amine oxides, alkyl polyglycosides, zwitterionic detergent surfactants, ampholytic detergent surfactants, and cationic detergent surfactants such as cetyl trimethyl ammonium salts, and lauryl trimethyl ammonium salts. See U.S. Patent 4,597,898 (Vander Meer), issued July 1, 1986 (herein incorporated by reference), especially columns 12 through 16 for
1040 representative anionic, nonionic, zwitterionic, ampholytic and cationic detergent surfactants. Instead, these high HLB detergent surfactants can be applied or included in the article separately from the emulsion 12. For example, an aqueous solution of these high HLB detergent surfactants can be applied to the carrier either before or after application of the emulsion 12 to the carrier. During wiping, the
1045 emulsion 12 is disrupted, releasing the polar phase components so that they can then be combined with the high HLB detergent surfactant to provide improved hard surface cleaning.

Though the description of the invention generally relates to applying a single emulsion 12 to the carrier, it is recognized that two or more different emulsions 12
1050 may be utilized in preparing a single article. In such embodiments, the emulsions 12

may differ in a variety of ways, including but not limited to, the ratio of the internal polar phase and the external lipid phase, the emulsifiers used, the components used for either or both of the internal and lipid phases, and the like. Utilization of multiple emulsions 12 in one article may be particularly desirable when two or more components are incompatible with each other, but can each be included in a separate emulsion 12. Alternatively, if a particular reaction is desired at the time of use, the reactants can be provided in separate emulsions 12. Upon shearing of the emulsions 12 during use, the desired reaction will occur. For example, where foaming is desired during the wiping processes, a mild acid can be incorporated in the internal polar phase of one emulsion 12, while bicarbonate is incorporated in the internal polar phase of a second emulsion 12. Upon shearing of the emulsions 12 during use, the reactants interact to provide the desired foam.

Suitable emulsion 12 descriptions are also found in the aforementioned commonly assigned World Patent Application WO 96/14835, published May 23, 1996, in the name of Mackey et al., incorporated herein by reference.

A Preferred Pattern

As noted above, the emulsion 12 may be applied to the substrate 10 in a discontinuous pattern. As noted above, a discontinuous coating is a coating wherein regions of the substrate are free of the coating intermediate regions of the substrate upon which the coating is disposed. Suitable discontinuous patterns comprise discrete island regions of the emulsion 12, essentially continuous networks of emulsion 12, and, discrete macropatterns of the emulsion 12. In a preferred embodiment, emulsion 12 is applied in discrete stripes of the emulsion 12, as shown in FIG. 12. The stripes are preferably continuous, as illustrated, but may, alternatively, comprise a pattern of discontinuous, discrete segments which collectively comprise a stripe. If stripes are selected, the stripes are preferably oriented in the machine direction, for ease of manufacture.

The emulsion 12 may be applied to and disposed on the substrate 10 by any suitable means well known in the art, such as gravure printing, flexographic printing, spraying, and preferably extruding. More preferably, the emulsion 12 is extruded as a series of continuous cylindrically shaped beads. A continuous cylindrical shape is preferred for the emulsion 12 because this shape reduces the surface area to volume ratio of the emulsion 12.

The stripes may be straight, as shown, may be sinusoidally shaped, etc. If sinusoidally shaped stripes are selected, preferably the stripes are in phase, so that

parallelism is maintained and each stripe remains equally spaced from the adjacent stripes.

It is desired that the emulsion 12 have the minimum possible surface area to volume ratio. Minimizing the surface area to volume ratio reduces water loss from the emulsion 12 due to evaporation. Preferably the emulsion 12 has a surface area to volume ratio of less than or equal to about 4/unit length, more preferably less than or equal to about 3/unit length, and most preferably less than or equal to about 2/unit length, wherein the unit length is measured in the cross section of the emulsion 12. Suitable surface area to volume ratios for cylindrical beads of emulsion 12 range from about 40 to 200 inches⁻¹ and preferably about 75 to 125 inches⁻¹.

However, the optimum results are not achieved by presenting a single, unitary sphere of emulsion 12 to the user with the wipe 30. While such an arrangement would likely provide adequate water, the water distribution would be highly localized and may not adequately spread throughout the surface area of the wipe 30. Preferably, the distribution of the emulsion 12, or, more particularly, the water released therefrom, approximates the perception of a water spray onto the skin.

It will be apparent to one skilled in the art that as the basis weight and absorbency of the substrate 10 increase, the amount of water necessary to locally saturate the substrate 10 will likewise increase. Therefore, as the basis weight and/or absorbency of the substrate 10 increases, the amount of emulsion 12 applied to the substrate 10 should increase proportionately.

Preferably, about 5 to 35 percent, and more preferably about 10 to 25 percent of the surface area of the wipe 30 has emulsion 12 disposed thereon. Upon rupture, the emulsion 12 locally wets corresponding regions of the substrate 10. The wetted portion of the substrate 10 may range from about 10 to 90 percent of the surface area of the substrate 10, with, of course, the balance of the surface area of the substrate 10 remaining dry due to the discontinuous pattern.

It will be apparent that in use the percentage of wetted surface area will be greater than the percentage of surface area initially coated by the emulsion 12. It is to be further understood that, of course, the entire wipe 30 may be wetted as a function of the time and/or use of the wipe 30.

Thus, beads of emulsion 12 are preferably applied to the substrate 10 in an arrangement that accommodates both the diameter and pitch of the beads in a preferred geometry. The amount of water carried by the emulsion 12 increases according to the square of the diameter of the beads. Therefore, as the diameter of

the beads increases, the pitch between adjacent stripes of emulsion 12 should likewise increase. Suitable pitches between adjacent beads of emulsion range from about 0.030 to 1.500 inches, and preferably from about 0.175 to 0.375 inches.

If the emulsion 12 is to be directly exposed to the surface, i.e., disposed on the outside of the substrate 10 as the wipe 30 is presented to the user, the emulsion 12 preferably comprises a level at least about 25 percent, more preferably at least about 50 percent, and most preferably at least about 75 percent of that of the basis weight of the substrate 10. Alternatively, if the emulsion 12 is disposed between two-ply of substrate 10 in a laminate construction, for tissue applications, preferably the emulsion 12 comprises at least about 150 percent, more preferably at least about 200 percent, and most preferably at least about 250 percent of the combined basis weight of the two plies. In such a laminate construction for hard surface cleaning applications, preferably the emulsion 12 comprises at least about 500 percent, more preferably at least about 650 percent, and most preferably at least about 800 percent of the combined basis weight of the two plies.

It is to be noted that the basis weights described herein refer to the overall basis weight of the substrate 10, as an average of the various different basis weight regions contained within the substrate 10. The basis weight of the substrate 10 may be measured according to ASTM Test Method D3776-9, which test method is incorporated herein by reference, with results reported in pounds per 3,000 square feet. The emulsion 12 weight is gravimetrically measured once the basis weight of the substrate 10 is known, as the tare.

If desired, the uncoated regions 34 of the substrate 10 free of the emulsion 12 may be slightly wider in the transverse (cross machine) direction at the edges of the wipe 30 than the corresponding uncoated regions 34 disposed at the interior of the wipe 30. This arrangement accommodates processing and slitting of a wide, multi-roll position web of the wipe 30 into narrower discrete units for transport and sale to the consumer. It will be apparent to one skilled in the art that the uncoated regions 34 free of the substrate may form a border at the ends of the wipe 30 as well. Such a geometry can easily be accomplished by not applying the emulsion 12 continuously. Instead, the emulsion 12 may be intermittently applied in the machine direction. The substrate 10 is then cut or perforated in the cross machine direction coincident the regions 34 free of the emulsion 12 in order to yield discrete or separable wipes 30.

Referring again to Figure 10, the emulsion 12 may define decorative indicia such as macropatterns. The macropatterns may be used as shown, or may be

superimposed on the stripe pattern of emulsion 12 described with reference to FIG. 12. Macropatterns of emulsion 12 provide the advantage that locally heavier loadings of water can be applied from a pattern that provides an aesthetically pleasing visual cue to the user of where the emulsion 12 is present. Macropatterns of emulsion 12 may form decorative indicia. Such decorative indicia may be provided in the form of flowers, butterflies, clouds, tradenames, advertising, or any other planar pattern envisioned by the user.

In a preferred embodiment, the substrate 10 comprises a multi-basis weight tissue. A multi-basis weight substrate 10 may be made according to the aforementioned patents describing the same and incorporated by reference hereinabove. A multi-basis weight substrate 10 provides the advantage that excess water will more easily saturate the low basis weight regions and, therefore, be more readily applied to the surface. Preferably the multi-basis weight substrate 10 comprises an essentially continuous high basis weight network region with discrete low basis weight regions distributed throughout the essentially continuous network.

Alternatively, a substrate 10 having a semi-continuous pattern of high and low basis weight regions may be selected. In yet a less preferred embodiment, a substrate 10 having an essentially continuous network of low basis weight regions with discrete high basis weight regions distributed therein may be utilized, provided, however, one is willing to accept the strength tradeoff inherent in such a substrate 10. Such a substrate 10, prophetically, provides the benefit that the essentially continuous pattern of low basis weight regions will more readily allow water expressed from the emulsion 12 to penetrate the substrate 10 and be transferred to the surface.

If a substrate 10 having an essentially continuous high basis weight region is selected, preferably the pitch of the discrete low basis weight regions is less than the pitch between adjacent stripes of the emulsion 12. This relative difference in pitches assures that the emulsion 12 will intercept the low basis weight regions and be more readily transmitted therethrough, as described above.

For the embodiments described herein for tissue applications, a substrate 10 having a basis weight of about 7 to 10 pounds per 3,000 square feet per ply and about 50 to 300, and more preferably about 100 to 200 discrete low basis weight regions per square inch is suitable. For hard surface cleaning applications, a substrate 10 having a basis weight of about 20 pounds per 3,000 square feet and about 100 to 200 discrete low basis weight regions per square inch is suitable.

In a preferred embodiment, the wipe 30 may be made according to commonly assigned U.S. Application Ser. No. 08/886,764, entitled "Cleaning Articles Comprising a Cellulosic Fibrous Structure Having Discrete Basis Weight Regions Treated with A High Internal Phase Inverse Emulsion" filed July 1, 1997, in the names of Nicholas J. Nissing et al., the disclosure of which application is incorporated herein by reference.

If a substrate 10 having a semi-continuous basis weight pattern is selected, such a substrate 10 may be made according to commonly assigned U.S. Pat. No. 5,628,876, issued May 13, 1997 to Ayers et al., and incorporated herein by reference. Preferably, the semi-continuous pattern is oriented in the machine direction. If such a geometry is selected, prophetically, the beads of emulsion 12 may be applied to the semi-continuous patterned substrate 10 such that the emulsion 12 is juxtaposed with, and preferably coincident, the low basis weight regions of the substrate 10. This arrangement provides the advantage, discussed above, that the water expressed from the emulsion 12 is more readily transmitted through the low basis weight regions of the semi-continuous patterned substrate 10. The low basis weight regions of the semi-continuous pattern, if parallel to the machine direction, may be disposed on a pitch less than or equal to the stripes of the emulsion 12.

It will be apparent to one skilled in the art that many variations are feasible and within the scope of the claimed invention. For example, a laminate construction comprising emulsion 12 disposed between two plies of substrate 10 may be made as described above. It is not necessary, however, that the plies be identical. One ply may be a nonwoven for strength. The other ply may be a tissue to provide for transmission of the water to the surface. If desired, the nonwoven ply may be treated to render it hydrophobic and thereby ensure that the water released from the emulsion 12 is transferred to the surface via the tissue ply.

Alternatively, a laminate comprising two tissue plies may be selected. One of the plies may have a multi-basis weight region pattern described above. The multi-basis weight region may comprise a semi-continuous pattern. The other ply may comprise a single basis weight region for strength. This embodiment provides for greater transmission of water through one of the plies than through the other ply. Alternatively, the multi-basis weight region ply may comprise an essentially continuous network of high basis weight regions with discrete low basis weight regions distributed therein.

In yet another embodiment, a laminate having a plurality of several laminae may be provided. The laminae may comprise alternating plies of substrate 10 and

emulsion 12. Such a laminate may have two outwardly facing substrate 10 laminae as described above. The emulsion 12 may be wholly contained within the laminate.
1230 Alternatively, emulsion 12 may be disposed on one exposed surface of such a laminate.

In yet another embodiment, stripes of emulsion 12 may be comprised of discrete spheres of emulsion 12. The discrete spheres of emulsion 12 are preferably juxtaposed to collectively form the discontinuous pattern. This arrangement
1235 provides the advantage of a suitable surface area to volume ratio, similar to the generally cylindrically shaped beads described above. Although stripes of discrete spheres are preferred, one of ordinary skill will understand that discrete spheres of emulsion 12 may be juxtaposed to form any discontinuous pattern desired.

Yet another variation, is to vary the amount of the emulsion 12 within the
1240 discontinuous pattern. For example, certain stripes of emulsion 12 may have relatively more emulsion 12 than other stripes. This arrangement allows for locally heavier loading of the water onto the surface to be cleaned, but yet still provides relatively drier edges to minimize the amount of residual water left on the surface.

It will be apparent that, depending upon the desired application, the wipes 30
1245 may be provided as discrete units, may be joined in seriatim by perforations, etc. The wipes 30 may be individually dispensed, such as is commonly done for facial tissues. If individual dispensing is desired, the wipes may be provided in either a reach-in or pop up dispenser, as disclosed in commonly assigned U.S. Pats. 4,623,074 issued Nov. 8, 1986 to Dearwester; 5,520,308 issued May 28, 1996 to
1250 Berg, Jr. et al. and 5,516,001 issued May 14, 1996 to Muckenfuhs et al., the disclosures of which are incorporated herein by reference. Alternatively, the wipes 30 may be core-wound, as disclosed in commonly assigned U.S. Pat. No. 5,318,235, issued June 7, 1994 to Sato, the disclosure of which is incorporated herein by reference. If desired, the wipes 30 may be lightly compressed for packaging,
1255 provided care is taken not to rupture the emulsion 12. Such packaging may be accomplished as disclosed in commonly assigned U.S. Patent 5,664,897, issued July 8, 1997 to Young et al., the disclosure of which is incorporated herein by reference.

Accordingly, while particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various
1260 other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

WHAT IS CLAIMED IS:

1. An apparatus for making a selectively-coated web, said apparatus characterized by:
 - (a) coating means, preferably a gravure printing roller, for applying a coating to a web in a plurality of coated regions, said coated regions being in spaced, parallel relationship to a plurality of uncoated regions; and
 - (b) support means, preferably a rolling support member, for supporting said web after coating, said support means comprising a plurality of support members, each of said support members being in registry with an uncoated region.
2. The apparatus of Claim 1, further characterized in that said coating means comprises an extruder.
3. The apparatus of either of Claims 1 or 2, characterized in that said rolling support comprises a plurality of discrete rolling members secured to a shaft member, wherein each of said discrete rolling members is positioned in registry with an uncoated region.
4. The apparatus of any of the previous Claims, characterized in that said rolling support comprises a roller, preferably an idler roller, having a first diameter, said roller including a plurality of axially spaced apart web-contacting disks having a second diameter greater than said first diameter, each of said web-contacting disks being in registry with an uncoated region and preferably being integral with said roller.
5. The apparatus of any of the previous Claims, characterized in that said web contacting disks have a web-contacting periphery having a high coefficient of friction, such that said web makes rolling contact with said web-contacting disks of said roller.
6. A method of forming a coated web without producing buildup of coating material on idler rollers, said method characterized by the steps of:
 - (a) coating a web in a plurality of coated regions, said coated regions being in parallel spaced apart relationship to uncoated regions;
 - (b) providing support members, each of said support members being aligned in registry with an uncoated region; and

- (c) guiding said coated web in contact with said support members such that each said support member is in registry with an uncoated region of said web.
7. The method of Claim 6, characterized in that said coating in said coated region is discontinuous.
 8. The method of Claims 6 or 7, characterized in that said coating step comprises the process of printing.
 9. The method of any of Claims 6 through 8, characterized in that said printing process comprises gravure printing.
 10. The method of any of Claims 6 through 9, characterized in that said coating step comprises extrusion.

1/10

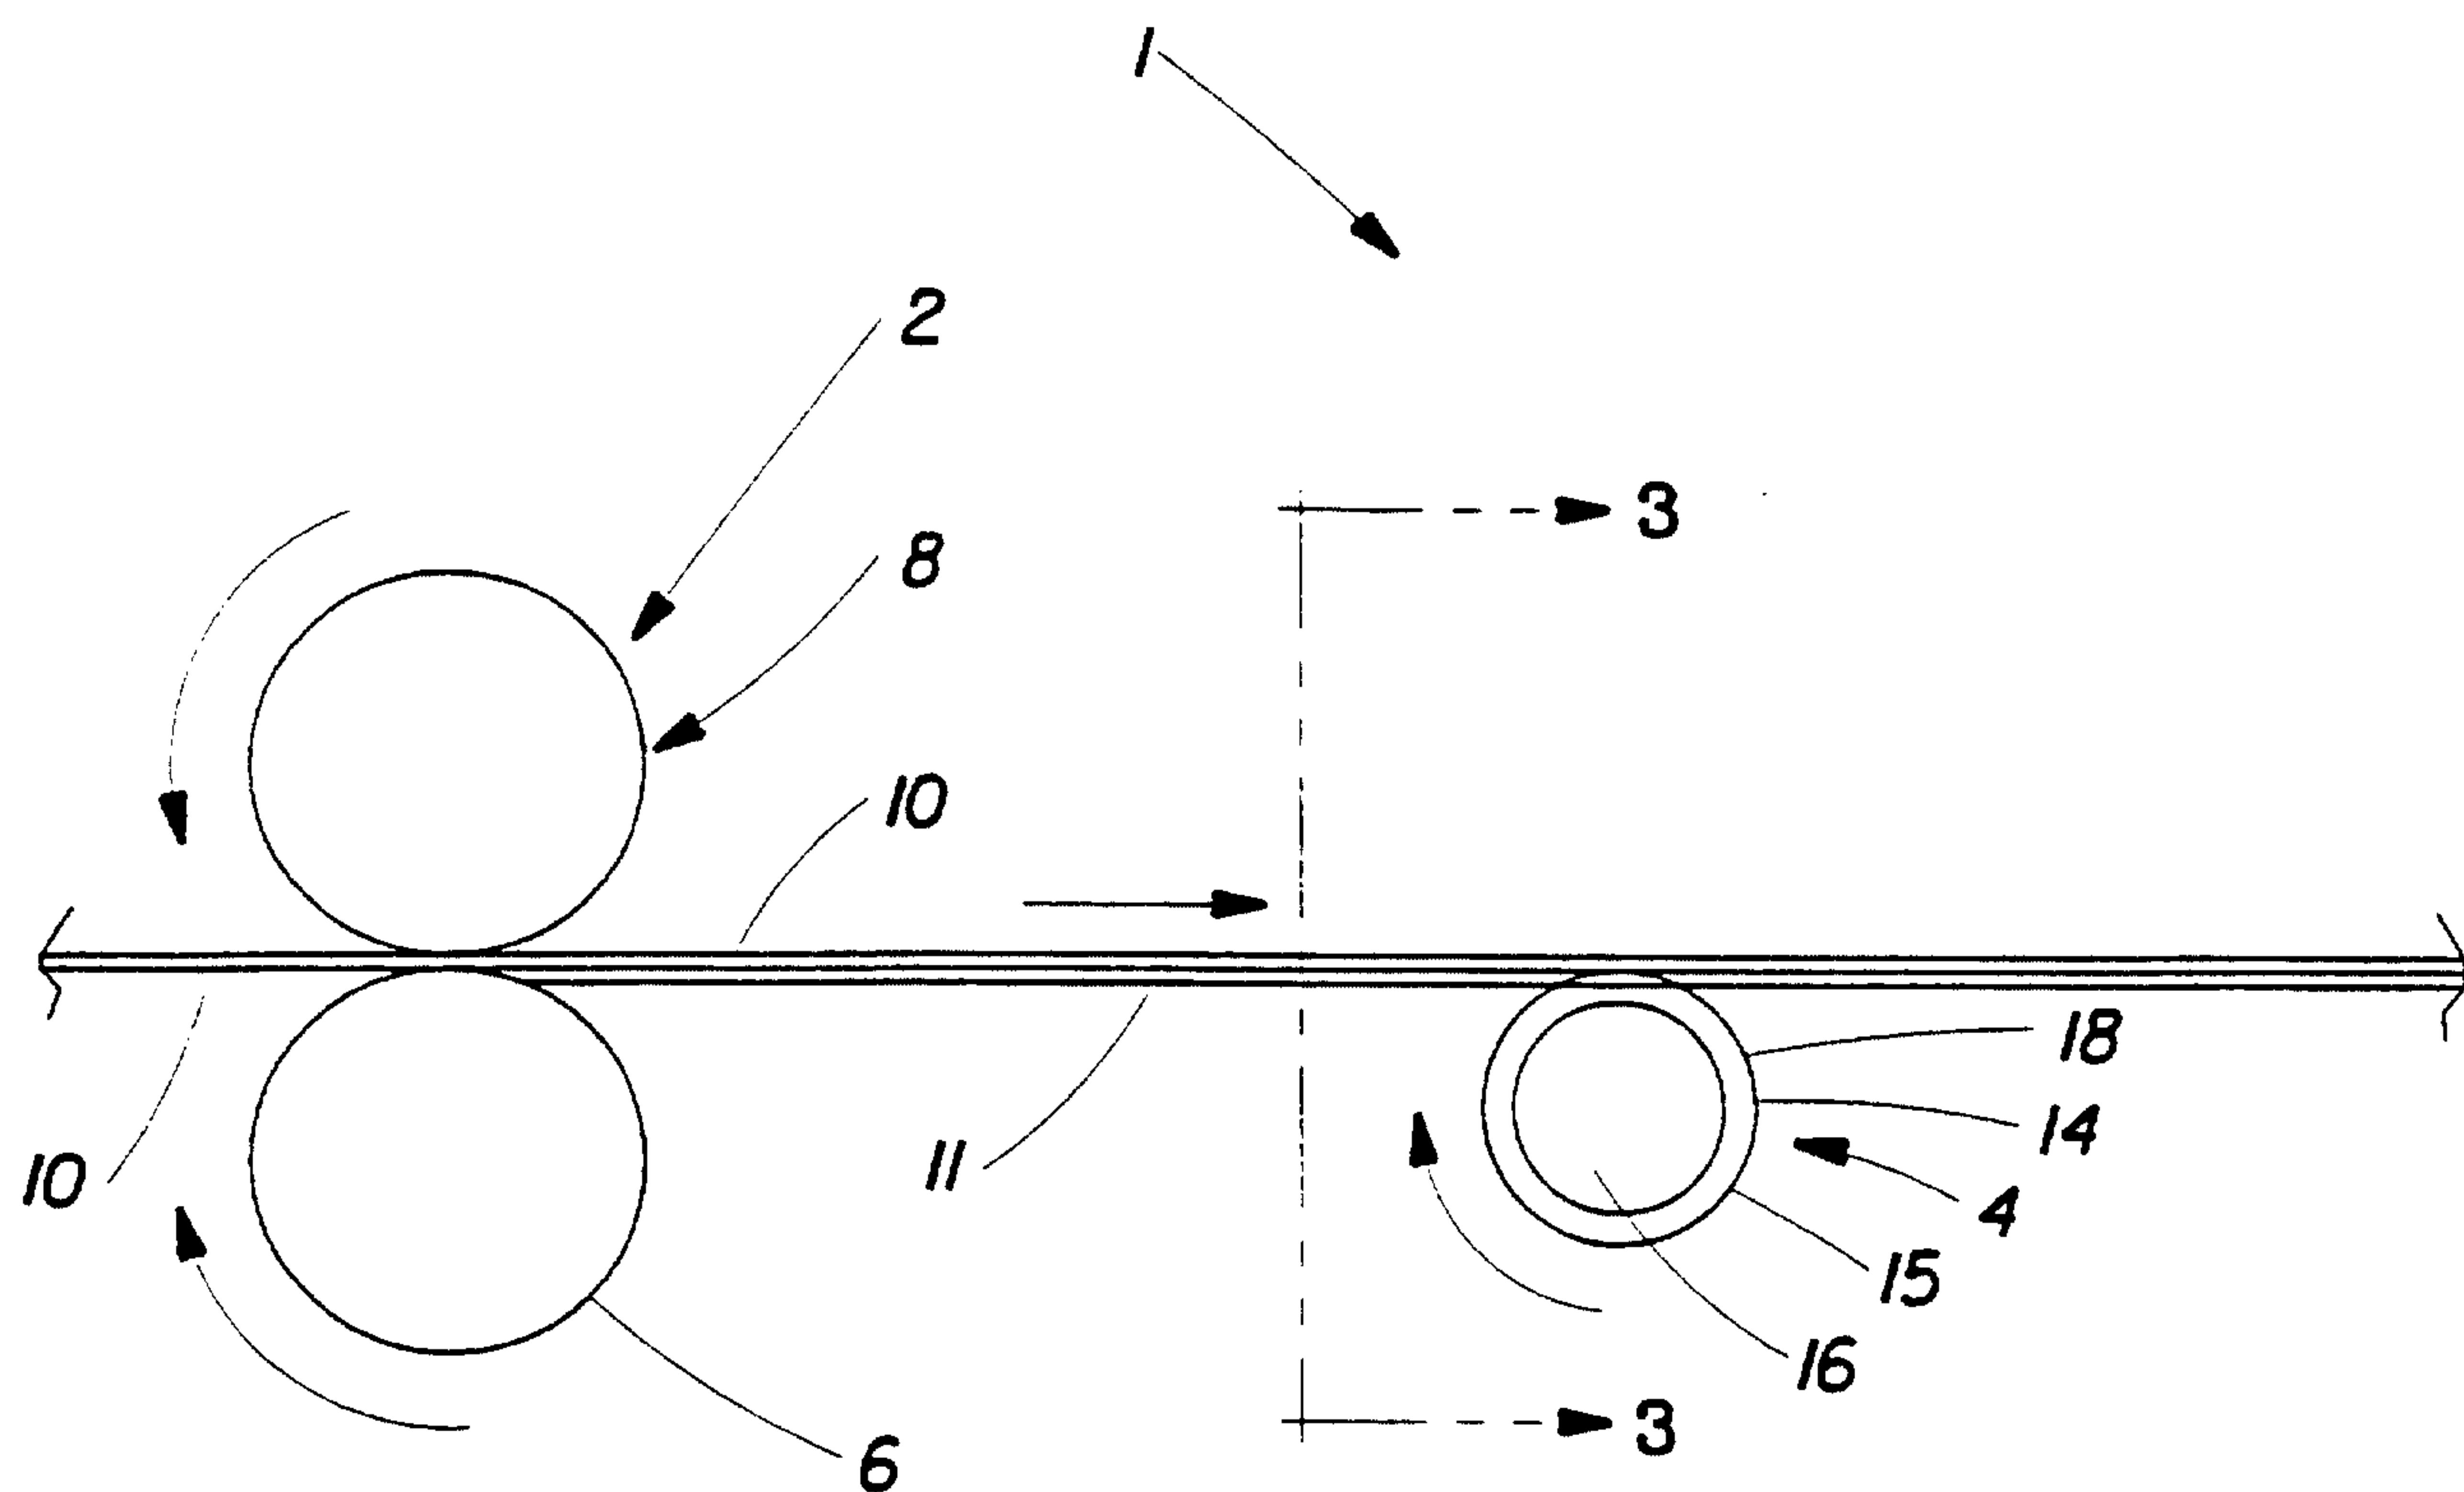


Fig. 1

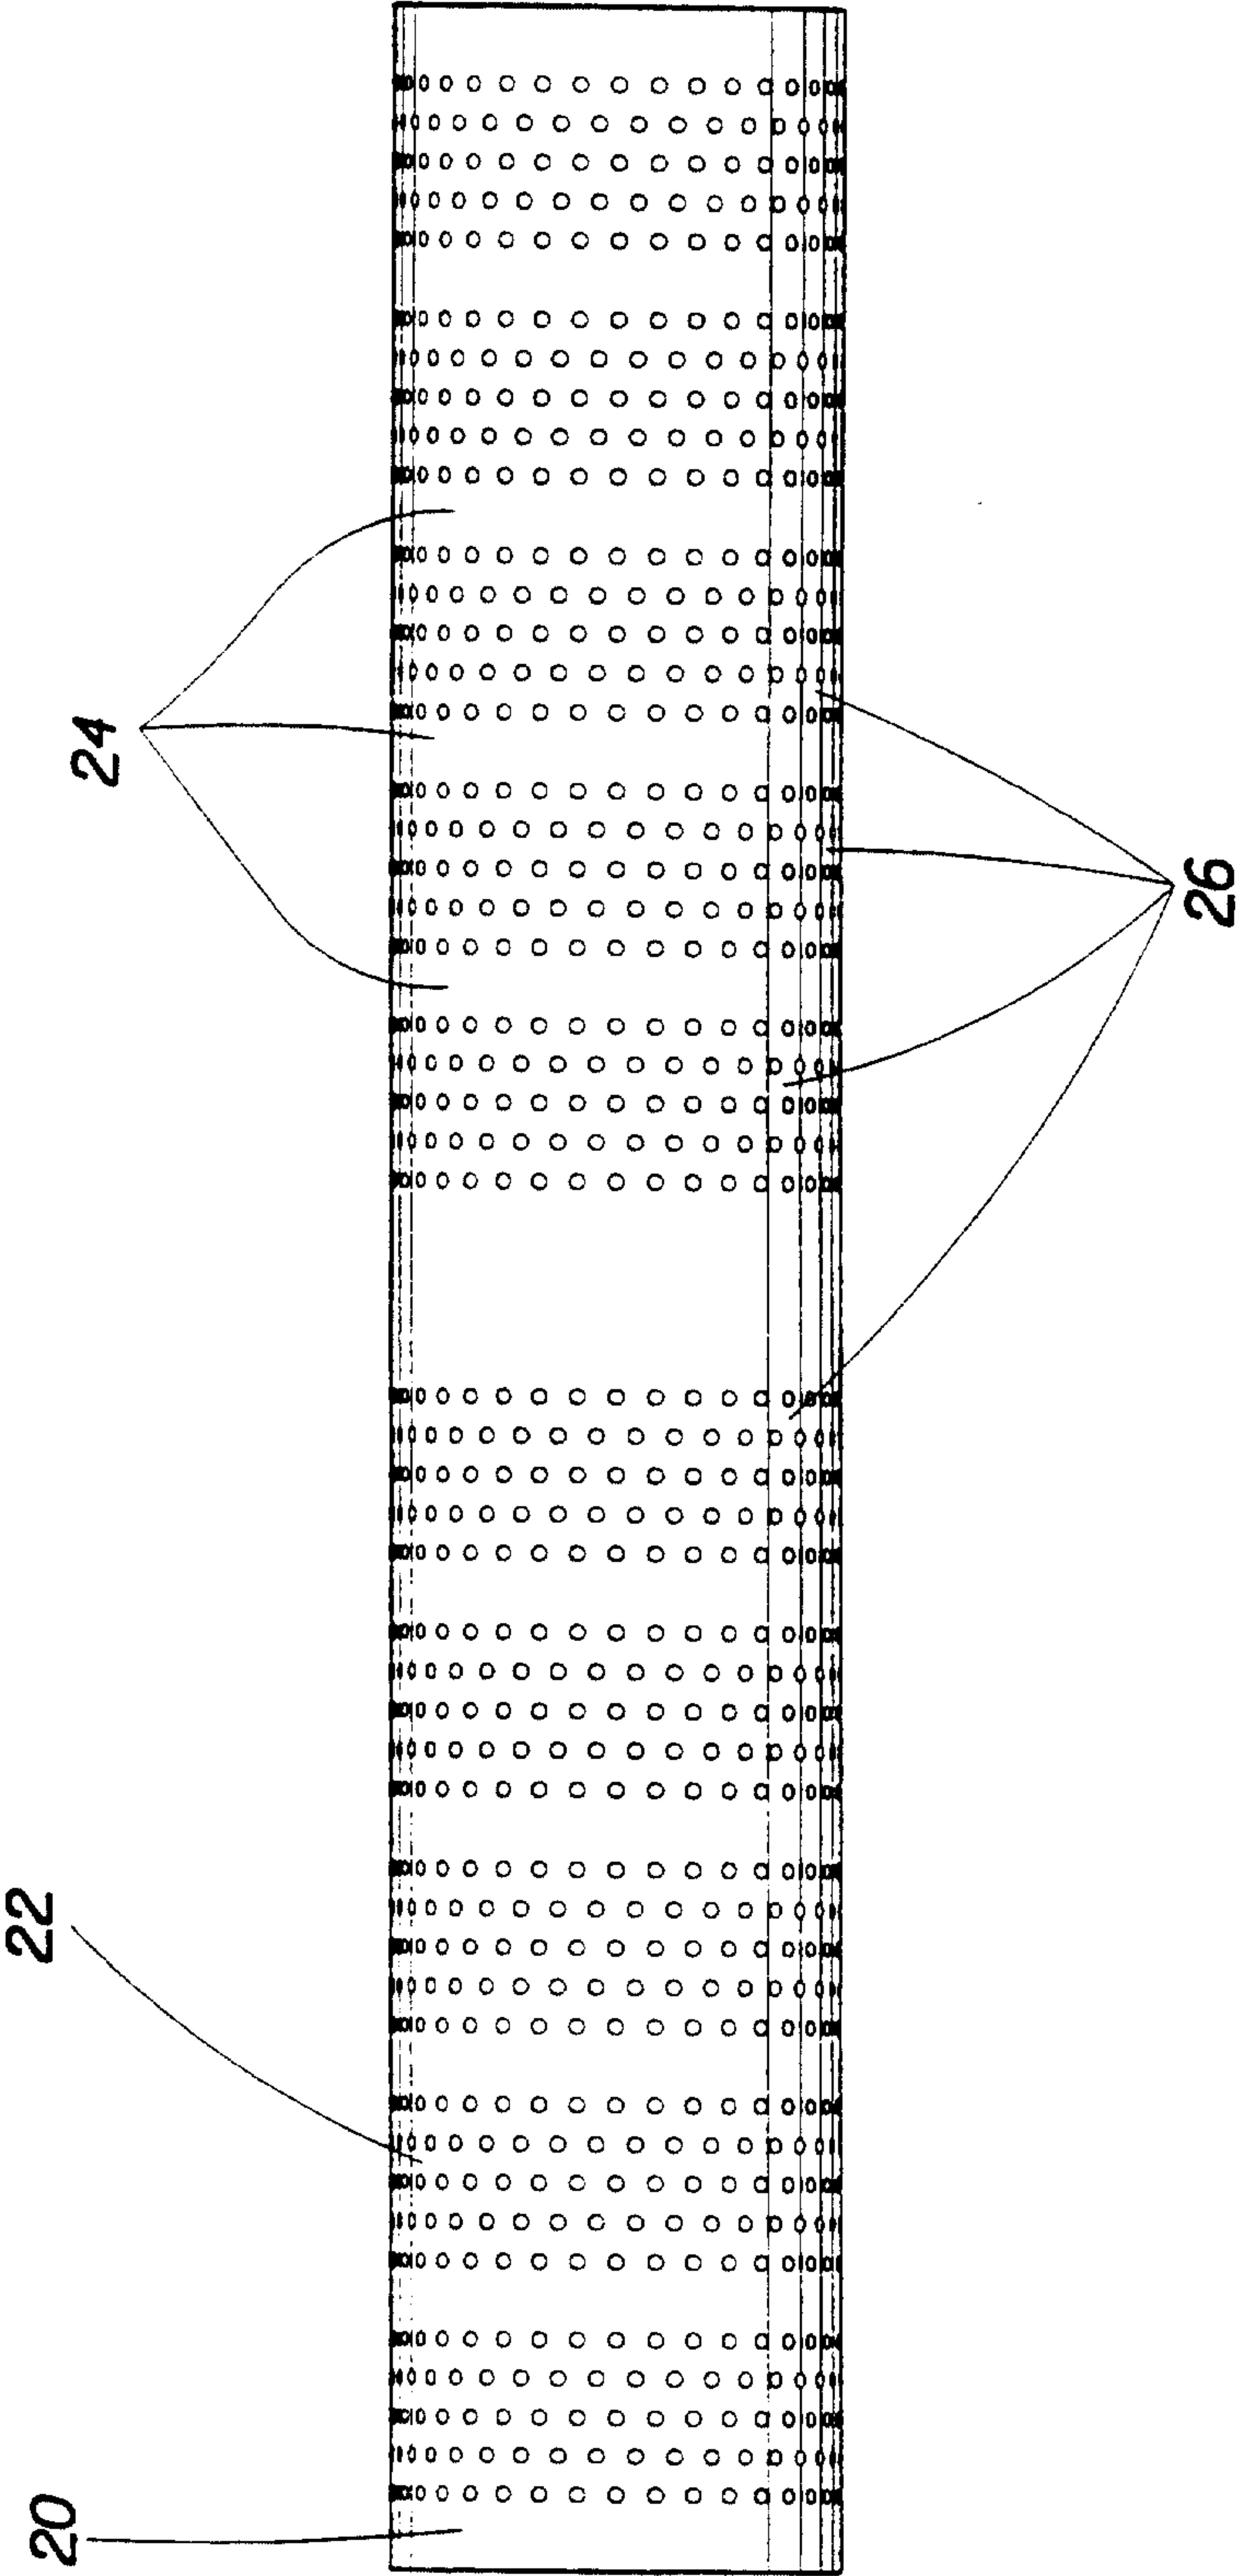


Fig. 2

3/10

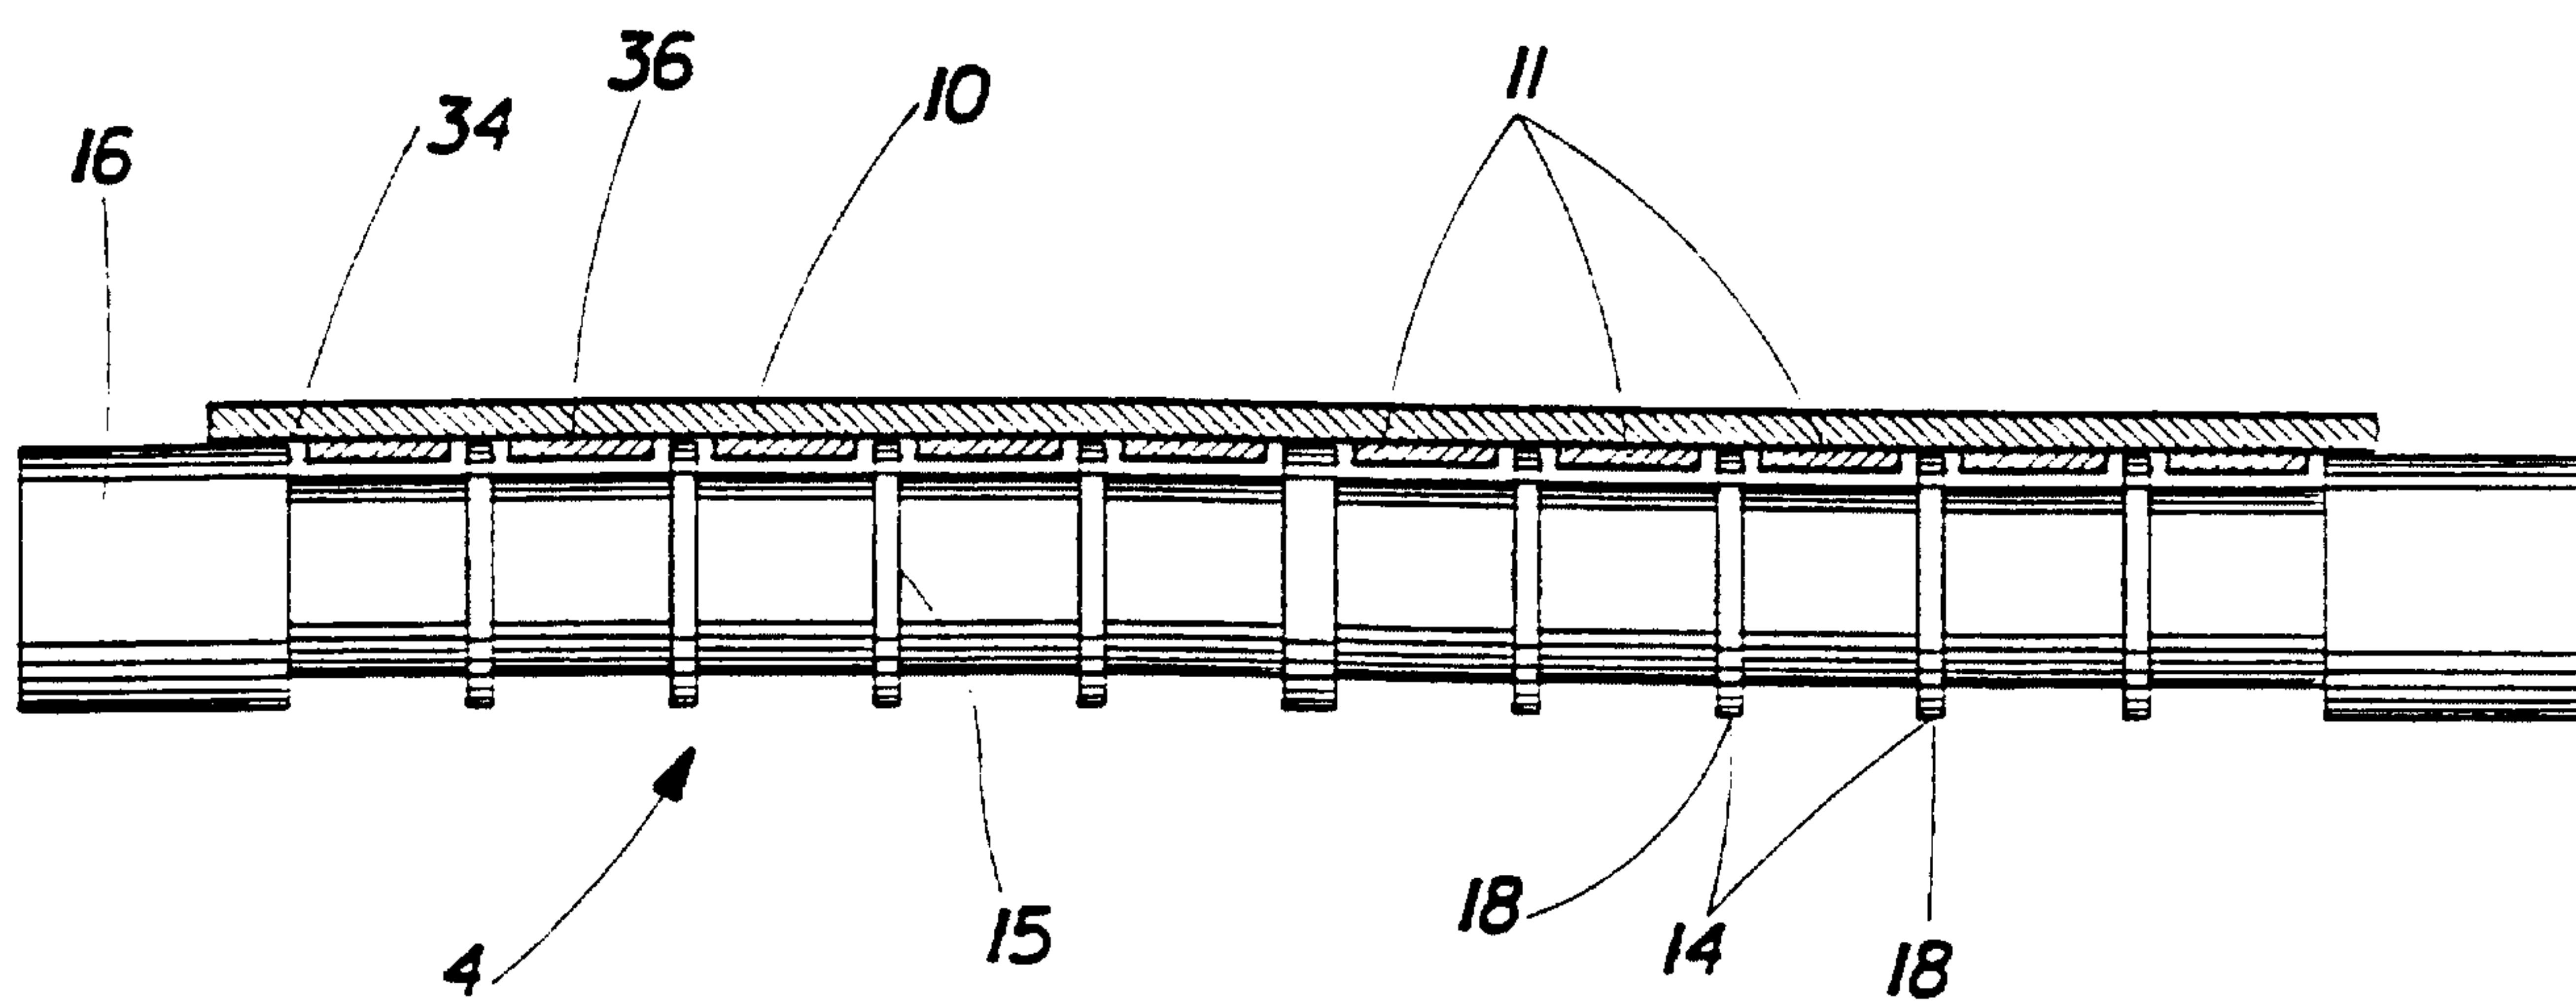


Fig. 3

4/10



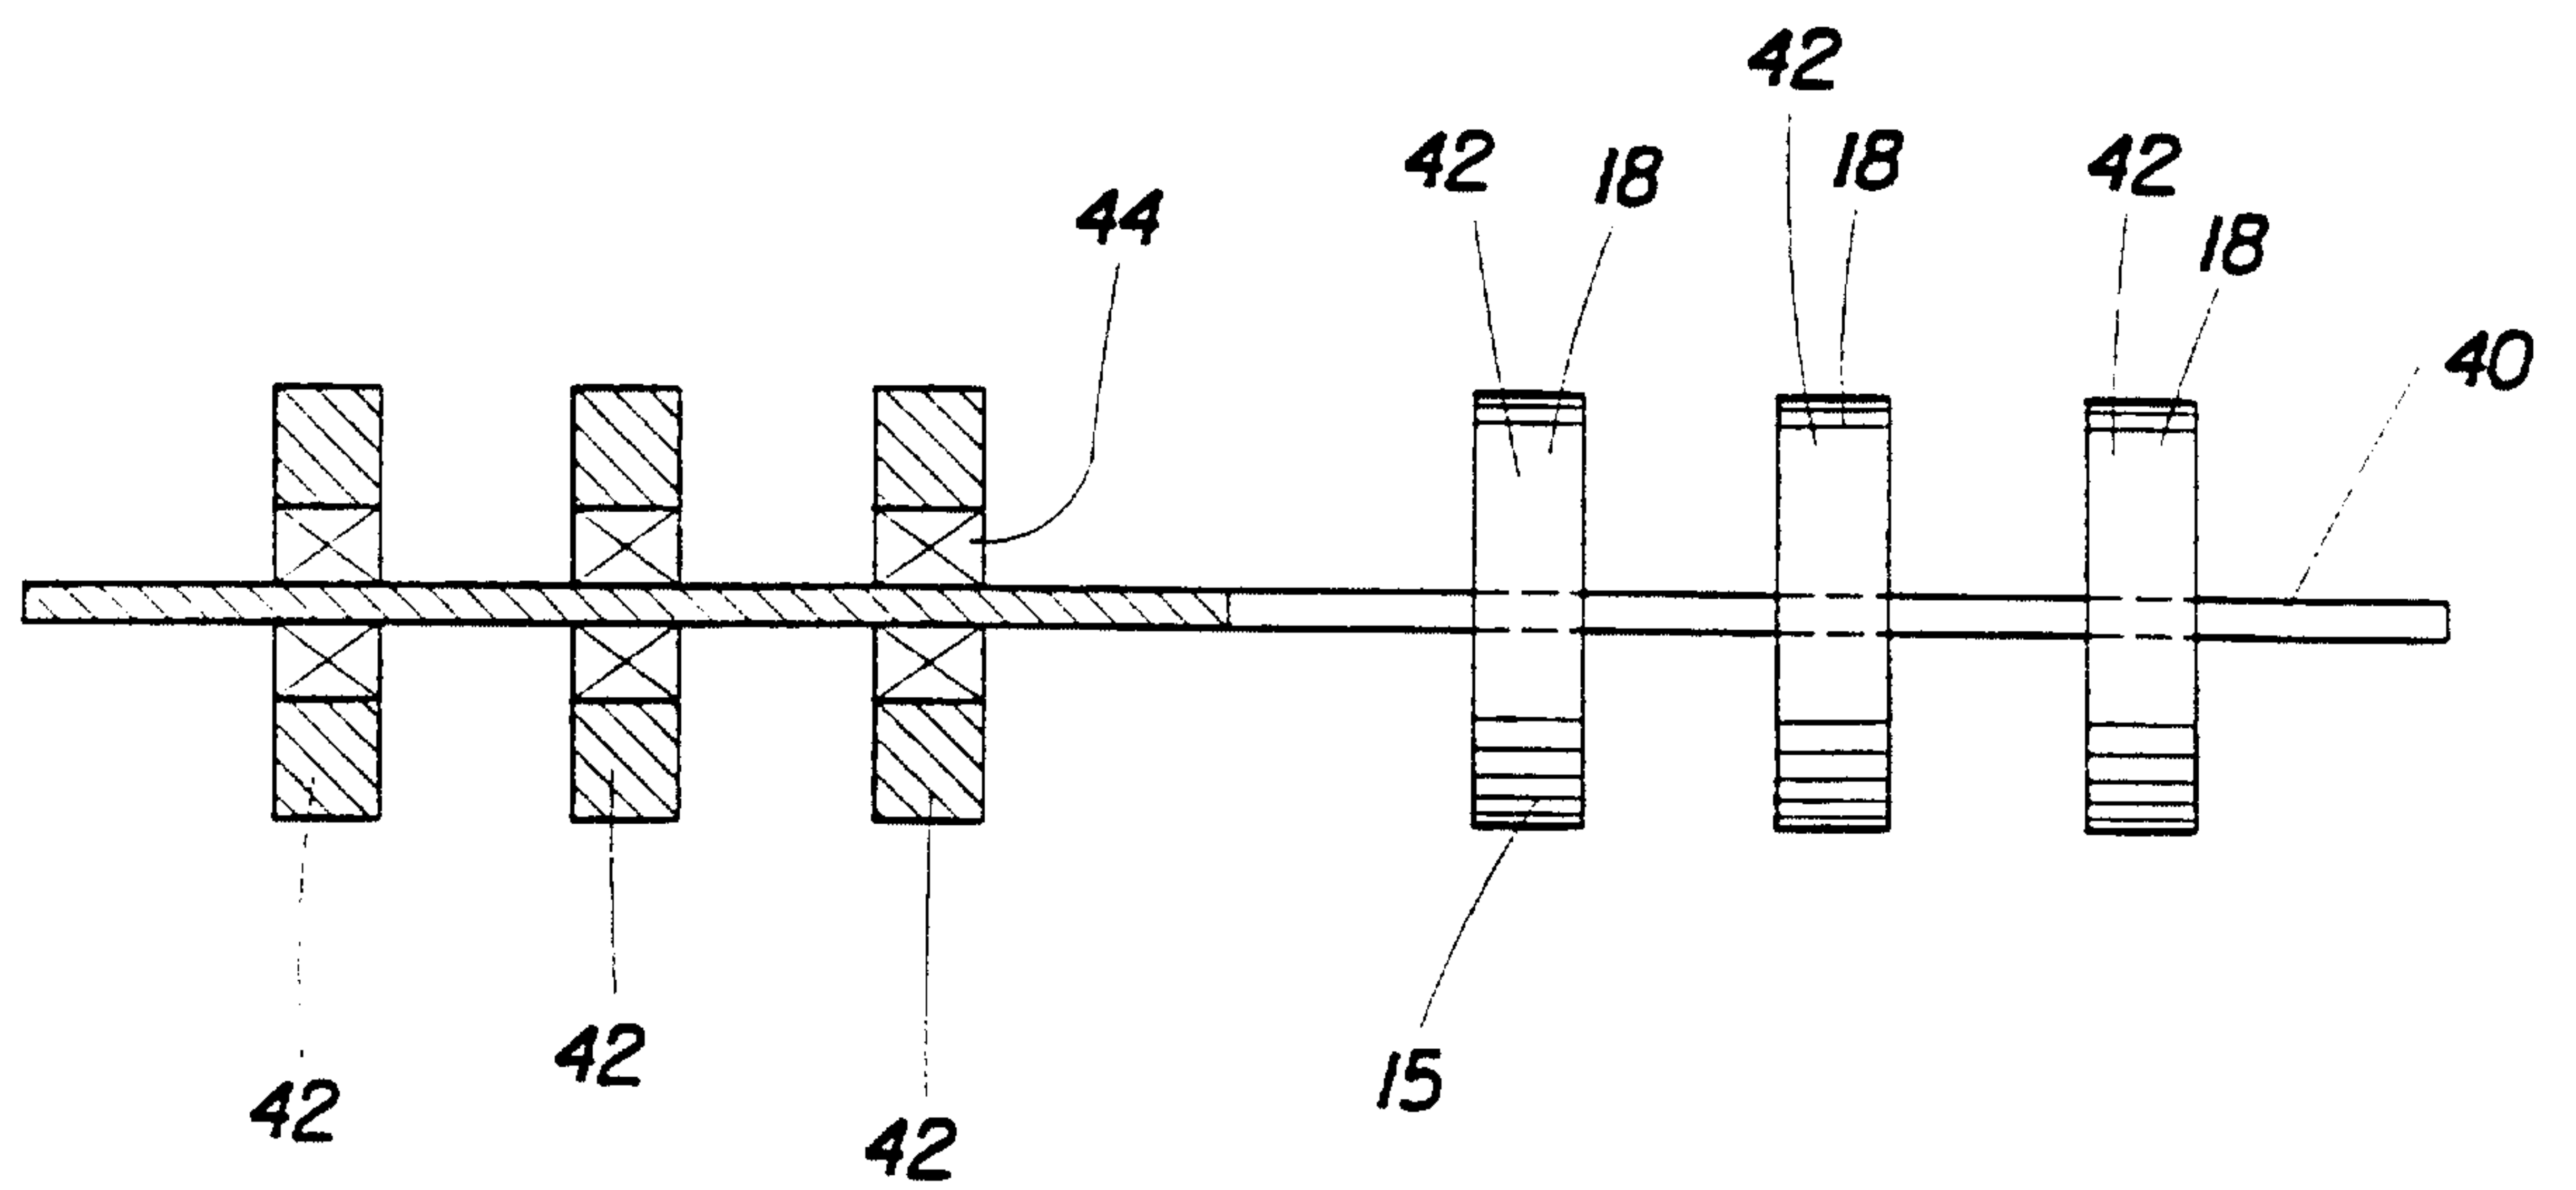


Fig. 4

5/10

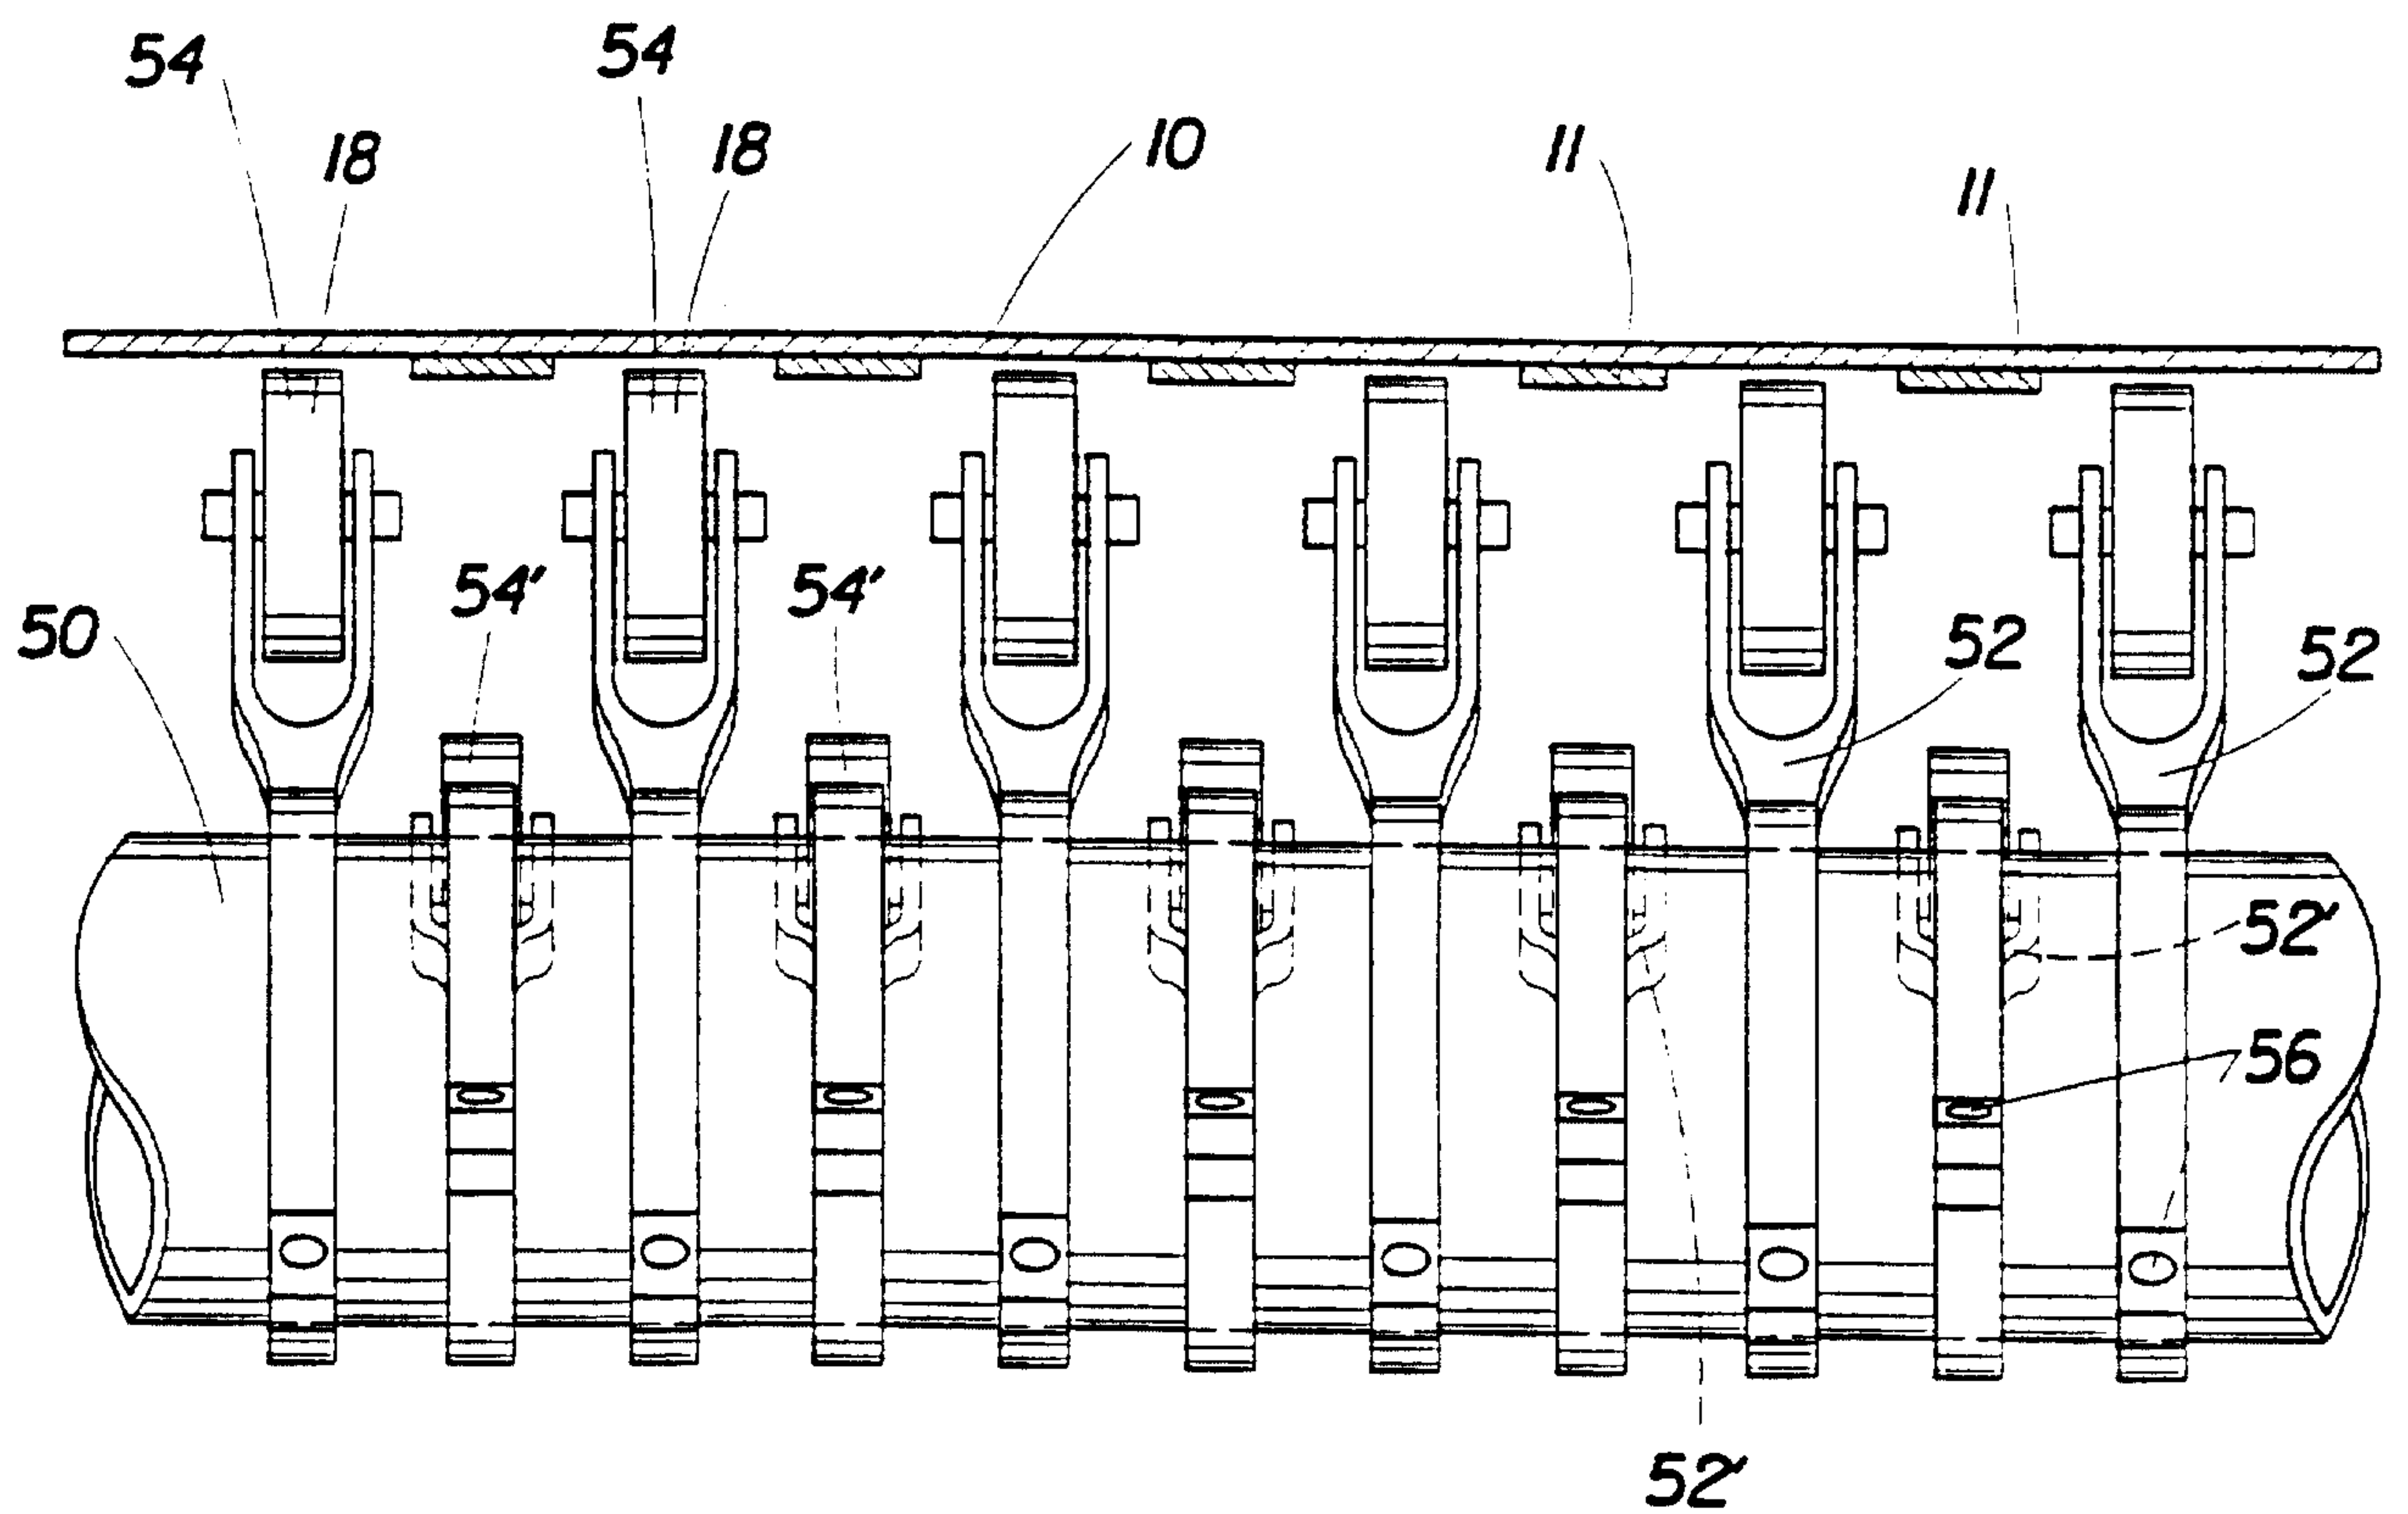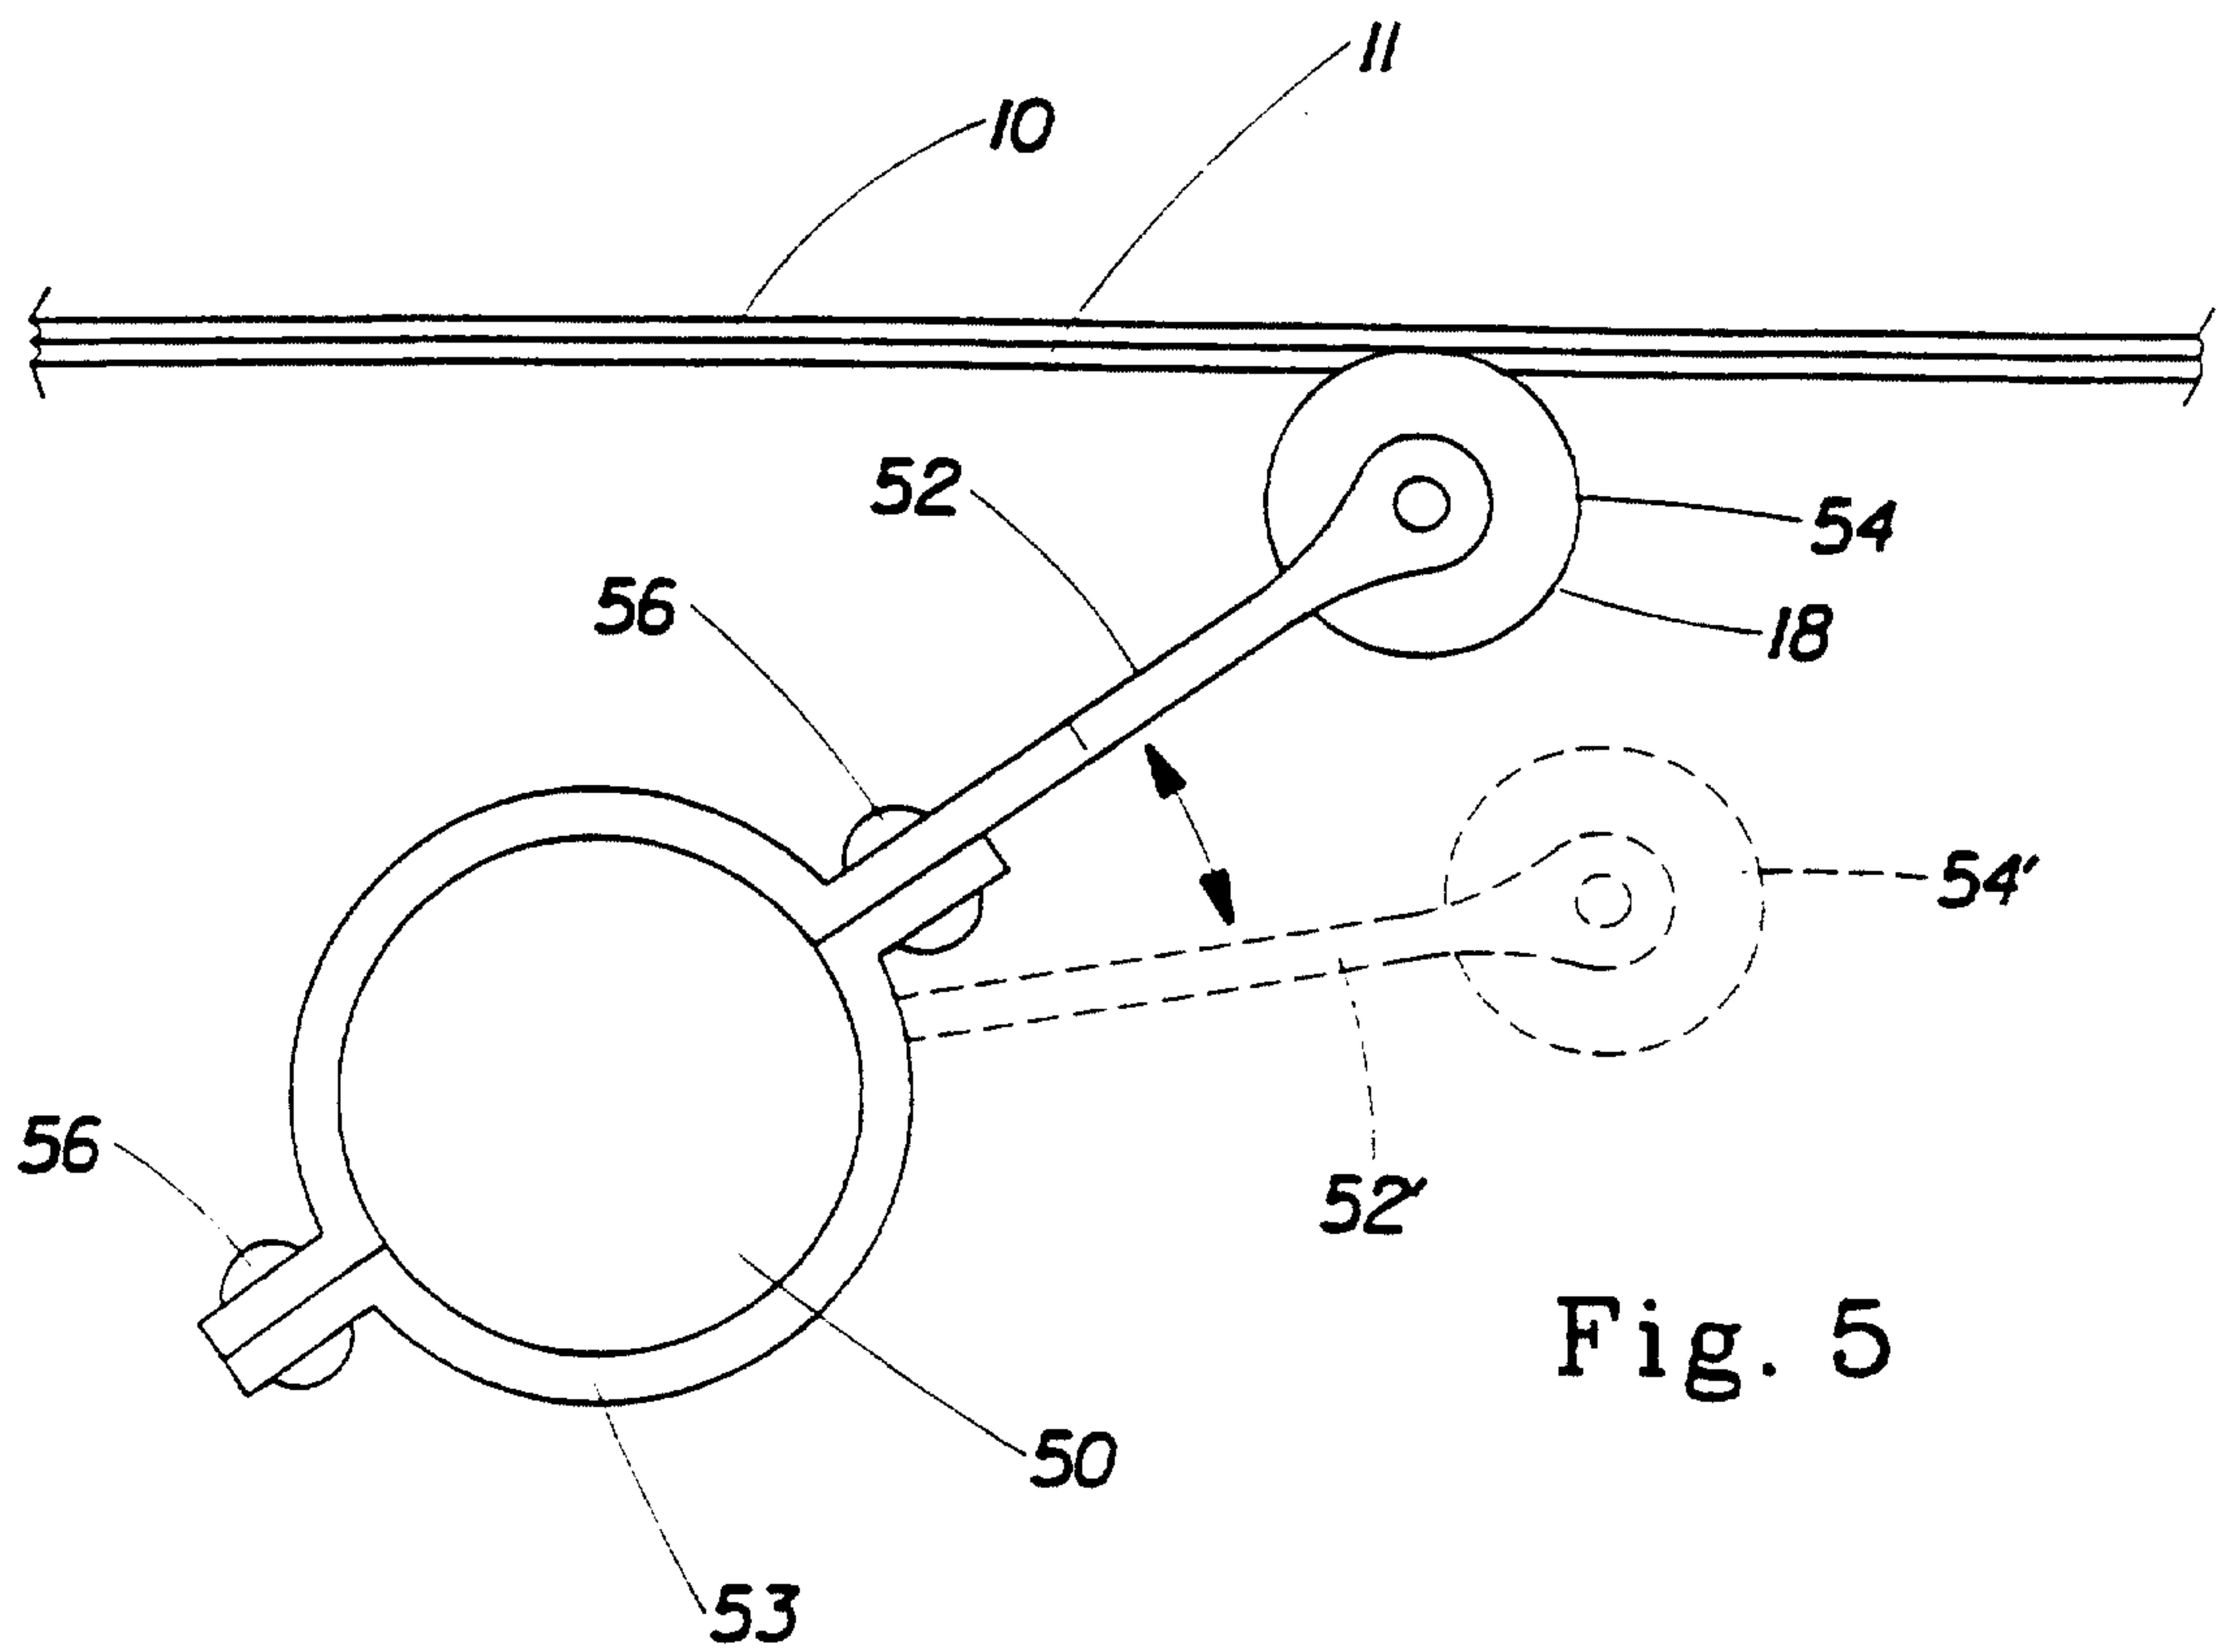

6/10

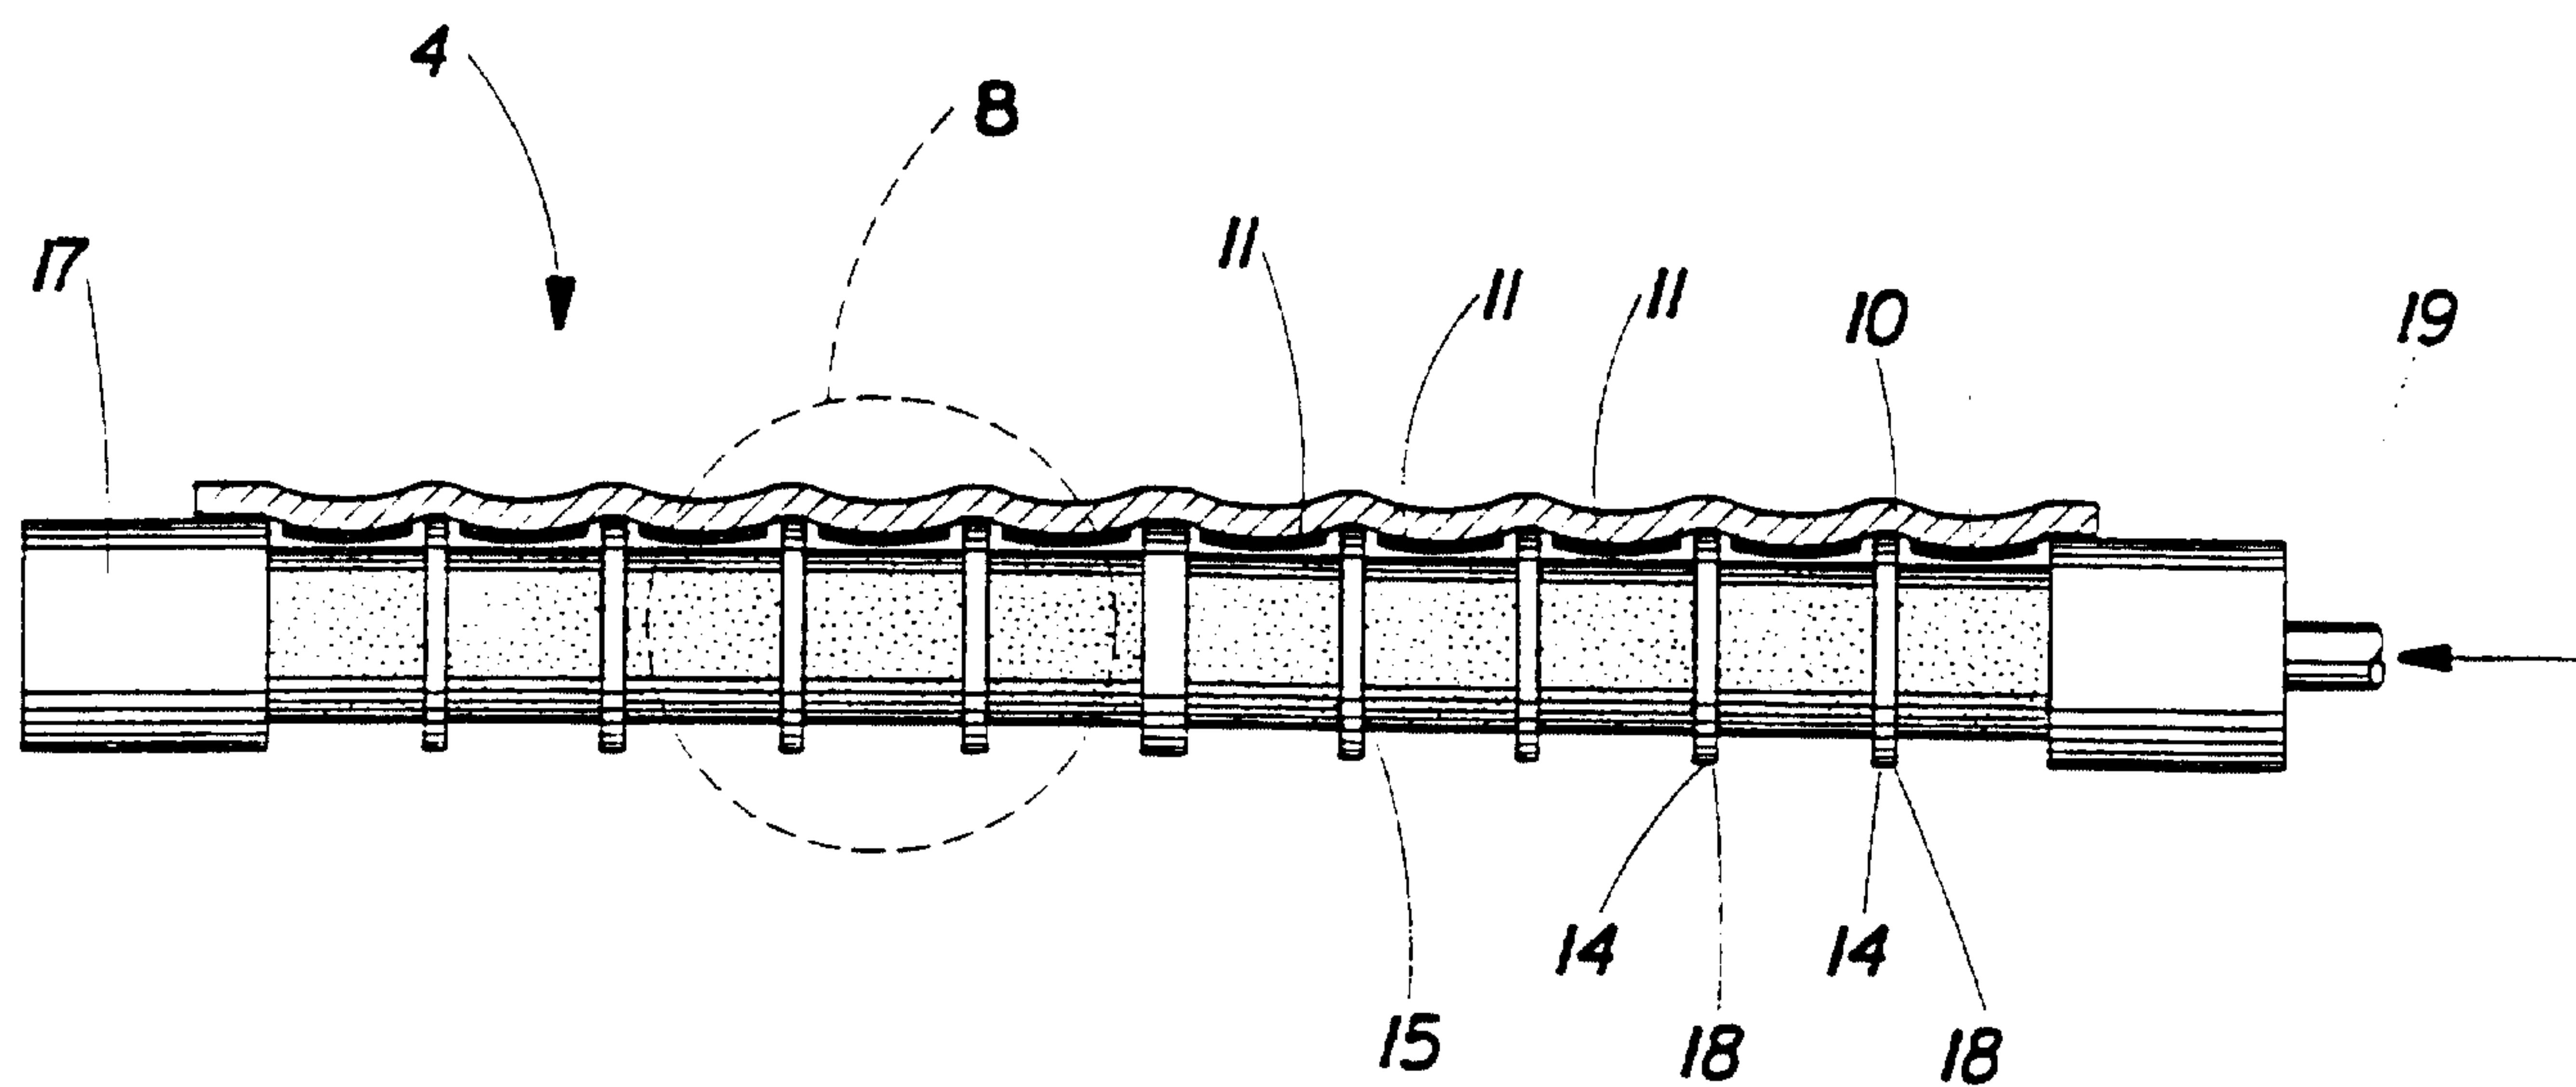


Fig. 7

7/10



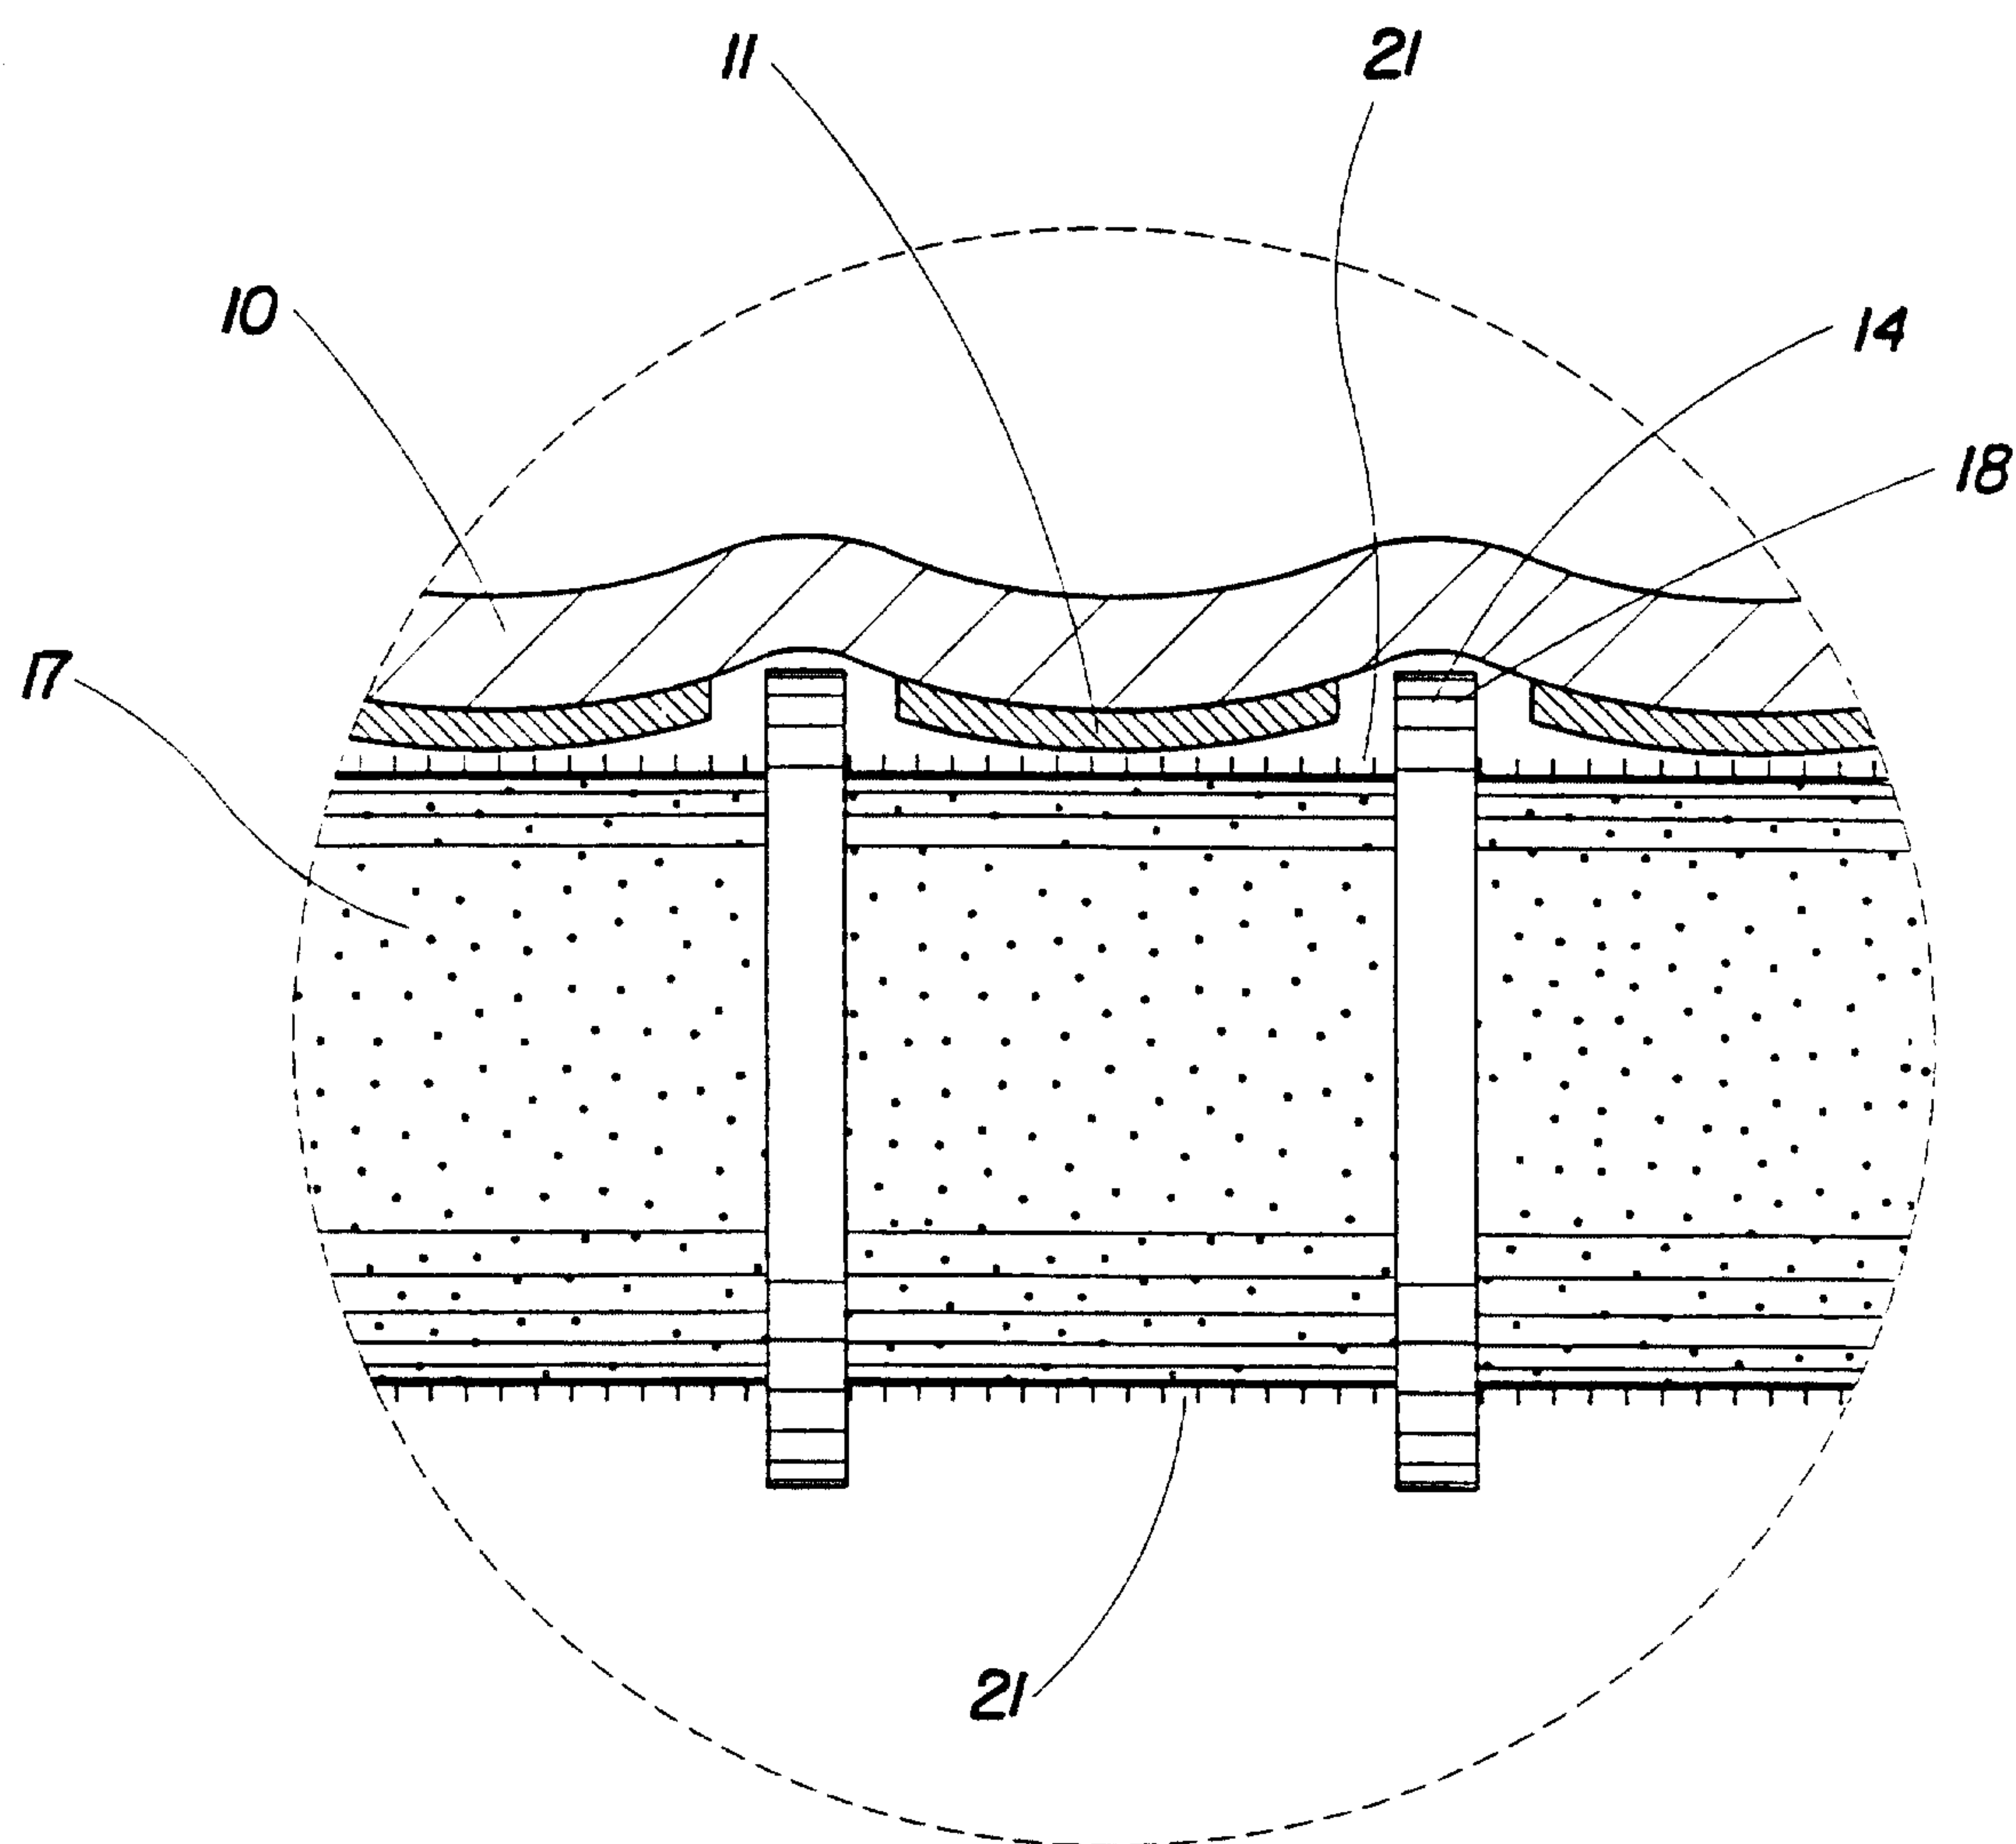


Fig. 8

8/10

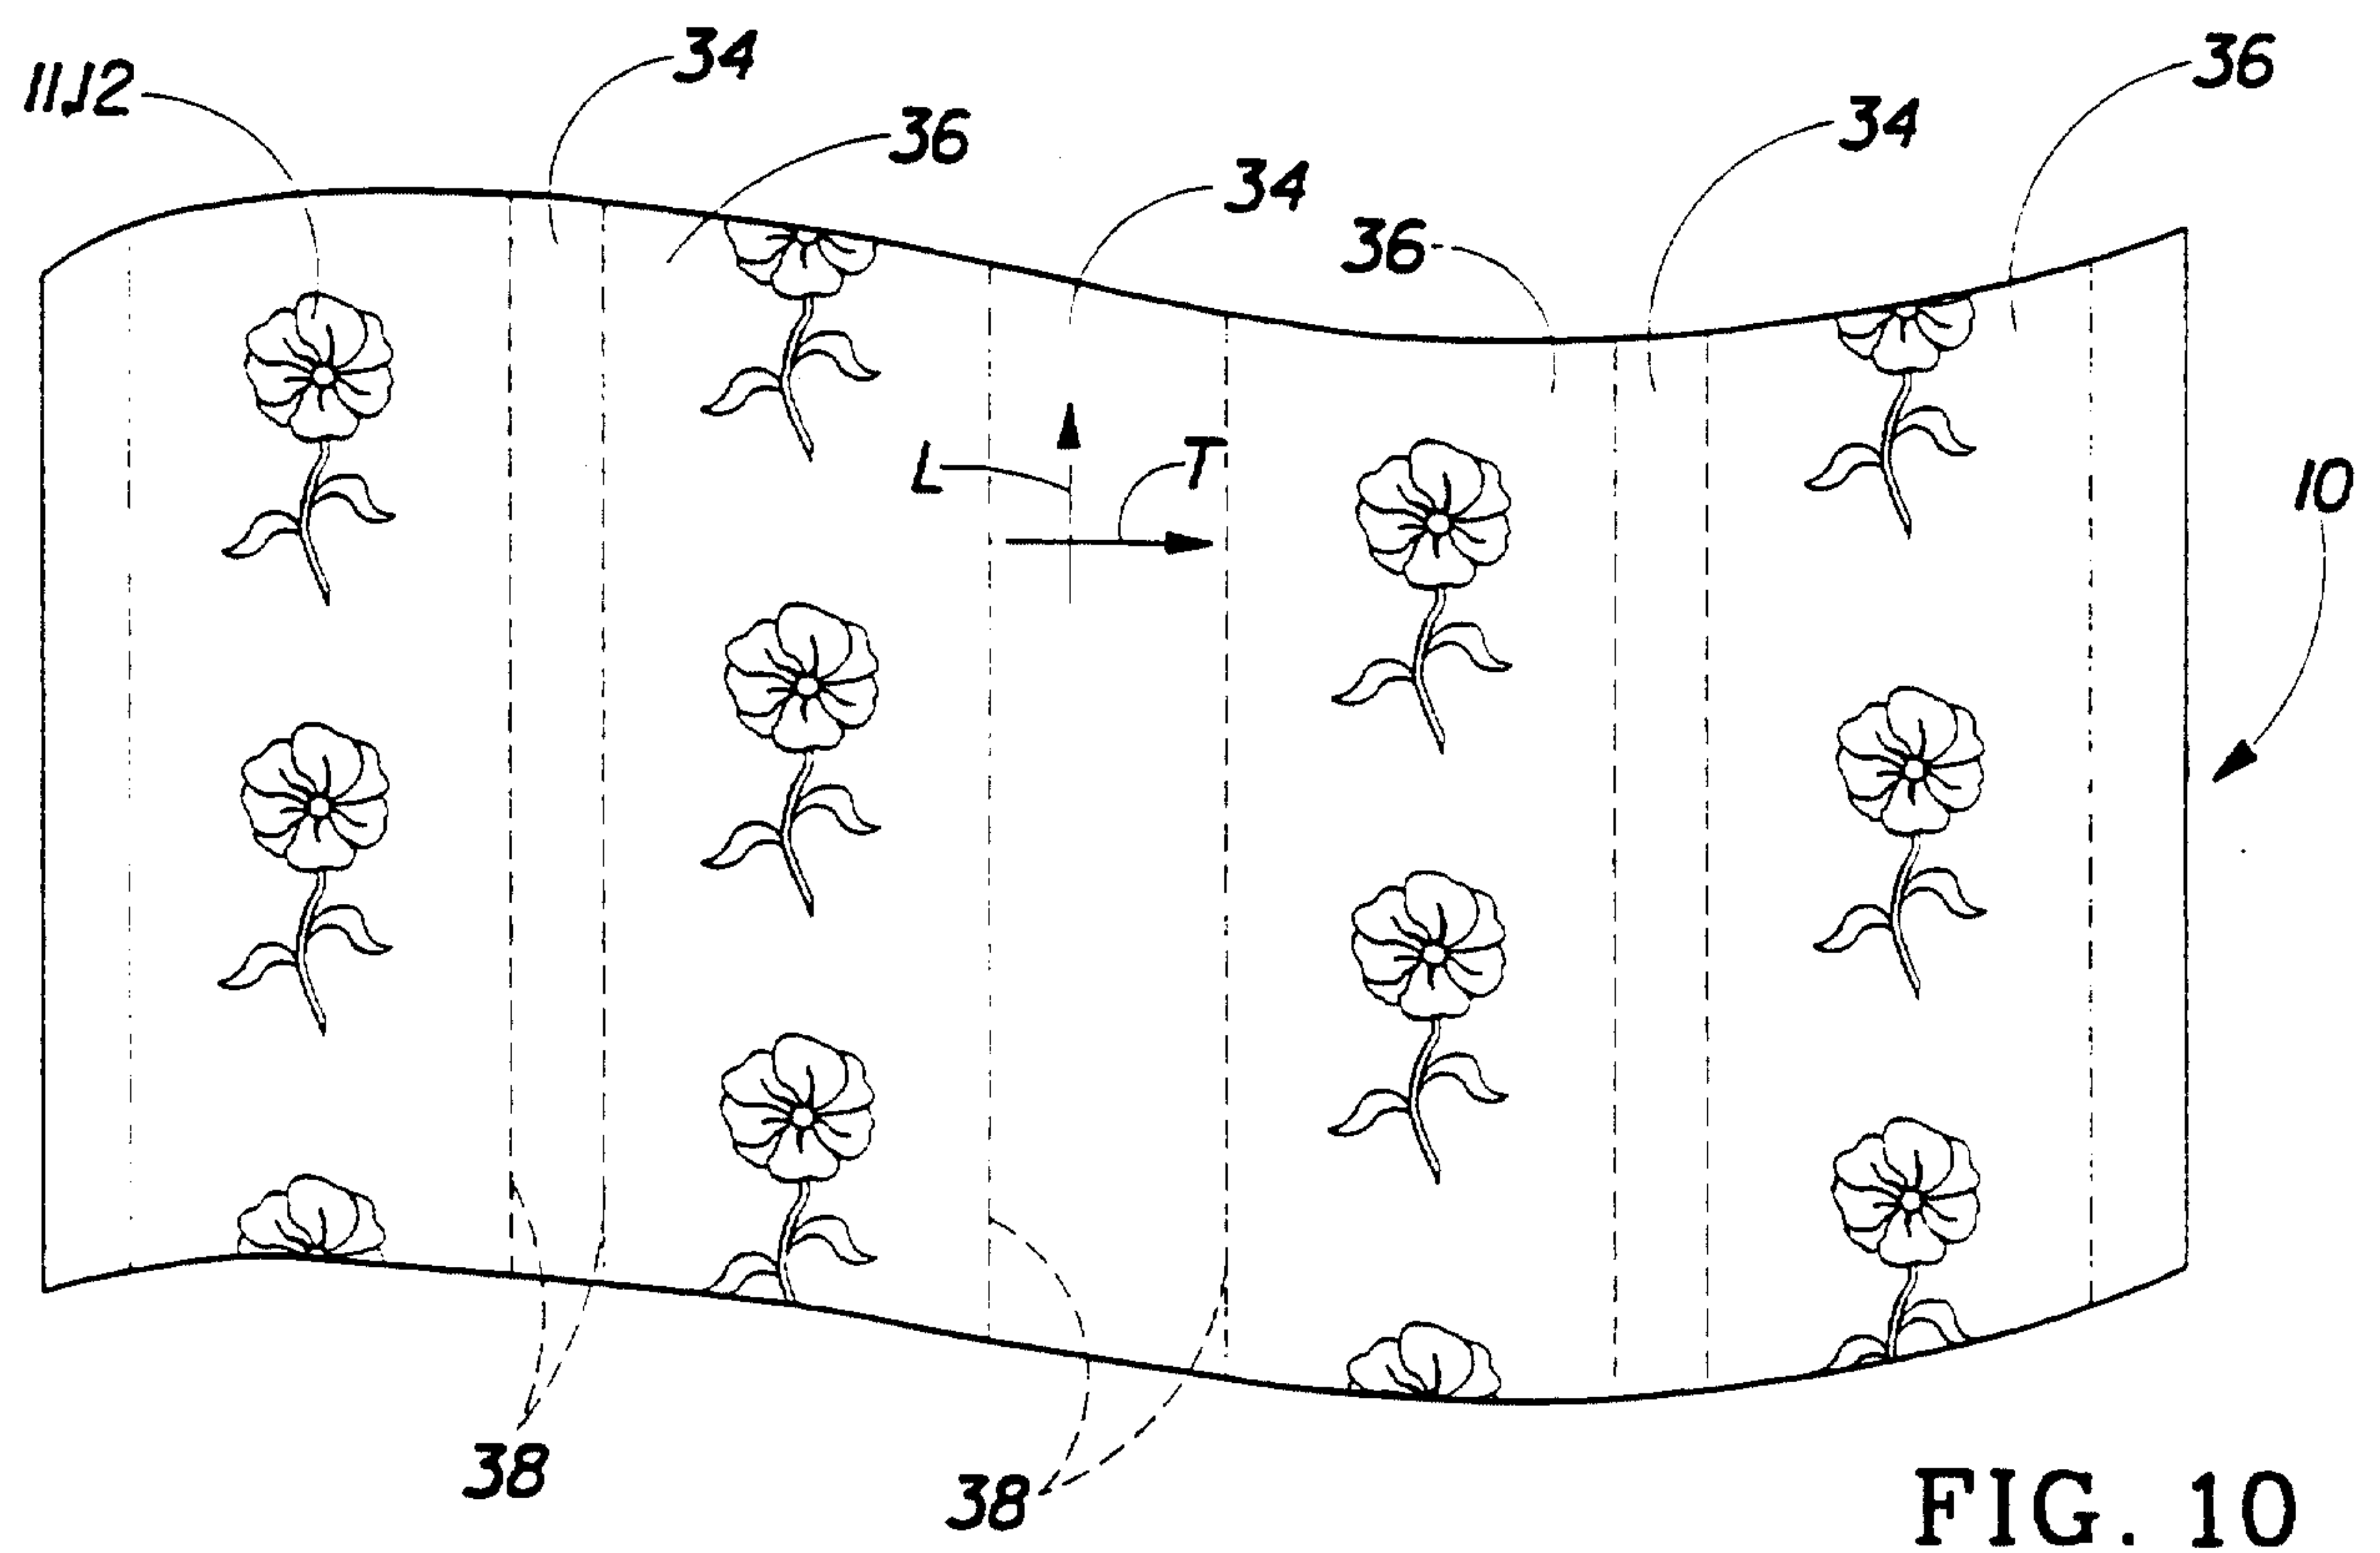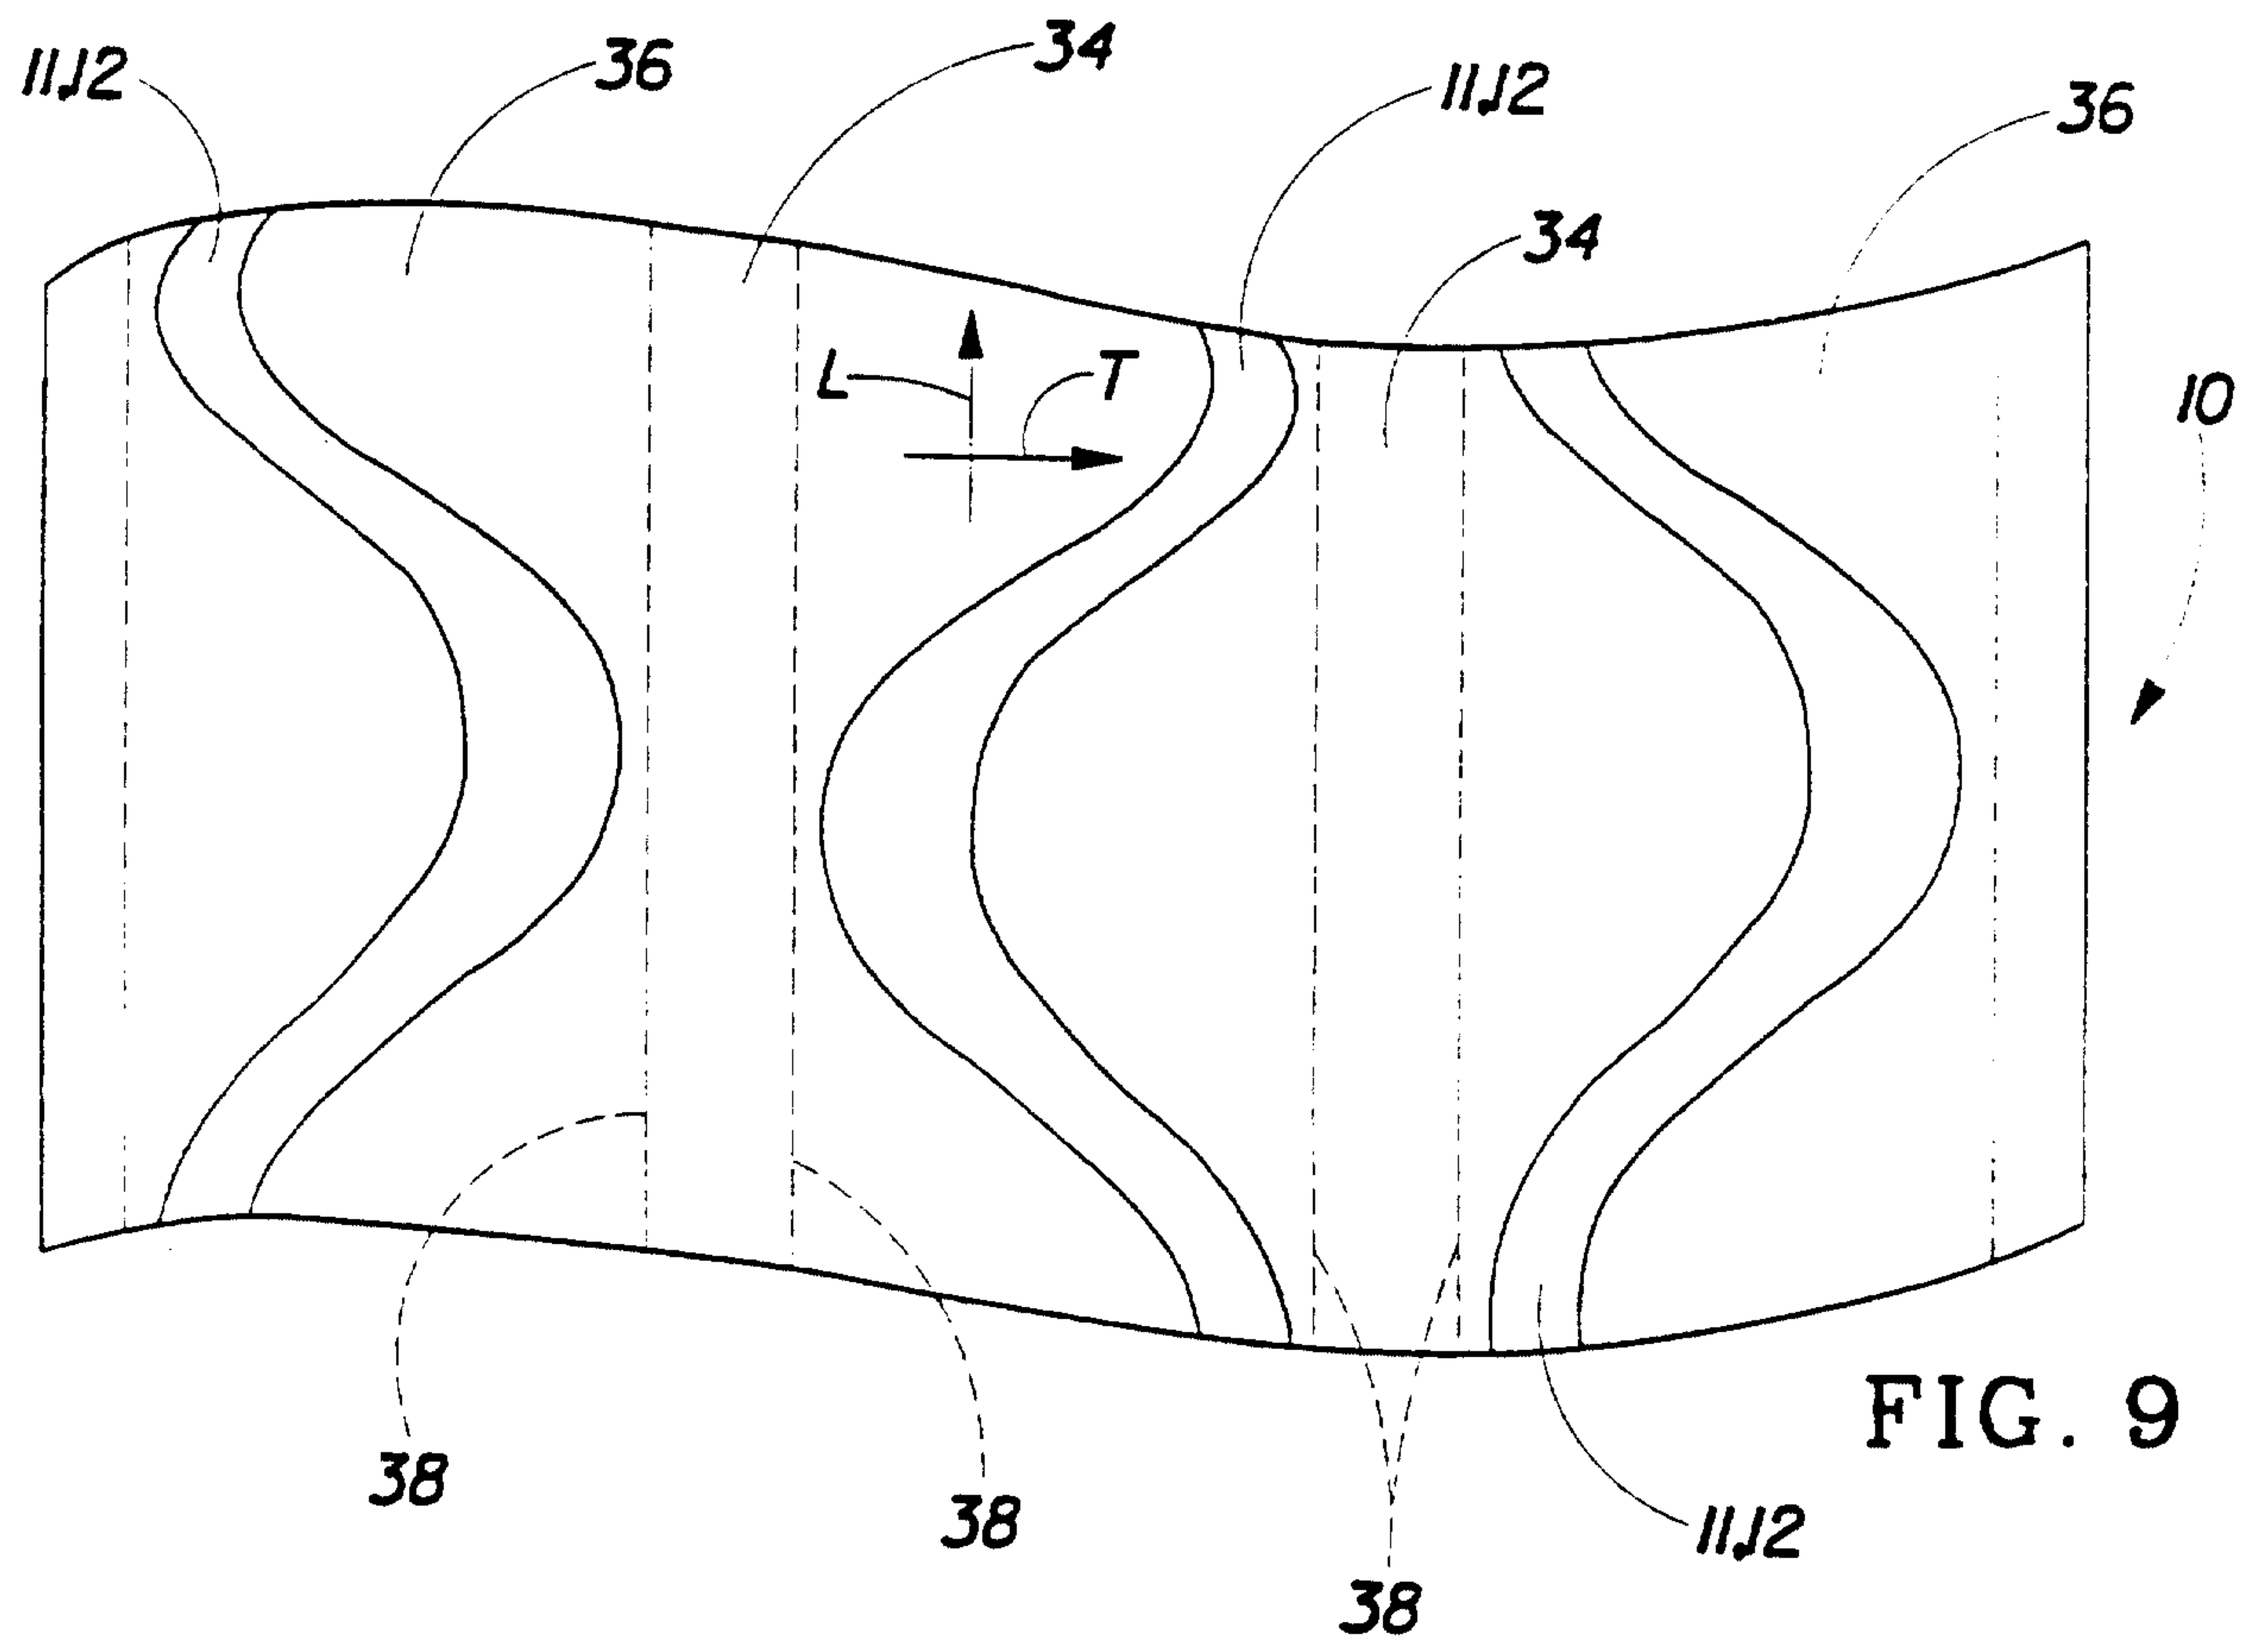

9/10

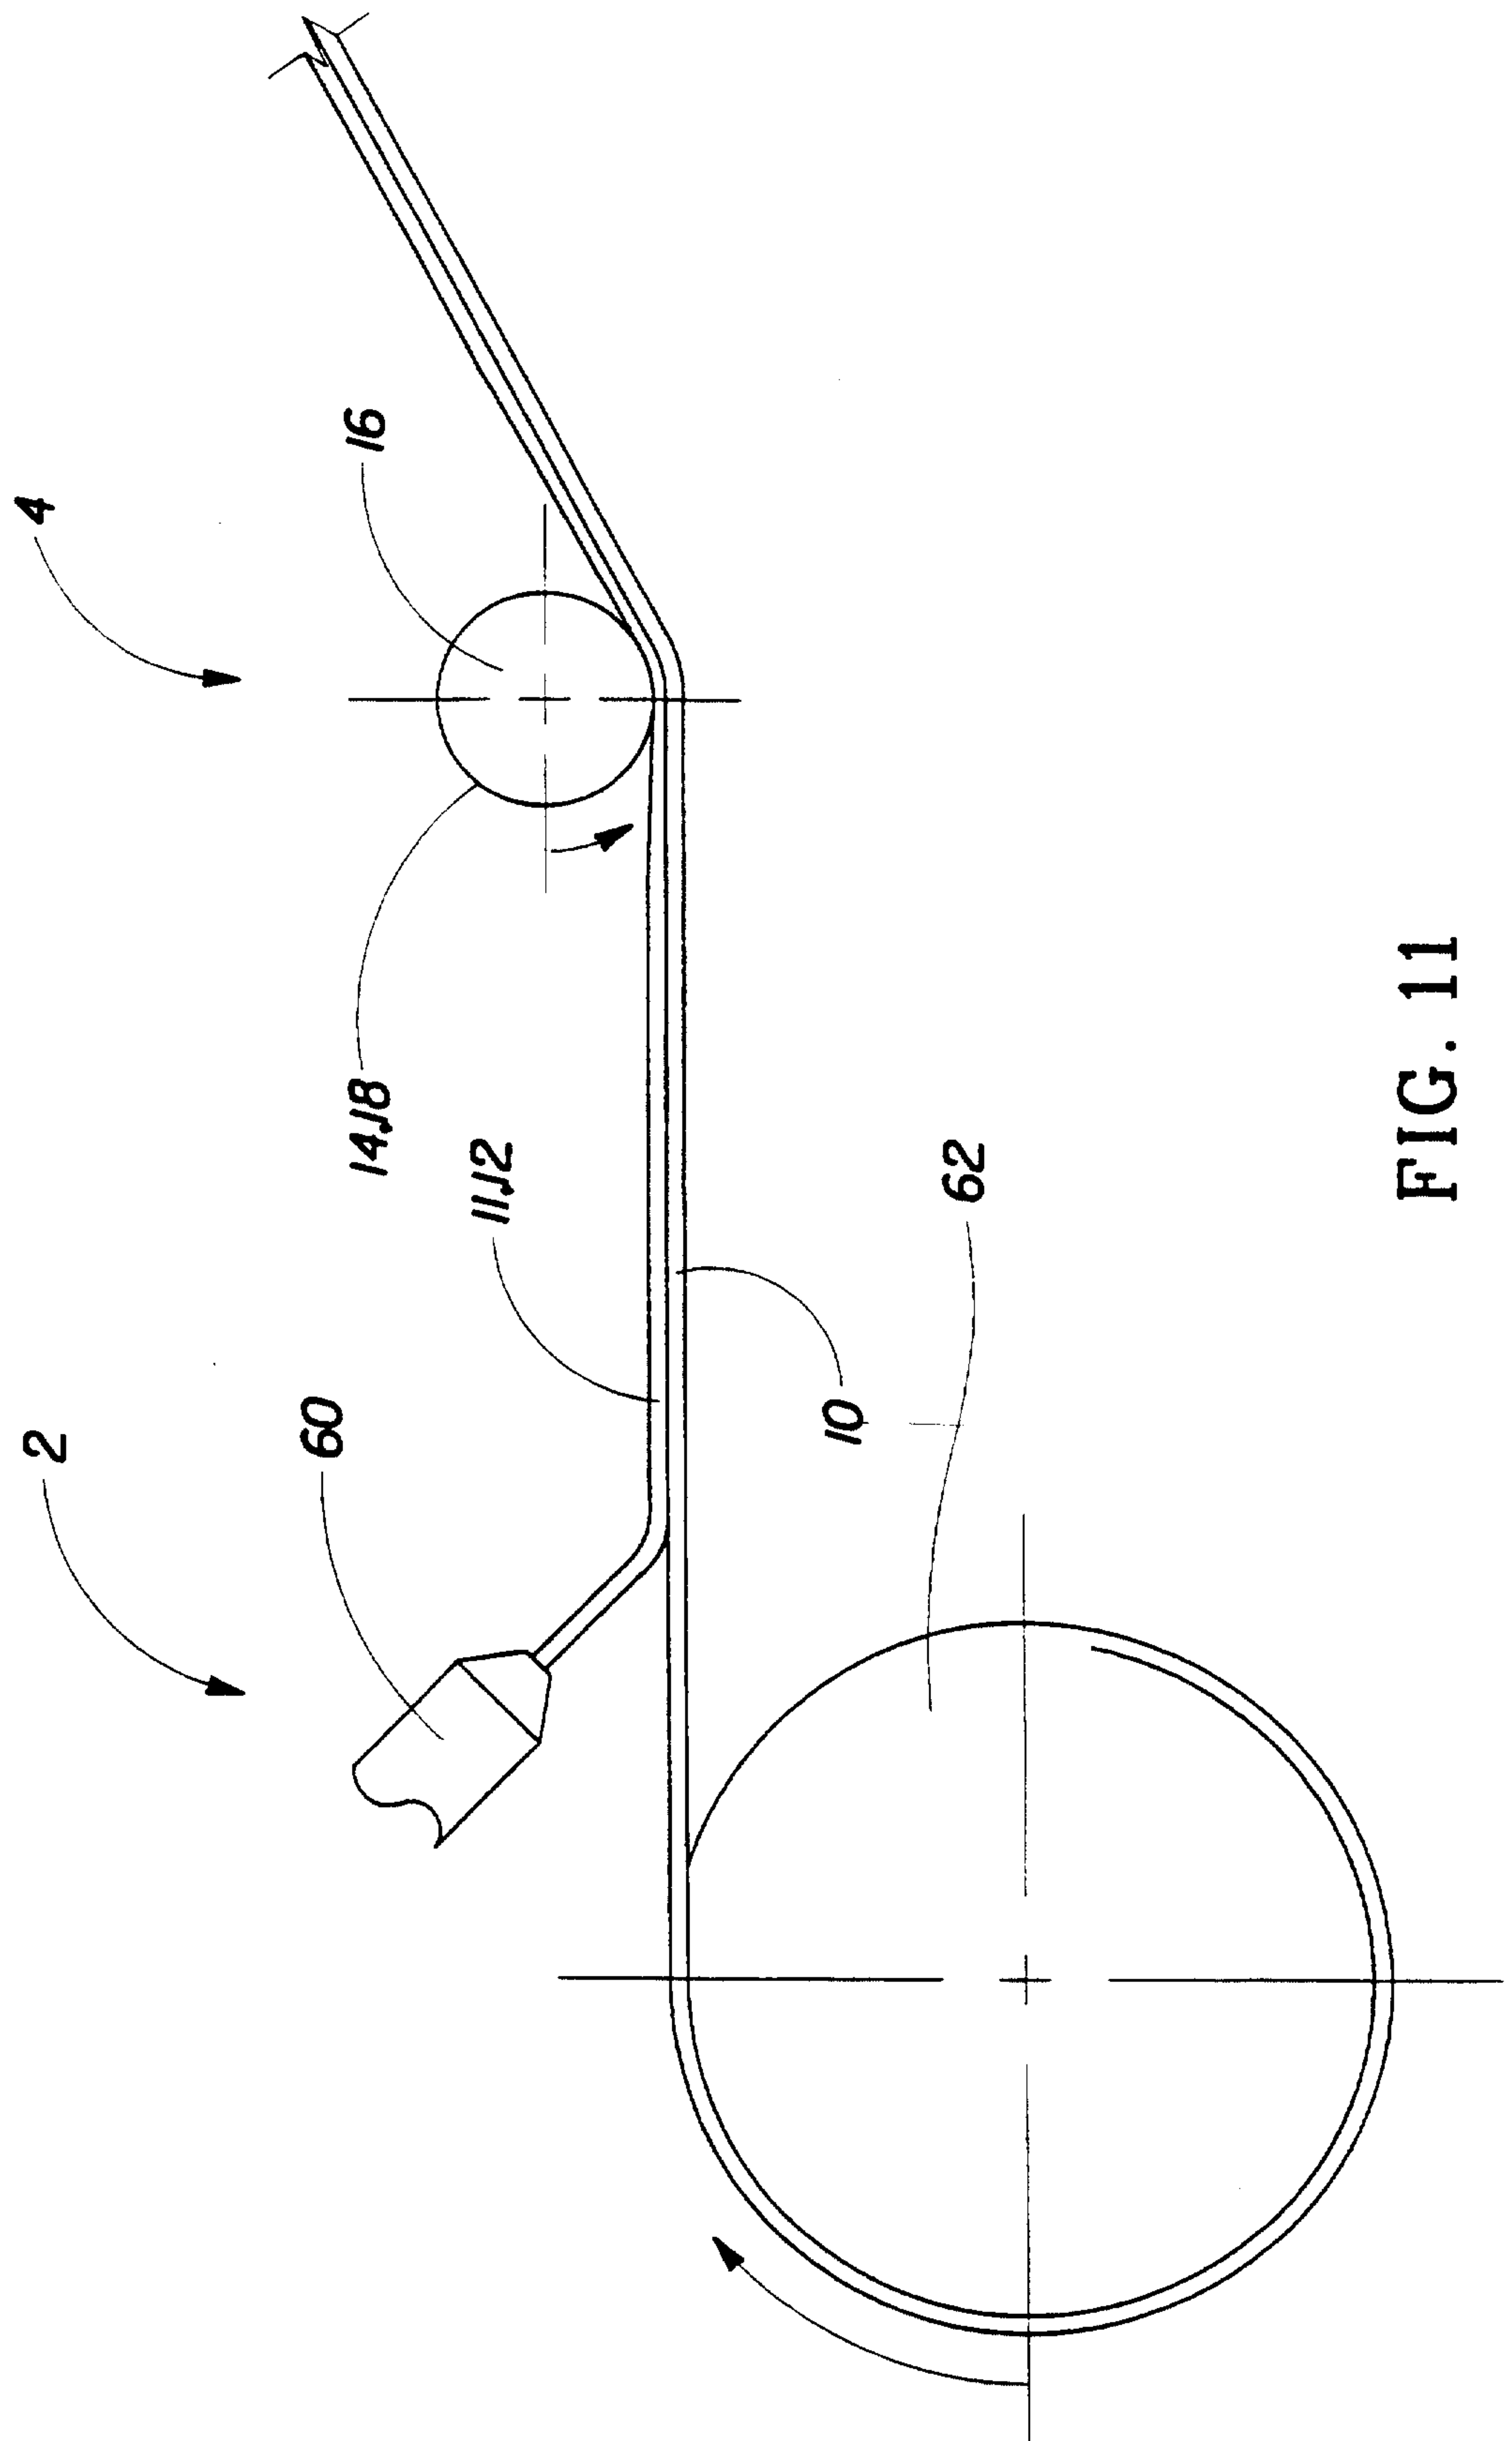


FIG. 11

10/10

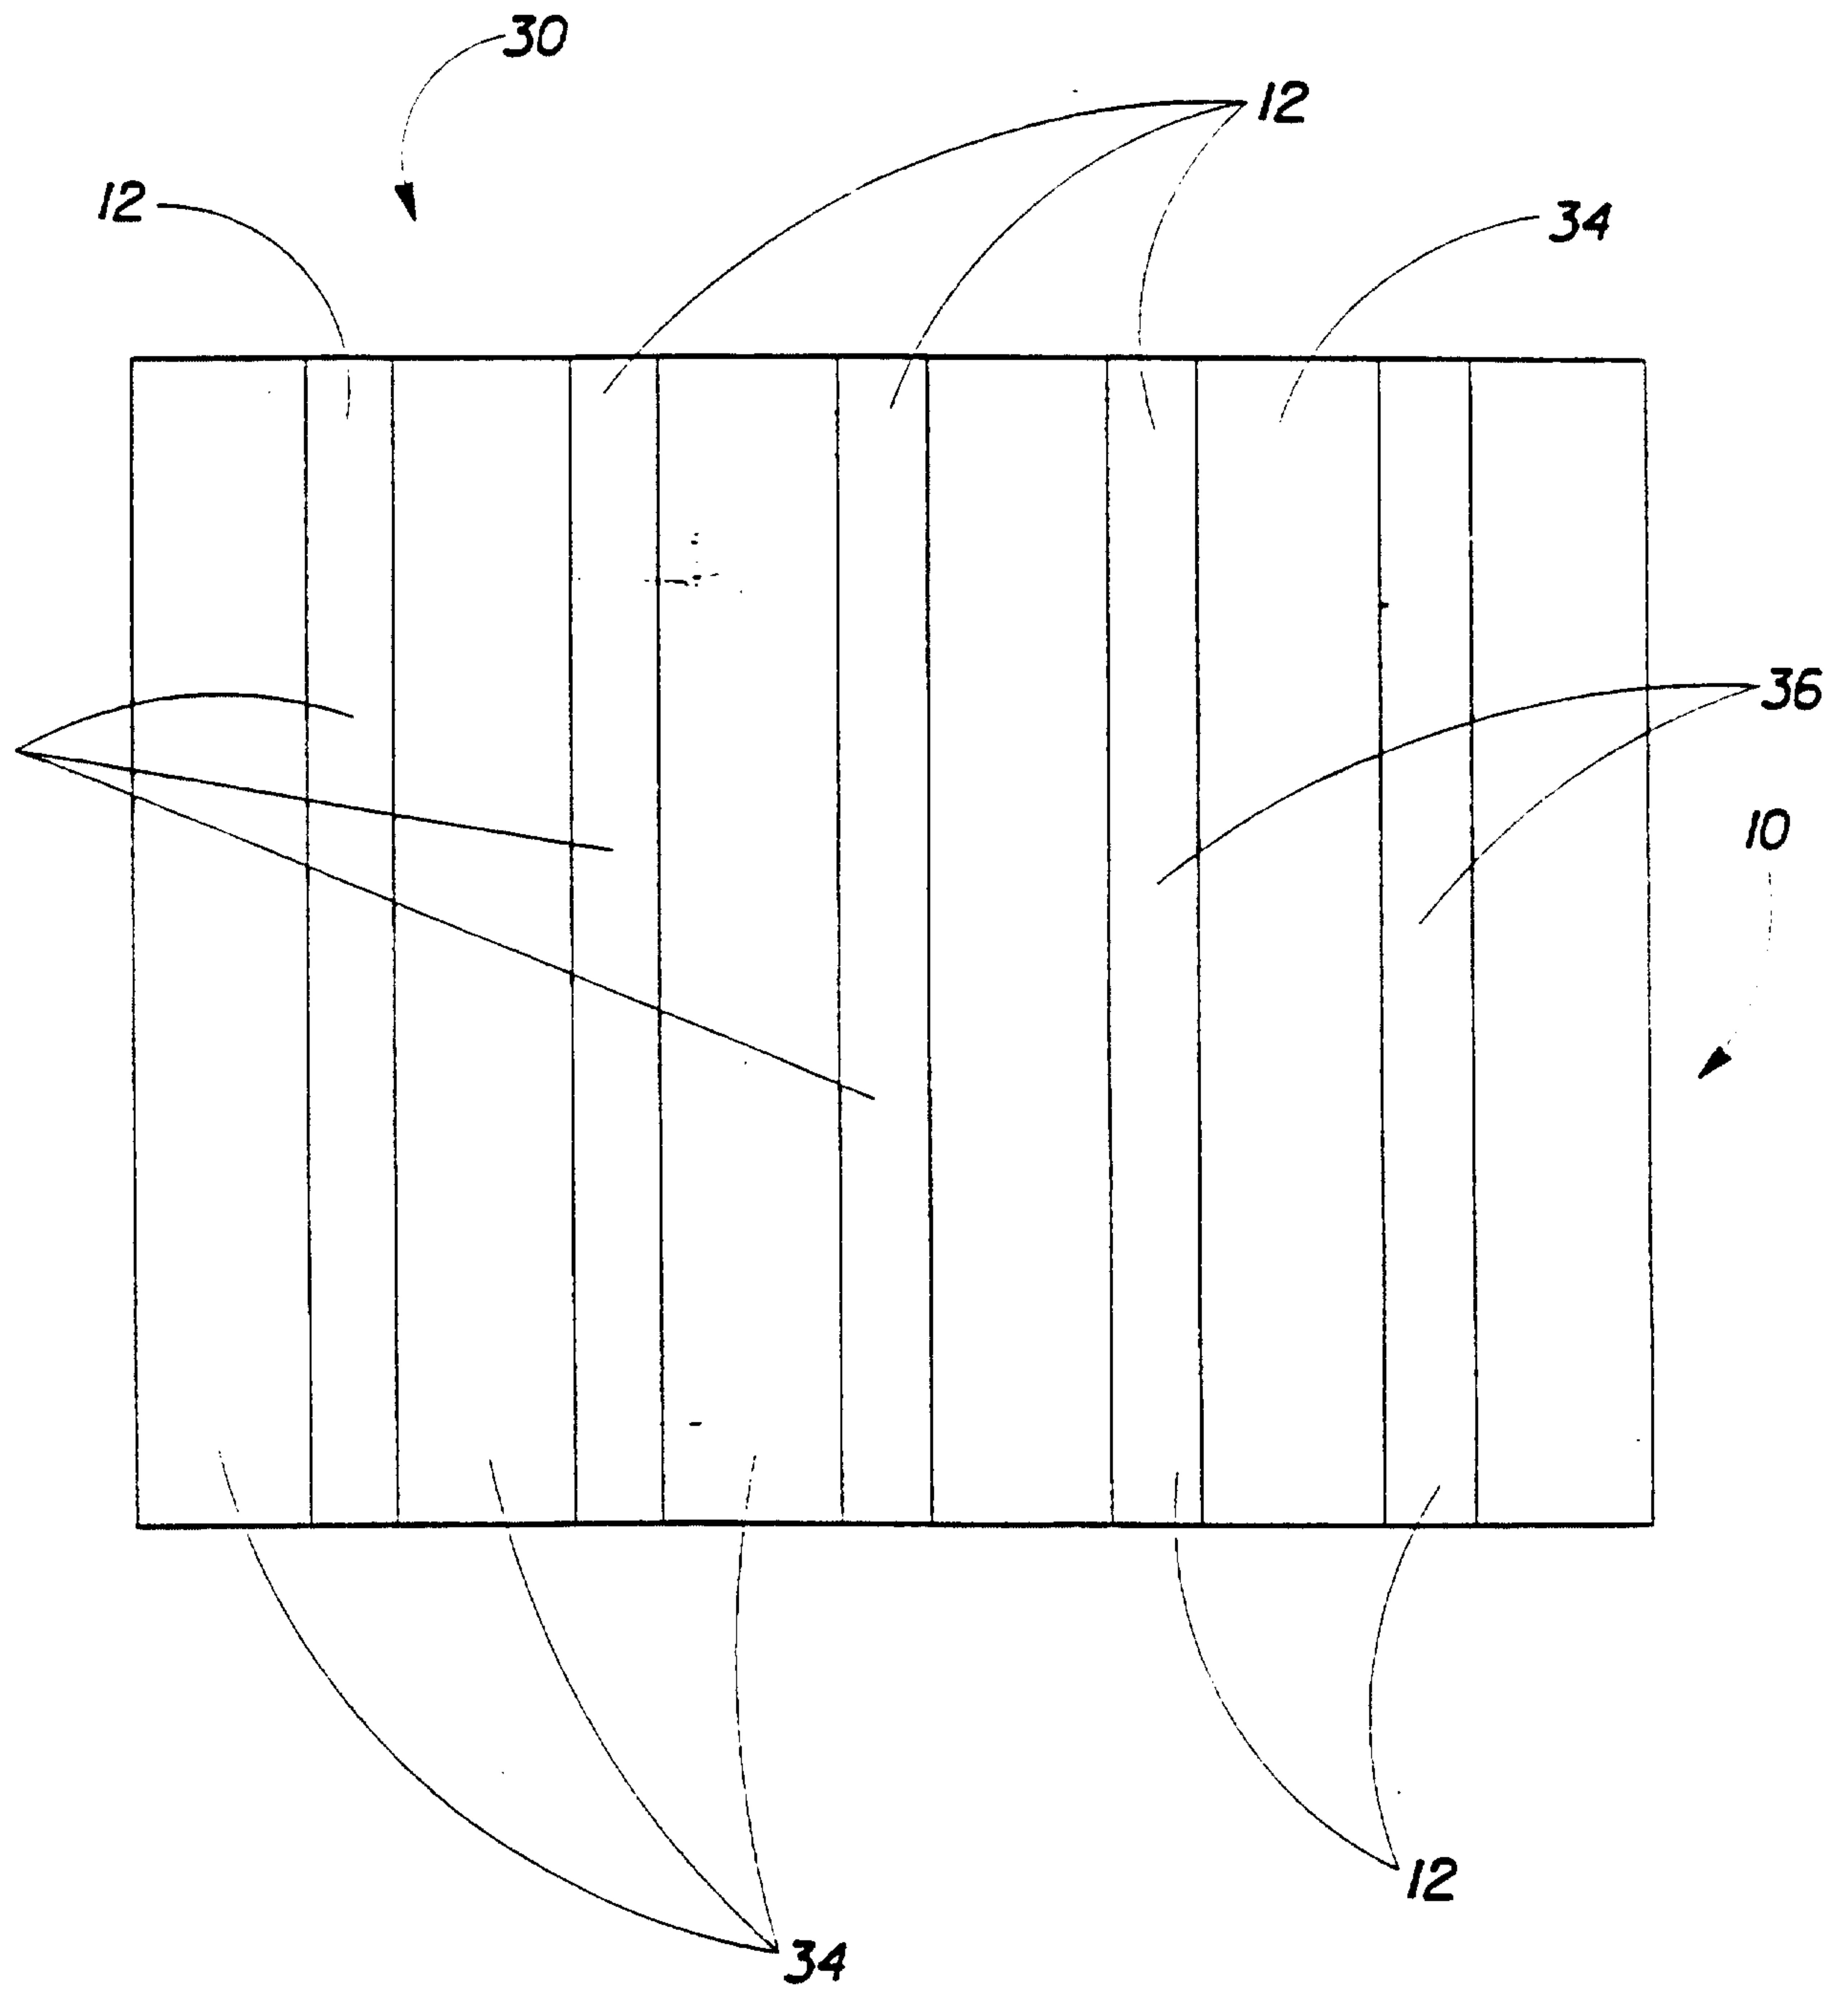


FIG. 12