



(22) Date de dépôt/Filing Date: 1997/01/30

(41) Mise à la disp. pub./Open to Public Insp.: 1997/07/31

(45) Date de délivrance/Issue Date: 2001/08/14

(30) Priorité/Priority: 1996/01/31 (8-016030) JP

(51) Cl.Int.⁶/Int.Cl.⁶ G01N 22/00

(72) Inventeurs/Inventors:

YAMAZU, Shigeki, JP;

HIRAI, Renzou, JP


(73) Propriétaire/Owner:

KABUSHIKI KAISHA TOSHIBA, JP

(74) Agent: SWABEY OGILVY RENAULT

(54) Titre : METHODE ET APPAREIL UTILISANT LES MICRO-ONDES POUR MESURER LA CONCENTRATION D'UNE SUBSTANCE DANS UN LIQUIDE

(54) Title: METHOD AND APPARATUS FOR MEASURING CONCENTRATION OF MATTER IN LIQUID BY USING MICROWAVES

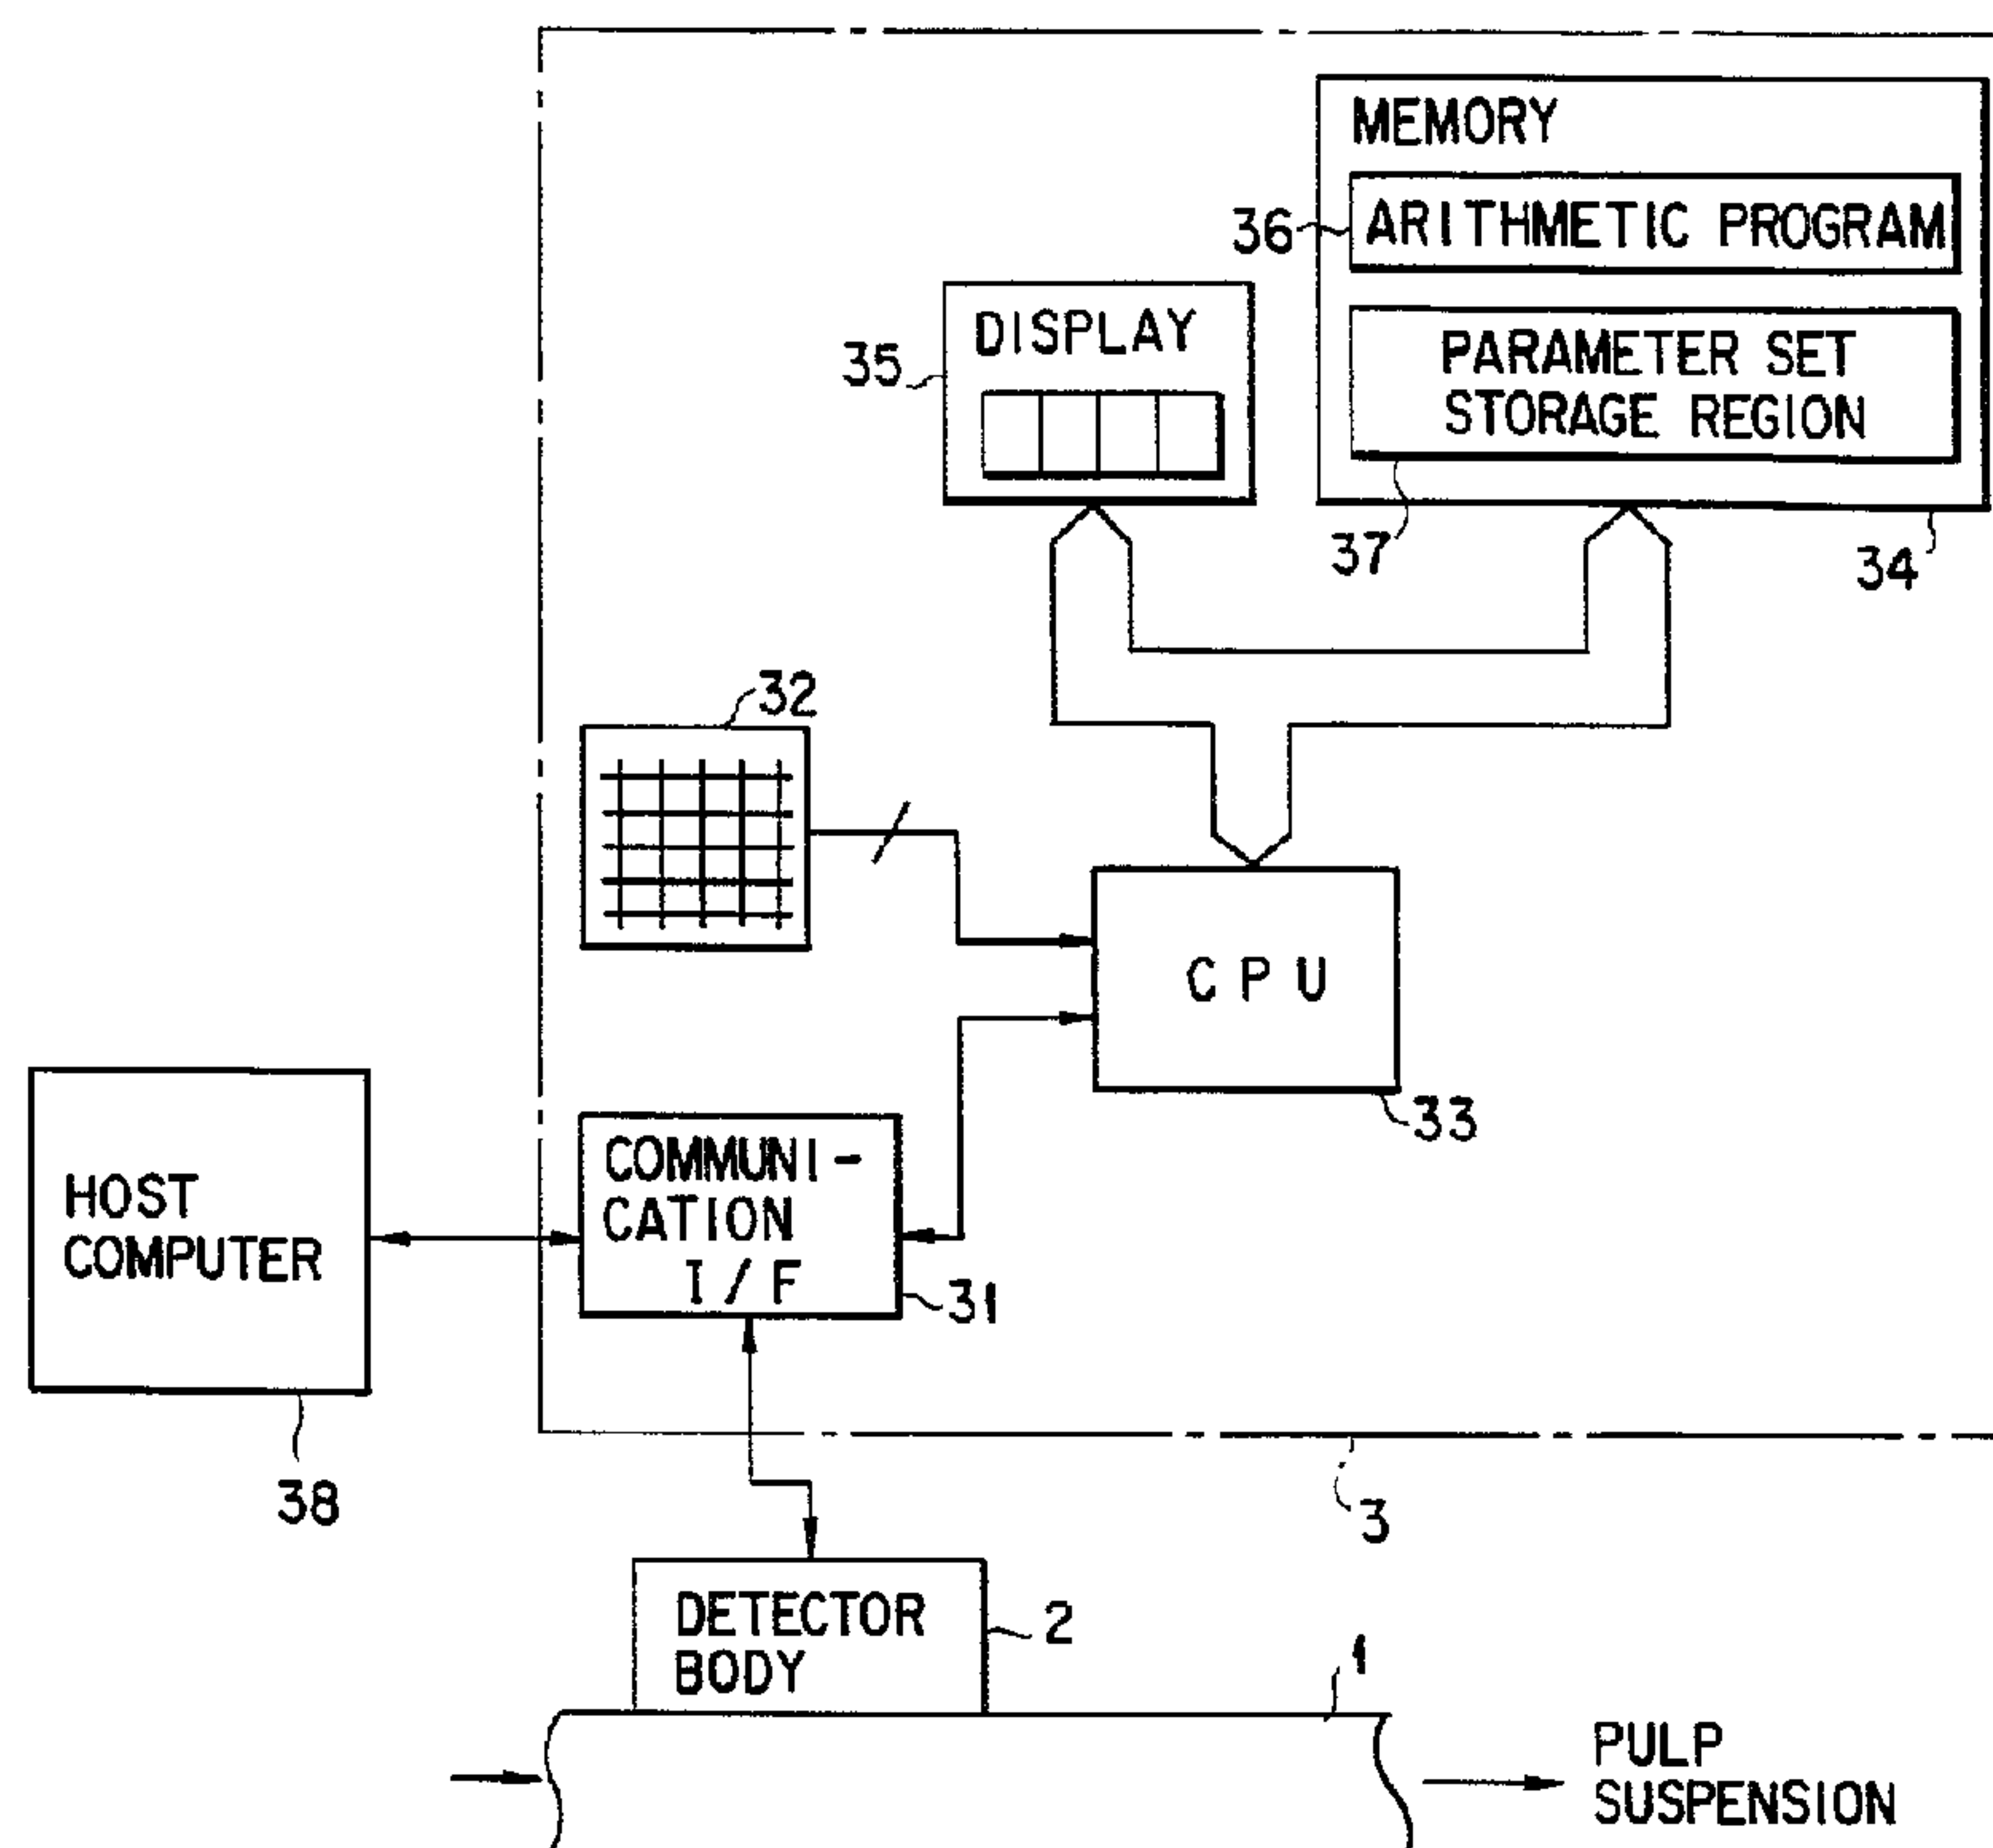

(57) Abrégé/Abstract:

An apparatus comprising a measuring unit for measuring a property of microwaves by transmitting microwaves through a fluid containing matter to be measured, a storing unit for storing a correction parameter set of a sensitivity coefficient and a mixture ratio concerning the matter to be measured, and a calculating unit for calculating a concentration of the matter to be measured from the property of the microwaves obtained by the measuring unit and the correction parameter set obtained in the storing unit.

ABSTRACT OF THE DISCLOSURE

An apparatus comprising a measuring unit for measuring a property of microwaves by transmitting microwaves through a fluid containing matter to be measured, a storing unit for storing a correction parameter set of a sensitivity coefficient and a mixture ratio concerning the matter to be measured, and a calculating unit for calculating a concentration of the matter to be measured from the property of the microwaves obtained by the measuring unit and the correction parameter set obtained in the storing unit.

- 1 -

TITLE OF THE INVENTION

METHOD AND APPARATUS FOR MEASURING CONCENTRATION OF
 5 MATTER IN LIQUID BY USING MICROWAVES

TECHNICAL FIELD

The present invention relates to a method and apparatus for measuring by using microwaves the
 10 concentration of dissolving matter, such as pulp suspension liquid, in which suspended matter (e.g., pulp) and /or an additive is dissolved.

BACKGROUND OF THE INVENTION

15 When microwaves are incident on water, the microwaves have a phase lag (θ_1) behind that in the case here microwaves are incident on a vacuum (air). When microwaves are incident on a suspension, such as sludge or pulp liquid, a greater phase lag
 20 (θ_2) results.

This phenomenon is represented by the following equation:

$$\begin{aligned} \text{Concentration } X &= C \cdot a \cdot \Delta\theta \\ &= C \cdot a_k \cdot (\theta_1 - \theta_2) \end{aligned} \quad \dots (1)$$

25 where C: correction coefficient, a_k : a sensitivity coefficient, θ_1 : a phase lag in a case where microwaves are incident on reference liquid, and θ_2 : a phase lag in a case where microwaves are incident on suspension liquid.

30 The difference between the phase lag (phase difference: $\theta_2 - \theta_1$) is proportional to the sum of the concentration of suspended matter and the concentration of dissolving matter.

In recent years, concentration meters based on the above principle have been developed, and disclosed in Jpn. Pat. Appln. KOKAI Publications Nos. 4-238246 and 5-322801. The developed or disclosed concentration meters have many advantages, one of which is little influence of adhesion of suspended matter or bubbles in the liquid.

As regards pulp suspension liquid used in paper-maker plants, a plurality of additives are added to produce each product (paper) in a constant mixture ratio. Assume that a pulp concentration (concentration of pulp as suspended matter) or additive concentration (concentration of an additive as dissolving matter) is measured by means of the concentration meter based on the aforementioned principle. When the concentrations of the additives (additives A and B) are individually measured, the indication of the concentration meter is proportional to the concentration, as shown in the equation (1) and FIG. 1. FIG. 1 is a diagram showing a result of measurement of individually measuring the pulp concentration and additive concentrations by a microwave concentration meter.

Since pulp and the additives A and B are different in physical properties, the sensitivity a in the equation (1) is different between the additives. If the additives are mixed, the sensitivity of the mixture cannot be necessarily expected accurately, so that

an error may arise in the measured concentration value depending on the mixture ratio. Further, in the case of the concentration meter based on the above principle, it is necessary to obtain in advance a reference phase lag
5 (θ_1) using reference liquid, for example, service water, which has a concentration of substantially zero. This operation is called zero adjustment or zero-point adjustment.

To execute such a zero adjustment operation, it is
10 necessary that a piping system including the concentration meter have a structure as shown in FIGS. 2A and 2B. Referring to FIGS. 2A and 2B, to perform zero adjustment, a stop valve 52 on the side of a bypass pipe 51 is first opened to allow pulp suspension to pass through the
15 bypass pipe, and then, stop valves 53, 54 on the side of a main pipe 55 are closed. Thereafter, the portion of the main pipe between the stop valves 53 and 54 is filled with reference liquid through a supply port 57. Thus, the zero adjustment of the concentration meter 56
20 is completed.

As described above, in the conventional concentration meter using microwaves, the measured concentration value may involve an error depending on the mixture ratio of the additives added to the pulp suspension.
25 Moreover, to perform zero-point adjustment, the concentration meter must comprise a bypass pipe and stop valves, and an operation using them are required to fill

the concentration meter with reference liquid.

BRIEF SUMMARY OF THE INVENTION

An object of the present invention is to provide a method and apparatus for accurately and easily measuring the concentration of matter in liquid by using microwaves, and more specifically to provide a method and apparatus for accurately and easily measuring the concentration of suspended matter and/or dissolving matter in suspension by using microwaves.

10 The above object is achieved by a method comprising: a measuring step for measuring a property of microwaves by transmitting microwaves through a fluid containing matter to be measured; a storing step for storing a correction parameter set of a sensitivity coefficient and a mixture ratio concerning the matter to be measured; and a calculating step for calculating a concentration of the matter to be measured from the property of the microwaves obtained in the measuring step and the correction parameter set obtained in the storing step.

20 The above object is achieved by an apparatus comprising: measuring means for measuring a property of microwaves by transmitting microwaves through a fluid containing matter to be measured; storing means for storing a correction parameter set of a sensitivity coefficient and a mixture ratio concerning the matter to be measured; and calculating means for calculating

a concentration of the matter to be measured from the property of the microwaves obtained by the measuring means and the correction parameter set obtained in the storing means.

5 According to the present invention, microwaves are transmitted through a fluid containing matter to be measured and a property of the microwaves is measured, thereby obtaining the concentration of the matter in the fluid. In other words, if the fluid contains only
10 one kind of matter, the property of the transmitted microwaves has a specific relationship to the matter in connection with the concentration and the sensitivity coefficient of the matter. The concentration of the matter is thus obtained utilizing the relationship.

15 The storing means store, as correction parameter sets, the sensitivity coefficients and the mixture ratios of the respective kinds of matter in a mixture additive containing a plurality of kinds of matter of different sensitivity coefficients with respect to the
20 property of the microwaves. The calculating means calculate the concentration of at least matter to be measured, based on the information including the property of the microwaves and the correction parameter set. Therefore, even if an additive is mixed in the
25 fluid to be measured, if the sensitivity coefficients and the mixture ratios of the respective kinds of matter are known in advance, a value corresponding to the

- 6 -

sensitivity coefficient of the mixture can be obtained.
Thus, the concentration of the matter to be measured
5 can be calculated.

According to a further broad aspect of the present
invention there is provided a method which comprises a
measuring step for measuring a property of microwaves
by transmitting microwaves through a fluid containing a
10 plurality of kinds of matter to be measured. A storing
step is provided for storing correction parameter sets.
Each of the sets being defined by a mixture ratio of
the kind of matter to be measured and a sensitivity
coefficient corresponding to the mixture ratio. A
15 calculating step calculates the concentrations of the
plurality of kinds of matter to be measured from the
property of the microwaves obtained in the measuring
step and the correction parameter sets obtained in the
storing step.

20 According to a further broad aspect of the present
invention there is provided an apparatus which
comprises measuring means for measuring a property of
microwaves by transmitting microwaves through a fluid
containing a plurality of kinds of matter to be
25 measured. Storing means is provided for storing
correction parameter sets. Each of the sets is defined
by a mixture ratio of the kind of matter to be measured
and a sensitivity coefficient corresponding to the
mixture ratio. Calculating means is provided for
30 calculating concentrations of the plurality of kinds of
matter to be measured from the property of the
microwaves obtained in the measuring means and the
correction parameter sets obtained in the storing
means.

35

- 6a -

Additional objects and advantages of the invention will be set forth in the description which follows, and
5 in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the appended
10 claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate presently preferred embodiments of the invention, and together
15 with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a diagram showing results of measurement
20 in which the pulp concentration and additive concentrations are individually measured by a microwave concentration meter;

FIGS. 2A and 2B are diagrams showing a piping system including a conventional concentration meter, in
25 which FIG. 2A is a plan view and FIG. 2B is a front view;

FIG. 3 is a diagram showing an embodiment of

a concentration meter using microwaves according to the present invention;

FIG. 4 is a diagram showing details of the detector body shown in FIG. 3;

5 FIG. 5 is a diagram showing an example of data groups of the sensitivities and mixture ratios of additives used in the embodiment; and

10 FIG. 6 is a flowchart showing a concentration measuring method according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

A preferred embodiment of the present invention will now be described.

15 A concentration meter of the present invention, i.e., an apparatus for measuring the concentration of dissolving matter and/or suspended matter in liquid, measures the concentration of matter in, for example, pulp liquid flowing through a pipeline. As shown in
20 FIG. 3, a concentration meter according to a preferred embodiment of the present invention comprises a detector body 2 and a calculation display unit 3. The calculation display unit 3 is connected to a host computer 38 by a wire or radio, if necessary. The host computer 38 supplies instructions to the apparatus of the present
25 invention and receives data therefrom. The detector body 2 and the calculation display unit 3 are connected by suitable connecting means so as to achieve data

transmission and reception.

The detector body 2 is fixed to a pipeline 1, while the calculation display unit 3 may be arranged either in proximity to or apart from the detector body 2.

5 The concentration meter of the present invention may be comprised of one calculation display unit 3 and a plurality of detector bodies 2. In this case, the one calculation display unit 3 is capable of processing data supplied from the respective detector bodies 2.
10 For this purpose, the calculation display unit 3 should have an arithmetic processing system which a person skilled in the art usually employs: for example, an arithmetic processing system using a multiple CPU, or a processing system for processing data from the
15 individual detector bodies in a time-dividing manner.

As shown in FIG. 4, the detector body 2 comprises a microwave oscillator 2A, a power splitter 2B, a transmission antenna 2C and a reception antenna 2D. Microwaves are input to pulp suspension flowing through
20 the pipeline 1, and signals (from the power splitter 2B and the reception antenna 2C) are output from the detector body 2. Using the phase lags, the concentration can be calculated from the equation (1) by the calculation display unit 3.

25 The calculation display unit 3 comprises a communication interface 31 for receiving a measurement result obtained by the detector body 2, a key board 32 for

- 9 -

inputting data, a CPU 33, a memory 34 and a display 35. The CPU 33 operates in accordance with an arithmetic program 36 stored in the memory 34. It calculates a concentration of, for example, pulp or an additive flowing through the pipeline 1, using the measurement result supplied from the detector body 2 and a correction parameter set stored in a parameter set storage region 37, and causes the display 35 to display the concentration. The memory 34 includes the arithmetic program 36 and the parameter set storage region 37. The parameter set storage region 37 stores a correction parameter set as shown in FIG. 5. A set of correction parameters includes information on the mixture ratio of each additive to the liquid used for producing a product or a step of producing the product and the sensitivity of matter (additive or pulp) contained in the liquid. The correction parameter sets are obtained by utilizing the fact that liquid, containing a plurality of additives, having a specific ratio in accordance with a product or a step for producing a product, is mixed in the pulp suspension in a paper-maker plant. Since the kind of the additives in the liquid and the mixture ratio vary depending on the product or the producing step, the number of correction parameter sets corresponds to the number of kinds of pulp suspensions which are caused to flow through the pipeline 1. In accordance with the

kind of pulp suspension flowing through the pipeline 1,
the arithmetic program 36 switches the correction
parameter set which the CPU 33 uses to calculate the
concentration. The keyboard 32 is used to input various
5 data and the contents of the correction parameter set.
The display 35 displays calculated concentrations of the
pulp suspension liquid.

The sensitivity in the concentration meter for
each additive and the ratio of the additive to a pulp
10 suspension liquid are known in advance through
preparatory measurement or the like, for example
as shown in FIG. 5. In other words, FIG. 5 shows
an example of a mixed additive consisting of a plurality
of kinds of matter contained in the liquid to be
15 measured.

FIG. 5 is a diagram showing an example of the
correction parameter set of the sensitivities and
mixture ratios of additives used in the concentration
measurement method in the concentration meter according
20 to the embodiment of the present invention.

In FIG. 5, a symbol "a" denotes the sensitivity of
an additive A, which is different from "a" in the
equation (1).

Assuming that the mass of the pulp is W_p and the
25 mass of water is W_w , the pulp concentration x is
obtained by the following equation:

$$x = W_p / (W_p + W_w) \quad \dots (2)$$

- 11 -

The equation (2) is simply obtained by the definition of the concentration.

When the additive A is added to the pulp in a ratio A, the indication value of the apparent concentration is
5 obtained by the following equation:

$$x_a = a \cdot A \cdot x \quad \dots (3)$$

The indication values of the apparent concentrations of the other additives are obtained in the same manner as follows:

$$10 \quad x_b = b \cdot B \cdot x \quad \dots (4)$$

$$x_c = c \cdot C \cdot x \quad \dots (5)$$

$$x_d = d \cdot D \cdot x \quad \dots (6)$$

$$x_e = e \cdot E \cdot x \quad \dots (7)$$

Therefore, when the pulp and all the additives
15 are mixed, the indication value M of the apparent concentration of the concentration meter is obtained by adding all the above equations (2) to (7).

$$\begin{aligned} M &= x + x_a + x_b + x_c + x_d + x_e \\ &= x (1 + a \cdot A + b \cdot B + c \cdot C + d \cdot D + e \cdot E) \quad \dots (8) \end{aligned}$$

20 Therefore, the pulp concentration x is obtained by the following equation:

$$x = M / (1 + a \cdot A + b \cdot B + c \cdot C + d \cdot D + e \cdot E) \quad \dots (9)$$

On the other hand, the concentration X of all solid components including the additives (concentration of the
25 suspended matter and the dissolving matter) is obtained as follows from the equation (9) and the mixture ratios of the additives shown in FIG. 5:

$$\begin{aligned}
X &= x + A \cdot x + B \cdot x + C \cdot x + D \cdot x + E \cdot x \\
&= x (1 + A + B + C + D + E) \\
&= \{M (1 + A + B + C + D + E)\} \\
&\quad / (1 + a \cdot A + b \cdot B + c \cdot C + d \cdot D + e \cdot E) \\
5 \quad &= k \cdot M \quad \dots (10)
\end{aligned}$$

where

$$\begin{aligned}
k &= (1 + A + B + C + D + E) \\
&\quad / (1 + a \cdot A + b \cdot B + c \cdot C + d \cdot D + e \cdot E) \quad \dots (11)
\end{aligned}$$

On the other hand, the indication value of the
 10 apparent concentration of the concentration meter is
 obtained by the equation (1) as $M = C \cdot a_k \cdot \Delta\theta$, which is
 substituted in the equation (10).

$$X = k \cdot C \cdot a_k \cdot \Delta\theta = k \cdot C \cdot a_k (\theta_1 - \theta_2) \quad \dots (12)$$

In this equation, a_k is not the sensitivity of the
 15 additive A but the general sensitivity coefficient as in
 the equation (1).

Based on the above, a reference phase angle θ_1 is
 obtained by the following equation:

$$\theta_1 = \theta_2 - X / (k \cdot C \cdot a_k) \quad \dots (13)$$

20 The concentration meter is operated during a manu-
 facturing process using a pulp suspension to measure
 a phase angle θ_2 when microwaves are incident on the
 suspension. At the same time, a sample of the pulp
 suspension to be measured by the concentration meter is
 25 extracted from the plant, and the concentration X of all
 solid components is measured by manual analysis.

As the manual analysis, it is possible to employ

- 13 -

a method of drying and solidifying the extracted sample and obtaining the difference in mass between the sample and the solidified sample, thereby calculating the concentration X of all the solid components.

5 When an object to be measured not specified, general values are used for the correction coefficient C and the sensitivity coefficient a_k . As a practical example, a value determined by the diameter of the pipe line is input as the sensitivity coefficient a_k , and "1" 10 is input as the correction coefficient C , if correction is not particularly required.

 All the values of the right side of the equation (13) are determined by the above calculations, so that the reference phase angle θ_1 can be obtained. Thus, it 15 is unnecessary to fill the pipeline with the reference liquid to perform the zero adjustment.

 Using the indication value M of the apparent concentration obtained by the concentration meter, the pulp concentration x can be calculated from the 20 equation (9).

 Further, the concentration x_a of the additive A is obtained as follows by substituting the equation (9) in the equation (3) to obtain x_a .

$$X_a = (a \cdot A \cdot M) / (1 + a \cdot A + b \cdot B + c \cdot C + d \cdot D + e \cdot E) \dots (14)$$

25

 Thus, the concentration of a single additive can also be calculated. The concentrations x_b to x_e of the

- 14 -

additives A to E can be obtained in the same manner as described above.

An operation of the aforementioned concentration meter according to the embodiment of the present invention will now be described with reference to FIG. 6. First, a concentration measurement operation of the concentration meter, which has been subjected to zero-adjustment, will be described. In Step 101, the correction parameter sets are switched in accordance with the kind of the pulp suspension flowing through the pipeline 1 based on communication information supplied through the communication interface 31 from the host computer which monitors and controls the overall plants, information stored in the memory 34 concerning a preset production schedule for a product, or information input through the keyboard 32.

Next, in Step 101, microwaves are applied to the pulp suspension flowing through the pipeline 1, and the phase lag θ_2 is obtained.

In Step 102, the CPU 33 substitutes the phase difference obtained by the above step in the equation (1) to obtain the indication value M of the apparent concentration in the concentration meter. Further, the indication value M of the apparent concentration of the concentration meter and the contents of the correction parameter sets are substituted in the equation (9), thereby calculating the pulp concentration x.

In Steps 103 and 104, if it is requested that the concentration (e.g., x_a) of an additive be obtained, the concentration x_a is calculated from the equation (14). If it is requested that the concentration X of all
5 solid components be obtained, the concentration X is calculated from the equation (10).

In Step 105, the pulp concentration x , the concentration (e.g., x_a) of the additive, if requested, and the concentration X of all solid components are
10 displayed by the display 35.

A zero-adjustment operation will now be described.

First, microwaves are applied to the pulp suspension which flows through the pipeline 1 and corresponds to a correction parameter set, and the phase
15 lag θ_2 is measured.

At the same time, a sample is extracted from the pulp suspension from which the phase lag θ_2 is measured. Then, the concentration X of the solid components of the suspension is obtained by means of the absolute dry
20 method.

Subsequently, the phase lag θ_2 , the concentration X of the solid components and the values of the correction parameter set are substituted in the equation (13), thereby obtaining a reference phase angle θ_1 .

25 As described above, according to the concentration meter and the concentration measuring method of the embodiment of the present invention, the correction

parameter sets are prepared in advance, and the pulp concentration x , the concentration (e.g., x_a) of an additive or the concentration X of all solid components is calculated from the equation (9), (14) or (10) on the basis of the measurement result obtained by the detector body 2 and the parameter sets. Therefore, even if a mixed additive has been added to the pulp suspension, the concentration of the pulp or all solid components (the sum of the pulp and additive concentrations) in the suspension can be accurately measured in consideration of the influence of the mixture.

Further, the pulp concentration of the pulp suspension during a manufacturing process is measured by manual analysis, while the concentration X of all solid components is measured by the concentration meter, so that the reference phase angle θ_1 can be obtained. Thus, the zero adjustment using reference liquid is not required.

Therefore, a bypass pipe for zero-point adjustment, stop valves for filling the concentration meter with the reference liquid and an operation using them are not required.

As regards the preset correction parameter sets, a set of sensitivities and the mixture ratios of additives is determined for each of the products, as shown in FIG. 5. According to the embodiment, as described before, a plurality of correction parameters

are stored in the memory, in such a manner that
a correction parameter set can be selected for every
product. Therefore, data can be easily switched for
the respective products. Further, as described before,
5 a parameter can be selected by an input through the
keyboard or by an external communication signal.

As has been described above in detail, the present
invention provides a concentration meter by which the
concentration of pulp in pulp suspension can be
10 accurately measured, even if the pulp suspension
contains an additive. The present invention also
provides a concentration meter by which the concen-
trations of additives in pulp suspension can be
accurately measured. Moreover, the present invention
15 provides a concentration meter which does not require
a bypass pipeline for the zero-point adjustment or
an operation for filling the concentration meter with
reference liquid.

Additional advantages and modifications will
20 readily occur to those skilled in the art. Therefore,
the invention in its broader aspects is not limited to
the specific details and representative embodiments
shown and described herein. Accordingly, various
modifications may be made without departing from the
25 spirit or scope of the general inventive concept as
defined by the appended claims and their equivalents.

CLAIMS:

1. A method comprising:
a measuring step for measuring a property of microwaves
5 by transmitting microwaves through a fluid containing a
plurality of kinds of matter to be measured;
a storing step for storing correction parameter
sets, each set being defined by a mixture ratio of the
kind of matter to be measured and a sensitivity
10 coefficient corresponding to the mixture ratio; and
a calculating step for calculating concentrations of
the plurality of kinds of matter to be measured from the
property of the microwaves obtained in the measuring step
and the correction parameter sets obtained in the storing
15 step.
2. The method according to claim 1, wherein the
calculating step includes a step of measuring a
concentration of at least one of suspended matter and
20 dissolved matter in the fluid.
3. An apparatus comprising:
measuring means for measuring a property of
microwaves by transmitting microwaves through a fluid
25 containing a plurality of kinds of matter to be measured;
storing means for storing correction parameter sets,
each set being defined by a mixture ratio of the kind of
matter to be measured and a sensitivity coefficient
corresponding to the mixture ratio; and
30 calculating means for calculating concentrations of
the plurality of kinds of matter to be measured from the
property of the microwaves obtained in the measuring
means and the correction parameter sets obtained in the
storing means.

4. The apparatus according to claim 3, wherein the storing means include means for storing correction parameter sets, each set corresponding to at least one of suspended matter and dissolved matter in the fluid.

5

5. The apparatus according to claim 3, wherein:
the storing means include means for storing a plurality of correction parameter sets respectively corresponding to a plurality of kinds of matter to be

10 measured; and

the calculating means include switching means for switching the correction parameter sets to be used in calculation in accordance with the kinds of matter to be measured.

15

6. The apparatus according to claim 3, wherein the calculating means include means for obtaining a reference point of the property of the microwaves, based on the property of the microwaves with respect to the matter to
20 be measured and the concentration of the matter.

7. The apparatus according to claim 3, wherein:
a result of measuring the property of the microwaves is a first phase lag in transmitting the microwaves in
25 the fluid;

a reference point of the property of the microwaves is a second phase lag in transmitting the microwaves in fluid which substantially does not contain matter to be measured; and

the property of the microwave is a difference between the first and second phase lags.

8. The apparatus according to claim 3, further comprising control means for controlling the measuring means.

9. The apparatus according to claim 8, wherein the control means include means for controlling a measuring operation of the measuring means, based on instructions from a host computer.

10. The apparatus according to claim 8, further comprising a timer for initiating a measuring operation of the measuring means in a time dividing manner.

2196375

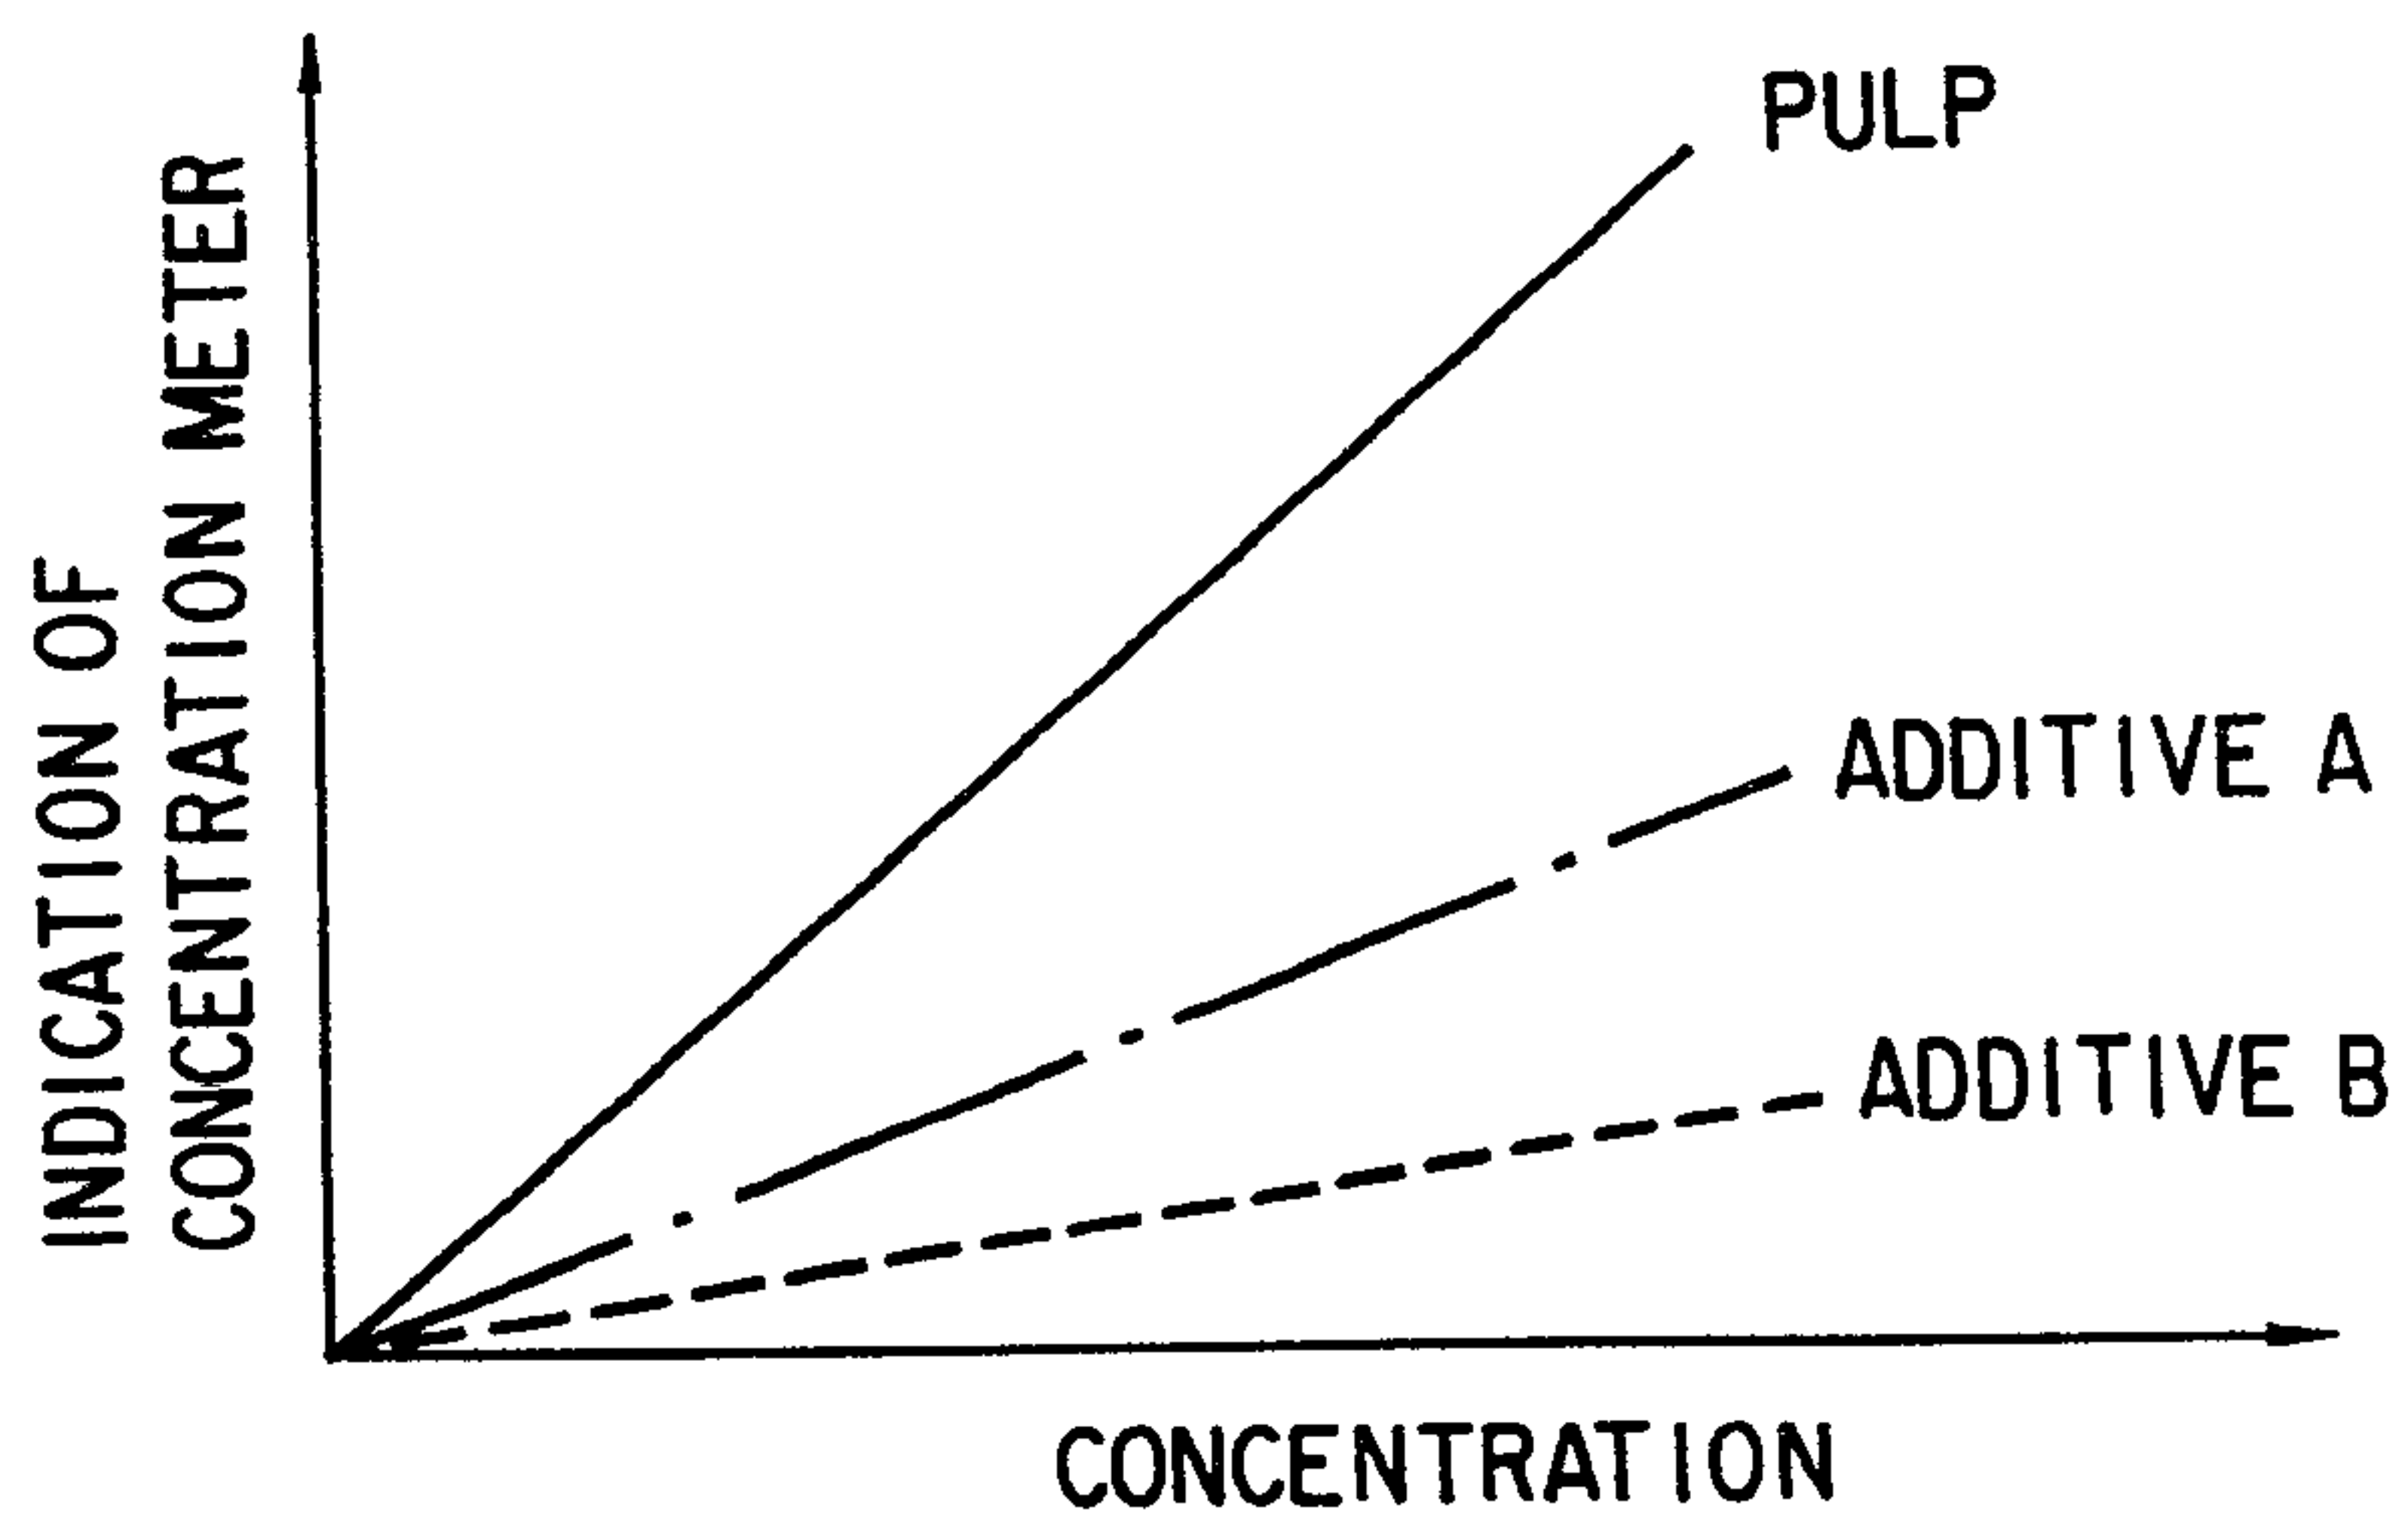


FIG. 1 (PRIOR ART)

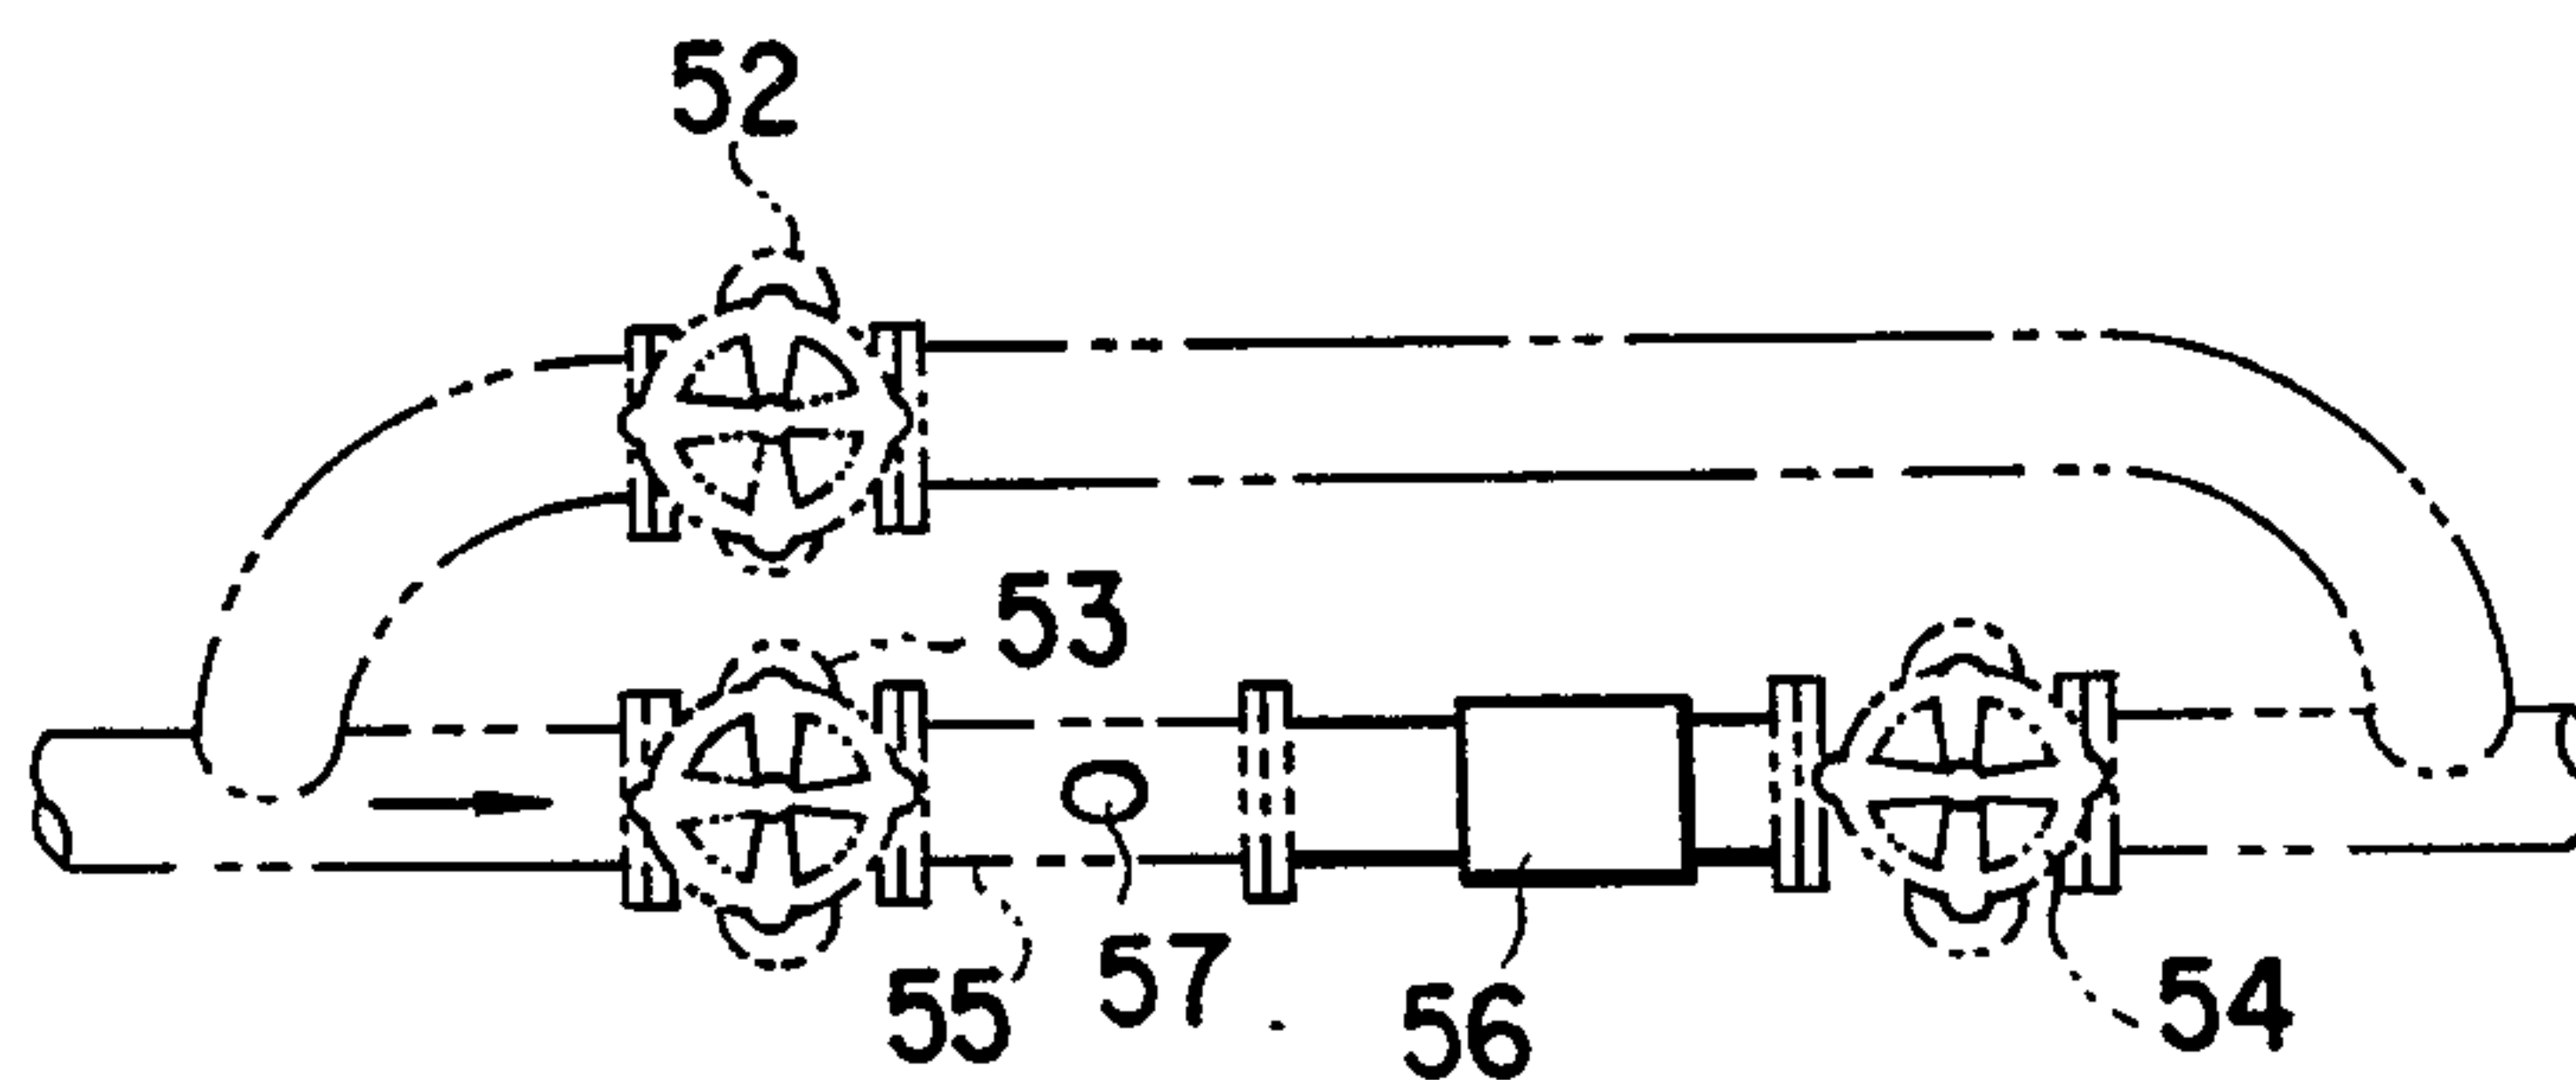


FIG. 2A (PRIOR ART)

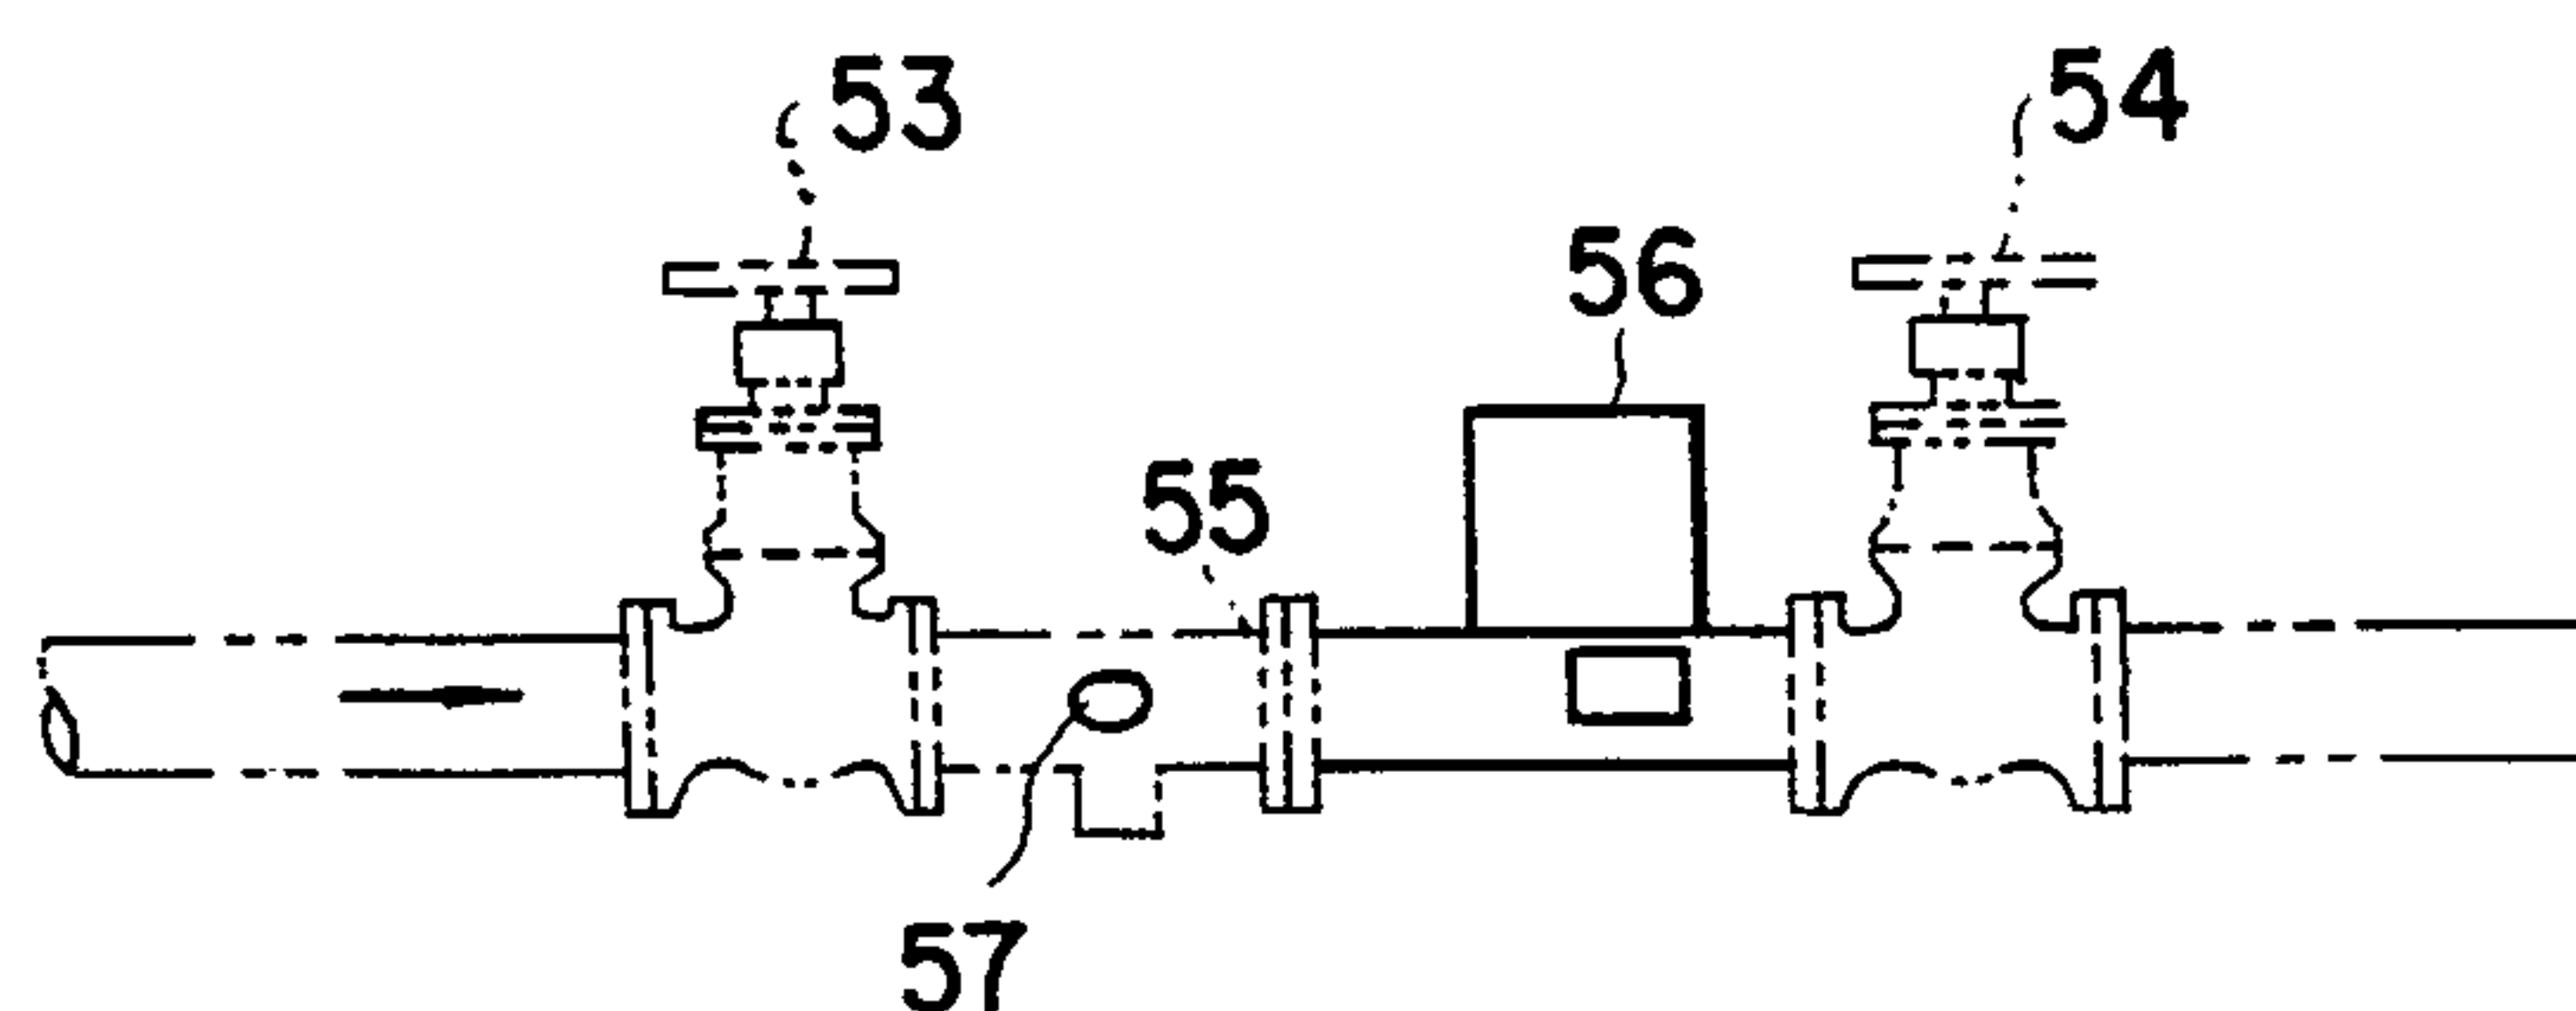


FIG. 2B (PRIOR ART)

PATENT AGENTS

Swaney Ogilvy Renault

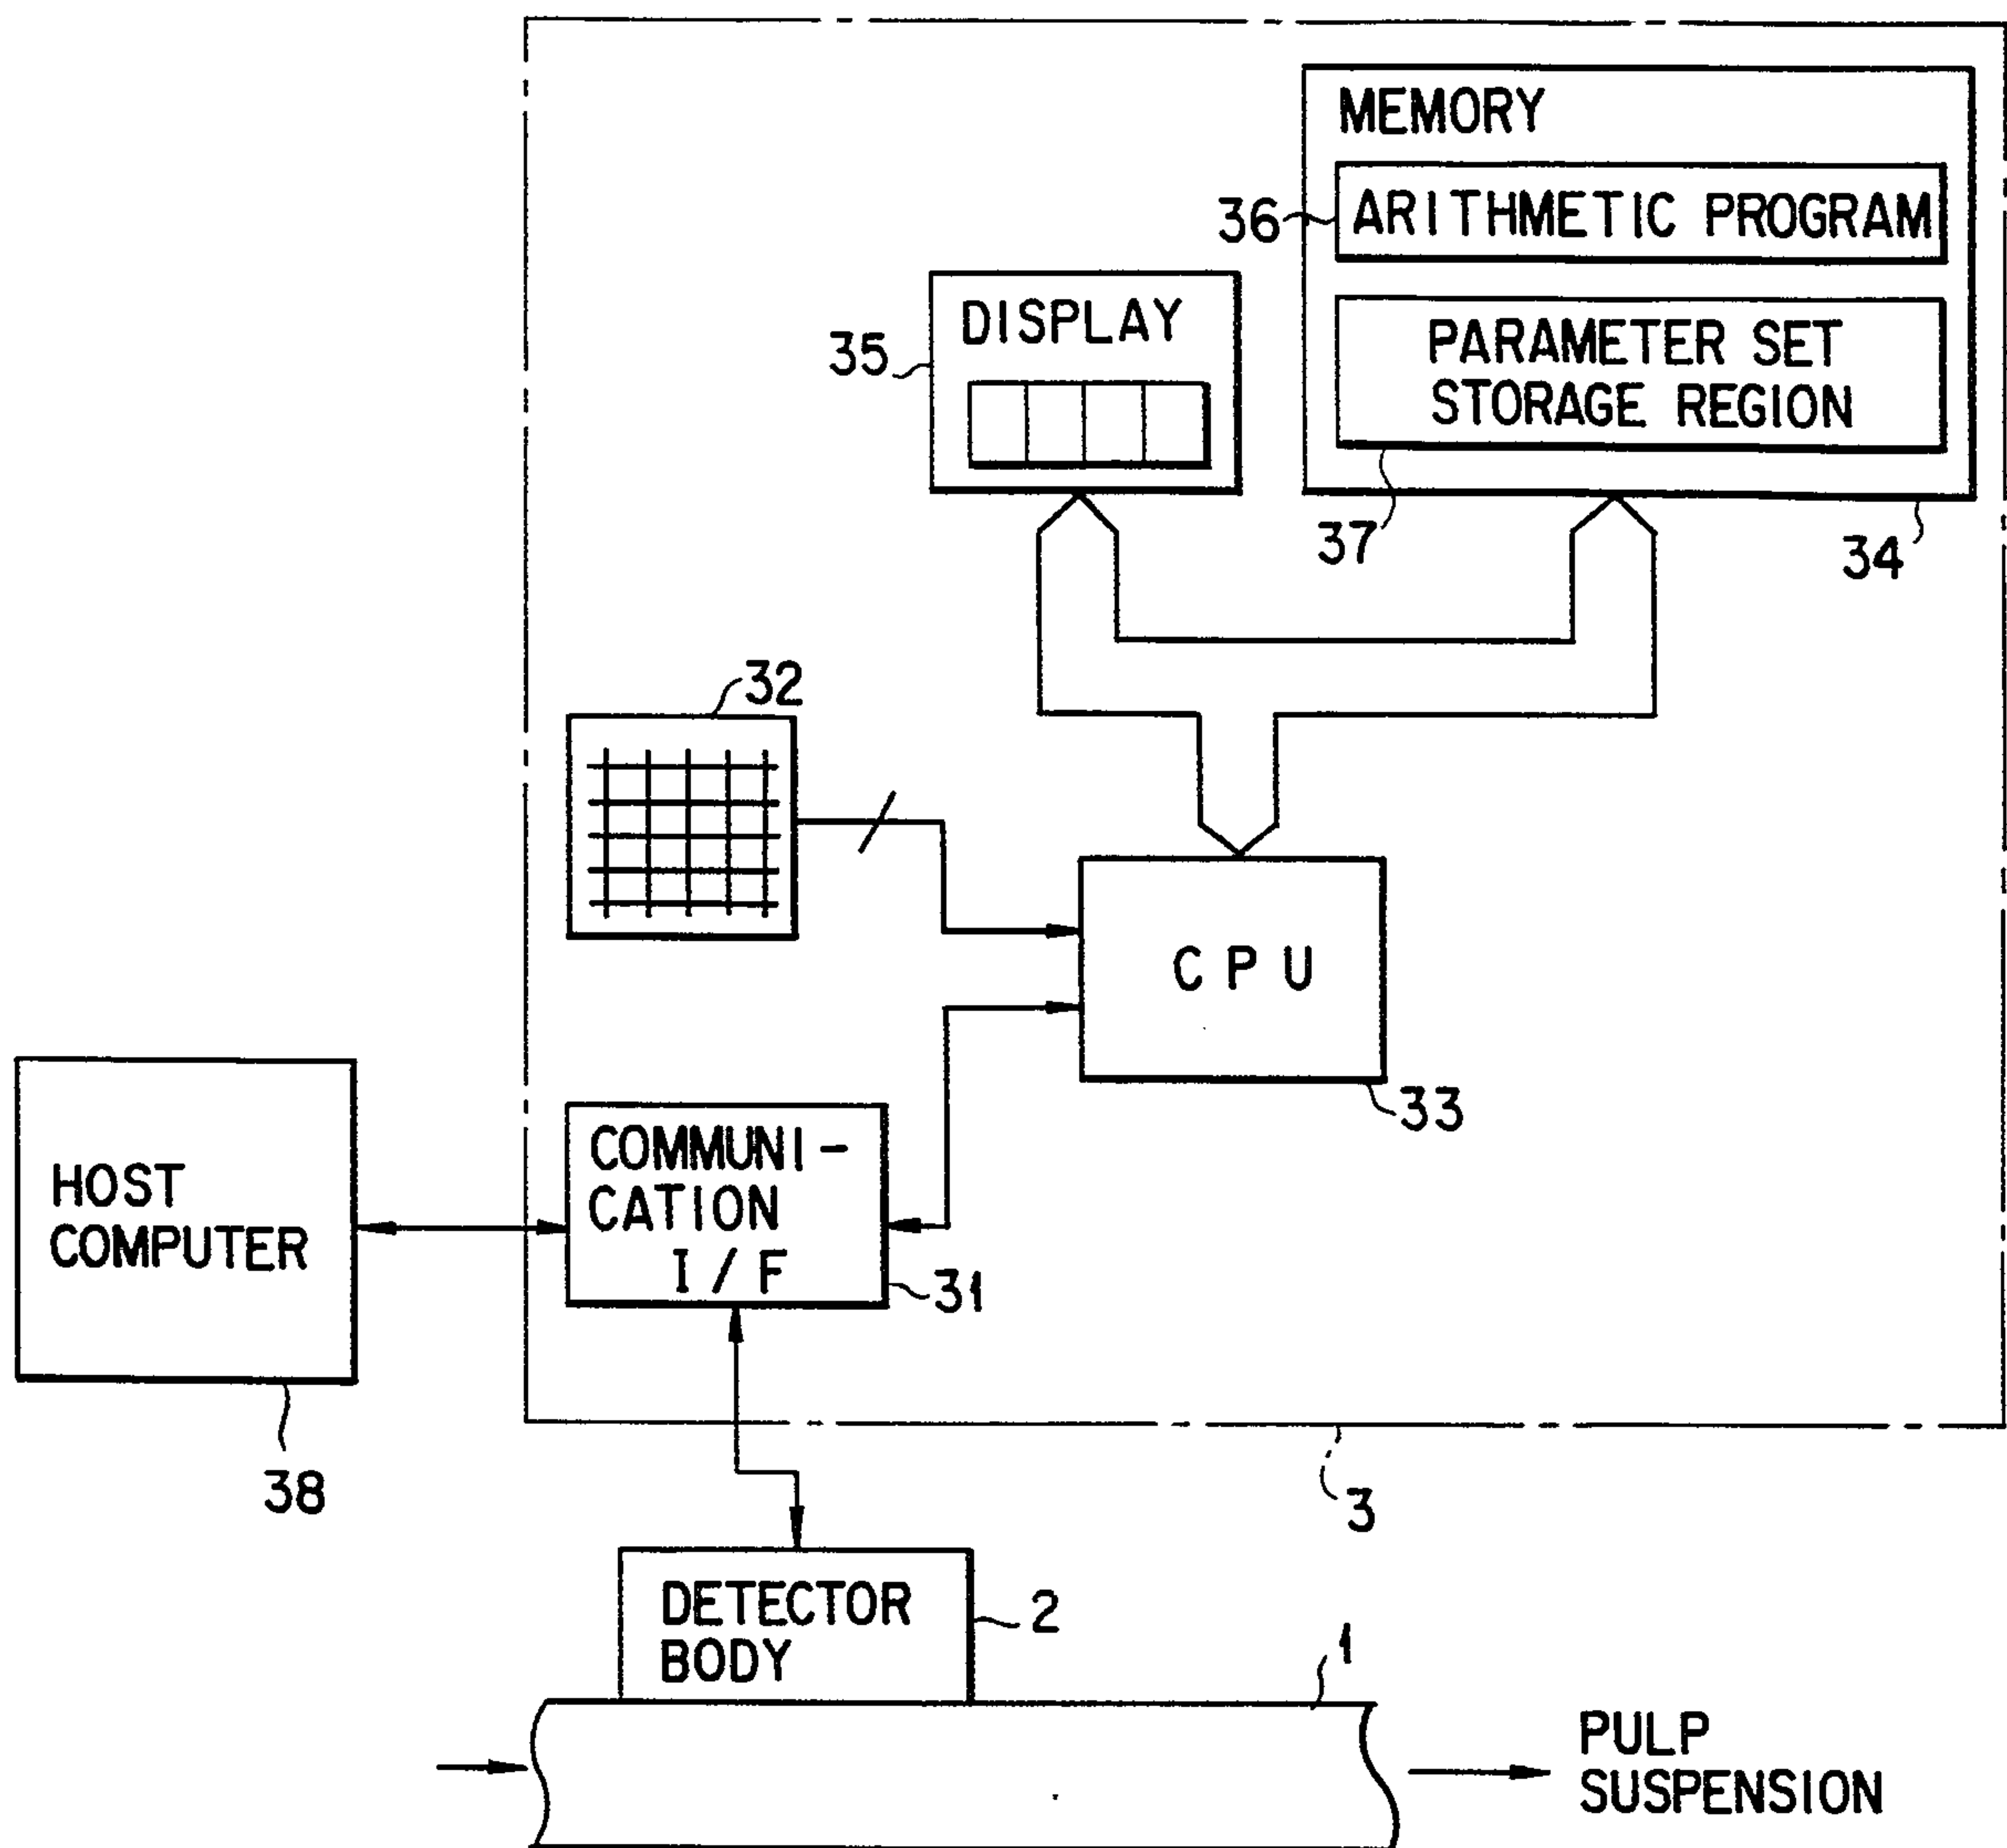


FIG. 3

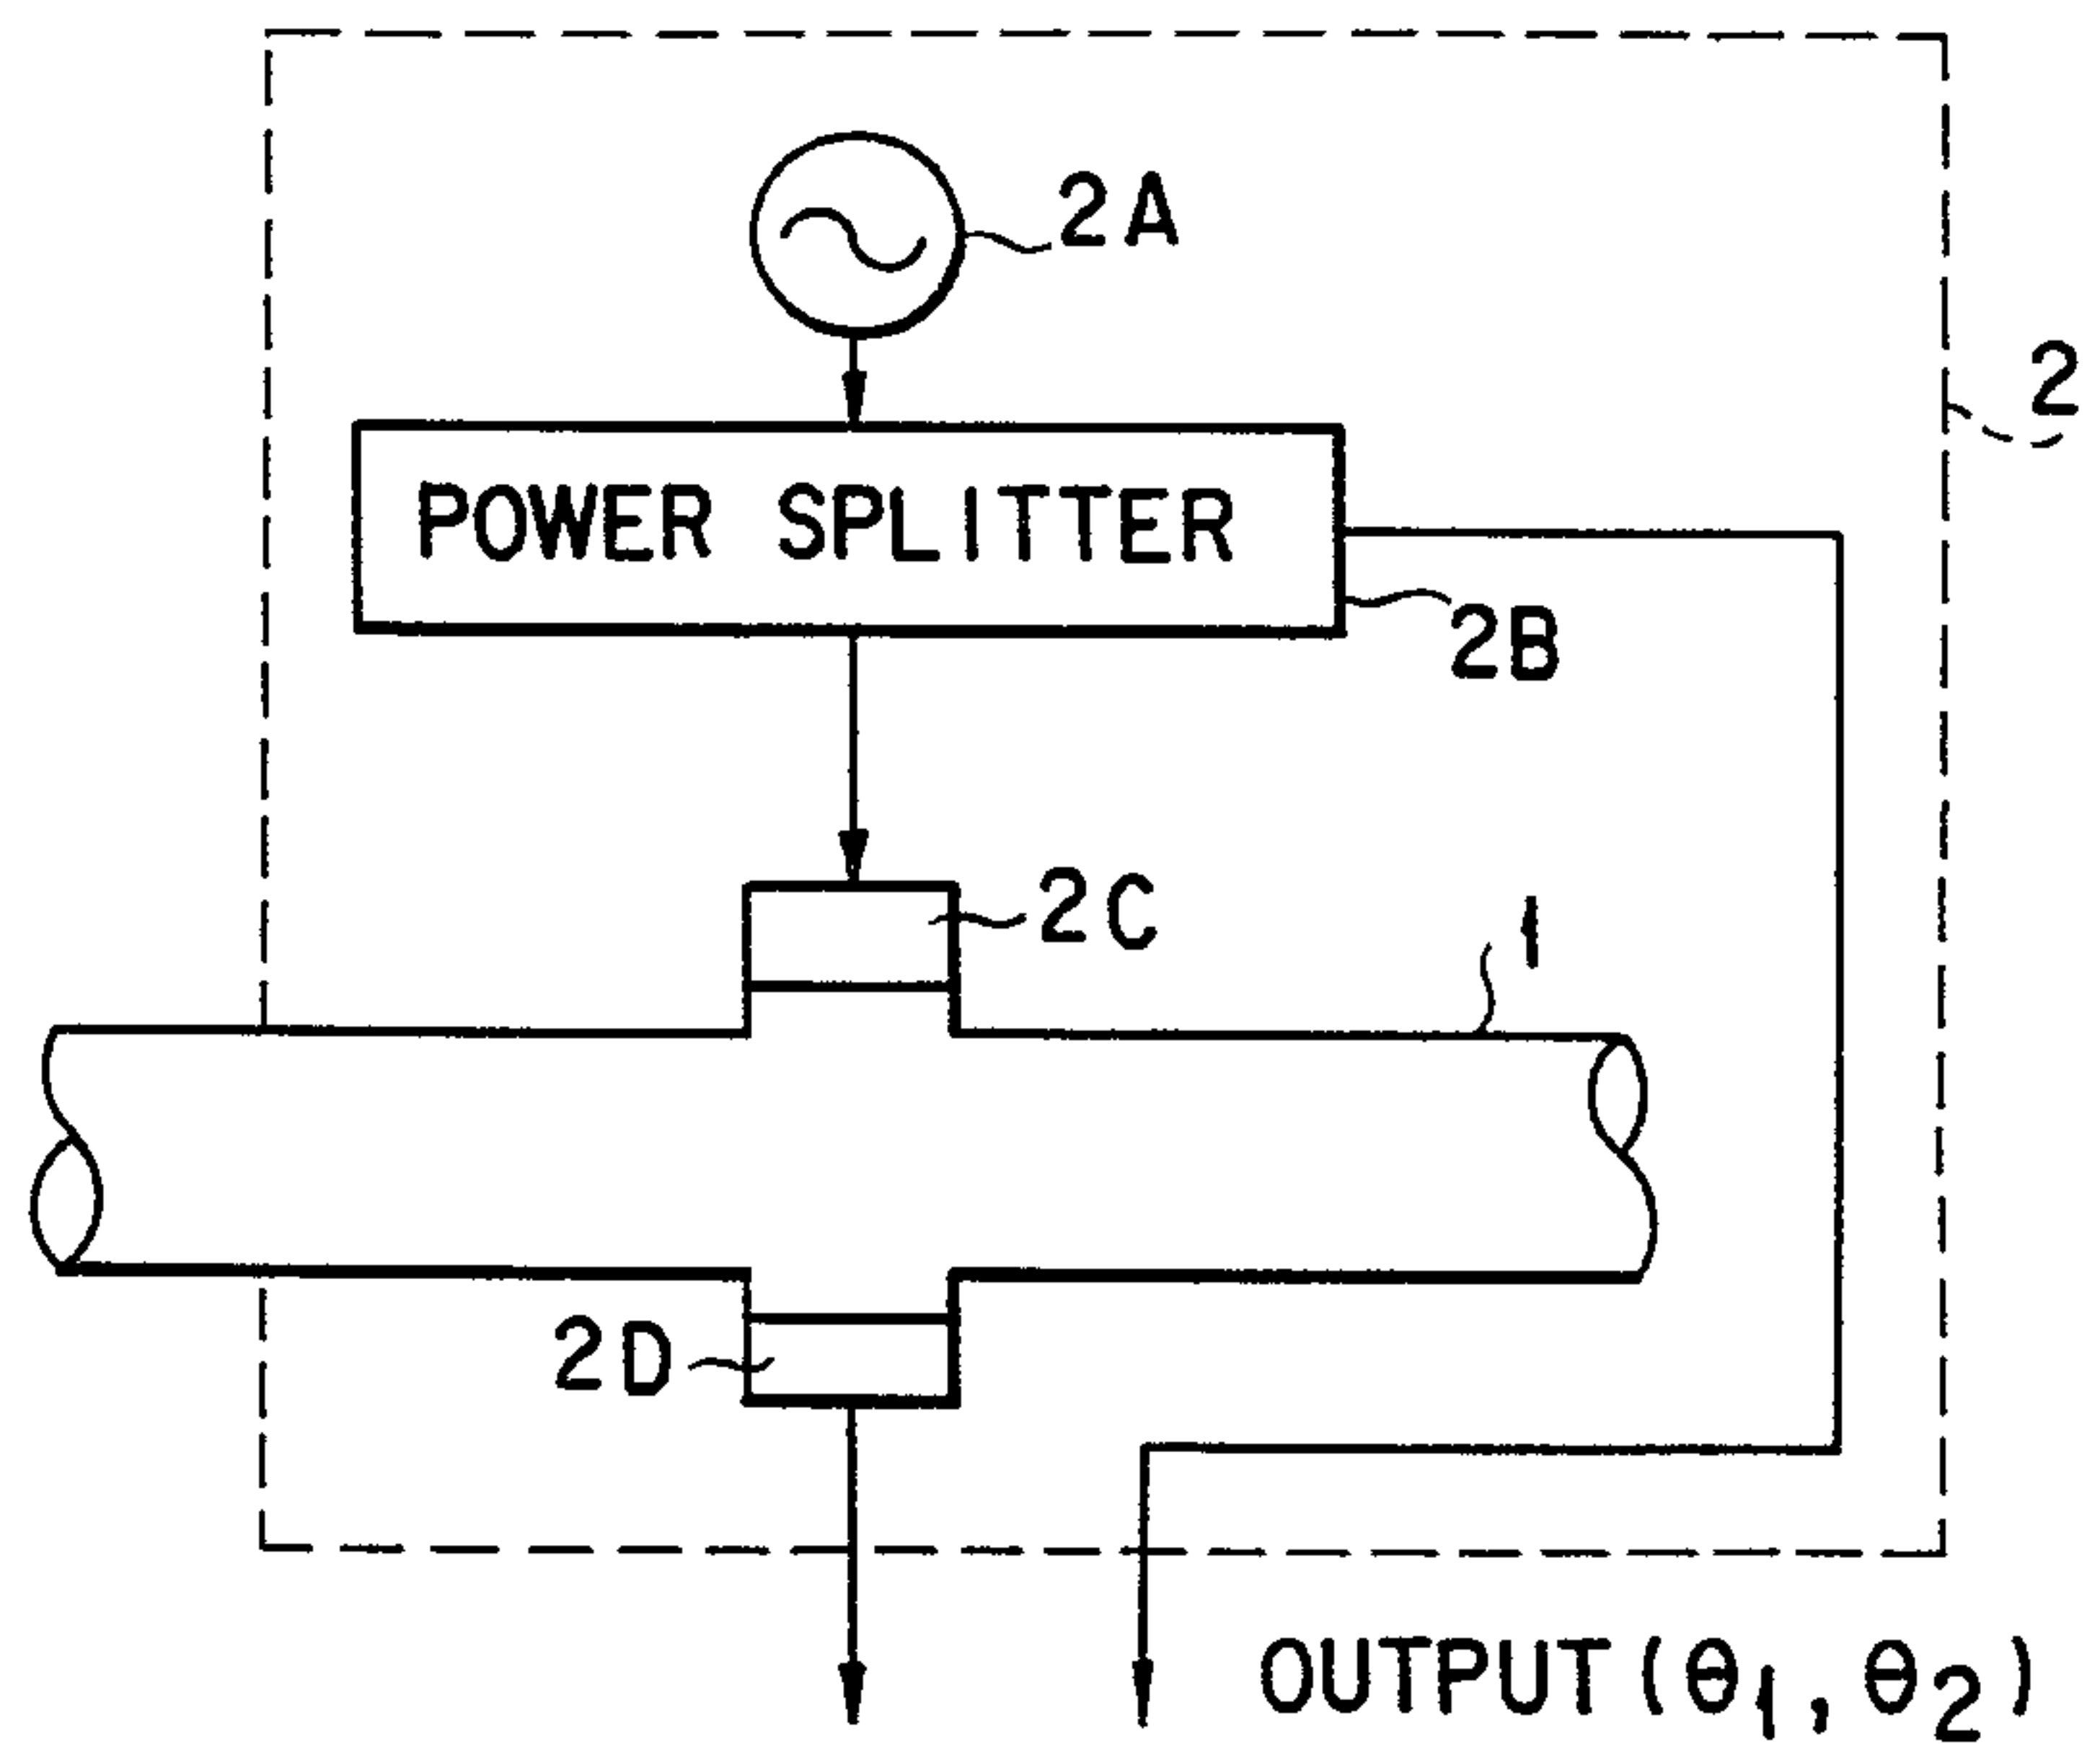


FIG. 4

2196375

PARAMETER SET (1SET)			
MATTER IN LIQUID TO BE MEASURED	SENSITIVITY OF MATTER	MIXTURE RATIO	CONCENTRATION OF ADDITIVE IN PULP
ONLY PULP	(1.0)	-----	(xp)
ADDITIVE A	a	A	x_a
ADDITIVE B	b	B	x_b
ADDITIVE C	c	C	x_c
ADDITIVE D	d	D	x_d
ADDITIVE E	e	E	x_e

FIG. 5

PATENT AGENTS

Dwight Ogilvy Renault

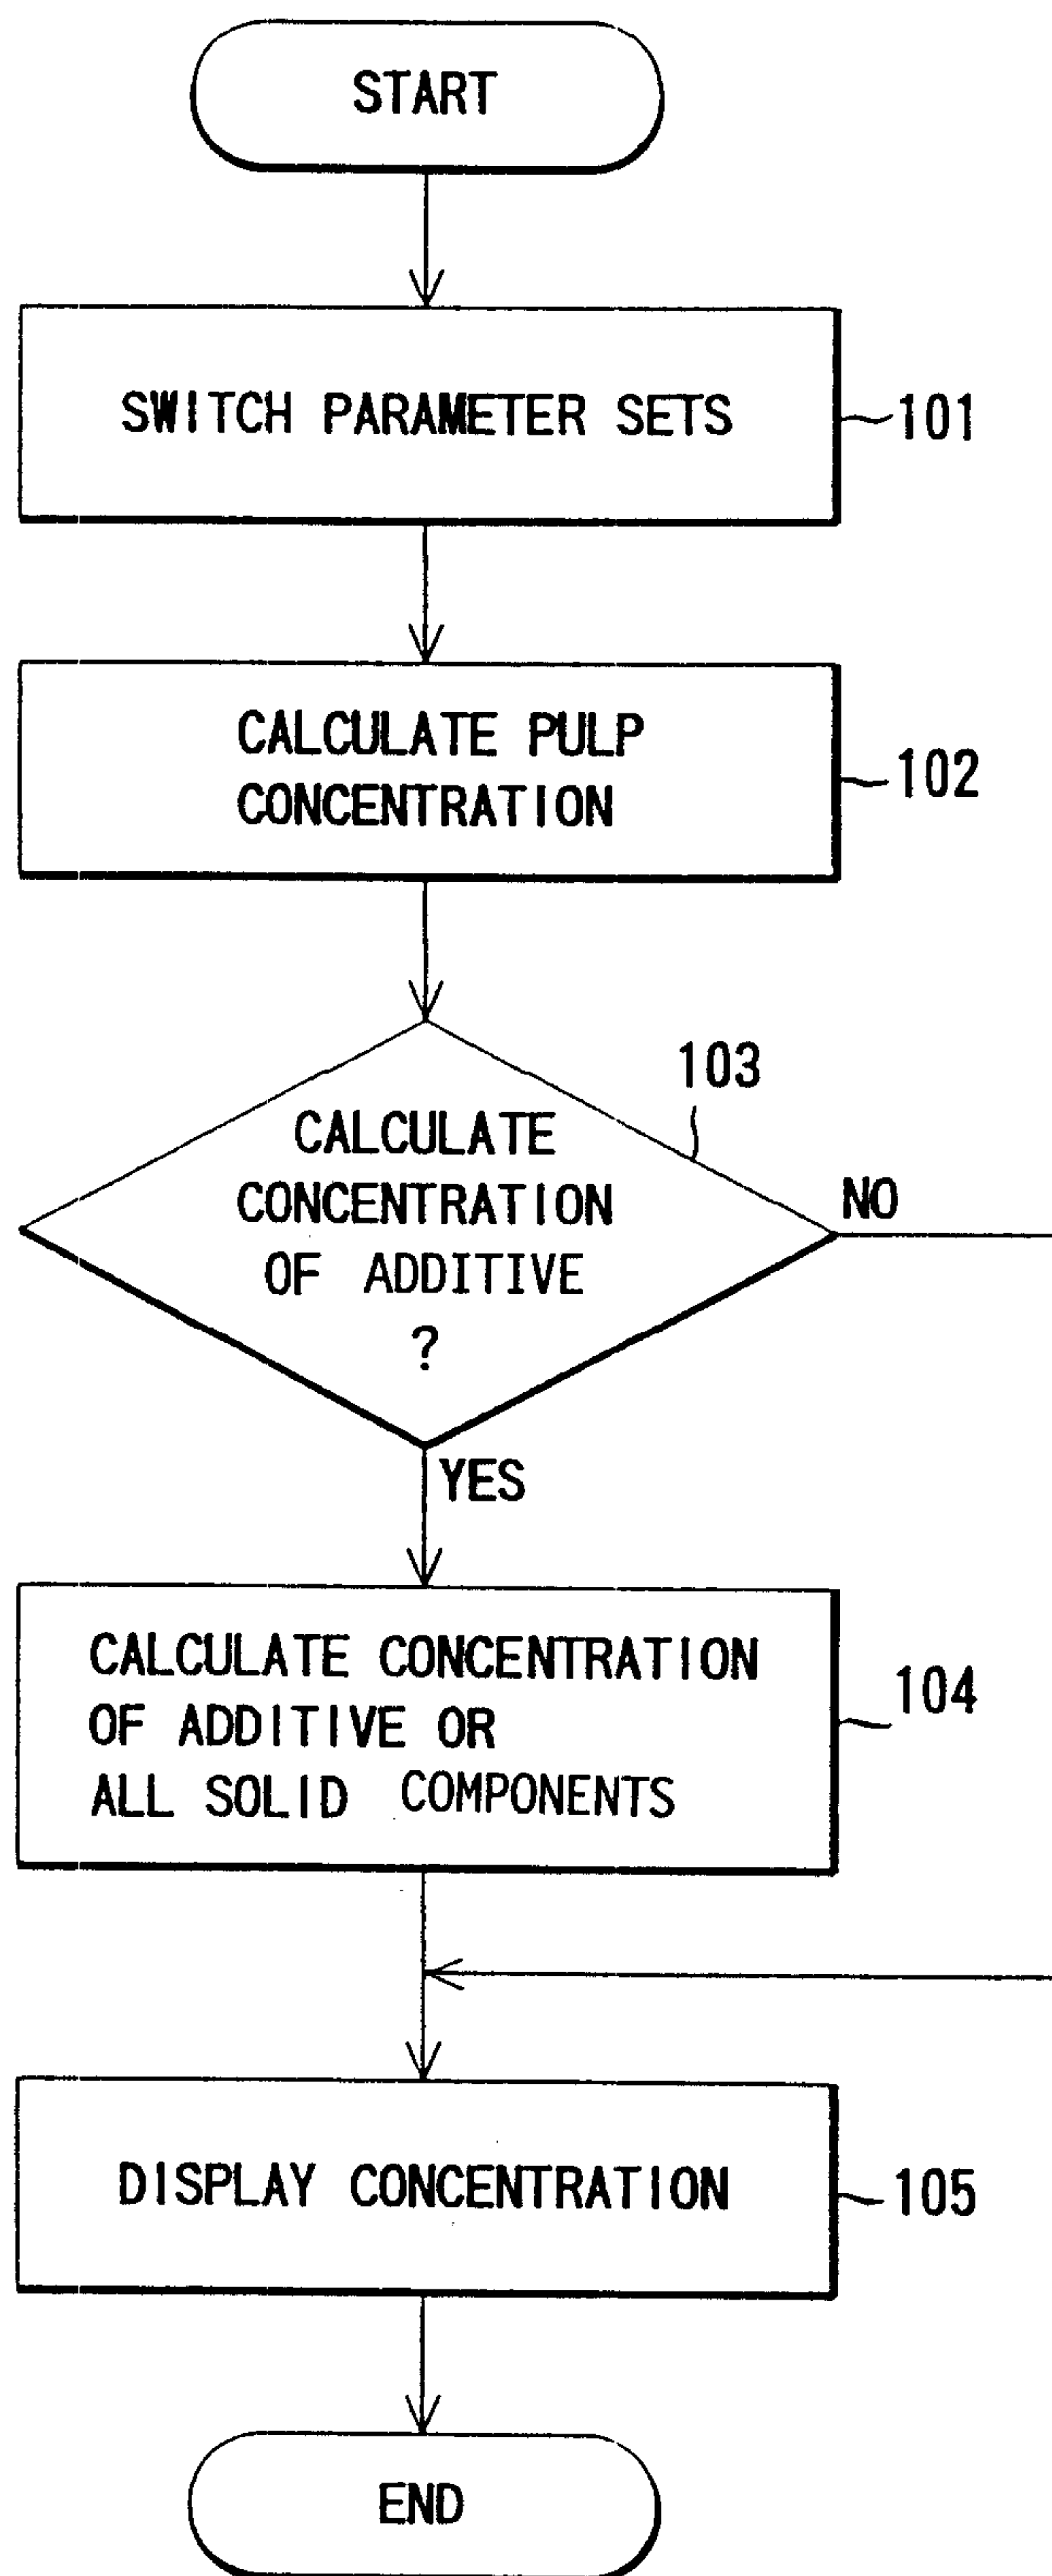


FIG. 6

PATENT AGENTS

Dwight D. Riley, Esq.

