




(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2019/04/18
(41) Mise à la disp. pub./Open to Public Insp.: 2019/10/18
(30) Priorité/Priority: 2018/04/18 (JP2018-079700)

(51) Cl.Int./Int.Cl. *B66F 9/075* (2006.01),
B60K 1/04 (2019.01), *B60L 50/64* (2019.01)
(71) Demandeur/Applicant:
MITSUBISHI LOGISNEXT CO., LTD., JP
(72) Inventeurs/Inventors:
YOSHIOKA, MASAHIRO, JP;
SANO, TAKUYA, JP
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : UNE ELEVATRICE A FOURCHE A BATTERIE
(54) Title: A BATTERY FORKLIFT

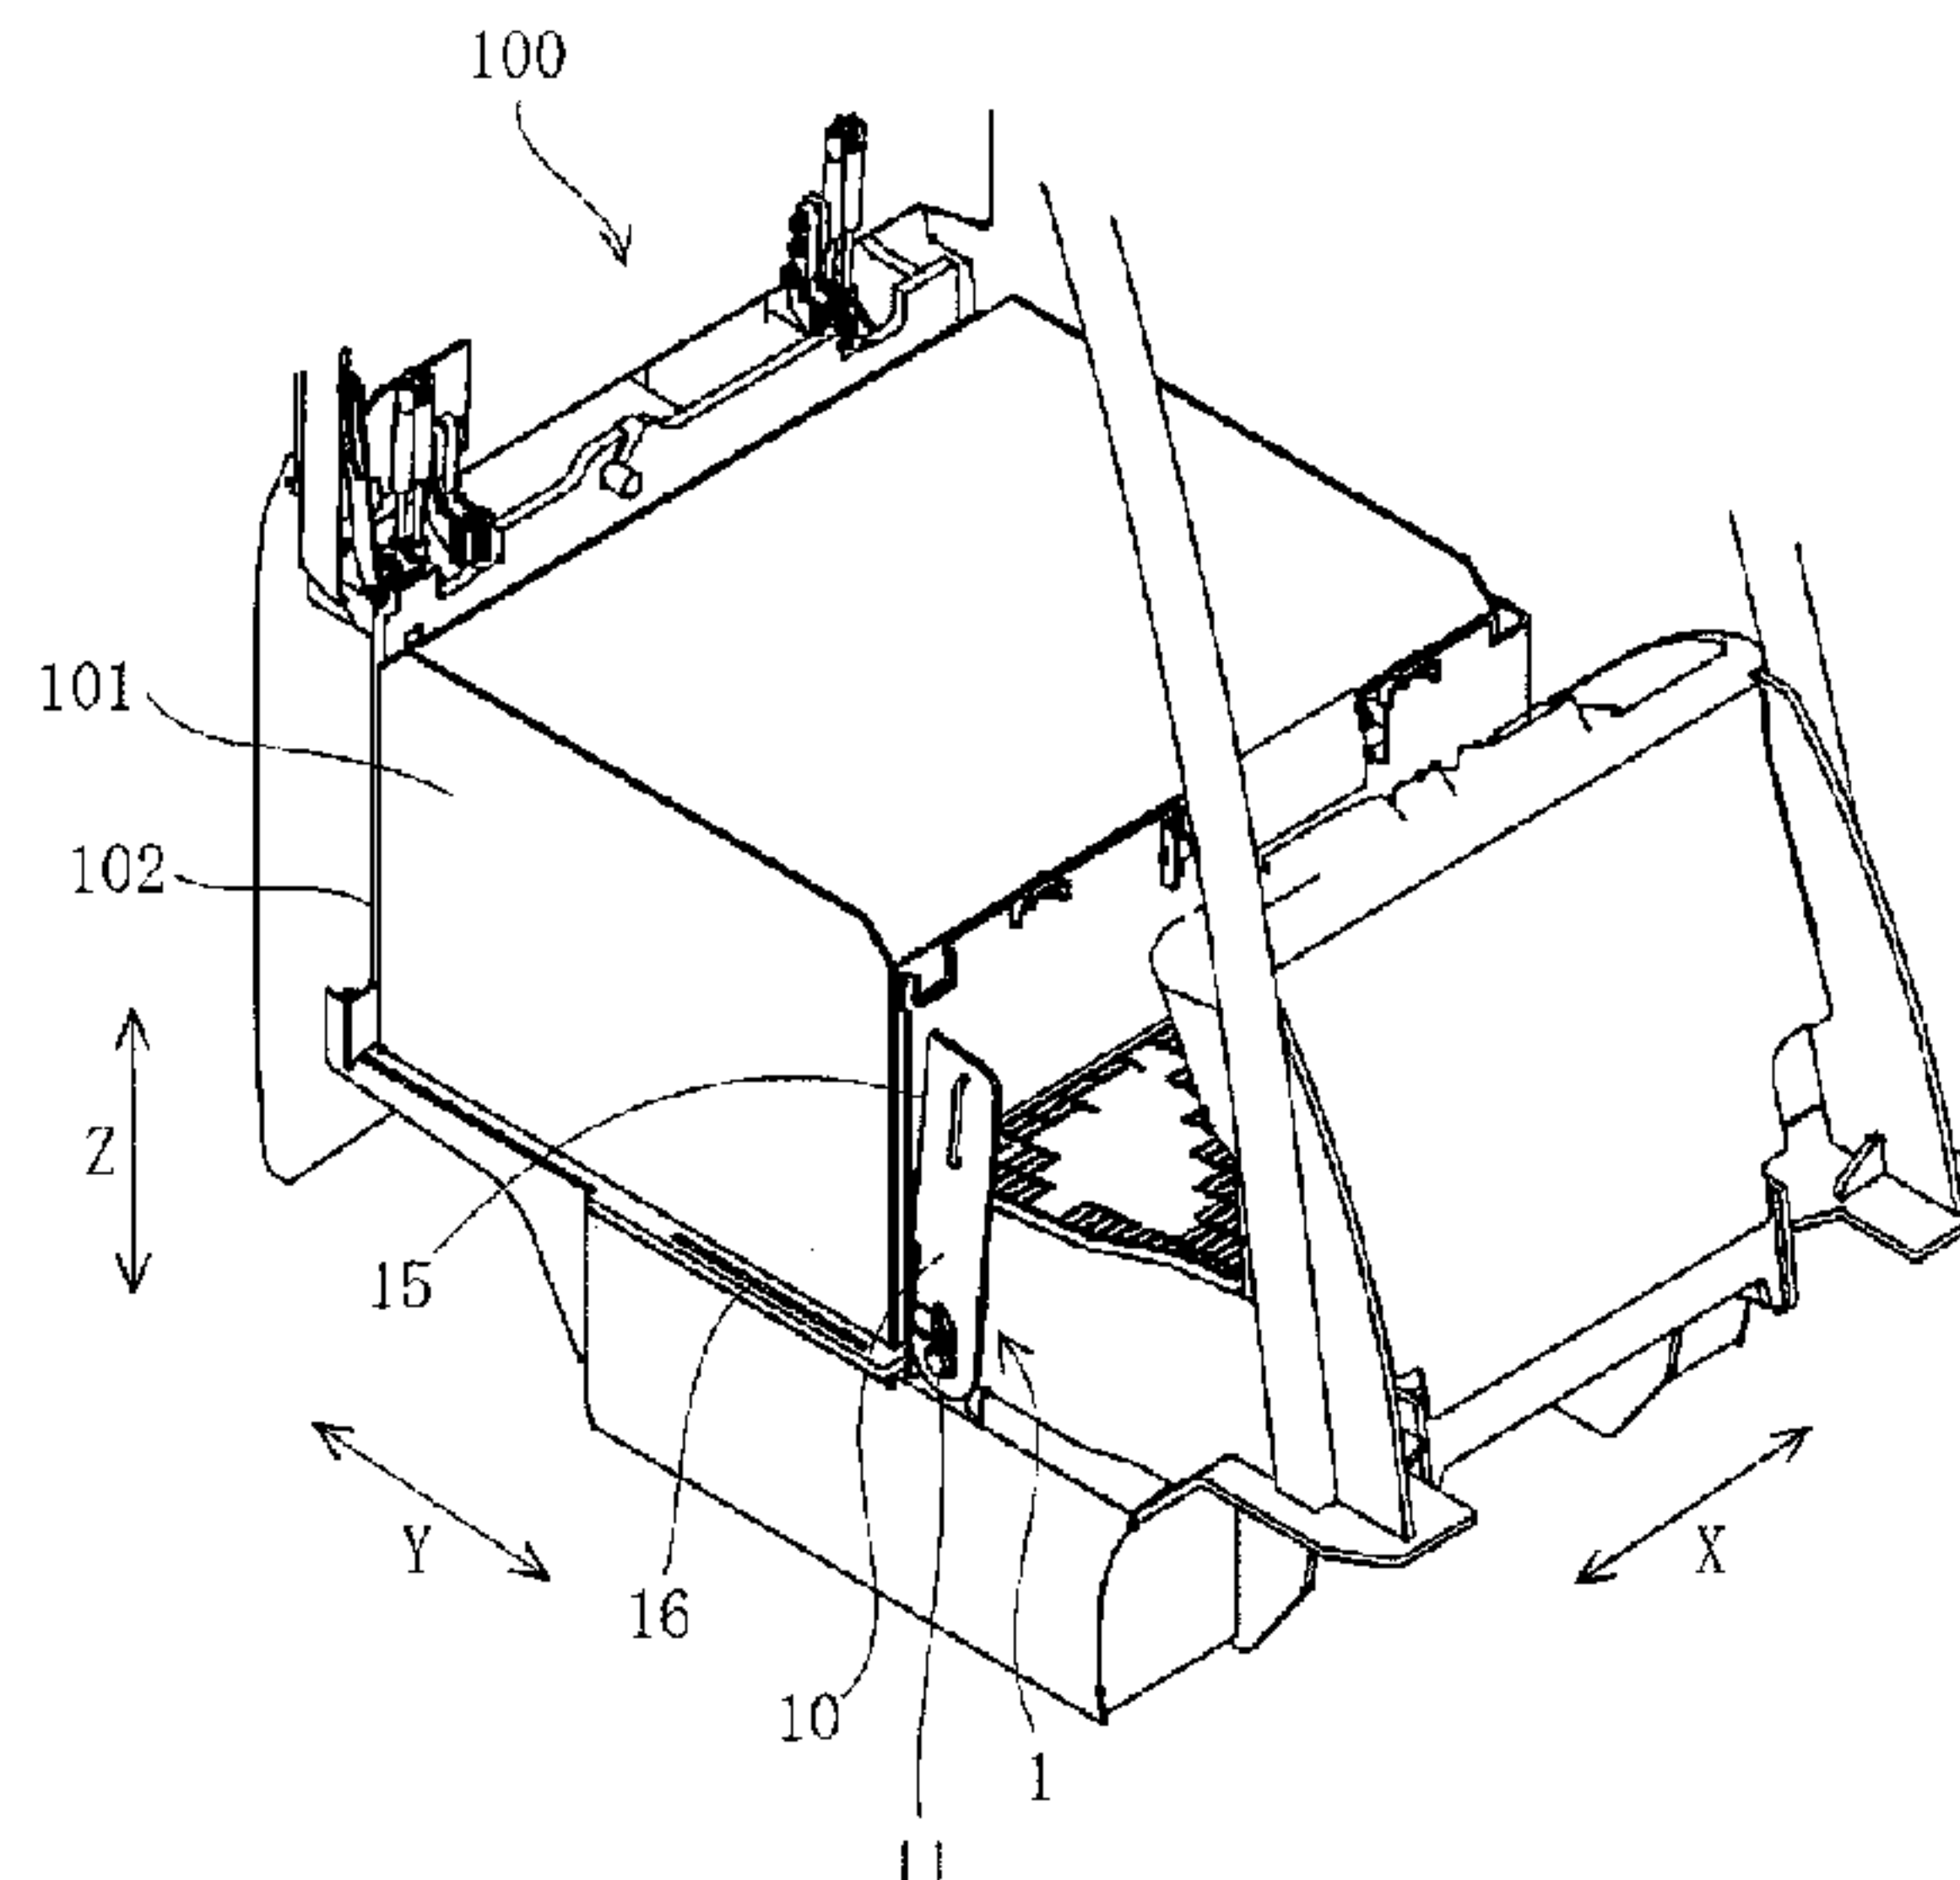

(57) **Abrégé/Abstract:**

The battery forklift according to the present invention comprises the battery lock device that does not need a complicated operation.

The battery lock device comprises: a lock plate capable of moving between a first position and a second position, the lock plate disposed at the first position configured to keep the battery from being protruded, the lock plate disposed at the second position configured to enable the battery to be protruded; a shaft configured to rotatably support the lock plate with respect to the body; a fixed portion opposed to the lock plate; a lock pin capable of sliding toward the fixed portion in a first direction and away from the fixed portion in a second direction; a spring configured to press the lock pin in the first direction; and first and second holes provided in the fixed portion, the lock pin being inserted into the first and second holes.

ABSTRACT

The battery forklift according to the present invention comprises the battery lock device that does not need a complicated .operation.

5 The battery lock device comprises: a lock plate capable of moving between a first position and a second position, the lock plate disposed at the first position configured to keep the battery from being protruded, the lock plate disposed at the second position configured to enable the battery to be protruded; a shaft configured
10 to rotatably support the lock plate with respect to the body; a fixed portion opposed to the lock plate; a lock pin capable of sliding toward the fixed portion in a first direction and away from the fixed portion in a second direction; a spring configured to press the lock pin in the first direction; and first and second
15 holes provided in the fixed portion, the lock pin being inserted into the first and second holes.

DESCRIPTION

A BATTERY FORKLIFT

TECHNICAL FIELD OF THE INVENTION

5 [0001] The present invention relates to a battery forklift comprising a battery lock device that keeps a battery from being protruded.

BACKGROUND OF THE INVENTION

10 [0002] A battery forklift includes a battery accommodated in a battery housing so as to run and drive. The battery forklift includes a battery lock device that keeps the battery from being protruded out of the battery housing when the battery forklift runs.

15 [0003] The battery lock device described in Patent Document 1 is configured as follows, see Figs. 1 to 3 of Patent Document 1 regarding Reference Numbers. The battery lock device includes a stopper 30 disposed at an entrance of a battery case 20, a stopper holder 40 that rotatably holds the stopper 30, and a lock portion
20 50 that locks the rotation of the stopper 30.

[0004] The lock portion 50 includes a lock pin holder 51, a lock pin 53 inserted in the lock pin holder 51 and movable upwardly and downwardly, and a notch portion 57 formed in the lock pin holder 51. The lock pin 53 includes a lower end portion 54 engaged with
25 a pin hole 37 formed in the stopper 30, a lever 58 provided at

its upper end, a pin 59 engageable with the notch portion 57, and a coil spring 56 that presses the lock pin 53 downwardly.

[0005] An operator needs to move the lock pin 53 upwardly and downwardly and to rotate it in an arrow direction B so as to engage
5 and release the pin 59 with the notch portion 57 when the operator switches between the stopper 30 rotating or not by using the lock portion 50. Therefore, the battery lock device described in Patent Document 1 needs a complicated operation.

[0006] The battery lock device described in Patent Document
10 2 is configured as follows, see Figs. 4 to 6 of Patent Document 2 regarding Reference Numbers. The battery lock device includes open-close plates 22R, 22L movable between standing and lodging positions, an open lock tool 28 configured to lock the open-close plates 22R, 22L in the standing position, and a close lock tool
15 29 configured to lock the open-close plates 22R, 22L in the lodging position.

[0007] The open lock tool 28 can lock the open-close plates 22R and 22L in the standing position by attaching a lock pin 28d into a pin hole. The close lock tool 29 can lock the open-close
20 plates 22R and 22L in the lodging position by operating a lock bar 29a retractably and rotatably.

[0008] An operator needs to operate both the open-close lock tools 28 and 29 when switching the open-close plates 22R and 22L between the standing and lodging positions. Therefore, the
25 battery lock device described in Patent Document 2 needs a

complicated operation.

[0009] Patent Document 1: JP04-67562

Patent Document 2: JP 2008-297106

5 SUMMARY

PROBLEMS TO BE SOLVED BY THE INVENTION

[0010] It is an object of the present invention to provide a
battery forklift that includes a battery lock device that does
10 not need a complicated operation.

SOLUTION TO THE PROBLEMS

[0011] In order to achieve the objects, the present invention
provides a battery forklift, comprising:
15 a battery housing formed in a body and configured to
accommodate a battery; and
a battery lock device configured to keep the battery
from being protruded out of the battery housing, wherein
the battery lock device comprises:
20 a lock plate capable of moving between first and
second positions, the lock plate disposed at the first position
configured to keep the battery from being protruded, the lock plate
disposed at the second position configured to enable the battery
to be protruded;
25 a shaft configured to rotatably support the lock

plate with respect to the body;

a fixed portion fixed on the body and opposed to the lock plate;

a lock pin capable of sliding toward the fixed
5 portion in a first direction and away from the fixed portion in
a second direction;

a spring configured to press the lock pin in the first direction; and

first and second holes provided in the fixed portion,
10 the lock pin being inserted into the first and second holes; and
wherein

the lock plate is locked at the first position when the lock plate is inserted into the first hole,

the lock plate is locked at the second position when
15 the lock plate is inserted into the second hole, and

the lock plate is moved between the first and second positions when the lock pin is withdrawn from the first and second holes.

[0012] According to a preferred embodiment of the present
20 invention, wherein

the lock plate is extended in a horizontal direction when being disposed at the first position, and the lock plate is extended in a vertical direction when being disposed at the second position.

25 [0013] According to a preferred embodiment of the present

invention, wherein

the battery lock device comprises:

a protrusion mounted on the lock plate; and

a notch portion provided in the body and capable

5 of engaging with the protrusion, and wherein

the protrusion is engaged with the notch portion when
the lock plate is locked at the first position.

[0014] According to a preferred embodiment of the present
invention, wherein

10 the lock plate comprises:

a first end portion supported by the shaft; and

a second end portion opposed to the first end portion,

and wherein

the protrusion is provided at least at the second end
15 portion.

[0015] According to a preferred embodiment of the present
invention, wherein

the battery lock device comprises a sensor configured
to detect whether the lock plate is disposed at the first position,

20 and

the battery forklift comprises an alarm portion
configured to alarm a driver when the sensor detects that the lock
plate is not disposed at the first position.

[0016] According to a preferred embodiment of the present
25 invention, wherein

the lock pin has a semispherical shape at an edge thereof.

EFFECT OF THE INVENTION

[0017] The battery forklift according to the present invention
5 includes the battery lock device that does not need a complicated
operation.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] Fig. 1 is a side view showing the battery forklift
10 according to the present invention.

Fig. 2 is a perspective view showing an internal
structure of a body.

Fig. 3 is a perspective view showing a battery lock
device.

15 Fig. 4 is an exploded perspective view showing the
battery lock device.

DETAILED EXPLANATION OF THE PREFERRED EMBODIMENTS

[0019] A battery forklift (hereinafter, referred to as a
20 "forklift") according to the present invention will be explained
below with reference to the drawings.

A left-right direction X, a front-back direction Y and
an up-down direction Z are arranged at approximately right angle
to each other. The left-right direction and the front-back
25 direction Y are extended horizontally. The up-down direction Z

is extended vertically.

[0020] As shown in Fig. 1, the forklift includes a body 100 composed of frames. The forklift, at the front area of the body 100, has masts 104 extended in the up-down direction Z, forks 105
5 slidable along the masts 104 for loading and unloading, and a lift cylinder 106 that is expanded and contracted by hydraulic oil supplied from a hydraulic device so as to move the forks 105 upwardly and downwardly.

[0021] The forklift, at the rear area of the body 100, has a
10 counter weight 107 for balancing the body 100 when loading and unloading with the forks 105. The forklift further includes a controller (not shown) configured to control the drive device, the hydraulic device, a driver seat 108, front wheels 109 and rear wheels 110 and so on.

[0022] As shown in Fig. 2, the battery forklift includes a
15 battery housing 102 formed in the body 100. The battery housing 102 is configured to accommodate or house a battery 101. The forklift includes a cover 103 configured to open and close the battery housing 102 (Fig. 1). The forklift can drive the drive
20 and hydraulic devices by using the battery 101 as a drive source.

[0023] The battery 101 can be moved into and out of the battery housing 102 in the left-right direction X. The forklift includes a battery lock device 1 that keeps the battery 101 from being protruded out of the battery housing 102. The battery lock device
25 1 keeps the battery 101 from being protruded out of the battery

housing 102 while the forklift runs.

[0024] As shown in Figs. 2 and 3, the battery lock device 1 includes a lock plate 10. The lock plate 10 can be moved between the first position (Fig. 3) and the second position (Fig. 2). The lock plate 10 disposed at the first position prevents the battery 101 from being protruded, while the lock plate 10 disposed at the second position allows the battery 101 to be protruded. The lock plate 10 is extended in a horizontal direction (the front-back direction Y) when being locked at the first position (Fig. 3), while the lock plate 10 is extended in a vertical direction (the up-down direction Z) when being locked at the second position (Fig. 2).

[0025] The lock plate 10 can cover the opening portion of the battery housing 102 when being disposed at the first position (Fig. 3) so as to keep the battery 101 from moving out of the battery housing 102 in the left-right direction X. The lock plate 10 cannot cover the opening portion of the battery housing 102 when being disposed at the second position (Fig. 2) so as not to keep the battery 101 from moving out of the battery housing 102 in the left-right direction X.

[0026] As shown in Fig. 3, the battery lock device 1 includes a shaft 11 configured to rotatably support the lock plate 10 on the body 100. As shown in Fig. 4, the lock plate 10 includes a bearing 20 near the first end portion 10a. The shaft 11 is inserted into the bearing 20. As shown in Fig. 3, the battery lock device

1 includes a fixed portion 12 opposed to the lock plate 10. The fixed portion 12 is fixed on the body 100. The shaft 11 is fixed on the fixed portion 12. The lock plate 10 can rotate with respect to the fixed portion 12 about the shaft 11 and between the first position (Fig. 3) and the second position (Fig. 2).

[0027] As shown in Figs. 3 and 4, the battery lock device 1 includes a lock pin 13. The lock pin 13 is inserted into a through hole 21 provided in the lock plate 10. The lock pin 13 is slidable in the left-right direction X so as to move toward the fixed portion 12 in the first direction X1 and away from the fixed portion 12 in the second direction X2. The edge 13a of the lock pin 13 is opposed to the fixed portion 12. The lock pin 13 has a ring portion 131 on opposite side to the ring portion 131. An operator can slide the lock pin 13 in the second direction X2 using the ring portion 131.

[0028] The lock pin 13 is inserted into a base portion 130 disposed near the ring portion 131. The base portion 130 is connected with the lock plate 10 via bolts 132. The battery lock device 1 includes a spring 14 disposed between the base portion 130 and the lock pin 13. The spring 14 is configured to press the lock pin 13 in the first direction X1. Therefore, the lock pin 13 is constantly pressed by the spring 14 in the first direction X1.

[0029] As shown in Fig. 3, first and second holes 12a, 12b are provided in the fixed portion 12, through which the edge 13a of

the lock pin 13 can be inserted. The lock pin 13 is inserted into the first hole 12a so as to prevent the rotation of the lock plate 10 in such a manner that the lock plate 10 is locked at the first position (Fig. 3). The lock pin 13 is inserted into the second
5 hole 12b so as to prevent the rotation of the lock plate 10 in such a manner that the lock plate 10 is locked at the second position (Fig. 2). The lock pin 13 is withdrawn from the first and second holes 12a, 12b in such a manner that the lock plate 10 can move between the first position (Fig. 3) and the second position (Fig.
10 2). The lock plate 10 has a handle portion 19 so that an operator can easily rotate the lock plate 10.

[0030] When moving the lock plate 10 between the first position (Fig. 3) and the second position (Fig. 2), an operator can grip the ring portion 131 and pull the lock pin 13 in the second direction
15 X2 against the press force of the spring 14 so as to withdraw the lock pin 13 from the first and second holes 12a, 12b. The operator can rotate the lock plate 10 and release the ring portion 131 after withdrawing the lock pin 13 from the first and second holes 12a and 12b so that the edge 13a of the lock pin 13 is brought into
20 contact with the surface of the fixed portion 12 by the press force of the spring 14.

[0031] The operator rotates the lock plate 10 to the first position (Fig. 3) or the second position (Fig. 2) in which the edge 13a of the lock pin 13 contacts with the surface of the fixed portion
25 12 in such a manner that the lock pin 13 can be inserted into the

first hole 12a or the second hole 12b by the press force of the spring 14. As shown in Fig. 4, the edge 13a of the lock pin 13 has a semispherical shape so as to smoothly insert into the first or second hole 12a, 12b while moving.

5 [0032] As shown in Figs. 2 and 3, the battery lock device 1 includes a protrusion 15 mounted on the lock plate 10. The battery lock device 1 includes a notch portion 16 engageable with the protrusion 15. The notch portion 16 is provided in the body 100. As shown in Fig. 3, the protrusion 15 is engaged with the notch
10 portion 16 so that the lock plate 10 at the first position can be strongly coupled to the lock plate 10 when the lock plate 10 is disposed at the first position (Fig. 3).

[0033] The lock plate 10 includes the first end portion 10a including the shaft 11, and the second end portion 10b opposed
15 to the first end portion 10a. Particularly, the lock plate 10 may be folded when the battery 101 abuts against the lock plate 10 because the second end portion 10b of the lock plate 10 is a free end. Therefore, the protrusion 15 is extended from the second end portion 10b to the first end portion 10a and provided at least
20 at the second end portion 10b. The free end of the lock plate 10 is engaged with the body 100 so as to prevent the lock plate 10 from being folded by engaging the protrusion 15 with the notch portion 16.

[0034] As shown in Fig. 3, the battery lock device 1 includes
25 a sensor 17 that detects whether the lock plate 10 is disposed

on the first position (Fig. 3) or not. The sensor 17 is composed of a contact sensor et al. so as to detect that the lock plate 10 is disposed at the second position when contacting with a cam 22 which is mounted on the bearing 20 and rotates along with the
5 lock plate 10.

[0035] As shown in Fig. 1, the forklift includes an alarm portion 18. The alarm portion 18 can alarm the driver when the sensor 17 detects that the lock plate 10 is not disposed at the first position (Fig. 3), so that the body is controlled so as not to
10 be driven. Therefore, it is possible to keep the driver from driving the forklift when the battery lock device 1 does not prevent the protruding of the battery 101.

[0036] The above-described embodiment is merely one preferable embodiment of the present invention, and the structure of the
15 present invention is not limited to this embodiment.

[0037] The effect of the invention will be explained below.

In the battery lock device 1 according to the invention, an operator can move the lock plate 10 by sliding the lock pin 13 and can automatically lock the lock plate 10 by the press force
20 of the spring 14. Therefore, the operator does not need a complicated operation.

When changing the battery 101, an operator disposes a platform cart adjacent to the forklift so as to move the battery 101 toward or out of the platform cart. At the time, the lock
25 plate 10 is less likely to collide against the platform cart or

the battery 101 because the lock plate 10 is extended vertically (in the up-down direction Z) when being disposed at the second position (Fig. 4).

When the lock plate 10 is disposed at the first position (Fig. 3), the protrusion 15 is engaged with the notch position 16 so that the lock plate 10 disposed at the first position can be strongly connected with body 100.

The protrusion 15 is extended from the second end portion 10b thereof to the first end portion 10a thereof, and provided at least at the second end portion 10b. Therefore, the free end of the lock plate 10 can be engaged with the body 100 so as to prevent the lock plate 10 from being folded.

The alarm portion 18 alarms a driver when the sensor 17 detects that the lock plate 10 is not disposed at the first position (Fig. 3). Therefore, it is possible to keep the driver from driving the forklift when the battery lock device 1 does not prevent the protruding of the battery 101.

The edge 13a of the lock pin 13 has a semispherical shape so as to smoothly insert into the first and second holes 12a, 12b while moving.

The lock pin 13 inserts into the first or second hole 12a, 12b so that an operator can easily recognize that the movement of the lock plate 10 to the first or second hole 12a, 12b is completed.

25 DESCRIPTION OF REFERENCE NUMBERS

[0038] 1: battery lock device

10: lock plate

10a: first end portion of lock plate

10b: second end portion of lock plate

5 11: shaft

12: fixed portion

12a: first hole

12b: second hole

13: lock pin

10 13a: edge of lock pin

14: spring

15: protrusion

16: notch portion

17: sensor

15 18: alarm portion

100: body

101: battery

102: battery housing

X: left-right direction (horizontal direction)

20 Y: front-back direction (horizontal direction)

Z: up-down direction (vertical direction)

What is claimed is:

1. A battery forklift, comprising:

5 a battery housing formed in a body and configured to
accommodate a battery; and

a battery lock device configured to keep the battery
from being protruded out of the battery housing, wherein

the battery lock device comprises:

10 a lock plate capable of moving between first and
second positions, the lock plate disposed at the first position
configured to keep the battery from being protruded, the lock plate
disposed at the second position configured to enable the battery
to be protruded;

15 a shaft configured to rotatably support the lock
plate with respect to the body;

a fixed portion fixed on the body and opposed to
the lock plate;

20 a lock pin capable of sliding toward the fixed
portion in a first direction and away from the fixed portion in
a second direction;

a spring configured to press the lock pin in the
first direction; and

25 first and second holes provided in the fixed portion,
the lock pin being inserted into the first and second holes; and
wherein

the lock plate is locked at the first position when the
lock plate is inserted into the first hole,

the lock plate is locked at the second position when
the lock plate is inserted into the second hole, and

5 the lock plate is moved between the first and second
positions when the lock pin is withdrawn from the first and second
holes.

2. The battery forklift according to claim 1, wherein
10 the lock plate is extended in a horizontal direction
when being disposed at the first position, and the lock plate is
extended in a vertical direction when being disposed at the second
position.

15 3. The battery forklift according to claim 1 or 2, wherein
the battery lock device comprises:
a protrusion mounted on the lock plate; and
a notch portion provided in the body and capable
of engaging with the protrusion, and wherein
20 the protrusion is engaged with the notch portion when
the lock plate is locked at the first position.

4. The battery forklift according to claim 3, wherein
the lock plate comprises:
25 a first end portion supported by the shaft; and

a second end portion opposed to the first end portion,
and wherein

the protrusion is provided at least at the second end
portion.

5

5. The battery forklift according to any one of claims 1
to 4, wherein

the battery lock device comprises a sensor configured
to detect whether the lock plate is disposed at the first position,

10 and

the battery forklift comprises an alarm portion
configured to alarm a driver when the sensor detects that the lock
plate is not disposed at the first position.

15 6. The battery forklift according to any one of claims 1
to 5, wherein

the lock pin has a semispherical shape at an edge thereof.

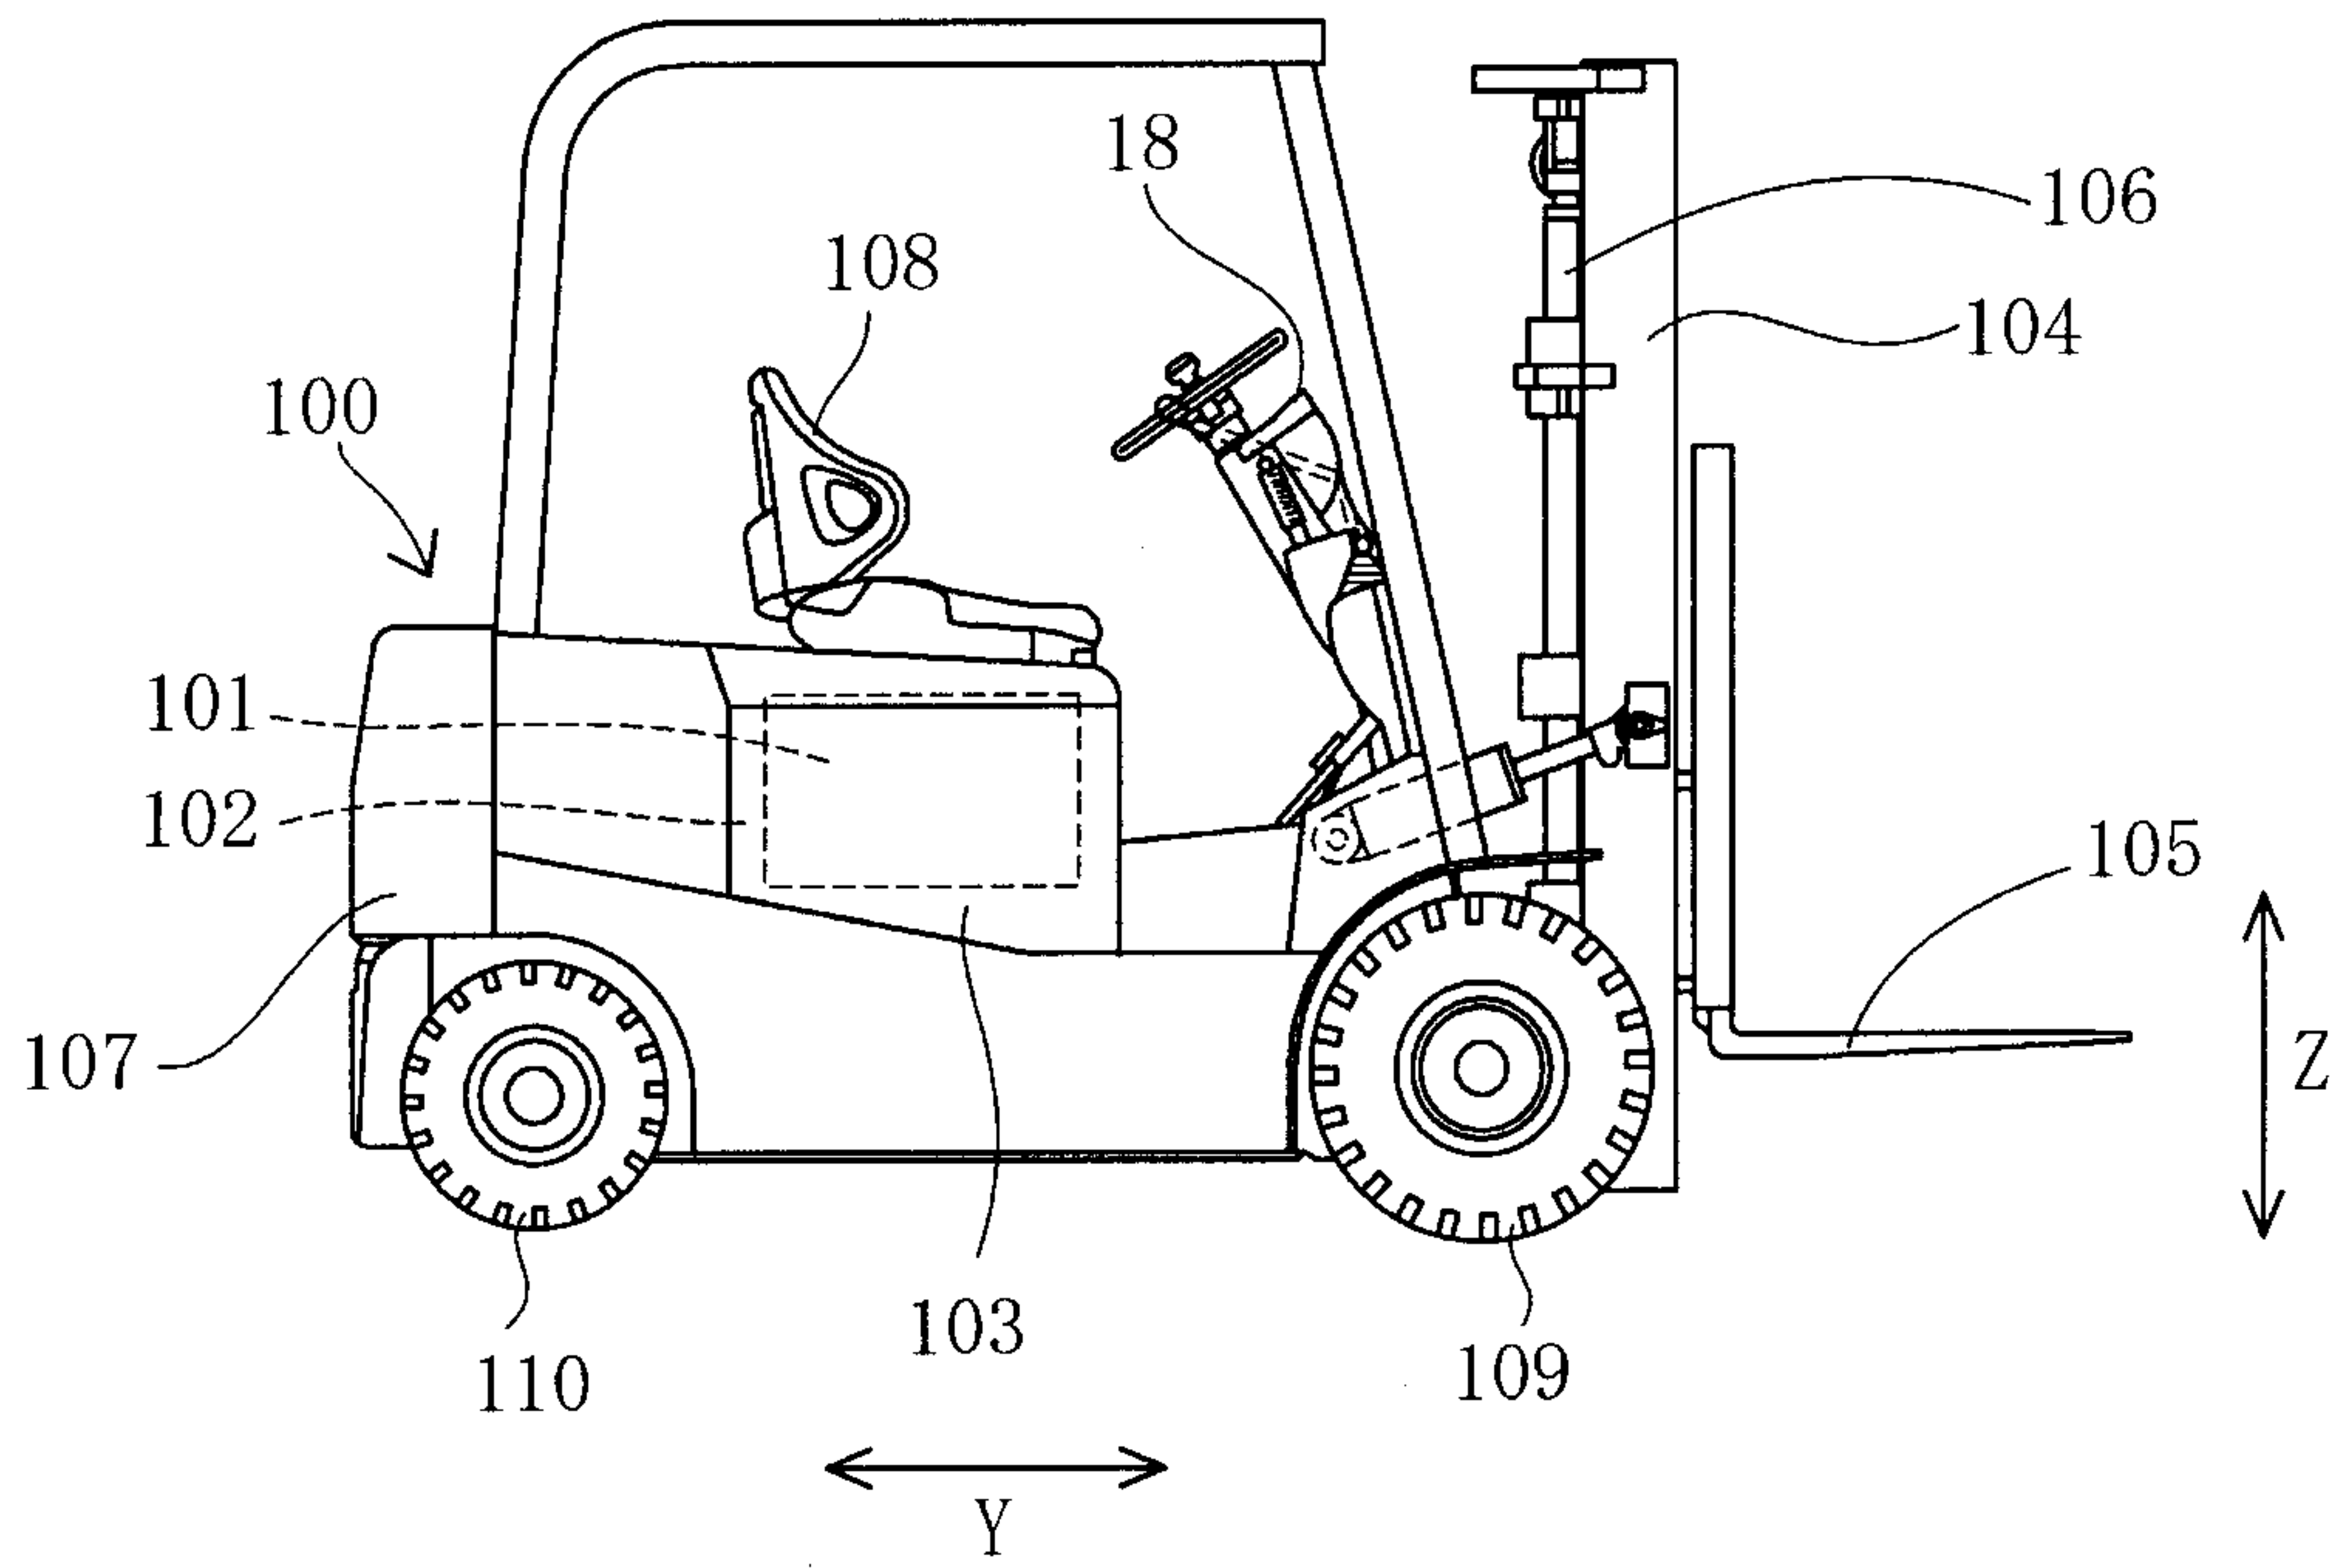


Fig. 1

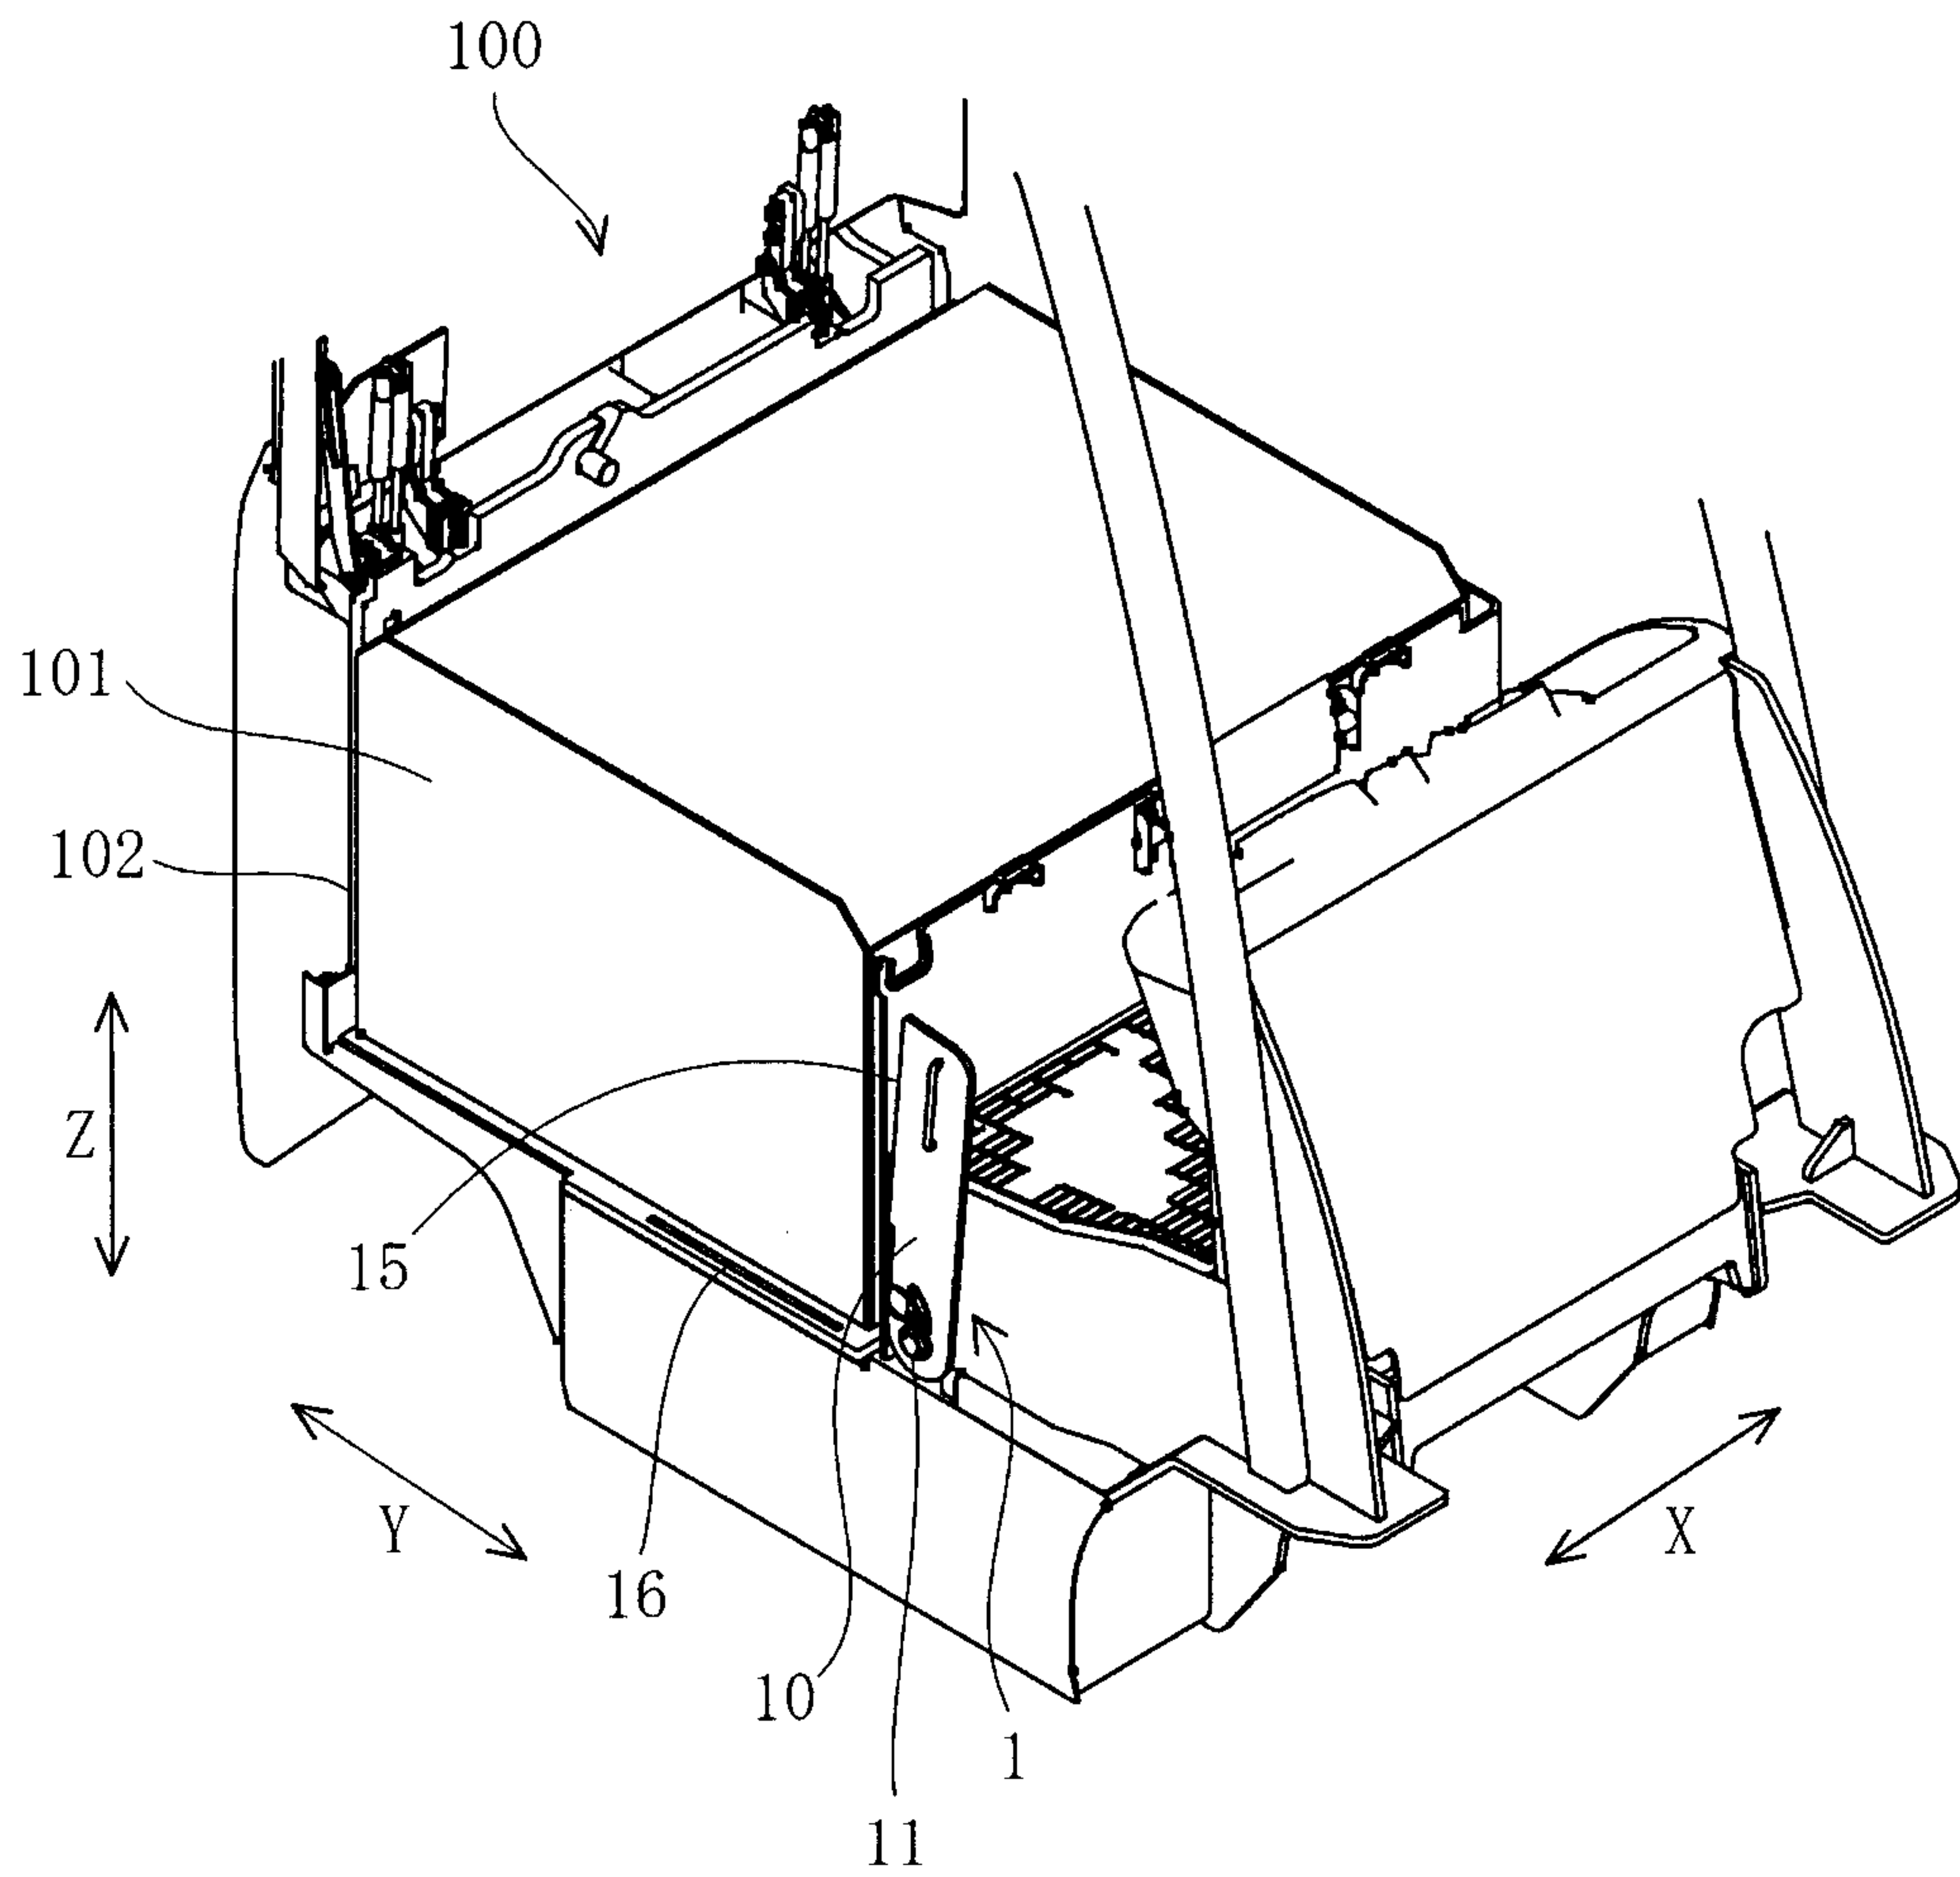


Fig. 2

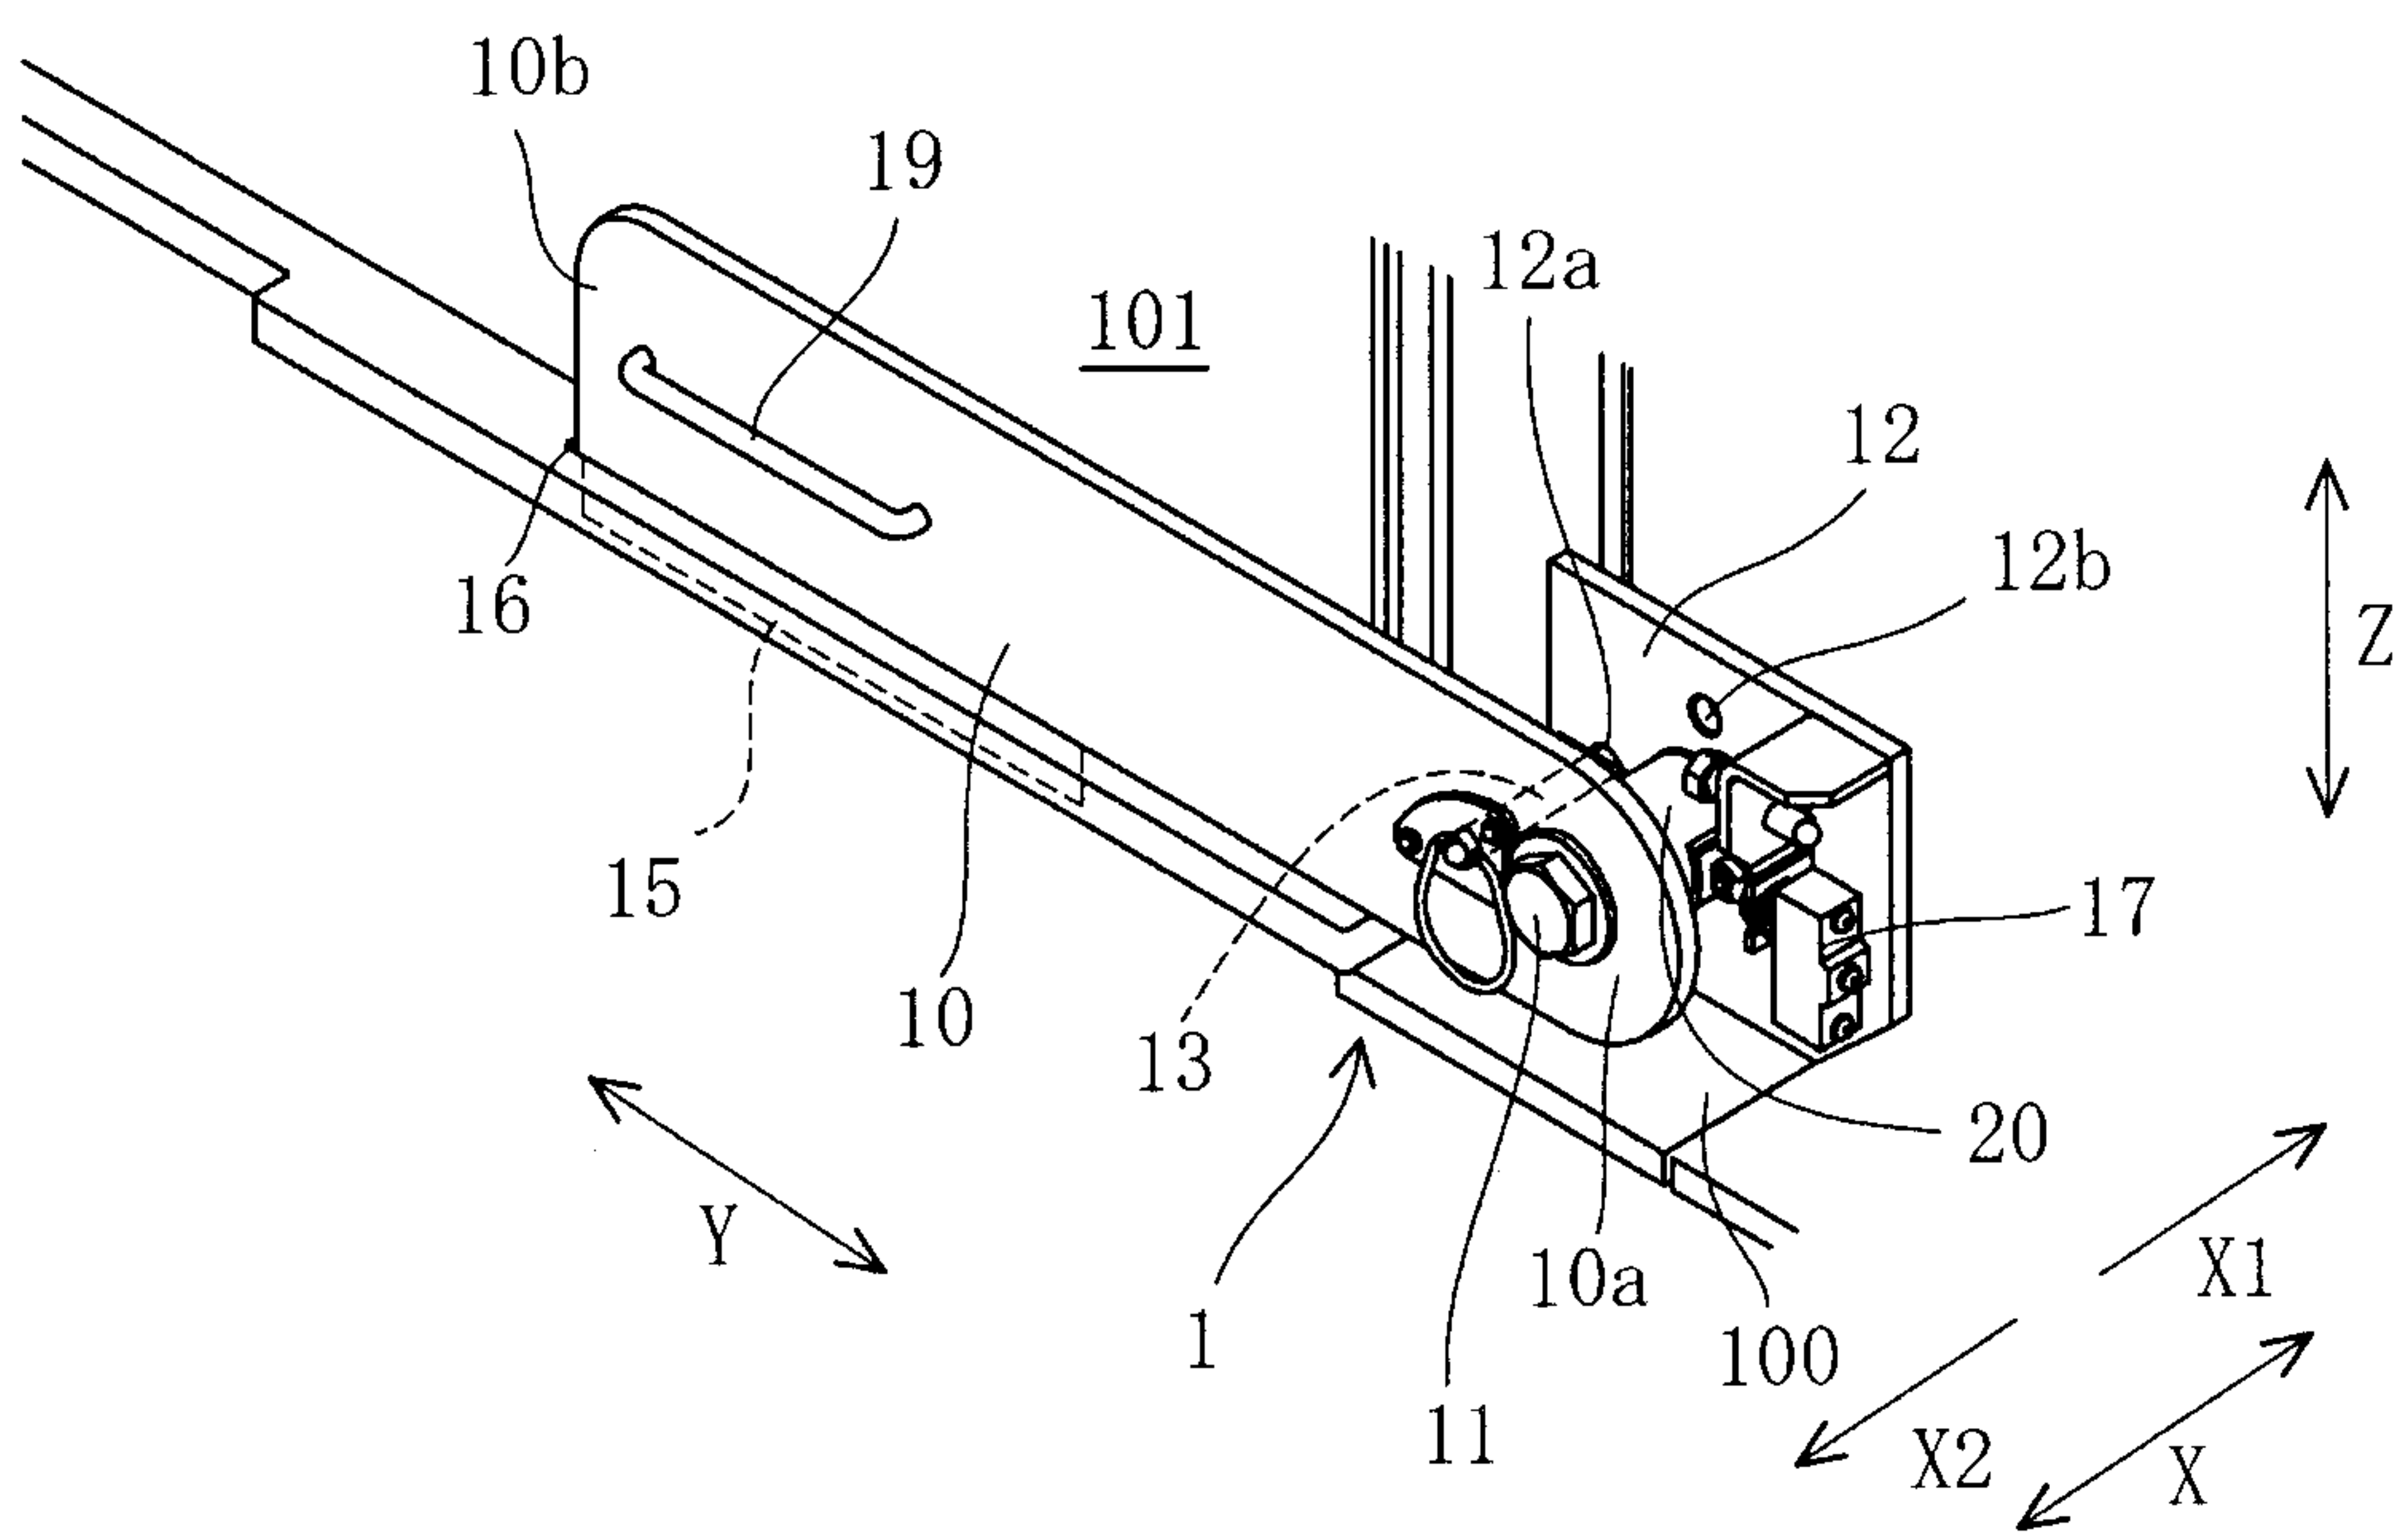


Fig. 3

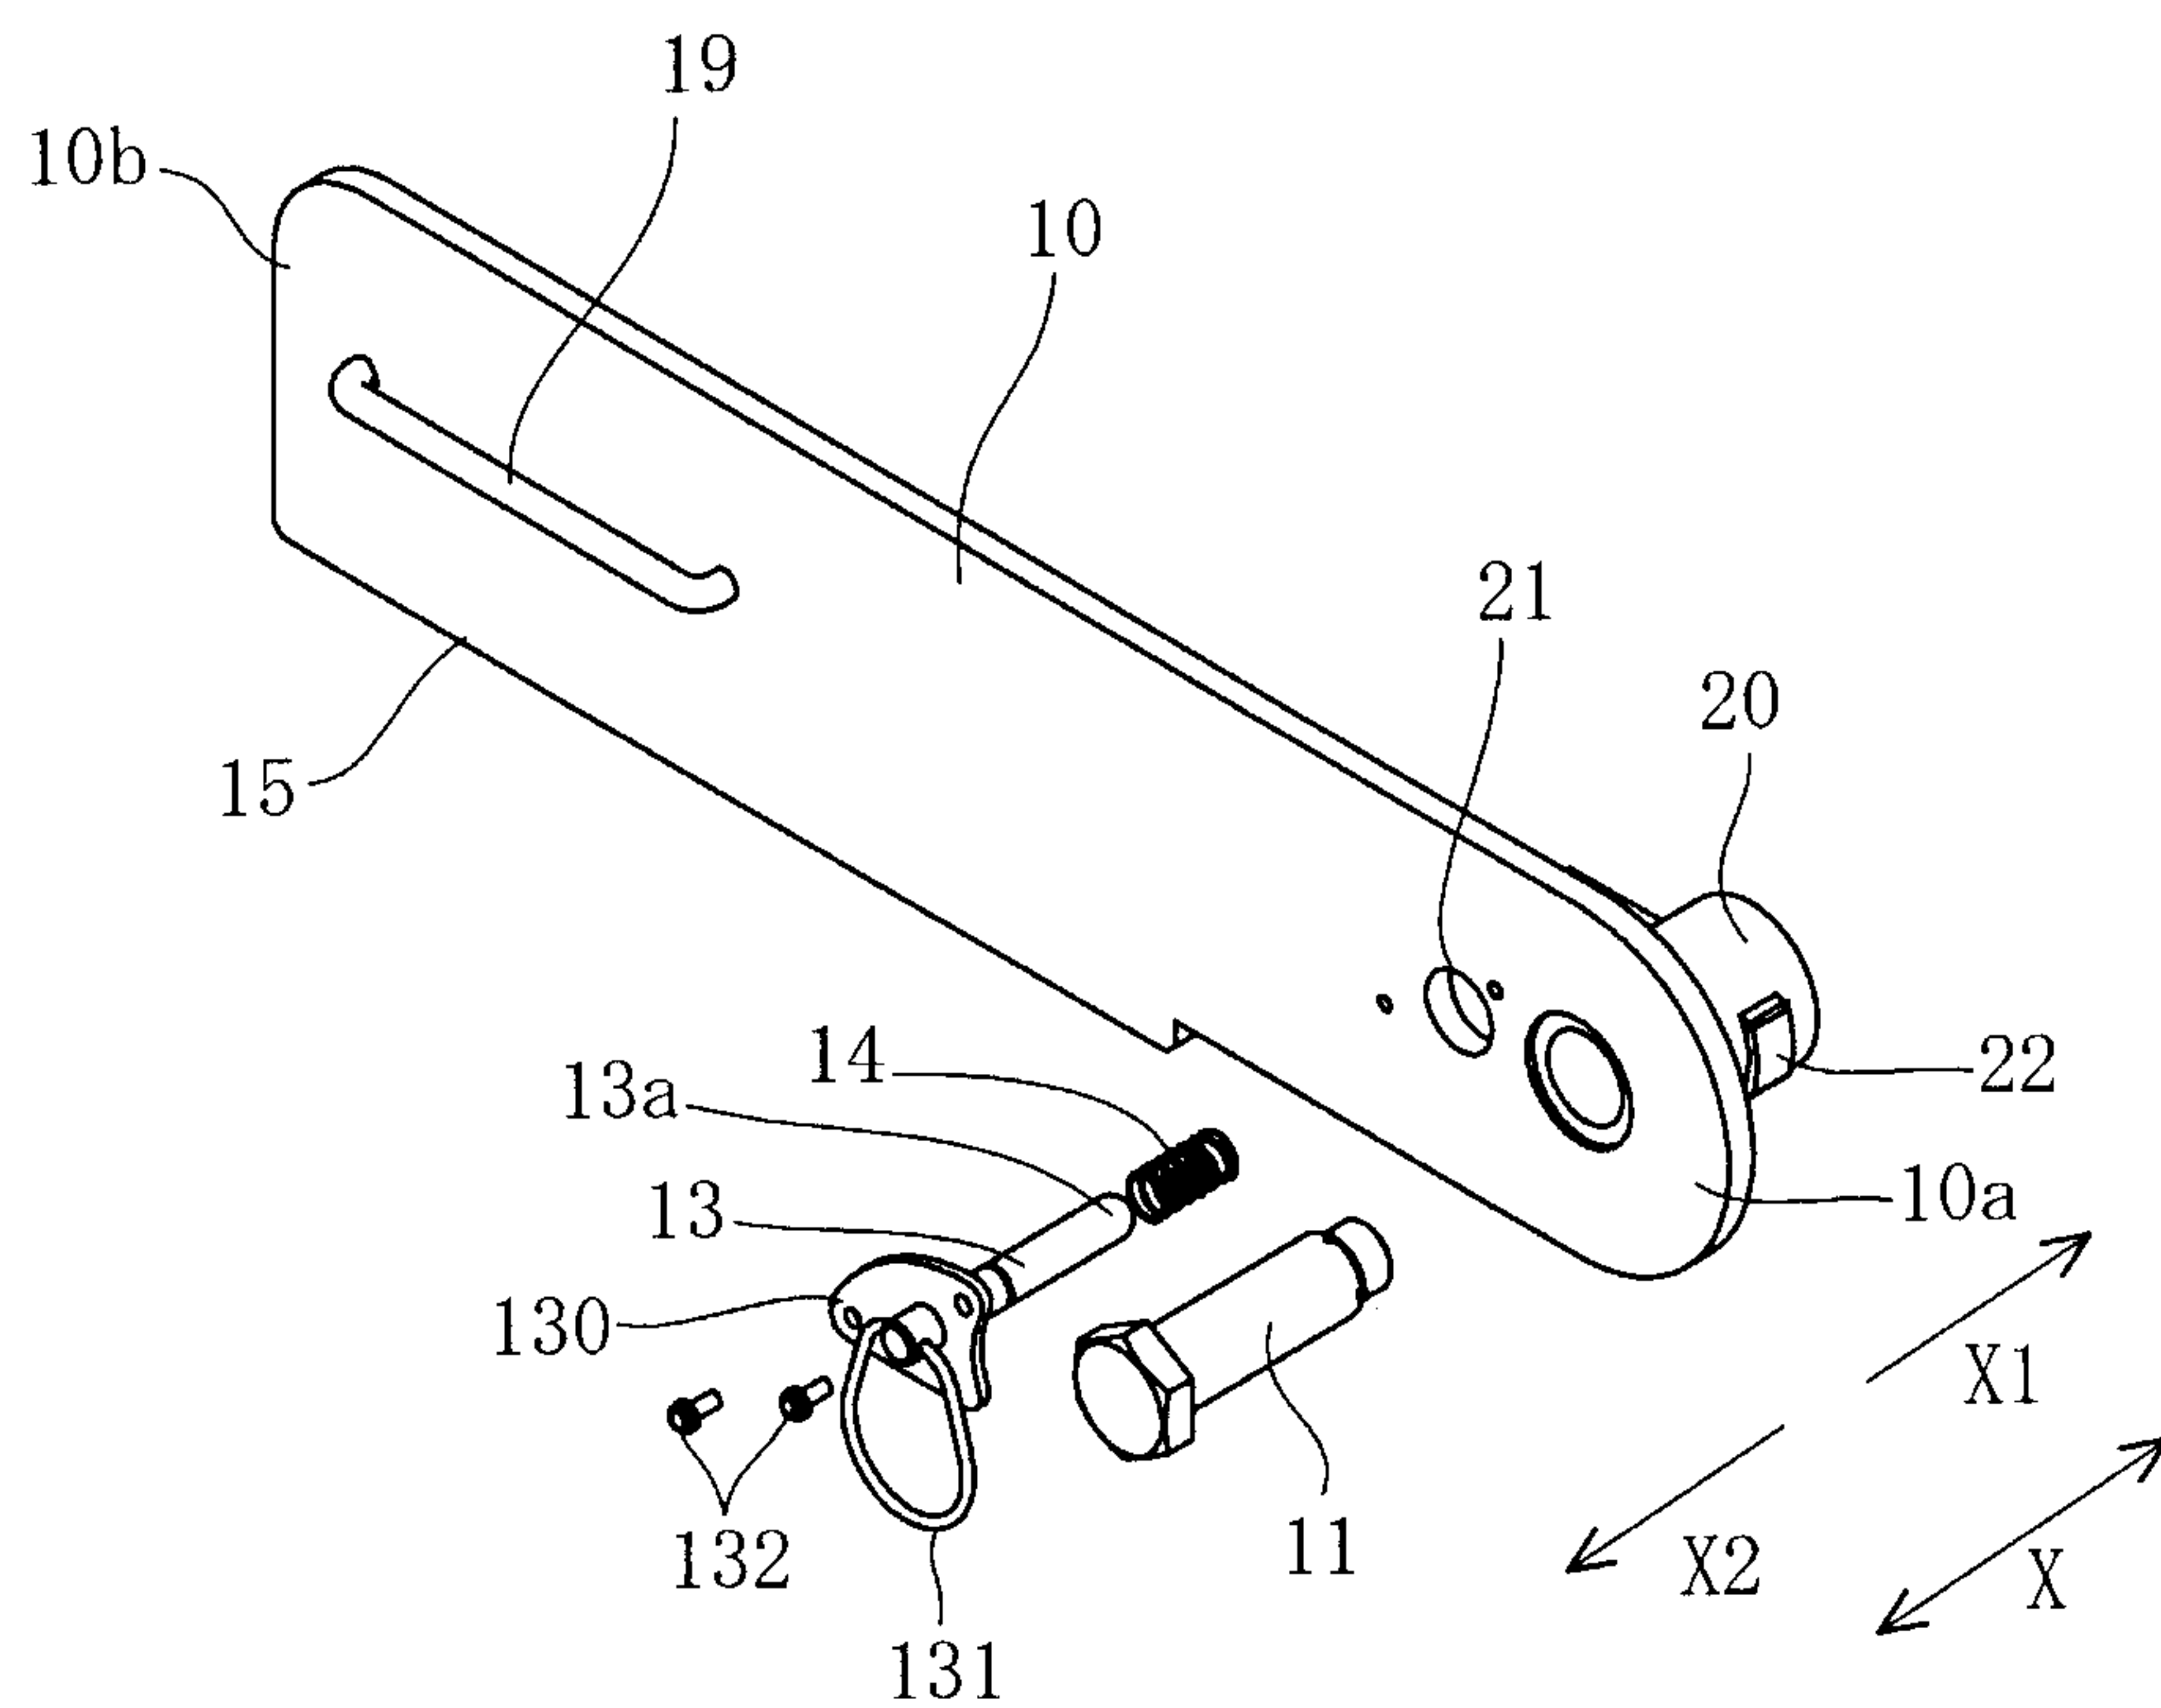


Fig. 4

