

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number
WO 2012/166781 A1

(43) International Publication Date
6 December 2012 (06.12.2012)

(51) International Patent Classification:

C10M 133/12 (2006.01) *C10M 167/00* (2006.01)
C10M 133/16 (2006.01) *C10N 40/25* (2006.01)
C10M 133/38 (2006.01) *C10N 30/10* (2006.01)
C10M 133/42 (2006.01)

(21) International Application Number:

PCT/US2012/039965

(22) International Filing Date:

30 May 2012 (30.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/491,369 31 May 2011 (31.05.2011) US

(71) Applicant (for all designated States except US): **THE LUBRIZOL CORPORATION** [US/US]; 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GALIC RAGUZ, Mary** [US/US]; 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US). **CARRICK, Virginia A.** [US/US]; 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US).

(74) Agents: **SHOLD, David M.** et al.; 29400 Lakeland Blvd., Wickliffe, Ohio 44092-2298 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))



WO 2012/166781 A1

(54) Title: LUBRICATING COMPOSITION WITH IMPROVED TBN RETENTION

(57) Abstract: The invention provides a lubricating composition containing a diarylamine, an aminobenzene and an oil of lubricating viscosity. The invention further relates to the use of the lubricating composition in an internal combustion engine. The invention further relates to the use of the lubricating composition to improve TBN retention.

TITLE

Lubricating Composition with improved TBN retention

FIELD OF INVENTION

5 [0001] The invention relates to compositions containing diarylamines and aminobenzenes and their use in lubricants, such as engine oils. In particular the invention relates to a low ash lubricating composition with an additive composition that provides improved retention of basicity without sacrificing acid control.

BACKGROUND OF THE INVENTION

10 [0002] It is known that lubricants become less effective during their use due to exposure to the operating conditions of the device they are used in, and particularly due to exposure to by-products generated by the operation of the device. For example, engine oil becomes less effective during its use, in part due to exposure of the oil to acidic and pro-oxidant byproducts. These byproducts result from the
15 incomplete combustion of fuel in devices such as internal combustion engines, which utilize the oil. These byproducts lead to deleterious effects in the engine oil, and so, on the engine as well. The byproducts can oxidize hydrocarbons found in the lubricating oil, yielding carboxylic acids and other oxygenates. These oxidized and acidic hydrocarbons can then go on to cause corrosion, wear and deposit problems.

20 [0003] Base-containing additives are added to lubricants in order to neutralize such byproducts, thus reducing the harm they cause to the lubricant, such as an engine oil, and so to the device, such as an engine. Over-based calcium or magnesium carbonate detergents have been used for some time as acid scavengers, neutralizing these byproducts and so protecting both the lubricant and the device. However, over-
25 based phenate and sulfonate detergents carry with them an abundance of metal as measured by sulfated ash (ASTM D 874). New industry upgrades for diesel and passenger car lubricating oils are putting ever decreasing limits on the amount of sulfated ash, and by extension the amount of over-based detergent, permissible in an oil.

[0004] There is a need for additives that can extend the operational effectiveness
30 of base-containing additives without the addition of increased sulfated ash. In particular, there is a need for additives that can improve the retention of basicity in a lubricant while continuing to minimize the effects of acid build-up in the lubricant.


- [0005] United States Patent 2,390,943 (Kavanagh et al., 12/11/1945) relates to compositions comprising hydrocarbon oil and a combination of stabilizing ingredients.
- [0006] United States Patent 2,369,090 (Trautman, 02/06/1945) and 3,856,690 (Milton, 12/24/1974) relate to lubricants which are stabilized against oxidative degradation.
- [0007] United States Patent 3,642,632 (Coburn et al., 02/15/1972) relates to lubricant compositions having improved resistance to deterioration under high performance conditions.
- 10 [0008] United States Patent 2,771,368 (Thompson, 11/20/1956) relates to the use of N-substituted trialkoxy anilines as stabilizers for organic compounds, including fuels, mineral oils, and lubricating oils.
- [0009] United States Patent 4,234,434 (Wulfers, 02/14/1979) relates to the use of dialkylanilines as stabilizers for hydrocracked oil.
- 15 [0010] WO/PCT application 2010/107882 (Preston et al., 09/23/2010), relates to the use of anthranilic acid derivatives as ash-free amine-derived sources of basicity that do not cause harm to seals.
- [0011] United States application 2010/0160195 (Cheng et al., 06/24/2010) relates to lubricating compositions comprising derivatives of N,N-dialkylated aniline as ash-free boosters of total base number (TBN).
- 20 [0012] The use of phenyl- α -naphthylamines (PANA) and derivatives thereof as antioxidants in lubricating compositions is well documented. United States patent 3,414,618 (Randell, 12/03/1968) relates to a process to produce alkylated PANA and its use as an antioxidant in lubricating compositions. Recent publications include
- 25 European patent application 2055763 (05/06/2009), which relates to a lubricating composition comprising the combination of alkylated diphenylamine and alkylated PANA, and United States application 2010/0099589 (Ryan et al., 04/22/2010), which relates to a lubricating composition with a combination of alkylated PANA and triazoles for oxidation control.
- 30 [0013] Diaromatic amine antioxidants with edge-sharing rings have been described previously in United States patent applications 2009/0131293 (Ma et al., 05/21/2009) and 2009/0131290 (Ma et al., 05/21/2009). Application 2009/0131290 relates to dihydroacridan derivatives as ashless antioxidants.

[0014] It has now been discovered that lubricating compositions comprising a combination of select diarylamines with aminobenzenes, including anthranilic acid, provide for improved TBN retention. Unexpectedly, this may be accomplished without increasing the deleterious effects of acid build-up in lubricants such as engine oil.

SUMMARY OF THE INVENTION

[0015] The present invention provides a lubricating composition containing, i.e., comprising (a) an oil of lubricating viscosity, (b) a diarylamine (which term includes a substituted diarylamine) wherein at least one of the aryl groups comprises 2 or more edge-sharing rings, and (c) an aminobenzene different from (b) said diarylamine. The lubricating composition of the invention provides an ash-free source of TBN that reduces the rate of TBN consumption without causing harm to wear, corrosion, or deposits. The present invention also relates to a method for improving TBN retention in an engine oil lubricant, especially a lubricant with low levels of sulfated ash.


[0016] The invention also provides a lubricating composition comprising (a) an oil of lubricating viscosity, (b) a diarylamine of formula (I)

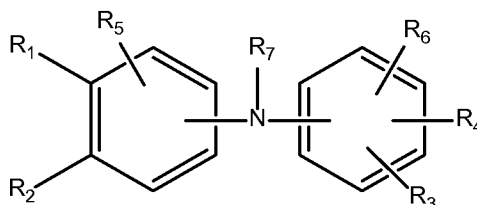

(I)

wherein R_1 and R_2 are moieties which, together with the carbon atoms to which they are bonded, are joined together to form a 5-, 6-, or 7-membered ring; R_3 and R_4 are independently hydrogen, hydrocarbyl groups, or are moieties which, taken together with the carbon atoms to which they are bonded, form a 5-, 6-, or 7-membered ring; R_5 and R_6 are independently hydrogen, hydrocarbyl groups or are moieties which, taken together with the carbon atoms to which they are attached, form a ring, or represent a direct linkage between the rings to which they are attached; and R_7 is hydrogen or a hydrocarbyl group;

and (c) an aminobenzene of formula (II)



wherein R_1 and R_2 are independently hydrogen; hydrocarbyl groups; hydrocarbyl groups linked together to form a ring; $-\text{CH}_2\text{CH}_2\text{CN}$; $-(\text{CH}_2\text{CHR}_7-\text{O})_y\text{H}$ where R_7 is hydrogen or a hydrocarbyl group and $y = 1$ to 20 ; or $-\text{CH}_2\text{CH}_2\text{C}(\text{O})\text{XR}_6$, where X is , $-\text{O}-$, $-\text{S}-$, or $-\text{NR}_6-$, each R_6 is independently a hydrogen or hydrocarbyl group; R_3 , R_4 , and R_5 are independently hydrogen, hydrocarbyl groups, alkoxy groups, or acyl derivatives (that is, acyl groups) $-\text{C}(\text{X}_1)\text{A}$ wherein X_1 is oxygen or sulfur and A is X_2-R_8 where X_2 is oxygen or sulfur and R_8 is a hydrocarbyl group.

[0017] The invention provides for lubricating compositions containing the additives described above wherein the total sulfated ash is no more than 1.5% by weight of the composition, the phosphorus content is no more than 0.12% by weight of the composition, and/or the sulfur content is no more than 0.4% by weight of the composition.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Various preferred features and embodiments will be described below by way of non-limiting illustration.

[0019] The present invention provides a lubricating composition comprising (a) an oil of lubricating viscosity, (b) a substituted diarylamine wherein at least one of the aryl groups comprises 2 or more edge-sharing rings, and (c) an aminobenzene compound different from (b).

Oil of Lubricating Viscosity

[0020] One component of the disclosed technology is an oil of lubricating viscosity. The base oil used in the inventive lubricating oil composition may be selected from any of the base oils in Groups I-V as specified in the American Petroleum Institute (API) Base Oil Interchangeability Guidelines. The five base oil groups are as follows:

Base Oil Category	Sulfur (%)		Saturates (%)	Viscosity Index
Group I	>0.03	and/or	<90	80 to 120
Group II	≤0.03	and	≥90	80 to 120
Group III	≤0.03	and	≥90	≥120
Group IV	All polyalphaolefins (PAO)			
Group V	All others not included in Groups I, II, III, or IV			

[0021] In one embodiment, the base oil as used in the present technology has less than 300 ppm sulfur and/or at least 90% saturate content, by ASTM D2007. In certain embodiments, the base oil has a viscosity index of at least 95 or at least 115. In one embodiment, the base oil of the invention has a viscosity index of at least 120, is a polyalphaolefin, or is comprised of mixtures of such materials.

[0022] Groups I, II and III are mineral oil base stocks. The oil of lubricating viscosity, then, can include natural or synthetic lubricating oils and mixtures thereof. Mixture of mineral oil and synthetic oils, particularly polyalphaolefin oils and polyester oils, are often used.

10 [0023] Natural oils include animal oils and vegetable oils (e.g. castor oil, lard oil, and other vegetable acid esters) as well as mineral lubricating oils such as liquid petroleum oils and solvent-treated or acid treated mineral lubricating oils of the paraffinic, naphthenic, or mixed paraffinic-naphthenic types. Hydrotreated or hydrocracked oils are included within the scope of useful oils of lubricating viscosity.

15 [0024] Oils of lubricating viscosity derived from coal or shale are also useful. Synthetic lubricating oils include hydrocarbon oils and halosubstituted hydrocarbon oils such as polymerized and interpolymerized olefins and mixtures thereof, alkylbenzenes, polyphenyl, (e.g., biphenyls, terphenyls, and alkylated polyphenyls), alkylated diphenyl ethers and alkylated diphenyl sulfides and their derivatives, analogs and homologues thereof. Alkylene oxide polymers and interpolymers and derivatives thereof, and those where terminal hydroxyl groups have been modified by, for example, esterification or etherification, constitute other classes of known synthetic lubricating oils that can be used. Another suitable class of synthetic lubricating oils that can be used comprises the esters of dicarboxylic acids and those
20
25 made from C5 to C12 monocarboxylic acids and polyols or polyol ethers.

[0025] Other suitable synthetic lubricating oils include liquid esters of phosphorus-containing acids, polymeric tetrahydrofurans, silicon-based oils such as the poly-alkyl-, polyaryl-, polyalkoxy-, or polyaryloxy-siloxane oils, and silicate oils.


5 [0026] Hydrotreated naphthenic oils are also known and can be used. Synthetic oils may be used, such as those produced by Fischer-Tropsch reactions and typically may be hydroisomerized Fischer-Tropsch hydrocarbons or waxes. In one embodiment oils may be prepared by a Fischer-Tropsch gas-to-liquid synthetic procedure as well as other gas-to-liquid oils.

10 [0027] Unrefined, refined and rerefined oils, either natural or synthetic (as well as mixtures of two or more of any of these) of the type disclosed hereinabove can used in the compositions of the present invention. Unrefined oils are those obtained directly from a natural or synthetic source without further purification treatment. Refined oils are similar to the unrefined oils except they have been further treated in one or more purification steps to improve one or more properties. Rerefined oils are obtained by
15 processes similar to those used to obtain refined oils applied to refined oils which have been already used in service. Such rerefined oils often are additionally processed by techniques directed to removal of spent additives and oil breakdown products.

20 [0028] The amount of oil in a fully formulated lubricant will typically be the amount remaining to equal 100 percent after the remaining additives are accounted for. Typically this may be 60 to 99 percent by weight, or 70 to 97 percent, or 80 to 95 percent, or 85 to 93 percent. The disclosed technology may also be delivered as a concentrate, in which case the amount of oil is typically reduced and the concentrations of the other components are correspondingly increased. In such cases
25 the amount of oil may be 30 to 70 percent by weight or 40 to 60 percent.

Substituted Diarylamine additive

30 [0029] The lubricating composition of the invention contains a diarylamine wherein at least one of the aryl groups comprises two or more edge-sharing rings. Edge-sharing rings are structures where two or more cyclic groups share two adjoining atoms, such as may be found in phenyl- α -naphthylamine and similar derivatives, all of which are referred to herein as diarylamines. These additives may be used as lubricant additives and include those described by formula (I):

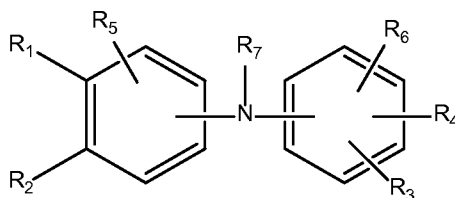


(I)

wherein R_1 and R_2 are moieties which, together with the carbon atoms to which they are bonded, are joined together to form a 5-, 6-, or 7-membered ring (such as a carbocyclic ring or cyclic hydrocarbylene ring); R_3 and R_4 are independently hydrogen, hydrocarbyl groups, or are moieties which, taken together with the carbon atoms to which they are bonded, form a 5-, 6-, or 7-membered ring (such as a carbocyclic ring or cyclic hydrocarbylene ring); R_5 and R_6 are independently hydrogen, hydrocarbyl groups, or are moieties (typically hydrocarbyl moieties) which, taken together with the carbon atoms to which they are attached, form a ring, or represent a zero-carbon or direct linkage between the rings; and R_7 is hydrogen or a hydrocarbyl group.

[0030] The hydrocarbyl groups provided above may each independently contain from 1 to 20 carbon atoms, or from 6 to 12 carbon atoms, or even from 8 to 10 carbon atoms; alternatively, 1 to 6, 1 to 4, 1 to 2, or 1 carbon atom(s).


[0031] In one embodiment, the diarylamine is a N-phenyl-naphthylamine (PNA). PNA may be represented by formula (1a):

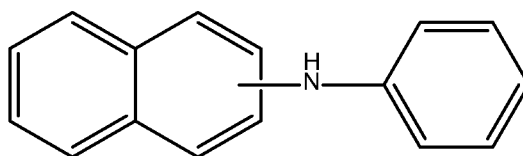

(1a)

The naphthyl group may be attached in the 1- (or α -) position or the 2- (or β -) position. In one embodiment, the PNA is phenyl- α -naphthylamine (PANA).


[0032] In one embodiment, the diarylamine is an alkylated phenyl- α -naphthylamine (APANA). APANA may be represented by formula (1b):

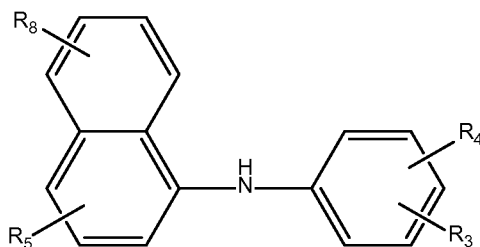

(Ib)

wherein R_3 and R_4 are independently hydrogen or hydrocarbyl groups of 6 to 16 carbon atoms and at least one of R_3 and R_4 is not hydrogen; R_5 and R_8 are independently hydrogen, hydrocarbyl groups of 6 to 16 carbon atoms, or, together with the carbon atoms to which they are bonded, are joined together to form a 5-, 6-, or 7-membered ring. In one embodiment, the APANA of formula (Ib) comprises a mono-alkylated derivative where R_3 is a C8 hydrocarbyl group and R_4 , R_5 , and R_8 are hydrogen.


10 [0033] In another embodiment, the diarylamine may be represented by formula (Ic):

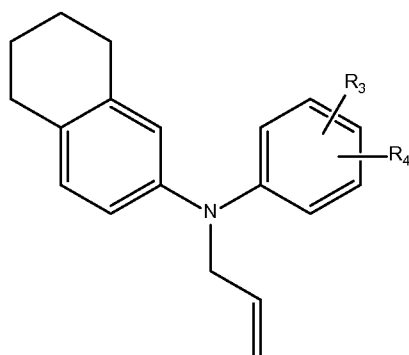

(Ic)

wherein R_3 and R_4 are defined as above.


15 [0034] In another embodiment, the diarylamine compounds include those having the general formula (Id)

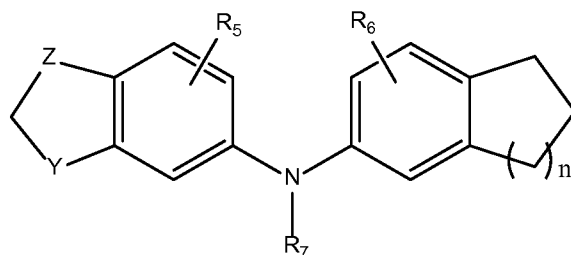

(Id)


wherein R_7 is defined as above; R_5 and R_6 are independently hydrogen, hydrocarbyl groups or taken together may form a ring, such as a dihydroacridan; $n = 1$ or 2 ; and Y and Z independently represent carbon or heteroatoms such as N, O and S.

[0035] In a particular embodiment, compounds of formula (Id) further comprise an N-allyl group, for example the compound of formula (Ie)

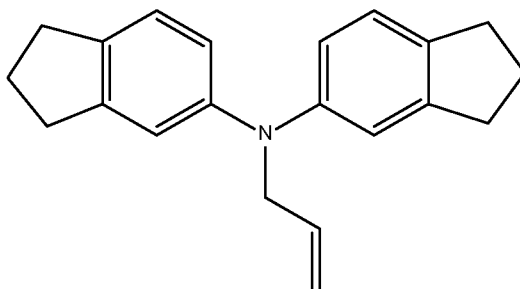

(Ie)


[0036] In one embodiment, the diarylamine is a dihydroacridan derivative of formula (If)

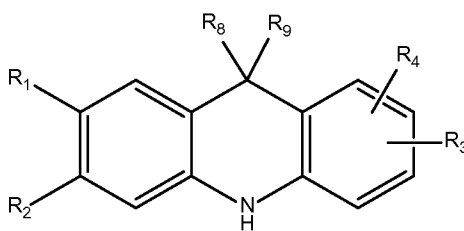

(If)

wherein R_1 , R_2 , R_3 , and R_4 are defined above; R_8 and R_9 are independently hydrogen or a hydrocarbyl group of 1 to 20 carbon atoms.

[0037] In one embodiment, the diarylamine of formula (1) is chosen such that R_5 and R_6 represent a direct (or zero-carbon) link between the aryl rings. The result is a carbazole of formula (Ig)

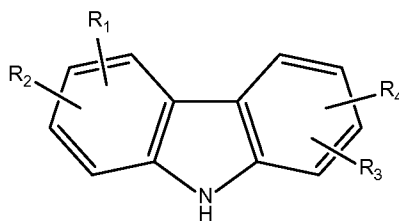


(Ig)

wherein R_1 , R_2 , R_3 , and R_4 are defined as above.

[0038] The diarylamine additive of the invention may be present on a weight basis of this invention at 0.1% to 10%, 0.35% to 5%, or even 0.5% to 2%.

The Aminobenzene Compound

[0039] The lubricating composition of the invention contains an aminobenzene compound different from the aforementioned diarylamine compound (b), such as N,N-dialkylaniline or anthranilate esters and similar additives, all of which are referred to herein as aminobenzene compounds. An aminobenzene different from (b) will typically mean an aminobenzene compound that does not fit within the definition of the substituted diarylamine compound of (b) as defined and described hereinabove. The term "aminobenzene" is intended to encompass substituted aminobenzenes including those with substituents on the benzene ring. These additives may be used as lubricant additives and include those described by formula (II)




(II)

wherein R₁ and R₂ are independently hydrogen; hydrocarbyl groups; hydrocarbyl groups linked together to form a ring; -CH₂CH₂CN; -(CH₂CHR₇-O)_yH where R₇ is hydrogen or a hydrocarbyl group and y = 1 to 20; or -CH₂CH₂C(O)XR₆, (or alternatively -CH₂CHR₇C(O)XR₆ where R₇ is a hydrocarbyl group) where X is -, -O-, -S-, or -NR₆-, R₆ is a hydrogen or hydrocarbyl group; R₃, R₄, and R₅ are independently hydrogen, hydrocarbyl groups, alkoxy groups, or acyl derivatives -C(X₁)A wherein X₁ is oxygen or sulfur; and A is X₂-R₈ where X₂ is oxygen or sulfur and R₈ is a hydrocarbyl group. The hydrocarbyl groups provided in this description may each independently contain from 1 to 20 carbon atoms, or from 6 to 12 carbon atoms, or even from 8 to 10 carbon atoms; alternatively, 1 to 6, 1 to 4, 1 to 2, or 1 carbon atom(s).

[0040] In one embodiment, the aminobenzene compound is a monoarylamine. The aminobenzene of formula (II) may be selected such that R₁ and R₂ are independently hydrogen or hydrocarbyl groups wherein neither R₁ nor R₂ comprise an aryl ring directly attached to the aminobenzene nitrogen atom.

[0041] The hydrocarbyl groups provided above may each independently contain from 1 to 20 carbon atoms or from 1, 2, 4, 5 or 6 carbon atoms up to 20, 18, 16, 12, 10 or 8 carbon atoms.

[0042] In one embodiment, the aminobenzene compound may be an anthranilic acid derivative described by formula (IIa):




(IIa)

wherein X is oxygen or sulfur and A is X₂-R₈ where X₂ is oxygen or sulfur and R₈ is a hydrocarbyl group; R₁ and R₂ are independently hydrogen; hydrocarbyl groups; hydrocarbyl groups linked together to form a ring; -CH₂CH₂CN; or -CH₂CH₂C(O)XR₆, where X is -O-, -S-, or -NR₆-, R₆ is hydrogen, or a hydrocarbyl group or -(CH₂CHR₇-O)_yH where R₇ is hydrogen or a hydrocarbyl group and y = 1 to 20; and R₄, and R₅ are independently hydrogen, hydrocarbyl groups or taken together form a ring.

- 10 **[0043]** In some embodiments the anthranilic acid derivatives of the present invention are derived from a 4-(dialkylamino)benzoic acid and/or a 4-(alkylamino)benzoic acid by reacting the acid with an alcohol, optionally in the presence of a catalyst. Examples of suitable acids include but are not limited to 4-(dimethylamino)benzoic acid, 4-(diethylamino)benzoic acid, 4-(dipropylamino)-
- 15 benzoic acid, 4-(methylamino)benzoic acid, 4-(ethylamino)benzoic acid, 4-(propylamino)benzoic acid, or any combination thereof. In other embodiments the additives of the present invention are derived from a 3-(dialkylamino)benzoic acid and/or a 3-(alkylamino)benzoic acid by reacting the acid with an alcohol, optionally in the presence of a catalyst. Examples of suitable acids include but are not limited to 3-
- 20 (dimethylamino)benzoic acid, 3-(diethylamino)benzoic acid, 3-(dipropylamino)benzoic acid, 3-(methylamino)benzoic acid, 3-(ethylamino)benzoic acid, 3-(propylamino)benzoic acid, or any combination thereof.

[0044] In one embodiment, the aminobenzene compound is an anthranilic acid derivative of formula (IIb):



(IIb)

25

wherein R_4 , and R_5 are independently hydrogen, hydrocarbyl groups, or, taken together with the carbon atoms to which they are bonded, form a 5-, 6-, or 7-membered ring; R_8 is a hydrocarbyl group.

5 [0045] In any of the embodiments described above R_8 may be: (i) a hydrocarbyl group containing at least 8 carbon atoms; (ii) a hydrocarbyl group containing at least one branch point; (iii) a fully saturated alkyl group; or (iv) any combination of one or more embodiments thereof.

10 [0046] In other embodiments, the anthranilate ester may be described as the reaction product of an alcohol and a hetero bicyclic aromatic compound consisting of a nitrogen-containing ring and an aromatic ring, where the nitrogen-containing ring has groups at the 2 and 4 positions, and where the ring also contains an additional oxygen atom, typically in between the groups. The aromatic ring may have up to four substituent groups attached to the carbon atoms in the ring. These substituent groups may be hydrocarbyl groups. In one embodiment there are no substituent groups on the aromatic ring. A suitable hetero bicyclic aromatic compound is isatoic anhydride. In some embodiments the anthranilate ester additive of the present invention, as described by any of the formulas above, is derived or derivable from isatoic anhydride.

15 [0047] The reaction of the alcohol and the hetero bicyclic aromatic compound may be carried out in the presence of a basic catalyst, such as NaOH.

20 [0048] Suitable alcohols may be described by the formula R_8 -OH where R_8 is a hydrocarbyl group as defined above. In some embodiments the alcohol and/or the R_8 group in the alcohol is chosen to impart oil solubility to the ester product.

25 [0049] In some embodiments the alcohol used to prepare the anthranilic acid derivative is a mixture of linear alcohols where the alcohols may contain 1 to 4, 2 to 10, 3 to 6, or 8 to 10 carbon atoms. In some embodiments the alcohol used to prepare the additive is: decyl alcohol; tridecyl alcohol, optionally with one or more branch points such as isotridecyl alcohol and 2,4,6,8-tetramethyl-nonanol; 2-ethylhexanol; or combinations thereof. In other embodiments, the alcohol used may contain 1-24, 2 to 18, 4 to 14 or 6 to 12 carbon atoms and any of the alcohols listed herein may be used in combination with one another.

30 [0050] In some embodiments the alcohol used to prepare the anthranilic acid derivative is: 2,4,6,8-tetramethyl-nonanol, a mixture of linear alcohols where the alcohols may contain 8 to 10 carbon atoms, 2-ethylhexanol, or combinations thereof. In still other embodiments, the alcohol used is 2,4,6,8-tetramethyl-nonanol, a mixture

of linear alcohols where the alcohols may contain 8 to 10 carbon atoms, or combinations thereof. In still other embodiments, the anthranilic acid derivative is derived from 2,4,6,8-tetramethyl-nonanol.

5 [0051] In some embodiments the anthranilic acid derivative is derived from isatoic anhydride and an alcohol component consisting of 2,4,6,8-tetramethyl-nonanol, a mixture of linear alcohols where the alcohols may contain 8 to 10 carbon atoms, 2-ethylhexanol, or combinations thereof. In still other embodiments the additive is derived from isatoic anhydride and 2,4,6,8-tetramethyl-nonanol and/or a mixture of linear alcohols where the alcohols may contain 8 to 10 carbon atoms.

10 [0052] In one embodiment the aminobenzene compound may be a compound of formula (II), wherein R_1 and R_2 are independently hydrogen; hydrocarbyl groups; hydrocarbyl groups linked together to form a ring; $-CH_2CH_2CN$; or $-CH_2CH_2C(O)XR_6$, where X is $-O-$, $-S-$, or $-NR_6-$, R_6 is a hydrogen or hydrocarbyl group; R_3 , R_4 , and R_5 are independently hydrogen, hydrocarbyl groups, or alkoxy groups, with the proviso that at least one of R_1 , R_2 , R_3 , R_4 , and R_5 is not hydrogen.

[0053] In one embodiment the aminobenzene compound is aniline or an N,N-dialkyl aniline (i.e. R_1 and R_2 are independently hydrocarbyl groups). The N-hydrocarbyl groups may each independently contain from 1 to 20 carbon atoms or from 1, 2, 4, 5 or 6 carbon atoms up to 20, 18, 16, 12, 10 or 8 carbon atoms. In a further embodiment, the N,N-dialkylaniline is substituted with an alkoxy group (i.e. one of R_3 , R_4 or R_5 is an alkoxy group), preferably in a position para to the amino group.

20 [0054] Aniline is commercially available. N,N-dialkylaniline can be prepared by reacting aniline and alkylhalide (e.g., alkylbromide) in a 2:1 molar ratio, in the presence triethylamine, in an acetonitrile solvent. The attachment of a hydrocarbyl group R' or alkoxy group to the aniline or N,N-dialkylene moiety can be accomplished using a number of well known techniques, such as a Friedel-Crafts reaction in which an olefin, halogenated olefin or hydrohalogenated analog thereof is reacted with the aniline or N,N-dialkylaniline in the presence of a Lewis acid catalyst
30 (e.g., boron trifluoride and complexes of boron trifluoride with ethers, phenols, hydrogen fluoride; aluminum chloride, aluminum bromide, zinc dichloride). Those skilled in the art will be aware of numerous, equally well known methods for alkylated aniline. Methods for providing aniline with an alkoxy substituent are also

well known and a number of such methods are described, for example, in United States Patent 5,493,055.

[0055] In some embodiments the substituted aniline may be selected from N,N-dihexylaniline, para-ethoxy-N,N-dihexylaniline, ortho-methoxy-N,N-dihexylaniline, 5 N,N-dimethylaniline, N,N-diethylaniline, N,N-dipropylaniline, N,N-dibutylaniline.

[0056] The aminobenzene compound may be present in the lubricating compositions in amounts that deliver specific amounts of TBN, as described below. In other embodiments, used in combination with any of the embodiments described above, the additive may be present in a lubricating composition at 0.5, 1.0, 1.2 or 2.0 10 percent by weight or more. In still other embodiments, the additive is present within a range having a lower limit of 0.5, 1.0, 1.2 or 2.0 percent by weight and an upper limit of 3.0, 4.0, 4.5 or 5.0 percent by weight.

Other Performance Additives

[0057] In some embodiments, the compositions of the present invention contain 15 one or more additional additives. A suitable additional additive is a detergent, where the detergent is different from the aniline derivative described above.

[0058] Most conventional detergents used in the field of engine lubrication, unlike those of the present technology, obtain most or all of their basicity or TBN from the presence of basic metal-containing compounds (metal hydroxides, oxides, or carbonates, typically based on such metals as calcium, magnesium, zinc, or sodium). 20 Such metallic overbased detergents, also referred to as overbased or superbased salts, are generally single phase, homogeneous Newtonian systems characterized by a metal content in excess of that which would be present for neutralization according to the stoichiometry of the metal and the particular acidic organic compound reacted with the metal. The overbased materials are typically prepared by reacting an acidic material 25 (typically an inorganic acid or lower carboxylic acid such as carbon dioxide) with a mixture of an acidic organic compound (also referred to as a substrate), a stoichiometric excess of a metal base, typically in a reaction medium of an inert, organic solvent (e.g., mineral oil, naphtha, toluene, xylene) for the acidic organic substrate. Typically also a small amount of promoter such as a phenol or alcohol is present, and in some 30 cases a small amount of water. The acidic organic substrate will normally have a sufficient number of carbon atoms to provide a degree of solubility in oil.

[0059] Such conventional overbased materials and their methods of preparation are well known to those skilled in the art. Patents describing techniques for making

basic metallic salts of sulfonic acids, carboxylic acids, phenols, phosphonic acids, and mixtures of any two or more of these include U.S. Patents 2,501,731; 2,616,905; 2,616,911; 2,616,925; 2,777,874; 3,256,186; 3,384,585; 3,365,396; 3,320,162; 3,318,809; 3,488,284; and 3,629,109. Salixarate detergents are described in U.S. patent 6,200,936.

[0060] The overbased metal-containing detergent may be selected from the group consisting of non-sulfur containing phenates, sulfur containing phenates, sulfonates, salixarates, salicylates, and mixtures thereof, or borated equivalents thereof. The overbased detergent may be borated with a borating agent such as boric acid.

10 [0061] In one embodiment the overbased metal-containing detergent may be zinc, sodium, calcium or magnesium salts of a phenate, sulfur containing phenate, sulfonate, salixarate or salicylate. Overbased salixarates, phenates and salicylates typically have a total base number (ASTM D3896) of 180 to 450 TBN. Overbased sulfonates typically have a total base number of 250 to 600, or 300 to 500. Overbased
15 detergents are known in the art. In one embodiment the sulfonate detergent may be a predominantly linear alkylbenzene sulfonate detergent having a metal ratio of at least 8 as is described in paragraphs [0026] to [0037] of US Patent Application 2005-065045. The term "metal ratio" is the ratio of the total equivalents of the metal to the equivalents of the acidic organic compound. A neutral metal salt has a metal
20 ratio of one. A salt having 4.5 times as much metal as present in a normal salt will have metal excess of 3.5 equivalents, or a ratio of 4.5. The predominantly linear alkylbenzene sulfonate detergent may be particularly useful for assisting in improving fuel economy. In some embodiments the linear alkyl group may be attached to the benzene ring anywhere along the linear chain of the alkyl group, but
25 often in the 2, 3 or 4 position of the linear chain, and in some instances predominantly in the 2 position.

[0062] In one embodiment the overbased metal-containing detergent is calcium or magnesium overbased detergent. In one embodiment, the lubricating composition comprises an overbased calcium sulfonate, an overbased calcium phenate, or mixtures
30 thereof. The overbased detergent may comprise calcium sulfonate with a metal ratio of at least 3.

[0063] The overbased detergent of the invention may be present in an amount from 0.05% by weight to 5% by weight of the composition. In other embodiments the overbased detergent may be present from 0.1%, 0.3%, or 0.5% up to 3.2%, 1.7%, or

0.9% by weight of the lubricating composition. Similarly, the overbased detergent may be present in an amount suitable to provide from 1 TBN to 10 TBN to the lubricating composition. In other embodiments the overbased detergent is present in amount which provides from 1.5 TBN or 2 TBN up to 3 TBN, 5 TBN, or 7 TBN to the lubricating composition.

[0064] The lubricating composition of the invention optionally comprises other performance additives. The other performance additives include at least one of metal deactivators, viscosity modifiers, friction modifiers, antiwear agents, corrosion inhibitors, dispersants, dispersant viscosity modifiers, extreme pressure agents, antioxidants, foam inhibitors, demulsifiers, pour point depressants, seal swelling agents and mixtures thereof. Typically, fully-formulated lubricating oil will contain one or more of these performance additives.

[0065] Another additive is a dispersant. Dispersants are well known in the field of lubricants and include primarily what is known as ashless-type dispersants and polymeric dispersants. Ashless type dispersants are characterized by a polar group attached to a relatively high molecular weight hydrocarbon chain. Typical ashless dispersants include nitrogen-containing dispersants such as N-substituted long chain alkenyl succinimides, also known as succinimide dispersants. Succinimide dispersants are more fully described in U.S. Patents 4,234,435 and 3,172,892.

Another class of ashless dispersant is high molecular weight esters, prepared by reaction of a hydrocarbyl acylating agent and a polyhydric aliphatic alcohol such as glycerol, pentaerythritol, or sorbitol. Such materials are described in more detail in U.S. Patent 3,381,022. Another class of ashless dispersant is Mannich bases. These are materials which are formed by the condensation of a higher molecular weight, alkyl substituted phenol, an alkylene polyamine, and an aldehyde such as formaldehyde and are described in more detail in U.S. Patent 3,634,515. Other dispersants include polymeric dispersant additives, which are generally hydrocarbon-based polymers which contain polar functionality to impart dispersancy characteristics to the polymer. Dispersants can also be post-treated by reaction with any of a variety of agents. Among these are urea, thiourea, dimercaptiothiadiazoles, carbon disulfide, aldehydes, ketones, carboxylic acids, hydrocarbon-substituted succinic anhydrides, nitriles, epoxides, boron compounds, and phosphorus compounds. References detailing such treatment are listed in U.S. Patent 4,654,403. The amount of dispersant in the present composition can

typically be 1 to 10 weight percent, or 1.5 to 9.0 percent, or 2.0 to 8.0 percent, all expressed on an oil-free basis.

[0066] Another component is an antioxidant. Antioxidants encompass phenolic antioxidants, which may comprise a butyl substituted phenol containing 2 or 3 t-butyl groups. The para position may also be occupied by a hydrocarbyl group or a group bridging two aromatic rings. The latter antioxidants are described in greater detail in U.S. Patent 6,559,105. Antioxidants also include aromatic amines, such as nonylated diphenylamine. Other antioxidants include sulfurized olefins, titanium compounds, and molybdenum compounds. U.S. Pat. No. 4,285,822, for instance, discloses lubricating oil compositions containing a molybdenum and sulfur containing composition. Typical amounts of antioxidants will, of course, depend on the specific antioxidant and its individual effectiveness, but illustrative total amounts can be 0.01 to 5, or 0.15 to 4.5, or 0.2 to 4 percent by weight. Additionally, more than one antioxidant may be present, and certain combinations of these can be synergistic in their combined overall effect.

[0067] Viscosity improvers (also sometimes referred to as viscosity index improvers or viscosity modifiers) may be included in the compositions of this invention. Viscosity improvers are usually polymers, including polyisobutenes, poly(meth)acrylates (PMA) and poly(meth)acrylic acid esters, hydrogenated diene polymers, polyalkylstyrenes, esterified styrene-maleic anhydride copolymers, hydrogenated alkenylarene-conjugated diene copolymers and polyolefins. PMA's are prepared from mixtures of methacrylate monomers having different alkyl groups. The alkyl groups may be either straight chain or branched chain groups containing from 1 to 18 carbon atoms. Most PMA's are viscosity modifiers as well as pour point depressants.

[0068] Multifunctional viscosity improvers, which also have dispersant and/or antioxidant properties, are known and may optionally be used. Dispersant viscosity modifiers (DVM) are one example of such multifunctional additives. DVM are typically prepared by copolymerizing a small amount of a nitrogen-containing monomer with alkyl methacrylates, resulting in an additive with some combination of dispersancy, viscosity modification, pour point depressancy and dispersancy. Vinyl pyridine, N-vinyl pyrrolidone and N,N'-dimethylaminoethyl methacrylate are examples of nitrogen-containing monomers. Polyacrylates

obtained from the polymerization or copolymerization of one or more alkyl acrylates also are useful as viscosity modifiers.

[0069] The dispersant viscosity modifier may include functionalized polyolefins, for example, ethylene-propylene copolymers that have been functionalized with an acylating agent such as maleic anhydride and an amine; polymethacrylates functionalized with an amine, or styrene-maleic anhydride copolymers reacted with an amine. More detailed description of dispersant viscosity modifiers are disclosed in International Publication WO2006/015130 or U.S. Patents 4,863,623; 6,107,257; 6,107,258; and 6,117,825. In one embodiment the dispersant viscosity modifier may include those described in U.S. Patent 4,863,623 (see column 2, line 15 to column 3, line 52) or in International Publication WO2006/015130 (see page 2, paragraph [0008] and preparative examples described in paragraphs [0065] to [0073]).

[0070] In one embodiment the lubricating composition of the invention further comprises a dispersant viscosity modifier. The dispersant viscosity modifier may be present at 0 wt % to 15 wt %, or 0 wt % to 10 wt %, or 0.05 wt % to 5 wt %, or 0.2 wt % to 2 wt % of the lubricating composition.

[0071] In certain embodiments, the dispersant or dispersant viscosity modifier comprises a polymer functionalized with a certain type of amine. The amine used for the polymeric dispersant may be an amine having at least 2 or at least 3 or at least 4 aromatic groups, for instance, 4 to 10 or 4 to 8 or 4 to 6 aromatic groups, and at least one primary or secondary amino group or, alternatively, at least one secondary amino group. In some embodiments the amine comprises both a primary and at least one secondary amino group. In certain embodiments, the amine comprises at least 4 aromatic groups and at least 2 secondary or tertiary amino groups.

[0072] Another additive is an antiwear agent. Examples of anti-wear agents include phosphorus-containing antiwear/extreme pressure agents such as metal thiophosphates, phosphoric acid esters and salts thereof, phosphorus-containing carboxylic acids, esters, ethers, and amides; and phosphites. In certain embodiments a phosphorus antiwear agent may be present in an amount to deliver 0.01 to 0.2 or 0.015 to 0.15 or 0.02 to 0.1 or 0.025 to 0.08 percent by weight phosphorus. Often the antiwear agent is a zinc dialkyldithiophosphate (ZDP). For a typical ZDP, which may contain 11 percent P (calculated on an oil free basis), suitable amounts may include 0.09 to 0.82 percent by weight. Non-phosphorus-containing anti-wear agents include

borate esters (including borated epoxides), dithiocarbamate compounds, molybdenum-containing compounds, and sulfurized olefins.

[0073] Other additives that may optionally be used in lubricating oils include pour point depressing agents, extreme pressure agents, color stabilizers and anti-foam agents. One or metal-containing detergents, as described above, may also be included.

[0074] The foregoing lubricating oil additives may be added directly to the base oil to form the lubricating oil composition. In one embodiment, however, one or more of the additives may be diluted with a substantially inert, normally liquid organic diluent such as mineral oil, synthetic oil, naphtha, alkylated (e.g., C₁₀-C₁₃ alkyl) benzene, alkylated toluene or alkylated xylene to form an additive concentrate. These concentrates may contain from about 1 to about 99 percent by weight, and in one embodiment from about 10 to 90 percent by weight of such diluent. The concentrates may be added to the base oil to form the lubricating oil composition.

[0075] In some embodiments the lubricating compositions of the present invention comprise at least one additive selected from the group consisting of non-phosphorus-containing anti-wear agents, ashless dispersants, antioxidants, friction modifiers, zinc dithiophosphates, and corrosion inhibitors.

[0076] The lubricating compositions of the present invention may have an overall TBN of greater than 6, for example, a TBN of at least 7, 8, 9, 10 or greater. In still other embodiments the lubricating compositions of the present invention also have a sulfated ash content of less than 1.5, 1.3, or 1.0 percent by weight.

[0077] The lubricating compositions of the present invention may have a nitrogen content of less than 0.4 or 0.3 percent by weight and/or a soap content of less than 5 or 3 percent by weight.

[0078] The lubricant described herein may be used to lubricate a mechanical device, by supplying the lubricant to the device, and in particular to the moving parts. The device may be an internal combustion engine (ICE), a driveline component (e.g., automatic or manual transmission, gear box, differential). The ICE that may be lubricated may include gasoline fueled engines, spark ignited engines, diesel engines, compression-ignited engines, two-stroke cycle engines, four-stroke cycle engines, sump-lubricated engines, fuel-lubricated engines, natural gas-fueled engines, marine diesel engines, and stationary engines. Vehicles in which such ICE may be employed include automobiles, trucks, off-road vehicles, marine vehicles, motorcycles, all-

terrain vehicles, and snowmobiles. In one embodiment, the ICE is a heavy duty diesel engine, which may include sump-lubricated, two- or four-stroke cycle engines, which are known to those skilled in the art.

[0079] The lubricant composition for an internal combustion engine may be suitable for any engine lubricant irrespective of the sulfur, phosphorus or sulfated ash content. The sulfur content of the engine oil lubricant may be 1 wt % or less, or 0.8 wt % or less, or 0.5 wt % or less, or 0.3 wt % or less. In one embodiment the sulfur content may be in the range of 0.001 wt % to 0.5 wt %, or 0.01 wt % to 0.3 wt %. The phosphorus content may be 0.2 wt % or less, or 0.12 wt % or less, or 0.1 wt % or less, or 0.085 wt % or less, or 0.08 wt % or less, or 0.06 wt % or less, 0.055 wt % or less, or 0.05 wt % or less. In one embodiment the phosphorus content may be 0.4 wt % to 0.12 wt %. In one embodiment the phosphorus content may be 100 ppm to 1000 ppm, or 200 ppm to 600 ppm. The total sulfated ash content may be 0.3 wt % to 1.2 wt %, or 0.5 wt % to 1.1 wt % of the lubricating composition. In one embodiment the sulfated ash content may be 0.5 wt % to 1.1 wt % of the lubricating composition.

Specific Embodiment


[0080] The invention will be further illustrated by the following examples, which sets forth particularly advantageous embodiments. While the examples are provided to illustrate the invention, they are not intended to limit it.

[0081] Example AB-1: Synthesis of 2-Amino-benzoic acid decyl ester. A one liter, four necked, round bottom flask, equipped with an overhead stirrer, sub-surface gas inlet tube, thermowell, Dean-Stark trap, and Friedrichs condenser, is charged with 937.5 grams (5.92 moles) of decyl alcohol and 7.11 grams (0.18 moles or 180 mmoles) of solid crushed/powdered sodium hydroxide. The flask is purged with nitrogen and warmed to 65°C. 1014.02 grams of isatoic anhydride (6.22 moles) is added portion-wise, supra-surface, over a period of 1 hour 30 minutes. The mixture is stirred at 65°C for 3 hours, heated to 95°C over 1 hour and held at 95°C for 4 hours. 30 grams of filter aid is added to the flask at 105°C and stirred for 15 minutes. The mixture is filtered and cooled to yield 1629.1 grams of the product, in the form of a brown liquid. The product has a TBN, by ASTM D2896, of 172.3.

[0082] Example AB-2: Synthesis of 4-(dimethylamino)benzoic acid decyl ester. A one-liter, four-necked, round-bottom flask, equipped with an overhead stirrer, sub-surface gas inlet tube, thermowell, Dean-Stark trap, and Friedrichs condenser, is


charged with 316.3 grams (2.00 moles) of 1-decanol and 30 grams of solid Amberlyst-15 catalyst. The flask is purged with nitrogen and warmed to 120°C before 165 grams (1.00 mole) of 4-(dimethylamino)benzoic acid is added portion-wise over 10 minutes. Evolved water is condensed in the Dean-Stark trap. The mixture is stirred at 150°C for 6 hours and filtered hot using 50 grams of filter-aid to remove any particulates. The filtrate is reheated to 150°C for 1 hr at reduced pressure (<5.3 kPa) (40mmHg) to remove excess alcohol. The mixture is cooled to yield the desired product, in the form of a brown liquid.

[0083] Example AB-3: 4-ethoxy-N,N-dihexylaniline, the synthesis of which is described in, e.g., United States application 2010/0160195, Synthesis Example 1, page 7.

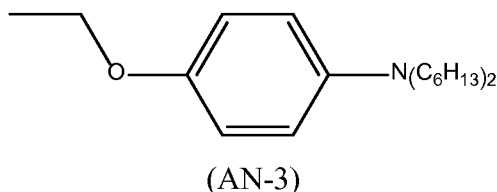

[0084] Example ADA-1: p-tert-octylphenyl- α -naphthylamine (APANA) is available from e.g. Ciba Specialty Chemicals (under the trade designation "Irganox L06").

[0085] Example ADA-2: 12-octyl-1,2,3,6,9,10,11,12-octahydrodicyclopenta[a,j]acridine according to formula (Ig), the synthesis of which is described in e.g. United States application 2009/0131290, Example 1, page 10.

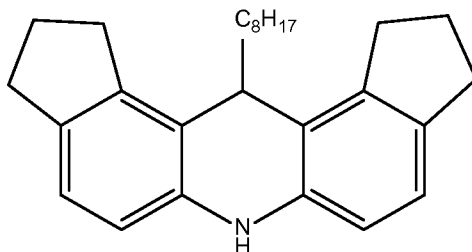

20

Lubricating Compositions

A series of 15W-40 diesel engine lubricants in base oil of lubricating viscosity are prepared containing the additive composition of the present invention as well as conventional additives including polymeric viscosity modifier, ashless succinimide dispersant, overbased detergents, antioxidants (combination of phenolic ester and diarylamine), zinc dialkyldithiophosphate (ZDDP), as well as other performance additives as follows. Amounts shown are weight percent.

Table 1 – Lubricating Oil Composition Formulations

	Comp Ex1	Comp Ex 2	Comp Ex 3	Ex 1	Ex 2	Ex 3	Ex 4
Base Oil	Balance to = 100%						
ADA-1	0	0	1.2	1.2	1.2	1.2	0
ADA-2	0	0	0	0	0	0	1.2
AB-1	0	1.07	0	1.07	0	0	1.07
AB-2	0	0	0	0	1.1	0	0
AB-3	0	0	0	0	0	1.0	0
OCP VM ¹	6	6	6	6	6	6	6
Additional Additives ²	16.6	16.6	16.6	16.6	16.6	16.6	16.6
TBN (D2896)	9.5	11.2	9.2	11.5	9.2	11.0	11.3
Ash (D874)	0.96	0.96	0.99	0.97	0.96	0.97	0.97

1 including 90% Oil

2 Conventional additives include polyalkylene succinimide dispersant (4.4 wt%), overbased calcium sulfonate detergent (1.05 wt%), overbased calcium phenate (0.5 wt%), overbased magnesium detergent (0.65 wt%), zinc dialkyldithiophosphate (0.86 wt%), ashless antioxidant (1.4 wt%), as well as friction modifier and anti-foam agent, each of which may contain a conventional amount of diluent (not separately accounted for).

TBN Retention and Oxidation Testing

10 [0086] The lubricating oil compositions summarized in Table 1 are tested for TBN retention performance using a modified nitration/oxidation bench test. This test involves the addition of nitric acid and NO_x to degrade a fully formulated lubricating oil and is modified to measure TBN at the start and end of test. A sample of 40 g of test oil is stressed with nitric acid and Fe(III) oxidation catalyst. The sample is then heated to 145°C and bubbled with a mixture of air and NO_x for 22 hours. TBN as measured by ASTM D2896 is measured at the start of test and at end of test.

15 [0087] The lubricating compositions are also subjected to the ACEA E5 oxidation bench test (CECL85) which determined oxidative stability of a sample by pressure differential scanning calorimetry. Results are reported as the time (in minutes) until the oil breaks and takes up oxidation.

Table 2 – TBN Retention and Oxidation Test Results

	Diaryl amine	Amino-benzene Compound	Start of Test D2896	End of Test D2896	Oxidation Onset Time (min)
Comp Ex 1	-	-	9.3	4.1	120
Comp Ex 2	-	1.07% AB-1	11.3	4.3	125
Comp Ex 3	1.2% ADA-1	-	9.4	4.8	202
Ex 1	1.2% ADA-1	1.07% AB-1	11.1	5.5	219

[0088] The results show that addition of the aminobenzene compound imparts additional TBN to the lubricating oil, much of which may be lost as a result of oxidation of the oil. Addition of diarylamine does not increase initial TBN nor does it improve end of test TBN in the absence of the aminobenzene compound. The combination of ADA-1 and AB-1 results in higher initial TBN as well as higher end-of-test TBN.

[0089] Similarly, the combination of diarylamine and aminobenzene compound results in an unexpected synergistic boost in oxidative stability. When used alone, the aniline derivative provides little (or no) boost in oxidative stability. However when added to a formulation containing APANA, there is an increase in oxidation onset time of more than 8%.

[0090] In this specification the terms "hydrocarbyl substituent" or "hydrocarbyl group," as used herein are used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group primarily composed of carbon and hydrogen atoms and is attached to the remainder of the molecule through a carbon atom and does not exclude the presence of other atoms or groups in a proportion insufficient to detract from the molecule having a predominantly hydrocarbon character. In general, no more than two, preferably no more than one, non-hydrocarbon substituent will be present for every ten carbon atoms in the hydrocarbyl group; typically, there will be no non-hydrocarbon substituents in the hydrocarbyl group. A more detailed definition of the terms "hydrocarbyl substituent" or "hydrocarbyl group," is described in US Patent 6, 583,092.

[0091] Each of the documents referred to above is incorporated herein by reference. Except in the Examples, or where otherwise explicitly indicated, all numerical quantities in this description specifying amounts of materials, reaction conditions, molecular weights, number of carbon atoms, and the like, are to be understood as modified by the word "about." Unless otherwise indicated, all percent values listed herein are on a weight basis. Unless otherwise indicated, each chemical or composition referred to herein should be interpreted as being a commercial grade material which may contain the isomers, by-products, derivatives, and other such materials which are normally understood to be present in the commercial grade.

5

10 However, the amount of each chemical component is presented exclusive of any solvent or diluent, which may be customarily present in the commercial material, unless otherwise indicated. It is to be understood that the upper and lower amount, range, and ratio limits set forth herein may be independently combined. Similarly, the ranges and amounts for each element of the invention can be used together with

15


"consisting essentially of" permits the inclusion of substances that do not materially affect the basic and novel characteristics of the composition under consideration.

3918-01

What is claimed:

1. A lubricating composition comprising (a) an oil of lubricating viscosity, (b) a diarylamine wherein at least one of the aryl groups comprises two or more edge-sharing rings, and (c) an aminobenzene different from (b).


2. The composition of claim 1 wherein (b) the diarylamine is a compound of formula (I)

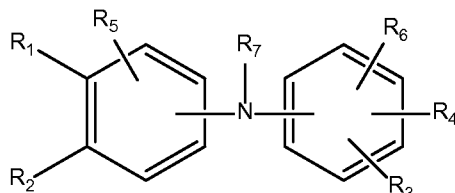

(I)

wherein R_1 and R_2 are moieties which, together with the carbon atoms to which they are bonded, are joined together to form a 5-, 6-, or 7-membered ring; R_3 and R_4 are independently hydrogen, hydrocarbyl groups, or are moieties which, taken together with the carbon atoms to which they are bonded, form a 5-, 6-, or 7-membered ring; R_5 and R_6 are independently hydrogen, hydrocarbyl groups, or are moieties which, taken together with the carbon atoms to which they are attached, form a ring, or represent a direct linkage between the rings to which they are attached; and R_7 is hydrogen or a hydrocarbyl group.

3. The composition of claim 1 or claim 2 wherein (c) the aminobenzene is a compound of formula (II)



(II)

wherein R_1 and R_2 are independently hydrogen; hydrocarbyl groups; hydrocarbyl groups linked together to form a ring; $-\text{CH}_2\text{CH}_2\text{CN}$; $-(\text{CH}_2\text{CHR}_7-\text{O})_y\text{H}$ where R_7 is hydrogen or a hydrocarbyl group and $y = 1$ to 20 ; or $-\text{CH}_2\text{CH}_2\text{C}(\text{O})\text{XR}_6$, where X is, $-\text{O}-$, $-\text{S}-$, or $-\text{NR}_6-$, each R_6 is independently a hydrogen or hydrocarbyl group; R_3 , R_4 , and R_5 are independently hydrogen, hydrocarbyl groups, alkoxy groups, or $-\text{C}(\text{X}_1)\text{A}$

wherein X_1 is oxygen or sulfur and A is X_2-R_8 where X_2 is oxygen or sulfur and R_8 is a hydrocarbyl group.

4. The composition of any one of claims 1 through 3 wherein (b), the diarylamine, is N-phenyl- α -naphthylamine or an alkyl-substituted derivative thereof.

5 5. The composition of any one of claims 1 through 4 wherein (c), the aminobenzene, is a C6 to C16 ester of anthranilic acid

6. The composition of any one of claims 1 through 5 further comprising an overbased detergent in an amount that delivers at least 2 TBN to the lubricating composition.

10 7. The composition of any one of claims 1 through 6 having a sulfated ash level of up to 1.2 wt%.

8. The composition of any one of claims 1 through 7 further comprising at least one additional additive selected from ashless dispersants, anti-wear agents, friction modifiers, antioxidants and viscosity modifiers.

15 9. A method for lubricating a mechanical device, comprising supplying thereto the composition of any one of claims 1 through 8.

10. The method of claim 9 wherein the mechanical device is an internal combustion engine.

20 11. A method of improving the oxidative stability of a lubricating composition which contains an oil of lubricating viscosity, comprising including within said lubricating composition a combination of (b) a diarylamine wherein at least one of the aryl groups comprises 2 or more edge-sharing rings, and (c) an aminobenzene different from (b).

25 12. A method of improving TBN retention of a lubricating composition which contains an oil of lubricating viscosity, comprising including within said lubricating composition a combination of (b) a diarylamine wherein at least one of the aryl groups comprises 2 or more edge-sharing rings; (c) an aminobenzene different from (b); and (d) an overbased detergent in an amount that delivers at least 2 TBN to the lubricating composition.

30

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/039965

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C10M133/12 C10M133/16 C10M133/38 C10M133/42 C10M167/00
 ADD. C10N40/25 C10N30/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 C10M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, COMPENDEX, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 801 189 A2 (CHEVRON ORONITE CO [US]) 27 June 2007 (2007-06-27)	1-4,6, 8-12
Y	paragraph [0006] - paragraph [0011] paragraph [0018] - paragraph [0040] paragraph [0074] - paragraph [0080] claims; examples	5,7
X	EP 2 055 763 A1 (SHELL INT RES MIJ BV) 6 May 2009 (2009-05-06)	1-4,7-9, 11,12
	paragraph [0008] - paragraph [0014] paragraph [0047] paragraph [0030] - paragraph [0043] claims; examples	
X	US 2005/230664 A1 (DUYCK KARL J [US] ET AL) 20 October 2005 (2005-10-20)	1-4,7-12
	paragraph [0021] - paragraph [0095] claims; examples	
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 16 July 2012	Date of mailing of the international search report 27/07/2012
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Elflein, Eleonore
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/039965

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2010/107882 A1 (LUBRIZOL CORP [US]; PRESTON ADAM J [US]; GIESELMAN MATTHEW D [US]; CAR) 23 September 2010 (2010-09-23) paragraph [0003] - paragraph [0004] paragraph [0009] - paragraph [0013] paragraph [0024] - paragraph [0035] paragraph [0042] claims; examples -----	5,7
Y	EP 2 206 764 A1 (INFINEUM INT LTD [GB]) 14 July 2010 (2010-07-14) paragraph [0016] - paragraph [0023] paragraph [0054] - paragraph [0056] paragraph [0069] - paragraph [0071] claims; examples -----	1-12
Y	WO 2009/064604 A1 (CHEMTURA CORP [US]; MA QINGGAO [US]; MIGDAL CYRIL A [US]) 22 May 2009 (2009-05-22) paragraph [0004] - paragraph [0007] paragraph [0031] - paragraph [0043] paragraph [0110] claims; examples -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2012/039965

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1801189	A2	27-06-2007	CA 2571104 A1 21-06-2007 EP 1801189 A2 27-06-2007 JP 2007169644 A 05-07-2007 SG 133567 A1 30-07-2007 US 2007142243 A1 21-06-2007

EP 2055763	A1	06-05-2009	NONE

US 2005230664	A1	20-10-2005	AT 549387 T 15-03-2012 CN 1942564 A 04-04-2007 EP 1735412 A1 27-12-2006 ES 2383309 T3 20-06-2012 JP 4722913 B2 13-07-2011 JP 2007532757 A 15-11-2007 US 2005230664 A1 20-10-2005 WO 2005116172 A1 08-12-2005

WO 2010107882	A1	23-09-2010	AU 2010226696 A1 06-10-2011 CA 2755447 A1 23-09-2010 CN 102428163 A 25-04-2012 EP 2408884 A1 25-01-2012 SG 174406 A1 28-10-2011 US 2012040876 A1 16-02-2012 WO 2010107882 A1 23-09-2010

EP 2206764	A1	14-07-2010	CA 2688996 A1 23-06-2010 CN 101775328 A 14-07-2010 EP 2206764 A1 14-07-2010 JP 2010150549 A 08-07-2010 SG 162709 A1 29-07-2010 US 2010160195 A1 24-06-2010

WO 2009064604	A1	22-05-2009	CN 101827818 A 08-09-2010 EP 2207769 A1 21-07-2010 JP 2011503079 A 27-01-2011 KR 20100084173 A 23-07-2010 RU 2010124369 A 27-12-2011 US 2009131290 A1 21-05-2009 WO 2009064604 A1 22-05-2009
