



(11)

EP 3 823 090 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.08.2024 Bulletin 2024/34

(21) Application number: **19835085.2**

(22) Date of filing: **11.06.2019**

(51) International Patent Classification (IPC):

H01P 1/208^(2006.01) H01P 1/205^(2006.01)

(52) Cooperative Patent Classification (CPC):

**H01P 1/205; H01P 1/2053; H01P 1/208;
H01P 1/2084**

(86) International application number:

PCT/CN2019/090793

(87) International publication number:

WO 2020/010984 (16.01.2020 Gazette 2020/03)

(54) **CAPACITIVE CROSS-COUPPLING STRUCTURE AND CAVITY FILTER**

KAPAZITIVE KREUZKOPPLUNGSSTRUKTUR UND HOHLRAUMFILTER

STRUCTURE DE COUPLAGE TRANSVERSAL CAPACITIF ET FILTRE À CAVITÉ

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.07.2018 CN 201810768244**

(43) Date of publication of application:

19.05.2021 Bulletin 2021/20

(73) Proprietor: **COMBA TELECOM TECHNOLOGY
(GUANGZHOU) LIMITED**

**Technological Development District
Guangzhou,
Guangdong 510730 (CN)**

(72) Inventors:

- **MENG, Bihui**
Guangzhou, Guangdong 510663 (CN)

• **QI, Jun**

Guangzhou, Guangdong 510663 (CN)

• **XIA, Jinchao**

Guangzhou, Guangdong 510663 (CN)

• **WU, Jingqiang**

Guangzhou, Guangdong 510663 (CN)

(74) Representative: **J A Kemp LLP**

**80 Turnmill Street
London EC1M 5QU (GB)**

(56) References cited:

EP-A1- 1 895 615	EP-A2- 1 321 997
WO-A1-2017/095035	CN-A- 101 527 380
CN-A- 108 649 303	CN-U- 201 877 546
CN-U- 208 298 985	CN-Y- 201 417 813
CN-Y- 201 417 813	US-A1- 2004 108 919

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Field of the Invention**

[0001] The present invention relates to the field of communication technology, in particular, to a cavity filter.

Background

[0002] Generally, the suppression of the filter is improved by adding a coupling structure in the cavity filter. At present, most of the coupling structure of the cavity filter is a "U" shaped structure or a "flying bar with disks at both ends". However, due to the limited space, the "U"-shaped structure is not suitable for the cavity of a resonator with a flange.

[0003] Please refer to FIG. 1, which is a prior art cavity filter. In Fig. 1, a cavity filter with a resonant cavity is taken as an example. A resonator is set inside each resonant cavity. As shown in FIG. 1, a coupling structure 300 is a structure of "a flying bar 400 with coupling discs 500 at both ends". The coupling structure 300 is installed in the cavity filter. For any resonator 200, in order to achieve a strong capacitive cross-coupling, the coupling discs 500 need to be very close to the resonator 200, which causes assembly difficulties. In addition, the coupling amount must be adjusted by adjusting the distance between the resonator 200 and the coupling disc 500. As the coupling disc 500 is very close to the resonator 200, the adjusting distance is limited, so that the adjustable range of the coupling amount between the coupling structure 300 and the resonator 200 is limited, and thus cannot be adapted to many application scenarios.

[0004] Chinese patent publication No. CN201417813Y, titled "Capacitive coupling interaction structure based on coaxial cavity resonator" discloses a capacitive coupling interaction structure based on a coaxial cavity resonator. The capacitive coupling interaction structure comprises a resonator housing, a resonator cover plate and a supporting body fly bar, wherein, the supporting body fly bar is supported in the resonator housing by an insulating medium; one end of a connection conductor is fixed at one end of the supporting body fly bar and electrically connected with the supporting body fly bar; and the other end of the connection conductor is fixed on the resonator cover plate and electrically connected with the resonator cover plate. Another publication WO2017095035A1 titled "Cavity type wireless frequency filter having cross-coupling notch structure" relates to a cavity type wireless frequency filter having a cross-coupling notch structure, the filter comprising a notch substrate provided for cross-coupling between at least two resonance elements among a plurality of resonance elements, wherein the notch substrate comprises: a main substrate, which is made of a non-conductive material and has the first and second coupling structures mechanically coupled with at least two resonance elements, respectively; and a conductive line which is implemented by a conductive pattern formed on the main substrate and transfers a signal of a first resonance element to a second resonance element by using a non-contact coupling method. It is obvious that the current coupling structure makes the cavity filter unable to adapt to many application scenarios.

SUMMARY OF THE INVENTION

[0005] The embodiments of the present invention provide a cavity filter, according to claim 1, which can enhance the coupling amount and increase the adjustable range of the capacitive coupling.

[0006] In a first aspect, the embodiment of the present invention provides a cavity filter as defined in claim 1.

[0007] The capacitive cross-coupling structure includes:

an insulating support base disposed between the first resonator and the second resonator; and
a coupling fly bar disposed on the insulating support base, the coupling fly bar comprising a first coupling part disposed between the first resonator and the insulating support base and a second coupling part disposed between the second resonator and the insulating support base.

[0008] Here, one end of the first coupling part far away from the insulating support base is grounded, and one end of the second coupling part far away from the insulating support base is suspended and spaced apart from the second resonator at an interval.

[0009] In the two coupling parts of the coupling structure of the embodiment of the present invention, the first coupling part is grounded, and the distance between the end of the second coupling part far away from the insulating support base and the second resonator is maintained, so as to realize adjustment of the distance between an end of the second coupling part away from the insulating support base and the second resonator, according to the required coupling amount. As the first coupling part is grounded, even if the distance between the second coupling part and the second resonator is relatively short, the coupling amount between the coupling fly bar and the resonator can be made larger. Compared with the prior art, in the embodiment of the present invention, the coupling structure is adjusted by adjusting the distance between the second coupling part and the second resonator, so that the resulting coupling range between the flying bar

and the resonator is larger, which can be applied to a variety of different application scenarios.

[0010] It also includes a support disposed between the insulating support base and the first resonator, and the end of the first coupling part far away from the insulating support base is disposed on the insulating support base for being grounded.

[0011] The first coupling part is grounded with the first resonator through an intermediate piece, that is, a support piece, in a flexible manner.

[0012] Optionally, the coupling fly bar is detachably disposed on the insulating support base.

[0013] In the embodiment of the present invention, the coupling flying bar is detachably disposed on the insulating support base, then the coupling flying bar can be used in different coupling structures to obtain a variety of coupling structures and have a wider application range.

[0014] Optionally, the interval between the end of the second coupling part far away from the insulating support base and the second resonator is greater than 1mm.

[0015] In the embodiment of the present invention, the interval between the end of the second coupling part far away from the insulating support base and the second resonator is greater than 1mm. This can ensure that the distance between the end of the second coupling part far away from the insulating support base and the second resonator is not too small to adjust the coupling amount. Therefore, when the coupling structures are mass-produced, the coupling consistency of the mass-produced coupling structures can be ensured as much as possible.

[0016] Optionally, the end of the first coupling part far away from the insulating support base is connected to the first resonator for being grounded; or, the end of the first coupling part far away from the insulating support base is connected to a bottom of a cavity defined between the first resonator and the insulating support base for being grounded.

[0017] In the embodiment of the present invention, the first coupling part can be grounded in any one of the above ways, which is relatively flexible.

[0018] Optionally, a coupling disc is provided at the end of the second coupling part far away from the insulating support base.

[0019] In the embodiment of the present invention, when a cavity filter with a coupling structure is used, the distance between the coupling disc and the second resonator can be adjusted, or the diameter of the coupling disc can be adjusted. As a result, the coupling amount between the first coupling part and the first resonator and the coupling amount between the second coupling part and the second resonator are greater than the preset coupling amount, thereby realizing adjustment of the coupling amount in different ways.

[0020] Optionally, the supporting piece and the first resonator are of an integral structure; or, the supporting piece and the first resonator are of a separated structure.

[0021] In the embodiment of the present invention, the supporting piece and the first resonator may be of an integrated structure, which reduces the difficulty of adjustment, ensures the consistency of the production and assembly process, and improves the production efficiency.

[0022] Optionally, the coupling fly bar is plated with a metal material.

[0023] In the embodiment of the present invention, the coupling fly rod may be plated with a metal material to ensure that it has good conductivity as much as possible.

[0024] Optionally it further includes a third resonator and a fourth resonator, wherein a center line between the third resonator and the fourth resonator is perpendicular to a center line between the first resonator and the second resonator.

[0025] In the embodiment of the present invention, the coupling structure can also be applied to a filter with four resonant cavities to realize dual transmission zeros at the low end of the passband. Compared with the existing cavity filter, the coupling structure in the embodiment of the present invention can achieve a larger adjustment range of the coupling amount of the cavity filter, and can meet the existing cavity filter suppression requirements.

[0026] In the two coupling parts of the coupling structure of the embodiment of the present invention, the first coupling part is grounded, and the distance between the end of the second coupling part far away from the insulating support base and the second resonator is maintained, to adjust the distance between the end of the second coupling part away from the insulating support base and the second resonator according to required coupling amount the requirement. Since the first coupling part is grounded, even if the distance between the second coupling part and the second resonator is relatively short, the coupling amount between the coupling fly bar and the resonator can be made larger. Compared with the prior art, in the embodiment of the present invention, the coupling structure is adjusted by adjusting the distance between the second coupling part and the second resonator, and the obtained coupling amount between the flying bar and the resonator has a larger range, and accordingly it can be applied to a variety of different application scenarios.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027]

FIG. 1 is a schematic structural diagram of a cavity filter provided by prior art;

FIG. 2 is a schematic diagram of a structure of a cavity filter provided by an embodiment of the present invention;
 FIG. 3 is a schematic diagram of a structure of a cavity filter provided by an embodiment of the present invention;
 FIG. 4 is a schematic diagram of a prior art cavity filter model;
 FIG. 5 is a schematic diagram of a model of a cavity filter provided in figure 4;
 Fig. 6 is a schematic diagram of a cavity filter; and
 FIG. 7 is a simulation diagram of the coupling amount range of a cavity filter.

DETAILED DESCRIPTION

[0028] In order to make the objectives, technical solutions and advantages of the present invention clearer, the technical solutions in the embodiments of the present invention will be described clearly and completely in conjunction with the accompanying drawings in the embodiments of the present invention.

[0029] At present, a coupling structure 300 of a cavity filter as shown in FIG. 1 is "a flying bar 400 with coupling discs 500 at both ends". It adjusts the coupling amount by adjusting the distance between the resonator 200 and the coupling disc 500. Since the coupling disc 500 is very close to the resonator 200 and the adjustment distance is limited, the adjustable range of the coupling amount between the coupling structure 300 and the resonator 200 is limited, and it cannot be adapted to many application scenarios.

[0030] In view of this, the embodiments of the present invention provide a cavity filter comprising a capacitive cross-coupling structure. Among the two coupling parts of the coupled flying bar of the capacitive cross-coupling structure, the first coupling part is grounded, and one end of the second coupling part away from the insulating support base is separated from the second resonator. This realizes that the distance between the end of the second coupling part away from the insulating support base and the second resonator can be adjusted according to the required coupling amount. Since the first coupling part is grounded, even if the distance between the second coupling part and the second resonator is relatively short, the coupling amount between the coupling fly rod and the resonator can be made larger, that is, the coupling amount of the cavity filter is large. Compared with the prior art, in the embodiment of the present invention, the coupling structure is adjusted by adjusting the distance between the second coupling part and the second resonator, and the obtained coupling amount between the flying bar and the resonator has a larger range, that is, the range of the coupling amount of the cavity filter is larger, so that it can be applied to a variety of different application scenarios.

[0031] Referring to FIG. 2, an embodiment of the present invention comprises a capacitive cross-coupling structure, which is used to couple the energy. Here, the first resonator 101 is in a first resonant cavity 10, and the second resonator 201 is in a second resonant cavity 20. The capacitive cross-coupling structure includes an insulating support base 30 and a coupling flying bar. Here, the insulating support base 30 is arranged between the first resonator 101 and the second resonator 201. The coupling flying bar is arranged on the insulating support base 30, and it includes a first coupling part 301 arranged between the first resonator 201 and the insulating support base 30, and a first coupling part 301 arranged between the second resonator 201 and the insulating support base 30. The second coupling part 302. Here, the first resonator 101 is provided with a first metal tuning screw 102, and the second resonator 201 is provided with a second metal tuning screw 202. The first coupling part 301 is used for coupling with the first resonator 101, and the second coupling part 302 is used for coupling with the second resonator 201.

[0032] It should be noted that, in the embodiment of the present invention, the first coupling part 301 and the second coupling part 302 are not limited, as long as any one of the coupling parts in the coupling structure is grounded, and the distance between the other coupling part and the closer resonator is within a certain range. In the following, the first coupling part 301 is grounded for description.

[0033] In the embodiment of the present invention, the capacitive cross-coupling structure is applied to a cavity filter. When the capacitive cross-coupling structure is installed in the cavity of the cavity filter, the first coupling part 301 is connected to the ground in the cavity filter, the end of the first coupling part 301 away from the insulating support base 30 is grounded. A distance is maintained between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201. It can also be understood that the distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 can be adjusted within a certain range to achieve at least two different coupling amounts.

[0034] In the embodiment of the present invention, when the cavity filter is produced, the initial distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is greater than 1 mm. During production, due to fabrication errors, assembly errors, etc., the initial distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 may be smaller. However, if the distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is small, it is difficult to adjust other resonators by adjusting one or some resonators of the cavity filter, and so, adjustment is more difficult. Therefore, the initial distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is greater than 1 mm, so as to ensure that distance of the end of the second coupling part away from the insulating support base and the second resonator is

not too small, otherwise it is difficult to adjust the coupling amount. In this way, it can be ensured that when the coupling structures are mass-produced, the coupling consistency of the mass-produced coupling structures is better.

[0035] A prior art cavity filter is shown in Fig. 1. To achieve strong capacitive cross-coupling, for any resonator 200, the distance between the coupling disc 500 and the resonator 200 needs to be very close, which leads to limited adjustment distance. As a result, the adjustable range of the coupling amount between the coupling structure 300 and the resonator 200 is limited, and the obtained coupling amount range is also limited. Comparatively, in the embodiment of the present invention, since the first coupling part 301 is grounded, if the coupling amount is to be the same as that in FIG. 1, then, relative to FIG. 1, the distance between the end of the second coupling part 302 far away from the insulating support base and the second resonator 201 will increase, which makes it easier to assemble and improves assembly efficiency. However, if the distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is the same as that between the coupling disc 500 and the resonator 200 shown in FIG. 1, then compared with the coupling amount between the coupling disc 500 and the resonator 200 shown in FIG. 1, in the embodiment of the present invention, the coupling amount between the second coupling part 302 and the second resonator 201 is larger, so that the coupling structure provided by the embodiment of the invention can further expand the range of the coupling amount and apply to more different application scenarios.

[0036] In the embodiment of the present invention, the second coupling part 302 may be provided with a coupling disc 303, and the diameter of the coupling disc 303 may be within a certain range. When using a cavity filter, the distance between the coupling disc 303 and the second resonator 201 can be adjusted, or the diameter of the coupling disc 303 can be adjusted to make the coupling amount between the first coupling part 301 and the first resonator 101 and the coupling amount between the second coupling part 302 and the second resonator 201, are greater than the preset coupling amount, so as to adjust the coupling amount in various ways.

[0037] In the embodiment of the present invention, the first coupling part 301 may be grounded in various ways. In a possible implementation manner, an end of the first coupling part 301 away from the insulating support base 30 may be connected to the first resonator 101 to be grounded. Alternatively, the end of the first coupling part 301 away from the insulating support base 30 may be connected to a bottom of the cavity between the first resonator 201 and the insulating support base 30 to be grounded. Since there is a certain height difference between the bottom of the cavity and the first coupling part 301, and the bottom of the cavity is located between the first coupling part 301 or the first resonator 201 and the insulating support base 30, this makes it difficult to assemble when the first coupling part 301 is connected to the bottom of the cavity. In a possible implementation manner, the first coupling part 301 may be connected to a cover plate of the first resonator 201 to be grounded. Since the cover plate and the first coupling part 301 have a certain height difference, when the first coupling part 301 is connected to the cover plate, there is also a problem of difficulty in assembly.

[0038] In view of this, in the embodiment of the present invention, a support piece 103 is further provided inside the first resonant cavity 10, and the support piece 103 and the first resonator 101 are commonly grounded. In this way, by connecting the first coupling part 301 to the support piece 103, grounding can be achieved. In order to save space and to make the structural components in the cavity filter more stable, the support piece 103 can be fixed on the first resonator 101. If the support piece 103 and the first resonator 101 are of separate structure, the support piece 103 can be adhered to the first resonator 101 by possible fixing methods, for example, glue. Or, in order to be more stable, the support piece 103 and the first resonator 101 may be of an integral structure. The integrated design reduces the difficulty of adjustment and solves the industry's shortcomings, that is, during the adjustment process, due to assembly errors, the first resonator 101 is pulled to adjust the coupling amount. This ensures the consistency of the production assembly process, improves production efficiency, and is suitable for mass production.

[0039] In the embodiment of the present invention, the support piece 103 may be a columnar body adapted to the shape of an outer wall of the first resonator 101, or the support piece 103 may be of a convex structure or other possible support structures. The first coupling part 301 is fixed on the support piece 103 by a threaded connective member 104. If the threaded connective member 104 is made of metal material, the threaded connective member 104 needs to be plated with a certain thickness of metal material to ensure good conductivity. In the embodiment of the present invention, the inside of the first resonant cavity 10, the second resonant cavity 20, the coupling fly rod, etc. may be plated with a certain thickness of metal material, such as gold, silver or copper, to maintain good conductivity as much as possible.

[0040] Referring to FIG. 3, the capacitive cross-coupling structure provided by the embodiment of the present invention can be applied to a cavity filter with four resonant cavities. As shown in FIG. 3, a third resonant cavity 40 includes a third resonator 401, and a fourth resonant cavity 50 includes a fourth resonator 501. A center line of the third resonant cavity 40 and the fourth resonant cavity 50 and is perpendicular to that of the first resonant cavity 10 and the second cavity 20. The coupling structure can be placed in the middle of the four resonators to achieve dual transmission zeros at the low end of the passband. Compared with a prior art cavity filter, the coupling structure in the embodiment of the present invention can achieve a larger adjustment range of the coupling amount of the cavity filter, and can meet the suppression requirements that the prior art cavity filter is difficult to achieve.

[0041] In order to facilitate understanding, the following experimental data illustrates that the coupling structure provided by the embodiment of the present invention makes the adjustment range of the coupling amount of the cavity filter larger.

As shown in FIG. 4, the cavity filter is simulated while keeping the cavity size of the cavity filter and the frequency point of the communication center the same. The simulation result is shown in Fig. 5. As shown in Fig. 6, a cavity filter is simulated, and the simulation results are shown in Fig. 7. The distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is adjusted to obtain the coupling amount of the cavity filter.

Table 1. Data table of the prior art coupling amount and the coupling amount of the embodiment of the present invention

Distance (mm)	Realized frequency band (MHz)	Center frequency (MHz)	Prior art coupling amount	Coupling amount of the embodiment of the present invention	Increase ratio of coupling amount
3	790-862	776	0.00773	0.02835	266.8%
2	790-862	776	0.01030	0.03727	261.8%
1.5	790-862	776	0.01418	0.04382	209.0%
1	790-862	776	0.01933	0.05799	200.0%

[0042] It can be seen from Table 1 that when the distance between the end of the second coupling part 302 away from the insulating support base 30 and the second resonator 201 is the same, the coupling amount of the embodiment of the present invention is at least 2 times greater than the conventional coupling amount. For example, when the distance between the second coupling part 302 and the second resonator 201 is 1mm, the coupling amount in the embodiment of the present invention is 0.05799, while the prior art coupling amount is 0.01933. That is, the coupling amount of the embodiment of the present invention is three times the prior art coupling amount.

[0043] In summary, among the two coupling parts of the coupling structure of the embodiment of the present invention, the first coupling part is grounded, and the end of the second coupling part away from the insulating support base is spaced from the second resonator to realize: adjustment of the distance between the end of the second coupling part away from the insulating support and the second resonator. Since the first coupling part is grounded, even if the distance between the second coupling part and the second resonator is relatively short, the coupling amount between the coupling fly rod and the resonator can be made larger. Compared with the prior art, in the embodiment of the present invention, the coupling structure is adjusted by adjusting the distance between the second coupling part and the second resonator, and the obtained coupling amount between the flying bar and the resonator has a larger variation range, so as to meet the requirements of the coaxial cavity for the coupling amount, achieve different frequency bands and performance and quality assurance requirements, it can be applied to a variety of different application scenarios, and reduces costs.

[0044] Those skilled in the art can clearly understand that for the convenience and conciseness of the description, only the division of the above-mentioned functional modules is used as an example. In actual applications, the above-mentioned functions can be allocated by different functional modules as required, namely the internal structure of the device is divided into different functional modules to complete all or part of the functions described above.

[0045] Obviously, those skilled in the art can make various changes and modifications to the present invention without departing from the scope of the claims.

Claims

1. A cavity filter, comprising: a first resonator (101), a second resonator (201) and a capacitive cross-coupling structure for coupling energy of the first resonator (101) and the second resonator (201), wherein the capacitive cross-coupling structure comprises:

an insulating support base (30) disposed between the first resonator (101) and the second resonator (201); and a coupling fly bar disposed on the insulating support base (30), the coupling fly bar comprising a first coupling part (301) disposed between the first resonator (101) and the insulating support base (30) and a second coupling part (302) disposed between the second resonator (201) and the insulating support base (30);

wherein one end of the first coupling part far away from the insulating support base (30) is grounded, and one end of the second coupling part far away from the insulating support base (30) is suspended and spaced apart from the second resonator (201) at an interval;

further comprising:

a support piece (103) disposed between the insulating support base (30) and the first resonator (101), wherein the end of the first coupling part far away from the insulating support base is disposed on the support piece

(103) for being grounded, **characterized in that** the end of the first coupling part far away from the insulating support base is fixed on the support piece (103) through a threaded connective member (104).

2. The cavity filter of claim 1, **characterized in that** the coupling fly bar is detachably disposed on the insulating support base (30).

3. The cavity filter of claim 1, **characterized in that** the interval between the end of the second coupling part far away from the insulating support base and the second resonator (201) is greater than 1mm.

4. The cavity filter of claim 1, **characterized in that** the end of the first coupling part far away from the insulating support base is connected to the first resonator (101) for being grounded; or the end of the first coupling part far away from the insulating support base is connected to a bottom of a cavity defined between the first resonator (101) and the insulating support base (30) for being grounded.

5. The cavity filter of claim 1, **characterized in that** a coupling disc is provided at the end of the second coupling part far away from the insulating support base .

6. The cavity filter of claim 1, **characterized in that** the coupling fly bar is plated with metal material.

7. The cavity filter of any one of claims 1 to 6, **characterized in** further comprising a cavity, wherein the capacitive cross-coupling structure is provided within the cavity.

8. The cavity filter of claim 1, further comprising:

a third resonator; and
a fourth resonator,

characterized in that a center line between the third resonator and the fourth resonator is perpendicular to a center line between the first resonator and the second resonator.

Patentansprüche

1. Hohlraumfilter, umfassend: einen ersten Resonator (101), einen zweiten Resonator (201) und eine kapazitive Kreuzkopplungsstruktur zum Koppeln der Energie des ersten Resonators (101) und des zweiten Resonators (201), wobei die kapazitive Kreuzkopplungsstruktur umfasst:

eine isolierende Trägerbasis (30), die zwischen dem ersten Resonator (101) und dem zweiten Resonator (201) angeordnet ist, und

eine auf der isolierenden Trägerbasis (30) angeordnete Kopplungsflugstange, wobei die Kopplungsflugstange einen ersten Kopplungsteil (301), der zwischen dem ersten Resonator (101) und der isolierenden Trägerbasis (30) angeordnet ist, und einen zweiten Kopplungsteil (302) umfasst, der zwischen dem zweiten Resonator (201) und der isolierenden Trägerbasis (30) angeordnet ist,

wobei ein Ende des ersten Kopplungsteils, das weit von der isolierenden Trägerbasis (30) entfernt ist, geerdet ist, und ein Ende des zweiten Kopplungsteils, das weit von der isolierenden Trägerbasis (30) entfernt ist, aufgehängt und von dem zweiten Resonator (201) in einem Intervall beabstandet ist, ferner umfassend:

ein Trägerstück (103), das zwischen der isolierenden Trägerbasis (30) und dem ersten Resonator (101) angeordnet ist, wobei das Ende des ersten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, auf dem Trägerstück (103) zum Erden angeordnet ist, **dadurch gekennzeichnet, dass** das Ende des ersten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, auf dem Trägerstück (103) durch ein Gewindeverbindungselement (104) fixiert ist.

2. Hohlraumfilter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Kopplungsflugstange abnehmbar auf der isolierenden Trägerbasis (30) angeordnet ist.

3. Hohlraumfilter nach Anspruch 1, **dadurch gekennzeichnet, dass** das Intervall zwischen dem Ende des zweiten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, und dem zweiten Resonator (201) größer als

1 mm ist.

4. Hohlraumfilter nach Anspruch 1, **dadurch gekennzeichnet, dass** das Ende des ersten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, mit dem ersten Resonator (101) zum Erden verbunden ist, oder
das Ende des ersten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, mit einem Boden eines Hohlraums, der zwischen dem ersten Resonator (101) und der isolierenden Trägerbasis (30) definiert ist, zum Erden verbunden ist.
5. Hohlraumfilter nach Anspruch 1, **dadurch gekennzeichnet, dass** eine Kopplungsscheibe an dem Ende des zweiten Kopplungsteils, das weit von der isolierenden Trägerbasis entfernt ist, bereitgestellt ist.
6. Hohlraumfilter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Kopplungsflugstange mit Metall überzogen ist.
7. Hohlraumfilter nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** es ferner einen Hohlraum umfasst, wobei die kapazitive Kreuzkopplungsstruktur innerhalb des Hohlraums bereitgestellt wird.
8. Hohlraumfilter nach Anspruch 1, ferner umfassend:

einen dritten Resonator, und
einen vierten Resonator,

dadurch gekennzeichnet, dass eine Mittellinie zwischen dem dritten Resonator und dem vierten Resonator senkrecht zu einer Mittellinie zwischen dem ersten Resonator und dem zweiten Resonator verläuft.

Revendications

1. Filtre à cavité, comprenant : un premier résonateur (101), un deuxième résonateur (201) et une structure de couplage croisé capacitif pour coupler l'énergie du premier résonateur (101) et du deuxième résonateur (201).
dans lequel la structure de couplage croisé capacitif comprend :

une base de support isolante (30) disposée entre le premier résonateur (101) et le deuxième résonateur (201) ;
et
une barre volante de couplage disposée sur la base de support isolante (30), la barre volante de couplage comprenant une première partie de couplage (301) disposée entre le premier résonateur (101) et la base de support isolante (30) et une deuxième partie de couplage (302) disposée entre le deuxième résonateur (201) et la base de support isolante (30) ;
dans lequel une extrémité de la première partie de couplage éloignée de la base de support isolante (30) est mise à la terre, et une extrémité de la deuxième partie de couplage éloignée de la base de support isolante (30) est suspendue et espacée du deuxième résonateur (201) à un intervalle ;
comportant en outre :

une pièce de support (103) disposée entre la base de support isolante (30) et le premier résonateur (101), l'extrémité de la première partie de couplage éloignée de la base de support isolante étant disposée sur la pièce de support (103) pour être mise à la terre,
caractérisé en ce que
l'extrémité de la première partie de couplage éloignée de la base de support isolante est fixée sur la pièce de support (103) par l'intermédiaire d'un élément de connexion fileté (104).
2. Filtre à cavité selon la revendication 1, **caractérisé en ce que** la barre volante de couplage est disposée de manière amovible sur la base de support isolante (30).
3. Filtre à cavité selon la revendication 1, **caractérisé en ce que** l'intervalle entre l'extrémité de la deuxième partie de couplage éloignée de la base de support isolante et le second résonateur (201) est supérieur à 1 mm.
4. Filtre à cavité selon la revendication 1, **caractérisé en ce que** l'extrémité de la première partie de couplage éloignée de la base de support isolante est connectée au premier résonateur (101) pour être mise à la terre ; ou l'extrémité de la première partie de couplage éloignée de la base de support isolante est reliée à un fond d'une

cavité définie entre le premier résonateur (101) et la base de support isolante (30) pour être mise à la terre.

5 5. Filtre à cavité selon la revendication 1, **caractérisé en ce qu'**un disque de couplage est prévu à l'extrémité de la deuxième partie de couplage, loin de la base de support isolante.

6. Filtre à cavité selon la revendication 1, **caractérisé en ce que** la barre volante de couplage est plaquée d'un matériau métallique.

10 7. Filtre à cavité selon l'une quelconque des revendications 1 à 6, **caractérisé en ce qu'**il comprend en outre une cavité, dans lequel la structure de couplage croisé capacitif est prévue à l'intérieur de la cavité.

8. Filtre à cavité selon la revendication 1, comprenant en outre :

un troisième résonateur ; et

15 un quatrième résonateur,

caractérisé en ce qu'une ligne centrale entre le troisième résonateur et le quatrième résonateur est perpendiculaire à une ligne centrale entre le premier résonateur et le deuxième résonateur.

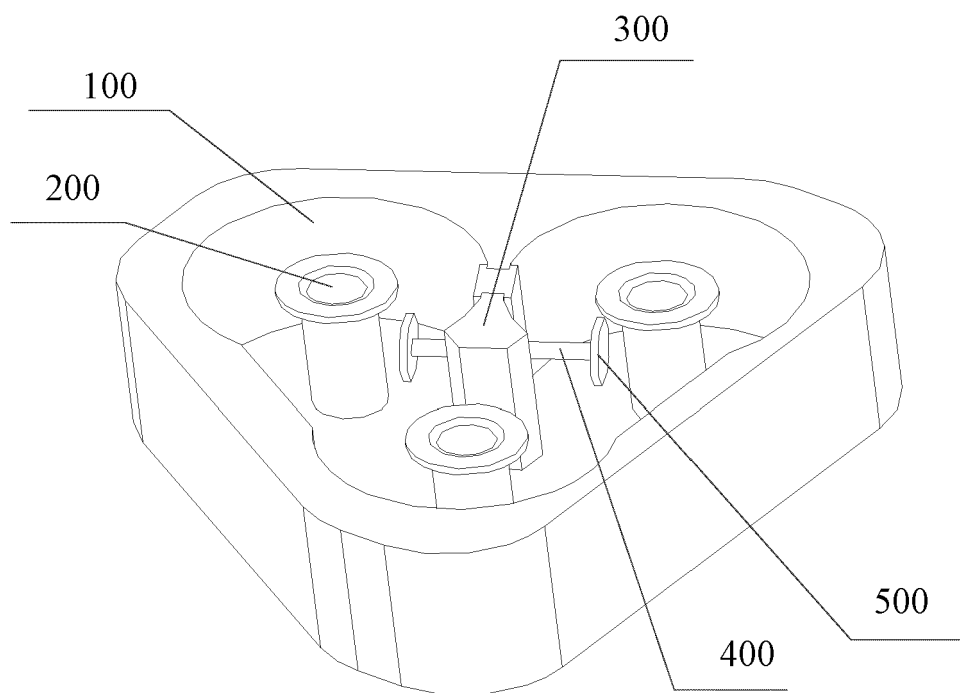


Figure 1

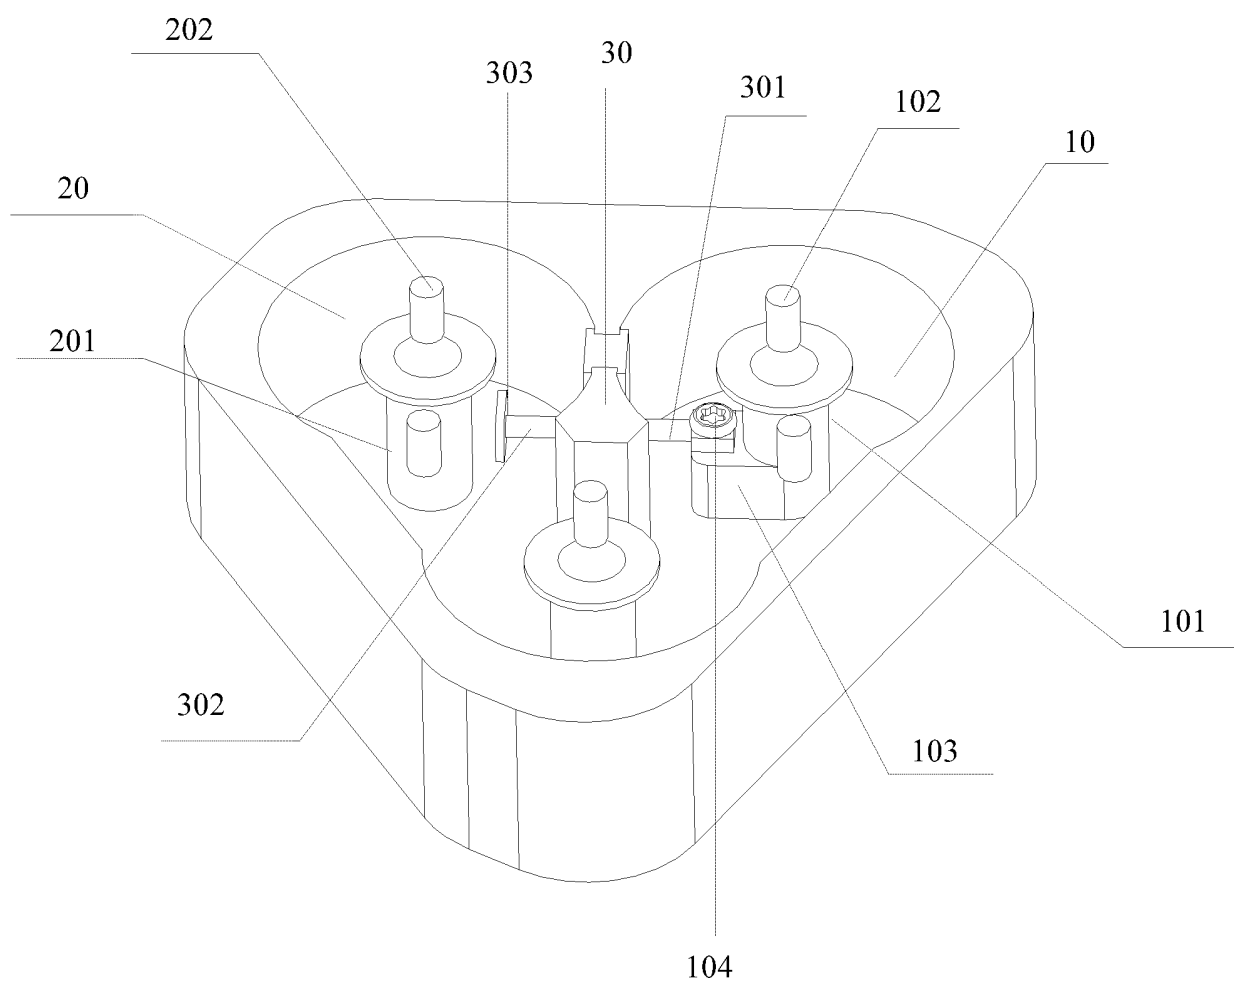


Figure 2

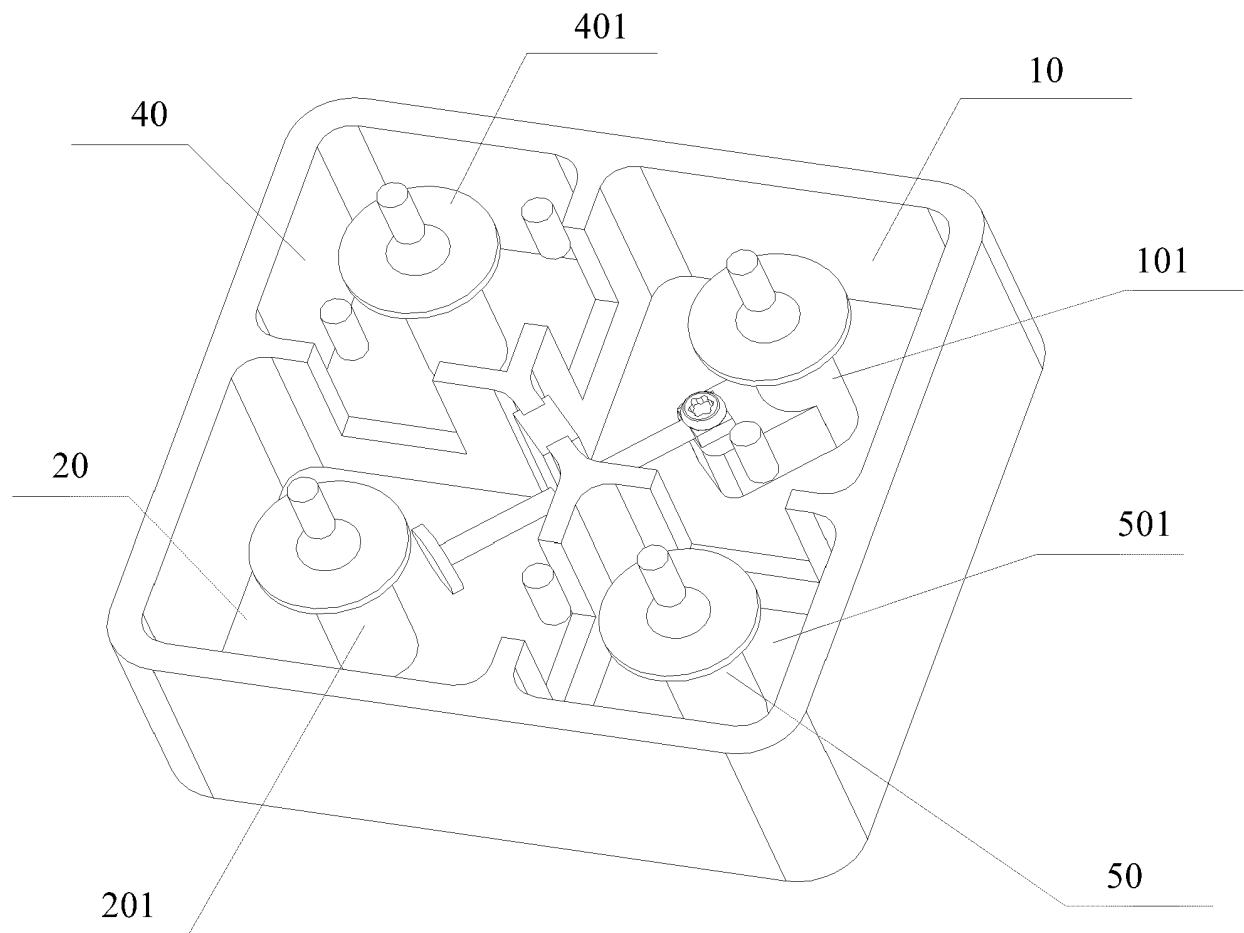


Figure 3

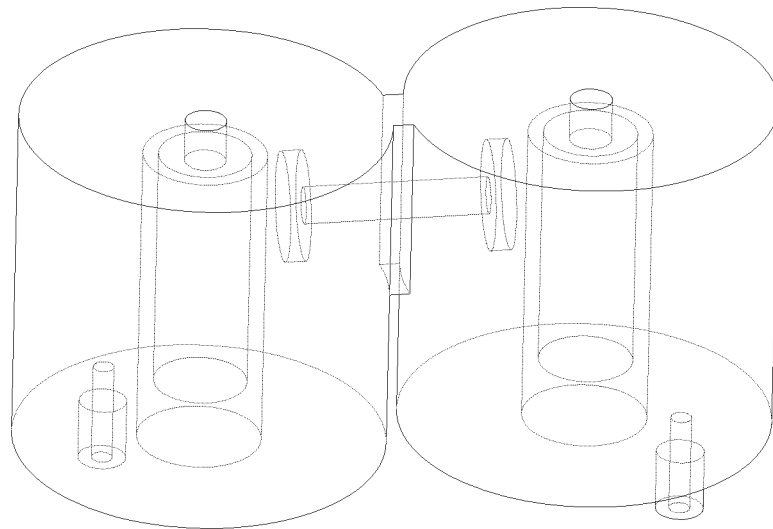


Figure 4

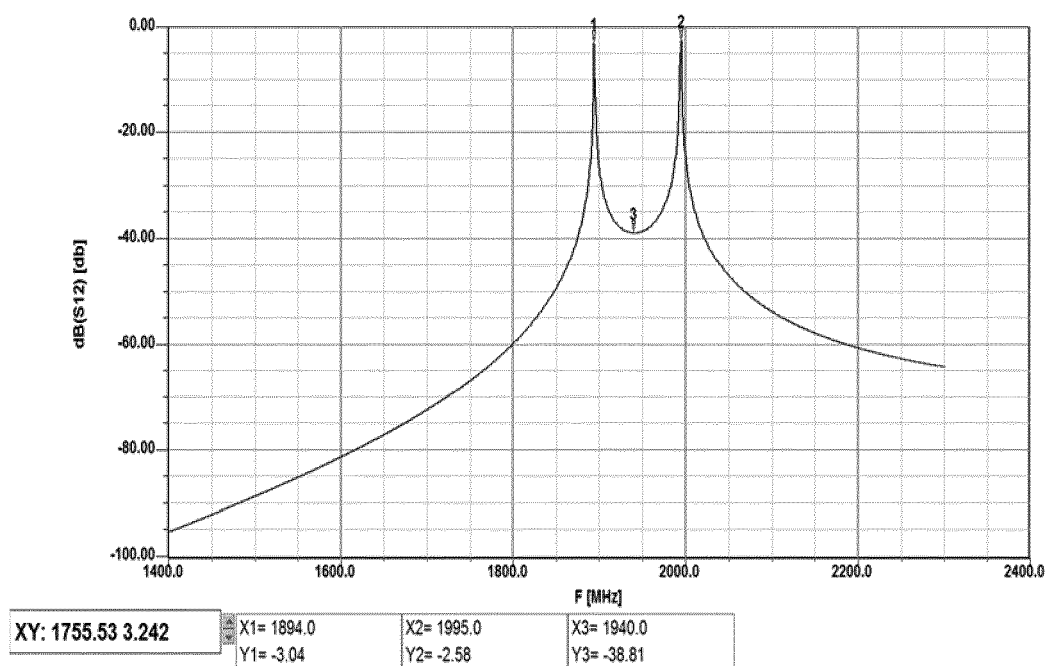


Figure 5

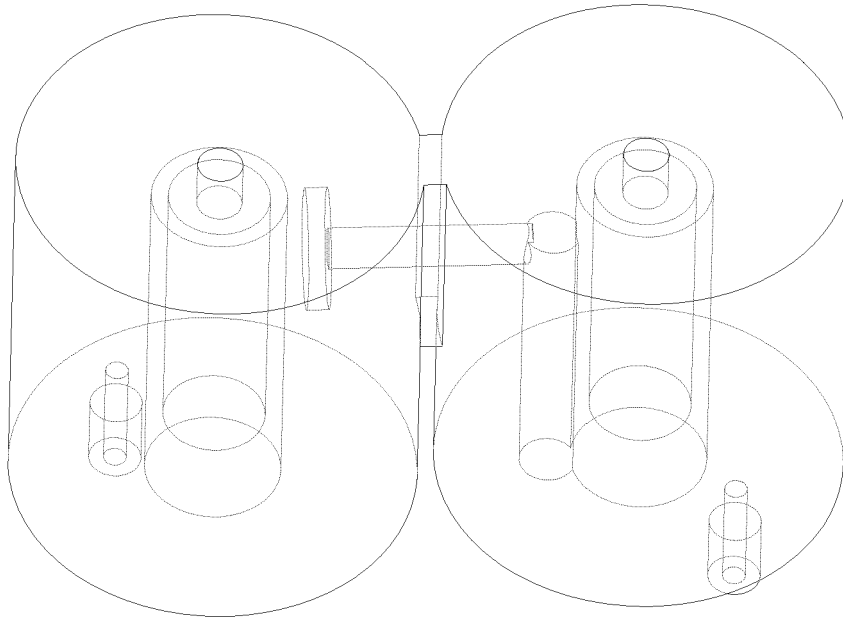


Figure 6

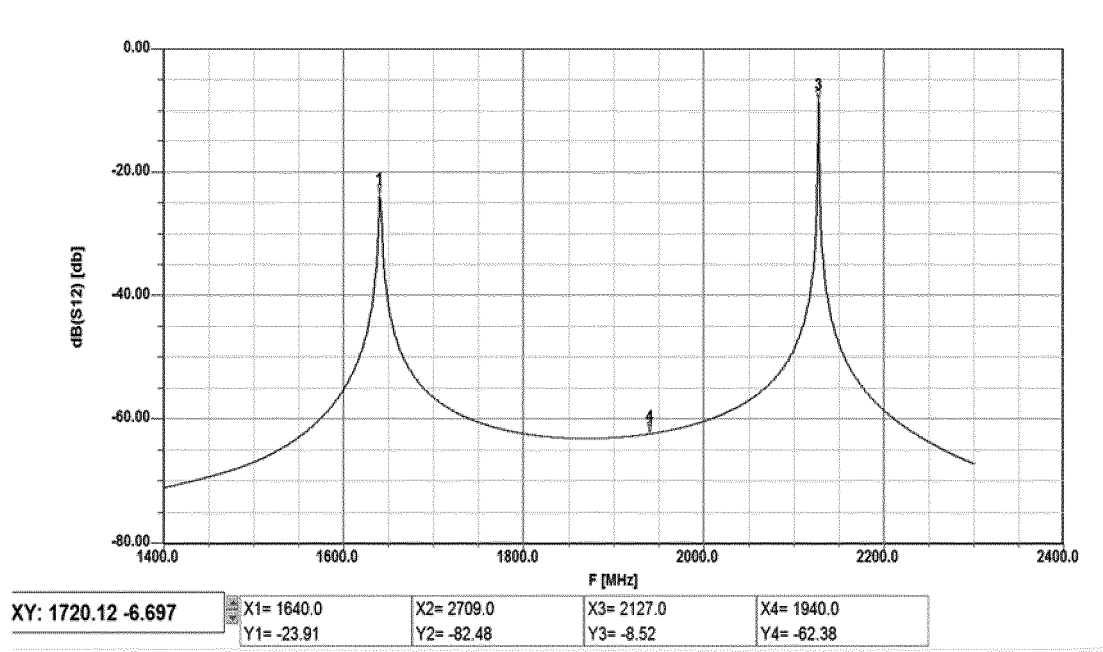


Figure 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201417813 Y [0004]
- WO 2017095035 A1 [0004]