

(86) Date de dépôt PCT/PCT Filing Date: 2003/05/20

(87) Date publication PCT/PCT Publication Date: 2003/12/04

(45) Date de délivrance/Issue Date: 2011/10/11

(85) Entrée phase nationale/National Entry: 2004/11/19

(86) N° demande PCT/PCT Application No.: US 2003/015784

(87) N° publication PCT/PCT Publication No.: 2003/099208

(30) **Priorités/Priorities:** 2002/05/21 (US60/382,226);
2002/05/21 (US60/382,224)

(51) Cl.Int./Int.Cl. *G21G 1/10* (2006.01),
A61K 51/00 (2006.01), *H05H 6/00* (2006.01)


(72) Inventeurs/Inventors:
WIELAND, BRUCE W., US;
WRIGHT, BRUCE C., US

(73) **Propriétaires/Owners:**
DUKE UNIVERSITY, US;
BRUCE TECHNOLOGIES, INC., US

(74) **Agent:** R. WILLIAM WRAY & ASSOCIATES

(54) Titre : CIBLE EN RECIRCULATION ET PROCEDE DE FABRICATION DE NUCLEIDE RADIOACTIF

(54) Title: RECIRCULATING TARGET AND METHOD FOR PRODUCING RADIONUCLIDE

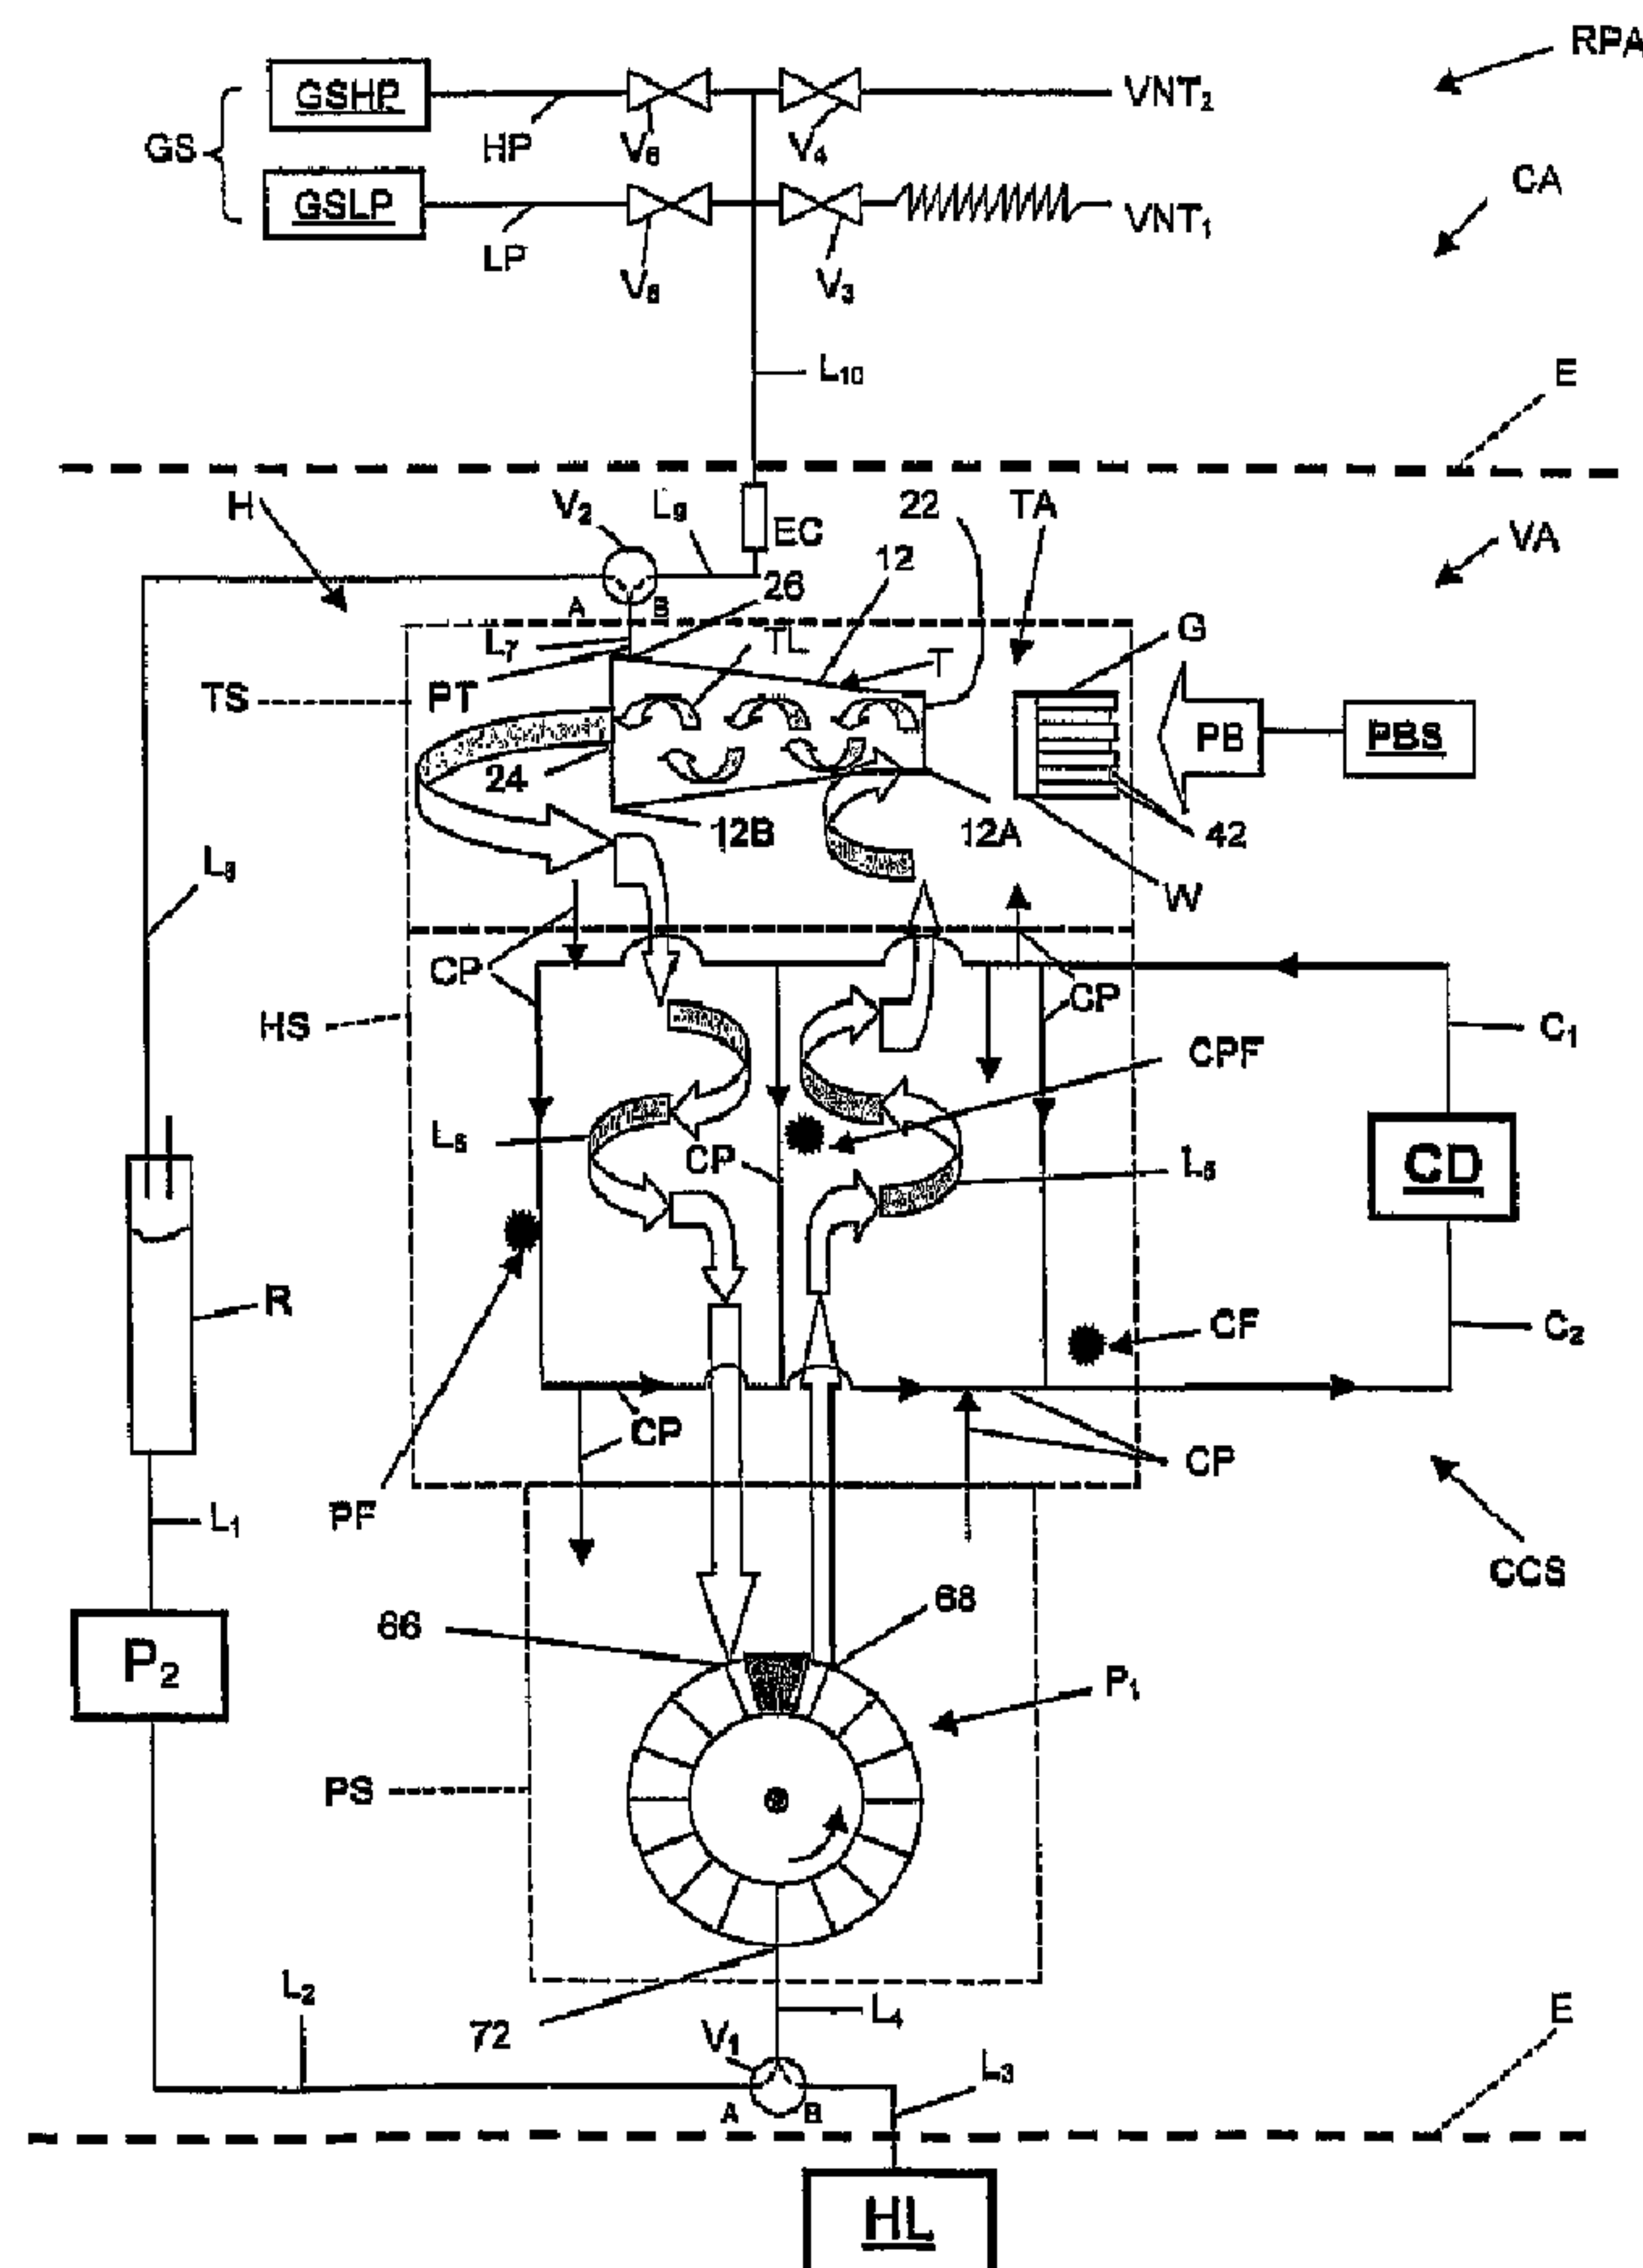

(57) Abrégé/Abstract:

An apparatus for producing a radionuclide includes a target chamber, a particle beam source operatively aligned with the target chamber, and a regenerative turbine pump for circulating a target fluid through the target chamber via first and second liquid

(57) **Abrégé(suite)/Abstract(continued):**

transports. During bombardment of the target liquid in the target chamber by the particle beam source, the target liquid is prevented from reaching vaporization due to the elevated pressure within the target chamber and/or the rapid flow rate through the target chamber. A cooling system can be provided to circulate coolant to the first and second liquid transport conduits, the target chamber and the pump to ensure that the target liquid is cooled upon recirculation back into the target chamber.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/099208 A2

(51) International Patent Classification⁷: **A61K**

(21) International Application Number: PCT/US03/15784

(22) International Filing Date: 20 May 2003 (20.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/382,224 21 May 2002 (21.05.2002) US
60/382,226 21 May 2002 (21.05.2002) US

(71) Applicant (for all designated States except US): **DUKE UNIVERSITY** [US/US]; Office of Science and Technology, P.O. Box 90083, Durham, NC 27708 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WIELAND, Bruce,**

W. [US/US]; 114 Fieldstone Court, Chapel Hill, NC 27514 (US). **WRIGHT, Bruce, C.** [US/US]; 4131 Fillmore Lane, Davenport, IA 52806 (US).


(74) Agent: **JENKINS, Richard, E.**; Jenkins, Wilson & Taylor, P.A., University Tower, Suite 1400, 3100 Tower Boulevard, Durham, NC 27707 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: RECIRCULATING TARGET AND METHOD FOR PRODUCING RADIONUCLIDE

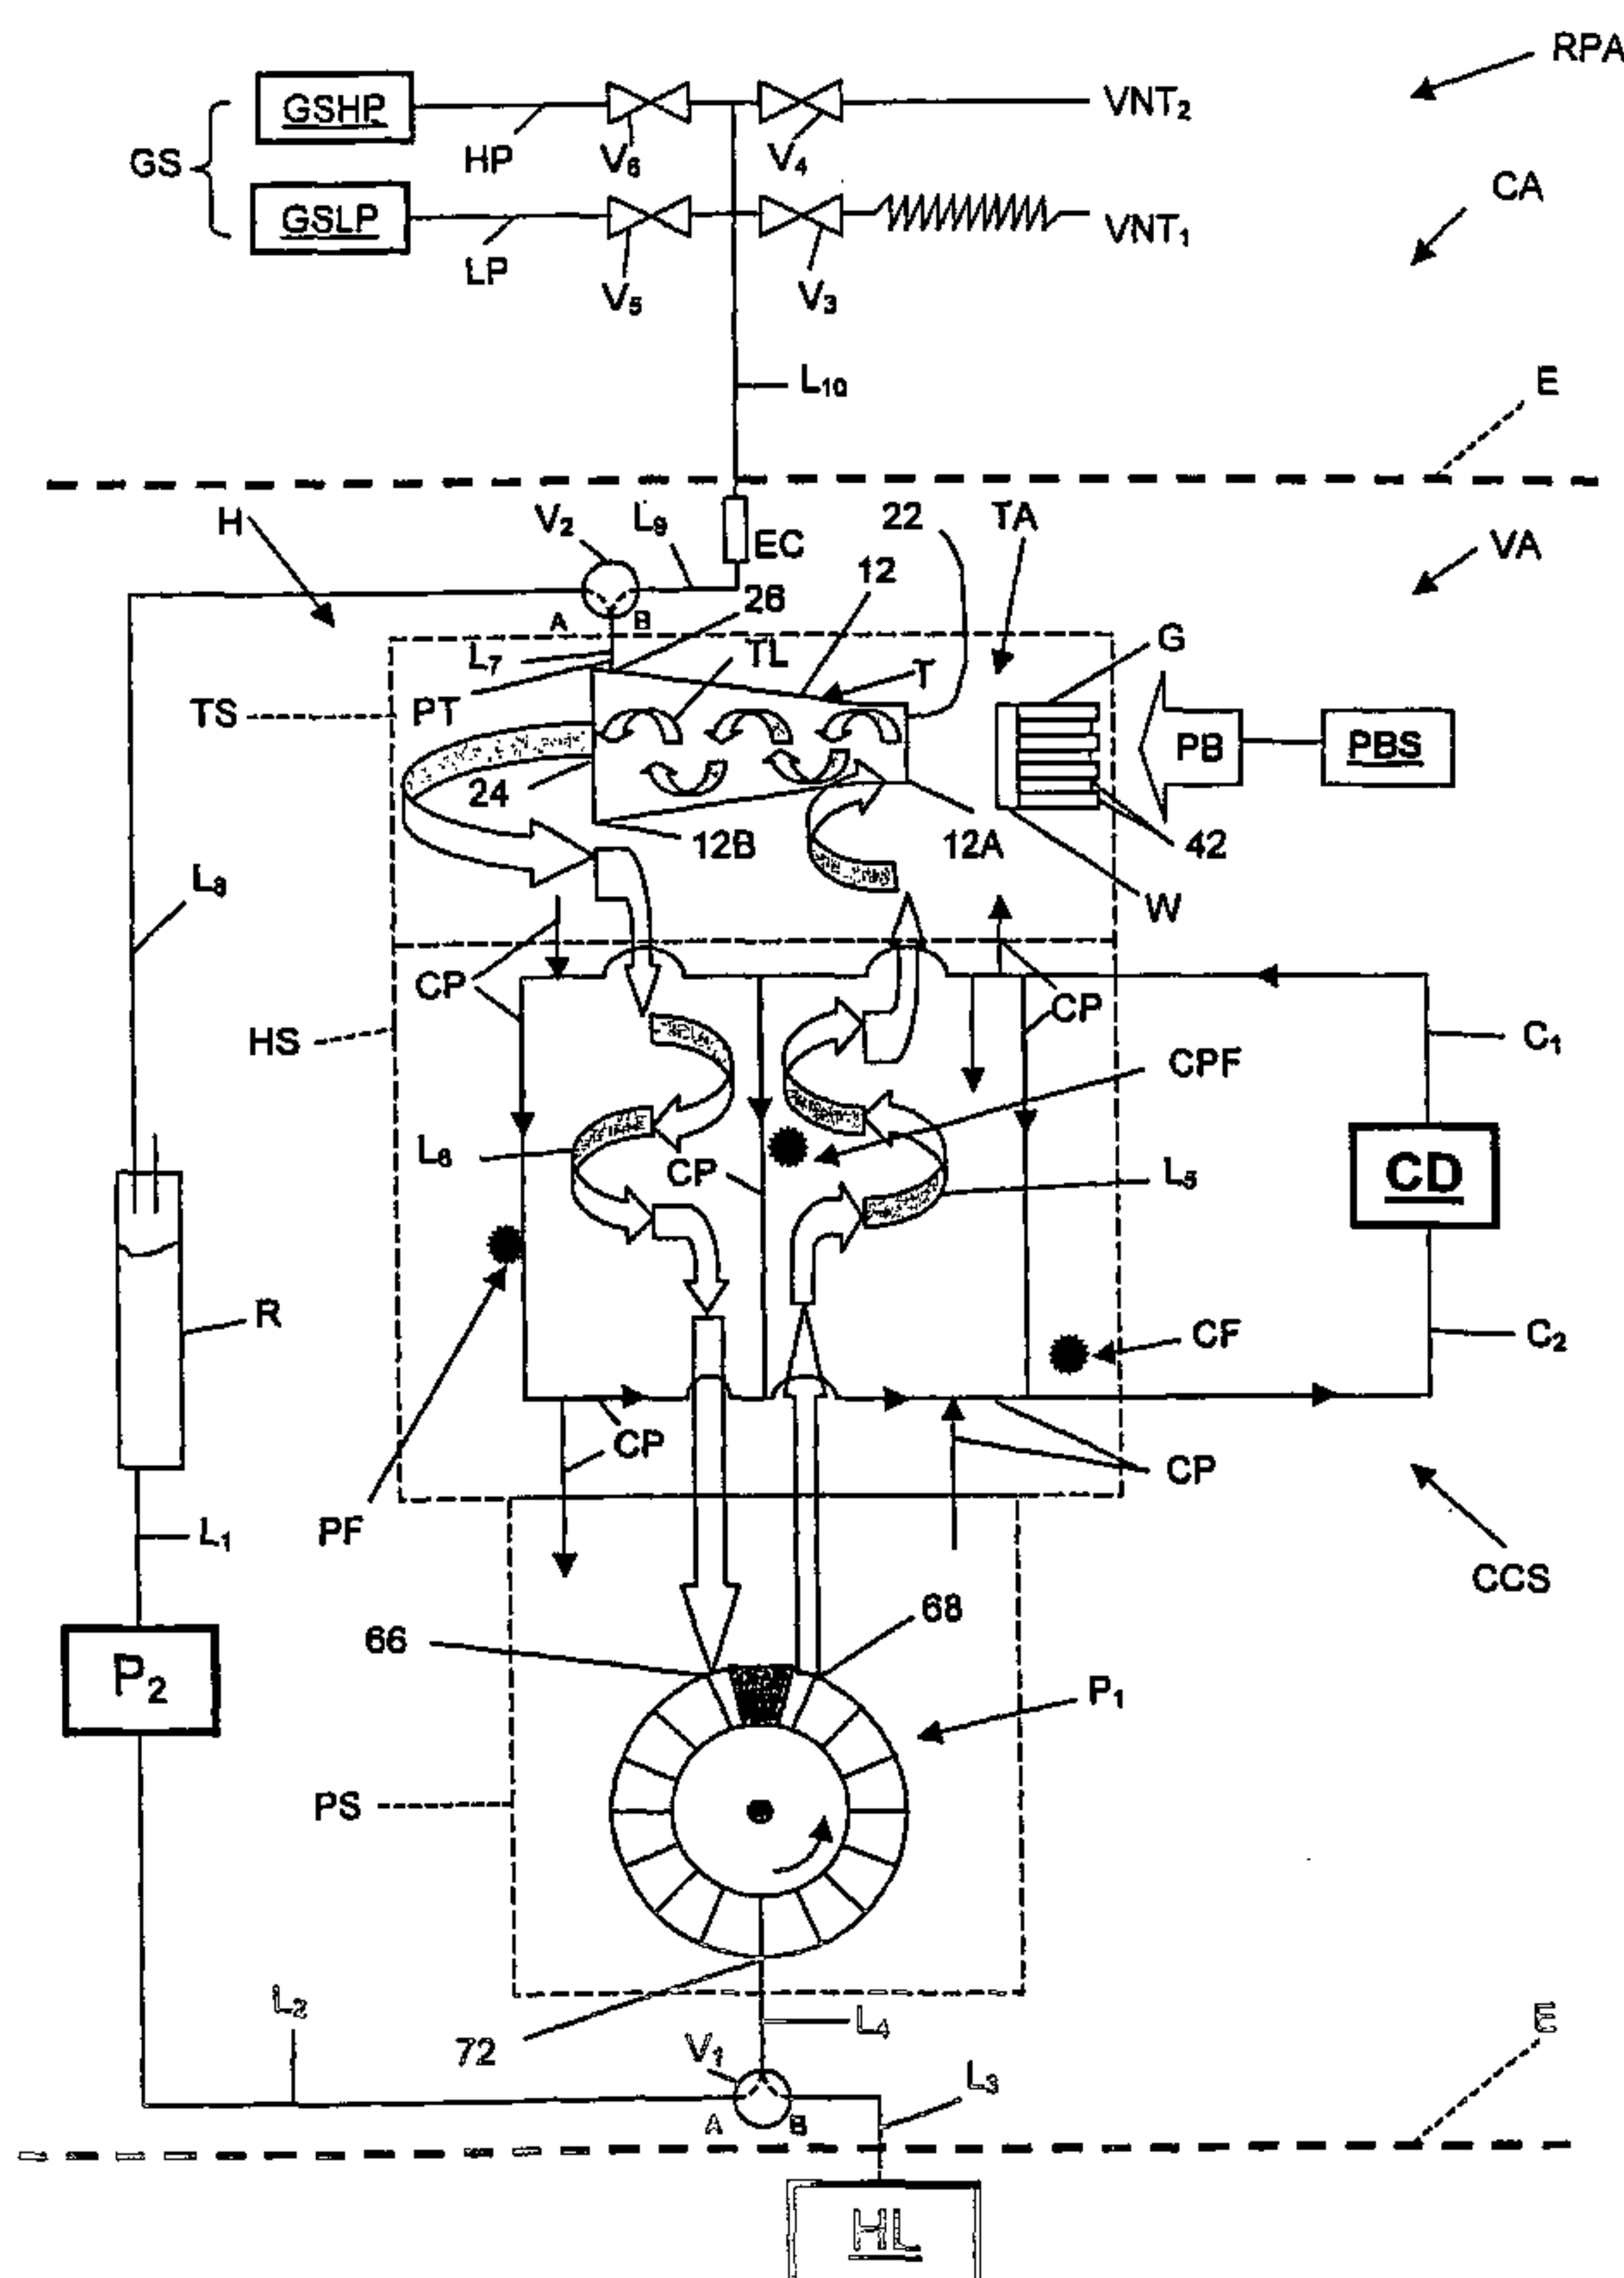

(57) Abstract: An apparatus for producing a radionuclide includes a target chamber, a particle beam source operatively aligned with the target chamber, and a regenerative turbine pump for circulating a target fluid through the target chamber via first and second liquid transports. During bombardment of the target liquid in the target chamber by the particle beam source, the target liquid is prevented from reaching vaporization due to the elevated pressure within the target chamber and/or the rapid flow rate through the target chamber. A cooling system can be provided to circulate coolant to the first and second liquid transport conduits, the target chamber and the pump to ensure that the target liquid is cooled upon recirculation back into the target chamber.

WO 03/099208 A2

WO 03/099208 A2



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

RECIRCULATING TARGET AND METHOD FOR PRODUCING RADIONUCLIDE

5

Technical Field

The present invention relates generally to radionuclide production. More specifically, the invention relates to apparatus and methods for producing a radionuclide such as F-18 by circulating a target fluid through a beam strike target.

Background Art

Radionuclides such as F-18, N-13, O-15, and C-11 can be produced by a variety of techniques and for a variety of purposes. An increasingly important radionuclide is the F-18 (^{18}F) ion, which has a half-life of 109.8 minutes. F-18 is typically produced by operating a cyclotron to proton-bombard stable O-18 enriched water (H_2^{18}O), according to the nuclear reaction $^{18}\text{O}(\text{p},\text{n})^{18}\text{F}$. After bombardment, the F-18 can be recovered from the water. For at least the past two decades, F-18 has been produced for use in the chemical synthesis of the radiopharmaceutical fluorodeoxyglucose (2-fluoro-2-deoxy-D-glucose, or FDG), a radioactive sugar. FDG is used in positron emission tomography (PET) scanning. PET is utilized in nuclear medicine as a metabolic imaging modality employed to diagnose, stage, and restage several cancer types. These cancer types include those for which the Medicare program currently provides reimbursement for treatment thereof, such as lung (non-small cell/SPN), colorectal, melanoma, lymphoma, head and neck (excluding brain and thyroid), esophageal, and breast malignancies. When FDG is administered to a patient, typically by intravenous means, the F-18 label decays through the emission of positrons. The positrons collide with electrons and are annihilated via matter-antimatter interaction to produce gamma rays. A PET scanning device can

- 2 -

detect these gamma rays and generate a diagnostically viable image useful for planning surgery, chemotherapy, or radiotherapy treatment.

It is estimated that the cost to provide a typical FDG dose is about 30% of the cost to perform a PET scan, and the cost to produce F-18 is about 66%
5 of the cost to provide the FDG dose derived therefrom. Thus, according to this estimate, the cyclotron operation represents about 20% of the cost of the PET scan. If the cost of F-18 could be lowered by a factor of two, the cost of PET scans would be reduced by 10%. Considering that about 350,000 PET scans are performed per year, this cost reduction could potentially result in annual
10 savings of tens of millions of dollars. Thus, any improvement in F-18 production techniques that results in greater efficiency or otherwise lowers costs is highly desirable and the subject of ongoing research efforts.

At the present time, about half of the accelerators such as cyclotrons employed in the production of F-18 are located at commercial distribution
15 centers, and the other half are located in hospitals. The full production potential of these accelerators is not realized, at least in part because current target system technology cannot dissipate the heat that would be produced were the full available beam current to be used. About one of every 2,000 protons stopping in the target water produces the desired nuclear reaction, and
20 the rest of the protons simply deposit heat. It is this heat that limits the amount of radioactive product that can be produced in a given amount of time. State-of-the-art target water volumes are typically about 1 - 3 cm³, and can typically handle up to about 500 W of beam power. In a few cases, up to 800 W of beam power have been attained. Commercially available cyclotrons capable of
25 providing 10 – 20 MeV proton beam energy, are actually capable of delivering two or three times the beam power that their respective conventional targets are able to safely dissipate. Future cyclotrons may be capable of four times the power of current machines. It is proposed herein that, in comparison to conventional targets, if target system technology could be developed so as to
30 tolerate increased beam power by a factor of ten to fifteen, the production of F-

- 3 -

18 could be increased by up to an order of magnitude or more, and the above-estimated cost savings would be magnified.

In conventional batch boiling water target systems, a target volume includes a metal window on its front side in alignment with a proton beam source, and typically is filled with target water from the top thereof. The beam power applied to such targets is limited by the fact that above a critical beam power limit, boiling in the target volume will cause a large reduction in density, due to the appearance of a large number of vapor bubbles, which reduces the effective length of the target chamber thus moving the region of highest proton absorption into the chamber's rear wall. As a result, the target structure will receive the higher levels of particles instead of the target fluid, the target structure will be heated and not all of the target fluid will provide radioactive product. To avoid this consequence, it is proposed herein according to at least one embodiment to move the fluid out from the particle beam, at or below the point of vaporization, and conduct the fluid to a heat exchanger to extract the unwanted heat. In this manner, the only limit to the beam power allowed to impinge on the fluid would be the rate of fluid flow through the beam chamber and the ability of the heat exchanger to extract the unwanted entropy.

An opposite approach to reducing the cost of F-18 production is to use a low-energy (8 MeV), high current (100 – 150 mA) proton beam, as disclosed in U.S. Patent No. 5,917,874. A cooled target volume is connected to a top conduit and a bottom conduit. A front side of the target is defined by a thin (6 μm) foil window aligned with the proton beam generated by a cyclotron. The window is supported by a perforated grid for protection against the high pressure and heat resulting from the proton beam. The target volume is sized to enable its entire contents to be irradiated. A sample of O-18 enriched water to be irradiated is injected into the target volume through the top conduit. The resulting F-18 is discharged through the bottom conduit by supplying helium through the top conduit. Such target systems as disclosed in U.S. Patent No. 5,917,874, deliberately designed for use in conjunction with a low-power beam

- 4 -

source, cannot take advantage of the full power available from commercially available high-energy beam sources.

As an alternative approach to the use of batch or static targets in which the target material remains in the target throughout the irradiation step, a
5 recirculating target can be used in which the target liquid carrying the target material is circulated through the target, through a loop, and back into the target. A recirculating target is disclosed in U.S. Patent Application Pub. No. 2003/0007588. The purpose of this design is to remove F-18 continuously by slowly circulating the target fluid through an in-line trap. This avoids
10 contaminating the irradiated fluid by not recovering the fluid in a batch via plastic tubing. In this disclosure, the target system employs a single-piston pump set to a flow rate of 5 ml/min. The liquid outputted from the target is cooled by running it through a coil that is suspended in ambient air, resulting in only a minor amount of heat removal. The cyclotron provided with this system
15 was rated at 16.5 MeV and 75 μ A, meaning that the beam power potentially available was about 1.23 kW. However, in practice the system was operated at only about 0.64 kW. It is believed that this system would not be suitable for beam powers in the range of about 1.5 kW or greater, as the single-piston pump and coil would not prevent the target liquid from boiling above about 0.64
20 kW.

It would therefore be advantageous to provide a recirculative target device and associated radionuclide production apparatus and method that are compatible with the full range of beam power commercially available currently and in the future, and that are characterized by improved efficiencies,
25 performance and radionuclide yield.

Summary of the Invention

According to one embodiment, an apparatus for producing a radionuclide comprises a target chamber, a particle beam source operatively aligned with the target chamber, and a regenerative turbine pump. The target
30 chamber comprises a target inlet port and a target outlet port. The pump

- 5 -

comprises a pump inlet port fluidly communicating with the target outlet port, and a pump outlet port fluidly communicating with the target inlet port.

According to another embodiment, an apparatus for producing a radionuclide comprises a target chamber, a particle beam source, and a pump
5 for circulating target fluid through the target chamber at a flow rate sufficient to prevent vaporization in the target chamber. The target chamber comprises a target inlet port and a target outlet port. The particle beam source is operatively aligned with the target chamber for bombarding target fluid therein with a particle beam at a beam power of approximately 1.0 kW or greater. The
10 pump comprises a pump inlet port fluidly communicating with the target outlet port, and a pump outlet port fluidly communicating with the target inlet port.

According to yet another embodiment, an apparatus for producing a radionuclide comprises a target chamber, a particle beam source operatively aligned with the target chamber, a pump, and first and second liquid transport
15 conduits. The target chamber comprises a target inlet port and a target outlet port. The pump comprises a pump inlet port and a pump outlet port. The first liquid transport conduit is fluidly interposed between the pump outlet port and the target inlet port. The second liquid transport conduit is fluidly interposed between the pump inlet port and the target outlet port.

According to an additional embodiment, a method is provided for producing a radionuclide according to the following steps. A target liquid carrying a target material is circulated through a target chamber by operating a pump. The pump fluidly communicates a target inlet port and a target outlet
20 port of the target chamber. The pump operates at a flow rate sufficient to prevent vaporization of the target liquid in the target chamber. At least a portion of the liquid medium is bombarded with a particle beam aligned with the target chamber, thereby causing the target material to react to form a radionuclide.

It is therefore an object to provide an apparatus and method for
30 producing a radionuclide.

An object having been stated hereinabove, and which is addressed in whole or in part by the present disclosure, other objects will become evident as the description proceeds when taken in connection with the accompanying drawings as best described hereinbelow.

5

Brief Description of the Drawings

Figure 1 is a schematic view of a radionuclide production apparatus provided in accordance with an embodiment disclosed herein;

Figure 2 is a partially cutaway perspective view of a regenerative turbine pump provided with the radionuclide production apparatus of Figure 1; and

10

Figure 3 is a perspective view of an impeller provided with the regenerative turbine pump of Figure 2.

Detailed Description of the Invention

As used herein, the term "target material" means any suitable material with which a target fluid can be enriched to enable transport of the target material, and which, when irradiated by a particle beam, reacts to produce a
15 desired radionuclide. One non-limiting example of a target material is ^{18}O (oxygen-18 or O-18), which can be carried in a target fluid such as water (H_2^{18}O). When O-18 is irradiated by a suitable particle beam such as a proton beam, O-18 reacts to produce the radionuclide ^{18}F (fluorine-18 or F-18)
20 according to the nuclear reaction $\text{O-18}(\text{P},\text{N})\text{F-18}$ or, in equivalent notation, $^{18}\text{O}(\text{p},\text{n})^{18}\text{F}$.

As used herein, the term "target fluid" generally means any suitable flowable medium that can be enriched by, or otherwise be capable of transporting, a target material or a radionuclide. One non-limiting example of a
25 target fluid is water.

As used herein, the term "fluid" generally means any flowable medium such as liquid, gas, vapor, supercritical fluid, or combinations thereof.

As used herein, the term "liquid" can include a liquid medium in which a gas is dissolved and/or a bubble is present.

30

As used herein, the term "vapor" generally means any fluid that can move and expand without restriction except for a physical boundary such as a

- 7 -

surface or wall, and thus can include a gas phase, a gas phase in combination with a liquid phase such as a droplet (e.g., steam), supercritical fluid, or the like.

Referring now to Figure 1, a radionuclide production apparatus or system, generally designated **RPA**, and associated fluid circuitry and other components are schematically illustrated according to an exemplary embodiment. Radionuclide production apparatus **RPA** generally comprises a target section **TS**, a heat exchanging section **HS**, and a pump section **PS**. Target section **TS**, heat exchanging section **HS**, and pump section **PS** are generally enclosed by a housing, generally designated **H**, that can comprise one or more structures suitable for circulating a coolant to various components within housing **H**. In some embodiments, housing **H** integrates target section **TS**, heat exchanging section **HS**, and pump section **PS** together to optimize heat transfer and minimize the total fluid volume of the recirculation loop described hereinbelow.

Target section **TS** includes a target device or assembly, generally designated **TA**, that comprises a target body **12**. Target body **12** in one non-limiting example is constructed from silver. Other suitable non-limiting examples of materials for target body **12** include nickel, titanium, copper, gold, platinum, tantalum, and niobium. Target body **12** defines or has formed in its structure a target chamber, generally designated **T**. Target body **12** further includes a front side **12A** (beam input side); a back side **12B** axially spaced from front side **12A**; a target inlet port **22** fluidly communicating with target chamber **T** and disposed at or near front side **12A**; a target outlet port **24** fluidly communicating with target chamber **T** and disposed at or near back side **12B**; and a target gas port **26** for alternately pressurizing and depressurizing target chamber **T**. As described in more detail hereinbelow, target chamber **T** is designed to contain a suitable target liquid **TL** and enable a suitable target material carried by target liquid **TL** to be irradiated and thereby converted to a desired radionuclide. Target liquid **TL** is conducted through target chamber **T** from target inlet port **22** to target outlet port **24** in a preferred direction that impinges the coolest fluid on target window **W** rather than the hottest fluid.

A particle beam source **PBS** of any suitable design is provided in operational alignment with front side **12A** of target body **12** for directing a particle beam **PB** into target chamber **T**. The particular type of particle beam source **PBS** employed in conjunction with the embodiments disclosed herein will depend on a number of factors, such as the beam power contemplated and the type of radionuclide to be produced. For example, to produce the $^{18}\text{F}^-$ ion according to the nuclear reaction $^{18}\text{O}(\text{p},\text{n})^{18}\text{F}$, a proton beam source is particularly advantageous. Generally, for a beam power ranging up to approximately 1.5 kW (for example, a 100- μA current of protons driven at an energy of 15 MeV), a cyclotron or linear accelerator (LINAC) is typically used for the proton beam source. For a beam power typically ranging from approximately 1.5 kW to 15.0 kW (for example, 0.1 – 1.0 mA of 15 MeV protons), a cyclotron or LINAC adapted for higher power is typically used for the proton beam source. For the embodiments of radionuclide production apparatus **RPA** disclosed herein, a cyclotron or LINAC operating in the range approximately 1.0 kW or greater, and advantageously approximately 1.5 kW or greater and more particularly approximately 1.5 kW to 15.0 kW, is recommended for use as particle beam source **PBS**.

Target assembly **TA** further comprises a target window **W** interposed between particle beam source **PBS** and front side **12A** of target body **12**. Target window **W** can be constructed from any material suitable for transmitting a particle beam **PB** while minimizing loss of beam energy. A non-limiting example is a metal alloy such as the commercially available HAVAR[®] alloy, although other metals such as titanium, tantalum, tungsten, gold, and alloys thereof could be employed. Another purpose of target window **W** is to demarcate and maintain the pressurized environment within target chamber **T** and the vacuum environment through which particle beam **PB** is introduced to target chamber **T**, as understood by persons skilled in the art. The thickness of target window **W** is preferably quite small so as not to degrade beam energy, and thus can range, for example, between approximately 0.3 and 30 μm . In

one exemplary embodiment, the thickness of target window **W** is approximately 25 μm .

In one advantageous embodiment, a window grid **G** is mounted at or proximal to target window **W**. Hence, in this embodiment, particle beam **PB** provided by particle beam source **PBS** is generally aligned with window grid **G**, target window **W** and front side **12A** of target chamber **T**. Window grid **G** is useful in embodiments where target window **W** has a small thickness and therefore is subject to possible buckling or rupture in response to fluid pressure developed within target chamber **T**. Window grid **G** can have any design suitable for adding structural strength to target window **W** and thus preventing structural failure of target window **W**. In one embodiment, window grid **G** is a grid of thin-walled tubular structures adjoined in a pattern so as to afford structural strength while not appreciably interfering with the path of particle beam **PB**. In one advantageous embodiment, window grid **G** can comprise a plurality of hexagonal or honeycomb-shaped tubes **42**. In one embodiment, the depth of window grid **G** along the axial direction of beam travel can range from approximately 1 to approximately 4 mm, and the width between the flats of each hexagonal tube **42** can range from approximately 1 to approximately 4 mm. An example of a hexagonal window grid **G** is disclosed in a co-pending, commonly assigned U.S. Patent Application Serial No. 10/441,818 entitled BATCH TARGET AND METHOD FOR PRODUCING RADIONUCLIDE, filed May 20, 2003, which published on January 01, 2004 as Publication No. US 2004-0000637 A1. In other embodiments, additional strength is not needed for target window **W** and thus window grid **G** is not used.

In one advantageous but non-limiting embodiment, target chamber **T** is tapered such that its cross-section (e.g., diameter) increases from its front side **12A** to back side **12B**, with the diameter of its front side **12A** ranging from approximately 0.5 to approximately 2.0 cm and the diameter of its back side **12B** ranging from approximately 0.7 to approximately 3.0 cm. In one exemplary embodiment, the internal volume provided by target chamber **T** can range from approximately 0.5 to approximately 8.0 cm^3 . In one exemplary embodiment, the depth of target chamber **T** from front side **12A** to back side

- 10 -

12B can range from approximately 0.2 to 1.0 cm. The tapering profile and relatively small internal volume of target chamber **T** assist in synthesizing a desired radionuclide from target liquid **TL** by accommodating multiple scattering of particle beam **PB**. It is desirable to have the smallest volume possible for target chamber **T** in some embodiments, consistent with using all of particle beam **PB** to synthesize the maximum desired radionuclide from target liquid **TL**, in order to minimize the transit time of target liquid **TL** and permit the maximum beam power to be used without target liquid **TL** reaching its vaporization temperature. In other embodiments, the cross-section of target chamber **T** is uniform (i.e., cylindrical).

Heat exchanging section **HS** in one advantageous embodiment cools target liquid **TL** both prior to introduction into target chamber **T** and after discharge therefrom. For this purpose, first and second target liquid transport conduits **L₅** and **L₆**, respectively, are disposed within heat exchanging section **HS**. In one embodiment, first and second target liquid transport conduits **L₅** and **L₆** carry target liquid **TL** to and from pump section **PS** along tortuous paths to maximize heat transfer, as schematically depicted in Figure 1. Each of first and second target liquid transport conduits **L₅** and **L₆** can comprise one or more interconnected conduits or sections of conduits. In advantageous embodiments, the portions of first and second target liquid transport conduits **L₅** and **L₆** within heat exchanging section **HS** should provide tortuous paths, and thus can be serpentine, helical, or otherwise have several directional changes to improve heat transfer as appreciated by persons skilled in the art. As further appreciated by persons skilled in the art, additional means for maximizing heat transfer could be provided, such as cooling fins (not shown) disposed on the outside or inside of first and second target liquid transport conduits **L₅** and **L₆**.

As further shown in Figure 1, radionuclide production apparatus **RPA** includes a coolant circulation device or system, generally designated **CCS**, for transporting any suitable heat transfer medium such as water through various structural sections of target section **TS**, heat exchanging section **HS**, and pump section **PS**. A primary purpose of coolant circulation system **CCS** is to enable

- 11 -

heat energy added to target liquid **TL** in target chamber **T** via particle beam **PB** to be removed from target liquid **TL** via the circulating coolant rapidly enough to prevent vaporization, and to cool down bombarded target liquid **TL** prior to its recirculation back into target chamber **T**. Coolant circulation system **CCS** can
5 have any design suitable for positioning one or more coolant conduits, and thus the coolant moving therethrough, in thermal contact with various structures of target section **TS**, heat exchanging section **HS**, and pump section **PS**. In Figure 1, the coolant conduits are generally represented by a main coolant inlet line **C₁**, a main coolant outlet line **C₂** and various internal coolant passages **CP**
10 running through target section **TS**, heat exchanging section **HS**, and pump section **PS**. The directions of coolant flow are generally represented by the various arrows illustrated with internal coolant passages **CP**. Coolant circulation system **CCS** fluidly communicates via main coolant inlet line **C₁** and main coolant outlet line **C₂** with a cooling device or system **CD** of any suitable
15 design (including, for example, a motor-powered pump, heat exchanger, condenser, evaporator, and the like). Cooling systems based on the circulation of a heat transfer medium as the working fluid are well-known to persons skilled in the art, and thus cooling device **CD** need not be further described herein. In one embodiment, the cooling system typically provided with particle beam
20 source **PBS** can serve or be adapted for use as cooling device **CD** for economical reasons.

It can be seen in Figure 1 from the various lines and arrows depicting the coolant conduits and flow paths that the coolant flows from cooling device **CD** to housing **H** of radionuclide production apparatus **RPA**, circulates through
25 target section **TS**, heat exchanging section **HS**, and pump section **PS** in thermal contact with the various components therein, and then returns to cooling device **CD**. Internal coolant passages **CP** can be provided in any suitable configuration designed to optimize heat transfer at the various points within target section **TS**, heat exchanging section **HS**, and pump section **PS**. In
30 one advantageous embodiment, the system of internal coolant passages **CP** within heat exchanging section **HS** includes a parallel flow region generally

- 12 -

designated **PF**, a counterflow region generally designated **CF**, and a compound flow region generally designated **CPF**. In parallel flow region **PF**, the coolant is primarily in thermal contact with second target liquid transport conduit **L₆** and generally flows in the same resultant direction, i.e., from target section **TS** toward pump section **PS**. The parallel flow in this region is advantageous in that bombarded target liquid **TL** discharged from target chamber **T** at a relatively high temperature—for which the greatest amount of heat transfer is needed—quickly comes into contact with the relatively low-temperature coolant supplied from main coolant inlet line **C₁**. The resulting large temperature gradient results in an excellent rate of heat transfer in parallel flow region **PF**. In counterflow region **CF**, the coolant is primarily in thermal contact with first target liquid transport conduit **L₅** and generally flows in a resultant direction opposite to that of first target liquid transport conduit **L₅**. That is, coolant generally flows from target section **TS** toward pump section **PS** in counterflow region **CF**, while first target liquid transport conduit **L₅** carries liquid from pump section **PS** to target section **TS**. In compound flow region **CPF**, coolant circulates between first and second liquid transport conduits **L₅** and **L₆**, is in thermal contact with both first and second liquid transport conduits **L₅** and **L₆**, and generally includes a flow path counter to first liquid transport conduit **L₅** and parallel with second liquid transport conduit **L₆**.

Pump section **PS** includes any liquid moving means characterized by having a low internal pump volume, a high discharge flow rate, and a high discharge pressure, as well as the ability to pump potentially gassy target liquid **TL** without any structural damage resulting from cavitation within the liquid moving means. Hence, the liquid moving means should be suitable for recirculating target liquid **TL** through target chamber **T** with such a short transit time and high pressure that target liquid **TL** does not reach its vaporization point before exiting target chamber **T**. Moreover, substantially all of the beam heat should be removed from target liquid **TL** before target liquid **TL** is returned to the liquid moving means from target chamber **T**. For these purposes,

- 13 -

advantageous embodiments provide a regenerative turbine pump **P₁** in pump section **PS** as the liquid moving means.

Referring to Figures 2 and 3, regenerative turbine pump **P₁** includes a pump housing **52** defining an internal pump chamber **54** in which an impeller **I** rotates with a pump shaft **56** to which impeller **I** is coaxially mounted. In one advantageous embodiment, pump housing **52** is constructed from silver. Other non-limiting examples of suitable materials for pump housing **52** include nickel-plated copper, titanium, stainless steel, boron bearing stainless steel alloys and other combinations of alloys that bear significant anti-galling characteristics as appreciated by persons skilled in the art. In one advantageous embodiment, impeller **I** is constructed from titanium. Other non-limiting examples of suitable materials for impeller **I** include stainless steel and various steel alloys.

As shown in Figure 3, impeller **I** has a fluted design in which a web **58** extends radially outwardly from a hub **62** and a plurality of impeller vanes or blades **64** are circumferentially spaced around web **58** at the periphery of impeller **I**. As shown in Figure 2, pump shaft **56** and thus impeller **I** are driven by any suitable motor drive **MD** and associated coupling and transmission components as appreciated by persons skilled in the art. Motor drive **MD** can include any suitable motor such as an electric motor or magnetically coupled motor. Pump housing **52** includes a pump suction or inlet port **66** and a pump discharge or outlet port **68**, both fluidly communicating with internal pump chamber **54**. As shown in Figure 1, first target liquid transport conduit **L₅** is interconnected between pump outlet port **68** and target inlet port **22**. Second target liquid transport conduit **L₆** is interconnected between pump inlet port **66** and target outlet port **24**. Accordingly, during operation of radionuclide production apparatus **RPA**, a recirculation loop for target liquid **TL** is defined by regenerative turbine pump **P₁**, first target liquid transport conduit **L₅**, target chamber **T**, and second target liquid transport conduit **L₆**. Regenerative turbine pump **P₁** further comprises a liquid transfer port **72** (Figure 1) for alternately supplying target liquid **TL** enriched with a suitable target material to the system

- 14 -

for processing, or delivering processed target liquid **TL** containing the desired radionuclides from the system.

By way of example, the internal pump volume (i.e., within internal pump chamber **54** of regenerative turbine pump **P₁**) can range from approximately 1 to 5 cm³. Certain embodiments of regenerative turbine pump **P₁** can include, but are not limited to, one or more of the following characteristics: the internal pump volume is approximately 2 cm³, the fluid discharge pressure at or near pump outlet port **68** is approximately 500 psig, the pressure rise between pump inlet port **66** and pump outlet port **68** is approximately 30 psig, fluid flow rate is approximately 2 l/min, and impeller **I** rotates at approximately 5,000 rpm.

In one advantageous embodiment, the use of regenerative turbine pump **P₁** enables target water to be transported through target chamber **T** in less than approximately one millisecond while absorbing several kilowatts of heat from particle beam **PB** without reaching the vaporization point. If the vaporization point is exceeded in a small amount of target liquid **TL** at the end of the particle track, a minimum amount of Bragg peak vapor bubbles will be produced in target chamber **T**. Any surviving Bragg peak vapor bubbles will be quickly swept away and condensed.

Unlike other types of pumps including other types of turbine pumps in which liquid passes through the impeller or other moving boundary only once, target liquid **TL** is exposed to impeller **I** of regenerative turbine pump **P₁** many times prior to being discharged from pump outlet port **68**, with additional energy being imparted to target liquid **TL** each time it passes through impeller blades **64**, thereby allowing substantially more motive force to be added. This characteristic allows for much higher pressures to be achieved in a more compact pump design. In operation, impeller **I** propels target liquid **TL** radially outwardly via centrifugal forces, and the internal surfaces of pump housing **52** defining internal pump chamber **54** conduct target liquid **TL** into twin vortices around impeller blades **64**. A small pressure rise occurs in the vicinity of each impeller blade **64**. Vortices are formed on either side of impeller blades **64**, with their helix axes curved and parallel to the circumference of impeller **I**. The

- 15 -

path followed by the liquid can be explained by envisioning a coiled spring that has been stretched so that the coils no longer touch each other. By forming the stretched spring into a circle and laying it on impeller **I** adjacent to impeller blades **64**, the progression of fluid movement from one impeller blade to another can be envisioned.

Depending on how far the conceptual spring has been stretched (i.e., the distance between coils could be large relative to the coil diameter), the pitch of one loop of the spring may span more than the distance between adjacent impeller blades **64**. As the discharge pressure increases, the pitch of the loops in the helix gets smaller in a manner analogous to compressing the spring. It has been visually confirmed that as the discharge pressure increases, the helical pitch of the fluid becomes shorter. It can thus be appreciated that any vapor bubbles found in the incoming fluid, because of the inertia of the fluid in the vortex, are forced away from the metal walls defining internal pump chamber **54** of regenerative turbine pump **P₁** into the center of the helix (i.e., spring). The pressure increase from pump inlet port **66** to pump outlet port **68** is much lower than for other types of pumps, because the pressure is building continuously around the pumping channel rather than in a single quick passage through pressurizing elements, in this case impeller blades **64**. Consequently, the shock of collapsing bubbles is virtually non-existent, and any bubbles that do collapse impinge on adjacent fluid and not on the metal pump components.

Thus, regenerative turbine pump **P₁** is exceptional in its ability to tolerate cavitation in target liquid **TL** received at pump inlet port **66**. In target chamber **T** during operation, the beam energy input and F-18 conversion (heating vs. F-18 production) rate are not easily controlled, and thus the temperature of target liquid **TL** leaving target chamber **T** can easily allow vaporization to occur. The resulting vapor bubbles can easily be carried through to regenerative turbine pump **P₁** and be present when the compression cycle begins. In other types of pumps, these vapor bubbles would collapse violently, releasing shock waves that would erode the material used in construction of the elements of the pumps that are in contact with the fluid when the collapse occurs. Moreover,

- 16 -

regenerative turbine pump **P₁** generally operates according to a ramped pressure curve that ensures substantially consistent flow to, through, and from target chamber **T**. The features of regenerative turbine pump **P₁** just described, as well as its extremely low internal pump volume according to embodiments disclosed herein, make regenerative turbine pump **P₁** desirable for use with radionuclide production apparatus **RPA**. As a general matter, the merits of regenerative turbine pumps are discussed in Wright, Bruce C., "Regenerative Turbine Pumps: Unsung Heroes For Volatile Fluids", *Chemical Engineering*, p. 116-122 (April 1999).

10 In one advantageous embodiment, the total volume of target water within the system integrated in housing **H** (Figure 1) is approximately 10 cm³ or less.

Referring again to Figure 1, the remaining primary components of radionuclide production apparatus **RPA** will be described. Radionuclide production apparatus **RPA** further comprises an enriched target fluid supply reservoir **R**; an auxiliary pump **P₂** for transporting an initial supply of target liquid **TL** to regenerative turbine pump **P₁** before regenerative turbine pump **P₁** is activated; an expansion chamber **EC** for accommodating thermal expansion of target liquid **TL** during heating by particle beam **PB** during operation of target chamber **T**; and a pressurizing gas supply source **GS** for pressurizing target chamber **T**. Radionuclide production apparatus **RPA** additionally comprises various vents **VNT₁**, and **VNT₂** to atmosphere; valves **V₁ - V₆**; and associated fluid lines **L₁ - L₁₀** as appropriate for the fluid circuitry or plumbing needed to implement the embodiments disclosed herein. A radiation-shielding enclosure **E**, a portion of which is depicted schematically by bold dashed lines in Figure 1, defines a vault area, generally designated **VA**, which houses the potentially radiation-emitting components of radionuclide production apparatus **RPA**. On the other side of enclosure **E** is a console area, generally designated **CA**, in which remaining components as well as appropriate operational control devices (not shown) are situated, and which is safe for users of radionuclide production apparatus **RPA** to occupy during its operation. Also external to vault area **VA** is

- 17 -

a remote, downstream radionuclide collection site or "hot lab" **HL**, for collecting and/or processing the as-produced radionuclides into radiopharmaceutical compounds for PET or other applications.

Enriched target fluid supply reservoir **R** can be any structure suitable for
5 containing a target material carried in a target medium, such as the illustrated syringe-type body. Auxiliary pump **P₂** can be of any suitable design, such as a MICRO π -PETTER[®] precision dispenser available from Fluid Metering, Inc., Syosset, New York. Pressurizing gas supply source **GS** is schematically depicted as including a high-pressure gas supply source **GSHP** and a low-
10 pressure gas supply source **GSLP**. This schematic depiction can be implemented in any suitable manner. For example, a single pressurizing gas supply source **GS** (for example, a tank, compressor, or the like) could be employed in conjunction with an appropriate set of valves and pressure regulators (not shown) to selectively supply high-pressure gas (e.g., 500 psig or
15 thereabouts) in a high-pressure gas line **HP** or low-pressure gas (e.g., 30 psig or thereabouts) in a low-pressure gas line **LP**. For another example, two separate gas sources could be provided to serve as high-pressure gas supply source **GSHP** and a low-pressure gas supply source **GSLP**. The pressurizing gas can be any suitable gas that is inert to the nuclear reaction producing the
20 desired radionuclide. Non-limiting examples of a suitable pressurizing gas include helium, argon, and nitrogen. In the exemplary embodiment illustrated in Figure 1, valves **V₁**, and **V₂** are three-position ball valves actuated by gear motors and are rated at 2500 psig. For each of valves **V₁**, and **V₂**, two ports **A** and **B** are alternately open or closed and the remaining port is blocked. Hence,
25 when both ports **A** and **B** are closed, fluid flow through that particular valve **V₁** or **V₂** is completely blocked. Remaining valves **V₃** - **V₆** are solenoid-actuated valves. Other types of valve devices could be substituted for any of valves **V₁** - **V₆** as appreciated by persons skilled in the art. Fluid lines **L₁** - **L₁₀** are sized as appropriate for the target volume to be processed in target chamber **T**, one
30 example being 1/32 inch I.D. or thereabouts.

- 18 -

The fluid circuitry or plumbing of radionuclide production apparatus **RPA** according to the embodiment illustrated in Figure 1 will now be summarized. Fluid line **L₁** interconnects target material supply reservoir **R** and the inlet side of auxiliary pump **P₂** for conducting target liquid **TL** enriched with the target material. Fluid line **L₂** interconnects the outlet side of auxiliary pump **P₂** and port **A** of valve **V₁** for delivering enriched target liquid **TL** to initially load regenerative turbine pump **P₁**, first and second liquid transport conduits **L₅** and **L₆** and target chamber **T₁**. Fluid line **L₃** is a delivery line for delivering as-produced radionuclides to hot lab **HL** from port **B** of valve **V₁**. In one embodiment, delivery line **L₃** is approximately 100 feet in length. Fluid line **L₄** is a transfer line interconnected between valve **V₁** and liquid transfer port **72**, for alternately supplying enriched target liquid **TL** to the recirculating system or delivering target liquid **TL** carrying the as-produced radionuclides from the system. First target liquid transport conduit **L₅** interconnects pump outlet port **68** and target inlet port **22** and enables target liquid **TL** to be cooled in heat exchanger section **HS** prior to returning to target chamber **T** as described above. Second target liquid transport conduit **L₆** interconnects target outlet port **24** and pump inlet port **66**, and enables target liquid **TL** to be cooled in heat exchanger section **HS** after exiting from target chamber **T** as described above. Fluid line **L₇** interconnects target gas port **26** and valve **V₂**. Fluid line **L₈** interconnects port **A** of valve **V₂** and enriched target fluid supply reservoir **R**, and is primarily used to recirculate enriched target liquid **TL** back to supply reservoir **R** during the loading of the system and thereby sweep away bubbles in the lines. Fluid lines **L₉** and **L₁₀** are connected on either side of expansion chamber **EC**, and interconnect port **B** of valve **V₂** and either gas supply source **GS** or vents **VNT₁** and/or **VNT₂** for alternately conducting pressurizing gas to valve **V₂** or conducting vapors or gases from target chamber **T** to vents **VNT₁** and/or **VNT₂**. Alternatively, a separate expansion or depressurization line (not shown) could be provided for interconnecting expansion chamber **EC** with vent **VNT₂**.

- 19 -

The operation of target assembly **TA** and radionuclide production apparatus **RPA** will now be described, with primary reference being made to Figure 1. In preparation of radionuclide production apparatus **RPA** and its target assembly **TA** for the loading of target chamber **T** and subsequent beam strike, the fluidic system can be vented to atmosphere by opening valve **V**₃ and/or **V**₄ and port **B** of valve **V**₂. Also, a target liquid **TL** enriched with a desired target material is loaded into reservoir **R**, or a pre-loaded reservoir **R** is connected with fluid lines **L**₁ and **L**₈. Port **A** of valve **V**₁ and port **A** of valve **V**₂ are then opened, thereby establishing a closed loop through auxiliary pump **P**₂, valve **V**₁, regenerative turbine pump **P**₁, target chamber **T**, valve **V**₂, and reservoir **R**. Auxiliary pump **P**₂ is then activated, whereupon enriched target liquid **TL** is transported to target chamber **T**, completely filling the recirculation loop comprising regenerative turbine pump **P**₁, first target liquid transport conduit **L**₅, target chamber **T**, and second target liquid transport conduit **L**₆. During the charging of the recirculation loop in this manner, enriched target liquid **TL** is permitted to flow back through valve **V**₂ and reservoir **R**, ensuring that any bubbles in the closed loop are swept away. Once charged in this manner, target chamber **T** is effectively sealed off at the top by closing port **A** of valve **V**₂.

Target chamber **T** is then pressurized by opening valve **V**₆ and delivering a high-pressure gas via high-pressure gas line **HP**, fluid line **L**₁₀, expansion chamber **EC**, fluid line **L**₉, port **B** of valve **V**₂, fluid line **L**₇, and target gas port **26**. A system leak check can then be performed by closing valve **V**₂ and observing a pressure transducer **PT**. Port **A** of valve **V**₁ is then closed and regenerative turbine pump **P**₁ is activated to begin circulating target liquid **TL** through the previously described recirculation loop through target section **TS**, heat exchanger section **HS**, and pump section **PS**. The pressure head applied to target gas port **26** is sufficient to prevent target liquid **TL** from escaping through target gas port **26**, except for any thermal expansion that might occur

- 20 -

due to beam heating of target liquid **TL**. Coolant circulation system **CCS** is also activated to begin circulating coolant as described hereinabove.

At this stage, target chamber **T** is ready to receive particle beam **PB**. Particle beam source **PBS** is then operated to emit a particle beam **PB** through window grid **G** and target window **W** in alignment with front side **12A** of target body **12**. Particle beam **PB** irradiates enriched target liquid **TL** in target chamber **T** and also transfers heat energy to target liquid **TL**. The energy of the particles is sufficient to drive the desired nuclear reaction within target chamber **T**. However, the very short transit time (e.g., approximately 1 ms or less) of target liquid **TL** through target chamber **T** and the high pressure (i.e., raising the boiling point) within target chamber **T** prevents target liquid **TL** from vaporizing, which could be detrimental for beam powers of approximately 1.5 kW or above. Moreover, the operation of coolant circulation system **CCS**, with its system of conduits as described hereinabove, removes heat energy from target liquid **TL** throughout target section **TS**, heat exchanging section **HS**, and pump section **PS**.

The nuclear effect of particle beam **PB** irradiating the enriched target fluid in target chamber **T** is to cause the target material in target liquid **TL** to be converted to a desired radionuclide material in accordance with an appropriate nuclear reaction, the exact nature of which depends on the type of target material and particle beam **PB** selected. Examples of target materials, target fluids, radionuclides, and nuclear reactions are provided hereinbelow. Particle beam **PB** is run long enough to ensure a sufficient or desired amount of radionuclide material has been produced in target chamber **T**, and then is shut off. A system leak check can then be performed at this time.

Once the radionuclides have been produced and particle beam source **PBS** is deactivated, radionuclide production apparatus **RPA** can be taken through pressure equalization and depressurization procedures to gently or slowly depressurize target chamber **T**, first and second liquid transport conduits **L₅** and **L₆**, and regenerative turbine pump **P₁** in preparation for delivery of the radionuclides to hot lab **HL**. These procedures are designed to be gentle or

- 21 -

slow enough to prevent any pressurizing gas that is dissolved in target liquid **TL** from escaping the liquid-phase too rapidly and causing unwanted perturbation of target liquid **TL**. Port **B** of valve **V₂** is left open when particle beam **PB** is turned off. The pressurizing gas is then bled off through expansion chamber **EC** and vents to atmosphere via depressurization line **L₁₀** and restricted vent **VNT₁**. In one advantageous embodiment, depressurization line **L₁₀** has a smaller inside diameter than the other fluid lines in the system, and is relatively long (e.g., 0.010 inch I.D., 100 feet). While port **B** of valve **V₂** remains open, valve **V₃** is closed and valve **V₄** is opened to allow any remaining gas to vent completely to atmosphere via vent **VNT₂**.

After depressurization, port **B** of valve **V₁** is opened to establish fluid communication from regenerative turbine pump **P₁** at its liquid transfer port **72**, through fluid line **L₄**, valve **V₁**, fluid line **L₃**, and an appropriate downstream site such as hot lab **HL**. At this point, a gravity drain into delivery line **L₃** can be initiated. One or more pressurizing steps can then be performed to cause target liquid **TL** and radionuclides carried thereby to be delivered out from the system to hot lab **HL** for collection and/or further processing. For example, valve **V₅** can be opened to use low-pressure gas from pressurizing gas source **GS** over low-pressure gas line **LP** for pushing target liquid **TL** into hot lab **HL**.

After delivery of the as-produced radionuclides is completed, radionuclide production apparatus **RPA** can be switched to a standby mode in which the fluidic system is vented to atmosphere by opening valve **V₃** and/or valve **V₄**. At this stage, reservoir **R** can be replenished with an enriched target fluid or replaced with a new pre-loaded reservoir **R** in preparation for one or more additional production runs. Otherwise, all valves **V₁ - V₆** and other components of radionuclide production apparatus **RPA** can be shut off.

The radionuclide production method just described can be implemented to produce any radionuclide for which use of radionuclide production apparatus **RPA** and its recirculating and/or heat exchanging functions would be beneficial. One example is the production of the radionuclide F-18 from the target material O-18 according to the nuclear reaction O-18(P,N)F-18. Once

- 22 -

produced in target chamber **T**, the F-18 can be transported over delivery line **L₃** to hot lab **HL**, where it is used to synthesize the F-18 labeled radiopharmaceutical fluorodeoxyglucose (FDG). The FDG can then be used in PET scans or other appropriate procedures according to known techniques. It

5 will be understood, however, that radionuclide production apparatus **RPA** could be used to produce other desirable radionuclides. One additional example is ^{13}N produced from natural water according to the nuclear reaction $^{16}\text{O}(\text{p},\alpha)^{13}\text{N}$ or, equivalently, $\text{H}_2^{16}\text{O}(\text{p},\alpha)^{13}\text{NH}_4^+$.

It will be understood that various details of the invention may be

10 changed without departing from the scope of the invention. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation, as the invention is defined by the claims as set forth hereinafter.

CLAIMS:

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An apparatus for producing a radionuclide, comprising:
 - (a) a target chamber comprising a target inlet port and a target outlet port;
 - (b) a particle beam source operatively aligned with the target chamber; and
 - (c) a regenerative turbine pump comprising a pump inlet port fluidly communicating with the target outlet port and a pump outlet port fluidly communicating with the target inlet port.
2. The apparatus according to claim 1 comprising a housing enclosing the target chamber and the pump.
3. The apparatus according to claim 2 comprising a first liquid transport conduit fluidly interconnecting the pump outlet port and the target inlet port, and a second liquid transport conduit fluidly interconnecting the target outlet port and the pump inlet port, wherein the housing encloses the first and second liquid transport conduits.
4. The apparatus according to claim 3 comprising a heat exchanger comprising one or more coolant passages disposed in the housing for circulating a heat transfer medium in thermal contact with the first and second liquid transport conduits.

5. The apparatus according to claim 1 wherein the target chamber has an internal volume ranging from approximately 0.1 to approximately 8.0 cm³.
6. The apparatus according to claim 1 wherein the target chamber has a front side in operative alignment with the particle beam source and a back side axially spaced from the front side, the target inlet port is disposed closer to the front side than to the back side, and the target outlet port is disposed closer to the back side than to the front side.
7. The apparatus according to claim 6 comprising a particle-transmitting window adjacent to the front side of the target chamber, wherein the particle beam source is operatively aligned with the window.
8. The apparatus according to claim 7 wherein the window is constructed from a material suitable for transmitting protons.
9. The apparatus according to claim 8 wherein the window has a metal-containing composition.
10. The apparatus according to claim 1 wherein the particle beam source comprises a proton beam source.

- 25 -

11. The apparatus according to claim 1 wherein the beam source comprises a cyclotron.
12. The apparatus according to claim 1 wherein the beam source comprises a linear accelerator.
13. The apparatus according to claim 1 wherein the particle beam source is configured to provide a beam power of approximately 1.0 kW or greater.
14. The apparatus according to claim 1 wherein the particle beam source is configured to provide a beam power of approximately 1.5 kW or greater.
15. The apparatus according to claim 1 wherein the particle beam source is configured to provide a beam power ranging from approximately 1.5 kW to approximately 15 kW.
16. The apparatus according to claim 1 comprising a liquid transfer conduit fluidly communicating with the pump.
17. The apparatus according to claim 16 comprising a target liquid supply source selectively fluidly communicating with the transfer conduit.

- 26 -

18. The apparatus according to claim 17 wherein the target liquid supply source comprises an oxygen-18 enriched water source.
19. The apparatus according to claim 16 comprising a radionuclide delivery conduit selectively fluidly communicating with the transfer conduit.
20. An apparatus for producing a radionuclide, comprising:
 - (a) a target chamber comprising a target inlet port and a target outlet port;
 - (b) a particle beam source operatively aligned with the target chamber for bombarding a target fluid therein with a particle beam at a beam power of approximately 1.0 kW or greater; and
 - (c) a regenerative turbine pump for circulating the target fluid through the target chamber at a flow rate sufficient to prevent vaporization in the target chamber, the pump comprising a pump inlet port fluidly communicating with the target outlet port and a pump outlet port fluidly communicating with the target inlet port.
21. The apparatus according to claim 20 wherein the pump comprises a fluted impeller.
22. An apparatus for producing a radionuclide, comprising:
 - (a) a target chamber comprising a target inlet port and a target outlet port;
 - (b) a particle beam source operatively aligned with the target chamber;

- 27 -

- (c) a regenerative turbine pump comprising a pump inlet port and a pump outlet port;
 - (d) a first liquid transport conduit fluidly interposed between the pump outlet port and the target inlet port;
 - (e) a second liquid transport conduit fluidly interposed between the pump inlet port and the target outlet port; and
 - (f) a cooling assembly disposed in thermal contact with the first liquid transport conduit.
23. The apparatus according to claim 22 wherein the cooling assembly is disposed in thermal contact with the second liquid transport conduit.
24. The apparatus according to claim 23 wherein the cooling assembly comprises one or more coolant passages in thermal contact with the second liquid transport conduit in a parallel-flow arrangement, in which a target liquid flow in the second liquid transport conduit and a coolant flow in the one or more coolant passages are generally directed in the same direction away from the target chamber.
25. The apparatus according to claim 24 wherein the one or more coolant passages in thermal contact with the second liquid transport conduit are one or more first coolant passages, and the cooling assembly comprises one or more second coolant passages in thermal contact with the first liquid transport conduit in a counterflow arrangement in which a target liquid flow in the first liquid transport conduit is

generally directed toward the target chamber from the pump and a coolant flow in the one or more coolant passages is generally directed away from the target chamber.

26. The apparatus according to claim 22 wherein the cooling assembly is disposed in thermal contact with the target chamber.
27. The apparatus according to claim 22 wherein the cooling assembly is disposed in thermal contact with the pump.
28. A method for producing a radionuclide, comprising the steps of:
 - (a) applying a particle beam to a target chamber to irradiate a target material provided with a target liquid in the target chamber to produce a radionuclide, the target chamber disposed externally to a source of the particle beam;
 - (b) while applying the particle beam, circulating the target liquid through the target chamber by operating a regenerative turbine pump fluidly communicating with the target chamber at a flow rate sufficient to prevent vaporization of the target liquid in the target chamber; and
 - (c) removing heat from the target liquid while the target liquid is circulating outside the target chamber.

29. The method according to claim 28 wherein circulating the target liquid comprises circulating water.
30. The method according to claim 29 wherein circulating the target liquid comprises circulating water enriched with oxygen-18, and wherein applying the particle beam causes oxygen-18 to react to form fluorine-18.
31. The method according to claim 28 wherein the target chamber comprises a target inlet port and a target outlet port, and the target liquid flows from the target inlet port, through the target chamber, and to the target outlet port in a transit time of approximately one millisecond or less.
32. The method according to claim 28 wherein removing heat from the target liquid comprises removing heat from the target liquid after the target liquid exits the target chamber and before the target liquid enters the pump.
33. The method according to claim 32 wherein removing heat from the target liquid comprises removing heat from the target liquid after the target liquid exits the pump and before the target liquid enters the target chamber.
34. The method according to claim 28 wherein applying the particle beam comprises operating a proton beam source.

35. The method according to claim 28 wherein the particle beam source is operated at a beam power of approximately 1.0 kW or greater.
36. The method according to claim 28 wherein the particle beam source is operated at a beam power of approximately 1.5 kW or greater.
37. The apparatus according to claim 1 comprising a first liquid transport conduit interconnecting the pump outlet port and the target inlet port, a second liquid transport conduit interconnecting the target outlet port and the pump inlet port, and a heat exchanger comprising at least a first passage for circulating a heat transfer medium in thermal contact with the second liquid transport conduit.
38. The apparatus according to claim 37 wherein the heat exchanger comprises at least a second passage for circulating a heat transfer medium in thermal contact with the first liquid transport conduit.
39. The apparatus according to claim 38 comprising a housing enclosing at least respective portions of the first and second liquid transport conduits and at least respective portions of the first and second passages.
40. The apparatus according to claim 39 wherein the housing encloses the pump.

41. The apparatus according to claim 40 wherein the heat exchanger comprises at least a third passage for circulating a heat transfer medium in thermal contact with the pump, and the housing encloses at least a portion of the third passage.
42. The apparatus according to claim 1 wherein the pump has an internal volume ranging from approximately 1 to approximately 5 cm³.
43. The apparatus according to claim 1 wherein the pump comprises a pump housing constructed from a metal.
44. The apparatus according to claim 43 wherein the metal is selected from the group consisting of silver, copper, titanium, stainless steel, alloys of these, and combinations thereof.
45. The apparatus according to claim 1 wherein the pump comprises an impeller constructed from a metal.
46. The apparatus according to claim 45 wherein the metal is selected from the group consisting of titanium, stainless steel, alloys of these, and combinations thereof.
47. The apparatus according to claim 6 wherein the target chamber has an internal volume, and a cross-section of the internal volume is smaller at the front side of the target chamber than at the back side thereof.

48. The apparatus according to claim 6 wherein the target chamber has an internal volume, and a cross-section of the internal volume generally tapers from the back side of the target chamber to the front side thereof.
49. The apparatus according to claim 7 wherein the front side is configured for receiving a particle beam from the particle beam source, and the target chamber has a depth from the front side to the back side ranging from approximately 0.2 to approximately 1.0 cm.
50. The apparatus according to claim 7 wherein the window has a thickness ranging from approximately 0.3 to approximately 30 μm .
51. The apparatus according to claim 7 comprising a window grid interposed between the front side of the target chamber and a beam-outlet side of the particle beam source, wherein the particle beam source is operatively aligned with the window grid.
52. The apparatus according to claim 22 wherein the cooling assembly comprises one or more coolant passages in thermal contact with the first liquid transport conduit in a counterflow arrangement in which a target liquid flow in the first liquid transport conduit is generally directed toward the target chamber from the pump

and a coolant flow in the one or more coolant passages is generally directed away from the target chamber.

53. The apparatus according to claim 22 wherein the cooling assembly comprises a plurality of coolant passages including at least one first coolant passage in thermal contact with the first liquid transport conduit and at least one second coolant passage in thermal contact with the second liquid transport conduit.
54. The apparatus according to claim 53 comprising a housing, wherein the first and second coolant passages are disposed in the housing.
55. The apparatus according to claim 54 wherein the housing encloses the pump.
56. The apparatus according to claim 22 wherein the particle beam source is configured to provide a beam power of approximately 1.0 kW or greater.
57. An apparatus for producing a radionuclide, comprising:
 - (a) a proton beam source configured to provide a beam power of approximately 1.5 kW or greater;
 - (b) a target chamber for receiving a particle beam from the particle beam source; and
 - (c) a regenerative turbine pump communicating with the target chamber for circulating a target fluid through the target chamber.

58. The apparatus according to claim 57 comprising a coolant circulation system for bringing a coolant into thermal contact with the target fluid at a location outside of the target chamber.
59. The apparatus according to claim 57 comprising a first target fluid conduit interconnecting the pump and the target chamber for conducting the target fluid to the target chamber, and a second target fluid conduit interconnecting the target chamber and the pump for conducting the target fluid to the pump, wherein the coolant circulation system is in thermal contact with the first target fluid conduit.
60. The apparatus according to claim 57 comprising a first target fluid conduit interconnecting the pump and the target chamber for conducting the target fluid to the target chamber, and a second target fluid conduit interconnecting the target chamber and the pump for conducting the target fluid to the pump, wherein the coolant circulation system is in thermal contact with the second target fluid conduit.

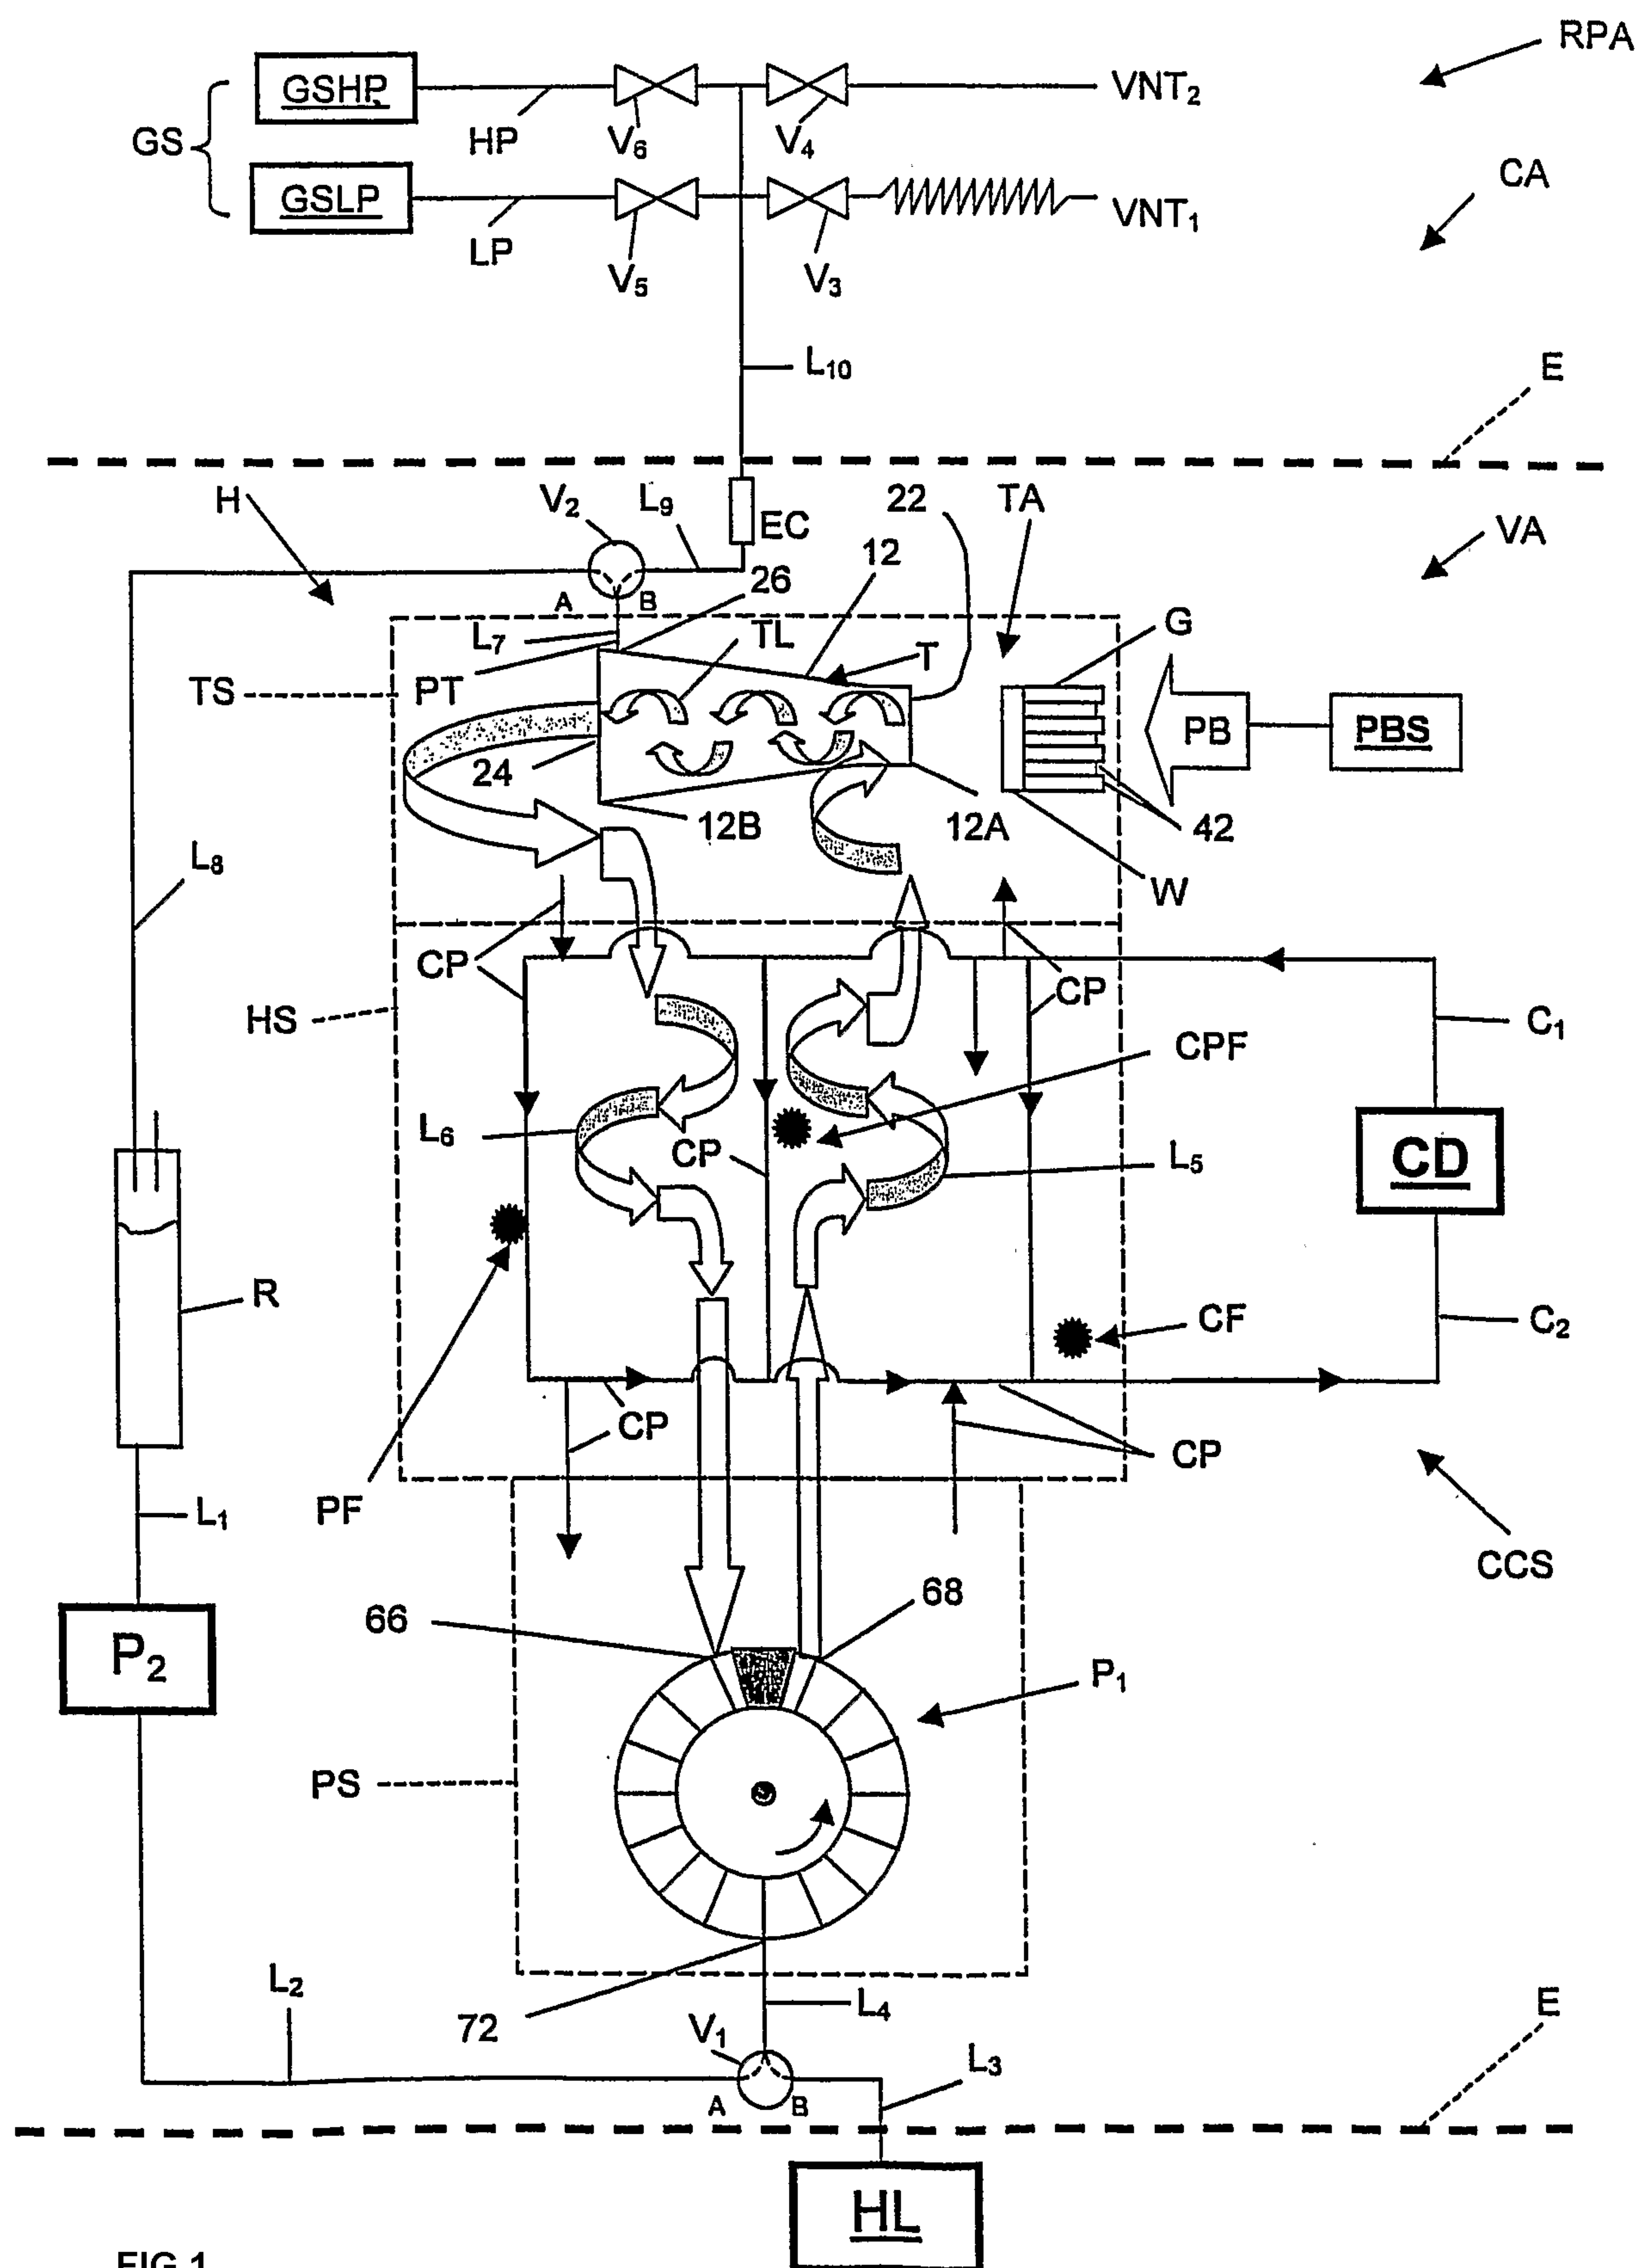


FIG.1

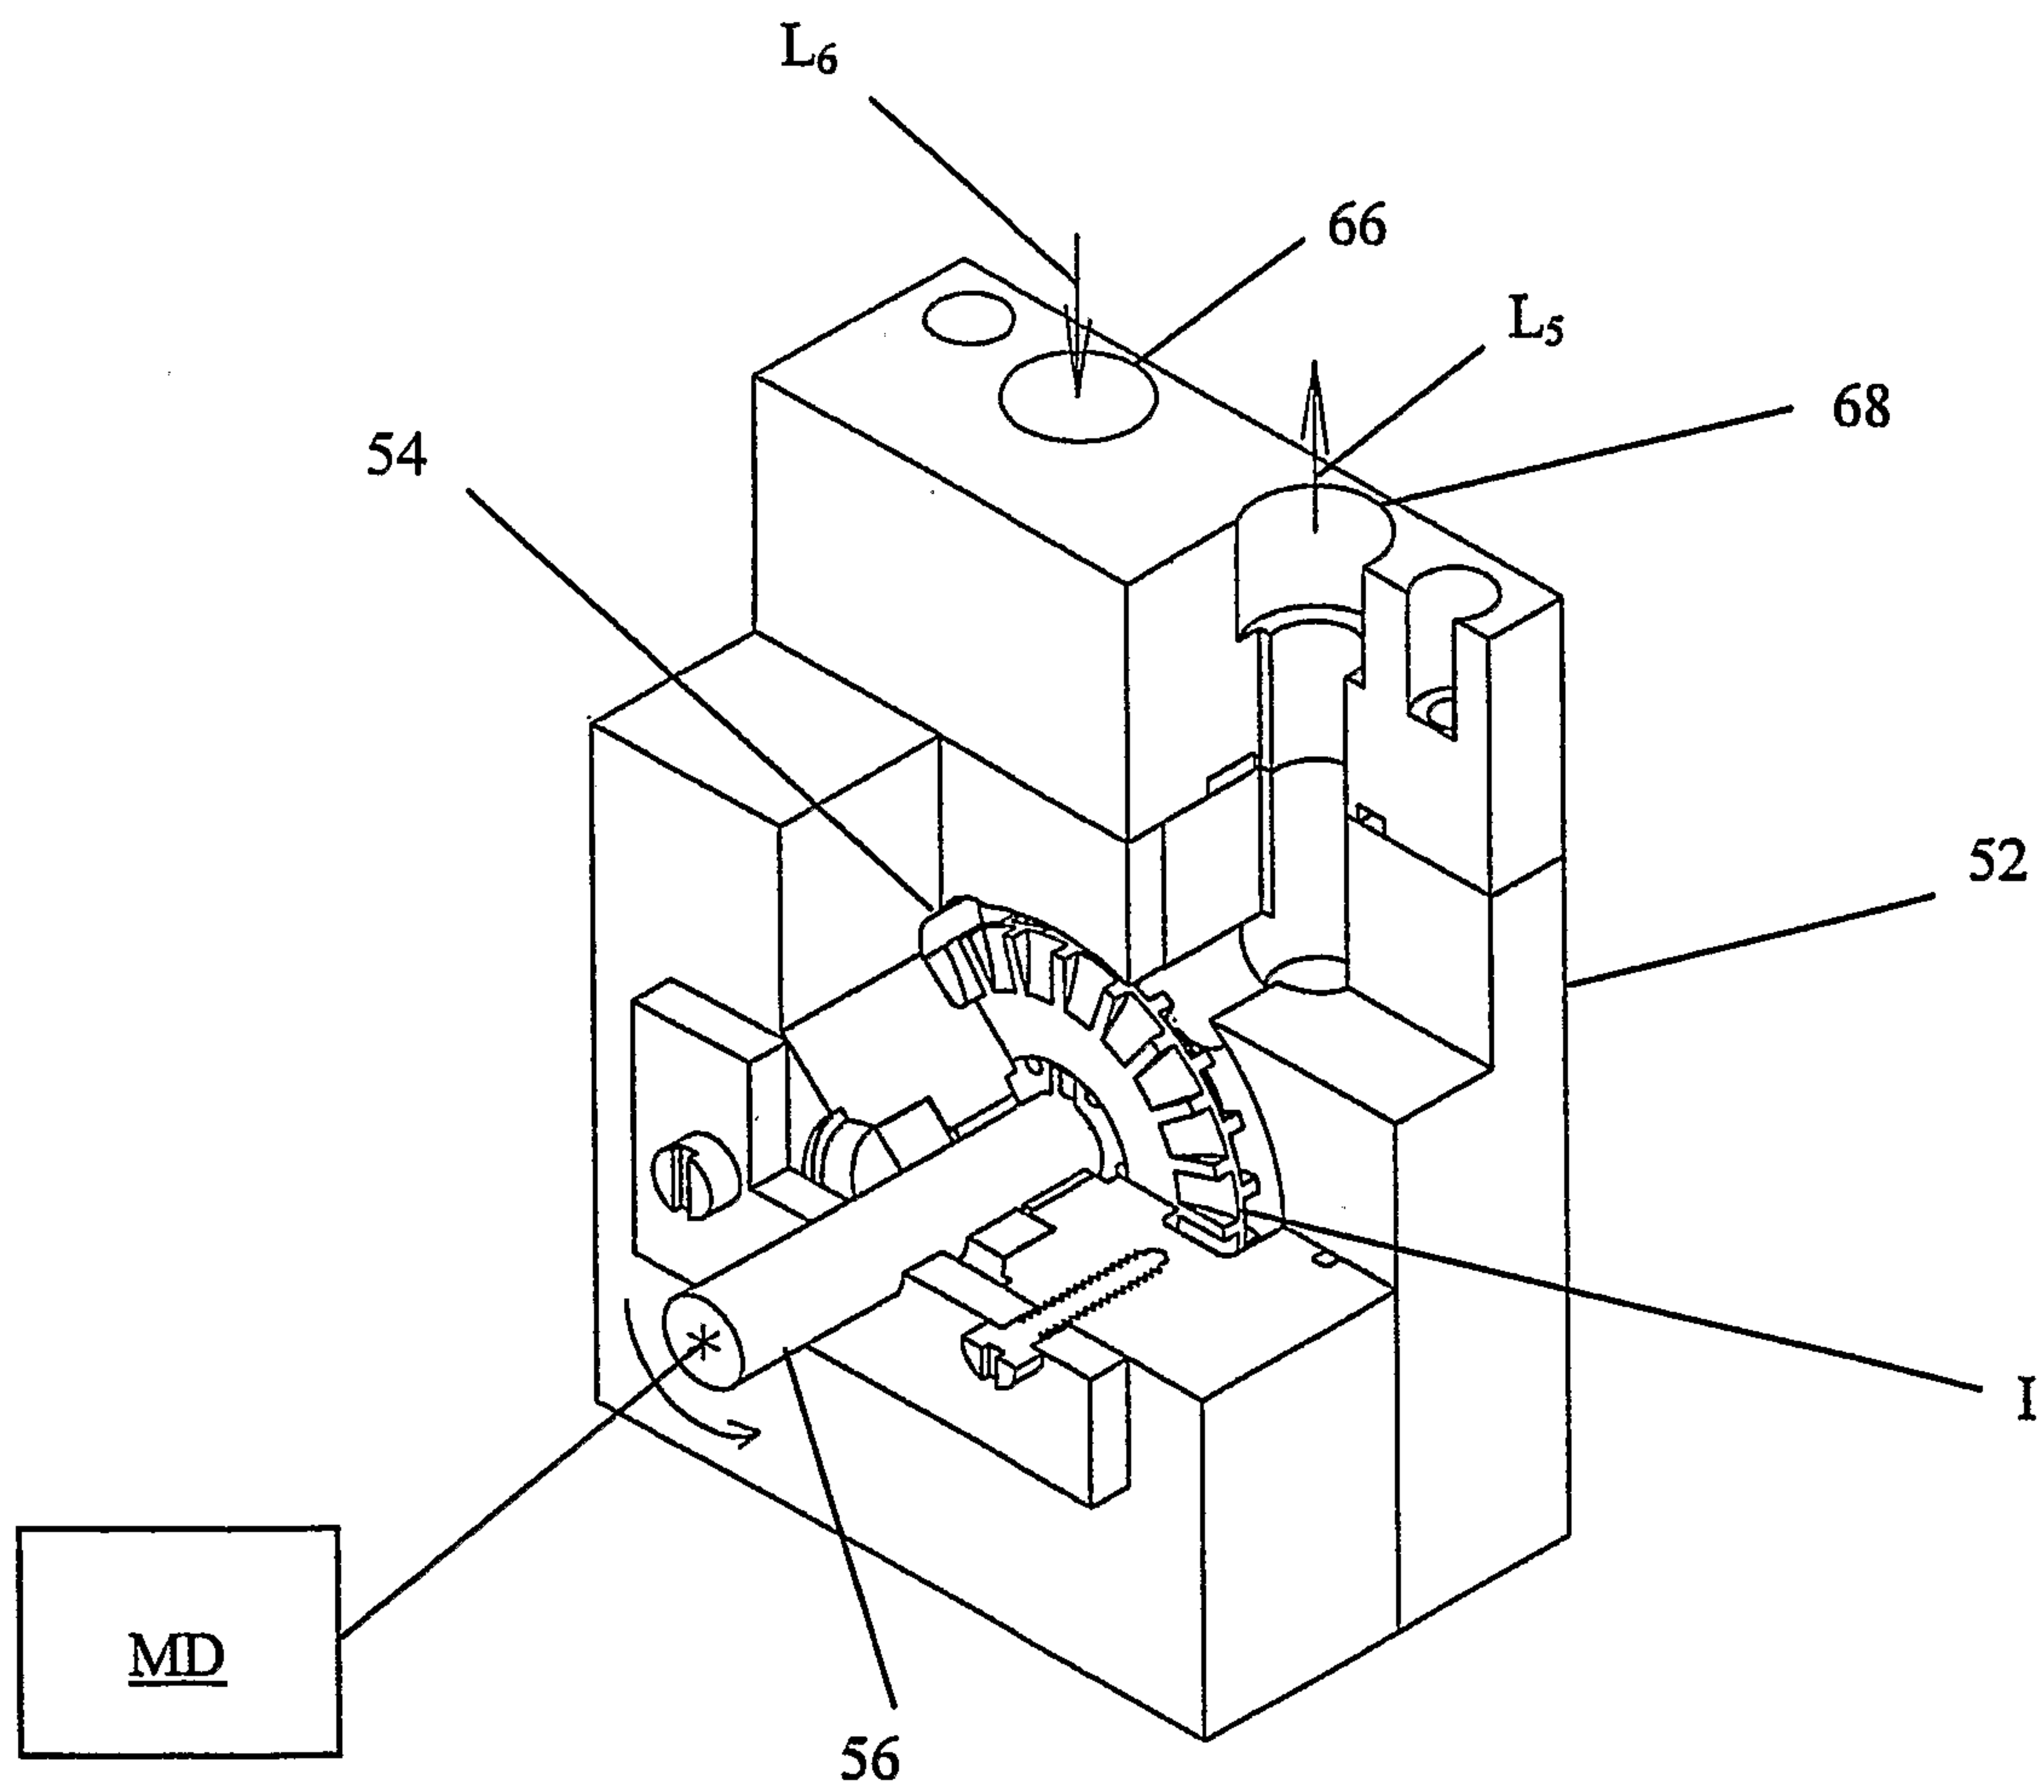


FIG. 2

