



(12) **United States Patent**
Dealey et al.

(10) **Patent No.:** **US 11,286,594 B2**
(45) **Date of Patent:** **Mar. 29, 2022**

(54) **KNITTING MACHINE WITH ELECTRONIC AUXILIARY COMPONENT**

(56) **References Cited**

U.S. PATENT DOCUMENTS

- (71) Applicant: **NIKE, Inc.**, Beaverton, OR (US)
- (72) Inventors: **Stuart W. Dealey**, Portland, OR (US);
Adrian Meir, Portland, OR (US);
Gagandeep Singh, Beaverton, OR (US)
- (73) Assignee: **NIKE, Inc.**, Beaverton, OR (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 59 days.

| | | |
|--------------|---------|------------------|
| 3,529,445 A | 4/1969 | Brose |
| 3,688,525 A | 9/1972 | Jeffcoat |
| 3,904,529 A | 9/1975 | Nakamura |
| 3,937,038 A | 2/1976 | Sick |
| 4,027,982 A | 6/1977 | Ohishi |
| 4,711,101 A | 12/1987 | Goller et al. |
| 4,723,423 A | 2/1988 | Goller et al. |
| 5,014,524 A | 5/1991 | Smilovici |
| 5,333,208 A | 7/1994 | Massen |
| 5,511,392 A | 4/1996 | Sawazaki |
| 5,551,392 A | 4/1996 | Sawazaki et al. |
| 5,524,460 A | 6/1996 | Michetti et al. |
| 5,912,816 A | 6/1999 | Emery |
| 6,035,669 A | 3/2000 | Gutschmit |
| 6,112,557 A | 9/2000 | Crabtree |
| 6,244,076 B1 | 6/2001 | Ganor et al. |
| 6,318,132 B1 | 11/2001 | Gutschmit et al. |

(Continued)

- (21) Appl. No.: **16/876,909**
- (22) Filed: **May 18, 2020**

(65) **Prior Publication Data**

US 2020/0277714 A1 Sep. 3, 2020

FOREIGN PATENT DOCUMENTS

| | | |
|----|-------------|---------|
| CN | 1756865 A | 4/2006 |
| CN | 100432314 C | 11/2008 |

(Continued)

Related U.S. Application Data

- (63) Continuation of application No. 15/941,577, filed on Mar. 30, 2018, now Pat. No. 10,655,254.
- (60) Provisional application No. 62/479,698, filed on Mar. 31, 2017.

OTHER PUBLICATIONS

Non-Final Office Action received for U.S. Appl. No. 15/941,577 dated Oct. 1, 2019, 11 pages.

(Continued)


Primary Examiner — Danny Worrell
(74) *Attorney, Agent, or Firm* — Shook Hardy & Bacon, L.L.P.

- (51) **Int. Cl.**
D04B 35/18 (2006.01)
D04B 15/70 (2006.01)
- (52) **U.S. Cl.**
CPC **D04B 35/18** (2013.01); **D04B 15/70** (2013.01)
- (58) **Field of Classification Search**
CPC D04B 15/70; D04B 15/78; D04B 15/665; D04B 35/10; D04B 35/18
USPC 66/165, 163
See application file for complete search history.

(57) **ABSTRACT**

A knitting machine may include a needle bed and a carriage that is movable along the needle bed. The carriage may be configured to engage at least one feeder to move a dispensing area of the feeder along the needle bed while dispensing a yarn, where the carriage includes an interface for providing power to an auxiliary component.

16 Claims, 6 Drawing Sheets

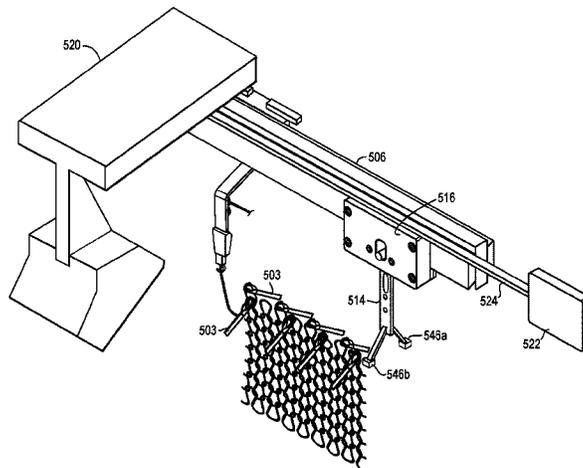

(56)

References Cited

U.S. PATENT DOCUMENTS

| | | | |
|--------------|----|--------|------------------|
| 6,691,534 | B1 | 2/2004 | Schonauer et al. |
| 7,509,821 | B1 | 3/2009 | Lin et al. |
| 9,060,570 | B2 | 6/2015 | Huffa et al. |
| 2001/0004839 | A1 | 6/2001 | Ganor et al. |
| 2006/0156762 | A1 | 7/2006 | Nakamori |

FOREIGN PATENT DOCUMENTS

| | | | |
|----|-----------|----|---------|
| CN | 101835930 | A | 9/2010 |
| CN | 102454043 | A | 5/2012 |
| CN | 103628245 | A | 3/2014 |
| CN | 203866498 | U | 10/2014 |
| CN | 104233609 | A | 12/2014 |
| CN | 105164329 | A | 12/2015 |
| CN | 205711206 | U | 11/2016 |
| DE | 209862 | A5 | 5/1984 |
| EP | 2228475 | A1 | 9/2010 |
| GB | 2035388 | A | 6/1980 |

OTHER PUBLICATIONS

Notice of Allowance received for U.S. Appl. No. 15/941,577, dated Jan. 15, 2020, 5 pages.

Office Action received for European Patent Application No. 18720453.2, dated Apr. 13, 2021, 6 pages.

Office Action dated Sep. 3, 2019 for Taiwan Application No. 107111505 (25 pp.).

First Office Action in Chinese Application No. 2018800232611, dated Jul. 30, 2020 (17 pages).

Office Action in Taiwanese Application No. 107111505, dated Aug. 4, 2020 (7 pages).

FIG. 1

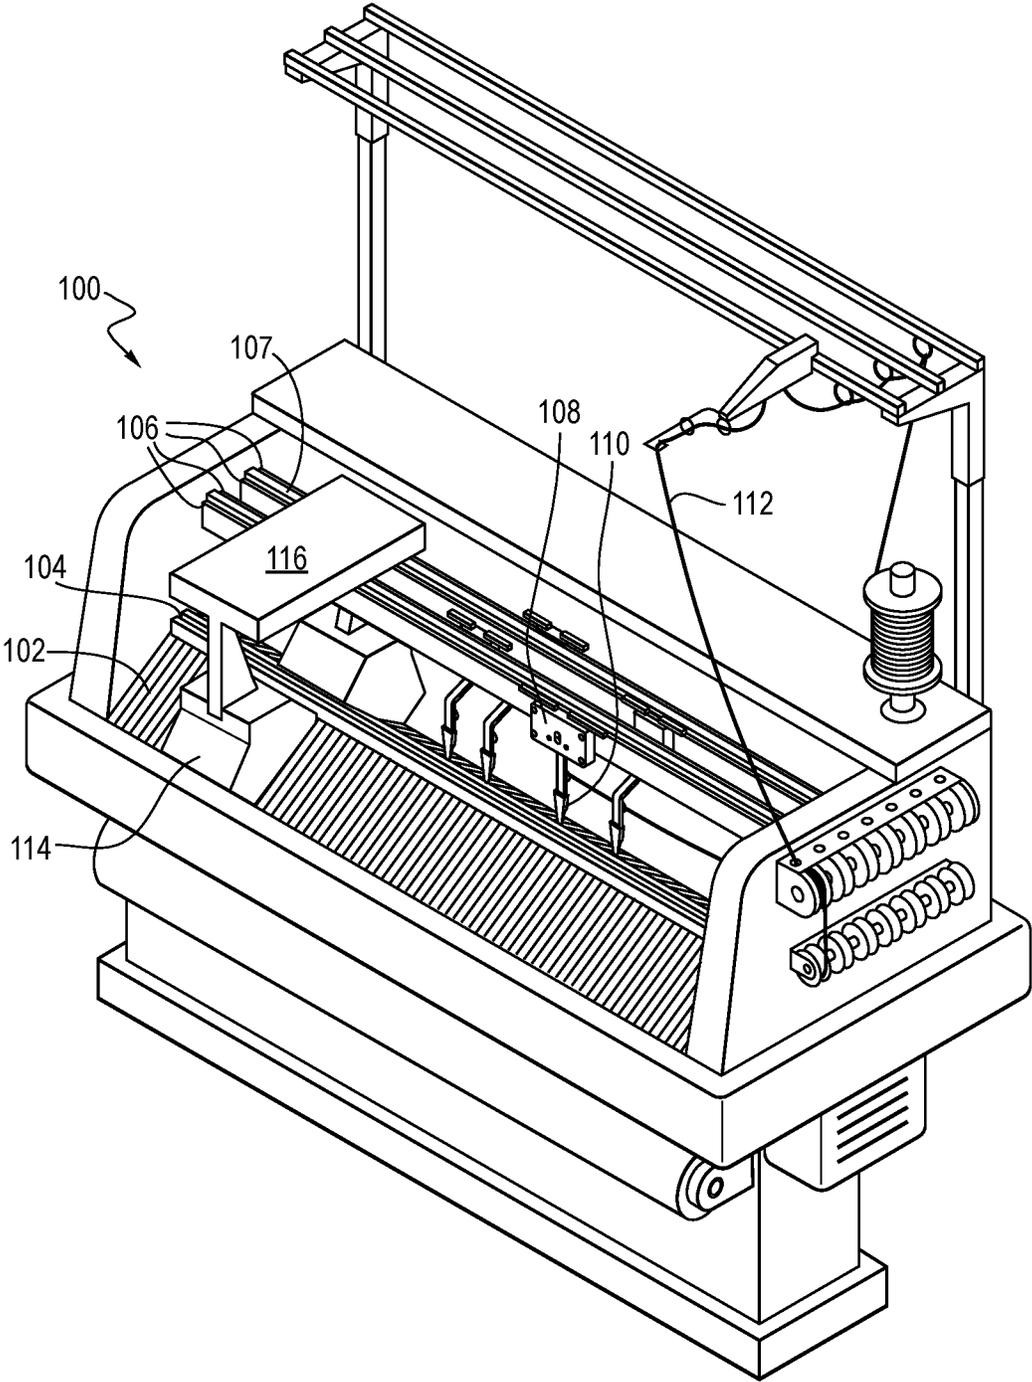


FIG. 2

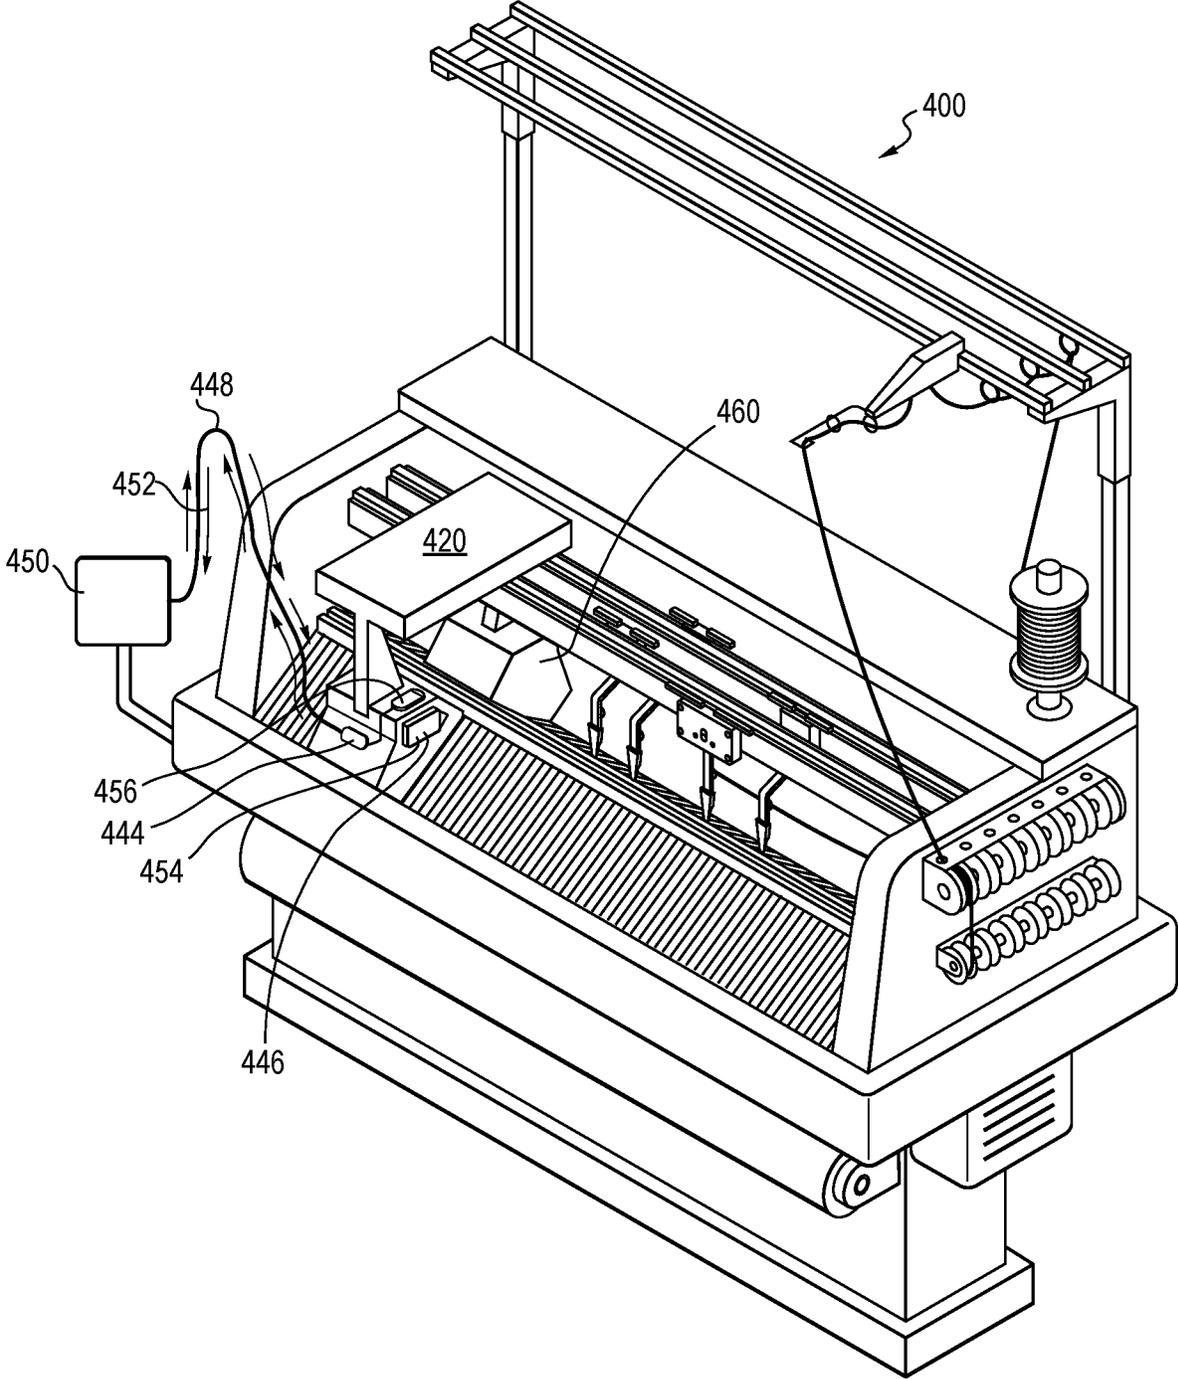


FIG. 3

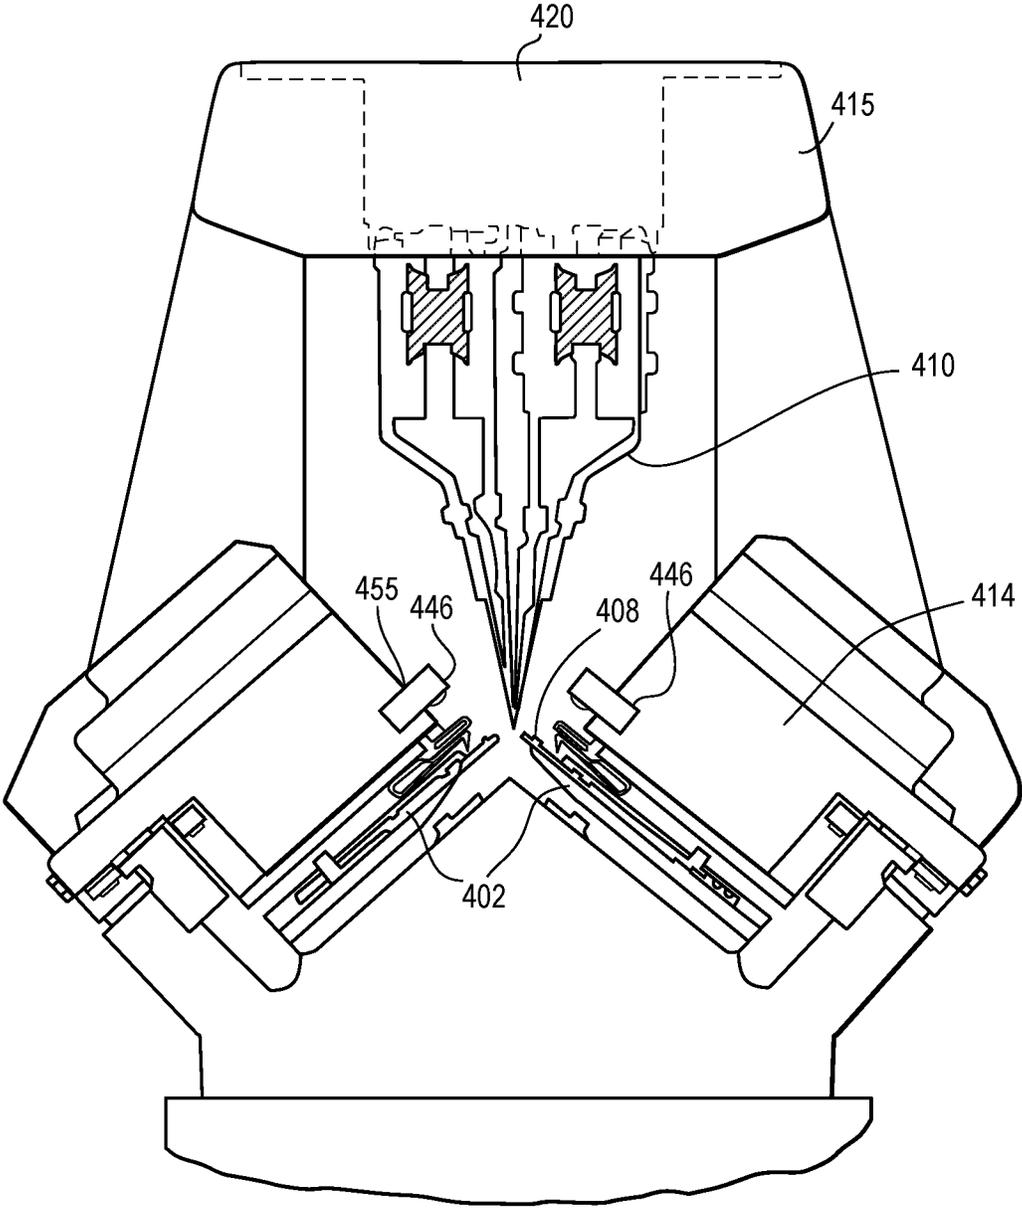


FIG. 4



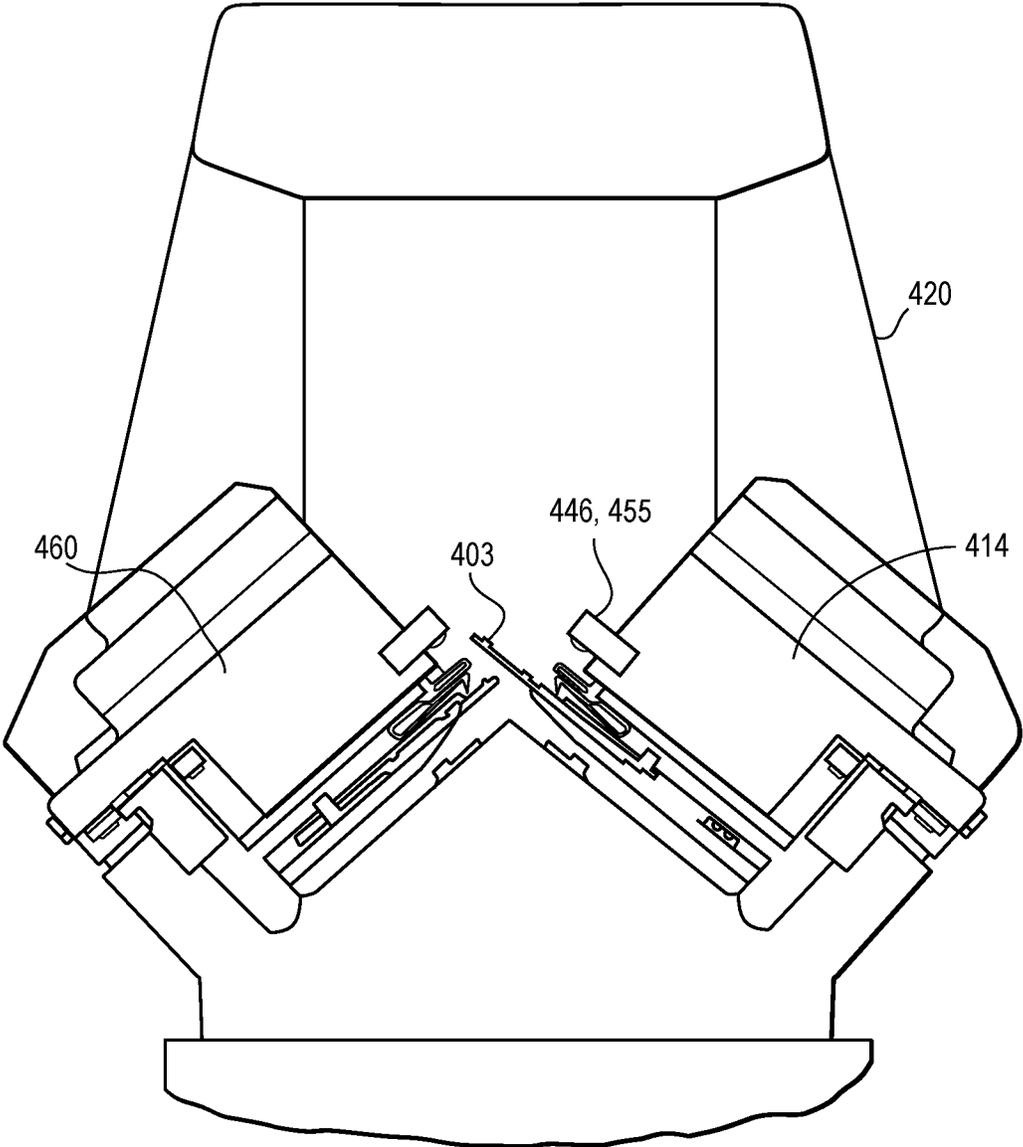


FIG. 5

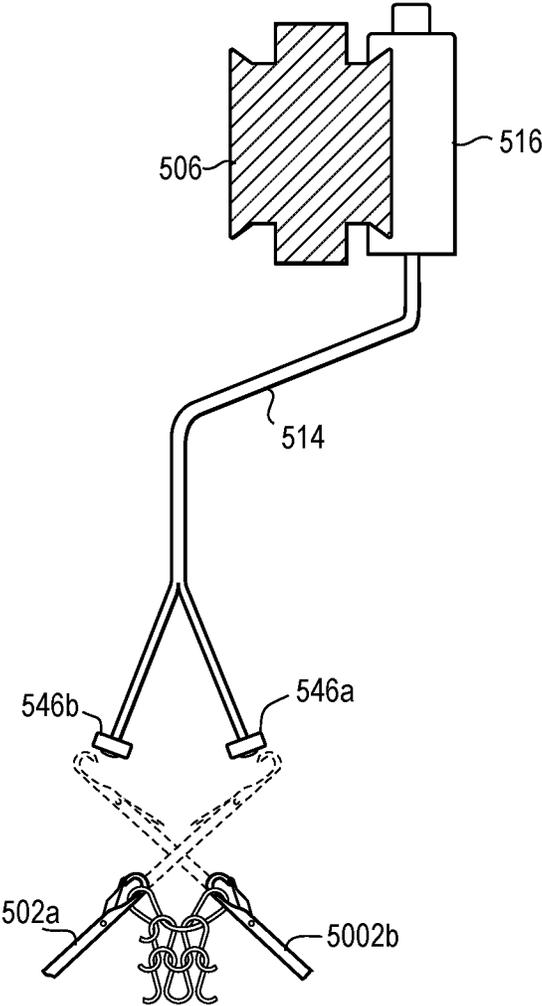

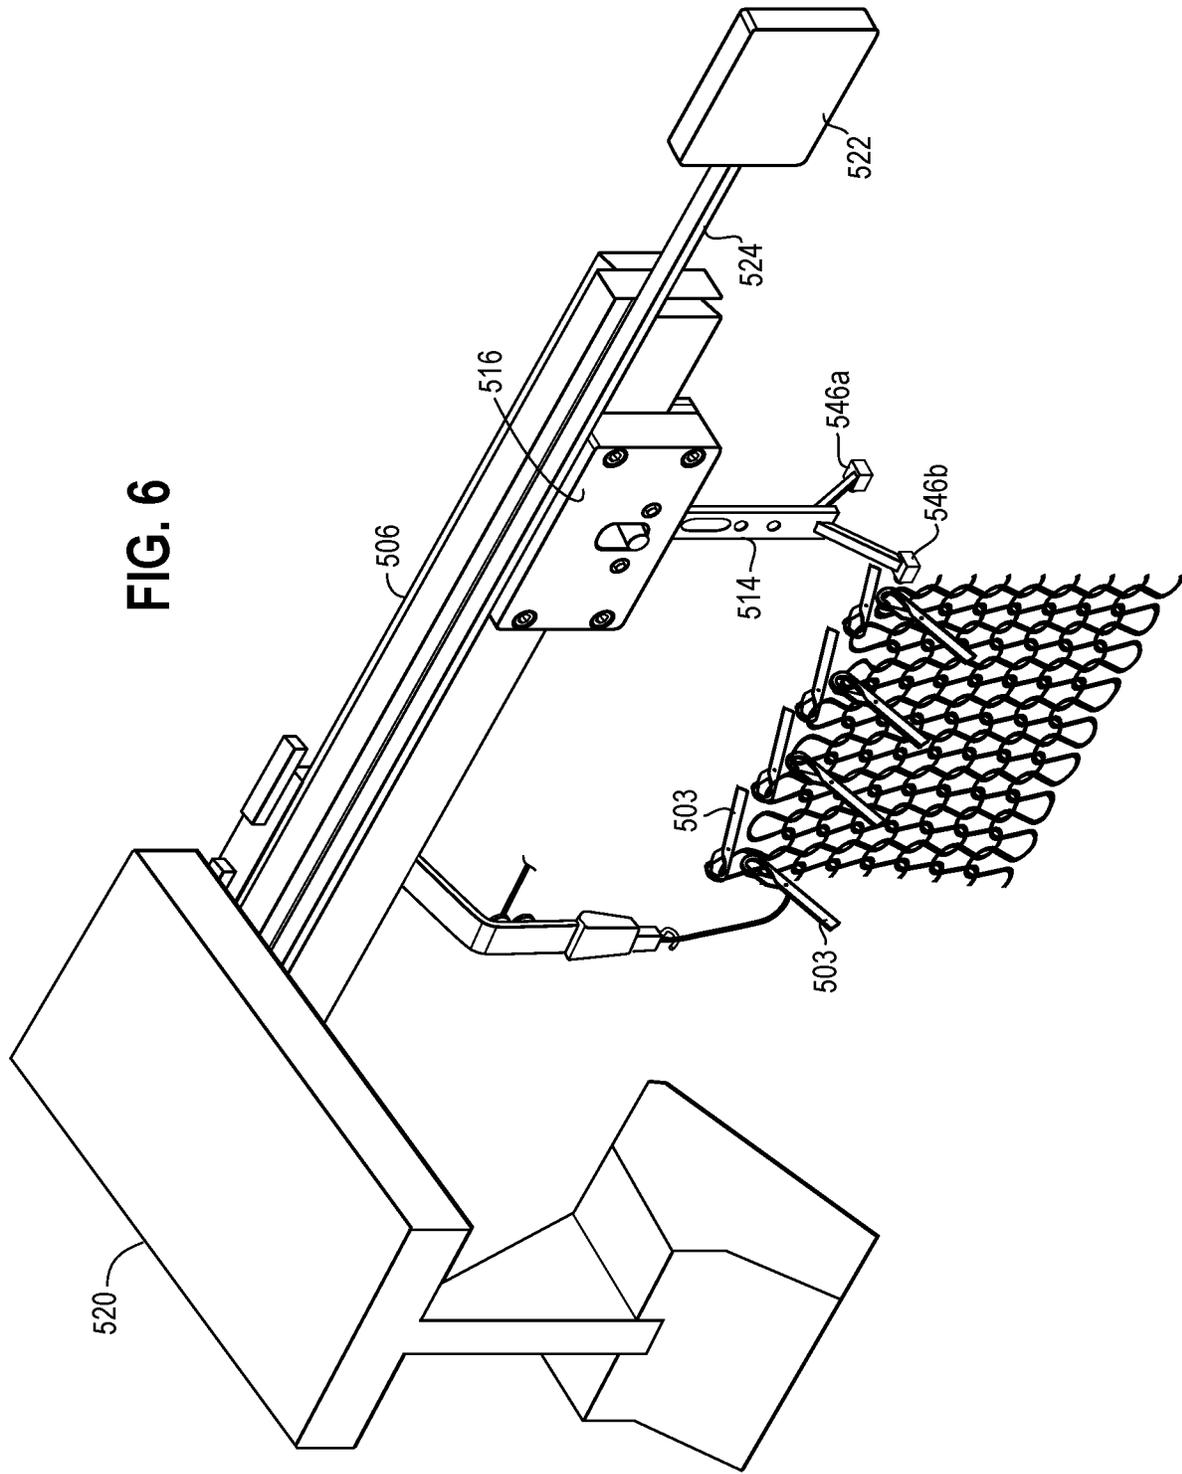

KNITTING MACHINE WITH ELECTRONIC AUXILIARY COMPONENT

RELATED APPLICATIONS

This application is a continuation of U.S. application Ser. No. 15/941,577, filed Mar. 30, 2018, and issuing on May 19, 2020 as U.S. Pat. No. 10,655,254, which claims the benefit of U.S. Provisional Application No. 62/479,698, filed Mar. 31, 2017, which is hereby incorporated by reference in its entirety. Each application listed in this paragraph is hereby incorporated by reference in its entirety.

BACKGROUND

A variety of articles are formed from textiles. As examples, articles of apparel (e.g., shirts, pants, socks, footwear, jackets and other outerwear, briefs and other undergarments, hats and other headwear), containers (e.g., backpacks, bags), and upholstery for furniture (e.g., chairs, couches, car seats) are often at least partially formed from textiles. These textiles are often formed by weaving or interlooping (e.g., knitting) a yarn or a plurality of yarns, usually through a mechanical process involving looms or knitting machines. One particular object that may be formed from a textile is an upper for an article of footwear.

Knitting is an example of a process that may form a textile. Knitting may generally be classified as either weft knitting or warp knitting. In both weft knitting and warp knitting, one or more yarns are manipulated to form a plurality of intermeshed loops that define a variety of courses and wales. In weft knitting, which is more common, the courses and wales are perpendicular to each other and may be formed from a single yarn or many yarns. In warp knitting, the wales and courses run roughly parallel.

Although knitting may be performed by hand, the commercial manufacture of knitted components is generally performed by knitting machines. An example of a knitting machine for producing a weft knitted component is a V-bed flat knitting machine, which includes two needle beds that are angled with respect to each other. Rails extend above and parallel to the needle beds and provide attachment points for feeders, which move along the needle beds and supply yarns to needles within the needle beds. Standard feeders have the ability to supply a yarn that is utilized to knit, tuck, and float. In situations where an inlay yarn is incorporated into a knitted component, an inlay feeder is typically utilized.

One common problem with existing knitting machines is the inability to detect broken needles. When a needle breaks, it can interrupt the knit structure of a knitted component, which often requires the knitted component to be discarded as scrap. This problem may go undetected for extended periods of time, especially when the knitting machine is operating automatically without continuous human oversight.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration showing a knitting machine in accordance with the present disclosure.

FIG. 2 is an illustration showing a knitting machine with an auxiliary component in accordance with the present disclosure.

FIG. 3 is an illustration showing a side view of the knitting machine of FIG. 2 having a carriage with the auxiliary component in accordance with the present disclosure.

FIG. 4 is an illustration showing side view of the knitting machine of FIG. 3 and having a needle stuck in an actuated position.

FIG. 5 is an illustration showing an auxiliary transport device with two auxiliary components in accordance with the present disclosure.

FIG. 6 is an illustration showing a perspective view of the auxiliary transport device of FIG. 5 on a rail of a knitting machine and operated via a belt drive in accordance with the present disclosure.

DETAILED DESCRIPTION

Various aspects are described below with reference to the drawings in which like elements generally are identified by like numerals. The relationship and functioning of the various elements of the aspects may better be understood by reference to the following detailed description. However, aspects are not limited to those illustrated in the drawings or explicitly described below. It also should be understood that the drawings are not necessarily to scale, and in certain instances details may have been omitted that are not necessary for an understanding of aspects disclosed herein, such as conventional fabrication and assembly.

FIG. 1 shows a knitting machine **100** with two needle beds (a front or first needle bed **102** and a back or second needle bed **104**) that are angled with respect to each other (e.g., thereby forming a V-bed). The needles of the first needle bed **102** may lay on a first plane, and the needles of the second needle bed **104** may lay on a second plane. The first plane and the second plane may be angled relative to each other and meet to form an intersection (or axis) that extends along a majority of a width of the knitting machine **100**. The needles each may have a first or neutral position where they are retracted and a second or extended position where they are extended. In the neutral position, an end of the needles is spaced from the intersection, and in the extended position, the needles pass through the intersection. The needles, needle beds, and intersection are described in additional detail in U.S. patent application Ser. No. 13/048,540, patented as U.S. Pat. No. 9,060,570, which is herein incorporated by reference in its entirety.

One or more rails **106** may extend above and parallel to the intersection and may provide attachment points for one or more feeders **108**. Herein, the rails **106** are defined by a track for which a feeder **108** may couple to in a movable manner. The rails **106** may be secured to a body **107**, where the body **107** includes a rail **106** on each side (e.g., on two sides as shown) (and where each of the rails **106** are configured to couple to a different feeder **108**). Two rails **106** are included in the depicted embodiment, but more or fewer than two rails **106** may be included. The feeders **108** may include a dispensing area **110** located near the intersection and configured to dispense a yarn **112** to at least one of the first needle bed **102** and the second needle bed **104** as it moves along the intersection.

The knitting machine **100** may include a carriage **114** (with includes an upper portion **115** for communication with the feeders **110** a lower portion **114** (also called a cam box) for communication with cams beneath the needle beds **102** that is movable along the first needle bed **102** and the second needle bed **104**. An upper portion **116** of the carriage **114** may include a set of plungers (not shown) that can selectively engage at least one of the feeders **108** such that the feeder **108** that is engaged moves along one of the rails **108** as the carriage **114** moves. As the carriage **114** moves along the first needle bed **102** and the second needle bed **104**, the

carriage **114** may selectively actuate needles of the first needle bed **102** and/or the second needle bed **104** such that the actuated needles move from the default position to the extended position. The actuation may be the result of a set of cams (not shown in FIG. 1) of the carriage **114** making contact with a butt portion of the needles and forcing the needles to move from the default position to the extended position as the carriage **114** passes. Due to the action of the carriage **114**, the feeder **108**, and the needles, the yarn **112** may be dispensed from the feeder **108** and to the needles of at least one of the first needle bed **102** and the second needle bed **104**.

Referring to FIG. 2, in some embodiments, a carriage **420** of a knitting machine **400** (and potentially multiple carriages) may include an interface **444** for providing power to at least one auxiliary component **446**. The auxiliary component **446** may be selectable from a variety of auxiliary components that can interact with the interface **444**. For example, the auxiliary component may include a light, a camera, a sensor, a cutting device, or any other suitable auxiliary component. The interface may be any suitable type of interface, including (but not limited to) a USB port, a standard power receptacle (such as a receptacle compatible with a NEMA-1 or NEMA-5 connector in North America and the equivalent in other locations, for example), a parallel port (e.g., a DB-25 port), and a serial port (e.g., a DE-9 port). Advantageously, the auxiliary component **446** may be coupled to the carriage **420** such that it moves along a needle bed with the carriage and is thereby continuously near the knitting action (e.g., the looping of yarns on the needles), which may provide the ability of the auxiliary component **446** to perform operations that affect the yarn just before, during, or after it is looped on a needle, to collect information about the knitting process, the yarn, or the knitting machine and relay that information to the knitting machine and/or a user, etc. When the interface **444** provides power (e.g., in the form of electricity), the power may be provided to the carriage **420** by extending a cable **448** to the carriage **420** from a location (e.g., a location that is static with respect to the frame) via a cable **448**, wirelessly, or by another suitable device or method. While not shown, it is contemplated that the knitting machine **400** may include a cable management device to manage slack in the cable as the carriage **420** moves.

In some embodiments, the interface **444** may be capable of unilateral or bilateral communication between the auxiliary component **446** and a control system **450** of the knitting machine (or another control system). When bilateral communication is provided by the interface **444**, the knitting machine may receive a feedback signal **452** from the auxiliary component **446** (e.g., such that the feedback signal **452** is received by the control system **450** of the knitting machine **400**). The knitting machine **400** may adjust its operation in response to the feedback signal **452**. For example, the knitting machine **400** may adjust a knitting sequence in response to the feedback signal **452** to account for certain conditions, such as particular environmental conditions, machine damage, yarn breakages, etc. In some embodiments, the knitting machine may be capable of terminating a knitting process in response to the feedback signal **452** (e.g., when the feedback signal **452** indicates a broken needle discovered by the auxiliary component **446**).

The auxiliary component may be a sensor configured to sense at least one environmental condition. For example, the auxiliary component may include a temperature sensor **454** and/or a barometer **456**. This may be advantageous for providing information to the control system **450** such that

the control system **450** can take the environmental conditions into account by modifying certain characteristics of the knitting process (e.g., knitting speed, yarn tension, etc.). The result may be a safer, more efficient, and more effective knitting process.

A side view of the carriage **420**, as well as two needle beds **402**, are shown in FIG. 3. As shown, the carriage **420** may include an upper portion **415** for cooperating with a set of feeders **410** and a lower portion with a cam box **414**. The cam box **414** may run along the needles **403** of the needle beds **402**. As shown, the auxiliary component **446** may include a sensor **455** which is configured to detect a displaced or broken needle **403**. The sensor **455** may be a laser sensor, a camera, a metal detector, or any other suitable sensor device.

FIG. 4 shows the knitting machine of FIG. 3, where a needle is stuck in the “up” or actuated position. When this occurs, the loops or other knit structure of a knitted component formed on the knitting machine may be compromised since the needle **403** is not operating properly, which may result in the knitted component being discarded as scrap. More seriously, the carriage **420** and/or the feeder **410** (FIG. 3) may contact the needle **403** during the knitting process, which may damage the knitting machine and require maintenance (e.g., replacement of the needle, which is associated with significant machine downtime). In other circumstances, the needles **403** may break (e.g., due to wear), which may also interrupt the knitting process and/or require the knitted component to be discarded.

The sensor **455**, which may be a laser sensor, camera, etc., may be located on an end of the cam box **414**, and configured to detect when the needle is stuck in the actuated position. Locating the sensor **455** at the end **460** (see also FIG. 2) of the cam box **414** may be advantageous since the needles **403** may be located in the “down” or unactuated position when the end **460** passes over those needles **403** when the knitting machine is working properly (i.e., since they are typically only actuated into the “up” position when near the center if the cam box **414** due to the placement of the cams). Thus, the sensor may operate by viewing (e.g., with a laser or camera) or otherwise sensing (e.g., through metal detection) the presence of the needle **403** in the “up” position as the end **460** of the cam box **414** passes over the needle **403**. Once the needle **403** is detected in an improper location, the sensor **455** may electronically send a signal to the control system **450** (FIG. 2), and the control system **450** (FIG. 2) may appropriately respond (e.g., by shutting down the knitting operation, indicating a potential issue to the operator through the interface **450**, etc.).

The sensor **455** may additionally or alternatively be configured to detect the presence of a broken or missing needle. For example, in some embodiments, the sensor **455** may be located at a location of the cam box **414** where the needles properly extend to the “up” or actuation position to cooperate a feeder (e.g., near the center of the cam box **414**), and thus the lack of a sensor signal corresponding to a needle **403** may indicate a problem with the needle **403** when the needle is supposed to be actuated. The control system **450** (FIG. 2) may then react appropriately to prevent or control damage to the knitted component and/or the knitting machine.

In some embodiments, a separate auxiliary transport device **514** may house and transport the auxiliary component **546** rather than the carriage (or, the carriage may include an auxiliary component while the auxiliary transport device **514** includes a different auxiliary component), as shown in FIG. 5. Referring to FIG. 5, the auxiliary component **546**

may be an electronic device and may include any of the features described with respect to the auxiliary components above, may be included on an auxiliary transport device **514** with an upper portion **516** coupled to a rail **506** of the knitting machine. While not shown, the auxiliary transport device **514** may be wired to a control system, a stationary user interface, etc. in a manner similar to the wiring of the above-described carriage with the auxiliary component **446** (FIG. 2). In the depicted embodiment, a first auxiliary component **546a** is associated with the first needle bed **502a**, and a second auxiliary component **546b** is associated with a second needle bed **502b** (and it is noted that the dashed lines indicate the “up” or actuated position of the needles). Each of the first auxiliary component **546a** and the second auxiliary component **546b** may include a sensor (e.g., a laser, camera, metal detector, or any other suitable sensor) for monitoring the operation and health of the needles **503**. For example, the auxiliary transport device **514** may run back and forth along the rail **506** such that the first auxiliary component **546a** and the second auxiliary component **546b** run back and forth along the needle beds **502** to view or otherwise detect the health of the needles **503**. This may occur continuously during knitting, upon predetermined time intervals, and/or upon a predetermined number of carriage passes. While not shown, in other embodiments, the auxiliary transport device **514** may additionally or alternatively include other auxiliary components, such as a temperature sensor, a barometer, etc. that collect and relay information about the yarn and/or loops of the knitted component, and/or the atmospheric conditions. Also, like the auxiliary component **446** described above (see FIG. 2), the auxiliary components **546a** and **546b** may be coupled to a control system (such as the control system **450** of FIG. 2), and may provide feedback for determining operating parameters of the knitting machine. The auxiliary components **502a** and/or **502b** may additionally or alternatively include devices other than sensors for performing a function during manufacturing of the knitted component, such as a cutting device, moisture or adhesive-application device, a heating device, etc. While not shown, the auxiliary transport device **514** may include a port (like the port or interface **444** of FIG. 2 such that different auxiliary components can be selectively used with the auxiliary transport device **514**.

FIG. 5 shows a perspective view of the auxiliary transport device **514** of FIG. 4 having the auxiliary components **546a** and **546b**. The upper portion **516** of the auxiliary transport device **514** may have wheels and/or other suitable devices for moving the auxiliary transport device **514** along the rail **506**. While the auxiliary transport device **514** may be configured to be moved with the carriage **520** (i.e., in a manner similar to a feeder), it is also contemplated that the auxiliary transport device **514** may be actuated independently from the carriage **520**.

The auxiliary transport device **514** may be coupled to an actuator **522** configured to move the auxiliary transport device **514** such that the auxiliary components **546a** and **546b** move along the needle beds of the knitting machine, and/or along loops of the knitted component, as shown. The auxiliary transport device **514** is preferably movable independently of the carriage **520** (i.e., due to actuation of the actuator **522**), but in other embodiments, it may instead (or additionally) be actuated by the carriage **520** (e.g., in a manner similar to actuation of a knitting feeder **208** of FIG. 1). For example, the auxiliary transport device **514** may be coupled to the actuator **522** via a belt **524** (which may be embodied as a chain, a flexible band, a conveyor, or another suitable device coupling the actuator with the auxiliary

transport device **514**). The location of the auxiliary components **546a** and **546b** may be selected such that they do not interfere with the needles **503** or the carriage **520** during knitting (e.g., they may be located above the needles **503** even when the needles are fully extended such that they cannot contact the needles **503** when they pass over the needles **503**). Optionally, the upper portion **516** of the auxiliary transport device **514** may be given its own rail **506** such that it can operate without getting in the way of a knitting feeder **510**, but in other embodiments, the upper portion **516** may share a rail **506** with another component (e.g., another auxiliary transport device **514** with additional auxiliary components, a knitting feeder, etc.).

Advantageously, by including the independently-movable and independently-controllable auxiliary transport device **514**, the knitting machine may substantially increase its flexibility with respect to certain features since the movement of the auxiliary transport device **514** is not dependent on the position/movement of the carriage **520** (which also typically has the task of moving the knitting feeders). For example, the actuator **522** may move the auxiliary transport device **514** along the needles **503** without considering operation of the carriage **520** and the knitting feeders **510** to provide continuous information regarding the needles **503**, environmental conditions, loops of the knitted component, etc. without being impacted by certain motions of the carriage **520** required for knitting certain structures.

In the present disclosure, the ranges given either in absolute terms or in approximate terms are intended to encompass both, and any definitions used herein are intended to be clarifying and not limiting. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the present embodiments are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contains certain errors necessarily resulting from the standard deviation found in their respective testing measurements. Moreover, all ranges disclosed herein are to be understood to encompass any and all subranges (including all fractional and whole values) subsumed therein.

Furthermore, the present disclosure encompasses any and all possible combinations of some or all of the various aspects described herein. It should also be understood that various changes and modifications to the aspects described herein will be apparent to those skilled in the art. Such changes and modifications can be made without departing from the spirit and scope of the present disclosure and without diminishing its intended advantages. It is therefore intended that such changes and modifications be covered by the appended claims.

We claim:

1. A knitting machine, the knitting machine comprising:
 - a needle bed;
 - a carriage that is movable along the needle bed, wherein the carriage engages at least one feeder to move a dispensing area of the feeder along the needle bed while dispensing a yarn; and
 - at least one sensor that is fixed to the carriage such that the sensor moves relative to the needle bed when the carriage moves along the needle bed,
 wherein a control system of the knitting machine adjusts movement of the carriage based on feedback received from the at least one sensor, wherein the at least one sensor is a laser sensor, and wherein the laser sensor determines when a needle of the needle bed is damaged or broken and then sends a feedback signal to the

control system of the knitting machine to indicate that the needle is damaged or broken.

2. The knitting machine of claim 1, the carriage includes a USB port.

3. The knitting machine of claim 2, wherein a cable extends from a power supply of the knitting machine to the carriage to provide the power to the USB port.

4. The knitting machine of claim 1, wherein the knitting machine adjusts a knitting sequence in response to a feedback signal received by the control system from the at least one sensor.

5. The knitting machine of claim 1, wherein the knitting machine terminates a knitting process in response to a feedback signal received by the control system from the at least one sensor.

6. The knitting machine of claim 1, wherein the at least one sensor includes a temperature sensor.

7. The knitting machine of claim 1, wherein the at least one sensor includes a barometer.

8. The knitting machine of claim 1, wherein the at least one sensor detects at least one environmental condition.

9. A knitting machine, the knitting machine comprising:
 a needle bed comprising a first set of needles and a second set of needles;
 a carriage that is movable along the needle bed and actuates each of the first set of needles and the second set of needles; and
 a laser sensor that is fixed to the carriage such that the laser sensor moves relative to the needle bed when the carriage moves along the needle bed,
 wherein a control system of the knitting machine adjusts movement of at least one of the carriage, a feeder, and the needle bed based on feedback received from the laser sensor, and wherein the laser sensor determines when a needle of the needle bed is damaged or broken and then sends a feedback signal to the control system of the knitting machine to indicate that the needle is damaged or broken.

10. The knitting machine of claim 9, the carriage includes a USB port.

11. The knitting machine of claim 10, wherein a cable extends from a power supply of the knitting machine to the carriage to provide the power to the USB port.

12. The knitting machine of claim 9, wherein the knitting machine adjusts a knitting sequence in response to a feedback signal received by the control system from the laser sensor.

13. The knitting machine of claim 9, wherein the knitting machine terminates a knitting process in response to a feedback signal received by the control system from the laser sensor.

14. The knitting machine of claim 9, wherein the laser sensor detects a temperature near the needle bed.

15. The knitting machine of claim 9, wherein the laser sensor senses at least one environmental condition.

16. A method, comprising:
 knitting a knitted component using a knitting machine having a needle bed and a carriage,
 wherein the carriage is movable along the needle bed, wherein the carriage engages at least one feeder to move a dispensing area of the feeder along the needle bed while dispensing a yarn,
 wherein at least one sensor that is fixed to the carriage such that the sensor moves relative to the needle bed when the carriage moves along the needle bed, and
 wherein a control system of the knitting machine adjusts movement of the carriage based on feedback received from the at least one sensor, wherein the at least one sensor is a laser sensor, and wherein the laser sensor determines when a needle of the needle bed is damaged or broken and then sends a feedback signal to the control system of the knitting machine to indicate that the needle is damaged or broken.

* * * * *