



- (51) International Patent Classification:
A61F 11/00 (2006.01) A61F 2/18 (2006.01)
- (21) International Application Number:
PCT/IB2016/055575
- (22) International Filing Date:
19 September 2016 (19.09.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/220,122 17 September 2015 (17.09.2015) US
62/220,283 18 September 2015 (18.09.2015) US
- (71) Applicant: TYMCURE LTD [IL/IL]; 5 Tarshish St,
Caesarea Industrial Park, P.O.Box 3598, 3088900
Caesarea (IL).
- (72) Inventors: LILACH, Nir; 70 Kfar Yehoshua, 3658200
Kfar Yehoshua (IL). MARGULIS, Ariel; 9 HaBanim
Street, 4721609 Ramat Hasharon (IL). AVIRAM, Eyal; 23
Rashi Street, 46479 Herzeliya (IL). DAHAN, Mazel; 23
Zait Street, 76804 Mazkeret Batya (IL).
- (74) Agents: GASSNER, Dvir et al.; Yigal Alon 55, 6789115
Tel Aviv (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: TYMPANOPLASTIC PATCH APPLICATOR

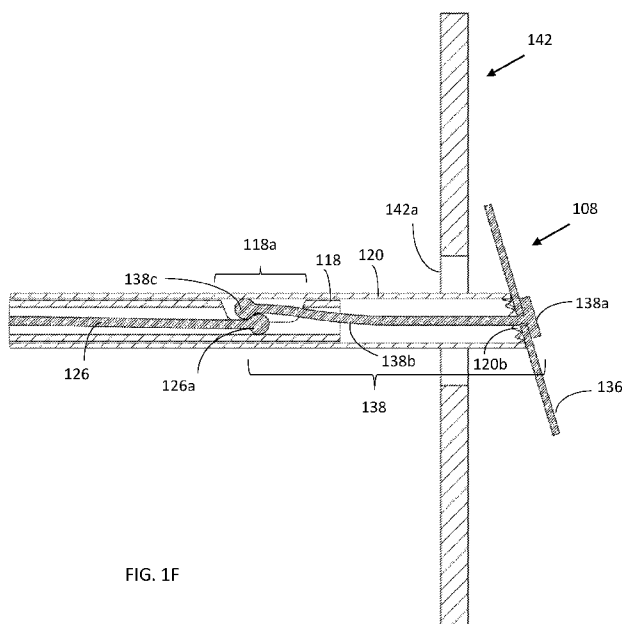


FIG. 1F

(57) Abstract: A tympanoplastic patch applicator comprising: a handle disposed with a deployment control; a deployment stem comprising multiple nested sleeves connected to the handle; a patch configured to be affixed to the distal end of the deployment stem via an actuation filament embedded in the deployment stem; and a filament-based deployment system controllable by the deployment control, wherein the deployment stem is configured to position the patch at the internal side of a perforated tympanic membrane in the middle ear by introducing the patch into the ear canal and penetrating the perforated tympanic membrane with the distal end of the deployment stem, and wherein the filament-based deployment system is configured to release the patch from the distal end of the deployment stem, thereby deploying the patch on the internal side of the perforated tympanic membrane.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

TYMPANOPLASTIC PATCH APPLICATOR**CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

This application claims the benefit of U.S. Provisional Patent Applications No. 62/220,283, filed September 18th, 2015 and entitled "Tympanoplastic Patch Applicator", and U.S. Provisional Patent Application No. 62/220,122, filed September 17th, 2015 and entitled "Tympanic Membrane Patch", which are incorporated herein by reference in their entirety.

TECHNICAL FIELD

The invention relates to the field of tympanoplasty.

BACKGROUND

Tympanoplasty is a surgical treatment for repairing a perforation in the tympanic membrane (also known as the "eardrum") and defects in one or more of the ossicular bones. Perforation in the eardrum may be the result of a birth defect, or may be attributed to ear/nose/throat infections, physical ear injury, exposure to high noise levels, aging, etc.

A hole in the eardrum (tympanic membrane perforation) is a common consequence of an ear injury or an ear infection. These perforations are often surgically repaired for the sake of preventing further complications and improve hearing. Young kids as well as adults and also elderly people can suffer from tympanic membrane perforation. The exact number of surgical tympanic membrane perforation (TMP) performed each year is unknown.

One of the major causes for perforation in the eardrum is recurrent ear infections. The eardrum (tympanic membrane) becomes "scarred" with less blood supply than normal tissue. As such, it is less resistant to infection and eventually, a point may come that the eardrum, when faced with the stress of an abscess, dissolves away, leaving a hole in the eardrum.

Moreover, the eardrum may also become perforated by trauma caused by foreign objects. Although many traumatic perforations heal spontaneously, many require repair. Perforations may also occur following extrusion of pressure equalization tubes placed to prevent recurrent middle ear infections.

Chronic Eustachian tube problems cause negative middle ear pressures that can retract and thin the eardrum so much that it stops working as a sound collector and threatens to form cholesteatoma. In these cases, the collapsed sections of eardrum are removed surgically and repaired.

A hole in the eardrum leads to hearing loss because the eardrum no longer has the surface area to collect all of the sound coming into the ear. The magnitude of hearing loss is directly related to the size of the perforation.

An ear with a hole in the eardrum is highly susceptible to develop infections because as the endogenous barrier against moisture is perforated. Moisture evaporating from the exposed linings of the middle ear also tends to humidify the ear canal and creates a good environment for bacteria and fungi to grow.

Excessive humidity in the ear canal with recurrent infection is a common problem for hearing aid users. The hearing aid acts as a plug that keeps the ear from drying out, and promotes an environment for infection.

A small hole in the eardrum can sometimes be repaired by a procedure called myringoplasty. This is performed by irritating the margins of the perforation and then giving it some sort of template to grow across. Often, a small piece of tissue such as a piece of fat can be placed through the very small perforation and result in a successful closure.

Tympanoplasty: If a hole in the eardrum fails myringoplasty or is too large to repair with myringoplasty, then tympanoplasty is required. It is often performed by trimming the margins of the perforation and creating a patch out of the covering of the temporalis muscle above the ear.

In tympanoplasty, the graft material has to be held against the edges of the perforation until healing occurs. This generally takes a minimum of several weeks. Because the surgical area is too small to sew the graft into place, the graft and eardrum are sandwiched together between a mass of gelatin packing placed in the middle ear beneath the graft and in the ear canal over the graft.

SUMMARY

The following embodiments and aspects thereof are described and illustrated in conjunction with systems, tools and methods which are meant to be exemplary and illustrative, not limiting in scope.

There is provided, in accordance with an embodiment, a tympanoplastic patch applicator comprising: a handle disposed with a deployment control; a deployment stem comprising multiple nested sleeves connected to the handle; a patch configured to be affixed to the distal end of the deployment stem via an actuation filament embedded in the deployment stem; and a filament-based deployment system controllable by the deployment control, wherein the deployment stem is configured to position the patch at the internal side of a perforated tympanic membrane in the middle ear by introducing the patch into the ear canal and penetrating the perforated tympanic membrane with the distal end of the deployment stem, and wherein the filament-based deployment system is configured to release the patch from the distal end of the deployment stem, thereby deploying the patch on the internal side of the perforated tympanic membrane.

In some embodiments, the multiple nested sleeves include an inner sleeve, wherein the actuation filament is embedded within the inner sleeve.

In some embodiments, the multiple nested sleeves include a middle sleeve encasing the inner sleeve, wherein the patch is configured to be affixed at the distal end of the middle sleeve, thereby being affixed at the distal end of the deployment stem.

In some embodiments, the distal end of the middle sleeve is serrated to secure the position of the patch and prevent its rotation with respect to the middle sleeve, wherein a first activation of the deployment control causes the serrated distal end of the middle sleeve to withdraw proximally from the patch, thereby releasing the patch from the distal end of the middle sleeve.

In some embodiments, the distal end of the middle sleeve is beveled such that the patch is affixed at an angle that is non-perpendicular to the longitudinal axis of the middle sleeve, thereby allowing the orientation of the patch to align with the orientation of the perforated tympanic membrane.

In some embodiments, the tympanoplastic patch application further comprises a posture adjustor configured with the handle, wherein the posture adjustor is configured to align the orientation of the patch with the orientation of the perforated tympanic membrane.

In some embodiments, the deployment stem is bent, and further comprises a first spring configured to transfer an adjustment of the posture adjustor to a corresponding adjustment of the orientation of the patch over the bend.

In some embodiments, the filament-based deployment system comprises an exposable distal end of the inner sleeve, wherein the patch is disposed with a proximally positioned cord configured to extend from the distal end of the middle sleeve and engage with the actuation filament at the exposable distal end of the inner sleeve, thereby affixing the patch at the distal end of the middle sleeve when the exposable distal end of the inner sleeve is encased within the middle sleeve, and wherein a second activation of the deployment control causes the middle sleeve to withdraw proximally with respect to the inner sleeve and expose the exposable distal end, allowing the cord to disengage from the actuation filament to release the patch from the tympanoplastic patch applicator.

In some embodiments, the proximal end of the cord comprises a first bulge, and the distal end of the actuation filament comprises a second bulge, wherein positioning the first bulge proximal to the second bulge at the exposable distal end of the inner sleeve engages the cord with the actuation filament, and wherein exposing the exposable distal end of the inner sleeve allows the first bulge to slide distally over the second bulge, thereby disengaging the cord from the actuation filament.

In some embodiments, the deployment control is provided with a safety mechanism configured to prevent an accidental second activation of the deployment control.

In some embodiments, the tympanoplastic patch applicator further comprises a debridement mechanism, comprising: a debridement actuator configured with the handle, an outer sleeve of the multiple nested sleeves encasing the middle sleeve, and at least one protruding blade disposed at a distal end of the outer sleeve, where the actuator is configured to advance the outer sleeve relative to the middle sleeve until the blade reaches the distal end of the deployment stem, rotate the outer sleeve relative to the middle sleeve, thereby rotating the protruding blade and causing a debridement of the circumference of the perforation, and retract the outer sleeve relative to the middle sleeve.

In some embodiments, the debridement mechanism further comprises a niche configured to collect debrided tissue.

In some embodiments, a curvature of the at least one protruding blade controls a penetration depth of the blade into the perforation.

In some embodiments, the debridement mechanism further comprises a penetration depth controlling mechanism that limits the penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the middle sleeve.

In some embodiments, the deployment stem is bent, and wherein the debridement actuator is configured to advance and retract the outer sleeve relative to the middle sleeve over the bend.

In some embodiments, the deployment stem further comprising a second spring configured to transfer a motion of the debridement actuator to the outer sleeve over the bent deployment stem, thereby enabling the advancement and retraction of the outer sleeve relative to the middle sleeve over the bend.

In some embodiments, the patch is constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging in the middle ear at the internal side of the tympanic membrane.

There is provided, in accordance with an embodiment, a method for deploying a patch at the internal side of a perforated tympanic membrane, comprising: introducing a patch, affixed to the distal end of a distally disposed stem of an applicator, into an ear canal; penetrating a perforation of a tympanic membrane with the patch; using a deployment control provided with a proximally disposed handle of the applicator to maneuver a filament-based deployment system that releases the patch from the distal end of the stem at the internal side of the tympanic membrane; and deploying the patch on the internal side of the perforated tympanic membrane.

In some embodiments, while the patch is positioned at the internal side of the tympanic membrane, aligning the orientation of the patch with the orientation of the perforated tympanic membrane using a posture adjustor provided with the proximally disposed handle of applicator.

In some embodiments, using the posture adjustor comprises rotating the posture adjustor to rotate a middle sleeve of the applicator, wherein the patch is secured to a beveled distal end of the middle sleeve.

In some embodiments, the method further comprises activating a debridement mechanism to debride dead tissue from the circumference of the perforation, and wetting the circumference of the debrided perforation with fresh blood released by the debriding.

In some embodiments, activating the debridement mechanism comprises using a debriding actuator disposed with the proximally disposed handle of the applicator to

advance at least one debridement blade to the distal end of the stem, and rotate the at least one blade about the circumference of the perforation.

In some embodiments, the method further comprises collecting the removed tissue in a niche of the applicator, and preventing the removed tissue from reaching the middle ear.

In some embodiments, the method further comprises removing the at least one blade from the perforation by using the debridement actuator to retract the at least one blade from the distal end of the applicator.

In some embodiments, using the deployment control to maneuver the filament-based deployment system comprises detaching the patch from a serrated distal tip of the stem in a first detachment stage.

In some embodiments, deploying comprises pulling the patch proximally to come into contact with the internal side of the tympanic membrane by pulling the applicator proximally, and securing the patch to the tympanic membrane using the fresh blood as a glue.

In some embodiments, using the deployment control to maneuver the filament-based deployment system comprises decoupling a cord of the patch from a filament of the applicator in a second detachment stage.

There is provided, in accordance with an embodiment, a biodegradable patch construct having a first thickness and a second thickness.

In some embodiments, the second thickness is from 1.2 to 10 times thicker than said first thickness.

In some embodiments, the biodegradable patch further comprising an upper portion and a bottom portion.

In some embodiments, 0.5% to 20% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection.

In some embodiments, said bottom portion is a uniform surface.

In some embodiments, said upper portion comprises a projection.

In some embodiments, the surface area of the upper portion, the surface area of the bottom portion, or both comprises a cell adhesion molecule.

In some embodiments, the surface area of the upper portion, the surface area bottom portion, or both comprises an anti-inflammatory agent, an antibacterial agent, an antiseptic agent, a healing enhancing agent or any combination thereof.

In some embodiments, said patch is freeze-dried.

In some embodiments, the surface area of the upper portion, the surface area of the bottom portion, or both comprises a chondrocyte, a fibroblast, a chondrocyte precursor, a fibroblast precursor, or any combination thereof.

In some embodiments, the biodegradable patch comprises a hydrogel.

In some embodiments, said hydrogel is selected from the group consisting of polysaccharides, proteins, polyphosphazenes, poly(oxyethylene)-poly(oxypropylene) block polymers, poly(oxyethylene)-poly(oxypropylene) block polymers of ethylene diamine, poly(acrylic acids), poly(methacrylic acids), copolymers of acrylic acid and methacrylic acid, poly(vinyl acetate), and sulfonated polymers.

In some embodiments, said hydrogel is selected from the group consisting of alginate, chitosan, pluronic, collagen, cellulose, agarose and any modification thereof.

There is provided, in accordance with an embodiment, a kit comprising a biodegradable patch as disclosed above, suspended in a sterile wetting solution, and instructions for use in repairing a perforation in a tympanic membrane in a mammal.

There is provided, in accordance with an embodiment, a method of repairing a perforation in a tympanic membrane in a mammal, the method comprising: providing biodegradable patch of claim 28 and implanting the biodegradable patch of claim 28 in the tympanic membrane in the mammal.

In some embodiments, said biodegradable patch of claim 28 is the biodegradable patch of any one of claims 29 to 40.

There is provided, in accordance with an embodiment, a tympanoplastic patch applicator comprising: a distally disposed handle configured with a deployment control mechanism; a proximally disposed deployment stem comprising multiple nested sleeves connected to the handle; two patches, comprising a distally disposed patch superimposed with a proximally disposed patch, wherein the distally disposed patch is configured to be affixed to the distal end of the deployment stem via a distal filament embedded in the deployment stem, and wherein the proximally disposed patch is configured to be affixed to the distal end of the deployment stem via a proximal filament embedded in the deployment stem; and a filament-based deployment system controllable by the deployment control mechanism, wherein the deployment stem is configured to introduce the two patches into the ear canal and penetrate the perforated tympanic membrane with at least the distally disposed patch, and wherein the filament-based deployment system is configured to: deploy the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear, and deploy the proximally disposed patch at the

external side of the perforated tympanic membrane in the outer ear, thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

In some embodiments, the multiple nested sleeves include an inner sleeve and a middle sleeve encasing the inner sleeve, wherein the distal actuation filament is embedded within the inner sleeve thereby affixing the distal patch to the distal end of the inner sleeve, and wherein the proximal actuation filament is embedded within the middle sleeve, thereby affixing the proximal patch to the distal end of the middle sleeve.

In some embodiments, the deployment control mechanism comprises a first deployment actuator disposed on the handle, wherein the first deployment actuator is configured to retract and advance the middle sleeve relative to the inner sleeve.

In some embodiments, the deployment stem is further configured to penetrate the perforated tympanic membrane with the proximally disposed patch, retract the proximal patch from the middle ear through the perforation of the tympanic membrane by retracting the middle sleeve relative to the inner sleeve using the first deployment actuator, and position the proximal patch at the external side of the perforated tympanic membrane in the outer ear, by advancing the middle sleeve relative to the inner sleeve using the first deployment actuator, thereby positioning the proximal patch against the external side of the perforated tympanic membrane.

In some embodiments, the deployment control mechanism comprises a second deployment actuator configured to release the distal patch and the proximal patch from the deployment stem.

In some embodiments, the distal patch is disposed with a distal patch cord configured to engage with the distal filament by looping the proximal end of the distal patch cord over the distal end of the distal filament in the inner sleeve, and

wherein the proximal patch is disposed with a proximal patch cord configured to engage with the proximal filament by looping the proximal end of the proximal patch cord over the distal end of the proximal filament in the middle sleeve, wherein the filament-based deployment system comprises: a first filament locking boss configured to anchor the proximal end of the distal filament to the handle, and a second filament locking boss configured to anchor the proximal end of the proximal filament to the handle, wherein the second deployment actuator is connected to the first and second filament locking bosses, wherein activating the second deployment actuator retracts the

distal and proximal filaments, causing the distal patch cord to disengage from the distal filament and the proximal patch cord to disengage from the proximal filament.

In some embodiments, the deployment control mechanism comprises a debridement actuator configured to control a debridement system, comprising: an outer sleeve of the multiple nested sleeves encasing and connected to the middle sleeve, and at least one protruding blade disposed at a distal end of the outer sleeve, wherein the debridement actuator is configured to rotate the outer sleeve, thereby rotating the protruding blade and causing a debridement of the circumference of the perforation, wherein the first deployment actuator is configured to retract and advance the outer sleeve with the middle sleeve.

In some embodiments, the debridement mechanism further comprises a niche configured to collect debrided tissue.

In some embodiments, a curvature of the at least one protruding blade controls a penetration depth of the blade into the perforation.

In some embodiments, the debridement mechanism further comprises a penetration depth controlling mechanism that limits the penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the middle sleeve.

In some embodiments, the penetration depth controlling mechanism comprises the first deployment actuator.

In some embodiments, the debridement mechanism further comprises a power supply, a motor, and a gear wheel mechanically connecting the motor to the outer sleeve, wherein the debridement control is configured to control the power supply to activate the motor and turn the gear wheel, wherein turning the gear wheel causes the outer sleeve to rotate with the debridement blade.

In some embodiments, the deployment stem is bent, and wherein the first deployment actuator is configured to advance and retract the outer sleeve relative to the middle sleeve over the bend.

In some embodiments, the two patches are constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging from the perforation.

There is provided, in accordance with an embodiment, a tympanoplastic patch applicator comprising: a distally disposed handle configured with a deployment actuator; a proximally disposed deployment stem connected to the handle; two patches,

comprising a distally disposed patch superimposed with a proximally disposed patch, wherein the distally disposed patch is configured to be affixed to the distal end of the deployment stem, and wherein the proximally disposed patch is configured to be affixed to the distal end of the deployment stem; and a deployment mechanism controllable by the deployment actuator, wherein the deployment stem is configured to introduce the two patches into the ear canal and penetrate the perforated tympanic membrane with at least the distally disposed patch, and wherein the deployment mechanism is configured to: deploy the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear, and deploy the proximally disposed patch at the external side of the perforated tympanic membrane in the outer ear, thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

There is provided, in accordance with an embodiment, a method for repairing a tympanic membrane, comprising: introduce two patches, comprising a distally disposed patch superimposed with a proximally disposed patch, into an ear canal via a deployment stem, wherein the distally disposed patch is affixed to the distal end of the deployment stem via a distal filament embedded in the deployment stem, and wherein the proximally disposed patch is affixed to the distal end of the deployment stem via a proximal filament embedded in the deployment stem; penetrating the perforated tympanic membrane with at least the distally disposed patch; deploying the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear; and deploy the proximally disposed patch at the external side of the perforated tympanic membrane in the outer ear, thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

In some embodiments, the deployment stem comprises an inner sleeve wherein the distal actuation filament is embedded within the inner sleeve thereby affixing the distally disposed patch to the distal end of the inner sleeve, wherein penetrating the perforated tympanic membrane with at least the distally disposed patch comprises penetrating the perforated tympanic membrane with at least the inner sleeve.

In some embodiments, the deployment stem further comprises a middle sleeve encasing the inner sleeve, wherein the proximal actuation filament is embedded within the middle sleeve, thereby affixing the proximal patch to the distal end of the middle sleeve, the method further comprising: penetrating the perforated tympanic membrane with both the distally disposed patch together with the proximally disposed patch by

inserting the middle sleeve encasing the inner sleeve through the perforation, retracting the proximal patch from the middle ear through the perforation of the tympanic membrane by retracting the middle sleeve relative to the inner sleeve, and positioning the proximal patch at the external side of the perforated tympanic membrane in the outer ear.

In some embodiments, the method further comprises retracting the deployment stem until the distally disposed patch is flush with the internal side of the perforated tympanic membrane, thereby deploying the distally disposed patch.

In some embodiments, the method further comprises advancing the middle sleeve relative to the inner sleeve until the proximally disposed patch is flush against the external side of the perforated tympanic membrane, thereby deploying the proximally disposed patch.

In some embodiments, the distally disposed patch is disposed with a distal patch cord configured to engage with the distal filament by looping the proximal end of the distal patch cord over the distal end of the distal filament in the inner sleeve, and wherein the proximally disposed patch is disposed with a proximal patch cord configured to engage with the proximal filament by looping the proximal end of the proximal patch cord over the distal end of the proximal filament in the middle sleeve, the method further comprising exerting a tension on the distal and proximal filaments to disengage the distal patch cord from the distal filament and the proximal patch cord from the proximal filament, and release the distally disposed patch and the proximally disposed patch from the deployment stem.

In some embodiments, the method further comprises, prior to deploying the distally disposed patch and the proximally disposed patch, performing a debridement of a circumference of the perforation of the tympanic membrane, wherein deploying the distally disposed patch and the proximally disposed patch further comprises gluing the distally disposed patch and the proximally disposed patch to the perforated tympanic membrane using blood released from the debridement.

In some embodiments, the method further comprises collecting debrided tissue resulting from the debridement.

In some embodiments, performing the debridement comprises: penetrating the perforated tympanic membrane with an outer sleeve encasing the middle sleeve and the inner sleeve, wherein the outer sleeve is disposed with a debridement blade, rotating the outer sleeve, thereby rotating the debridement blade about the circumference of the

perforation, and evacuating the outer and middle sleeves from the middle ear by retracting the outer sleeve together with the middle sleeve through the perforation.

In some embodiments, the method further comprises controlling a penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the inner sleeve.

In addition to the exemplary aspects and embodiments described above, further aspects and embodiments will become apparent by reference to the figures and by study of the following detailed description.

BRIEF DESCRIPTION OF THE FIGURES

Exemplary embodiments are illustrated in referenced figures. Dimensions of components and features shown in the figures are generally chosen for convenience and clarity of presentation and are not necessarily shown to scale. The figures are listed below.

Figs. 1A-1I, show various views of a tympanoplastic patch applicator, in accordance with an embodiment;

Figs. 2A-2F show various views of the tympanoplastic patch applicator of Figs. 1A-1I in an initial deployment stage, in accordance with an embodiment;

Figs. 3A-3F show various views of the tympanoplastic patch applicator of Figs. 1A-1I in a follow-up deployment stage, in accordance with an embodiment;

Figs. 4A-4F show various views of the tympanoplastic patch applicator of Figs. 1A-1I in another follow-up deployment stage, in accordance with an embodiment;

Figs. 5A-5C show various views of a deployed tympanoplastic patch, in accordance with an embodiment; and

Figs. 6A-6C show various views of a tympanoplastic patch, in accordance with an embodiment;

Figs. 7A-7F show multiple exemplary embodiments of a tympanic patch;

Figs. 8A-8F show multiple views of a tympanoplastic patch applicator, in accordance with another embodiment; and

Figs. 9A-9H illustrate a method for deploying two patches using the applicator of Figs. 8A-8E.

DETAILED DESCRIPTION

Disclosed herein is a tympanoplastic patch applicator configured for transcanal approach, and a method for operating the same.

The applicator may introduce at least one biocompatible, and optionally biodegradable patch through a perforation in the tympanic membrane, and deploy the patch over the perforation from the inner side of the tympanic membrane – inside the middle ear. Optionally, the applicator includes a debridement mechanism that removes dead tissue from the circumference of the perforation, wets the circumference with fresh blood, and collects the removed tissue to prevent it from reaching the middle ear.

Reference is now made to Figs. 1A-1I, which show various views of a tympanoplastic patch applicator **100**, in accordance with an embodiment. Fig. 1A shows a side view of applicator **100** and Figs. 1B-1C show two top views of applicator **100**. Fig. 1D shows a side view similar to Fig. 1A, and Fig. 1E shows a detail of section A of Fig. 1D.

Applicator **100** generally includes a proximally disposed handle **102** configured with a deployment control, such as a button **134** moveable within a niche **132**. Handle **102** may be connected to a distally disposed deployment stem **104** which extends from handle **102**, and may be operated so as to deploy a biocompatible optionally biodegradable patch **108** over a perforation in the tympanic membrane. Optionally, patch **108** may be affixed to the distal end of deployment stem **104** via an actuation filament **126** embedded in the deployment stem **104**, and will be described in greater detail below. An actuator **114** and actuator **116** may be provided at the proximal end of stem **104** connecting to the distal end of handle **102** for controlling the deployment of patch **108**.

Stem **104** may position patch **108** at the internal side of a perforated tympanic membrane **142** in the middle ear by introducing patch **108** into the ear canal and penetrating the perforated tympanic membrane with the distal end of the deployment stem **104**, such as illustrated in Fig. 1F. A deployment mechanism provided with applicator **100**, such as may be filament-based, may release patch **108** from the distal end of deployment stem **104** while it's positioned at the internal side of the tympanic membrane, to deploy the patch **108** on the internal side of the perforated tympanic membrane.

The deployment control, provided with proximally disposed handle **102** of applicator **100**, may be used by a surgeon to maneuver the filament-based deployment

system to release patch **108** from the distal end of applicator **100** at the internal side of the tympanic membrane. Thus, patch **108** may be deployed on the internal side of the perforated tympanic membrane using the proximally disposed deployment control provided on handle **102**.

Button **134** may have three positions within niche **132**: A distal position at the beginning of the deployment, shown in Figs. 1A-1C and 2A-2C, a middle position that implements a first stage for releasing patch **108** from stem **104**, shown in Figs. 3A-3C, and a proximal position that implements a second stage for releasing patch **108** from stem **104**, shown in Figs. 4A-4C.

Referring to Fig. 1G, stem **104** may include multiple nested sleeves and substantially concentric cylindrical sleeve, such as an inner sleeve **118**, encased within a middle sleeve **120**, which is encased within an outer sleeve **122**. The multiple sleeves may be telescoping, and may slide longitudinally with respect to each other, allowing each sleeve to advance and retract accordingly.

Optionally, patch **108** is affixed, or supported, at the distal end of middle sleeve **120** encasing inner sleeve **118**, thereby being affixed to, or supported at, the distal end of the deployment stem **104**. Referring to Fig. 1F, a detailed view of the distal end of middle sleeve **120** is shown. Optionally, the distal end **122b** of middle sleeve **120** is serrated to secure the position and/or orientation of patch **108** at distal end **122b**, and prevent or reduce its rotation with respect to the middle sleeve **120**.

Optionally, the distal end **120b** of middle sleeve **120** is beveled, or cut at an angle, such that patch **108** is affixed at an angle that is non-perpendicular to the longitudinal axis of middle sleeve **120**. This may allow aligning the orientation of the patch **108** with the posture, or orientation, of the perforated tympanic membrane.

Optionally, inner sleeve **118** extends along the full length of stem **104**, serving as its rigid core. Inner sleeve **118** may be bent, resulting in a corresponding bend in stem **104** at an area denoted **106**, shown in Fig. 1A, allowing the distal end of stem **104** to be at a different height than the proximal end of handle **102**. Bend **106** may improve a surgeon's control during the deployment of patch **108** by preventing or reducing an obstruction of the line of vision to the distal end of stem **104** due to the surgeon's hand holding the applicator **100** by handle **102**. Thus, when the surgeon grasps handle **102** and inserts stem **104** into a patient's ear canal, the handle **102** and the surgeon's hand do not block his or her view of the canal's internals.

Referring to Fig. 1I, a posture adjustor, such as a second actuator **114**, may be configured with handle **102** and used to align the orientation of patch **108** with the orientation of the perforated tympanic membrane. A middle sleeve actuator **120a**, comprising a tube disposed between second actuator **114** at handle **102** and a proximal side of bend **106**, may convey a rotational motion of actuator **114** to middle sleeve **120** over bend **106**. In one implementation, stem **104** is provided with an inner spring **130** that mechanically connects middle sleeve actuator **120a** to middle sleeve **120**, to allow transferring an adjustment of the posture adjustor, such as a rotation of actuator **114**, to a corresponding adjustment of the orientation of patch **108** over the bend **106**. It may be appreciated that other suitable mechanical elements structured to convey a rotational motion over a bend may be used.

A first activation of the deployment control **134**, such as moving button **134** from a distal position to a middle position within niche **132**, may cause a slight retraction of middle sleeve **120** relative to inner sleeve **118**, such as may range from 3 to 7 millimeters (mm). This may cause the serrated distal end **120b** of the middle sleeve **120** to withdraw proximally from patch **108**, releasing the tension that the serrated end **120b** of middle sleeve **120** applies to patch **108**, thereby releasing patch **108** from the distal end of the middle sleeve **120**. This release may allow the surgeon to position patch **108** in place, while evacuating the tip of middle sleeve **120** from the perforation, serving to enhance the visibility of the perforation by the surgeon.

Referring to Fig. 1H, a detailed cross-sectional view of the base of handle **102** is shown, illustrating a portion of the filament-based deployment system controllable by deployment control **134**. Optionally, the actuation filament **126** is embedded within inner sleeve **118** of stem **104**. Inner sleeve **118** may extend through to handle **102**. Filament **126** may be anchored or secured to handle **102** at its proximal area, for example using glue **140** disposed around the proximal tip of filament **126**, or using any other mechanical means. Filament **126** may be a biocompatible fiber-based thread, such as nylon thread, metallic wire, or other suitable material that allows attaching patch **108** to device and exert a tension to pull patch **108** proximally.

The filament-based deployment system may include an exposable distal end of the inner sleeve **118**, such as a window of a side cutout in its wall, along a length denoted **118a**. Responsive to a rotation or sliding motion of middle sleeve **120** causing inner sleeve **118** to no longer be encased by middle sleeve **120**, the inside of inner sleeve **118** may be exposed at exposable distal end **118a**.

Patch **108**, also shown in Figs. 6A-6C from various angles, is optionally composed of a disc **136** and a securing mechanism **138**. In the embodiment shown in the figures, securing mechanism **138** is a proximally positioned cord **138b** threaded through a hole, optionally central, in disc **136**; the cord may have a wider distal end **138a** that secures it from a distal side of the disc, and a bulgy proximal end **138c**. Disc **136** may have a diameter of 3 to 10 millimeters, and a thickness of 0.1 to 1 millimeters, as one example. Cord **138b** may be between 5 to 50 millimeters long, as one example.

Optionally, patch **108** is constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging in the middle ear at the internal side of the tympanic membrane.

Reference is now made to Fig. 1F which shows a cross section of the distal tip of stem **104**. Patch **108** may be secured at a distal end of stem **104** as follows: Cord **138b** may extend from the distal end of the middle sleeve **120** to the exposable distal end **118a** of the inner sleeve **118** where it engages with actuation filament **126**. Actuation filament **126** may have a bulgy distal end **126a**. The engagement may be implemented by positioning bulge **138c** of cord **138b** proximal to bulge **126a** of filament **126**. When middle sleeve **120** covers exposable distal end **118a**, bulgy distal end **138c** of cord **138b** is prevented from sliding over bulge **126a** of actuation filament **126**, securing bulgy distal end **138c** at sleeve section **118a**. Thus, when middle sleeve **120** encases the exposable distal end **118a** of inner sleeve **118**, patch **108** is affixed at the distal end of the middle sleeve **120**.

A second activation of the deployment control **134**, such as moving button **134** from a middle position to a proximal position within niche **132**, may cause middle sleeve **120** to withdraw proximally with respect to the inner sleeve **118** and expose the exposable distal end **118a**, allowing bulge **138c** to slide distally over bulge **126a** and exit the inner sleeve through its distal end. This disengages cord **138b** from actuation filament **126** and release patch **108** from the tympanoplastic patch applicator **100**.

Optionally, the deployment control is provided with a safety mechanism configured to prevent an accidental second activation of the deployment control. The safety mechanism may be implemented as a stopper, such as a small protrusion or step within niche **132** that requires moving button **134** sideways before moving from the middle to the proximal positions.

Reference is now made to Figs. 2D-2F which illustrate a debridement mechanism of applicator **100**, in accordance with an embodiment. Fig. 2D shows a side view of

applicator 100; Fig. 2E shows a detailed view of section B of Fig. 2D; and Fig. 2E shows a detailed cross-sectional view of blades **110a-b** penetrating perforation **142a** of the tympanic membrane **142**. The debridement mechanism may include outer sleeve **122**, outer sleeve actuator **116** disposed with handle **102**, and at least one protruding blade **110** disposed at a distal end of the outer surface of outer sleeve **122**. Optionally, the at least one protruding blade **110** is implemented by two protruding, curved blades **110a-b**. The curvature of blades **110a-b** may control a penetration depth of the blades **110a-b** into the perforation.

Outer sleeve actuator **116** may be a tube disposed between handle **102** and a proximal side of bend **106**, and may control the advancement and retraction of outer sleeve **122** to and from the distal end of stem **104**, thereby controlling the debridement mechanism. Optionally, actuator **116** may convey motion to the outer sleeve **122** over bend **106**, such as via an outer spring **128**, as shown in Fig. 1G, or other suitable mechanical element structured to convey motion over a bend. Outer spring **128** may be disposed on stem **104** and may mechanically connect actuator **116** to outer sleeve **122** via a connecting ring **124**. Spring **128** may transfer a motion, such as an advancement, retraction, or rotation of the debridement actuator **116** to outer sleeve **122** over the bend **106** of deployment stem **104**, thereby enabling the advancement and retraction of the outer sleeve **122** relative to the middle sleeve **120** over the bend **106**. This allows actuator **116** to control the debridement mechanism over bend **106**.

Referring to Fig. 2D, advancing actuator **116** distally away from actuator **114** at the proximal base of stem **104** may advance outer sleeve relative **122** to the middle sleeve **120** until blade(s) **110a-b** reach the distal end of the deployment stem **104**, as shown in Fig. 2E, until blades **110a-b** and come into contact with the circumference of the perforation, as illustrated in Fig. 2F. Rotating actuator **116** may rotate outer sleeve **122** relative to the middle sleeve **120**, thereby rotating the protruding blade(s) **110a-b** and causing a debridement of the circumference of the perforation. Retracting actuator **116** may retract outer sleeve **122** relative to the middle sleeve **120**, retracting blades **110a-b** once the debridement has been completed.

Optionally, the debridement mechanism further comprises a niche for collecting debrided tissue. For example, the area delimited between the curvature of at least one of blades **110a-b** and the outer surface of outer sleeve **122** may form the niche where debrided tissue may collect during the debridement, preventing this tissue from falling into the middle ear.

Optionally, the debridement mechanism includes a penetration depth controlling mechanism that limits the penetration depth of blades **110a-b** by limiting the advancement of outer sleeve **122** relative to the middle sleeve **120**. For example, the penetration depth controlling mechanism may be implemented by ring **150**, shown in Fig. 1G. Ring **150** may block the distal extension of outer sleeve **122** by engaging with the inner surface of actuator **116** as actuator **116** is pushed distally, preventing blades **110a-b** from penetrating too deeply into the perforation and thereby preventing any further damage to the tympanic membrane by blades **110a-b**. For example, ring **150** may prevent outer sleeve **122** from extending distally beyond middle sleeve **120**.

The following steps describe a method for deploying a tympanoplastic patch at the internal side of a perforated tympanic membrane using applicator **100**:

Step 1: Referring to Figs. 1A-1F, when actuator **116** is positioned flush with actuator **114** at the distal end of handle **102**, outer sleeve **122** is retracted, exposing middle sleeve **120** with patch **108** affixed to serrated distal end **120b**, and comprising the distal end of distally disposed stem **104** of applicator **100**. Thus exposed, patch **108** may be introduced into a patient's ear canal by inserting the distal end of stem **104** into the ear canal.

Step 2: The distal end of stem **104** may be progressed therein until patch **108** penetrates through the perforation **142a** in the tympanic membrane **142**. Patch **108**, constructed from a resilient material, flexes to fit through the perforation and restores its original disc shape when emerging in the middle ear, at the distal side of the tympanic membrane.

The deployment control, provided with proximally disposed handle **102** of applicator **100**, may be used to maneuver the filament-based deployment system that releases patch **108** from the distal end of stem **104** at the internal side of the tympanic membrane, and the patch may be deployed on the internal side of the perforated tympanic membrane, as follows:

Step 3: If needed, while patch **108** is positioned at the internal side of the tympanic membrane, the posture of patch **108** may be adjusted to align the orientation of patch **108** with the orientation of the perforated tympanic membrane **142** by using a posture adjustor, implemented by second actuator **114** provided with proximally disposed handle **102**. Rotating the posture adjustor **114** rotates middle sleeve **120** of applicator **100** through a rotation of inner spring **130**. Since patch **108** is secured to beveled and serrated

distal end **120b** of the middle sleeve **120**, rotating sleeve **120** adjusts the posture of patch **108**, accordingly.

Reference is not made to Figs. 2A-2F, which show various views of the tympanoplastic patch applicator of Figs. 1A-1I in an initial deployment stage, in accordance with an embodiment. Figs. 2A-2F show a debridement mechanism that may be activated to debride dead tissue from the circumference of perforation **142a**. As a result, the circumference of the debrided perforation may be wetted with fresh blood released by the debridement. The debridement may be activated, as follows:

Step 4: To activate the debridement mechanism, debriding actuator **116**, disposed with the proximally disposed handle **102** of applicator **100**, may be used to advance at least one debridement blade, such as blades **110a-b**, to the distal end of stem **104**, as follows: outer sleeve **122** may be advanced distally by grasping and pushing actuator **116**, positioned at the proximal base of stem **104**, distally. As shown in Figs. 1G and 1I, actuator **116** is attached to outer spring **128** which is, in turn, attached to outer sleeve **122** via a ring **124**. Thus, pushing first actuator **116** distally away from actuator **114** causes outer spring **128** to be pushed distally, which causes outer sleeve **122** disposed with blades **110a-b** to be extended distally, and encase the distal end of middle sleeve **122**. This positions blades **110a-b** flush with the distal end of stem **104** for debridement of the tympanic membrane.

Step 5: Positioned thus, rotating first actuator **116** rotates outer sleeve **122** which rotates blades **110a-b** about the circumference of the perforation **142a**, causing a debridement of the perforated tympanic membrane **142**.

Step 6: The removed tissue may be collected in a niche of applicator **100**, formed between curved blades **110a-b** and sleeve **122**, preventing the removed tissue from reaching the middle ear.

Reference is now made to Figs. 3A-3F which show various views of the tympanoplastic patch applicator of Figs. 1A-1I in a follow-up deployment stage, in accordance with an embodiment.

Step 7: Referring to Figs. 3A-3C, the at least one blade **110a-b** may be removed from the perforation by using the debridement actuator **116** to retract the at least one blade from the distal end of the applicator **100**, as follows: outer sleeve **122** may be retracted by pulling actuator **116** proximally towards actuator **114** causing outer sleeve **122** to retract, removing blades **110a-b** from perforation **142a**. This is illustrated in the contrast between Fig. 2A, which shows actuator **116** positioned distally from actuator

114 with a gap therebetween, and resulting in the advancement of outer sleeve **122**, versus Fig. 3A, which shown actuator **116** flush with actuator **114** at the proximal base of stem **104**, and resulting in the retraction of outer sleeve **122**.

Additionally, the deployment control, comprising button **134** and niche **132**, may be used to maneuver the filament-based deployment system and detach patch **108** from serrated distal tip **120b** of stem **104** in a first detachment stage, as follows:

Step 8: Referring to Figs. 3A-3F, button **134** may be moved from the distal position in niche **132**, as shown in Figs. 1A-1C, to the middle position in niche **132**, as shown in Figs. 3A-3C, causing serrated tip **120b** of middle sleeve **120** to detach from patch **108** and release the applied tension, thus leaving patch **108** attached to applicator **100** only by the engagement of cord **138b** with filament **126**. Fig. 3E, which is a detailed view of section D of Fig. 3D, shows patch **108** in the first stage of detachment from applicator **100**.

Step 9: Referring to Fig. 3F, the deployment of patch **108** may continue by pulling the entire applicator **100** proximally, causing inner sleeve **118** to be retracted proximally. This proximal motion causes patch **108** to be pulled proximally until it comes into contact with the internal side of the tympanic membrane **142**. Patch **108** may then be secured to the tympanic membrane using the fresh blood, released by the debridement, as a glue. inner sleeve **118** may then be retracted by pulling applicator **100** proximally.

Reference is now made to Figs. 4A-4F which show various views of the tympanoplastic patch applicator of Figs. 1A-1I in a follow-up deployment stage, in accordance with an embodiment. The deployment control may be used to maneuver the filament-based deployment system to decouple cord **138b** of patch **108** from filament **126** of applicator **100**, in a second detachment stage:

Step 10: Referring to Figs. 4A-4F, button **134** may be moved from the middle position in niche **132**, as shown in Figs. 3A-3C, to the proximal position in niche **132**, as shown in Figs. 4A-4C, causing middle sleeve **120** to withdraw proximally with respect to the inner sleeve **118** and expose the exposable distal end **118a**, allowing bulge **138c** to slide distally over bulge **126a** and exit the inner sleeve through its distal end. This disengages cord **138b** from actuation filament **126** and releases patch **108** from the tympanoplastic patch applicator **100**, comprising the second detachment stage. As can be seen in Fig. 1I, inner spring **130**, mechanically connects middle sleeve actuator **120a** to middle sleeve **120**, and button **134** is mechanically connected to middle sleeve actuator **120a** within handle **102**, thus a proximal motion by button **134** may cause a

corresponding proximal motion of middle sleeve actuator **120a**, retracting middle sleeve **120** with respect to inner sleeve **118**, accordingly. This exposes distal end **118a**, allowing cord **138b** to disengage from filament **126**.

Reference is now made to Figs. 5A-5C which, taken together, show patch **108** after it has been released from applicator **100**. Fresh blood (not shown) released as a result of the debridement of the perforation may serve to secure patch **108** in place, attached to the inner side of the tympanic membrane and covering the perforation. Optionally, the surgeon may wait several minutes prior to releasing patch **108** from applicator **100**, to enable the blood to at least partially coagulate and essentially glue the patch to the inner side of the tympanic membrane. Alternatively, biological glue may be injected to the interface between patch **108** and the inner side of the tympanic membrane before contact between the two is made. This may be performed using an injection channel in stem **104** (not shown).

Following the above procedure, and over a typical period of several weeks, new cells may grow at the circumference of the perforation, slowly closing the perforation. The proximal side of patch **108** may serve as a bedding for this cellular growth. Patch **108** may eventually degrade leaving a fully, repaired tympanic membrane without any external remnants.

Reference is now made to Figs. 7A-7F, which show multiple exemplary embodiments of a tympanic patch, such as any of patches **108**, and **808P** and **808D** described below.

The present invention discloses, in one embodiment, a biodegradable patch construct having a first thickness and a second thickness. Optionally, disclosed herein a unitary biodegradable patch construct having a first thickness and a second thickness. Optionally, a biodegradable patch comprises hydrogel. Optionally, a biodegradable patch consists a hydrogel or a combination of hydrogels.

"hydrogel", in some embodiments, is a substance formed when an organic polymer (natural or synthetic) is set or solidified to create a three-dimensional open-lattice structure that entraps molecules of water or other solution to form a gel. The solidification can occur, e.g., by aggregation, coagulation, hydrophobic interactions, temperature change, pH change or cross-linking. The hydrogels employed in this invention rapidly solidify to keep the cells evenly suspended within a mold until the gel solidifies. The hydrogels are also biocompatible, e.g., not toxic, to cells, e.g., cells suspended in the hydrogel, or in the surrounding membrane.

Any hydrogel composition known to one skilled in the art is encompassed within the invention, e.g., any of the hydrogel compositions disclosed in the following reviews: Graham, 1998, *Med. Device Technol.* 9(1): 18-22; Peppas et al, 2000, *Eur. J. Pharm. Biopharm.* 50(1): 27-46; Nguyen et al, 2002, *Biomaterials*, 23(22): 4307-14; Henin et al, 2002, *Adv. DrugDeliv. Rev* 54(1): 13-36; Skelthorne et al, 2002, *Med. Device Technol.* 13(9): 19-23; Schmedlen et al, 2002, *Biomaterials* 23: 4325-32; all of which are incorporated herein by reference in their entirety.

Optionally, the patch comprises biodegradable and biocompatible polymers. Optionally, a biodegradable polymer and/or biocompatible polymer is a hydrogel. Optionally, the biodegradable and biocompatible polymers based patch comprises: polysaccharides, proteins, polyphosphazenes, poly(oxyethylene)-poly(oxypropylene) block polymers, poly(oxyethylene)-poly(oxypropylene) block polymers of ethylene diamine, poly(acrylic acids), poly(methacrylic acids), copolymers of acrylic acid and methacrylic acid, poly(vinyl acetate), sulfonated polymers, or any combination thereof. Optionally, the biodegradable biocompatible patch comprises: alginate, chitosan, pluronic, collagen, agarose, gelatin, cellulose or any combination thereof. Optionally, the biodegradable biocompatible patch comprises of chemical and physical modifications of these polymers.

A "hydrogel-cell composition" is a suspension of a hydrogel comprising cells. These cells can be isolated directly from a tissue source or can be obtained from a cell culture. A "tissue" is a collection or aggregation of particular cells embedded within its natural matrix, wherein the natural matrix is produced by the particular living cells.

Optionally, a suitable polymer hydrogel according to the invention is one that is biologically compatible and non-cytotoxic. Optionally, a suitable polymer hydrogel according to the invention is one that is formed through controllable crosslinking (gelation). Optionally, a suitable polymer hydrogel according to the invention is one that is compatible with viability of cells suspended in a solution.

Optionally, provided herein a biodegradable patch construct ("patch" or "construct") having a first thickness and a second thickness. Optionally, provided herein a biodegradable patch comprising an upper portion and a bottom portion. In some embodiment, a portion as used herein is synonymous with "surface".

Optionally, the second thickness is from 1.2 to 100 times thicker than said first thickness. Optionally, the second thickness is from 1.2 to 50 times thicker than said first thickness. Optionally, the second thickness is from 5 to 60 times thicker than said first

thickness. Optionally, the second thickness is from 3 to 25 times thicker than said first thickness.

Optionally, the second thickness is a result of a projection from the upper portion. Optionally, the second thickness is a result of a projection from the bottom portion. Optionally, the second thickness is a result of projections from both the upper and bottom portions (see the crossed lines in the patch of Fig. 7E). Optionally, the second thickness results from thickening of a segment of the upper portion, the bottom portion, or both. Optionally, the second thickness provides structural support for the patch. Optionally, the second thickness enables the patch be present in a folded position and in an open position (as further described herein). Optionally, the second thickness renders the patch fully open by default. Optionally, a patch as described herein is in an open configuration unless it is attached or contained within a patch-tympanic membrane insertion device. Optionally, a patch as described herein is in an open configuration unless it is associated with a patch-tympanic membrane insertion device. Optionally, the bottom portion is portion which is adapted or configured to face the tympanic membrane. Optionally, the bottom portion is the tympanic membrane portion of the patch.

Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 3 in Fig. 7C. Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 4 in Fig. 7C. Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 3 in Fig. 7C and at least one projection such as element 4 in Fig. 7C. Optionally, a patch of the invention comprises a first thickness such as element 1 in Fig. 7C.

Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 3 in Fig. 7F. Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 4 in Fig. 7F. Optionally, a patch of the invention comprises a second thickness in the form of at least one projection such as element 3 in Fig. 7F and at least one projection such as element 4 in Fig. 7F. Optionally, a patch of the invention comprises a first thickness such as element 1 in Fig. 7F. Optionally, a first thickness is the base thickness of the patch (element 1 of figs. 7C and 7F). Optionally, a second thickness provides physical support to the patch. Optionally, a second thickness provides attachments means to the tympanic membrane such as element 3 in Fig. 7C.

Optionally, 0.1% to 20% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection. Optionally, 0.05% to 10% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection. Optionally, 0.5% to 20% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection. Optionally, 0.1% to 5% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection. Optionally, 1% to 10% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection. Optionally, 0.05% to 4% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection.

Optionally, the bottom surface is free of projections as described herein. Optionally, the bottom surface comprises pores. Optionally, the bottom portion has a uniform surface.

Optionally, the surface area of the upper portion, the surface area of the bottom portion, or both comprises a cell adhesion molecule. Optionally, the surface area of the upper portion, the surface area of the bottom portion, or both comprises: an anti-inflammatory agent, an antibacterial agent, an antiseptic agent, a healing enhancing agent, factor XIII, Thrombin, an adherence enhancer agent or any combination thereof. Optionally, the surface area of the upper portion, the surface area of the bottom portion, or both comprises a chondrocyte, a fibroblast, a chondrocyte precursor, a fibroblast precursor, a mesenchymal cell, or any combination thereof.

Optionally, the patch is dried. Optionally, the patch is hydrated. Optionally, the patch is dried.

Optionally, provided herein a kit comprising the biodegradable patch, suspended in a sterile wetting solution, and instructions for use in repairing a perforation in a tympanic membrane in a mammal. Optionally, provided herein the sterile wetting solution can consist of saline, calcium chloride, an anti-inflammatory agent, an antibacterial agent, an antiseptic agent, a healing enhancing agent, factor XIII, Thrombin, an adherence enhancer agent or any combination thereof.

Optionally, provided herein method of repairing a perforation in a tympanic membrane in a mammal, the method comprising: providing biodegradable patch and implanting the biodegradable patch in a mammal's tympanic membrane.

In another specific embodiment, the patch is of a single layer with predefined thickness. In another specific embodiment, the patch is of a single layer with at least two

predefined thicknesses. In another specific embodiment, the patch is a laminate of two or more layers.

In another specific embodiment, the patch is hydrated prior to contacting with the tympanic membrane. Optionally, the patch is between about 20 micrometers and about 200 micrometers in thickness in the dry state. Optionally, the patch is between about 10 micrometers and about 140 micrometers in thickness in the dry state. Optionally, the patch is between about 10 micrometers and about 100 micrometers in thickness in the dry state. Optionally, the patch is between about 80 micrometers and about 400 micrometers in thickness in the dry state.

Optionally, a patch is at least 20 microns in thickness. Optionally, the first thickness is 20 to 80 microns thick. Optionally, the first thickness is 30 to 60 microns thick. Optionally, the measures of thickness and density are provided for the dry state or the substantially dried state of the patch. Optionally, the measures of thickness and density are provided for the hydrated state of the patch.

Optionally, a hydrated patch has a thickness between about 0.05 and 0.8 mm. Optionally, a hydrated patch has a thickness between about 0.1 and 0.8 mm. Optionally, a hydrated patch has a thickness between about 0.1 and 0.5 mm. Optionally, a first thickness of the hydrated patch has a thickness between about 0.05 to 0.4 mm. Optionally, a first thickness of the hydrated patch has a thickness between about 0.1 to 0.3 mm.

Optionally, a dry or a substantially dry patch (such as but not limited to a collagen of all types, either non cross-linked or cross-linked) has a density of 0.05 g/cm² to about 1 g/cm². Optionally, a dry or a substantially dry patch has a density of 0.05 g/cm² to about 0.8 g/cm². Optionally, a dry or a substantially dry patch has a density of 0.1 g/cm² to about 0.8 g/cm². Optionally, a dry or a substantially dry patch has a density of 0.1 g/cm² to about 0.5 g/cm².

Optionally, a patch is a scaffold. Optionally, a patch as described herein is adapted to be inserted via the middle ear and onto the inner side of the tympanic membrane. Optionally, a patch as described herein is adapted to withstand pressure changes in the ear cavity, as well as shear forces. Optionally, a patch as described herein is adapted to adhere to the edges of the tympanic membrane tissue, in order to allow for hermetic closure. Optionally, a patch as described herein is adapted to promote cell proliferation, cell migration and cell differentiation. Optionally, a patch as described herein is adapted to promote cell migration.

Optionally, the upper portion, the lower portion or both sides of the patch comprise rough and/or ragged surface which promotes adherence to the tympanic membrane and/or adherence of cells attached to the patch. Optionally, the upper portion, the lower portion or both sides of the patch comprise sub-micron and/or micron sized pores which promote adherence to the tympanic membrane and/or adherence of cells attached to the patch.

Optionally, the upper portion, the lower portion or both sides of the patch comprise 0.1 micrometer to 1 micrometer (diameter of the pore) pores which promote adherence to the tympanic membrane and/or adherence of cells attached to the patch. Optionally, the upper portion, the lower portion or both sides of the patch further comprise a graft layer laminated to a surface of the patch. Optionally, a graft layer is a layer which promotes cell survival, cell proliferation, cell maturation, cell migration or any combination thereof. Optionally, a graft layer is composed of a hydrogel. Optionally, a graft layer further comprises cell adhesion molecules, growth factors, proteins, carbohydrates, cytokines, chemokines or any combination thereof.

Optionally a patch as described herein is in a folded position (for insertion) or in an open position (placement position). Optionally a patch as described herein is pre packed (folded) and contained within an ear/tympanic membrane insertion device which spreads flat the patch in proximity to the tympanic membrane. Optionally, a patch as described herein has structural memory of its flat appearance as well as strength and flexibility withstanding the folding through shelf life storage. Optionally, a patch as described herein comprises a string or an anchor for attaching it to the insertion device (see Fig. 7A).

Optionally a patch as described herein comprises a concentric cord, string, filament, or wire for attaching it to the insertion device. Optionally, a patch as described herein comprises an absorbable spring (Fig. 7B) serving as a tissue anchor which is screwed into the tympanic membrane thus connecting the patch to the tympanic membrane. Optionally, an absorbable sponge is attached to a surface of the bottom portion (facing the tympanic membrane) of the patch to fixate the patch onto the tympanic membrane (see Fig. 7C).

Optionally, a patch as described herein is rounded. Optionally, a patch as described herein has a shape of a circle. Optionally, a patch as described herein has a shape of a rectangular. Optionally, a patch as described herein has a shape of an ellipse.

Optionally, a patch as described herein comprises suture on its upper portion, on its lower portion or both (see Fig. 7D). Optionally, a patch comprising a suture is made by electrospinning of the hydrogel polymer. Optionally, a suture is connected to a first thickness. Optionally, a suture is further connected to a first thickness via the threads (element 2 in fig. 7F). Optionally, the threads (element 2 in fig. 7F) ensure that the inserted folded patch is fully open upon approach to the tympanic membrane. Optionally, the threads (element 2 in fig. 7F) ensure that the inserted folded patch is fully opened upon attachment to the tympanic membrane. Optionally, the threads are stretchers, stretching-opening the patch upon or prior to contacting the patch with the tympanic membrane.

Optionally, the height of the suture is at least 5 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is at least 50 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 10 to 50 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 20 to 2000 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 20 to 500 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 100 to 800 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both.

Optionally, the height of the suture is 500 to 4000 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 500 to 1500 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 200 to 1200 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both. Optionally, the height of the suture is 400 to 1000 times the thickness of the thickest portion of the upper portion of the patch, lower portion of the patch, or both.

Optionally, the polymer hydrogel or "hydrogel" is an alginate or a salt thereof. Optionally, a suitable polymer hydrogel according to the invention comprises a polysaccharide. Optionally, a suitable polymer hydrogel according to the invention comprises a polyphosphazene. Optionally, a suitable polymer hydrogel according to the

invention comprises a polyacrylate. Optionally, a suitable polymer hydrogel according to the invention comprises a poly(oxyethylene)-poly(oxypropylene). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(oxyethylene)-poly(oxypropylene). Optionally, a suitable polymer hydrogel according to the invention comprises any combination of: chitosan, polyesters, poly urethans, polyimides, poly carbonate, PLLA, PLA, PLGA.

Optionally, a suitable polymer hydrogel according to the invention comprises a poly(phosphazene). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(acrylic acid). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(methacrylic acid). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(vinyl amine). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(vinyl pyridine). Optionally, a suitable polymer hydrogel according to the invention comprises a poly(vinyl imidazole).

Optionally, a suitable polymer hydrogel according to the invention comprises a polyphosphazene. Optionally, a suitable polymer hydrogel according to the invention comprises a collagen. Optionally, a suitable polymer hydrogel according to the invention comprises ethylene diamine, poly(acrylic acids), poly(methacrylic acids), copolymers of acrylic acid and methacrylic acid, poly(vinyl acetate), sulfonated polymers, or any combination thereof. Optionally, the hydrogel is alginate, chitosan, pluronic, collagen, agarose, or any combination thereof.

Optionally, a suitable polymer hydrogel according to the invention comprises collagen. Optionally, a suitable polymer hydrogel according to the invention comprises non- protease-treated collagen. Optionally, the collagen is not cross-linked, e.g., the collagen is not fixed. Optionally, the collagen is partially cross-linked. Optionally, the collagen is cross-linked. Optionally, the collagen is substantially dry prior to use within a patient. Optionally, the collagen comprises 25% or less water by weight. Optionally, the collagen comprises 20% or less water by weight. Optionally, the collagen comprises 15% or less water by weight. Optionally, the collagen comprises 2% to 20% water by weight.

Optionally, collagen is placenta- derived amniotic derived or chorion derived. Optionally, collagen is derived from a transgenic plant. Optionally, one of skill in the art can readily choose a collagen from various sources.

Optionally, collagen is a mixture of collagen types I, III and IV. Optionally, a hydrogel or a collagen further comprises fibrin, fibronectin, elastin, glycosaminoglycans, proteoglycans, or any combinations thereof.

Optionally, a patch as described herein comprises a cell growth factors such as but not limited to PDGF, VEGF, FGF, TGF β , an interleukin, a cytokine or any combination thereof. Optionally, a patch as described herein induces the migration of fibroblasts and macrophages, and thus the promotion of wound healing.

Optionally, a patch as described herein is impregnated or coated with a bioactive compound, such as but not limited to: small organic molecules (e.g., drugs), antibiotics (such as Clindamycin, Minocycline, Doxycycline, Gentamycin), hormones, growth factors, anti-tumor agents, anti-fungal agents, anti-viral agents, pain medications, anti-histamines, anti-inflammatory agents, anti-infectives including but not limited to metals, metal-oxides and/or silver (such as silver salts, including but not limited to silver nitrate and silver sulfadiazine), elemental silver, antibiotics, bactericidal enzymes (such as lysozyme), wound healing agents (such as cytokines including but not limited to PDGF, TGF; thymosin), hyaluronic acid as a wound healing agent, wound sealants (such as fibrin with or without thrombin), cellular attractant and scaffolding reagents (such as added fibronectin) and the like.

Optionally, a patch as described herein is impregnated or coated with small organic molecules such as specific inhibitors of particular biochemical processes e.g., membrane receptor inhibitors, kinase inhibitors, growth inhibitors, anticancer drugs, antibiotics, etc.

Optionally, a patch as described herein is impregnated or coated with a macrolide (e.g., tobramycin (Tobi®)), a cephalosporin (e.g., cephalexin (Keflex®)), cephradine (Velosef®), cefuroxime (Ceftin®, cefprozil (Cefzil®), cefaclor (Ceclor®), cefixime (Suprax® or cefadroxil (Duricef®)), a clarithromycin (e.g., clarithromycin (Biaxin)), an erythromycin (e.g., erythromycin (EMycin®)), a penicillin (e.g., penicillin V (V-CillinK® or Pen VeeK®)) or a quinolone (e.g., ofloxacin (Floxin®), ciprofloxacin (Cipro®) ornorfloxacin (Noroxin®)), aminoglycoside antibiotics (e.g., apramycin, arbekacin, bambarmycins, butirosin, dibekacin, neomycin, neomycin, undecylenate, netilmicin, paromomycin, ribostamycin, sisomicin, and spectinomycin), amphenicol antibiotics (e.g. , azidamfenicol, chloramphenicol, florfenicol, and thiamphenicol), ansamycin antibiotics (e.g., rifamide and rifampin), carbacephems (e.g., loracarbef), carbapenems (e.g., biapenem and imipenem), cephalosporins (e.g., cefaclor, cefadroxil,

cefamandole, cefatrizine, cefazedone, cefozopran, cefpimizole, cefpiramide, and cefpirome), cephamycins (e.g., cefbuperazone, cefinetazole, and cefminox), monobactams (e.g., aztreonam, carumonam, and tigemonam), oxacephems (e.g., flomoxef, and moxalactam), penicillins (e.g., amdinocillin, arndinocillin pivoxil, amoxicillin, bacampicillin, benzylpenicillinic acid, benzylpenicillin sodium, epicillin, fenbenicillin, floxacillin, penamccillin, penethamate hydriodide, penicillin o-benethamine, penicillin O, penicillin V, penicillin V benzathine, penicillin V hydrabamine, penimepicycline, and phencihicillin potassium), lincosamides (e.g., clindamycin, and lincomycin), macrolides (e.g., azithromycin, carbomycin, clarithromycin, dirithromycin, erythromycin, and erythromycin acistrate), amphomycin, bacitracin, capreomycin, colistin, enduracidin, enviomycin, tetracyclines (e.g., apicycline, chlortetracycline, clomocycline, and demeclocycline), 2,4-diaminopyrimidines (e.g., brodimoprim), nitrofurans (e.g., furaltadone, and furazolium chloride), quinolones and analogs thereof (e.g., cinoxacin, ciprofloxacin, clinafloxacin, flumequine, and grepagloxacin), sulfonamides (e.g., acetyl sulfamethoxypyrazine, benzylsulfamide, noprylsulfamide, phthalylsulfacetamide, sulfachrysoidine, and sulfacytine), sulfones (e.g., diathymosulfone, glucosulfone sodium, and solasulfone), cycloserine, mupirocin and tuberin.

Optionally, a patch as described herein is impregnated or coated with an antifungal agent. Suitable antifungal agents include but are not limited to amphotericin B3 itraconazole, ketoconazole, fluconazole, intrathecal, flucytosine, miconazole, butoconazole, clotrimazole, nystatin, terconazole, tioconazole, ciclopirox, econazole, haloprogrin, naftifine, terbinafine, undecylenate, and griseofuldin.

Optionally, a patch as described herein is impregnated or coated with an anti-inflammatory agent. Useful antiinflammatory agents include, but are not limited to, non-steroidal anti-inflammatory drugs such as salicylic acid, acetylsalicylic acid, methyl salicylate, diflunisal, salsalate, olsalazine, sulfasalazine, acetaminophen, indomethacin, sulindac, etodolac, mefenamic acid, meclofenamate sodium, tolmetin, ketorolac, dichlofenac, ibuprofen, naproxen, naproxen sodium, fenoprofen, ketoprofen, flurbiprofen, oxaprozin, piroxicam, meloxicam, ampiroxicam, droxicam, pivoxicam, tenoxicam, nabumetome, phenylbutazone, oxyphenbutazone, antipyrine, aminopyrine, apazone and nimesulide; leukotriene antagonists including, but not limited to, zileuton, aurothioglucose, gold sodium thiomalate and auranofm; and other anti-inflammatory

agents including, but not limited to, methotrexate, colchicine, allopurinol, probenecid, sulfinpyrazone and benzbromarone.

Optionally, a patch as described herein is impregnated or coated with an antiviral agent. Useful antiviral agents include, but are not limited to, nucleoside analogs, such as zidovudine, acyclovir, gangcyclovir, vidarabine, idoxuridine, trifluridine, and ribavirin, as well as foscarnet, amantadine, rimantadine, saquinavir, indinavir, ritonavir, and the alpha-interferons.

Optionally, a patch as described herein is impregnated or coated with a cytokine receptor modulator. Examples of cytokine receptor modulators include, but are not limited to, soluble cytokine receptors (e.g., the extracellular domain of a TNF- α receptor or a fragment thereof, the extracellular domain of an IL-10 receptor or a fragment thereof, and the extracellular domain of an IL-6 receptor or a fragment thereof), cytokines or fragments thereof (e.g., interleukin (IL)-2, IL-3, IL-4, IL-5, IL-6, IL-7, IL-8, IL-9, IL-10, IL-11, IL-12, IL-15, TNF- α , TNF- β , interferon (IFN)- α , IFN- β , IFN- γ , and GM-CSF), anti-cytokine receptor antibodies (e.g., anti-IFN receptor antibodies, anti-IL-2 receptor antibodies (e.g., Zenapax (Protein Design Labs)), anti-IL-4 receptor antibodies, anti-IL-6 receptor antibodies, anti-IL-10 receptor antibodies, and anti-IL-12 receptor antibodies), anti-cytokine antibodies (e.g., anti-IFN antibodies, anti-TNF- α antibodies, anti-IL-10 antibodies, anti-IL-6 antibodies, anti-IL-8 antibodies (e.g., ABX-IL-8 (Abgenix)), and anti-IL-12 antibodies). In a specific embodiment, a cytokine receptor modulator is IL-4, IL-10, or a fragment thereof. Optionally, a cytokine receptor modulator is an anti-IL-1 antibody, anti-IL-6 antibody, anti-IL-12 receptor antibody, or anti-TNF- α antibody. Optionally, a cytokine receptor modulator is the extracellular domain of a TNF- α receptor or a fragment thereof. In certain embodiments, a cytokine receptor modulator is not a TNF- α antagonist.

Optionally, a patch as described herein is impregnated or coated with proteins, polypeptides or peptides (including antibodies) that are utilized as immunomodulatory agents are derived from the same species as the recipient of the proteins, polypeptides or peptides so as to reduce the likelihood of an immune response to those proteins, polypeptides or peptides.

Optionally, a patch as described herein is impregnated or coated with a cytokine. Examples of cytokines include, but are not limited to, colony stimulating factor 1 (CSF-1), interleukin-2 (IL-2), interleukin-3 (IL-3), interleukin-4 (IL-4), interleukin-5 (IL-5), interleukin-6 (IL-6), interleukin-7 (IL-7), interleukin-9 (IL-9), interleukin-10 (IL-10),

interleukin-12 (IL-12), interleukin 15 (IL-15), interleukin 18 (IL-18), insulin-like growth factor 1 (IGF-I), platelet derived growth factor (PDGF), erythropoietin (Epo), epidermal growth factor (EGF), fibroblast growth factor (FGF) (basic or acidic), granulocyte macrophage stimulating factor (GM-CSF), granulocyte colony stimulating factor (G-CSF), heparin binding epidermal growth factor (HBEGF), macrophage colony stimulating factor (M-CSF), prolactin, and interferon (IFN), e.g., IFN- α , and IFN- γ), transforming growth factor alpha (TGF- α), TGF β 1, TGF β 2, tumor necrosis factor alpha (TNF- α), vascular endothelial growth factor (VEGF), hepatocyte growth factor (HGF), etc.

Optionally, a patch as described herein is impregnated or coated with a hormone. Examples of hormones include, but are not limited to, luteinizing hormone releasing hormone (LHRH), growth hormone (GH), growth hormone releasing hormone, ACTH, somatostatin, somatotropin, somatomedin, parathyroid hormone, hypothalamic releasing factors, insulin, glucagon, enkephalins, vasopressin, calcitonin, heparin, low molecular weight heparins, heparinoids, synthetic and natural opioids, insulin thyroid stimulating hormones, and endorphins. Examples of β -interferons include, but are not limited to, interferon β 1-a and interferon β 1-b.

Optionally, a patch as described herein is impregnated or coated with an alkylating agent. Examples of alkylating agents include, but are not limited to nitrogen mustards, ethylenimines, methylmelamines, alkyl sulfonates, nitrosoureas, triazenes, mechlorethamine, cyclophosphamide, ifosfamide, melphalan, chlorambucil, hexamethylmelaine, thiotepa, busulfan, carmustine, streptozocin, dacarbazine and temozolomide.

Optionally, a patch as described herein is impregnated or coated with an immunomodulatory agent, including but not limited to methothrexate, leflunomide, cyclophosphamide, cyclosporine A, macrolide antibiotics (e.g., FK506 (tacrolimus)), methylprednisolone (MP), corticosteroids, steroids, mycophenolate mofetil, rapamycin (sirolimus), mizoribine, deoxyspergualin, brequinar, malononitriloamindes (e.g., leflunamide), T cell receptor modulators, and cytokine receptor modulators, peptide mimetics, and antibodies (e.g., human, humanized, chimeric, monoclonal, polyclonal, Fvs, ScFvs, Fab or F(ab)₂ fragments or epitope binding fragments), nucleic acid molecules (e.g., antisense nucleic acid molecules and triple helices), small molecules, organic compounds, and inorganic compounds. In particular, immunomodulatory agents include, but are not limited to, methothrexate, leflunomide, cyclophosphamide, Cytosan,

Imrnuran, cyclosporine A, minocycline, azathioprine, antibiotics(e.g., FK506 (tacrolimus)), methylprednisolone (MP), corticosteroids, steroids, mycophenolate mofetil, rapamycin (sirolimus), mizoribine, deoxyspergualin, brequinar, malononitriloamindes (e.g., leflunamide), T cell receptor modulators, and cytokine receptor modulators. Examples of T cell receptor modulators include, but are not limited to, anti-T cell receptor antibodies (e.g., anti-CD4 antibodies (e.g., cM-T412 (Boeringer), IDEC-CE9.İS (IDEC and SKB), mAB 4162W94, Orthoclone and OKTcdr4a (Janssen-Cilag)), anti-CD3 antibodies (e.g., Nuvion (Product Design Labs), OKT3 (Johnson & Johnson), or Rituxan (IDEC)), anti-CD5 antibodies (e.g., an anti-CD5 ricin-linked immunoconjugate), anti-CD7 antibodies (e.g., CHH-380 (Novartis)), anti-CD8 antibodies, anti-CD40 ligand monoclonal antibodies (e.g., IDEC-131(IDEC)), anti-CD52 antibodies (e.g., CAMPATH 1H (Ilex)), anti-CD2 antibodies, anti-CD1 Ia antibodies (e.g., Xanelim (Genentech)), and anti-B7 antibodies (e.g., IDEC-114) (IDEC))) and CTLA4-immunoglobulin. Optionally, a patch as described herein is impregnated or coated with an immunomodulatory compound known as IMiD.

Optionally, impregnation is accomplished by immersing the patch in a solution of the bioactive compound of the desired concentration for a time sufficient to allow the patch to absorb and to equilibrate with the solution.

MAKING THE PATCH

Optionally, the patch of the invention for repairing a perforation in a tympanic membrane is made by providing a mold having a defined, e.g., predetermined, negative shape of the patch. Optionally, the methods include introducing a liquid hydrogel composition into the mold; inducing gel formation to solidify the liquid hydrogel composition to form a hydrogel patch; and removing the hydrogel patch from the mold after gel formation, wherein the construct has a shape suitable for repairing a perforation in a tympanic membrane.

Optionally, the hydrogel polymer patch is produced by electrospinning of a polymer.

Optionally, the methods further include suspending cells, cell adhesion molecule, a cell growth factor, an antibiotic, an antibacterial agent, an anti-inflammatory agent, an anti-septic agent or any combination thereof in the liquid hydrogel to form a composition

or a patch as described herein. Optionally, gel formation is induced by contacting the liquid hydrogel with a suitable concentration of a divalent cation.

REPAIRING A TYMPANIC MEMBRANE

The present invention provides a method for the repair of a tympanic membrane using a patch as described herein. In one embodiment, the tympanic membrane to be repaired has a deformity. Optionally, the deformity is an acute perforation. Optionally, the deformity is a chronic perforation. Optionally, the deformity relates to cholesteatoma. Optionally, the deformity is caused by a tumor in the middle ear. Optionally, the deformity is a disease of the tympanic membrane such as dimeric drum, a retraction, a retraction pocket (i.e., pocket formed in the eardrum resulting from retraction of the tympanic membrane into the middle ear cavity due to loss of pressure in the middle ear cavity), or tympanosclerosis, and the like.

Optionally, repair of a tympanic membrane deformity or perforation encompass contacting the tympanic membrane with a patch for a time sufficient to heal the tympanic membrane deformity, for a time sufficient to measurably improve one or more aspects of the tympanic membrane deformity or perforation, or for a time sufficient to lessen the worsening of one or more aspects of the tympanic membrane deformity, as compared to a tympanic membrane not contacted with a patch. Optionally, the terms "deformity" and "perforation" are used interchangeably.

Optionally, aspects of a tympanic membrane deformity include objectively measurable criteria, such as ability of the tympanic membrane to transmit sound, hearing loss in decibels, appearance of the tympanic membrane or surrounding tissue, ingrowth of epithelial tissue into or around a perforation in the tympanic membrane, etc., or subjective criteria, such as a sense of improved hearing, lessening of discomfort or pain, etc.

Optionally, the deformity is a perforation. Optionally, repairing a tympanic membrane includes totally or partially covering the perforation with a patch.

Optionally, a patch as described herein is placed or implanted in-situ with an insertion instrument for implanting a tympanic membrane patch. Optionally, insertion instruments for implanting a tympanic membrane patch are known to one of skill in the art.

Reference is now made to Figs. 8A-8F which illustrate various views of an applicator **800** for repairing a perforated tympanic membrane, in accordance with an embodiment. Fig. 8A illustrates a cross-section of the entire applicator **800** having a proximally disposed handle **802** and distally disposed deployment stem **804**. Fig. 8B-8D illustrates detailed cross-sectional views of handle **802**, and Figs. 8E-8F illustrate a detailed cross-sectional and perspective view, respectively, of the distal tip of stem **804**. Applicator **800** is substantially similar to applicator **100** described above, and it is to be understood the description that follows relates to the differences between applicator **800** and applicator **100**, and that unless otherwise specified, their structure and function are substantially the same.

Referring to Fig. 8A, handle **802** is provided with a deployment control mechanism comprising actuators **834** and **840**, and **860**. Deployment stem **804** may include multiple nested, telescoping sleeves connected to handle **802**.

Referring to Figs. 8E-8F, the multiple nested and telescoping sleeves may include an inner sleeve **818**, a middle sleeve **820** encasing inner sleeve **818**, and an outer sleeve **822** encasing middle sleeve **820**, similar to sleeves **118**, **120**, and **122** described above. Two patches, a distally disposed patch **808D** superimposed with a proximally disposed patch **808P** may be affixed to the distal end of the deployment stem **804**. Distal patch **808D** may be affixed via a distal actuation filament **826D** embedded within the inner sleeve **818** of deployment stem **804**, thereby affixing distal patch **808D** to the distal end of the inner sleeve **818**, and proximal patch **808P** may be affixed via a proximal actuation filament **826P** embedded within middle sleeve **820**, thereby affixing proximal patch **808P** to the distal end of the middle sleeve **820**. Filaments **826P** and **826D** may be made of any fiber suitable for withstanding a tensile force, such as but not limited to metallic wire, or thread, such as may be made of nylon or other suitable material.

Distal patch **808D** may be disposed with a distal patch cord **838Db** that engages with distal filament **826D** within inner sleeve **818**, and proximal patch **808P** may be disposed with a proximal patch cord **838Pb** that engages with proximal filament **826P** within middle sleeve **820**, external to inner sleeve **818**, thereby securing patches **808D** and **808P** to the distal ends of sleeves **818** and **820**, respectively. Cords **838Db** and **838Pb** may correspond to cord **138** described above. As with patch **108**, cords **838Db** and **838Pb** may have a wider distal ends **838Da** and **838Pa** attaching cords **838Db** and **838Pb** to disks **836D** and **836P** of patches **808D** and **808P**, respectively, and which may allow pulling any of patches **808D** and **808P** proximally by pulling on filaments **826D**

and **826P**, and/or by retracting sleeves **818** and **820** proximally. Patches **808D** and **808P** are constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging from the perforation.

Optionally, the filaments may engage with the cords as follows: a proximal end **838Dc** of distal patch cord **838Db** may loop through a looped distal end **826Da** of the distal filament **826D** in the inner sleeve **818**, and the proximal end **838Pc** of the proximal patch cord **838Pb** may loop through a looped distal end **826Pa** of the proximal filament **826P** in the middle sleeve **820**. Proximal ends **838Dc** and **838Pc** may be unattached, such that withdrawing filaments **826D** and **826P** may unravel the engagement. Filaments **826D** and **826P** may each be configured as a doubled over filament that is fused along its length proximally, leaving only a relatively small unfused portion at the distal end, to form loops **826Da** and **826Pa**.

Deployment actuators **834** and **860** may control the filament-based deployment system as follows:

Referring to Figs. 8A-8D, actuator **860** may be positioned with an elongated niche **860a** within handle **802**, allowing actuator **860** to slide distally and proximally within niche **860a**. Actuator **860** may be integrally connected to a case **860b**, such that sliding actuator **860** along niche **860a** moves case **860b** distally and proximally, accordingly. Case **860b** may enclose a debridement mechanism comprising a motor **844** and a gear wheel mechanism, comprising two engaged gear wheels **858a** and **858b**, mechanically connected to a blade pushing tube **854**, which is in turn connected to spring **828** that is connected to outer sleeve **822**, similar to spring **128** and sleeve **122** described above. Referring to Fig. 8E, outer sleeve **822** connects to middle sleeve **820** via a pin **862** sandwiched between two disks **864a-b**. It may be appreciated that other connecting means may be used. Thus sliding actuator **860** distally and proximally within niche **860a** advances and retracts blade pushing tube **854** which advances and retracts outer and middle sleeves **822** and **820** over bend **806** via spring **828**, accordingly. Optionally, inner sleeve **818** is not connected to sleeves **822** and **820**, and moves independently. Optionally, a strengthening tube (not shown) is nested between the middle and outer sleeves **820** and **822**, extending from blade pushing tube **854** distally. Spring **828** may encase the strengthening tube.

The operation of actuator **834** is illustrated in Fig. 8D. The proximal ends of filaments **826D** and **826P** may be each be anchored in handle **802** at filament bosses **846D** and **846P**, respectively. Springs **850D** and **850P**, each positioned distally to bosses

846D and **846P** and enclosing filaments **826D** and **826P**, respectively, are provided to exert tension on filaments **826D** and **826P** responsive to actuator **834**. Filament **826P** may terminate at distally disposed boss **846P**, and filament **826D** may extend proximally via a tube **852D** and terminate at proximally disposed boss **846D**. Actuator **834** may be mechanically connected to bosses **846P** and **846D** via triggers **848P** and **848D**, such that a controlled downwards compression by actuator **834** pushes triggers **848P** and **848D** downwards, pushing bosses **846P** and **846D**, and exerting a tension on filaments **826D** and **826P** via springs **850D** and **850P**, accordingly. This tension retracts filaments **826D** and **826P** proximally, and unravels the proximal ends **838Dc**, **838Dc** of cords **838Db**, **838Pb** from the looped distal ends of filaments **826D** and **826P**, shown in Fig. 8E, causing distal patch cord **838Db** and the proximal patch cord **838Pb** to disengage from distal filament **826D** and proximal filament **826P**. This releases the distal patch and the proximal patch from the deployment stem **804**.

Optionally, actuator **834** may be configured with multiple settings (not shown) that allow activating triggers **848P** and **848D** either separately, or together to control the retraction of filaments **826D** and **826P**, accordingly.

It may be appreciated that any of the features of device **100**, such as but not limited to any of the rotation mechanisms provided for rotating any of sleeves **118**, **120** may be implemented with device **800** for rotating any of sleeves **818**, **820** accordingly.

Referring back to Fig. 8A, applicator **800** may be further provided with a debridement mechanism activated by actuator **840** configured with handle **802**. The debridement mechanism includes blade pushing tube **854** and spring **828** mechanically connected to outer sleeve **822**, and at least one protruding blade **810** disposed at the distal end of outer sleeve **822**. Optionally, blade **810** is a single, concave arc-shaped blade such as shown in Fig. 8F. Alternatively, the at least one protruding blade may be configured as the convex blade pair **110a-b** described above. Actuator **840** controls a power supply, such as battery **842**, provided to drive motor **844**. A gear wheel mechanism, comprising two engaged gear wheels **858a** and **858b**, mechanically connects motor **844** to blade pushing tube **854**, transferring a rotation by motor **844** to sleeve **822** via blade pushing tube **854**. Thus, activation by actuator **840** causes motor **844** to rotate thereby rotating protruding blade **810** disposed on sleeve **822**, and causing a debridement of the circumference of the perforation of tympanic membrane when blade **822** is positioned at the tympanic membrane. Optionally, actuator **840** operates as a push button to activate the debridement.

Advantageously, the curvature of protruding blade **810** controls the penetration depth of blade **810** into the perforation. Similarly, the debridement mechanism may include a penetration depth controlling mechanism that limits the penetration depth of blade **810** by limiting the advancement of the outer sleeve **822** relative to inner sleeve **818**. For example, the length of niche **860a** may serve as a penetration depth controlling mechanism. As with the debridement mechanism of applicator **100**, the debridement mechanism of applicator **800** may include a niche, such as may be formed between blade **810** and the outer surface of outer sleeve **822** for collecting any debrided tissue.

Reference is now made to Figs. 9A-9H, which illustrate a method for repairing a perforated tympanic membrane using the filament-based deployment system of applicator **800**. The filament-based deployment system may deploy patch **808D** distally, at the internal side of a perforated tympanic membrane in the middle ear, and deploy patch **808P** proximally, at the external side of the perforated tympanic membrane in the outer ear, thereby sandwiching the tympanic membrane between distally disposed patch **808D** and the proximally disposed patch **808P**.

Referring to Fig. 9A, deployment stem **804** may introduce the two patches **808D** and **808P** into the ear canal **200**, such as via a speculum, **210**, and penetrate the perforated tympanic membrane **202** with at least distally disposed patch **808D**, via the inner sleeve.

Referring the Fig. 9B, optionally, the perforated tympanic membrane **202** may be penetrated with both the distal patch together with the proximal patch, by inserting the middle sleeve encasing the inner sleeve through the perforation. The two patches may be constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging from the perforation. Optionally, the tympanic membrane may be penetrated with the distal end of stem **804** comprising the inner, middle, and outer sleeves **818**, **820**, and **822**, with the distal ends of the three sleeves substantially aligned distally, bringing blade **810** into contact with the edge of the perforation.

Referring to Fig. 9C, actuator **840** may be activated to perform a debridement of the circumference of the perforation. The debridement may be performed prior to the final deployment of the patches, to allow blood released from the debridement to subsequently serve as a glue for securing the patches to the tympanic membrane. Optionally the blade is concave, and the deployment stem is maneuvered to bring a concave edge of the blade with the edge of the perforation. With the blade **810** positioned

thus, the outer sleeve may be rotated, thereby rotating the debridement blade about the circumference of the perforation. Optionally, debrided tissue resulting from the debridement may be collected in a niche formed between blade **810** and sleeve **810**.

Referring to Fig. 9D, once the debridement is complete, actuator **860** may be retracted proximally within niche **860a**, retracting outer sleeve **822** and middle sleeve **820** relative to the inner sleeve **818**, to evacuated blade **810** and sleeves **822** and **820** from the middle ear through the debrided perforation. This serves to retract the proximal patch **808P** from the middle ear through the perforation of the debrided tympanic membrane, and position the proximal patch **808P** at the external side of the perforated tympanic membrane in the outer ear.

The proximal patch may flex to fit through the perforation (Fig. 9D), and restore its shape on emerging in the outer ear (Fig. 9E). The proximal patch **808P** may possess a low surface tension towards the distal patch **808D**, and thus patches **808P** and **808D** don't have a tendency to attach or adhere to each other.

Referring to Figs. 9E-9F, the distal patch **808D** is now positioned at the internal side **204** of the perforated tympanic membrane **202** in the middle ear, and the proximal patch **808P** is positioned at the external side **206** of the perforated tympanic membrane in the outer ear. At this stage, the distal patch **808D** is still affixed to the inner sleeve **818**, and positioned in the inner ear, with the tympanic membrane **202** positioned between the two patches (Fig. 9E).

Referring to Fig. 9F, the entire applicator may be retracted, retracting the deployment stem and pulling the inner sleeve with the distal patch **808D** until the distal patch is flush with the internal side **204** of the perforated tympanic membrane **202**.

Referring to Fig. 9G, actuator **860** may be advanced distally within niche **860a**, advancing sleeves **820** and **822** relative to the inner sleeve **818** until the proximal patch **808P** is flush against the external side of the perforated tympanic membrane **206**.

Referring to Fig. 9H, actuator **834** may be pressed, exerting a tension on filaments **826D** and **826D**, disengaging the distal patch cord **838Db** from the distal filament **826D** and the proximal patch cord **838Pb** from the proximal filament **826D**, releasing the distal patch **808D** and the proximal patch **808P** from the deployment stem **804**. The deployment stem **804** may be retracted from the ear canal **200** completing the deployment of the distal patch at the inner side of the tympanic membrane, and the proximal patch at the outer side of the tympanic membrane, serving to seal the perforation on both sides.

In the figures, elements are not always provided with reference numbers; a certain element, for example, may be provided with a reference number in one of more figures, and be shown without that reference number in other one or more figures – merely for reasons of brevity. Since all figures in this application show the same device, it is intended that an element having the same shape and appearing in different figures, sometimes with a reference number and sometimes not – be interpreted as the same element.

The present invention has been described using non-limiting detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the invention. It should be understood that features and/or steps described with respect to one embodiment may be used with other embodiments and that not all embodiments of the invention have all of the features and/or steps shown in a particular figure or described with respect to one of the embodiments. Variations of embodiments described will occur to persons of the art.

It is noted that some of the above described embodiments may describe the best mode contemplated by the inventors and therefore may include structure, acts or details of structures and acts that may not be essential to the invention and which are described as examples. Structure compounds and acts described herein are replaceable by equivalents which perform the same function, even if the structure or acts are different, as known in the art. Therefore, the scope of the invention is limited only by the elements and limitations as used in the claims. When used in the following claims, the terms "comprise", "include", "have" and their conjugates mean "including but not limited to".

CLAIMS

What is claimed is:

1. A tympanoplastic patch applicator comprising:
 - a handle disposed with a deployment control;
 - a deployment stem comprising multiple nested sleeves connected to the handle;
 - a patch configured to be affixed to the distal end of the deployment stem via an actuation filament embedded in the deployment stem; and
 - a filament-based deployment system controllable by the deployment control,

wherein the deployment stem is configured to position the patch at the internal side of a perforated tympanic membrane in the middle ear by introducing the patch into the ear canal and penetrating the perforated tympanic membrane with the distal end of the deployment stem,

and wherein the filament-based deployment system is configured to release the patch from the distal end of the deployment stem, thereby deploying the patch on the internal side of the perforated tympanic membrane.
2. The tympanoplastic patch applicator of claim 1, wherein the multiple nested sleeves include an inner sleeve, wherein the actuation filament is embedded within the inner sleeve.
3. The tympanoplastic patch applicator of claim 2, wherein the multiple nested sleeves include a middle sleeve encasing the inner sleeve, wherein the patch is configured to be affixed at the distal end of the middle sleeve, thereby being affixed at the distal end of the deployment stem.
4. The tympanoplastic patch applicator of claim 3, wherein the distal end of the middle sleeve is serrated to secure the position of the patch and prevent its rotation with respect to the middle sleeve, wherein a first activation of the deployment control causes the serrated distal end of the middle sleeve to withdraw proximally from the patch, thereby releasing the patch from the distal end of the middle sleeve.

5. The tympanoplastic patch application of claim 3, wherein the distal end of the middle sleeve is beveled such that the patch is affixed at an angle that is non-perpendicular to the longitudinal axis of the middle sleeve, thereby allowing the orientation of the patch to align with the orientation of the perforated tympanic membrane.
6. The tympanoplastic patch application of claim 5, further comprising a posture adjustor configured with the handle, wherein the posture adjustor is configured to align the orientation of the patch with the orientation of the perforated tympanic membrane.
7. The tympanoplastic patch applicator of claim 6, wherein the deployment stem is bent, and further comprises a first spring configured to transfer an adjustment of the posture adjustor to a corresponding adjustment of the orientation of the patch over the bend.
8. The tympanoplastic patch applicator of claim 3, wherein the filament-based deployment system comprises an exposable distal end of the inner sleeve, wherein the patch is disposed with a proximally positioned cord configured to extend from the distal end of the middle sleeve and engage with the actuation filament at the exposable distal end of the inner sleeve, thereby affixing the patch at the distal end of the middle sleeve when the exposable distal end of the inner sleeve is encased within the middle sleeve, and
wherein a second activation of the deployment control causes the middle sleeve to withdraw proximally with respect to the inner sleeve and expose the exposable distal end, allowing the cord to disengage from the actuation filament to release the patch from the tympanoplastic patch applicator.
9. The tympanoplastic patch applicator of claim 8, wherein the proximal end of the cord comprises a first bulge, and the distal end of the actuation filament comprises a second bulge, wherein positioning the first bulge proximal to the second bulge at the exposable distal end of the inner sleeve engages the cord with the actuation filament, and wherein exposing the exposable distal end of the inner sleeve allows the first bulge to slide distally over the second bulge, thereby disengaging the cord from the actuation filament.

10. The tympanoplastic patch applicator of claim 8, wherein the deployment control is provided with a safety mechanism configured to prevent an accidental second activation of the deployment control.
11. The tympanoplastic patch applicator of claim 3, further comprising a debridement mechanism, comprising:
 - a debridement actuator configured with the handle,
 - an outer sleeve of the multiple nested sleeves encasing the middle sleeve,
 - and
 - at least one protruding blade disposed at a distal end of the outer sleeve,
 - wherein the actuator is configured to advance the outer sleeve relative to the middle sleeve until the blade reaches the distal end of the deployment stem, rotate the outer sleeve relative to the middle sleeve, thereby rotating the protruding blade and causing a debridement of the circumference of the perforation, and retract the outer sleeve relative to the middle sleeve.
12. The tympanoplastic patch applicator of claim 11, wherein the debridement mechanism further comprises a niche configured to collect debrided tissue.
13. The tympanoplastic patch applicator of claim 11, wherein a curvature of the at least one protruding blade controls a penetration depth of the blade into the perforation.
14. The tympanoplastic patch applicator of claim 11, wherein the debridement mechanism further comprises a penetration depth controlling mechanism that limits the penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the middle sleeve.
15. The tympanoplastic patch applicator of claim 11, wherein the deployment stem is bent, and wherein the debridement actuator is configured to advance and retract the outer sleeve relative to the middle sleeve over the bend.
16. The tympanoplastic patch applicator of claim 15, wherein the deployment stem further comprising a second spring configured to transfer a motion of the debridement actuator to the outer sleeve over the bent deployment stem,

thereby enabling the advancement and retraction of the outer sleeve relative to the middle sleeve over the bend.

17. The tympanoplastic patch applicator of claim 1, wherein the patch is constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging in the middle ear at the internal side of the tympanic membrane.
18. A method for deploying a patch at the internal side of a perforated tympanic membrane, comprising:
 - introducing a patch, affixed to the distal end of a distally disposed stem of an applicator, into an ear canal;
 - penetrating a perforation of a tympanic membrane with the patch;
 - using a deployment control provided with a proximally disposed handle of the applicator to maneuver a filament-based deployment system that releases the patch from the distal end of the stem at the internal side of the tympanic membrane; and
 - deploying the patch on the internal side of the perforated tympanic membrane.
19. The method of claim 18, further comprising, while the patch is positioned at the internal side of the tympanic membrane, aligning the orientation of the patch with the orientation of the perforated tympanic membrane using a posture adjustor provided with the proximally disposed handle of applicator.
20. The method of claim 19, wherein using the posture adjustor comprises rotating the posture adjustor to rotate a middle sleeve of the applicator, wherein the patch is secured to a beveled distal end of the middle sleeve.
21. The method of claim 18, further comprising activating a debridement mechanism to debride dead tissue from the circumference of the perforation, and wetting the circumference of the debrided perforation with fresh blood released by the debridement.
22. The method of claim 21, wherein activating the debridement mechanism comprises using a debriding actuator disposed with the proximally disposed

handle of the applicator to advance at least one debridement blade to the distal end of the stem, and rotate the at least one blade about the circumference of the perforation.

23. The method of claim 21, further comprising collecting the removed tissue in a niche of the applicator, and preventing the removed tissue from reaching the middle ear.
24. The method of claim 21, further comprising removing the at least one blade from the perforation by using the debridement actuator to retract the at least one blade from the distal end of the applicator.
25. The method of claim 18, wherein using the deployment control to maneuver the filament-based deployment system comprises detaching the patch from a serrated distal tip of the stem in a first detachment stage.
26. The method of claim 25, wherein deploying comprises pulling the patch proximally to come into contact with the internal side of the tympanic membrane by pulling the applicator proximally, and securing the patch to the tympanic membrane using the fresh blood as a glue.
27. The method of claim 26, wherein using the deployment control to maneuver the filament-based deployment system comprises decoupling a cord of the patch from a filament of the applicator in a second detachment stage.
28. A biodegradable patch construct having a first thickness and a second thickness.
29. The biodegradable patch of claim 28, wherein the second thickness is from 1.2 to 10 times thicker than said first thickness.
30. The biodegradable patch of claim 28, further comprising an upper portion and a bottom portion.
31. The biodegradable patch of claim 30, wherein 0.5% to 20% of the surface area of the upper portion, the surface area bottom portion, or both comprises a projection.

32. The biodegradable patch of claim 30, wherein said bottom portion is a uniform surface.
33. The biodegradable patch of claim 30, wherein said upper portion comprises a projection.
34. The biodegradable patch of claim 30, wherein the surface area of the upper portion, the surface area of the bottom portion, or both comprises a cell adhesion molecule.
35. The biodegradable patch of claim 30, wherein the surface area of the upper portion, the surface area bottom portion, or both comprises an anti-inflammatory agent, an antibacterial agent, an antiseptic agent, a healing enhancing agent or any combination thereof.
36. The biodegradable patch of claim 28, wherein said patch is freeze-dried.
37. The biodegradable patch of claim 30, wherein the surface area of the upper portion, the surface area of the bottom portion, or both comprises a chondrocyte, a fibroblast, a chondrocyte precursor, a fibroblast precursor, or any combination thereof.
38. The biodegradable patch of claim 28, comprising a hydrogel.
39. The biodegradable patch of claim 38, wherein said hydrogel is selected from the group consisting of polysaccharides, proteins, polyphosphazenes, poly(oxyethylene)-poly(oxypropylene) block polymers, poly(oxyethylene)-poly(oxypropylene) block polymers of ethylene diamine, poly(acrylic acids), poly(methacrylic acids), copolymers of acrylic acid and methacrylic acid, poly(vinyl acetate), and sulfonated polymers.
40. The biodegradable patch of claim 38, wherein said hydrogel is selected from the group consisting of alginate, chitosan, pluronic, collagen, cellulose, agarose and any modification thereof.

41. A kit comprising the biodegradable patch of claim 28, suspended in a sterile wetting solution, and instructions for use in repairing a perforation in a tympanic membrane in a mammal.
42. A method of repairing a perforation in a tympanic membrane in a mammal, the method comprising: providing biodegradable patch of claim 28 and implanting the biodegradable patch of claim 28 in the tympanic membrane in the mammal.
43. The method of claim 42, wherein said biodegradable patch of claim 28 is the biodegradable patch of any one of claims 29 to 40.
44. A tympanoplastic patch applicator comprising:
 - a distally disposed handle configured with a deployment control mechanism;
 - a proximally disposed deployment stem comprising multiple nested sleeves connected to the handle;
 - two patches, comprising a distally disposed patch superimposed with a proximally disposed patch, wherein the distally disposed patch is configured to be affixed to the distal end of the deployment stem via a distal filament embedded in the deployment stem, and wherein the proximally disposed patch is configured to be affixed to the distal end of the deployment stem via a proximal filament embedded in the deployment stem; and
 - a filament-based deployment system controllable by the deployment control mechanism,
 - wherein the deployment stem is configured to introduce the two patches into the ear canal and penetrate the perforated tympanic membrane with at least the distally disposed patch, and
 - wherein the filament-based deployment system is configured to:
 - deploy the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear, and
 - deploy the proximally disposed patch at the external side of the perforated tympanic membrane in the outer ear,

thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

45. The tympanoplastic patch applicator of claim 44, wherein the multiple nested sleeves include an inner sleeve and a middle sleeve encasing the inner sleeve, wherein the distal actuation filament is embedded within the inner sleeve thereby affixing the distal patch to the distal end of the inner sleeve, and wherein the proximal actuation filament is embedded within the middle sleeve, thereby affixing the proximal patch to the distal end of the middle sleeve.
46. The tympanoplastic patch applicator of claim 45, wherein the deployment control mechanism comprises a first deployment actuator disposed on the handle, wherein the first deployment actuator is configured to retract and advance the middle sleeve relative to the inner sleeve.
47. The tympanoplastic patch applicator of claim 46, wherein the deployment stem is further configured penetrate the perforated tympanic membrane with the proximally disposed patch, retract the proximal patch from the middle ear through the perforation of the tympanic membrane by retracting the middle sleeve relative to the inner sleeve using the first deployment actuator, and position the proximal patch at the external side of the perforated tympanic membrane in the outer ear, by advancing the middle sleeve relative to the inner sleeve using the first deployment actuator, thereby positioning the proximal patch against the external side of the perforated tympanic membrane.
48. The tympanoplastic patch applicator of claim 45, wherein the deployment control mechanism comprises a second deployment actuator configured to release the distal patch and the proximal patch from the deployment stem.
49. The tympanoplastic patch applicator of claim 48,
wherein the distal patch is disposed with a distal patch cord configured to engage with the distal filament by looping the proximal end of the distal patch cord over the distal end of the distal filament in the inner sleeve, and

wherein the proximal patch is disposed with a proximal patch cord configured to engage with the proximal filament by looping the proximal end of the proximal patch cord over the distal end of the proximal filament in the middle sleeve,

wherein the filament-based deployment system comprises:

a first filament locking boss configured to anchor the proximal end of the distal filament to the handle, and

a second filament locking boss configured to anchor the proximal end of the proximal filament to the handle,

wherein the second deployment actuator is connected to the first and second filament locking bosses, wherein activating the second deployment actuator retracts the distal and proximal filaments, causing the distal patch cord to disengage from the distal filament and the proximal patch cord to disengage from the proximal filament.

50. The tympanoplastic patch applicator of claim 46, wherein the deployment control mechanism comprises a debridement actuator configured to control a debridement system, comprising:

an outer sleeve of the multiple nested sleeves encasing and connected to the middle sleeve, and

at least one protruding blade disposed at a distal end of the outer sleeve,

wherein the debridement actuator is configured to rotate the outer sleeve, thereby rotating the protruding blade and causing a debridement of the circumference of the perforation,

wherein the first deployment actuator is configured to retract and advance the outer sleeve with the middle sleeve.

51. The tympanoplastic patch applicator of claim 50, wherein the debridement mechanism further comprises a niche configured to collect debrided tissue.

52. The tympanoplastic patch applicator of claim 50, wherein a curvature of the at least one protruding blade controls a penetration depth of the blade into the perforation.

53. The tympanoplastic patch applicator of claim 50, wherein the debridement mechanism further comprises a penetration depth controlling mechanism that limits the penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the middle sleeve.
54. The tympanoplastic patch applicator of claim 53, wherein the penetration depth controlling mechanism comprises the first deployment actuator.
55. The tympanoplastic patch applicator of claim 50, wherein the debridement mechanism further comprises a power supply, a motor, and a gear wheel mechanically connecting the motor to the outer sleeve, wherein the debridement control is configured to control the power supply to activate the motor and turn the gear wheel, wherein turning the gear wheel causes the outer sleeve to rotate with the debridement blade.
56. The tympanoplastic patch applicator of claim 50, wherein the deployment stem is bent, and wherein the first deployment actuator is configured to advance and retract the outer sleeve relative to the middle sleeve over the bend.
57. The tympanoplastic patch applicator of claim 44, wherein the two patches are constructed from a resilient material that flexes to fit through the perforation, and restores its original shape when emerging from the perforation.
58. A tympanoplastic patch applicator comprising:
- a distally disposed handle configured with a deployment actuator;
 - a proximally disposed deployment stem connected to the handle;
 - two patches, comprising a distally disposed patch superimposed with a proximally disposed patch, wherein the distally disposed patch is configured to be affixed to the distal end of the deployment stem, and wherein the proximally disposed patch is configured to be affixed to the distal end of the deployment stem; and
 - a deployment mechanism controllable by the deployment actuator,
 - wherein the deployment stem is configured to introduce the two patches into the ear canal and penetrate the perforated tympanic membrane with at least the distally disposed patch, and
 - wherein the deployment mechanism is configured to:

deploy the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear, and

deploy the proximally disposed patch at the external side of the perforated tympanic membrane in the outer ear,

thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

59. A method for repairing a tympanic membrane, comprising:

introduce two patches, comprising a distally disposed patch superimposed with a proximally disposed patch, into an ear canal via a deployment stem,

wherein the distally disposed patch is affixed to the distal end of the deployment stem via a distal filament embedded in the deployment stem, and wherein the proximally disposed patch is affixed to the distal end of the deployment stem via a proximal filament embedded in the deployment stem;

penetrating the perforated tympanic membrane with at least the distally disposed patch;

deploying the distally disposed patch at the internal side of the perforated tympanic membrane in the middle ear; and

deploy the proximally disposed patch at the external side of the perforated tympanic membrane in the outer ear,

thereby sandwiching the tympanic membrane between the distally disposed patch and the proximally disposed patch.

60. The method of claim 59, wherein the deployment stem comprises an inner sleeve wherein the distal actuation filament is embedded within the inner sleeve thereby affixing the distally disposed patch to the distal end of the inner sleeve, wherein penetrating the perforated tympanic membrane with at least the distally disposed patch comprises penetrating the perforated tympanic membrane with at least the inner sleeve.

61. The method of claim 60, wherein the deployment stem further comprises a middle sleeve encasing the inner sleeve, wherein the proximal actuation filament is embedded within the middle sleeve, thereby affixing the proximal patch to the distal end of the middle sleeve, the method further comprising:

penetrating the perforated tympanic membrane with both the distally disposed patch together with the proximally disposed patch by inserting the middle sleeve encasing the inner sleeve through the perforation, retracting the proximal patch from the middle ear through the perforation of the tympanic membrane by retracting the middle sleeve relative to the inner sleeve, and positioning the proximal patch at the external side of the perforated tympanic membrane in the outer ear.

62. The method of claim 61, further comprising retracting the deployment stem until the distally disposed patch is flush with the internal side of the perforated tympanic membrane, thereby deploying the distally disposed patch.

63. The method of claim 62, further comprising advancing the middle sleeve relative to the inner sleeve until the proximally disposed patch is flush against the external side of the perforated tympanic membrane, thereby deploying the proximally disposed patch.

64. The method of claim 61, wherein the distally disposed patch is disposed with a distal patch cord configured to engage with the distal filament by looping the proximal end of the distal patch cord over the distal end of the distal filament in the inner sleeve, and

wherein the proximally disposed patch is disposed with a proximal patch cord configured to engage with the proximal filament by looping the proximal end of the proximal patch cord over the distal end of the proximal filament in the middle sleeve,

the method further comprising exerting a tension on the distal and proximal filaments to disengage the distal patch cord from the distal filament and the proximal patch cord from the proximal filament, and release the distally disposed patch and the proximally disposed patch from the deployment stem.

65. The method of claim 64, further comprising, prior to deploying the distally disposed patch and the proximally disposed patch, performing a debridement of a circumference of the perforation of the tympanic membrane, wherein deploying the distally disposed patch and the proximally disposed patch

further comprises gluing the distally disposed patch and the proximally disposed patch to the perforated tympanic membrane using blood released from the debridement.

66. The method of claim 65, further comprising collecting debrided tissue resulting from the debridement.



67. The method of claim 66, wherein performing the debridement comprises:

penetrating the perforated tympanic membrane with an outer sleeve encasing the middle sleeve and the inner sleeve, wherein the outer sleeve is disposed with a debridement blade,

rotating the outer sleeve, thereby rotating the debridement blade about the circumference of the perforation, and

evacuating the outer and middle sleeves from the middle ear by retracting the outer sleeve together with the middle sleeve through the perforation.

68. The method of claim 67, further comprising controlling a penetration depth of the at one protruding blade by limiting the advancement of the outer sleeve relative to the inner sleeve.

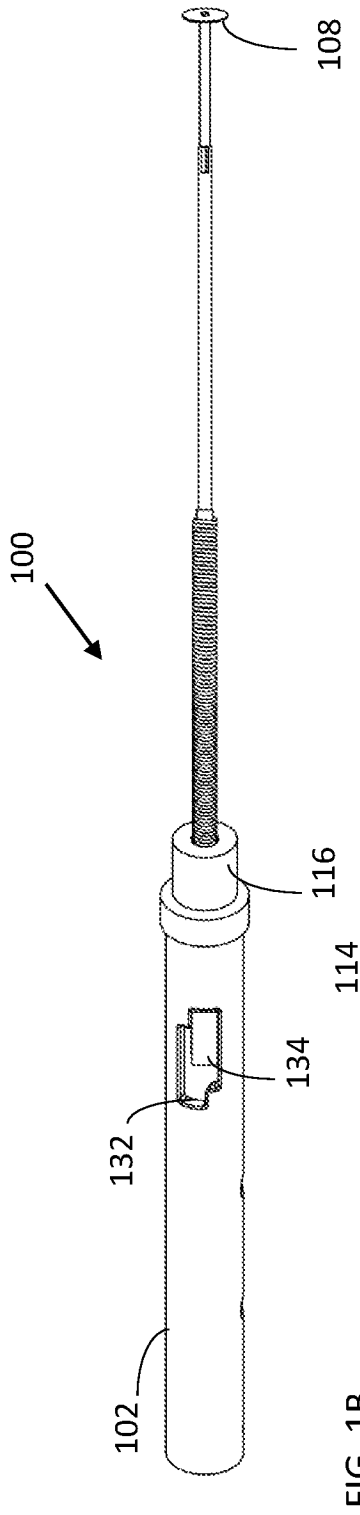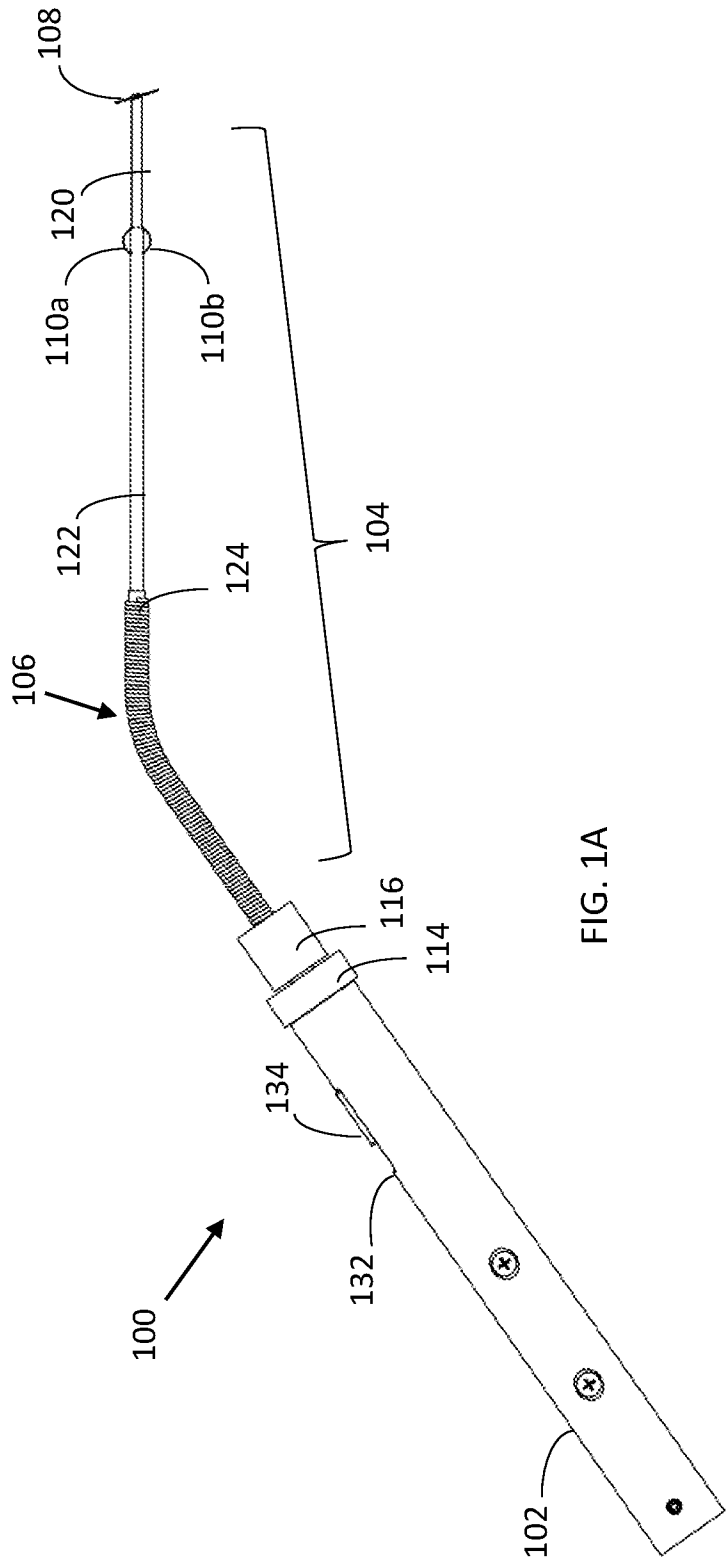

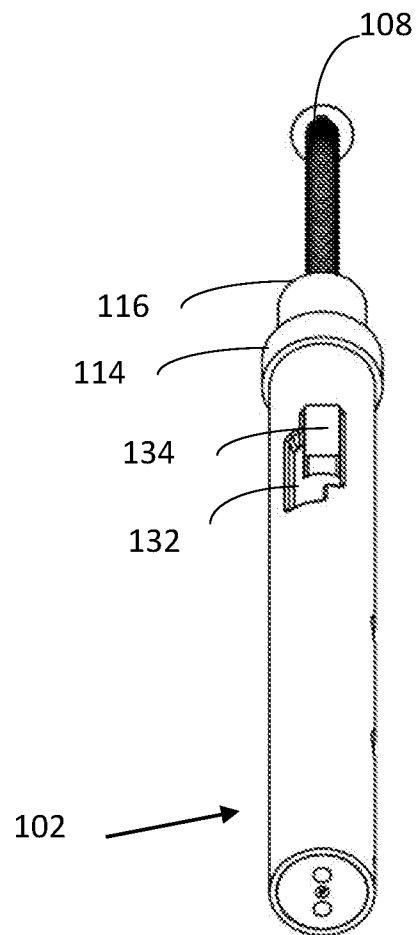


FIG. 1C

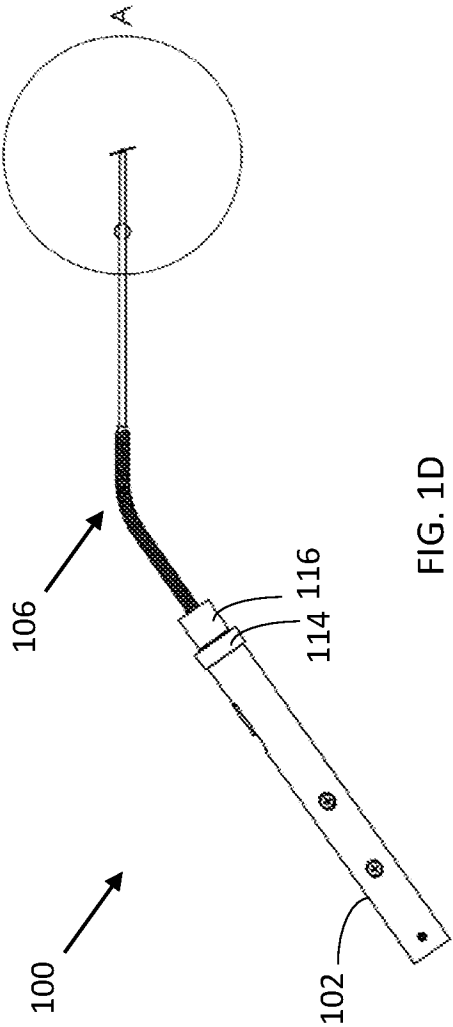


FIG. 1D

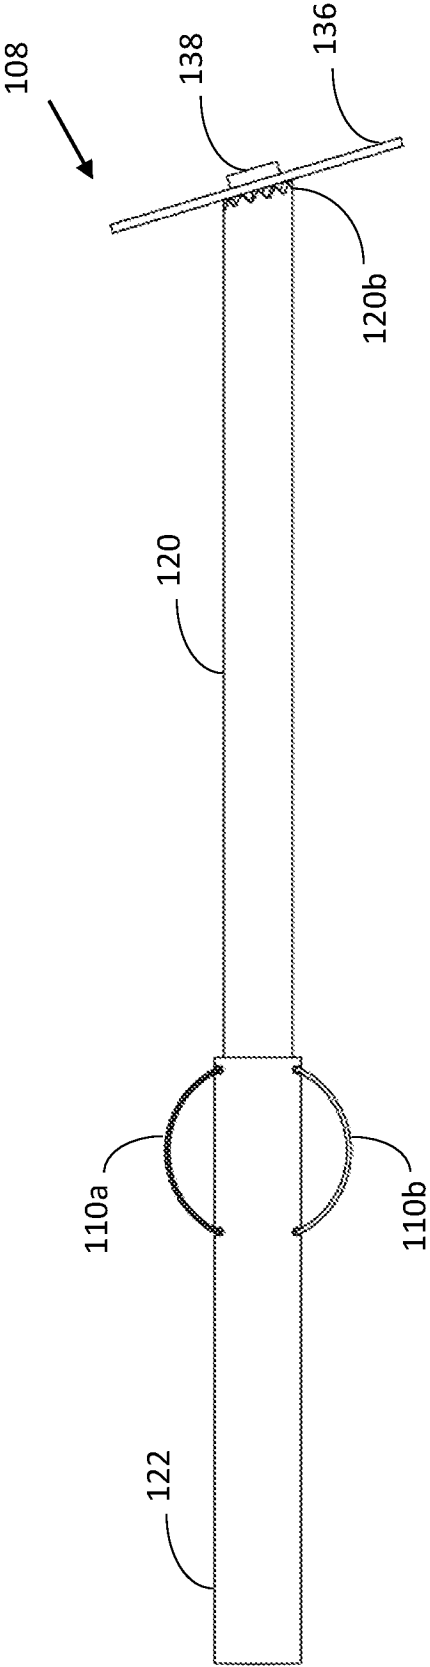


FIG. 1E

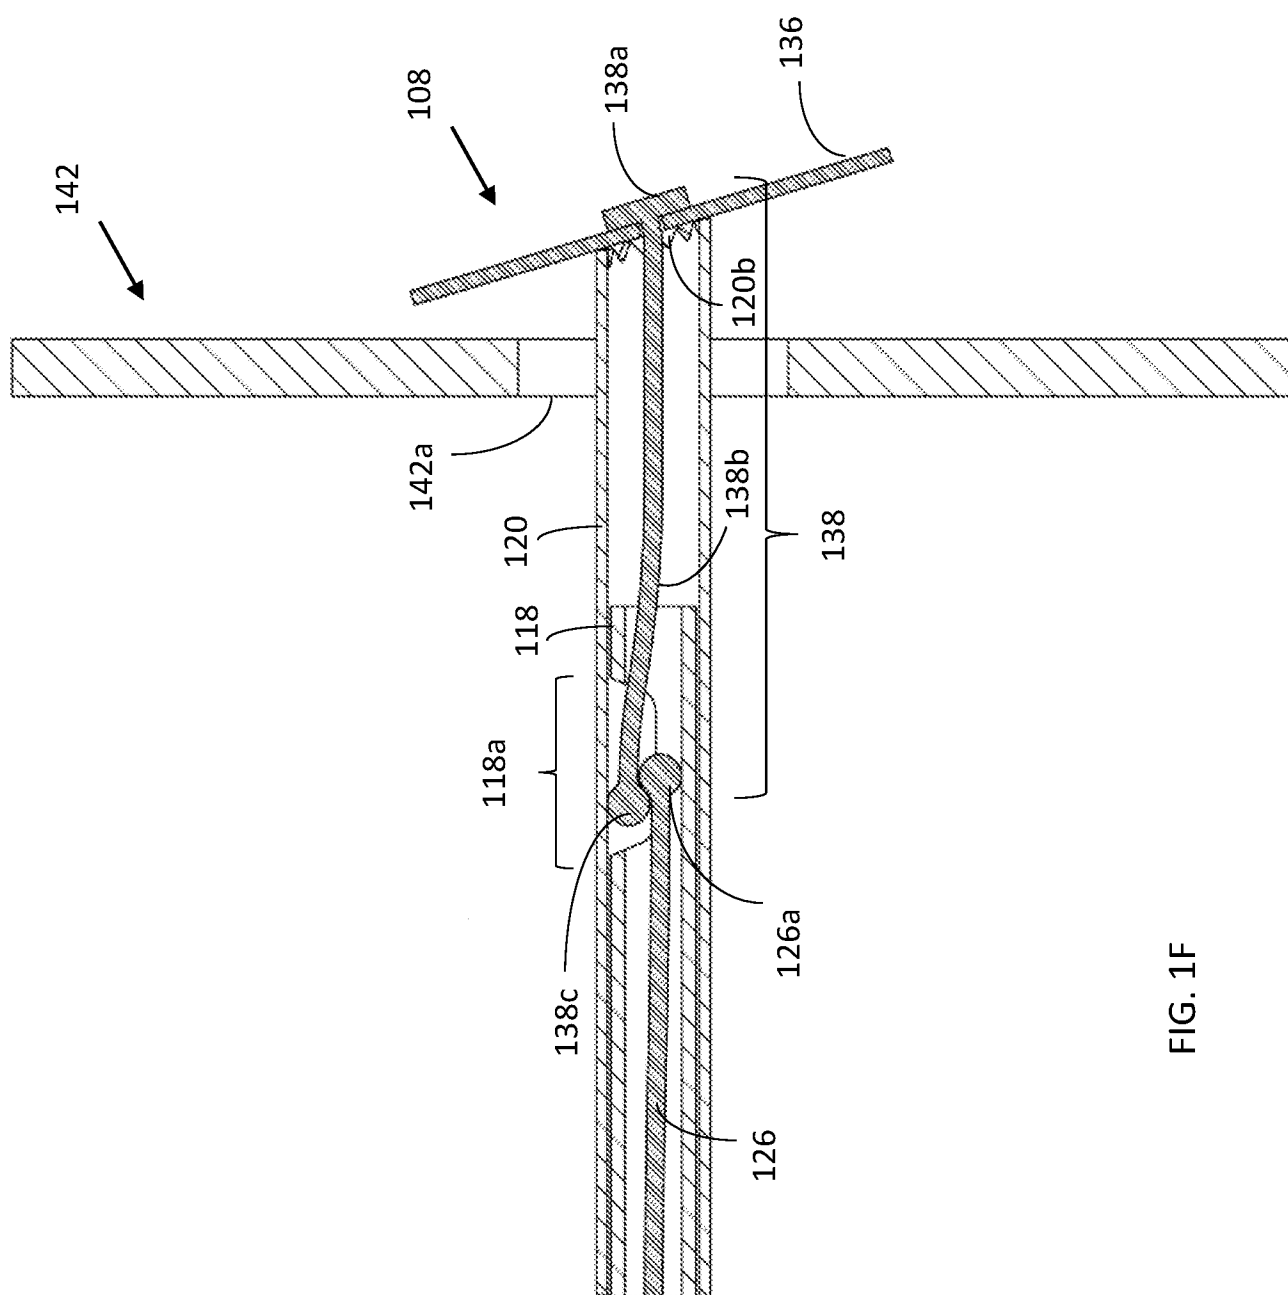
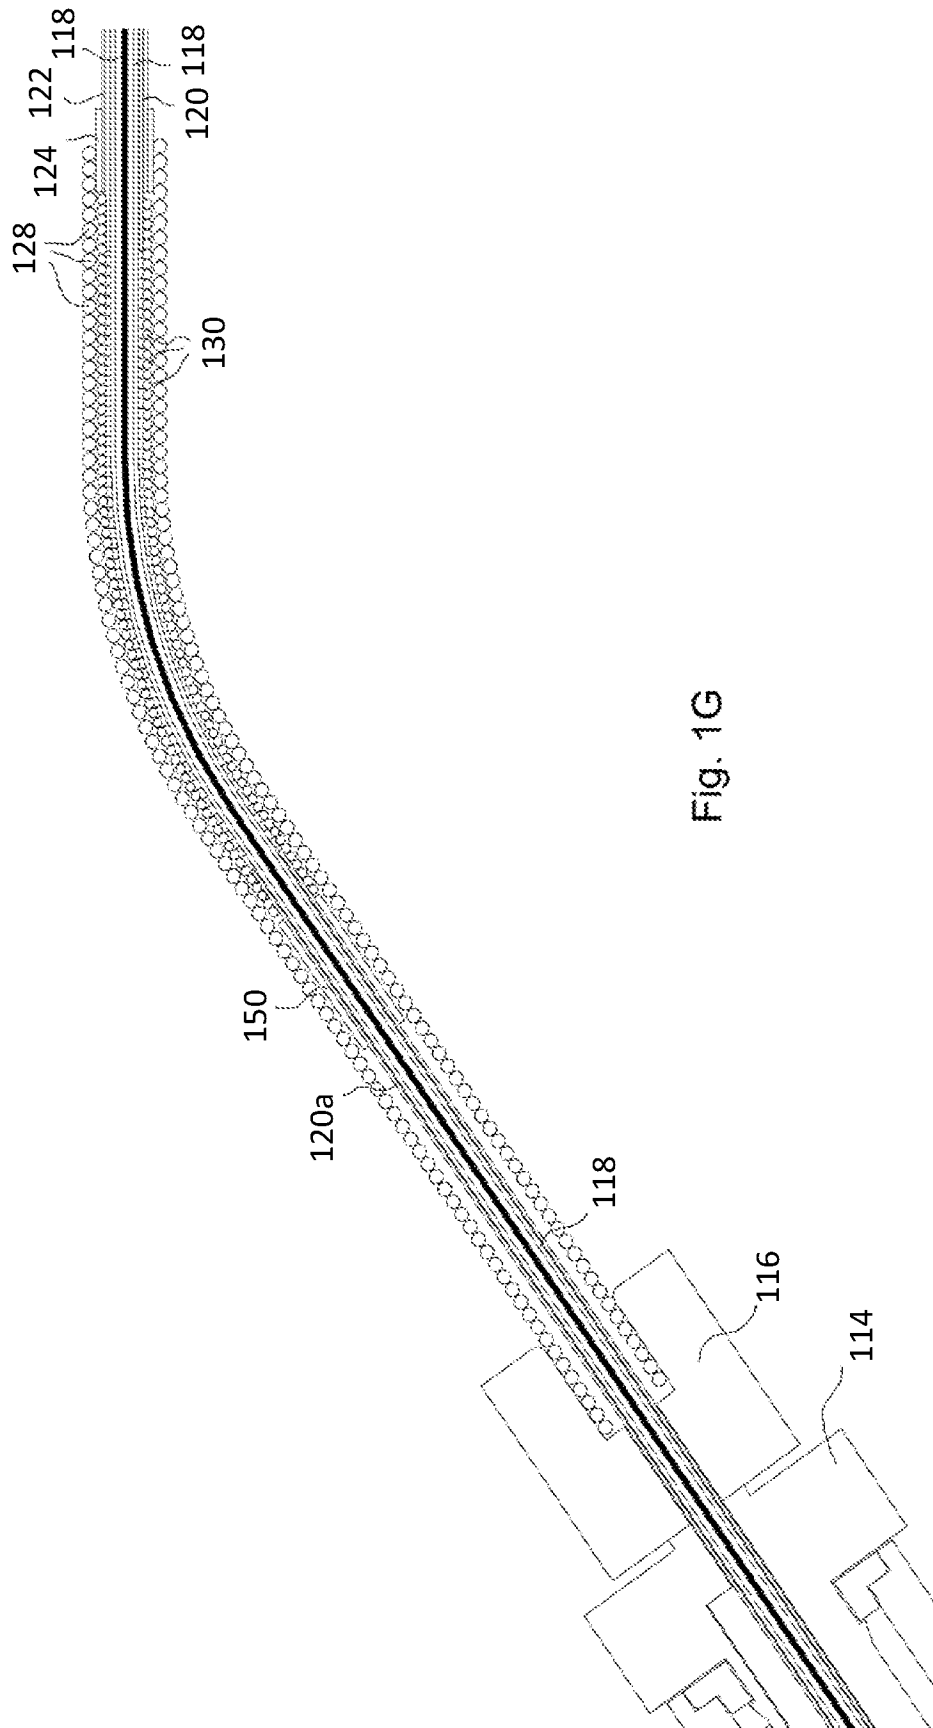


FIG. 1F



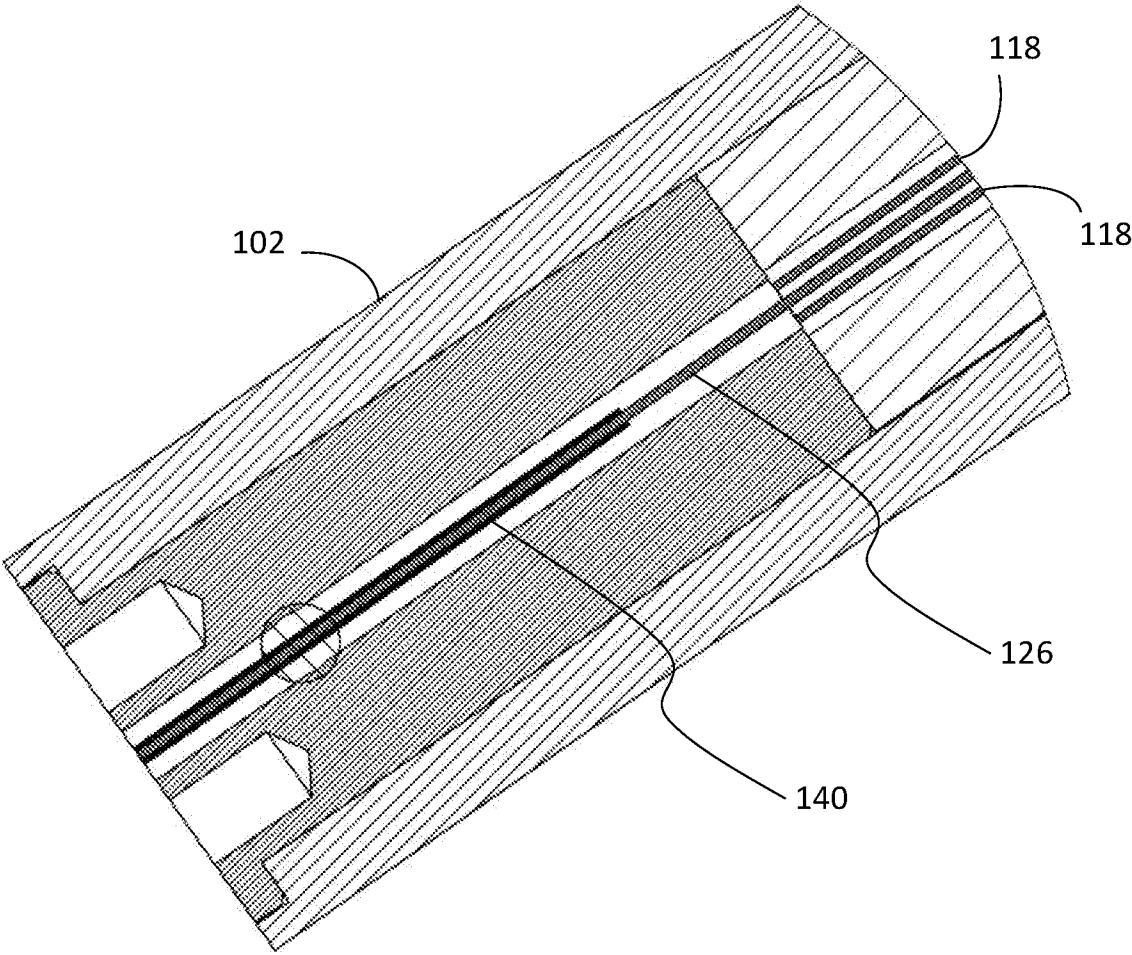


FIG. 1H

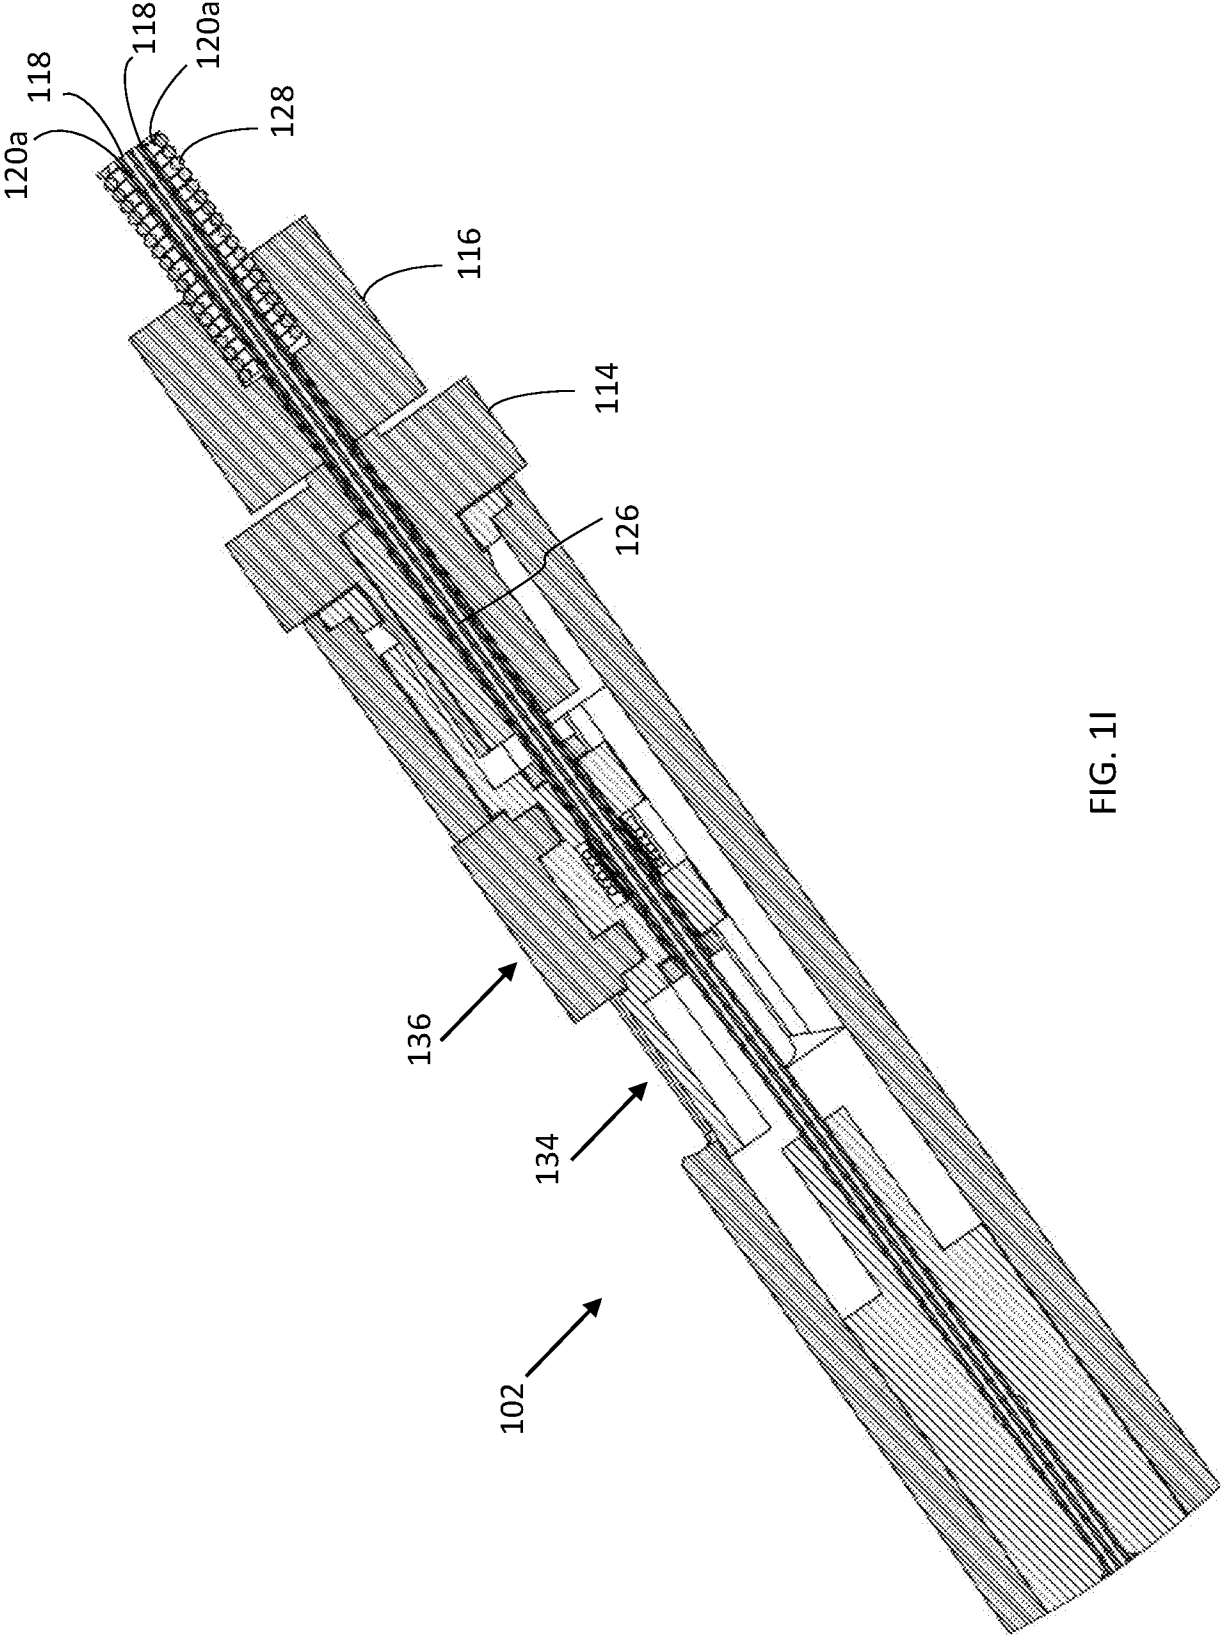
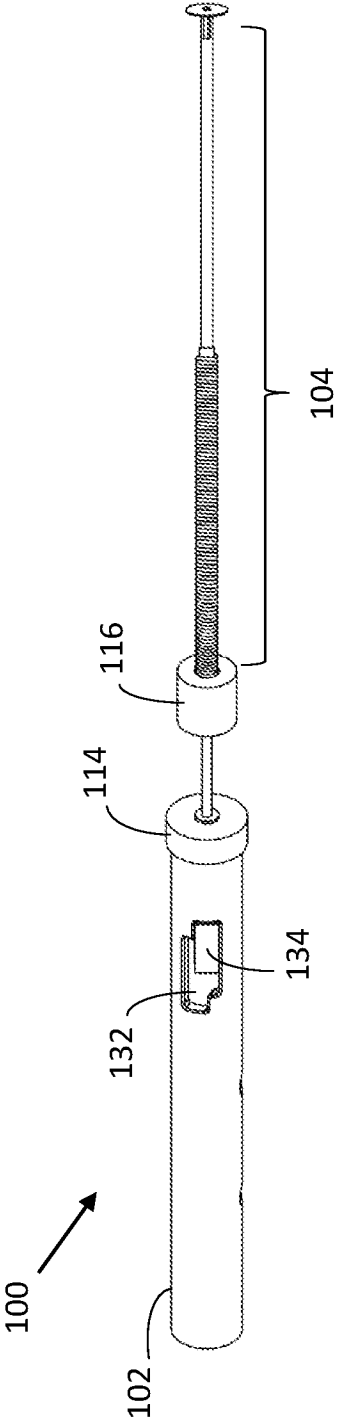
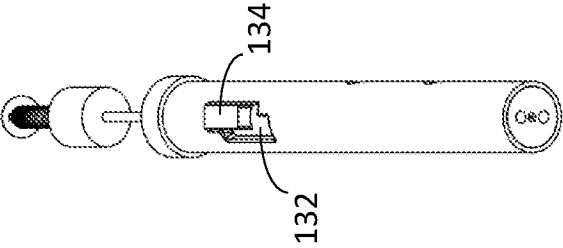
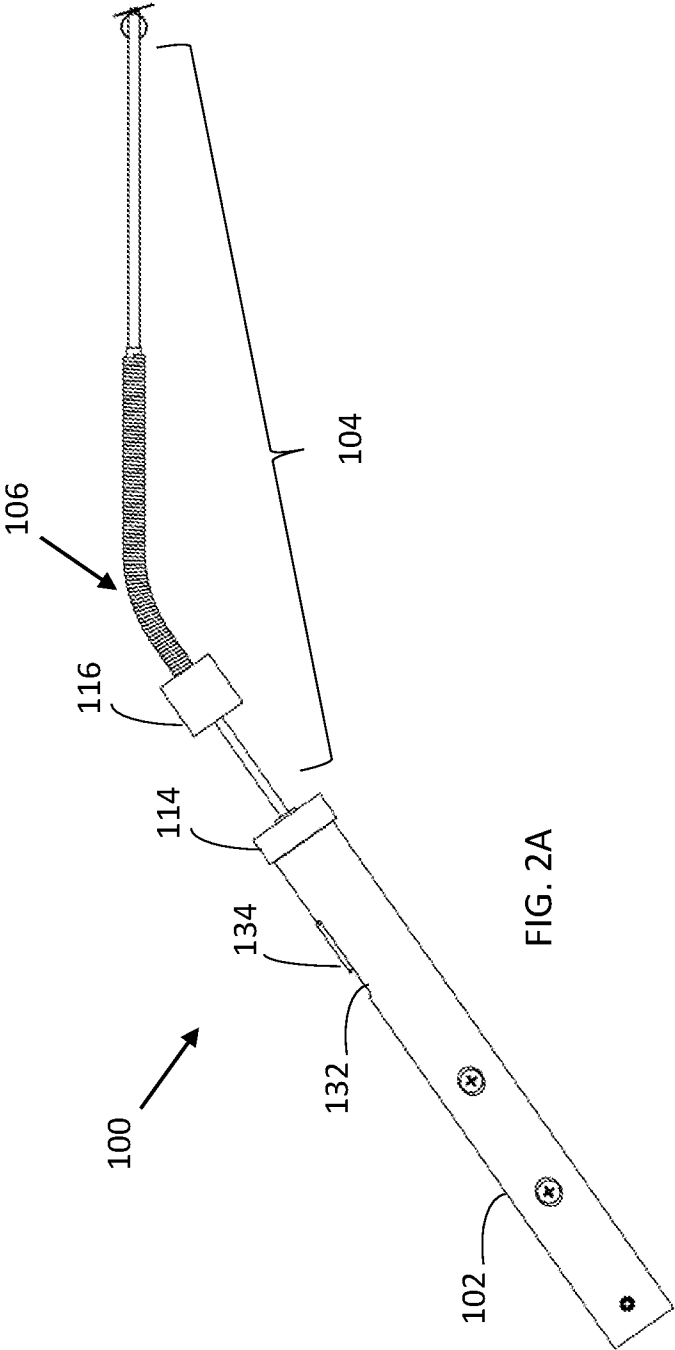


FIG. 1I



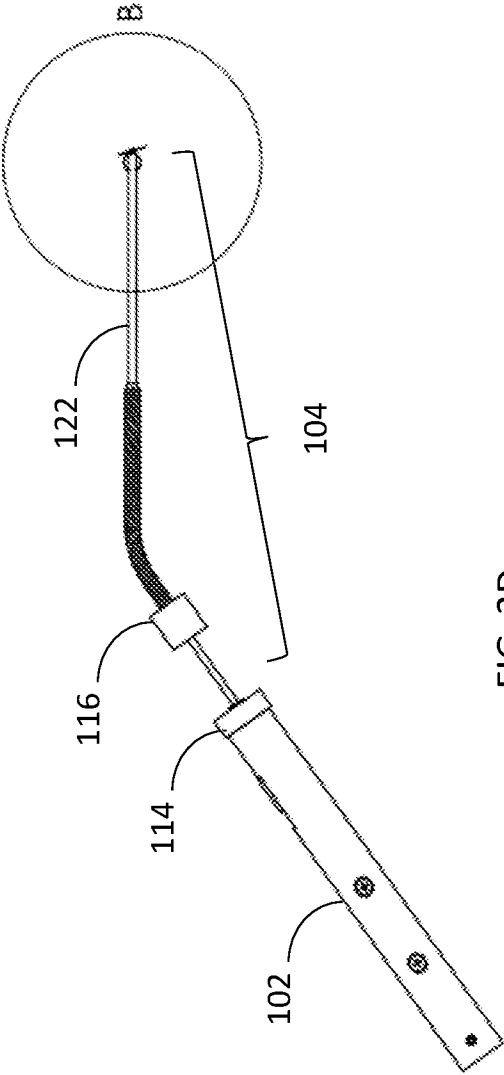


FIG. 2D

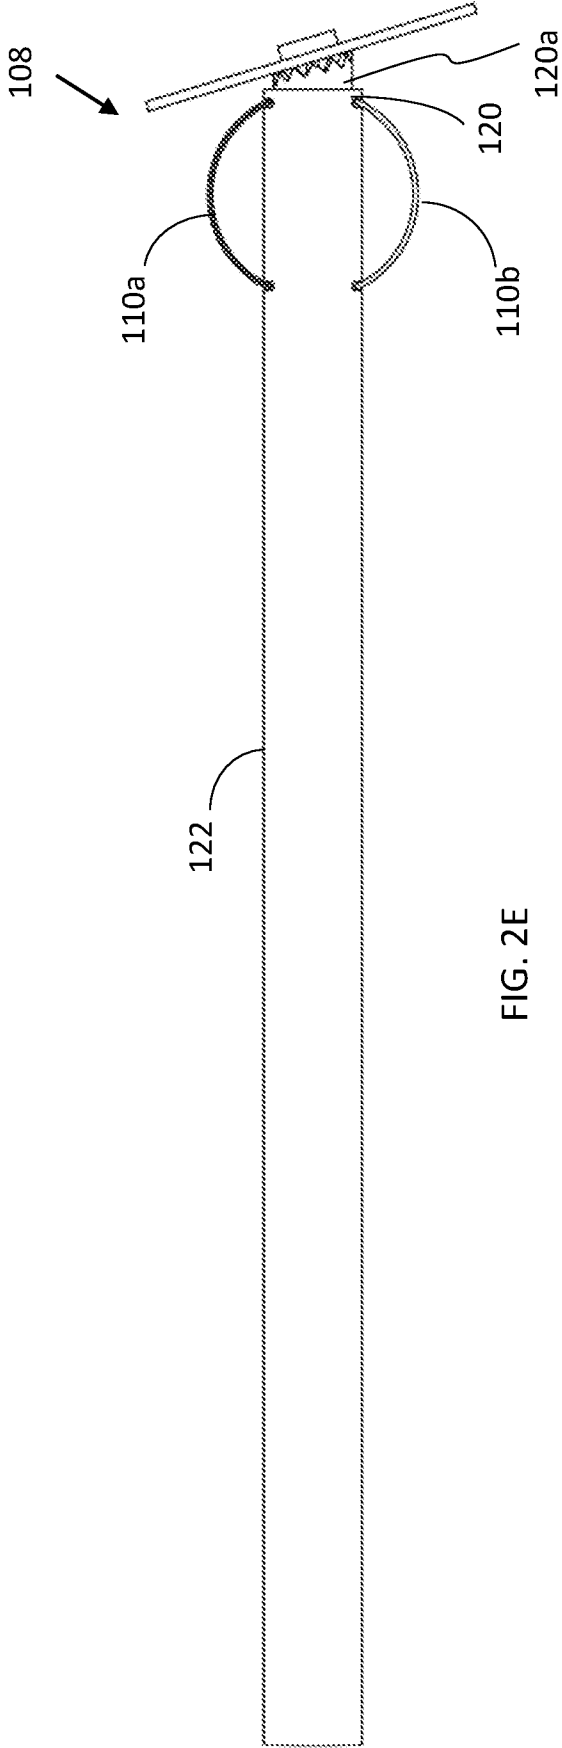


FIG. 2E

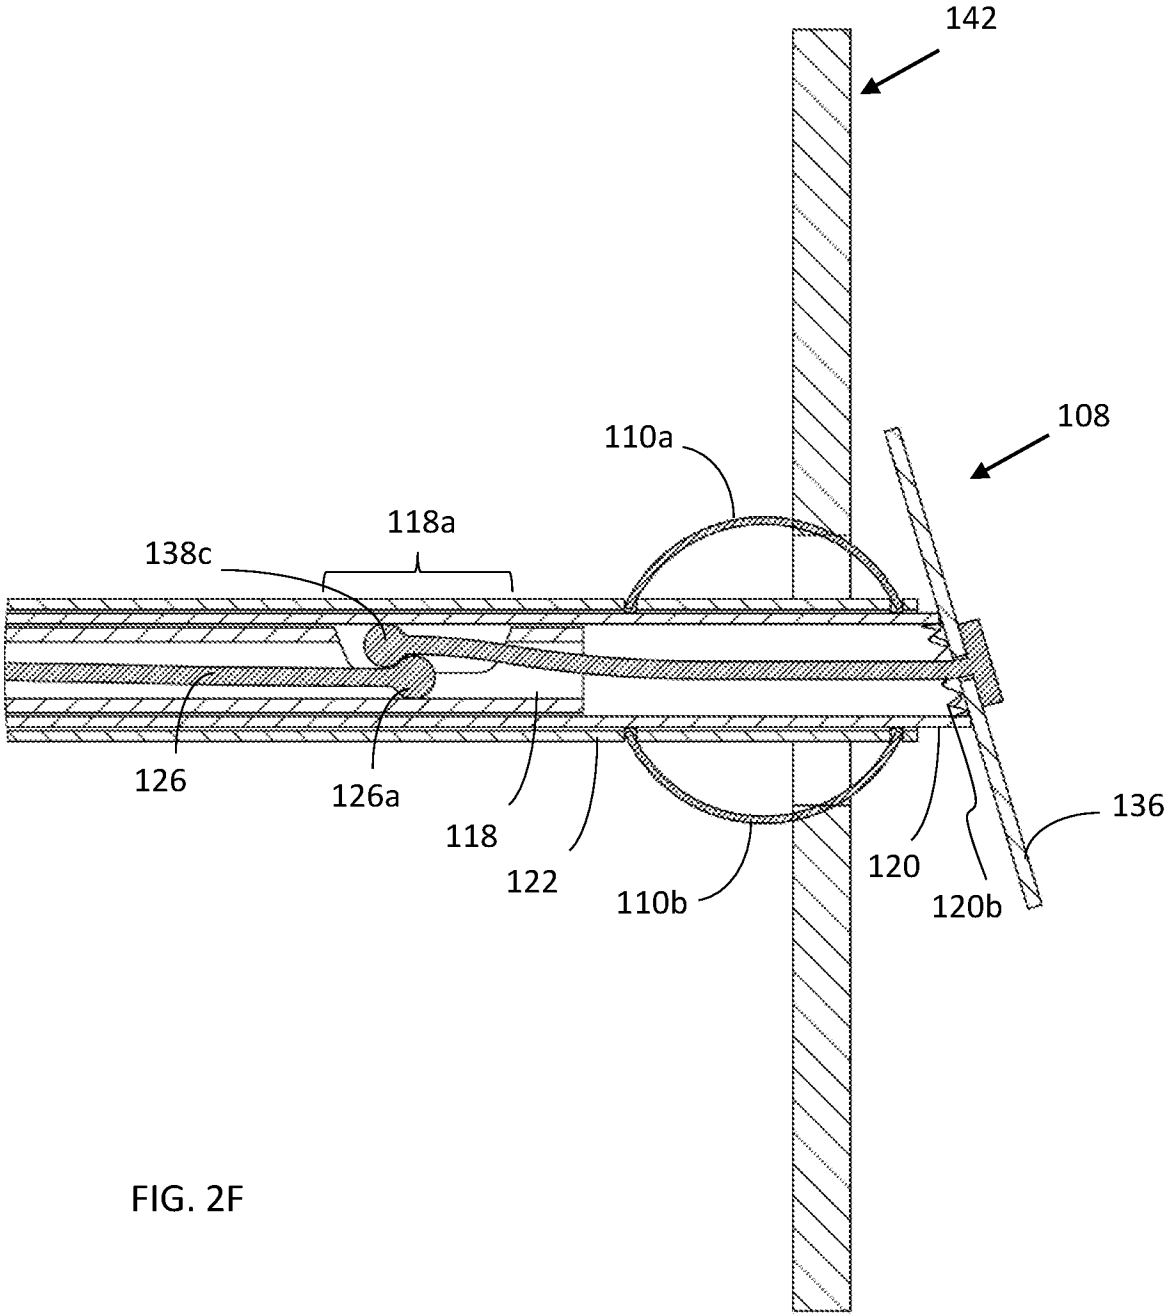
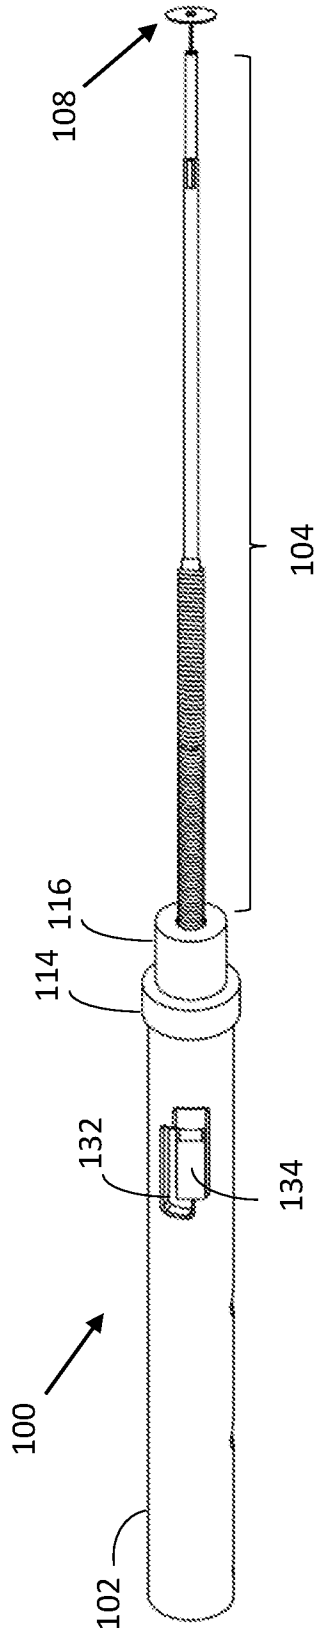
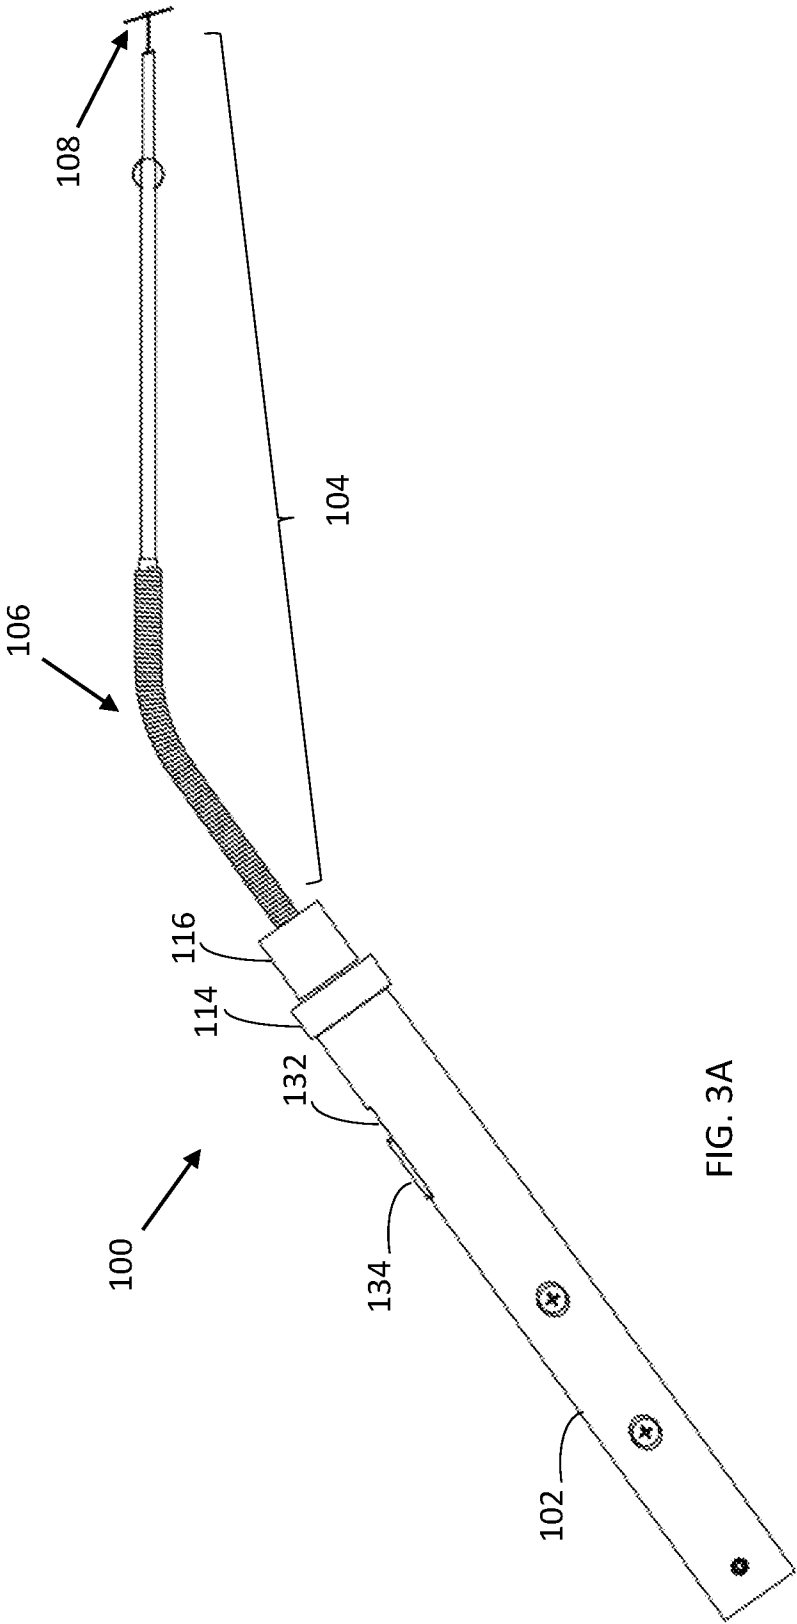


FIG. 2F



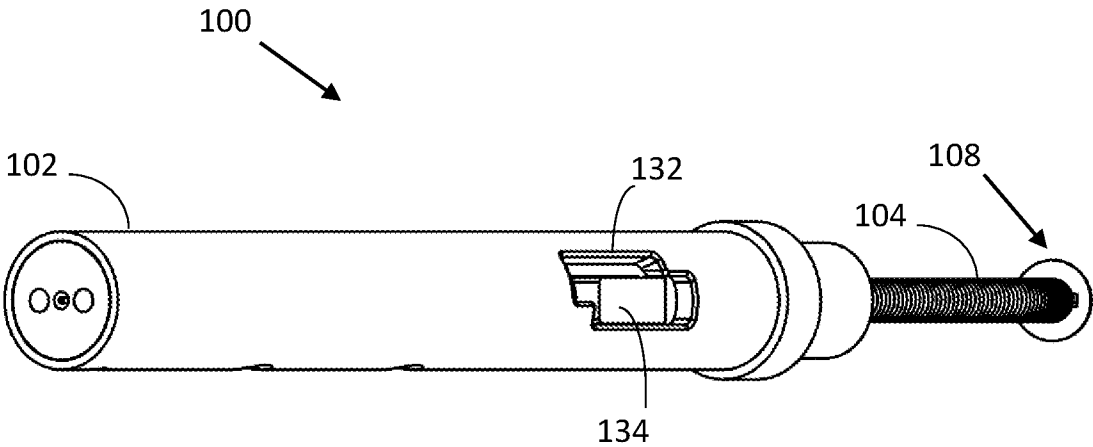
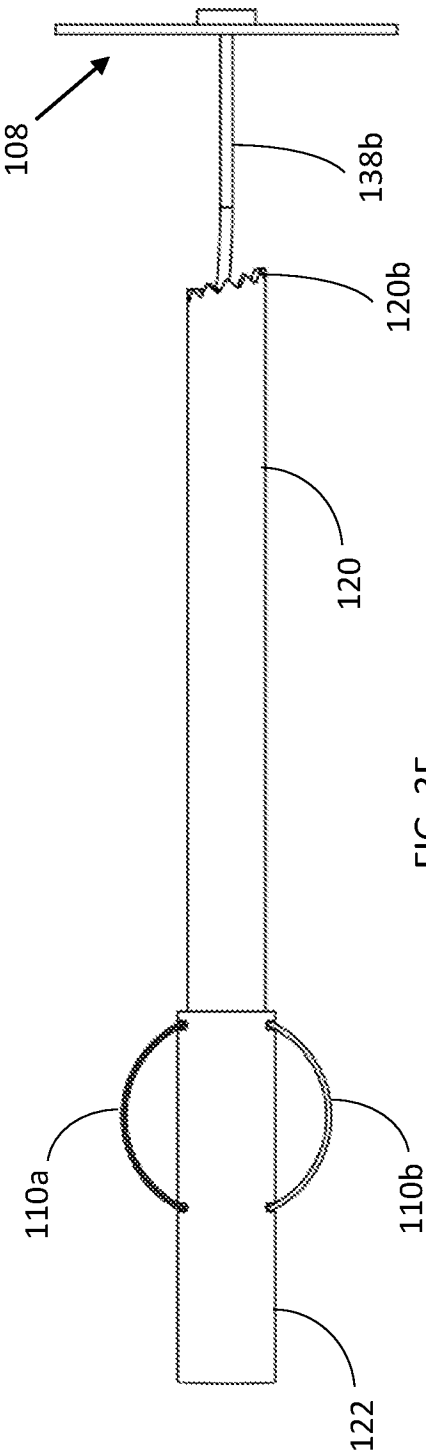
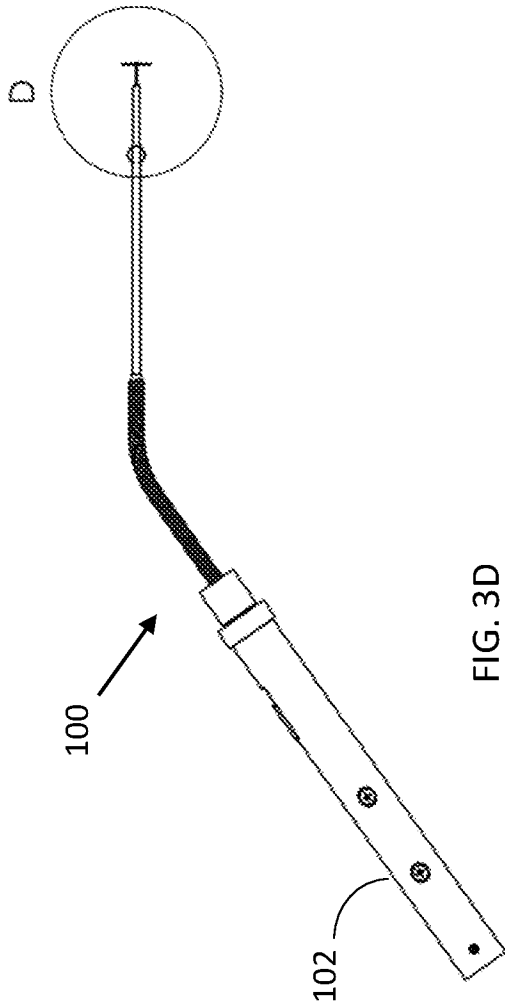


FIG. 3C



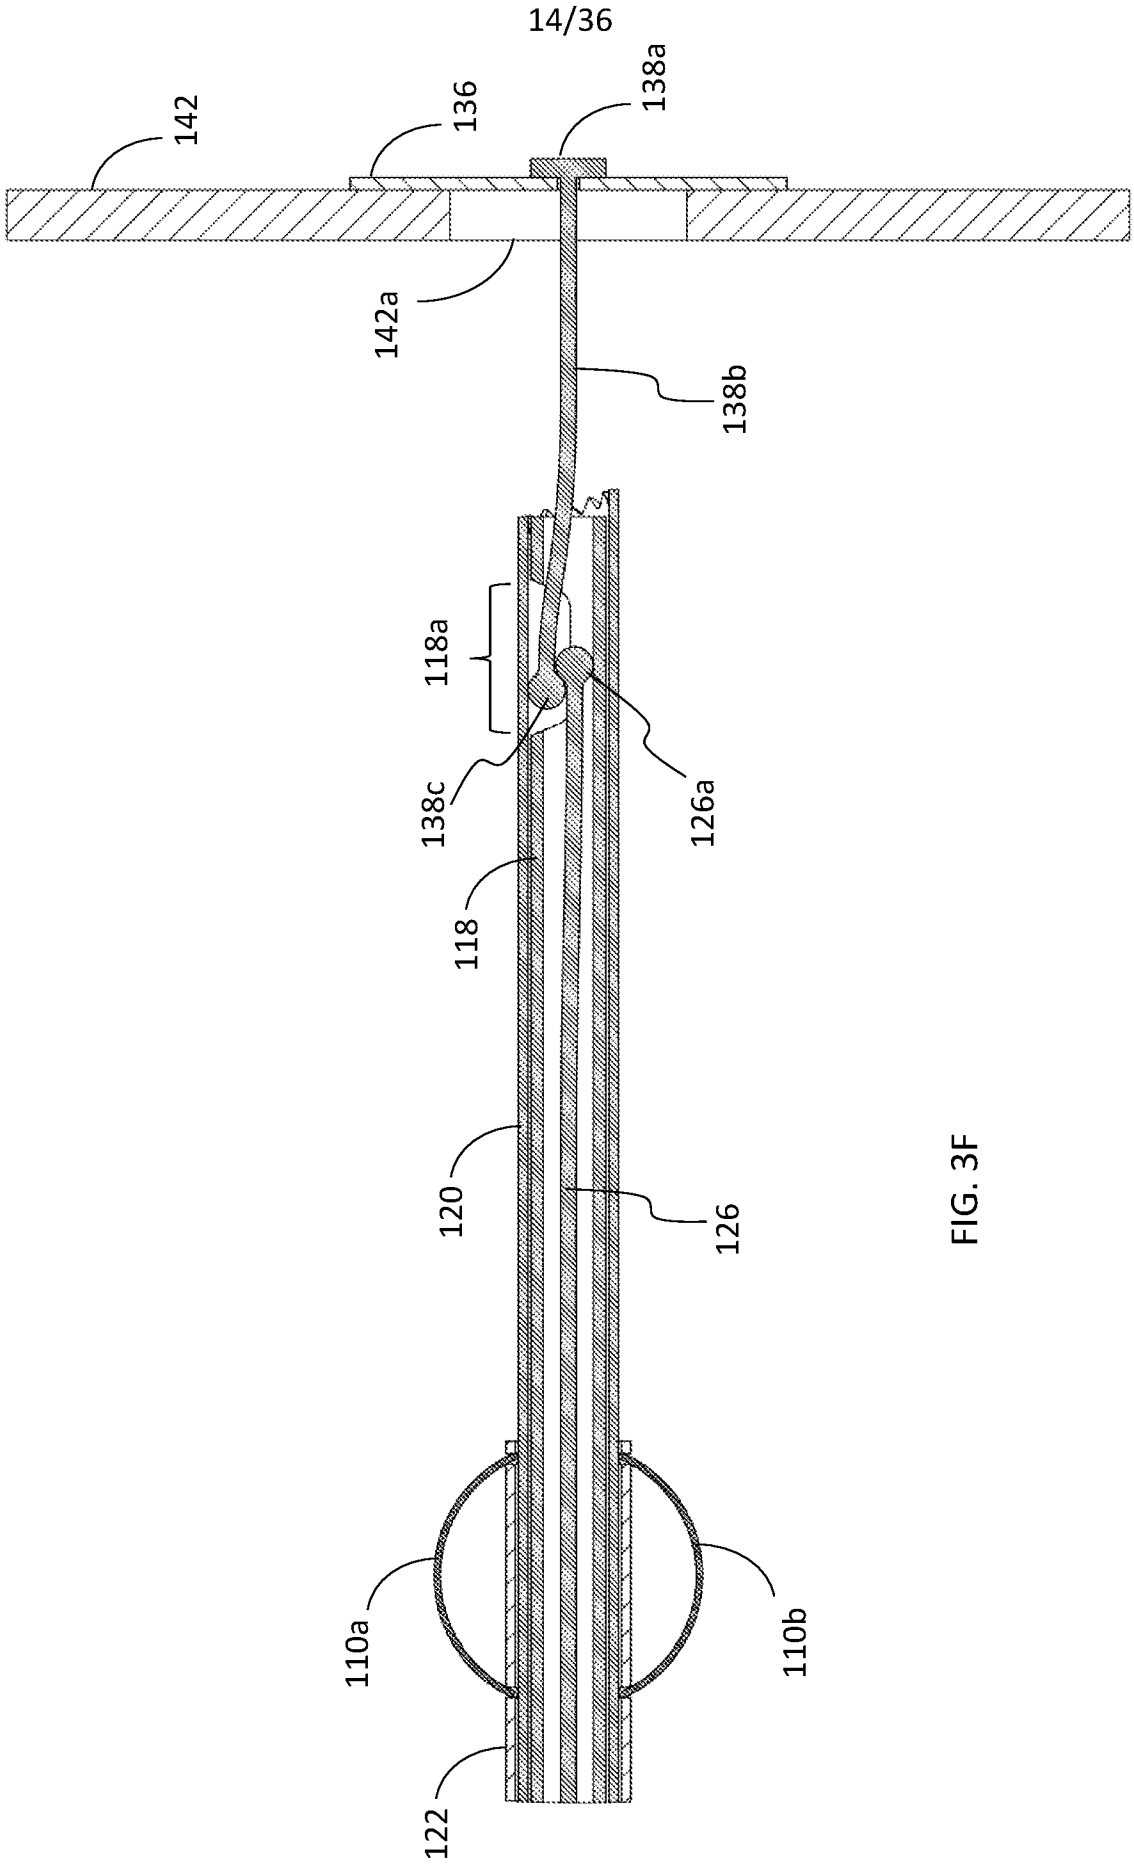


FIG. 3F

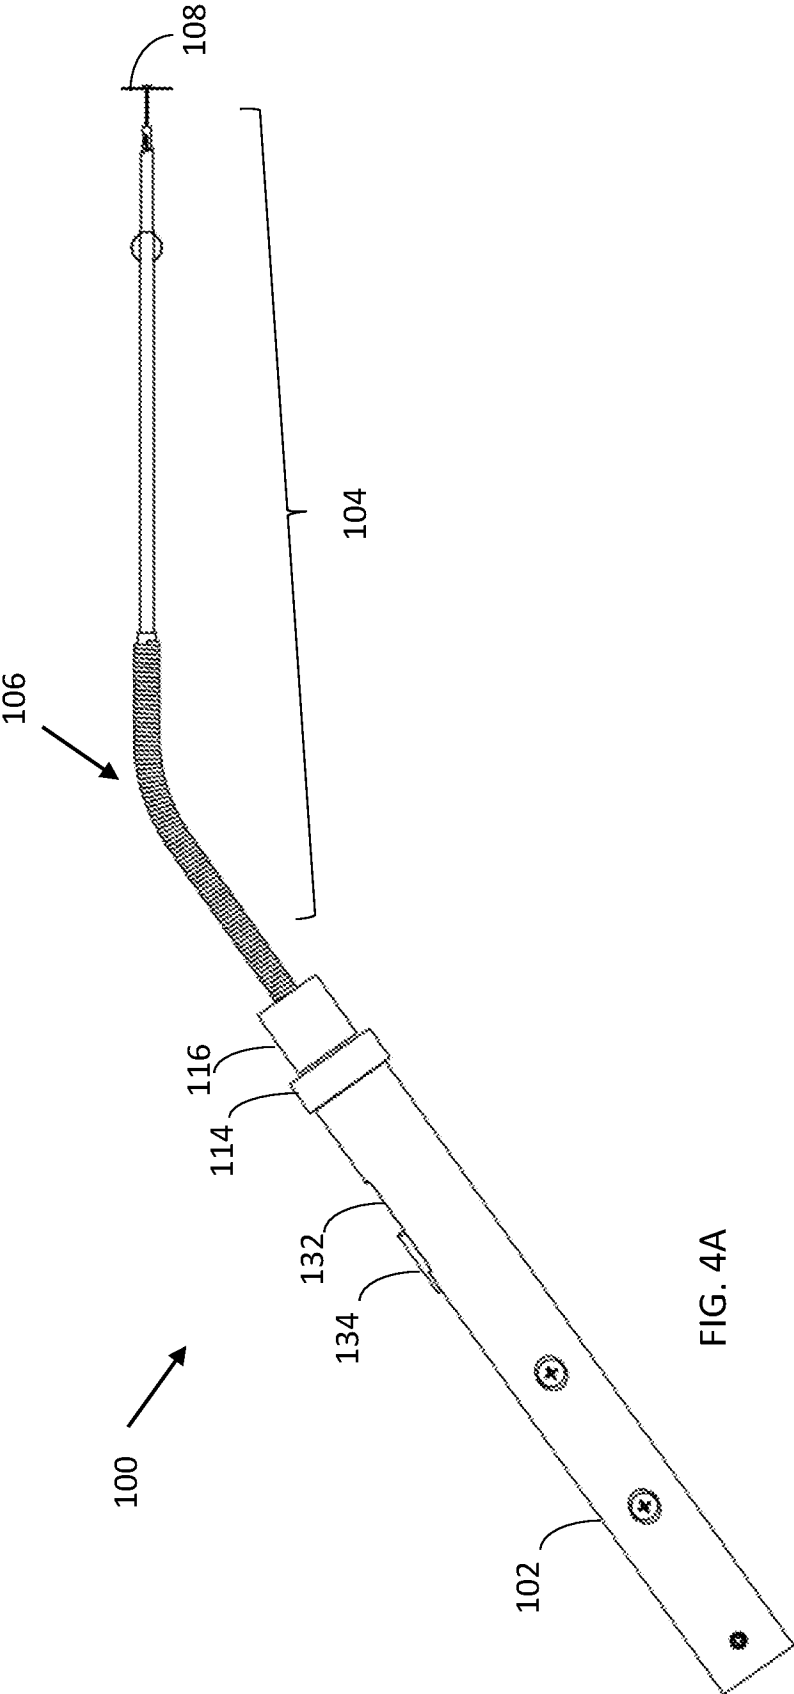


FIG. 4A

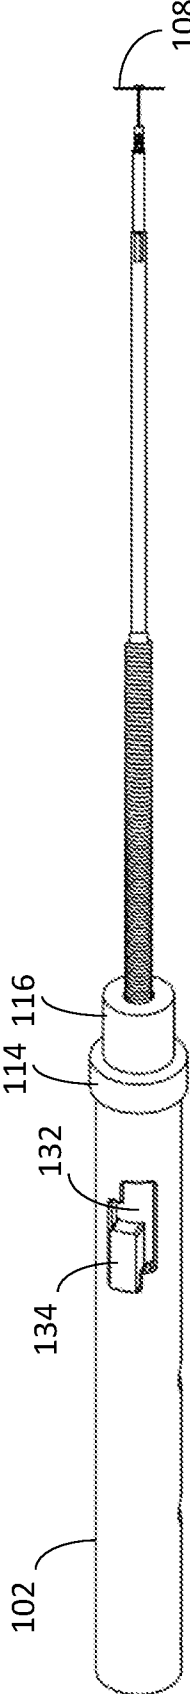


FIG. 4B

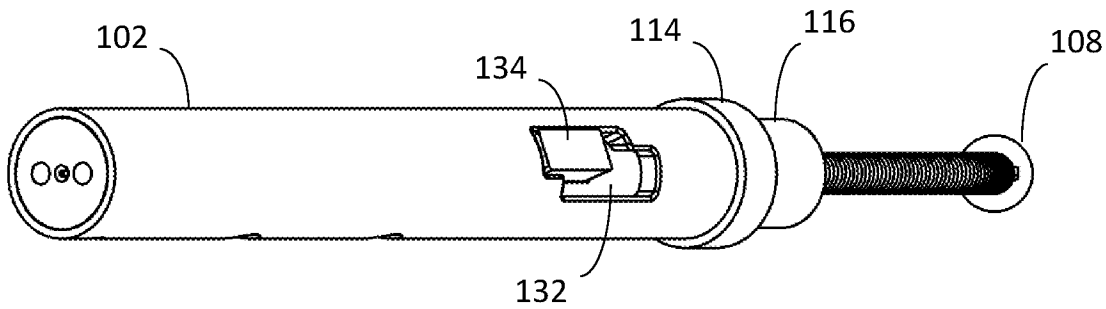


FIG. 4C

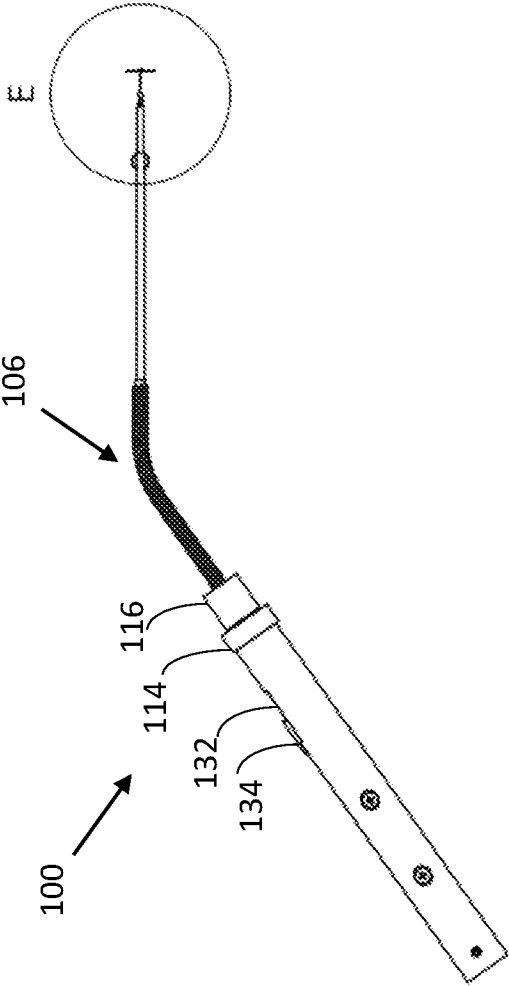


FIG. 4D

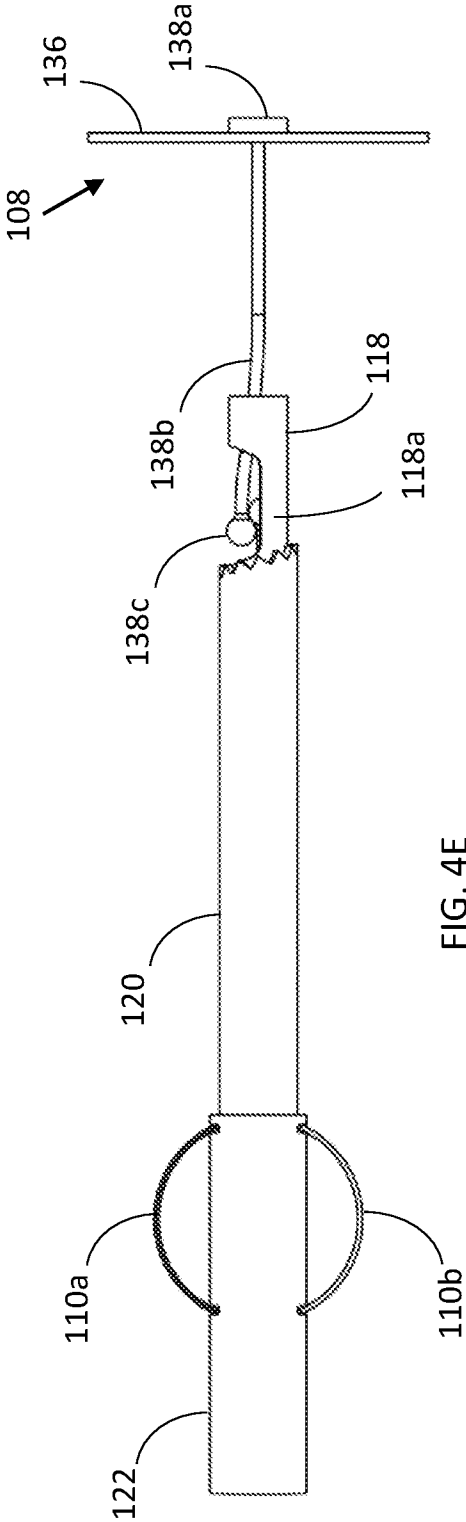


FIG. 4E

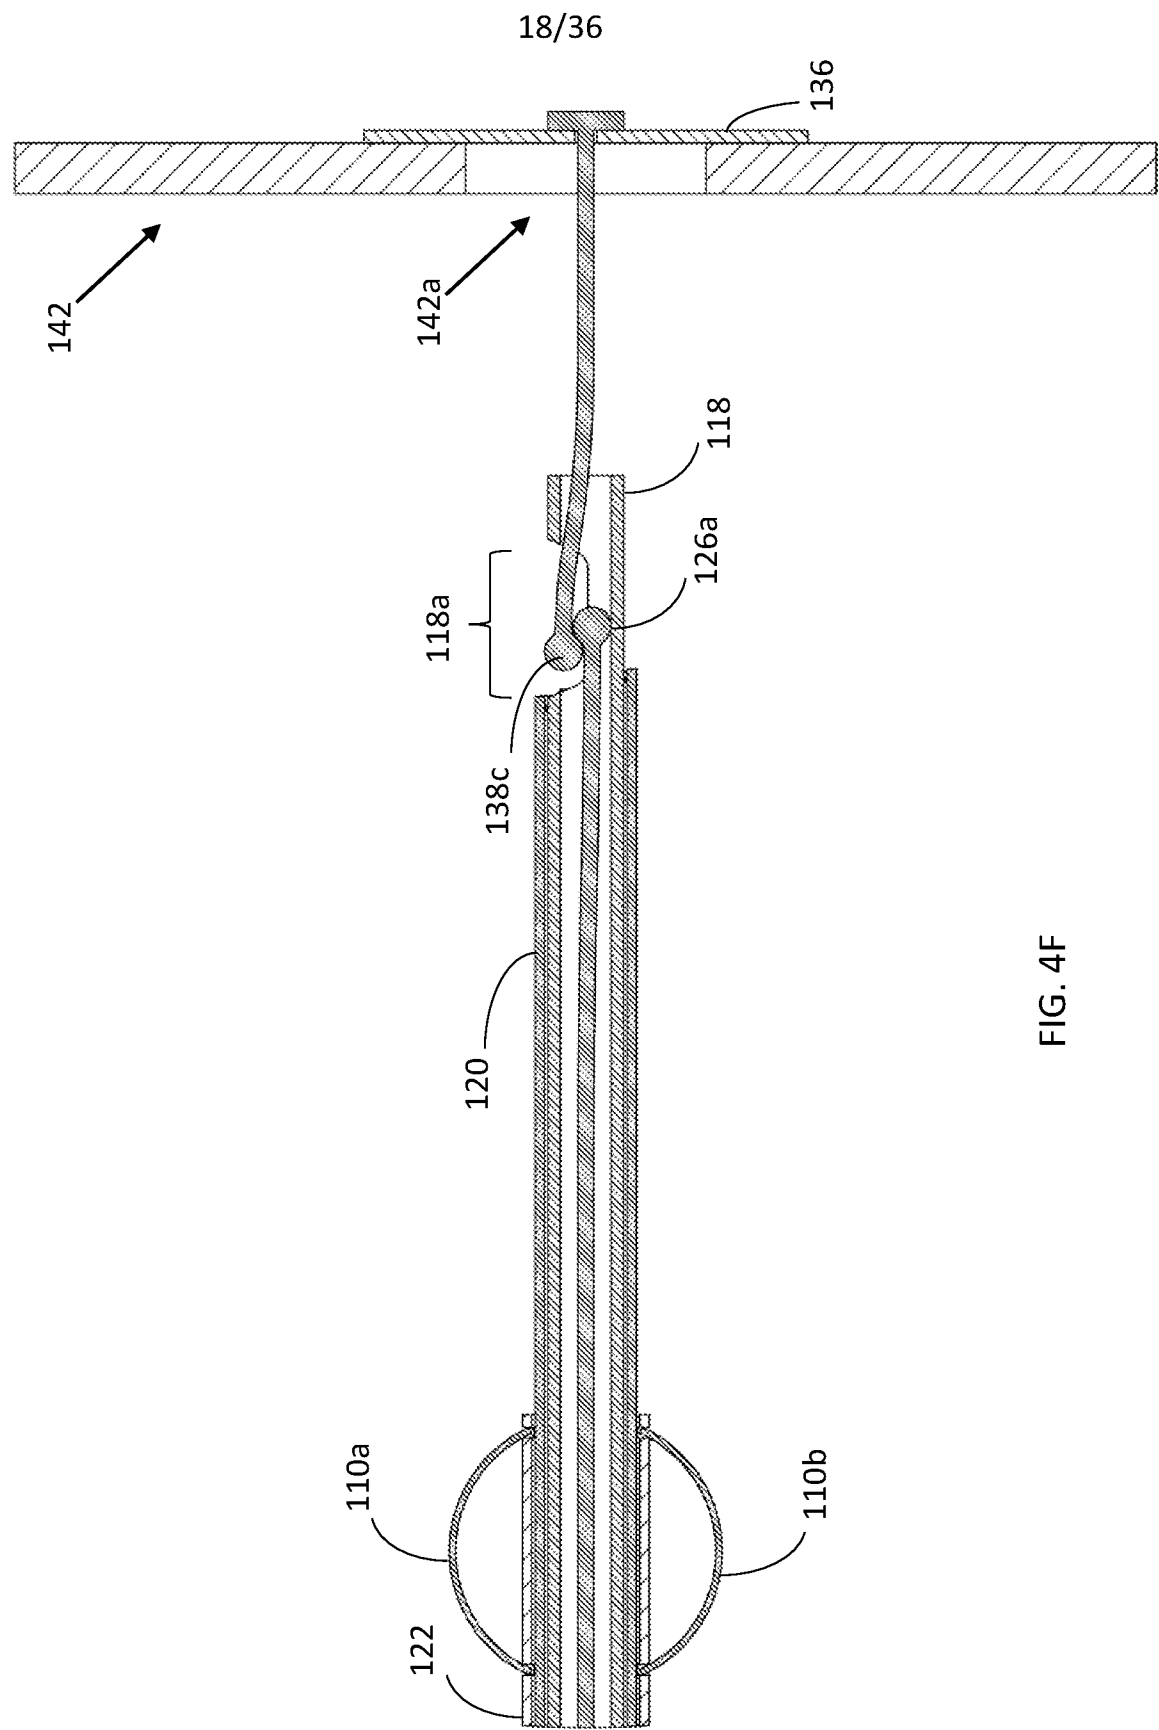


FIG. 4F

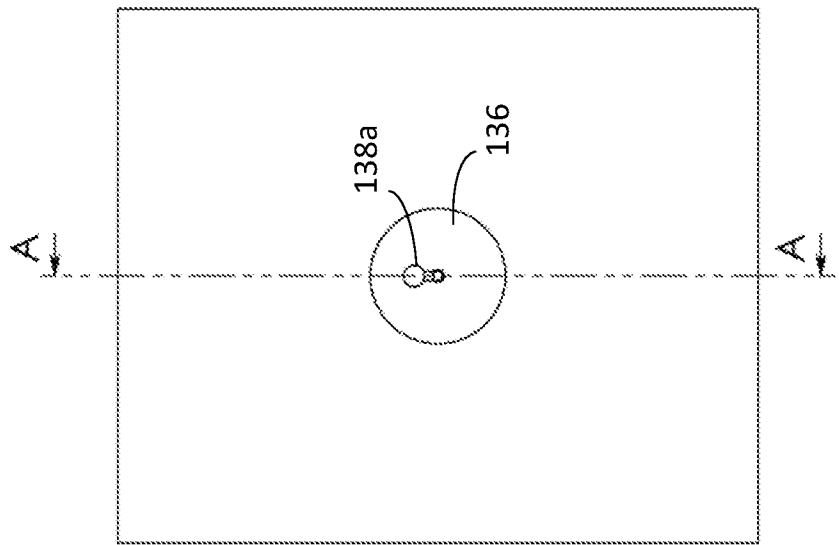


FIG. 5A

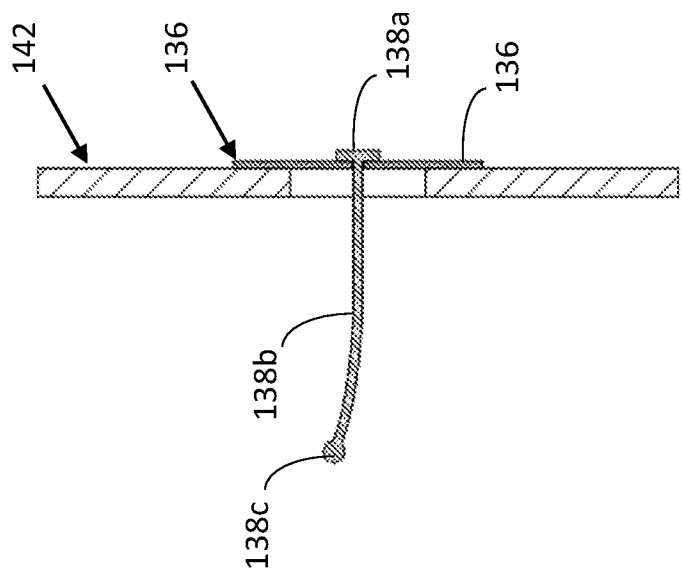
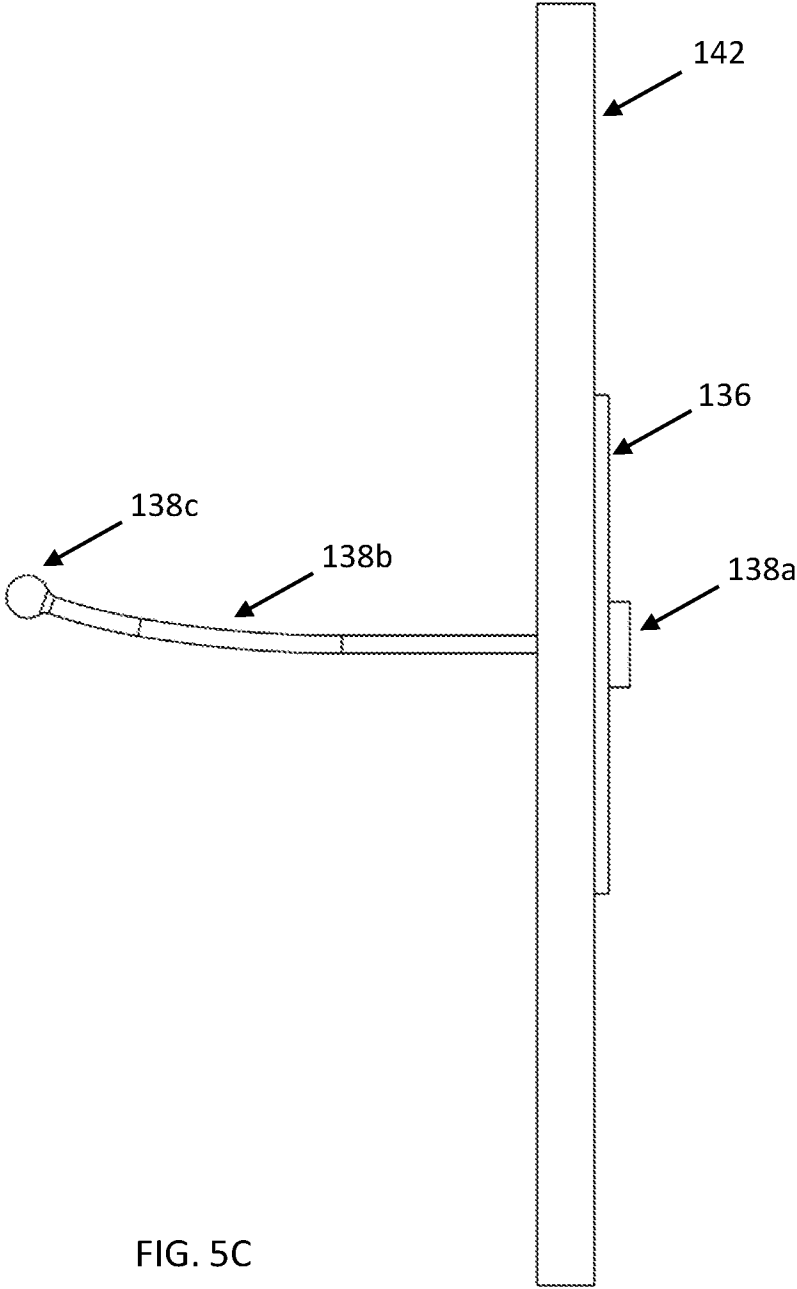


FIG. 5B



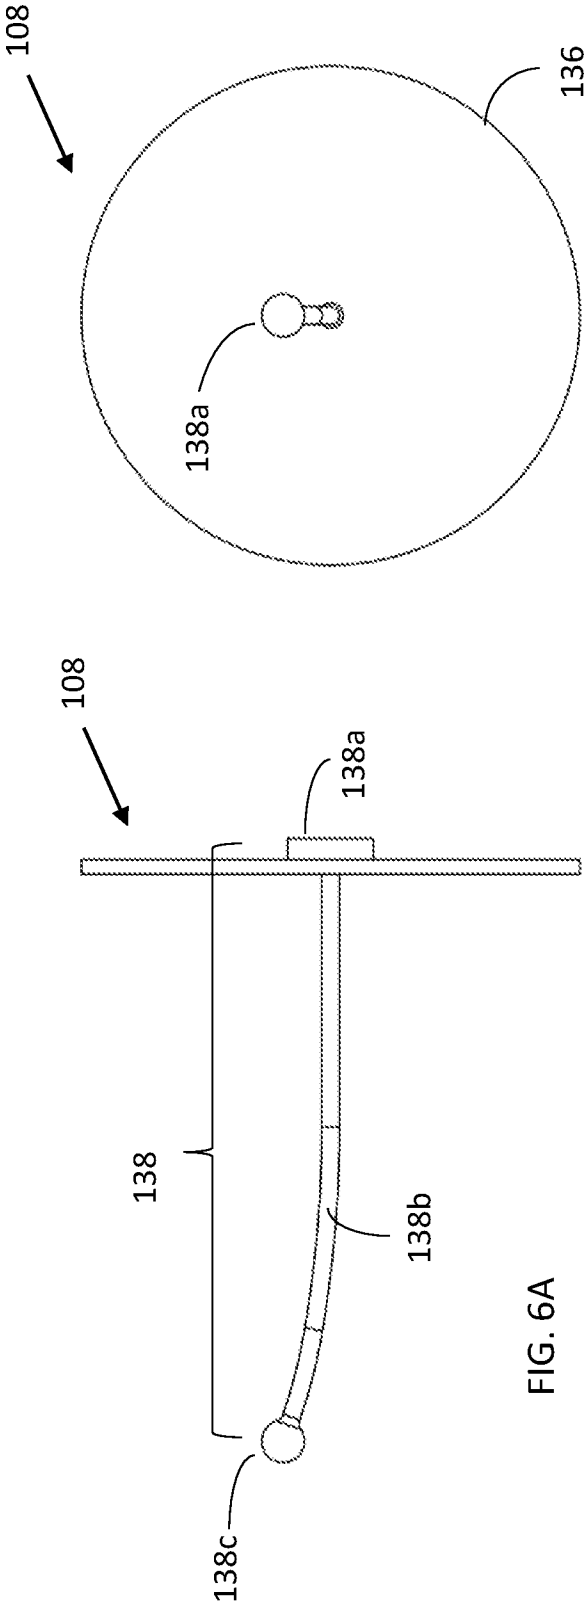


FIG. 6A

FIG. 6C

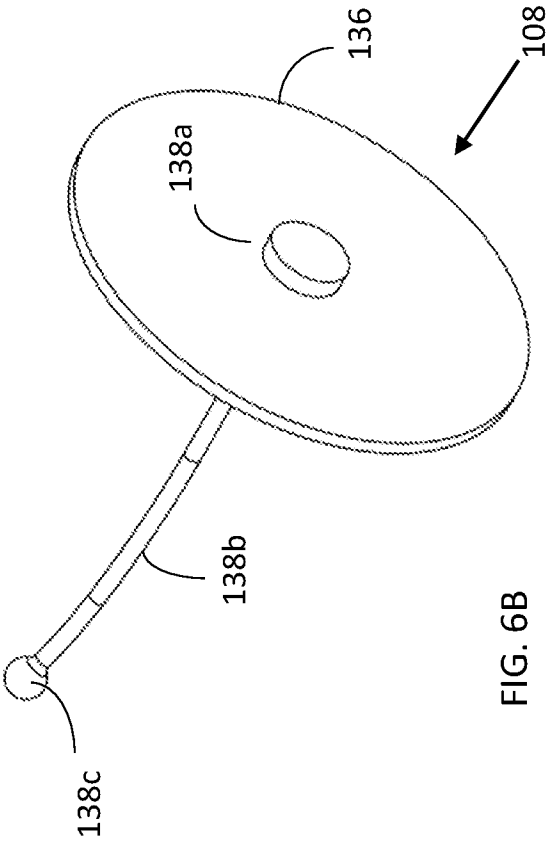


FIG. 6B

22/36

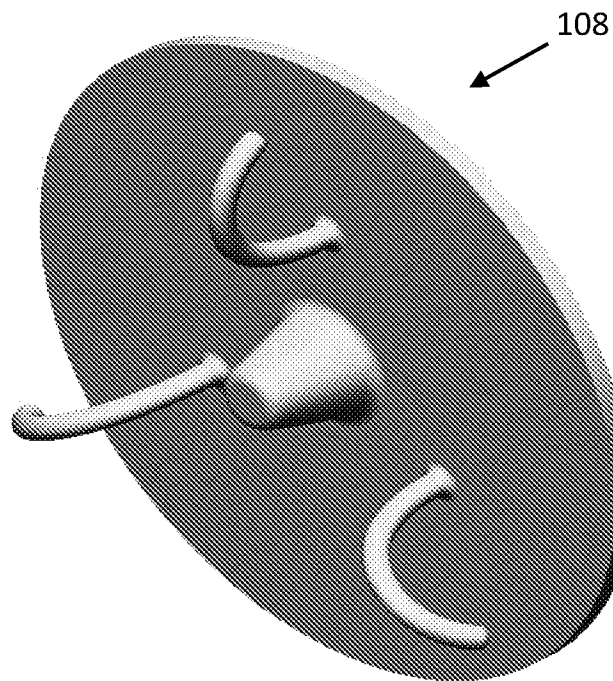


FIG. 7A

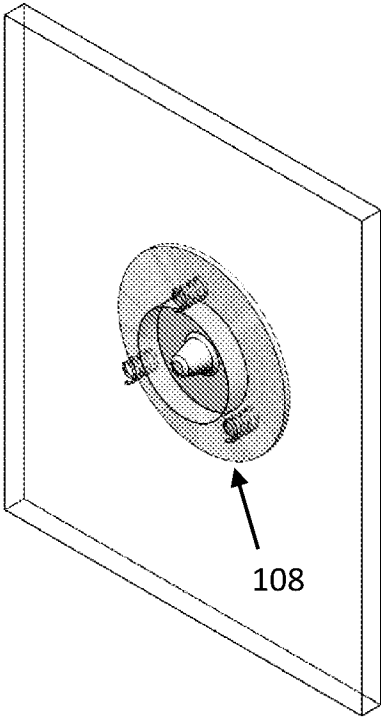


FIG. 7B

24/36

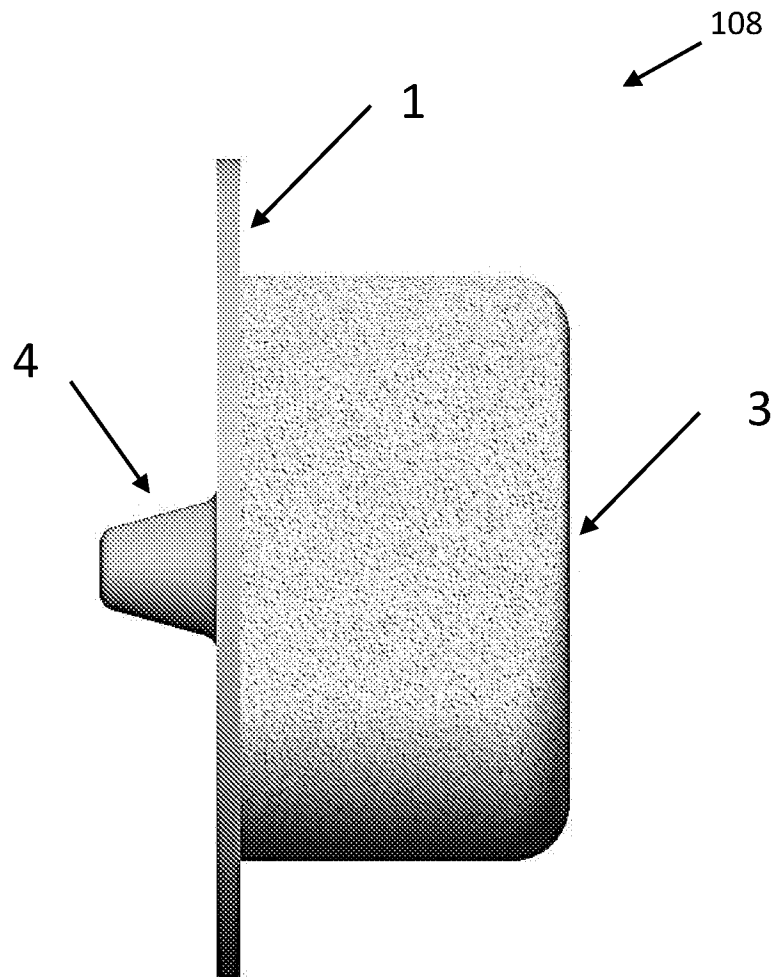


FIG. 7C

25/36

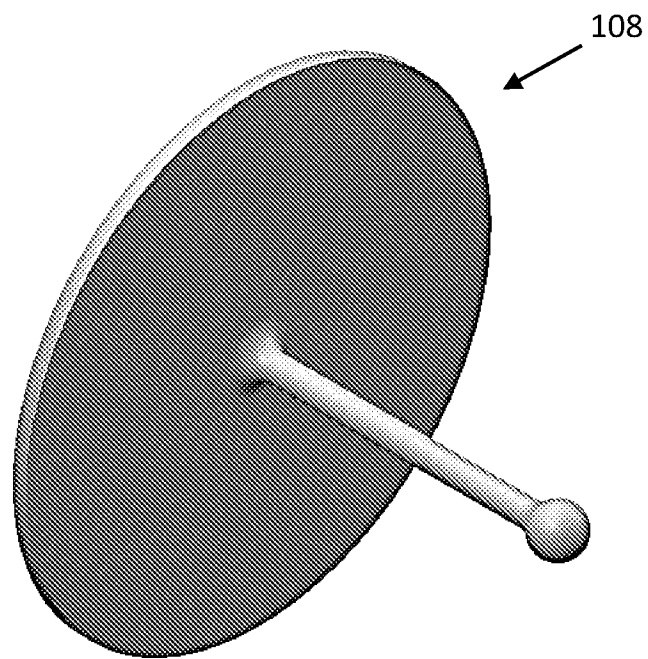


FIG. 7D

26/36

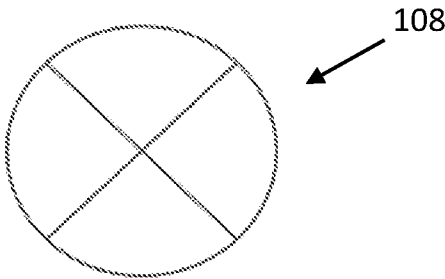


FIG. 7E

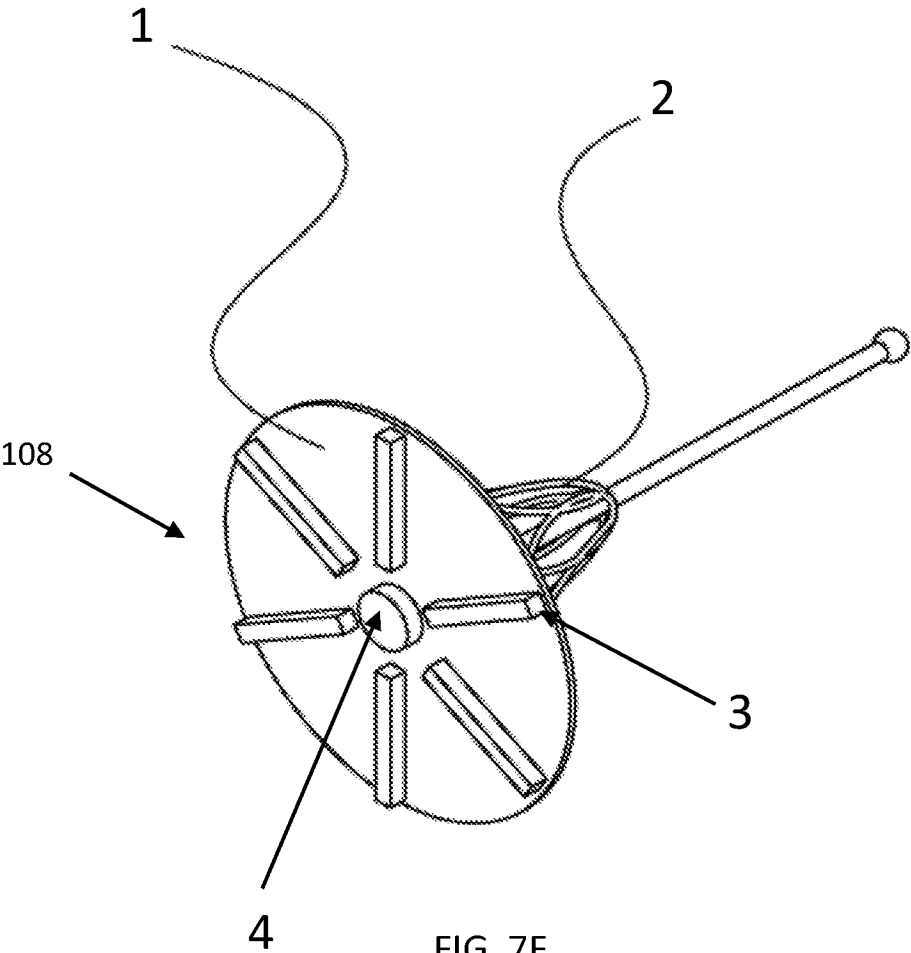


FIG. 7F

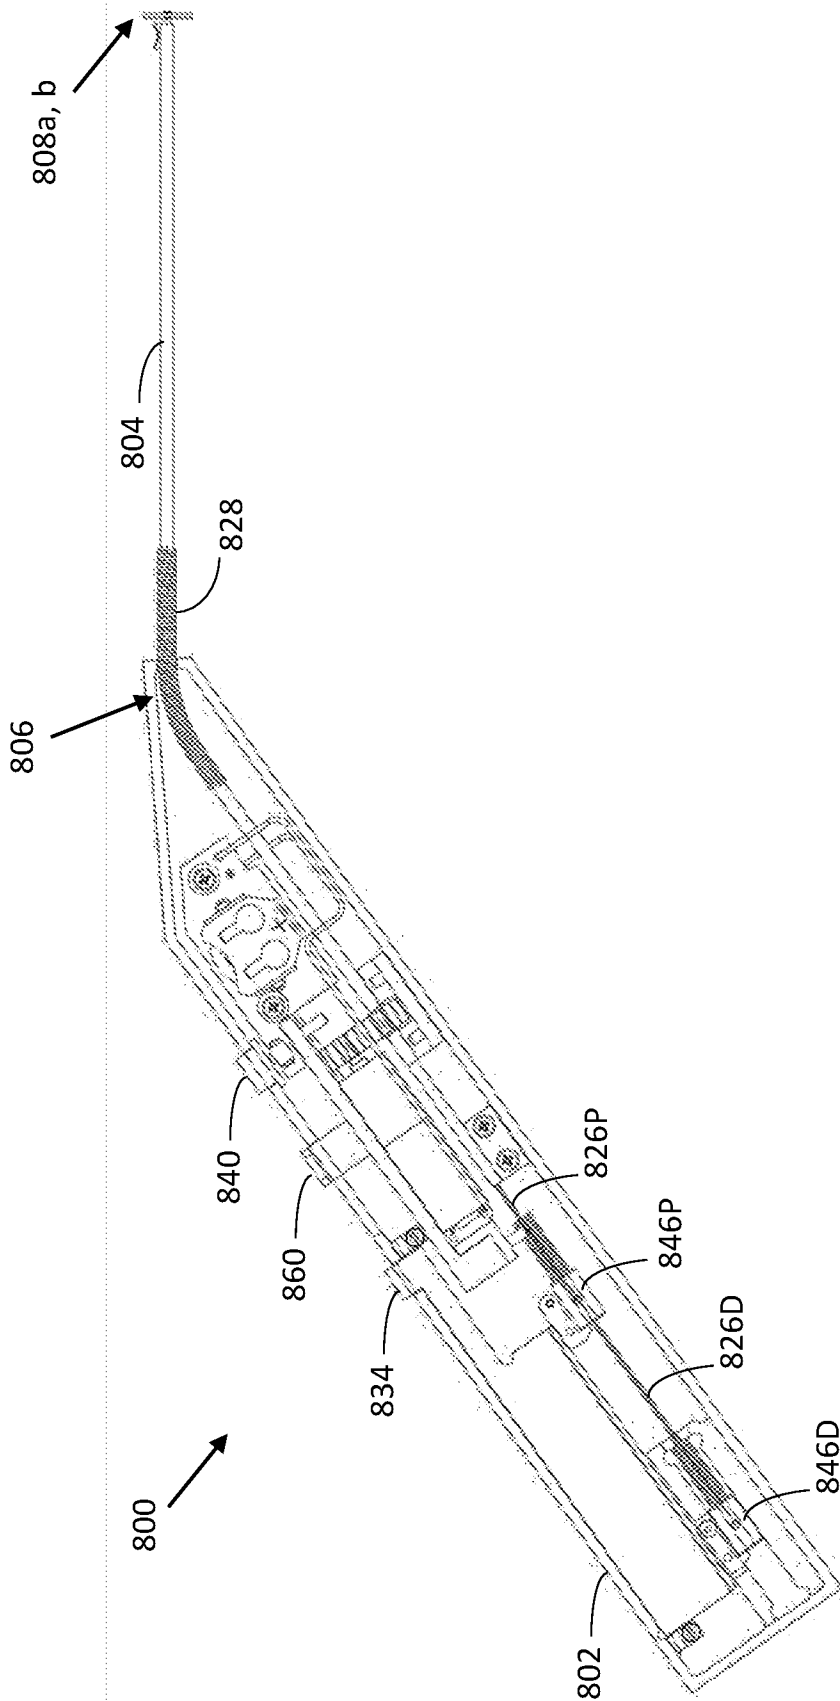


FIG. 8A

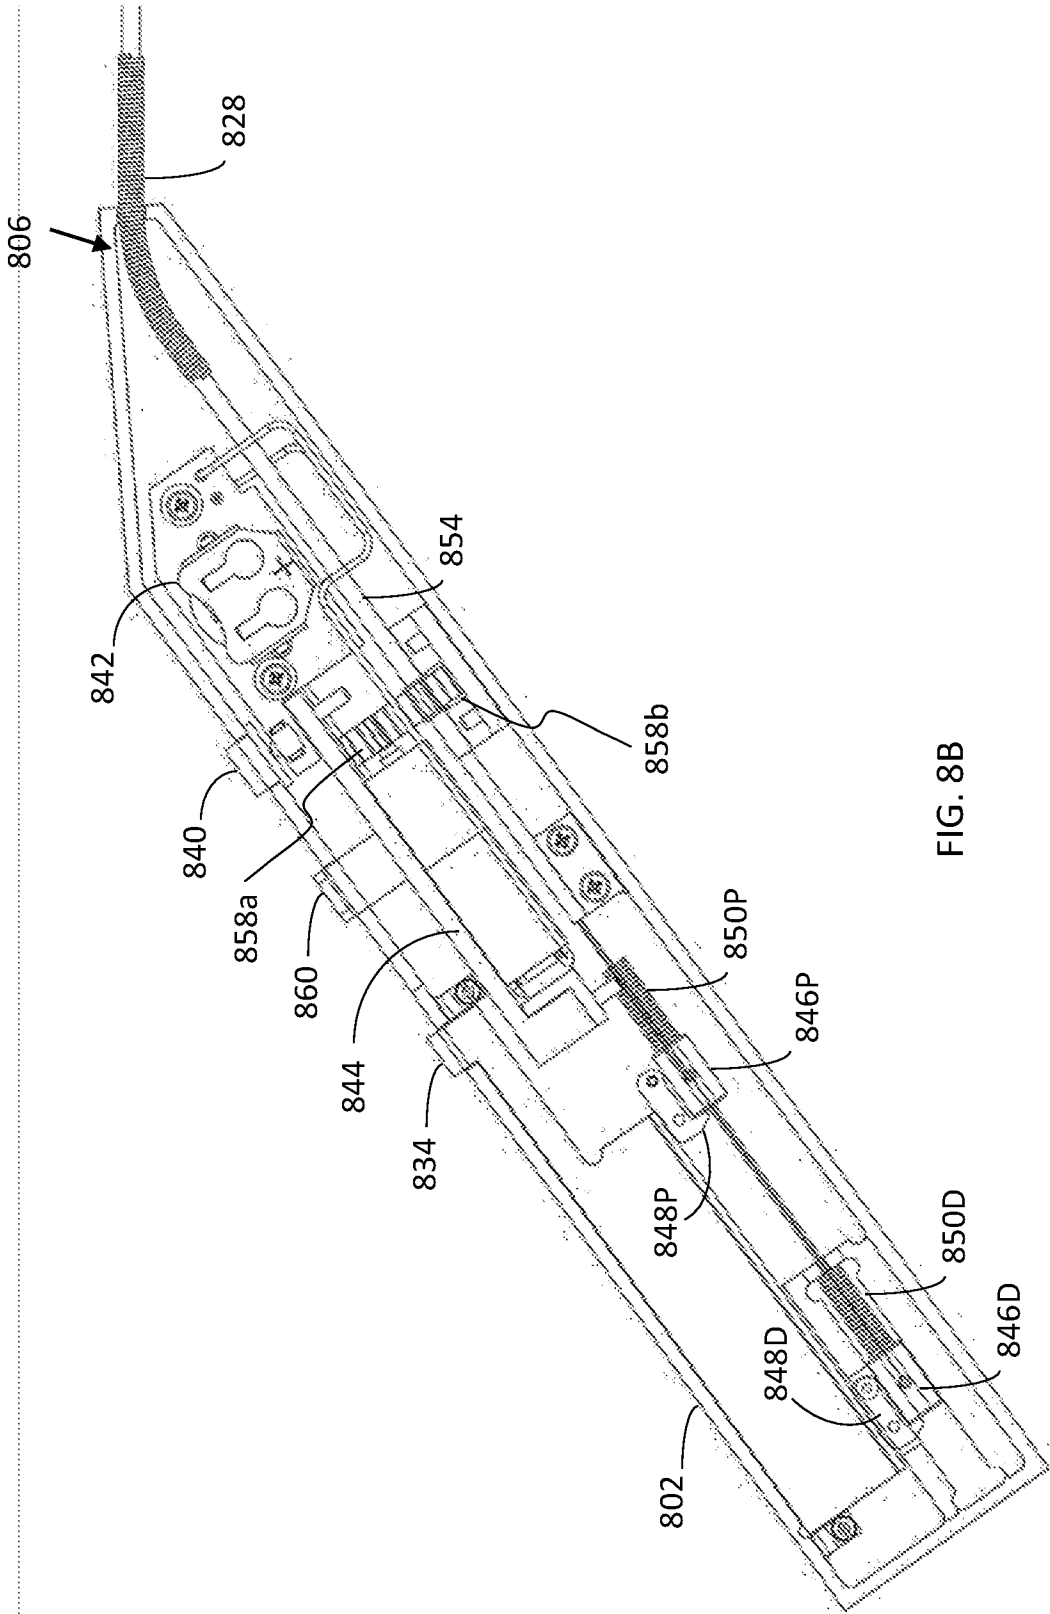


FIG. 8B

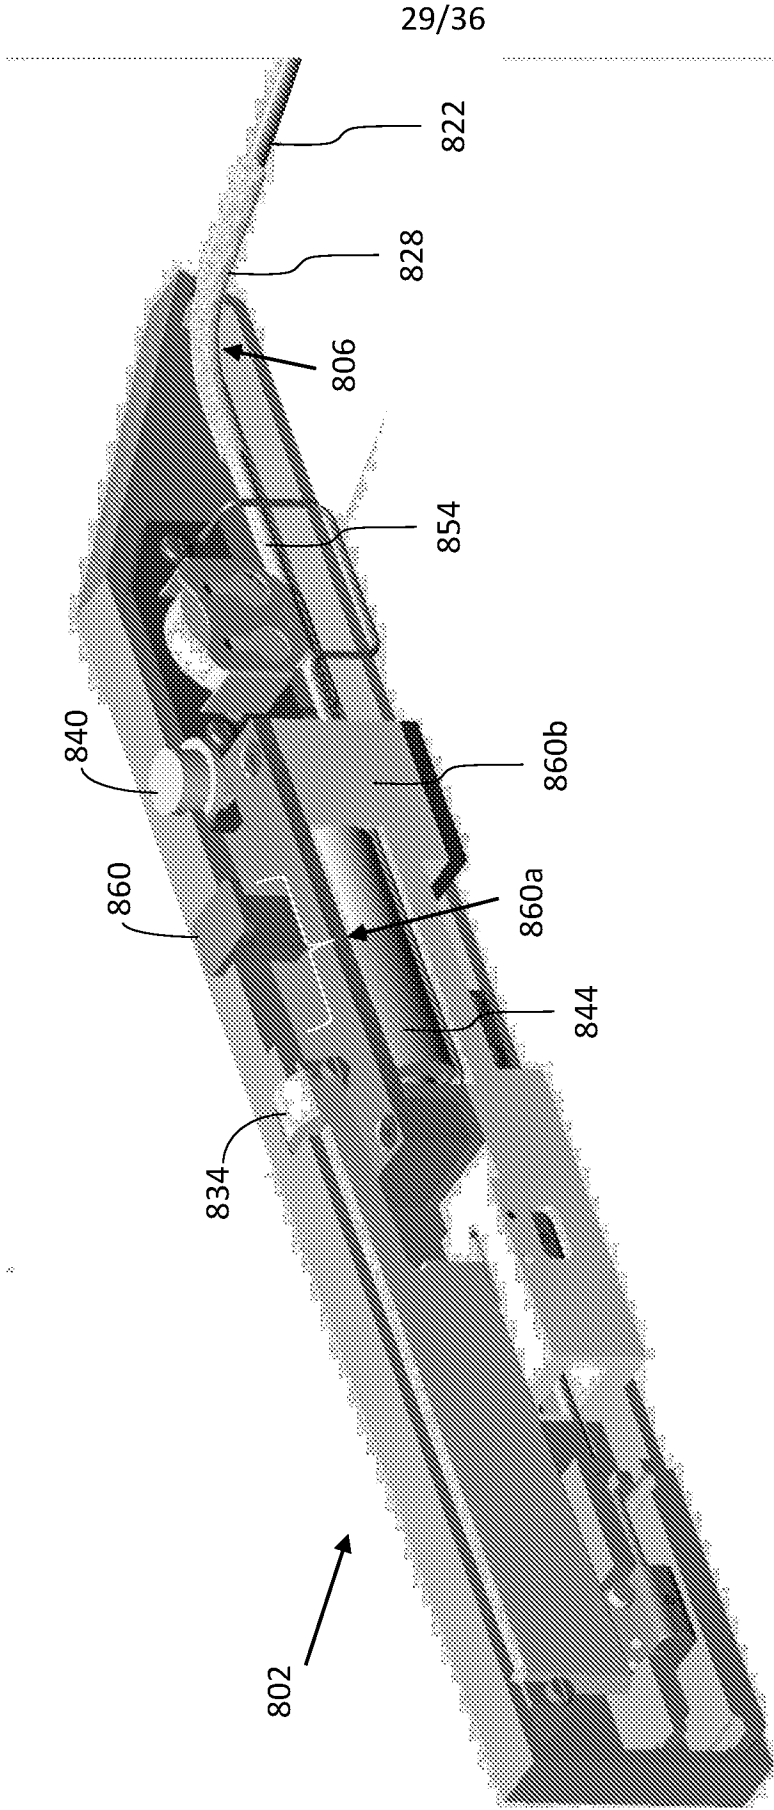


FIG. 8C

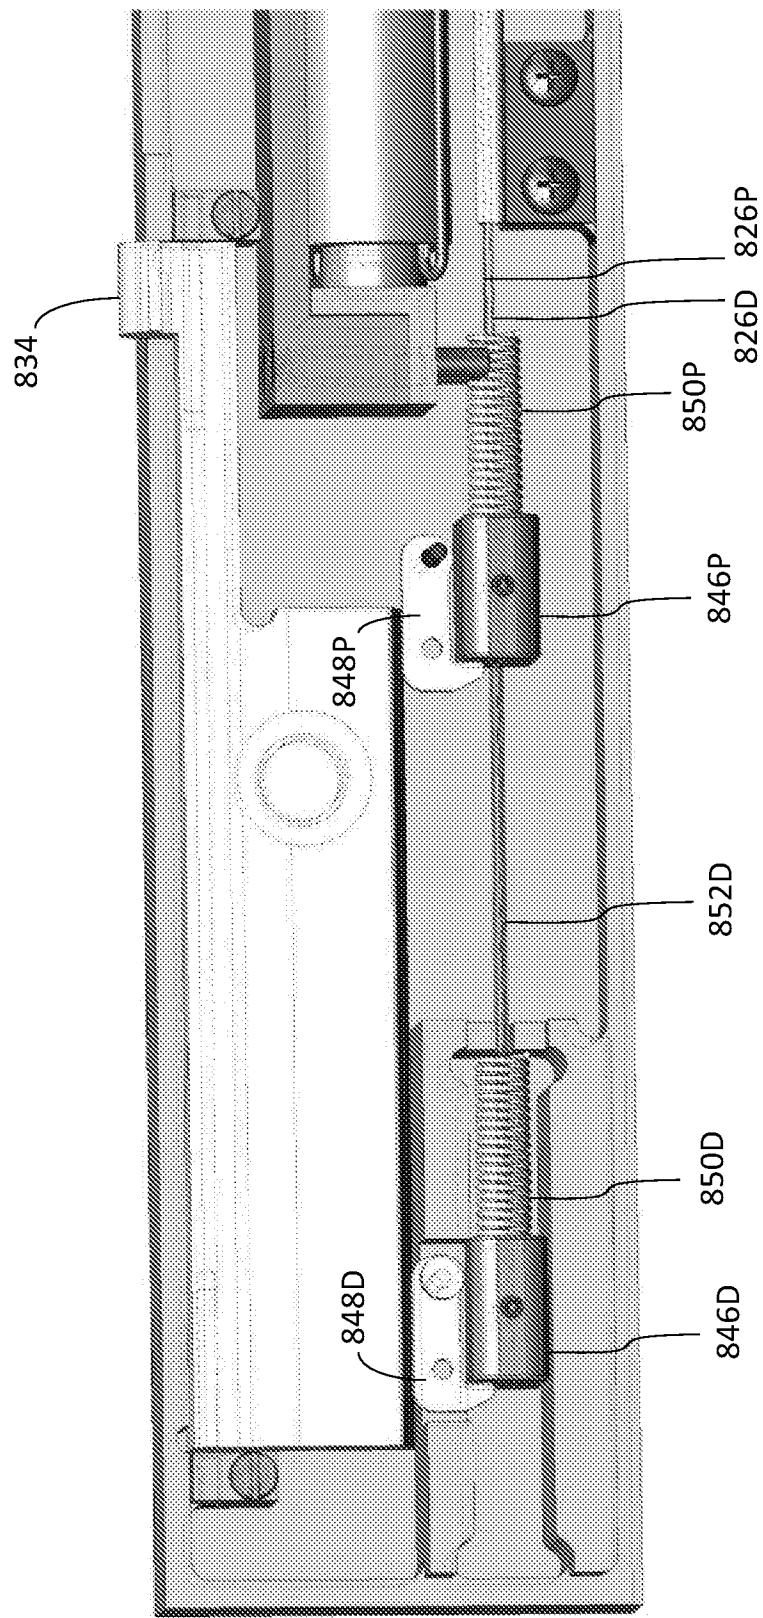


FIG. 8D

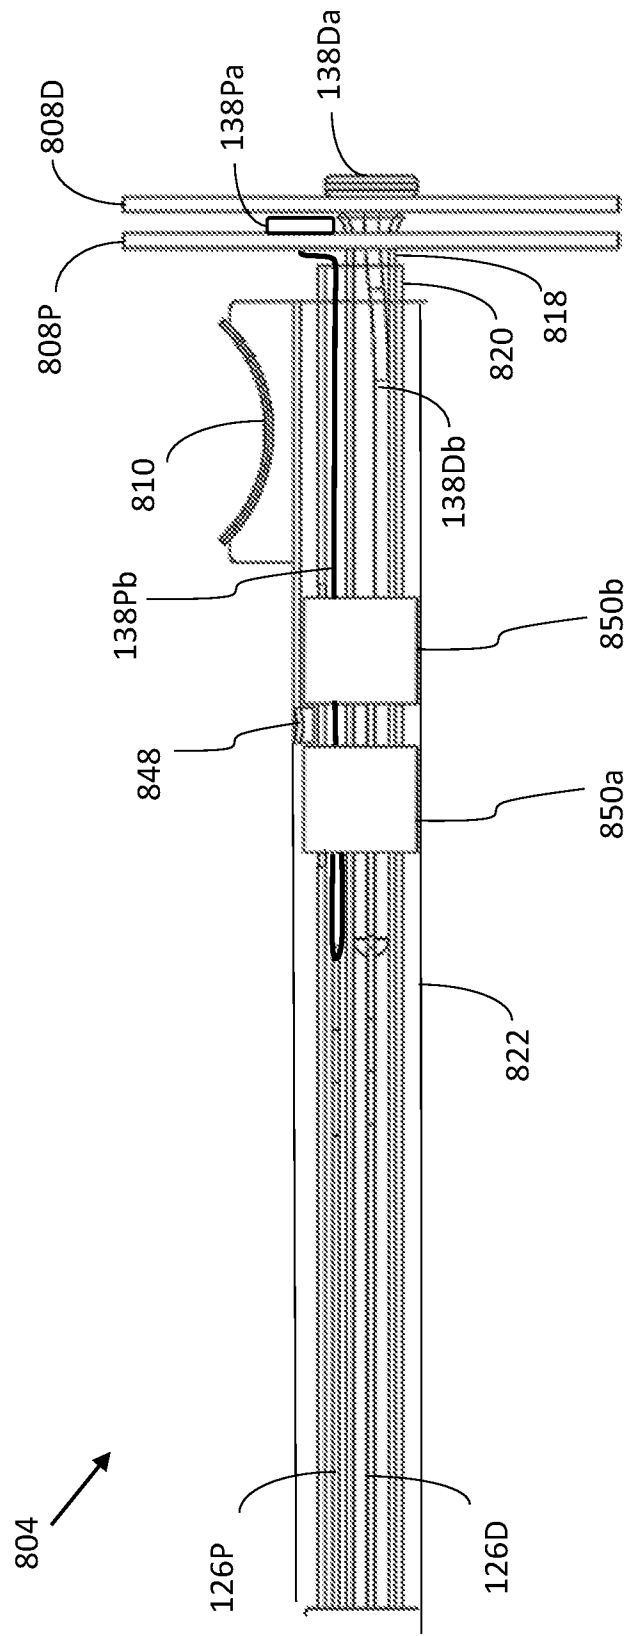


FIG. 8E

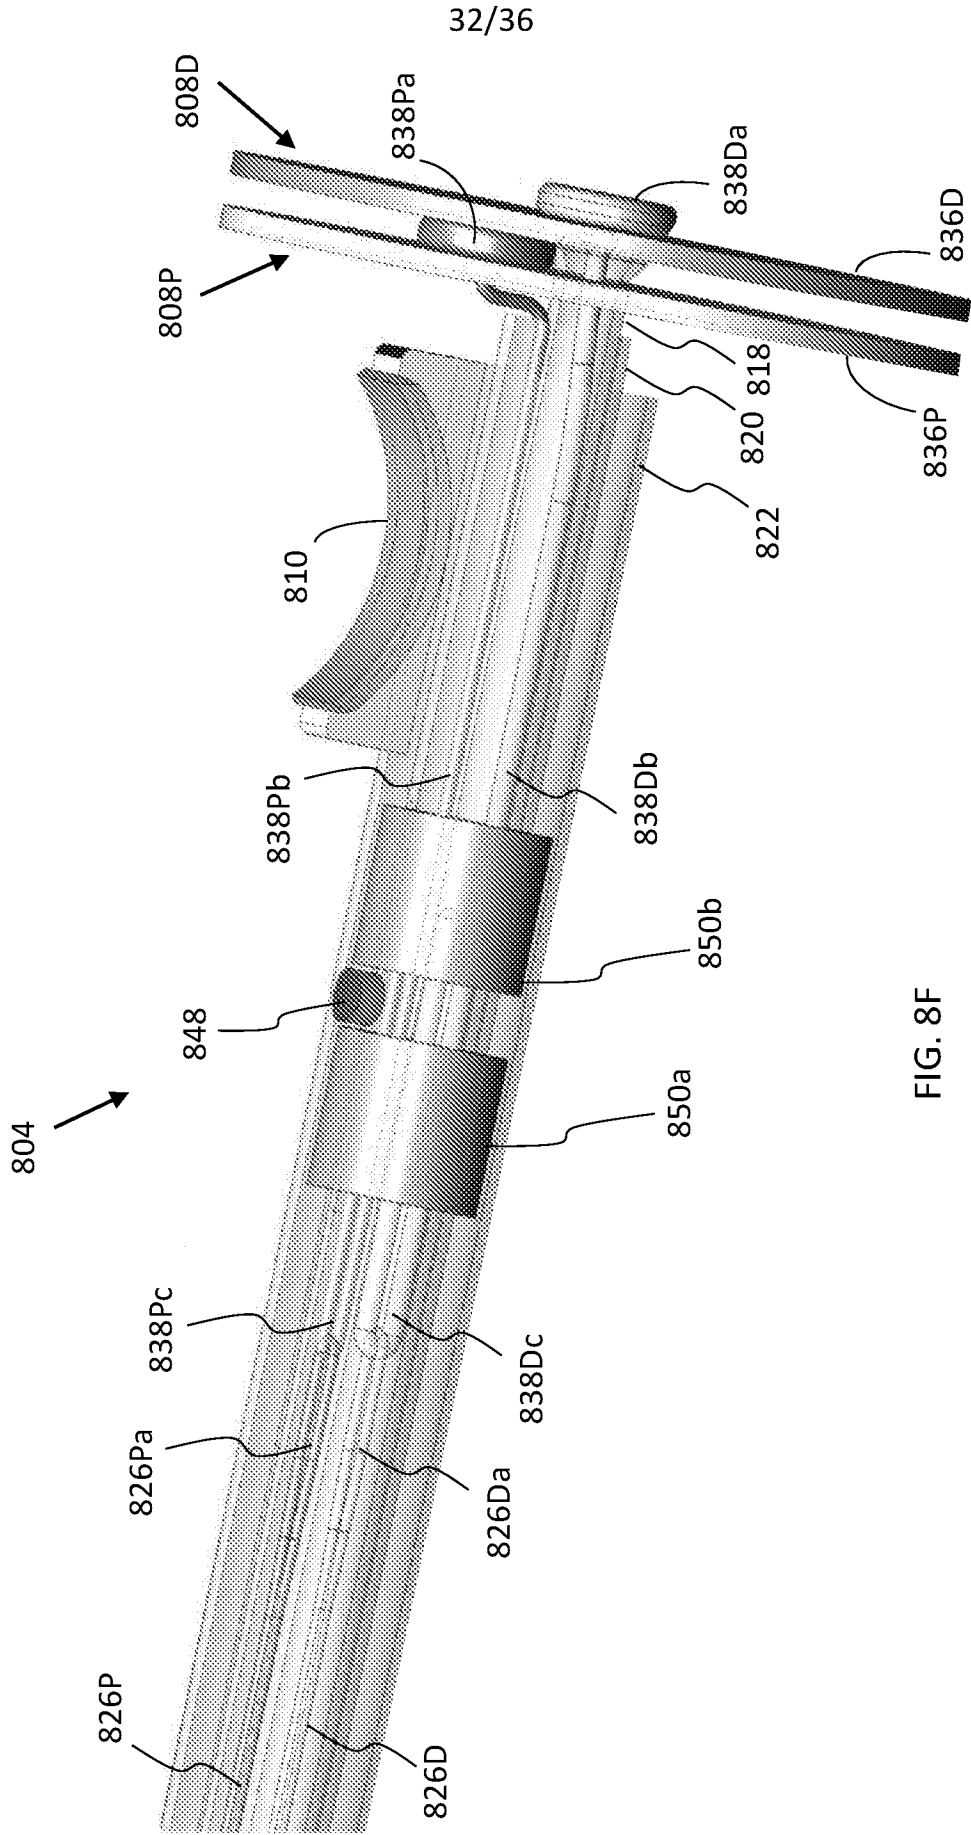


FIG. 8F

33/36

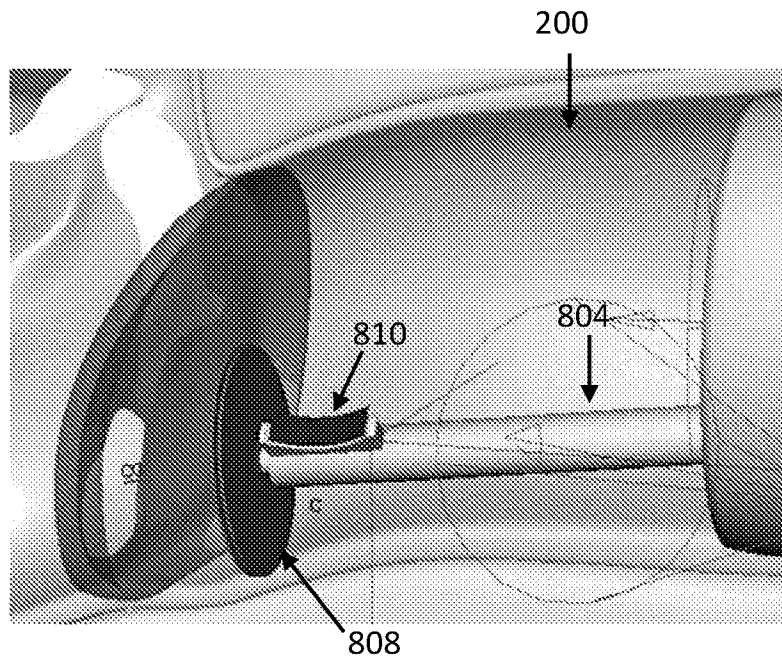


FIG. 9A

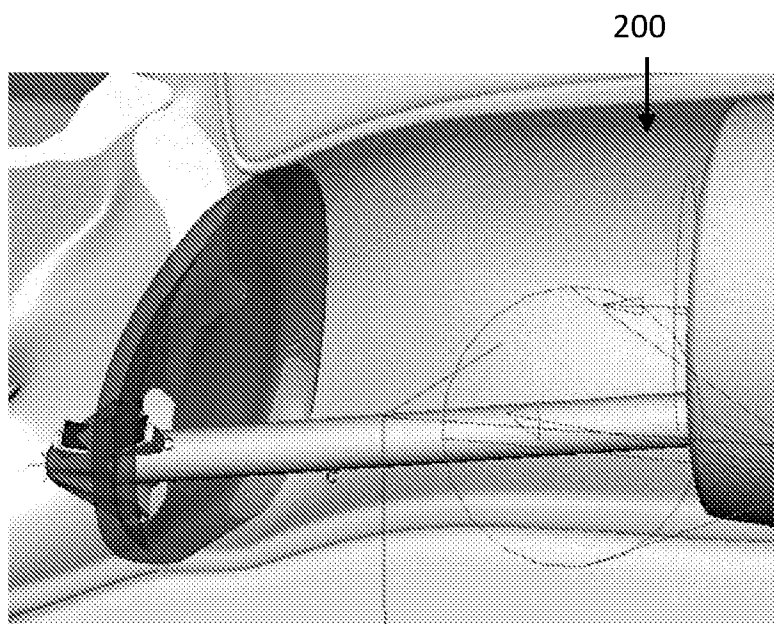


FIG. 9B

34/36

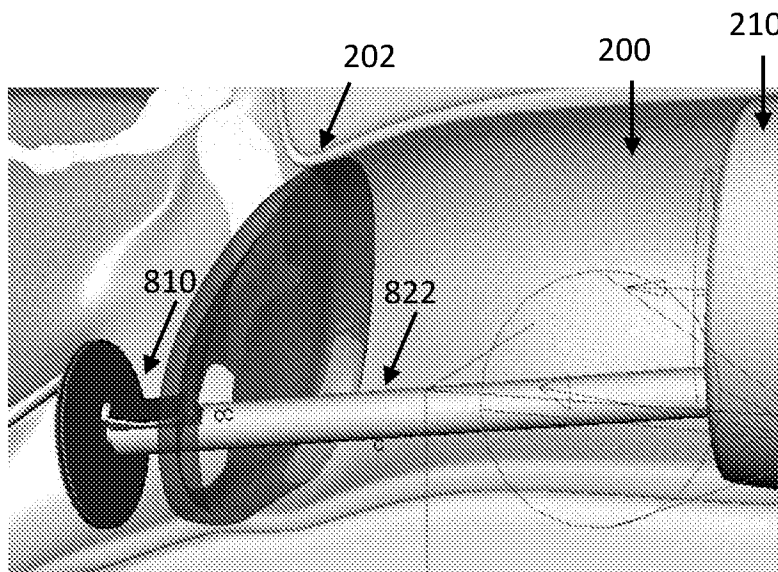


FIG. 9C

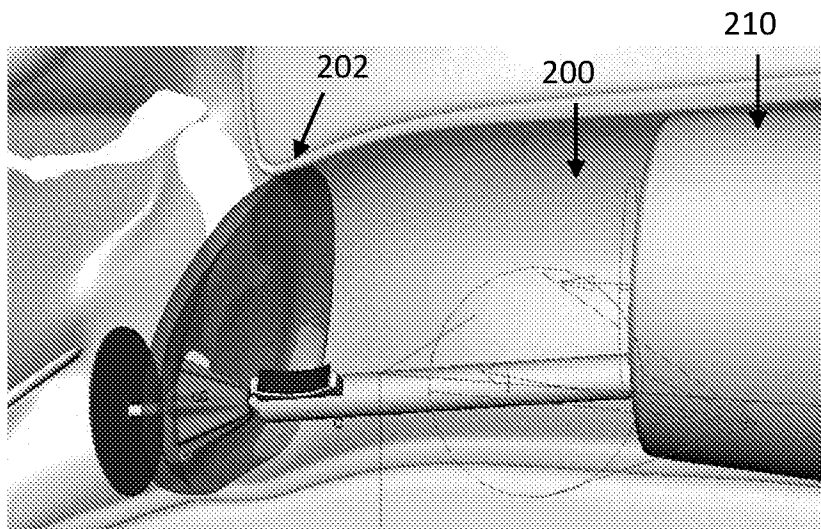


FIG. 9D

35/36

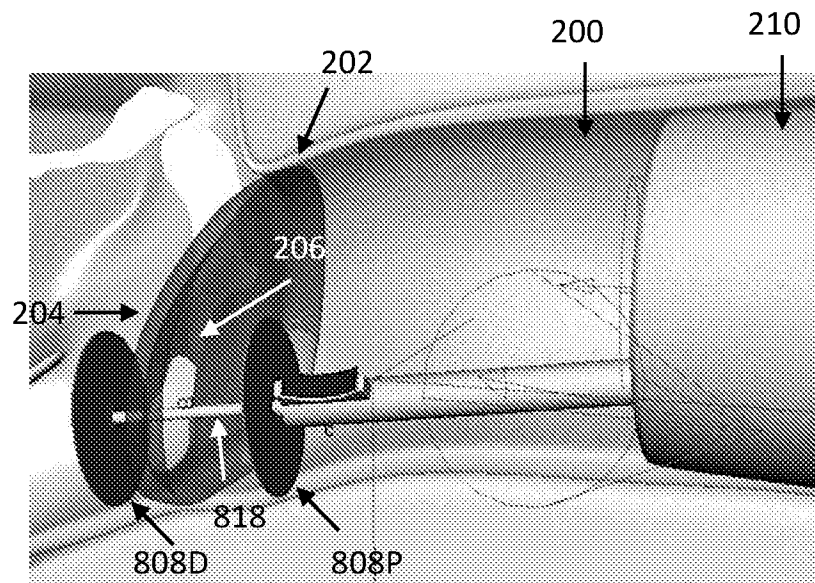


FIG. 9E

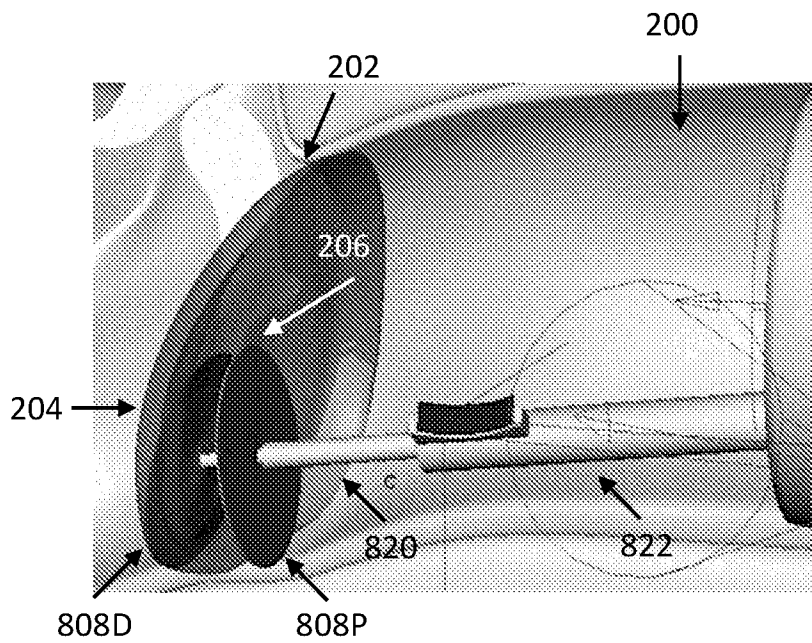


FIG. 9F

36/36

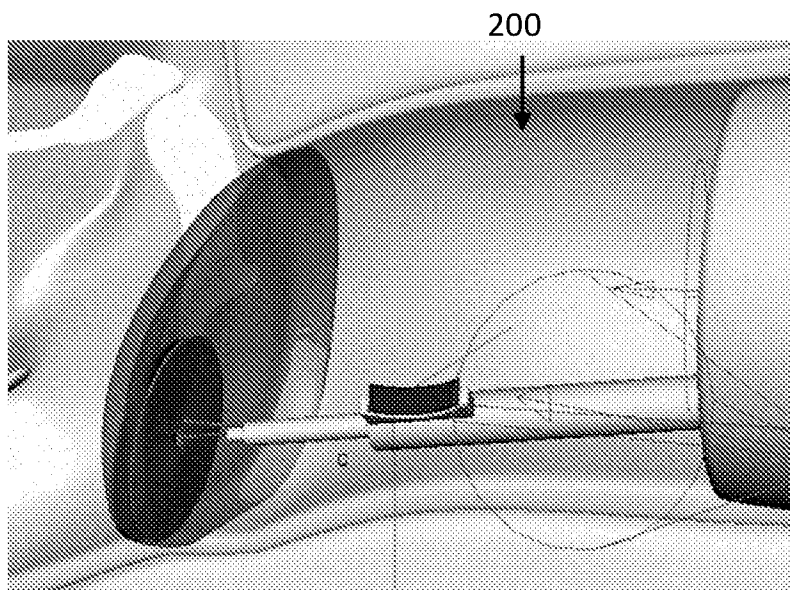


FIG. 9G

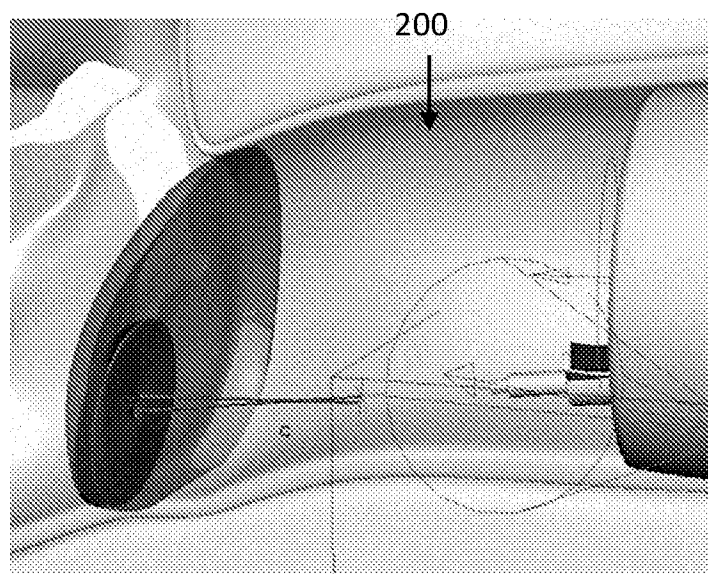


FIG. 9H

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2016/055575

A. CLASSIFICATION OF SUBJECT MATTER IPC (2017.01) A61F 11/00, A61F 2/18 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (2017.01) A61F Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: FamPat database, PatBase		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/0137033 A1 (CALHOUN ET AL.) 15 Jul 2004 (2004/07/15) Abstract; paragraphs [0028], [0041], [0045], [0049], [0053]; figure 2a	28-36,41-43
X	US 2002/0151974 A1 (BONASSAR ET AL.) 17 Oct 2002 (2002/10/17) Abstract; paragraphs [0011]-[0013], [0024]-[0026]; figure 2	28,30,37-40,42,43
X	WO 2010/062693 A2 (ABBOTT VASCULAR INC.) 03 Jun 2010 (2010/06/03) Abstract; page 26, line 15 - page 27, line 21; page 32, line 9 - page 33, line 9; figure 13G, 15, 16, 18A-B	28-40,58
A		1-27,41-68
A	US 2013/0345722 A1 (MOR RESEARCH APPLICATIONS LTD.) 26 Dec 2013 (2013/12/26) the whole document	1-43
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 25 Jan 2017		Date of mailing of the international search report 29 Jan 2017
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer SEGAL Liviu Telephone No. 972-2-5651782

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2016/055575

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2013/0338678 A1 (PRECEPTIS MEDICAL INC.) 19 Dec 2013 (2013/12/19) the whole document	1-27,44-68

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2016/055575

Patent document cited search report			Publication date	Patent family member(s)			Publication Date
US	2004/0137033	A1	15 Jul 2004	US	2004137033	A1	15 Jul 2004
				US	7592017	B2	22 Sep 2009
				AT	296069	T	15 Jun 2005
				AT	393609	T	15 May 2008
				AT	508707	T	15 May 2011
				AT	545384	T	15 Mar 2012
				AU	4567101	A	24 Sep 2001
				AU	2001245671	B2	13 Apr 2006
				AU	2001245671	B8	01 Jun 2006
				AU	2003200703	B2	14 Feb 2008
				AU	2003200703	B8	20 Mar 2008
				AU	2003257057	A1	16 Feb 2004
				AU	2003257057	B2	25 Sep 2008
				AU	2005272684	A1	23 Feb 2006
				AU	2005272684	B2	04 Dec 2008
				AU	2008258179	A1	15 Jan 2009
				AU	2008258179	B2	21 Jul 2011
				AU	2009200816	A1	19 Mar 2009
				AU	2009200816	B2	07 Jul 2011
				AU	2011202203	A1	02 Jun 2011
				AU	2011202203	B2	26 Jul 2012
				CA	2402650	A1	20 Sep 2001
				CA	2402650	C	17 Feb 2009
				CA	2419831	A1	28 Aug 2003
				CA	2494203	A1	05 Feb 2004
				CA	2494203	C	03 Jan 2012
				CA	2573564	A1	23 Feb 2006
				CA	2573564	C	06 Apr 2010
				CN	1464782	A	31 Dec 2003
				CN	1268303	C	09 Aug 2006
				CN	1494877	A	12 May 2004

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2016/055575

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	CN	100407999 C	06 Aug 2008
	CN	1738579 A	22 Feb 2006
	CN	100558318 C	11 Nov 2009
	CN	101018512 A	15 Aug 2007
	CN	101018512 B	18 May 2011
	CY	1107140 T1	24 Oct 2012
	CY	1111717 T1	07 Oct 2015
	DE	60111029 D1	30 Jun 2005
	DE	60111029 T2	04 May 2006
	DE	60131577 D1	03 Jan 2008
	DE	60131577 T2	23 Oct 2008
	DE	60320604 D1	12 Jun 2008
	DK	1265550 T3	25 Jul 2005
	DK	1588675 T3	25 Mar 2008
	DK	1852087 T3	15 Aug 2011
	EP	1265550 A1	18 Dec 2002
	EP	1265550 A4	25 Jun 2003
	EP	1265550 B1	25 May 2005
	EP	1340476 A1	03 Sep 2003
	EP	1340476 B1	30 Apr 2008
	EP	1542613 A2	22 Jun 2005
	EP	1542613 A4	17 Nov 2010
	EP	1588675 A1	26 Oct 2005
	EP	1588675 B1	21 Nov 2007
	EP	1776065 A2	25 Apr 2007
	EP	1776065 A4	11 Nov 2009
	EP	1776065 B1	15 Feb 2012
	EP	1852087 A1	07 Nov 2007
	EP	1852087 B1	11 May 2011
	ES	2245354 T3	01 Jan 2006
	ES	2299949 T3	01 Jun 2008

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2016/055575

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	ES	2386625 T3	23 Aug 2012
	ES	2395154 T3	08 Feb 2013
	HK	1061638 A1	16 Mar 2007
	HK	1088522 A1	14 Oct 2011
	HK	1099679 A1	09 Nov 2012
	HK	1108352 A1	25 Nov 2011
	IL	181264 D0	04 Jul 2007
	JP	2008509752 A	03 Apr 2008
	JP	4906723 B2	28 Mar 2012
	JP	2003526450 A	09 Sep 2003
	JP	2004033745 A	05 Feb 2004
	JP	2006502835 A	26 Jan 2006
	KR	20030014366 A	17 Feb 2003
	KR	100795613 B1	21 Jan 2008
	KR	20070046109 A	02 May 2007
	KR	100895135 B1	04 May 2009
	KR	20030071576 A	03 Sep 2003
	KR	100959954 B1	27 May 2010
	KR	20050026548 A	15 Mar 2005
	KR	101115901 B1	17 Feb 2012
	KR	20100131529 A	15 Dec 2010
	KR	101178656 B1	30 Aug 2012
	MX	PA02008897 A	14 Oct 2004
	MX	PA05001148 A	23 Nov 2005
	MX	2007001628 A	10 Apr 2007
	PT	1265550 E	31 Oct 2005
	PT	1588675 E	29 Feb 2008
	PT	1852087 E	25 Jul 2011
	US	2002001609 A1	03 Jan 2002
	US	6531146 B2	11 Mar 2003
	US	2003152608 A1	14 Aug 2003

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2016/055575

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 6673362 B2	06 Jan 2004
		US 2003185874 A1	02 Oct 2003
		US 7537782 B2	26 May 2009
		US 2007116739 A1	24 May 2007
		US 7947300 B2	24 May 2011
		US 2008063686 A1	13 Mar 2008
		US 8012502 B2	06 Sep 2011
		US 2011280917 A1	17 Nov 2011
		US 8349795 B2	08 Jan 2013
		US 2006083767 A1	20 Apr 2006
		US 2008091222 A1	17 Apr 2008
		US 2008091276 A1	17 Apr 2008
		US 2008091277 A1	17 Apr 2008
		US 2008119877 A1	22 May 2008
		US 2008119878 A1	22 May 2008
		US 2012027835 A1	02 Feb 2012
		WO 0167987 A1	20 Sep 2001
		WO 2004010851 A2	05 Feb 2004
		WO 2004010851 A3	17 Feb 2005
		WO 2006020922 A2	23 Feb 2006
		WO 2006020922 A3	27 Apr 2006
US 2002/0151974 A1	17 Oct 2002	US 2002151974 A1	17 Oct 2002
		AU 2002255586 A1	12 Sep 2002
		US 2006024826 A1	02 Feb 2006
		US 2007082052 A1	12 Apr 2007
		WO 02067812 A2	06 Sep 2002
		WO 02067812 A3	30 May 2003
WO 2010/062693 A2	03 Jun 2010	WO 2010062693 A2	03 Jun 2010
		WO 2010062693 A3	29 Jul 2010

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2016/055575

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 2010114159 A1	06 May 2010
		US 8398676 B2	19 Mar 2013
		US 2013190810 A1	25 Jul 2013
		US 8657852 B2	25 Feb 2014
		US 2010114156 A1	06 May 2010
		US 9241696 B2	26 Jan 2016
		US 2016213357 A1	28 Jul 2016
US 2013/0345722 A1	26 Dec 2013	US 2013345722 A1	26 Dec 2013
		DK 2683331 T3	07 Apr 2015
		EP 2683331 A1	15 Jan 2014
		EP 2683331 B1	31 Dec 2014
		ES 2533830 T3	15 Apr 2015
		WO 2012120513 A1	13 Sep 2012
US 2013/0338678 A1	19 Dec 2013	US 2013338678 A1	19 Dec 2013
		US 9370448 B2	21 Jun 2016
		AU 2013274520 A1	22 Jan 2015
		AU 2013274520 B2	03 Nov 2016
		CA 2876865 A1	19 Dec 2013
		CN 104519843 A	15 Apr 2015
		EP 2874585 A1	27 May 2015
		IN 67MUN2015 A	16 Oct 2015
		KR 20150037827 A	08 Apr 2015
		US 2016278984 A1	29 Sep 2016
		WO 2013188338 A1	19 Dec 2013

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2016/055575

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet):

* This International Searching Authority found multiple inventions in this international application, as follows:

Invention/s 1 devices and methods for repairing a tympanic Claim/s 1-27,44-68
 membrane utilizing a patch or two patches and a
 deployment mechanism controllable by an actuator.

Invention/s 2 biodegradable patch having a first thickness and a Claim/s 28-43
 second thickness.