



(86) Date de dépôt PCT/PCT Filing Date: 2015/11/24
 (87) Date publication PCT/PCT Publication Date: 2016/06/09
 (45) Date de délivrance/Issue Date: 2020/06/02
 (85) Entrée phase nationale/National Entry: 2017/05/18
 (86) N° demande PCT/PCT Application No.: JP 2015/005842
 (87) N° publication PCT/PCT Publication No.: 2016/088333
 (30) Priorités/Priorities: 2014/12/05 (JP2014-246946);
 2015/08/31 (JP2015-171401)


(51) Cl.Int./Int.Cl. *B22F 1/00* (2006.01),
C22C 33/02 (2006.01), *C22C 38/00* (2006.01),
C22C 38/16 (2006.01)

(72) Inventeurs/Inventors:
 TAKASHITA, TAKUYA, JP;
 KOBAYASHI, AKIO, JP;
 NAKAMURA, NAOMICHI, JP;
 MAETANI, TOSHIO, JP;
 SONOBE, AKIO, JP;
 SATO, ITSUYA, JP

(73) Propriétaire/Owner:
 JFE STEEL CORPORATION, JP

(74) Agent: ROBIC

(54) Titre : POUDRE D'ACIER ALLIEE POUR LA METALLURGIE DES POUDRES, ET PIECE FRITTEE
 (54) Title: ALLOY STEEL POWDER FOR POWDER METALLURGY, AND SINTERED BODY

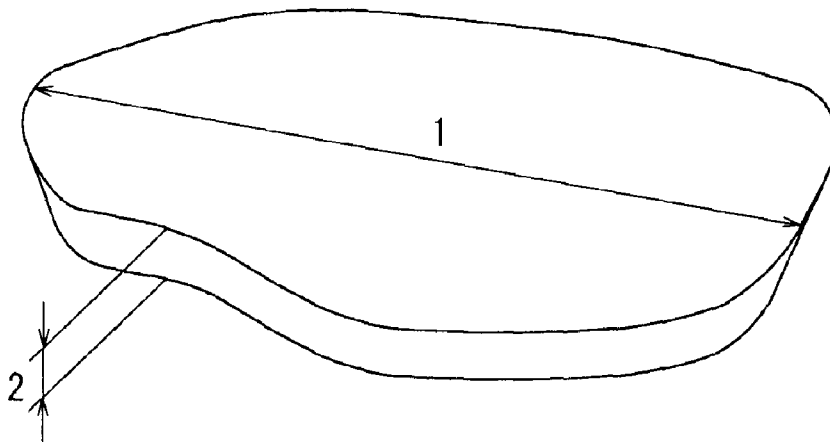

(57) **Abrégé/Abstract:**

An Fe-Mo-Cu-C-type alloy steel powder for powder metallurgy, wherein the alloy steel powder contains 0.2-1.5 mass% of Mo, 0.5-4.0 mass% of Cu, and 0.1-1.0 mass% of C, the remainder comprising Fe and unavoidable impurities, an average particle diameter of an iron-based powder being set to 30-120 μm and an average particle diameter of a Cu powder being set to 10 μm or less. Preferably, the Cu powder has a flat shape satisfying a relation $L \leq -2d + 50$ where d = thickness and L = diameter in a major axis. Despite the alloy steel powder for powder metallurgy has a chemical composition not containing Ni, a part produced by sintering a press-molded article of the powder and further carburizing/quenching/tempering the sintered press-molded article, has mechanical properties of at least high tensile strength, toughness, or sintered density at least equivalent to that of a Ni-added part.

ABSTRACT

An Fe-Mo-Cu-C-type alloy steel powder for powder metallurgy, wherein the alloy steel powder contains 0.2-1.5 mass% of Mo, 0.5-4.0 mass% of Cu, and 0.1-1.0 mass% of C, the remainder comprising Fe and unavoidable impurities, an average particle diameter of an iron-based powder being set to 30-120 μm and an average particle diameter of a Cu powder being set to 10~~25~~ μm or less. Preferably, the Cu powder has a flat shape satisfying a relation $L \leq -2d + 50$ where d = thickness and L = diameter in a major axis. Despite the alloy steel powder for powder metallurgy has a chemical composition not containing Ni, a part produced by sintering a press-molded article of the powder and further carburizing/quenching/tempering the sintered press-molded article, has mechanical properties of at least high tensile strength, toughness, or sintered density at least equivalent to that of a Ni-added part.

ALLOY STEEL POWDER FOR POWDER METALLURGY, AND SINTERED BODY

TECHNICAL FIELD

5 [0001] The disclosure relates to an alloy steel powder for powder metallurgy including a partial diffusion alloy steel powder and not containing Ni, which is suitable for the production of high strength sintered parts for vehicles. The disclosure also relates to an alloy steel powder for powder metallurgy that easily increases in sintered density when sintered and achieves higher tensile
10 strength, toughness (impact value), and fatigue strength after carburizing-quenching-tempering processes than conventional alloy steel powders.

The disclosure further relates to a sintered body produced using the alloy steel powder for powder metallurgy. The disclosure particularly relates
15 to a sintered body having a tensile strength of 1000 MPa or more after carburizing-quenching-tempering processes.

BACKGROUND

[0002] Powder metallurgical techniques enable producing parts having
20 complicated shapes in shapes (i.e. near net shapes) extremely close to product shapes, with high dimensional accuracy. The use of powder metallurgical techniques in producing parts therefore contributes to significantly lower machining costs. For this reason, powder metallurgical products obtained by powder metallurgical techniques have been used as various mechanical parts
25 in many fields.

[0003] Powder metallurgical techniques mainly use iron-based powders. Iron-based powders are categorized into iron powder (e.g. pure iron powder), alloy steel powder, and the like, depending on the components. Iron-based powders are also categorized into atomized iron powder, reduced iron powder,
30 and the like, depending on the production method. In the case of using the categories by the production method, the term "iron powder" has a broad meaning encompassing not only pure iron powder but also alloy steel powder.

[0004] Such an iron-based powder is used to produce a green compact. A green compact is typically produced by mixing an iron-based powder with

alloying powders such as a Cu powder and a graphite powder and a lubricant such as stearic acid or lithium stearate to obtain an iron-based mixed powder, and then charging the iron-based mixed powder into a die and pressing it.

5 [0005] The density of a green compact obtained by a typical powder metallurgy process is normally about 6.6 Mg/m^3 to 7.1 Mg/m^3 . The green compact is then sintered to form a sintered body. The sintered body is further subjected to optional sizing and machining work to form a powder metallurgical product.

10 In the case where higher strength is required, carburizing heat treatment or bright heat treatment may be performed after sintering.

[0006] Increases in strength of powder metallurgical products have been strongly requested recently, for reductions in size and weight of parts. There has been particularly strong demand for strengthening iron-based powder products (iron-based sintered bodies) made from iron-based powders.

15 [0007] Known examples of an iron-based powder as a powder with alloying elements added thereto at the stage of a precursor powder include: (1) a mixed powder obtained by adding each alloying element powder to a pure iron powder; (2) a pre-alloyed steel powder obtained by completely alloying each element; and (3) a partial diffusion alloy steel powder (also referred to as
20 "composite alloy steel powder") obtained by partially diffusionally adhering each alloying element powder to the surface of a pure iron powder or pre-alloyed steel powder.

[0008] The mixed powder (1) obtained by adding each alloying element powder to a pure iron powder is advantageous in that high compressibility
25 equivalent to that of a pure iron powder is ensured.

With the mixed powder (1), however, matrix strengthening necessary to obtain higher strength may be unable to be achieved because each alloying element does not sufficiently diffuse in Fe during sintering and the microstructure tends to remain non-uniform. Besides, in the case of adding
30 Mn, Cr, V, Si, etc. which are metals more active than Fe, unless the CO_2 concentration and dew point in the sintering atmosphere or carburizing atmosphere are strictly controlled to low level, the sintered body oxidizes, and lower oxygen content in the sintered body necessary for strengthening the sintered body cannot be achieved.

Hence, the mixed powder (1) obtained by adding each alloying element powder to a pure iron powder has not been used due to its failure to cope with the recent requests for strengthening.

5 [0009] With the pre-alloyed steel powder (2), on the other hand, uniform microstructure can be obtained because the segregation of the alloying element is completely prevented. This contributes to stable mechanical properties. The pre-alloyed steel powder (2) is also advantageous in that, even in the case of using Mn, Cr, V, Si, etc. as alloying elements, lower oxygen content in the sintered body can be achieved by limiting the types and
10 amounts of such alloying elements.

However, since the pre-alloyed steel powder is produced by atomizing molten steel, oxidation of the molten steel in the atomizing step and solid solution hardening due to complete alloying tend to occur. This hinders an increase in green density during press forming.

15 [0010] The partial diffusion alloy steel powder (3) is produced by adding each metal powder to a pure iron powder or a pre-alloyed steel powder and heating the resultant powder in a non-oxidizing or reducing atmosphere to partially diffusively bond the metal powder to the surface of the pure iron powder or pre-alloyed steel powder. This partial diffusion alloy steel powder
20 combines the advantages of the iron-based mixed powder (1) and pre-alloyed steel powder (2), while avoiding various problems seen in the iron-based mixed powder (1) and the pre-alloyed steel powder (2).

[0011] In detail, the partial diffusion alloy steel powder (3) ensures lower oxygen content in the sintered body and high compressibility equivalent to
25 that of a pure iron powder. Moreover, since a multi-phase made up of a complete alloy phase and a partially concentrated phase is formed, the matrix can be strengthened. The partial diffusion alloy steel powder has therefore been widely developed as it can cope with the recent requests for strengthening parts.

30 [0012] Basic alloy components used in the partial diffusion alloy steel powder include Ni and Mo.

Ni enables a large amount of non-transformed austenite phase that does not form quenched microstructure even when quenched, to be retained in the metallic microstructure. Ni is known to have an effect of improving the

toughness of parts and solid-solution-strengthening the matrix phase by this action.

[0013] Mo has an effect of increasing hardenability, and so suppresses the formation of ferrite during quenching and facilitates the formation of bainite or martensite in the metallic microstructure. By this effect, Mo not only transformation-strengthens the matrix phase, but also solid-solution-strengthening the matrix phase by dispersing in the matrix phase, and forms fine carbide in the matrix phase to strengthen the matrix phase by precipitation. Mo also has good gas carburizing property and is a non-grain boundary oxidizable element, and so can strengthen the sintered body by carburizing.

[0014] As an example of a mixed powder for high strength sintered parts using a partial diffusion alloy steel powder containing these alloy components, JP 3663929 B (PTL 1) describes a mixed powder for high strength sintered parts obtained by mixing an alloy steel powder formed by partially alloying Ni: 0.5 mass% to 4 mass% and Mo: 0.5 mass% to 5 mass% with Ni: 1 mass% to 5 mass%, Cu: 0.5 mass% to 4 mass%, and a graphite powder: 0.2 mass% to 0.9 mass%.

[0015] As an example of an iron-based sintered body having high density and not containing Ni, JP H4-285141 A (PTL 2) describes a method of producing an iron-based sintered body by mixing an iron-based powder of 1 μm to 18 μm in mean particle size with a Cu powder of 1 μm to 18 μm in mean particle size at a weight ratio of 100:(0.2 to 5) and forming and sintering the mixed powder.

[0016] This technique uses an iron-based powder having an extremely smaller mean particle size than a typical iron-based powder, and thus achieves a high sintered body density of 7.42 g/cm^3 or more which is normally impossible.

CITATION LIST

30 Patent Literatures

[0017] PTL 1: JP 3663929 B
PTL 2: JP H4-285141 A

SUMMARY

(Technical Problem)

[0018] However, we found out as a result of study that a sintered material produced using the mixed powder described in PTL 1 and a sintered material produced by the method described in PTL 2 have the following problems.

The sintered material produced using the mixed powder described in PTL 1 contains at least 1.5 mass% Ni, and substantially contains 3 mass% or more Ni as can be understood from its Example. Thus, a large amount of Ni, such as 3 mass% or more, is needed in order to achieve a high strength of 800 MPa or more in the sintered material produced using the mixed powder described in PTL 1.

[0019] A larger amount of Ni is likely to be needed in the case of obtaining a high strength material of 1000 MPa or more using the mixed powder described in PTL 1.

Ni, however, is an unfavorable element in terms of environmental responsiveness or recyclability in recent years, and it is desirable to avoid using Ni as much as possible. Adding a few mass% Ni is also very disadvantageous in terms of production cost.

[0020] Besides, the use of Ni as an alloying element requires prolonged sintering in order to sufficiently diffuse Ni in the iron powder or steel powder. Brief sintering causes non-uniform metallic microstructure.

[0021] The sintered material produced by the method described in PTL 2 contains no Ni, but the mean particle size of the iron-based powder used is 1 μm to 18 μm which is smaller than normal. Such a small particle size causes lower powder fluidity, and degrades the die filling ability of the powder. This leads to very poor work efficiency during press forming.

[0022] In recent years, various parts have been required to have high fatigue strength for improved safety. The aforementioned conventional techniques, however, have difficulty in achieving high fatigue strength.

[0023] It could be helpful to provide an alloy steel powder for powder metallurgy having the following features, together with a sintered body produced using the alloy steel powder.

In detail, the alloy steel powder for powder metallurgy according to the disclosure does not contain Ni which causes non-uniform metallic

microstructure and requires higher cost. A part produced by sintering a press formed part of the alloy steel powder and further carburizing-quenching-tempering the sintered part has at least as high tensile strength, toughness, and fatigue strength as a Ni-added part and also has high sintered density.

(Solution to Problem)

[0024] We conducted various studies on alloy components of an alloy steel powder for powder metallurgy not containing Ni and means for adding the alloy components. As a result, we discovered the following.

10 An iron powder in which Mo is partially diffused and alloyed instead of using Ni is mixed with a Cu powder with controlled mean particle size and the like and a graphite powder, to obtain an alloy steel powder for powder metallurgy. A part produced by sintering a press formed part of this alloy steel powder and further carburizing-quenching-tempering the sintered part
15 has mechanical properties of at least as high tensile strength, toughness, and fatigue strength as a Ni-added part.

[0025] Mo functions as a ferrite-stabilizing element during sintering heat treatment. Hence, ferrite phase forms in a portion having a large amount of Mo and its vicinity and the sintering of the iron powder progresses, as a result
20 of which the sintered body increases in sintered density.

[0026] Meanwhile, Cu melts and permeates between the particles of the iron powder during sintering, and increases the distance between the particles of the iron powder. This causes Cu expansion, that is, the size of the sintered body being larger than the size of the green compact. When the Cu
25 expansion occurs, the sintered body density decreases. A significant decrease in density caused by the Cu expansion leads to drawbacks such as lower strength and toughness of the sintered body.

[0027] We accordingly conducted intensive study on the characteristics of the Cu powder used. As a result, we discovered that, by limiting the Cu powder
30 to a specific shape, the Cu expansion was reduced, and not only a decrease in sintered body density was suppressed but also the sintered body density increased in some cases.

[0028] We also discovered that simultaneously controlling the mean particle size of the iron-based powder used to 30 μm or more improved the fluidity of

the alloy steel powder, and the use of an iron-based powder produced by an atomizing method increased the fatigue strength of the sintered body.

The disclosure is based on the aforementioned discoveries.

[0029] In detail, we provide the following.


1. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising: a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder; a Cu powder; and a graphite powder, wherein the alloy steel powder for powder metallurgy has a chemical composition containing (consisting of) Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities, the iron-based powder is an iron powder, and the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder has a mean particle size of 10 μm or less.

[0030] 2. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising: a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder; a Cu powder; and a graphite powder, wherein the alloy steel powder for powder metallurgy has a chemical composition containing Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities, the iron-based powder is an iron powder, and the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder has a flat shape and satisfies a relation $L \leq -2d + 50$ where d is a thickness of the Cu powder in μm and L is a diameter in a major axis of the Cu powder in μm .

[0031] 3. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising: a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder; a Cu powder; and a graphite powder, wherein the alloy steel powder for powder metallurgy has a chemical composition containing Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities, the iron-based powder is an iron powder, and the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder is a mixed powder of a Cu powder having a mean particle size of 25 μm or less

7a

and a Cu powder having a flat shape and satisfying a relation $L \leq -2d + 50$ where d is a thickness of the Cu powder in μm and L is a diameter in a major axis of the Cu powder in μm .

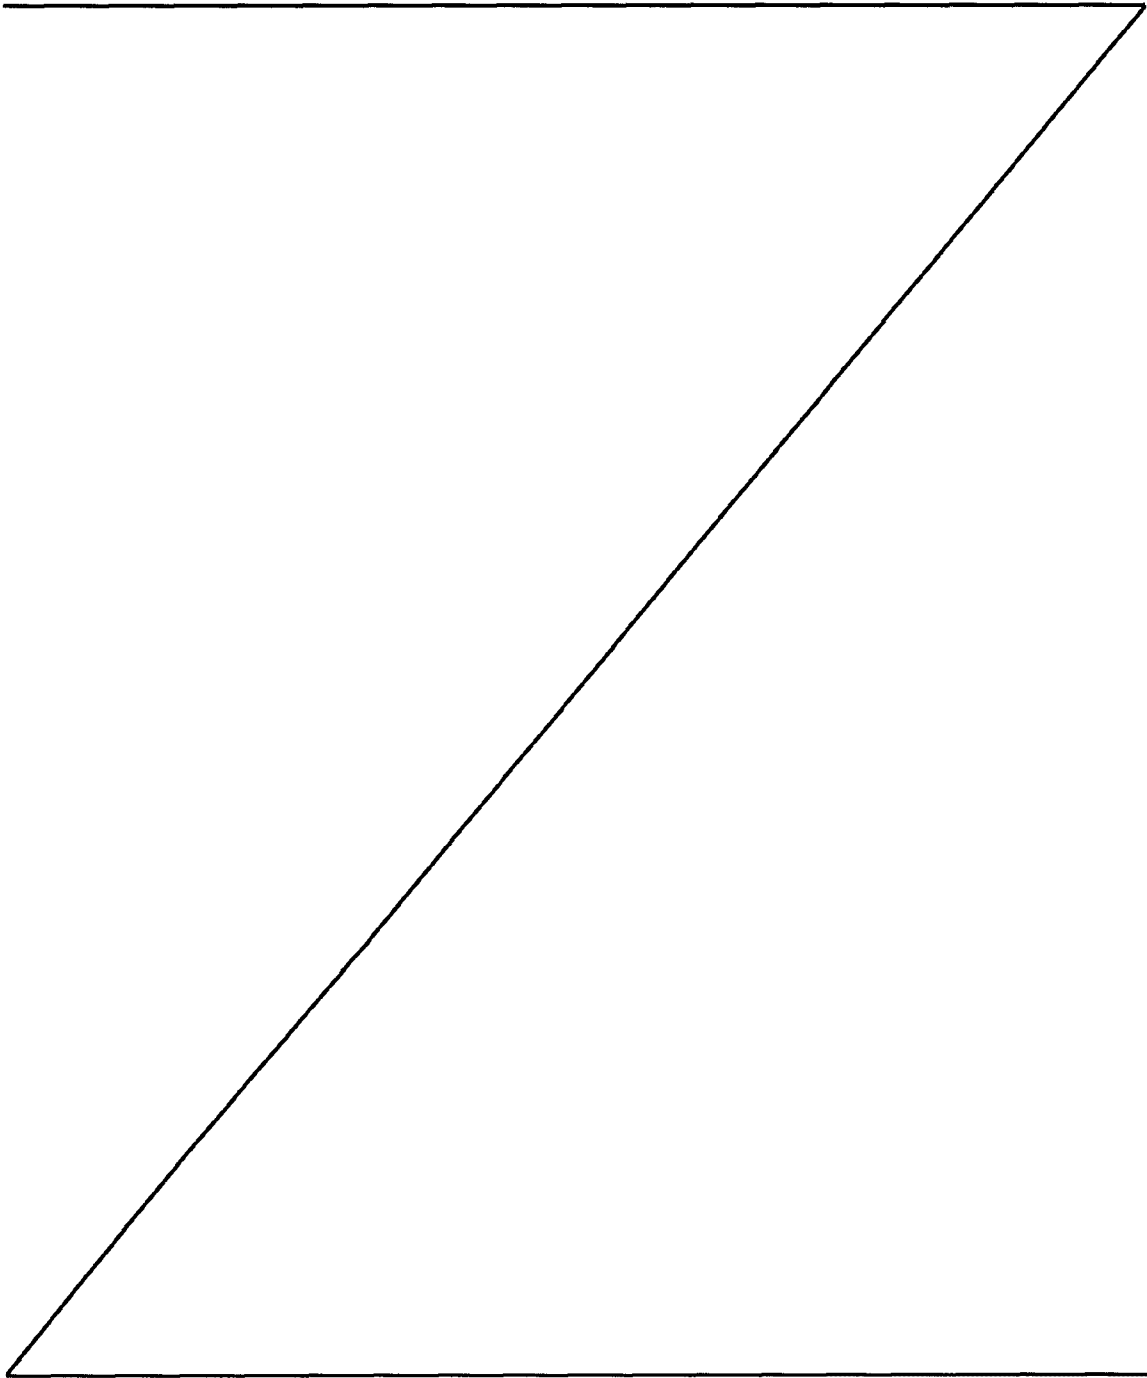

[0032] 4. A sintered body produced using the alloy steel powder for powder metallurgy according to any one of 1. to 3.

(Advantageous Effect)

[0033] It is thus possible to obtain an alloy steel powder for powder metallurgy that, despite having a chemical composition not containing Ni, enables the production of a sintered body having mechanical properties of at least as high tensile strength, toughness, and fatigue strength as a Ni-added part and also having high sintered density.

It is also possible to obtain a sintered body (iron-based sintered body) having both high strength and high toughness at low cost, even with a typical sintering method.

It is further possible to achieve an advantageous effect of improving work efficiency when filling a die with the alloy steel powder in press forming, as the powder has excellent fluidity.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] In the accompanying drawings:

FIG. 1 is a diagram schematically illustrating a flat Cu powder according to one of the disclosed embodiments.

DETAILED DESCRIPTION

[0035] One of the disclosed embodiments is described in detail below.

A Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy according to the embodiment is an alloy steel powder for powder metallurgy obtained by mixing a partial diffusion alloy steel powder (hereafter also referred to as "partial alloy steel powder") formed by diffusionally adhering a Mo-containing powder to the surface of an iron-based powder having an appropriate mean particle size, with an appropriate amount of a Cu powder having a predetermined shape such as the below-mentioned mean particle size range and a graphite powder.

[0036] A sintered body according to the embodiment is produced by subjecting the alloy steel powder for powder metallurgy to conventional press forming to obtain a green compact and further subjecting the green compact to conventional sintering.

With the alloy steel powder for powder metallurgy according to the embodiment, a Mo-concentrated portion is formed in a sintered neck part between the particles of the iron-based powder of the green compact, thus facilitating sintering. Moreover, Cu expansion in the sintering is reduced, so that the sintered body density increases.

[0037] If the sintered body density increases, both the strength and toughness of the sintered body increase. Unlike a conventional sintered body produced using Ni, the sintered body according to the embodiment has uniform metallic microstructure and so exhibits mechanical properties with little variation in strength or toughness.

[0038] The reasons for the limitations in the embodiment are described below. In the following description, “%” denotes mass%, and the amount of Mo, the amount of Cu, and the amount of graphite powder each denote the content ratio to the alloy steel powder for powder metallurgy.

[0039] The iron-based powder used in the embodiment is described first.

The iron-based powder used in the embodiment has a mean particle size of 30 μm to 120 μm . If the mean particle size is less than 30 μm , the iron-based powder itself or the mixed powder obtained using the iron-based powder has poor fluidity, which is problematic in terms of production efficiency, etc. If the mean particle size is more than 120 μm , the driving force of the shrinkage of the green compact during sintering is weak, and coarse holes form around coarse iron powder particles. These coarse holes cause a decrease in sintered density of the sintered body, and lead to lower strength and toughness of the sintered body after carburizing-quenching-tempering.

Accordingly, the mean particle size of the iron-based powder is limited to an appropriate range of 30 μm to 120 μm in the embodiment. The mean particle size of the iron-based powder is preferably in the range of 40 μm to 100 μm , and further preferably in the range of 50 μm to 80 μm . The term “mean particle size” in the embodiment means median size (d_{50} , volume-based).

[0040] Examples of the iron-based powder include an as-atomized powder, an atomized iron powder, and a reduced iron powder. The iron-based powder used in the embodiment is preferably an iron-based powder produced by an

atomizing method, that is, an as-atomized powder and/or an atomized iron powder.

[0041] Thus, the iron-based powder used in the embodiment may be any of: an as-atomized powder obtained by atomizing molten steel and then drying
5 and classifying the resulting powder without heat treatment for deoxidation (reduction), decarburization, or the like; and an atomized iron powder obtained by reducing an as-atomized powder in a reducing atmosphere.

The apparent density of the as-atomized powder or atomized iron powder may be about 2.0 Mg/m^3 to 3.5 Mg/m^3 . The apparent density of the
10 as-atomized powder or atomized iron powder is more preferably in the range of 2.5 Mg/m^3 to 3.2 Mg/m^3 . The specific surface area of the as-atomized powder or atomized iron powder may be about $0.005 \text{ m}^2/\text{g}$ or more. The specific surface area of the as-atomized powder or atomized iron powder is more preferably $0.01 \text{ m}^2/\text{g}$ or more.

15 The apparent density mentioned here is measured by the test method of JIS Z 2504.

[0042] The following describes Mo used in the embodiment.

The amount of Mo diffusionally adhered is in the range of 0.2% to 1.5% with respect to the alloy steel powder for powder metallurgy in the
20 embodiment. If the amount of Mo is less than 0.2%, the hardenability improving effect is low, and the strength increasing effect is low. If the amount of Mo is more than 1.5%, the hardenability improving effect is saturated, and the non-uniformity of the microstructure of the sintered body increases, making it impossible to obtain high strength and high toughness.
25 The amount of Mo diffusionally adhered is therefore 0.2% to 1.5%. The amount of Mo diffusionally adhered is preferably in the range of 0.3% to 1.0%, and further preferably in the range of 0.4% to 0.8%.

[0043] As a Mo material powder, a Mo-containing powder itself may be used, or a Mo compound that can be reduced to a Mo-containing powder may be
30 used. As the Mo-containing powder, a pure metal powder of Mo, an oxidized Mo powder, an Fe-Mo (ferromolybdenum) powder, or the like is advantageous. As the Mo compound, Mo carbide, Mo sulfide, Mo nitride, or the like is suitable.

[0044] The iron-based powder and the Mo material powder are mixed so that

the amount of Mo is in the range of 0.2% to 1.5% with respect to the alloy steel powder for powder metallurgy. The mixing method is not particularly limited, and may be a conventional method using a Henschel mixer, a cone mixer or the like.

5 **[0045]** The mixed powder (the iron-based powder + the Mo material powder) is then held at a high temperature, and subjected to heat treatment of diffusional bonding Mo to iron in the contact surface of the iron-based powder and the Mo material powder, to obtain a partial alloy steel powder of Mo.

10 As the atmosphere of the heat treatment, a reducing atmosphere or a hydrogen-containing atmosphere is suitable, and a hydrogen atmosphere is particularly suitable. The heat treatment may be performed at atmospheric pressure, under reduced pressure, or under vacuum. The temperature of the heat treatment is preferably in the range of 800 °C to 1000 °C.

15 **[0046]** In the case where the diffusional adhering treatment is performed as mentioned above, the iron-based powder and the Mo-containing powder are in a state of being sintered and agglomerated. Therefore, the iron-based powder and the Mo-containing powder are ground and classified into a desired particle size. In detail, the grinding condition is strengthened or a coarse
20 powder is removed by classification using a sieve with predetermined openings according to need, to achieve the desired particle size. The maximum particle size of the partial alloy steel powder obtained in this way is preferably 180 μm or less.

Coarse particles exceeding 180 μm lead to non-uniform microstructure
25 after carburizing-quenching-tempering, as it takes time for C to reach the particle center during carburizing-quenching.

In addition, annealing may be optionally performed in the embodiment.

[0047] The balance of the partial alloy steel powder is iron and incidental
30 impurities in the embodiment. Examples of the impurities contained in the partial alloy steel powder include C, O, N, and S. As long as the contents of these components are limited to C: 0.02% or less, O: 0.3% or less, N: 0.004% or less, and S: 0.03% or less with respect to the partial alloy steel powder, there is no particular problem. The O content is more preferably 0.25% or

less. If the contents of the incidental impurities exceed these ranges, the partial alloy steel powder decreases in compressibility, and is difficult to be compression molded into a preformed body having sufficient density.

5 [0048] In the embodiment, a Cu powder and a graphite powder (a carbon powder such as graphite) are added to the partial alloy steel powder obtained as described above, in order to achieve a tensile strength of 1000 MPa or more after carburizing-quenching-tempering the sintered body.

[0049] The following describes the Cu powder used in the embodiment.

- The mean particle size of the Cu powder: 25 μm or less

10 Cu is a useful element that promotes the solid-solution-strengthening and hardenability improvement of the iron-based powder and enhances the strength of the sintered part. If a Cu powder of about 28 μm to 50 μm in mean particle size typically employed in iron-based powder metallurgy is used, molten Cu infiltrates between the particles of the iron powder and expands the
15 volume of the sintered part, causing a decrease in sintered body density (Cu expansion). To suppress such a decrease in sintered body density, a Cu powder of 25 μm or less in mean particle size needs to be used. The mean particle size of the Cu powder is preferably 10 μm or less, and further preferably 5 μm or less. The lower limit of the mean particle size of the Cu
20 powder is not particularly limited, but is preferably about 0.5 μm to avoid an unnecessary increase of the Cu powder production cost.

The mean particle size of the Cu powder in the embodiment means the median size of the primary particles of the Cu powder.

[0050] The median size can be determined by the following method.

25 Since the mean particle size of the Cu powder having such a particle size as in the embodiment is difficult to be measured by sieving, the particle size is measured by a laser diffraction-scattering type particle size distribution measurement device. An example of the measurement device is LA-950V2 made by HORIBA, Ltd. Although other laser diffraction-scattering type
30 particle size distribution measurement devices may be used, a measurement device whose measurable particle size range lower limit is 0.1 μm or less and upper limit is 45 μm or more is preferable for accurate measurement.

[0051] The laser diffraction-scattering type particle size distribution measurement device applies laser light to a solvent in which the Cu powder is

dispersed, and measures the particle size distribution and mean particle size of the Cu powder from the diffraction and scattering strength of the laser light. The solvent in which the Cu powder is dispersed is preferably ethanol which has good particle dispersibility and is easy to handle. The use of a solvent
5 with a high van der Waals force and low dispersibility, such as water, is not preferable because particles coagulate during the measurement and the measurement result is coarser than the actual mean particle size.

[0052] The ethanol solution into which the Cu powder is charged is preferably subjected to ultrasonic dispersion treatment before the
10 measurement. Since the appropriate dispersion treatment time differs depending on the powder to be measured, the measurement is performed several times while varying the dispersion treatment time in the range of 0 minutes to 60 minutes.

The measurement is performed while stirring the solvent, to prevent
15 particle re-coagulation. The lowest value of the measurement results obtained while varying the dispersion treatment time is used as the mean particle size of the Cu powder.

[0053] - The Cu powder having a flat shape and satisfying the relation $L \leq -2d + 50$ where d (μm) is the thickness of the Cu powder and L (μm) is the
20 diameter in the major axis of the Cu powder

The Cu powder can suppress the aforementioned decrease in sintered body density even when its mean particle size is more than $25 \mu\text{m}$, as long as the Cu powder has a predetermined flat shape. In this case, the Cu powder satisfies the relation $L \leq -2d + 50$ where d (μm) is the thickness of the powder and L (μm) is the diameter in the major axis of the powder. The lower limit
25 of d is not particularly limited, but is preferably about $0.05 \mu\text{m}$ to avoid an unnecessary increase of the Cu powder production cost. The upper limit of d is not particularly limited, but is preferably about $12.5 \mu\text{m}$.

[0054] The flat powder in the embodiment is a powder that satisfies the
30 relation $L \leq -2d + 50$, and is made up of flat particles whose diameter (length) in the thickness direction (the direction perpendicular to the plane with the smallest flattening (highest roundness), the direction of reference sign 2 in FIG. 1) is smaller than the diameter in the spreading direction (the direction of the plane with the smallest flattening, the direction of reference sign 1 in FIG.

1) as illustrated in FIG. 1. In the embodiment, the diameter (length) in the thickness direction of a primary particle is defined as the thickness d , and the length of the longest part of the diameter in the spreading direction as the diameter in the major axis L , as illustrated in FIG. 1. Here, L is more than 0.

5 [0055] Regarding the thickness and major axis of the flat powder in the embodiment, their representative values can be evaluated by observing the Cu particles by a scanning electron microscope (SEM) and measuring the thickness d and diameter in major axis L of each of randomly selected 100 or more particles. Since d and L each have a distribution, their mean values are
10 calculated and set as the thickness d and the diameter in the major axis L in the embodiment.

[0056] By limiting the Cu powder to the aforementioned shape, Cu expansion is suppressed, and the decrease in sintered body density is reduced, or rather the sintered body density increases.

15 [0057] A mixed Cu powder obtained by mixing the aforementioned Cu powder having a mean particle size of 25 μm or less and the aforementioned Cu powder having the predetermined flat shape, i.e. satisfying the relation $L \leq -2d + 50$, may be used in the embodiment. The mixture ratio of the Cu powders of the respective shapes in the mixed Cu powder is not particularly
20 limited.

[0058] - The additive amount of the Cu powder: 0.5% to 4.0%

If the additive amount of the Cu powder is less than 0.5%, the aforementioned advantageous effect of the Cu addition cannot be achieved. If the additive amount of the Cu powder is more than 4.0%, not only the effect
25 of increasing the strength of the sintered part is saturated, but also the effect of the Cu powder shape decreases, leading to a decrease in sintered body density. The additive amount of the Cu powder is therefore limited to the range of 0.5% to 4.0%. The additive amount of the Cu powder is preferably in the range of 1.0% to 3.0%.

30 [0059] The following describes the graphite powder used in the embodiment.

The graphite powder is effective in obtaining higher strength and higher fatigue strength. Apart from the aforementioned C as an impurity contained in the partial alloy steel powder, 0.1% to 1.0% the graphite powder is added as C to the alloy steel powder. If the additive amount is less than

0.1%, the effect of obtaining high strength and the like cannot be achieved. If the additive amount is more than 1.0%, the sintered body becomes hypereutectoid, and cementite precipitates and causes a decrease in strength of the sintered body. The additive amount of the graphite powder is
5 therefore limited to the range of 0.1% to 1.0%. The mean particle size of the graphite powder added is preferably in the range of about 1 μm to 50 μm .

[0060] Thus, the partial diffusion alloy steel powder to which Mo is diffusionally adhered is mixed with the Cu powder and the graphite powder to obtain the Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy in the
10 embodiment. The mixing method used for each mixture may be a conventional powder mixing method.

[0061] In the case where the part needs to be further shaped by machining work or the like at the sintered body stage, powders for improving machinability such as MnS may be added as appropriate according to a
15 conventional method.

[0062] The following describes suitable pressing conditions and sintering conditions for producing the sintered body using the alloy steel powder for powder metallurgy according to the embodiment.

When pressing the alloy steel powder for powder metallurgy according
20 to the embodiment, a lubricant powder may also be mixed. The pressing may be performed by applying or adhering a lubricant to a die. In either case, as the lubricant, metal soap such as zinc stearate or lithium stearate, amide-based wax such as ethylenebisstearamide, and other well known lubricants may all be used suitably. In the case of mixing the lubricant, the amount of the
25 lubricant is preferably about 0.1 parts by mass to 1.2 parts by mass with respect to 100 parts by mass the alloy steel powder for powder metallurgy.

[0063] The pressing of the alloy steel powder for powder metallurgy according to the embodiment to produce the green compact is preferably performed with a pressure of 400 MPa to 1000 MPa. If the pressure is less
30 than 400 MPa, the density of the obtained green compact is low, causing a decrease in various properties of the sintered body such as strength. If the pressure is more than 1000 MPa, the life of the die shortens extremely, which is economically disadvantageous. The pressing temperature is preferably in the range of room temperature (about 20 $^{\circ}\text{C}$) to about 160 $^{\circ}\text{C}$.

[0064] The green compact is sintered preferably in the temperature range of 1100 °C to 1300 °C. If the sintering temperature is less than 1100 °C, the sintering does not progress, and a desired tensile strength (1000 MPa or more) is not obtained. If the sintering temperature is more than 1300 °C, the life of the sintering furnace shortens, which is economically disadvantageous. The sintering time is preferably in the range of 10 minutes to 180 minutes.

[0065] The sintered body produced by the aforementioned procedure using the alloy steel powder according to the embodiment has higher sintered body density than a sintered body produced from a green compact of the same green density by a conventional production method.

[0066] The obtained sintered body may be optionally subjected to strengthening treatment such as carburizing-quenching, bright quenching, induction hardening, and carburizing nitriding treatment. Even in the case where such strengthening treatment is not performed, the sintered body produced using the alloy steel powder for powder metallurgy according to the embodiment has improved strength and toughness as compared with conventional sintered bodies not subjected to strengthening treatment. Each strengthening treatment may be performed according to a conventional method.

20

EXAMPLES

[0067] The disclosed techniques are described in more detail below by way of examples, although the disclosure is not limited to the following examples.

As iron-based powders, an as-atomized powder and a reduced iron powder with an apparent density of 2.50 Mg/m³ to 3.05 Mg/m³ were used.

An oxidized Mo powder (mean particle size: 10 μm) was added to each of these iron-based powders at a predetermined ratio, and the resultant powder was mixed for 15 minutes in a V-shaped mixer to obtain a mixed powder. The mixed powder was then subjected to heat treatment (holding temperature: 880 °C, holding time: 1 h) in a hydrogen atmosphere with a dew point of 30 °C to diffusionally adhere the predetermined amount of Mo shown in Table 1 to the surface of the iron-based powder, thus obtaining a partial alloy steel powder.

Following this, a Cu powder of the mean particle size and amount

shown in Table 1 and a graphite powder (mean particle size: 5 μm) of the amount shown in Table 1 were added to and mixed with the partial alloy steel powder, to produce an alloy steel powder for powder metallurgy.

0.6 parts by mass ethylenebisstearamide was added with respect to 100 parts by mass the obtained alloy steel powder for powder metallurgy, and the resulting powder was mixed for 15 minutes in a V-shaped mixer. After the mixture, the powder was pressed to a density of 7.0 g/cm^3 , and (ten) tablet shaped green compacts with a length of 55 mm, a width of 10 mm, and a thickness of 10 mm, (ten) tablet shaped green compacts with a length of 80 mm, a width of 15 mm, and a thickness of 15 mm, and ring shaped green compacts with an outer diameter of 38 mm, an inner diameter of 25 mm, and a thickness of 10 mm were produced.

The tablet shaped green compacts and the ring shaped green compacts were each sintered to obtain a sintered body. The sintering was performed in a propane converted gas atmosphere at a sintering temperature of 1130 $^{\circ}\text{C}$ for a sintering time of 20 minutes.

Regarding the ring shaped sintered bodies, the outer diameter, the inner diameter, the thickness, and the mass were measured, and the sintered body density (Mg/m^3) was calculated.

Regarding the tablet shaped sintered bodies with a length of 55 mm, a width of 10 mm, and a thickness of 10 mm, five tablet shaped sintered bodies were each processed into a round bar tensile test piece with a parallel portion diameter of 5 mm, for a tensile test specified in JIS Z 2241.

Moreover, five tablet shaped sintered bodies as sintered were each subjected to a Charpy impact test specified in JIS Z 2242. Regarding the tablet shaped sintered bodies with a length of 80 mm, a width of 15 mm, and a thickness of 15 mm, they were each processed into a smooth round bar test piece with a parallel portion of 8 mm and a length of 15.4 mm, for a rotating bending fatigue test. Each obtained test piece was subjected to gas carburizing of carbon potential of 0.8 mass% (holding temperature: 870 $^{\circ}\text{C}$, holding time: 60 minutes), and then quenching (60 $^{\circ}\text{C}$, oil quenching) and tempering (holding temperature: 180 $^{\circ}\text{C}$, holding time: 60 minutes).

The round bar tensile test pieces, smooth round bar test pieces, and tablet shaped test pieces for the Charpy impact test which had undergone the

carburizing-quenching-tempering processes were submitted to the tensile test specified in JIS Z 2241, the Charpy impact test specified in JIS Z 2242, and the fatigue test by an Ono type rotating bending fatigue test machine, to measure the tensile strength (MPa), the impact value (J/cm^2), and the bending
5 fatigue strength (MPa). In each of the measurements, a mean value of the number of test pieces $n = 5$ was set as the measurement result.

The measurement results are shown in Table 1.

The following criteria were used.

(1) Thickness d and diameter in major axis L of particles

10 For the thickness and diameter in major axis of the powder, the Cu particles were observed by a scanning electron microscope (SEM), and the thickness d and diameter in major axis L of each of randomly selected 100 or more particles were measured. Since d and L each have a distribution, their mean values were set as the thickness d and the diameter in the major axis L in
15 the examples.

(2) Iron powder flowability (fluidity)

100 g of the test powder was passed through a nozzle of 5 mm ϕ in diameter. The test powder was rated good if the powder flew through the nozzle completely without stopping, and rated poor if a part or whole of the
20 powder stopped and did not flow through the nozzle.

(3) Sintered body density

The sintered body was rated good if the sintered body density was 6.89 Mg/m³ or more, and rated poor if the sintered body density was less than 6.89 Mg/m³.

25 (4) Tensile strength

The round bar tensile test piece that had undergone the carburizing-quenching-tempering processes was rated good if the tensile strength was 1000 MPa or more, and rated poor if the tensile strength was less than 1000 MPa.

30 (5) Impact value

The tablet shaped test piece for the Charpy impact test that had undergone the carburizing-quenching-tempering processes was rated good if the impact value was 14.5 J/cm² or more, and rated poor if the impact value was less than 14.5 J/cm².

(6) Fatigue test

The fatigue test by the Ono type rotating bending fatigue test machine was performed at a rotational speed of 3000 rpm and a stress ratio of $R = -1$, and the maximum stress not resulting in a fracture in 10^7 cycles was set as the fatigue strength. The test piece was rated good if the fatigue strength was 350 MPa or more, i.e. at least as high as that of a 4Ni material, and rated poor if the fatigue strength was less than 350 MPa.

5

[0068] [Table 1]

No.	Type of iron based powder	Apparent density of iron-based powder Mg/m ³	Mean particle size of iron-based powder µm	Mo mass%	Mean particle size of Cu powder µm	L _d (µm)	-20+50 (µm)	Cu powder mass%	Graphite powder mass%	Alloy steel powder flowability ¹	Sintered body density Mg/m ³	Tensile strength		Impact value		Bending fatigue test		Remarks	
												MPa	Result	J/cm ²	Result	MPa	Result		
1	As-sintered powder	2.65	60	1.4	5	-	-	1.0	0.5	Good	6.96	Good	1247	Good	15.5	Good	480	Good	Example 1
2	As-sintered powder	2.65	60	1.0	1.5	-	-	0.5	0.3	Good	6.93	Good	1150	Good	14.5	Good	410	Good	Example 2
3	As-sintered powder	2.80	60	0.8	24	-	-	2.0	0.3	Good	6.89	Good	1167	Good	13.4	Good	430	Good	Example 3
4	As-sintered powder	2.80	60	0.6	15	-	-	3.0	0.5	Good	6.90	Good	1130	Good	13.6	Good	403	Good	Example 4
5	As-sintered powder	2.80	60	0.7	0.9	-	-	2.0	0.1	Good	6.95	Good	1051	Good	14.6	Good	400	Good	Example 5
6	As-sintered powder	2.65	60	1.4	30	-	-	1.0	0.5	Good	6.88	Poor	1220	Good	13.0	Good	430	Good	Comparative Example 1
7	As-sintered powder	2.65	60	1.0	35	-	-	0.5	0.3	Good	6.87	Poor	1124	Good	14.1	Poor	405	Good	Comparative Example 2
8	As-sintered powder	2.80	60	0.8	28	-	-	2.0	0.3	Good	6.86	Poor	1150	Good	13.2	Good	415	Good	Comparative Example 3
9	As-sintered powder	2.80	60	0.6	30	-	-	3.0	0.5	Good	6.86	Poor	1170	Good	15.5	Good	415	Good	Comparative Example 4
10	As-sintered powder	2.80	60	0.7	35	-	-	2.0	0.1	Good	6.88	Poor	1065	Good	14.0	Poor	370	Good	Comparative Example 5
11	As-sintered powder	2.50	20	0.8	24	-	-	1.0	0.3	Poor	6.99	Good	-	-	-	-	-	-	Comparative Example 6
12	As-sintered powder	2.70	30	0.8	24	-	-	1.0	0.3	Good	6.97	Good	1146	Good	16.1	Good	430	Good	Example 6
13	As-sintered powder	2.80	40	0.8	24	-	-	1.0	0.3	Good	6.96	Good	1106	Good	15.9	Good	400	Good	Example 7
14	As-sintered powder	2.90	50	0.8	24	-	-	1.0	0.3	Good	6.95	Good	1080	Good	15.7	Good	401	Good	Example 8
15	As-sintered powder	2.95	80	0.8	24	-	-	1.0	0.3	Good	6.93	Good	1069	Good	13.2	Good	390	Good	Example 9

*1 100 g of alloy steel powder was passed through a nozzle of 5µm in diameter. The powder was rated good if the powder flew through the nozzle completely without stopping, and rated poor if a part or whole of the powder stopped and did not flow through the nozzle.
 *2 4%Ni material (4%Ni+1.5%Cu+0.5%Mo partial alloy steel powder)

Table I (cont'd)

No.	Type of iron-based powder	Apparent density of iron-based powder Mg/m ³	Mean particle size of iron-based powder µm	Mo mass%	Mean particle size of Cu powder µm	L (µm)	d (µm)	-20-50	Cu powder mass%	Graphite powder mass%	Alloy steel powder flowability ¹⁾	Sintered body density Mg/m ³	Tensile strength MPa		Impact value J/cm ²		Bending fatigue test MPa		Remarks	
													Result	MPa	Result	J/cm ²	Result	MPa		Result
16	As-atomized powder	3.00	100	0.8	24	-	-	-	1.0	0.3	Good	6.92	Good	1082	Good	14.8	Good	385	Good	Example 10
17	As-atomized powder	3.05	120	0.8	24	-	-	-	1.0	0.3	Good	6.90	Good	1033	Good	14.5	Good	382	Good	Example 11
18	As-atomized powder	3.00	150	0.8	24	-	-	-	1.0	0.3	Good	6.87	Poor	998	Poor	13.9	Poor	365	Good	Comparative Example 7
19	As-atomized powder	3.00	60	0.1	24	-	-	-	1.0	0.3	Good	6.97	Good	1118	Good	14.3	Poor	395	Good	Comparative Example 8
20	As-atomized powder	3.00	60	0.2	24	-	-	-	1.0	0.3	Good	7.00	Good	1137	Good	15.1	Good	417	Good	Example 12
21	As-atomized powder	3.00	60	0.4	24	-	-	-	1.0	0.3	Good	7.02	Good	1166	Good	16.1	Good	420	Good	Example 13
22	As-atomized powder	3.00	60	0.6	24	-	-	-	1.0	0.3	Good	7.01	Good	1168	Good	14.9	Good	424	Good	Example 14
23	As-atomized powder	3.00	60	0.8	24	-	-	-	1.0	0.3	Good	6.99	Good	1110	Good	14.7	Good	406	Good	Example 15
24	As-atomized powder	3.00	60	1.0	24	-	-	-	1.0	0.3	Good	6.99	Good	1092	Good	14.5	Good	400	Good	Example 16
25	As-atomized powder	3.00	60	1.5	24	-	-	-	1.0	0.3	Good	7.00	Good	1087	Good	14.6	Good	390	Good	Example 17
26	As-atomized powder	3.00	60	2.0	24	-	-	-	1.0	0.3	Good	7.00	Good	1085	Good	13.6	Poor	410	Good	Comparative Example 9
27	As-atomized powder	3.00	60	0.8	1.5	-	-	-	0.2	0.30	Good	7.07	Good	989	Poor	13.5	Poor	365	Good	Comparative Example 10
28	As-atomized powder	3.00	60	0.8	1.5	-	-	-	0.5	0.30	Good	7.05	Good	1020	Good	14.5	Good	380	Good	Example 18
29	As-atomized powder	3.00	60	0.8	1.5	-	-	-	1.5	0.30	Good	7.03	Good	1138	Good	15.4	Good	403	Good	Example 19
30	As-atomized powder	3.00	60	0.8	1.5	-	-	-	3.0	0.30	Good	7.01	Good	1189	Good	16.8	Good	440	Good	Example 20

*1. 100 g of alloy steel powder was passed through a nozzle of 5mmφ in diameter.
 The powder was rated good if the powder flew through the nozzle completely without stopping, and rated poor if a part or whole of the powder stopped and did not flow through the nozzle.
 *2. 4N1 material (4%Si, 1.2%Cu, 0.5%Mo partial alloy steel powder)

Table I (cont'd)

No	Type of iron based powder	Apparent density of iron-based powder Mg/m ³	Mean particle size of iron-based powder µm	Mo mass%	Mean particle size of Cu powder µm	L ₁ (µm)	d ₅₀ (µm)	Cu powder mass%	Graphitic powder mass%	Alloy-steel powder flowability	Sintered body density Mg/m ³	Tensile strength		Impact value		Bending fatigue test		Remarks	
												MPa	Result	J/cm ²	Result	MPa	Result		
31	As-atomized powder	3.00	60	0.8	1.5	-	-	4.0	0.30	Good	6.67	Good	1331	Good	17.4	Good	430	Good	Example 21
32	As-atomized powder	3.00	60	0.8	1.5	-	-	5.0	0.30	Good	6.86	Poor	1254	Good	17.9	Good	460	Good	Comparative Example 11
33	As-atomized powder	3.00	60	0.8	1.5	-	-	2.0	0.05	Good	7.01	Good	984	Poor	15.8	Good	360	Good	Comparative Example 12
34	As-atomized powder	3.00	60	0.8	1.5	-	-	2.0	0.2	Good	7.04	Good	1088	Good	15.0	Good	398	Good	Example 22
35	As-atomized powder	3.00	60	0.8	1.5	-	-	2.0	0.5	Good	6.69	Good	1138	Good	14.6	Good	407	Good	Example 23
36	As-atomized powder	3.00	60	0.8	1.5	-	-	2.0	1.0	Good	7.01	Good	1169	Good	14.5	Good	415	Good	Example 24
37	As-atomized powder	3.00	60	0.8	1.5	-	-	2.0	1.5	Good	7.02	Good	1125	Good	12.6	Poor	418	Good	Comparative Example 13
38	As-atomized powder	3.00	60	0.8	29	30	1	48	2.0	0.3	6.95	Good	1152	Good	15.5	Good	425	Good	Example 25
39	As-atomized powder	3.00	60	0.8	22	25	1.5	47	2.0	0.3	6.69	Good	1180	Good	16.5	Good	426	Good	Example 26
40	As-atomized powder	3.00	60	0.8	18	20	2.5	45	2.0	0.3	6.96	Good	1155	Good	16.3	Good	420	Good	Example 27
41	As-atomized powder	3.00	60	0.8	14	15	4.5	41	2.0	0.3	6.92	Good	1160	Good	15.7	Good	431	Good	Example 28
42	As-atomized powder	3.00	60	0.8	9	10	9	32	2.0	0.3	6.90	Good	1190	Good	15.5	Good	410	Good	Example 29
43	As-atomized powder	3.00	60	0.8	47	45	2	46	2.0	0.3	6.94	Good	1132	Good	15.5	Good	417	Good	Example 30
44	As-atomized powder	3.00	60	0.8	29	48	1	48	2.0	0.3	6.92	Good	1130	Good	15.3	Good	419	Good	Example 31
45	As-atomized powder	3.00	60	0.8	74	55	5	40	2.0	0.3	6.85	Poor	1010	Good	14.1	Poor	380	Good	Comparative Example 14
46	Reduced iron powder	2.80	60	0.8	24	-	-	-	2.0	0.3	6.90	Good	1290	Good	15.7	Good	355	Good	Example 32
47	As-atomized powder	2.80	65	*2	*2	-	-	*2	0.3	Good	7.01	Good	998	Poor	13.3	Poor	348	Poor	Conventional Example

*1 100 g of alloy steel powder was passed through a nozzle of 5mm in diameter.
The powder was rated good if the powder flow through the nozzle completely without stopping, and rated poor if a part or whole of the powder stopped and did not flow through the nozzle.

*2 4%Ni (4%Ni, 1.5%Co, 0.5%Mo) partial alloy steel powder.

[0069] As shown in Table 1, in all Examples, despite the alloy steel powder for powder metallurgy having a chemical composition not containing Ni, a part produced using the powder as a precursor powder had mechanical properties of at least as high tensile strength and toughness as a Ni-added material.

Table 1 also shows the results of a 4Ni material (4%Ni-1.5%Cu-0.5%Mo partial alloy steel powder obtained by adding a Ni powder (mean particle size: 8 μm), an oxidized Mo powder (mean particle size: 10 μm), and a Cu powder (mean particle size: 28 μm) to an iron-based powder (as-atomized powder, apparent density: 2.80 Mg/m^3 , mean particle size: 65 μm), mixing them, and heat treating the mixed powder to diffusionally adhere Ni, Mo, and Cu to the surface of the iron-based powder), as Conventional Example.

In Examples, a sintered body (iron-based sintered body) having high density and also having both high strength and high toughness was obtained even by a typical sintering method.

Moreover, in Examples, the alloy steel powder had excellent fluidity.

REFERENCE SIGNS LIST

[0070] 1 diameter in major axis: L
2 thickness: d

CLAIMS

1. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising:
 - a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder;
 - a Cu powder; and
 - a graphite powder,wherein the alloy steel powder for powder metallurgy has a chemical composition containing Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities,
 - the iron-based powder is an iron powder, and
 - the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder has a mean particle size of 10 μm or less.

2. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising:
 - a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder;
 - a Cu powder; and
 - a graphite powder,wherein the alloy steel powder for powder metallurgy has a chemical composition containing Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities,
 - the iron-based powder is an iron powder, and
 - the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder has a flat shape and satisfies a relation $L \leq -2d + 50$ where d is a thickness of the Cu powder in μm and L is a diameter in a major axis of the Cu powder in μm .

3. An Fe-Mo-Cu-C-based alloy steel powder for powder metallurgy, comprising:
- a partial diffusion alloy steel powder obtained by diffusionally adhering Mo to an iron-based powder;
 - a Cu powder; and
 - a graphite powder,
- wherein the alloy steel powder for powder metallurgy has a chemical composition containing Mo: 0.2 mass% to 1.5 mass%, Cu: 0.5 mass% to 4.0 mass%, and C: 0.1 mass% to 1.0 mass%, with a balance being Fe and incidental impurities,
- the iron-based powder is an iron powder, and
- the iron-based powder has a mean particle size of 30 μm to 120 μm , and the Cu powder is a mixed powder of a Cu powder having a mean particle size of 25 μm or less and a Cu powder having a flat shape and satisfying a relation $L \leq -2d + 50$ where d is a thickness of the Cu powder in μm and L is diameter in a major axis of the Cu powder in μm .

1/1

FIG. 1

