

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)


PCT

(10) International Publication Number
WO 2004/106037 A1

- (51) International Patent Classification⁷: B29C 53/58, D21G 1/02, B29C 47/02, 47/06, 47/70 // B29K 7:00, 9:06, 19:00, 23:00, 75:00
- (21) International Application Number: PCT/US2004/007085
- (22) International Filing Date: 8 March 2004 (08.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/441,636 21 May 2003 (21.05.2003) US
- (71) Applicant (for all designated States except US): STOWE WOODWARD, LLC [US/US]; 1 Technology Drive, Westborough Technology Park, Westborough, MA 01581 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MADDEN, Michael, D. [US/US]; 125 North Cameron Street, #4, Winchester, VA 22601 (US). VOSIKA, Matthew [US/US]; 2181 Shawn Drive, Middletown, VA 22645 (US).
- (74) Agent: MYERS BIGEL SIBLEY & SAJOVEC P.A.; P.O. Box 37428, Raleigh, NC 27627 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: METHOD FOR FORMING COVER FOR INDUSTRIAL ROLL

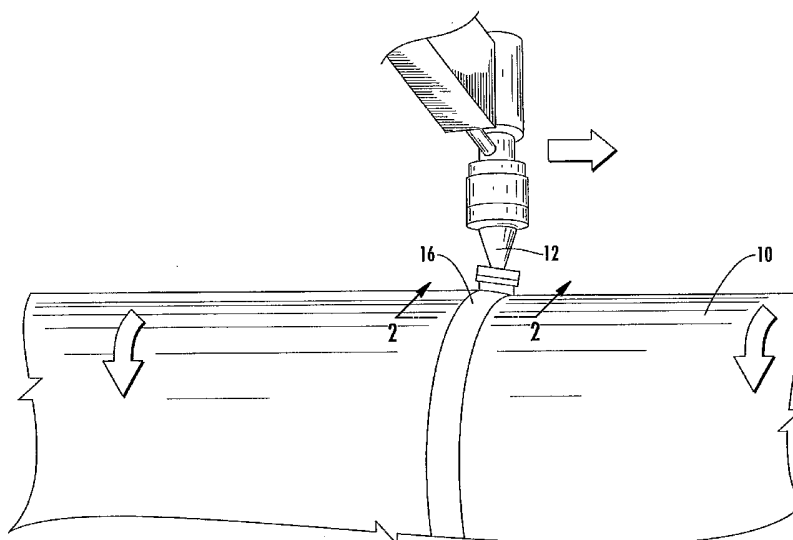

(57) Abstract: A process for forming a cover for an industrial roll includes the steps of: providing an elongate cylindrical core (20) having a longitudinal axis (A1); rotating the core (20) about the longitudinal axis (A1); providing a nozzle (22) movable along a nozzle path (N) that is substantially parallel to and above the core longitudinal axis, the nozzle (22) having at least an upstream outlet (24) and a downstream outlet (26), the nozzle outlets being longitudinally offset a distance (d) from each other; and applying multiple strips of polymeric material to the core through the nozzle outlets as the nozzle moves along the nozzle path such that the downstream strip (28) forms an overlapping spiral inner layer and the upstream strip (36) forms an overlapping spiral outer layer that overlies the inner layer, the inner and outer layers being adhered with the core (20).

WO 2004/106037 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

METHOD FOR FORMING COVER FOR INDUSTRIAL ROLL

Field of the Invention

10 The present invention relates generally to covers for industrial rolls, and more particularly to methods of forming covers for industrial rolls.

Background of the Invention

In a typical papermaking process, a water slurry, or suspension, of cellulosic fibers
15 (known as the paper "stock") is fed onto the top of the upper run of an endless belt of woven wire and/or synthetic material that travels between two or more rolls. The belt, often referred to as a "forming fabric," provides a papermaking surface on the upper surface of its upper run which operates as a filter to separate the cellulosic fibers of the paper stock from the aqueous medium, thereby forming a wet paper web. The aqueous medium drains through mesh
20 openings of the forming fabric, known as drainage holes, by gravity or vacuum located on the lower surface of the upper run (*i.e.*, the "machine side") of the fabric.

After leaving the forming section, the paper web is transferred to a press section of the paper machine, where it is passed through the nips of one or more presses (often roller presses) covered with another fabric, typically referred to as a "press felt." Pressure from the
25 presses removes additional moisture from the web; the moisture removal is often enhanced by the presence of a "batt" layer of the press felt. The paper is then transferred to a dryer section for further moisture removal. After drying, the paper is ready for secondary processing and packaging.

Cylindrical rolls are typically utilized in different sections of a papermaking machine.
30 Such rolls reside and operate in demanding environments in which they can be exposed to high dynamic loads and temperatures and aggressive or corrosive chemical agents. As an example, in a typical paper mill, rolls are used not only for transporting the fibrous web sheet

between processing stations, but also, in the case of press section and calender rolls, for processing the web sheet itself into paper.

Typically rolls used in papermaking are constructed with the location within the papermaking machine in mind, as rolls residing in different positions within the papermaking machines are required to perform different functions. Because papermaking rolls can have many different performance demands, and because replacing an entire metallic roll can be quite expensive, many papermaking rolls include a polymeric cover that surrounds the circumferential surface of a typically metallic core. By varying the material employed in the cover, the cover designer can provide the roll with different performance characteristics as the papermaking application demands. Also, repairing, regrinding or replacing a cover over a metallic roll can be considerably less expensive than the replacement of an entire metallic roll. Exemplary polymeric materials for covers include natural rubber, synthetic rubbers such as neoprene, styrene-butadiene (SBR), nitrile rubber, chlorosulfonated polyethylene ("CSPE" - also known under the trade name HYPALON® from DuPont), EDPM (the name given to an ethylene-propylene terpolymer formed of ethylene-propylene diene monomer), polyurethane, thermoset composites, and thermoplastic composites.

In many instances, the roll cover will include at least two distinct layers: a base layer that overlies the core and provides a bond thereto; and a topstock layer that overlies and bonds to the base layer and serves the outer surface of the roll (some rolls will also include an intermediate "tie-in" layer sandwiched by the base and top stock layers). The layers for these materials are typically selected to provide the cover with a prescribed set of physical properties for operation. These can include the requisite strength, elastic modulus, and resistance to elevated temperature, water and harsh chemicals to withstand the papermaking environment. In addition, covers are typically designed to have a predetermined surface hardness that is appropriate for the process they are to perform, and they typically require that the paper sheet "release" from the cover without damage to the paper sheet. Also, in order to be economical, the cover should be abrasion- and wear-resistant.

Many covers are formed in a rotational casting operation. In a typical rotational casting process (exemplified in **Figures 1 and 2**), a metallic core **10** is positioned horizontally in a rotating fixture that supports the core **10** at one or both ends. A casting nozzle **12** is

mounted, either directly to the rotating fixture or separately (for example, on a moving cart or carriage), so that it can move along the longitudinal axis of the roll.

As the casting process commences, the nozzle 12 is positioned above one end of the core 10. The nozzle 12 is continuously supplied with molten polymer 14. As the fixture
5 rotates the core 10 about its longitudinal axis, the nozzle 12 applies a strip 16 of polymeric material to the core 10. As the core 10 rotates, the nozzle 12 translates slowly along the longitudinal axis of the core 10. Typically, the rotational speed of the core 10 and the translation rate of the nozzle 12 are such that, as the core 10 rotates past a specific
10 circumferential location, the nozzle 12 has moved longitudinally a distance that is less than the width of the polymeric strip 16 it is applying. Consequently, each portion of a strip 16 being applied overlies portions of the strips 16a that are applied immediately preceding its application and underlies portions of strips 16b that are applied immediately after its application (see Figure 2). Because the strips 16 are still molten as they contact each other, bonding can occur between the strips 16 to improve the integrity of the cover. Typically, a
15 portion of a strip 16 will partially overlies portions of between two and seven other strips depending on the material being applied and its thickness. The afore-described process is equally applicable for all layers of a cover (i.e., for the tie-in or top stock layers, the "core" described above comprises the metallic core of the roll and the base and/or tie-in layers that surround it).

20 Although the process described above may be adequate for the formation of many covers, it does have at least one potential shortcoming for thick covers, or for thick layers of covers. The polymeric material applied to the core is molten, and is, therefore, somewhat malleable under load (even just the weight of subsequent overlapping layers of polymeric material) until it cures and hardens. The rate of curing for a strip of polymeric material is
25 typically highly dependent on the thickness of the material. As such, when a relatively thick strip of polymeric material is applied to a core, its weight can cause the polymeric strips that were just applied (i.e., those that it partially overlies) to sag under the load. This tendency is exacerbated by the thickness of the underlying polymeric material, which can cause the underlying material to harden more slowly than a thinner strip would. As a result, there tends
30 to be a practical thickness limit for the casting of some materials.

One approach to forming thicker covers is to maintain a viable thickness in the strips but to increase the extent of the overlap between adjacent layers. In this manner, the

underlying layers can harden quickly, but the ultimate thickness of the entire cover or layer is greater. However, this approach results in a substantial increase in casting time.

The foregoing demonstrates that different approaches to the formation of covers for industrial rolls are still needed.

5

Summary of the Invention

The present invention can provide, as a first aspect, a process for forming a cover for an industrial roll. The process includes the steps of: providing an elongate cylindrical core having a longitudinal axis; rotating the core about the longitudinal axis; providing a nozzle
10 movable along a nozzle path that is substantially parallel to and above the core longitudinal axis, the nozzle having at least an upstream outlet and a downstream outlet, the nozzle outlets being longitudinally offset a distance from each other; and applying multiple strips of polymeric material to the core through the nozzle outlets as the nozzle moves along the nozzle path such that the downstream strip forms an overlapping spiral inner layer and the
15 upstream strip forms an overlapping spiral outer layer that overlies the inner layer, the inner and outer layers being adhered with the core. This process can enable the production of a thicker layer on a roll cover than may be achievable with the application of a single layer of polymeric material.

As a second aspect, the present invention is directed to a process for forming a cover
20 for an industrial roll, comprising the steps of: providing an elongate cylindrical core having a longitudinal axis; rotating the core about the longitudinal axis; applying a downstream strip of a polymeric material to the core such that the downstream strip forms an overlapping spiral inner layer; and then applying an upstream strip of the polymeric material over the inner layer
25 such that the upstream strip forms an overlapping spiral outer layer that overlies the inner layer. The upstream strip is applied sufficiently proximate in time to the application of the downstream strip that the downstream strip is molten and bondable to the upstream strip, but sufficiently distant in time that the downstream strip has sufficiently cured to avoid
substantial sagging, the inner and outer layers being adhered with the core. Like the process described earlier, this process can enable the production of a thicker layer on a roll cover than
30 may be achievable with the application of a single layer of polymeric material.

As a third aspect, the present invention is directed to an industrial roll comprising: a metallic core; a polymeric base layer that is adhered to and overlies the core; and a top stock

layer that overlies the base layer. The top stock layer comprises: a substantially cylindrical inner layer, the inner layer being formed of a spirally wound, overlapping strip of a first polymeric material; and a substantially cylindrical outer layer that circumferentially overlies the inner layer, the outer layer being formed of a spirally wound, overlapping strip of the first polymeric material. The top stock layer may be bonded directly to the base layer or to an intermediate tie-in layer that overlies the base layer.

Brief Description of the Figures

Figure 1 is a partial perspective view of a prior art casting process with a single outlet nozzle.

Figure 2 is an enlarged partial section view of the core, cover and casting nozzle of **Figure 1** taken along lines 2—2 thereof.

Figure 3 is a partial perspective view of a casting system with a multiple-outlet casting nozzle for carrying out one embodiment of a process of the present invention.

Figure 4 is an enlarged partial section view of the core, cover and casting nozzle of **Figure 3** taken along lines 4—4 thereof.

Figure 5 is a perspective view of an alternative casting system for carrying out another embodiment of a process of the present invention.

Figure 5A is a greatly enlarged section view of the core, cover and casting nozzle of **Figure 5** taken along lines 5A—5A.

Detailed Description of Embodiments of the Invention

The present invention will now be described more fully hereinafter, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, like numbers refer to like elements throughout, and thicknesses and dimensions of some components or features may be exaggerated for clarity.

Referring now to the figures, a casting system, designated broadly at **19**, is illustrated in **Figures 3** and **4**. The casting system **19** includes a core **20** and a multi-outlet nozzle **22**. The core **20**, which can comprise a roll core by itself (the core typically being formed of

metal and optionally having its surface treated with an adhesive or other material) or a roll core in conjunction with one or more overlying layers of polymeric material of the overall cover that underlies the layer to be added with the casting system **19** (as is described in connection with **Figure 5**), is elongate, substantially cylindrical and horizontally disposed, and is mounted on a fixture (not shown) that rotates the core **20** about its longitudinal axis **A1**. The configuration of the fixture that rotates the core **20** about the longitudinal axis **A1** can be any known to those skilled in this art for doing so and need not be described in detail herein.

Referring again to **Figures 3** and **4**, the nozzle **22** is in fluid communication with a source of molten polymeric material (not shown) and is movable along a nozzle path **N** that is substantially parallel to and above the longitudinal axis **A1**. The configuration of the apparatus for translating the nozzle **22** along the path **N** can be any known to those skilled in this art for inducing such movement and need not be described in detail herein.

The nozzle **22** includes two separate outlets for polymeric material: an upstream outlet **24** and a downstream outlet **26** that is longitudinally offset from the upstream outlet **24**. As used herein, the terms "upstream" and "downstream" refer to opposing directions that are parallel with the longitudinal axis **A1** and the nozzle path **N**, with the "downstream" direction referring to the direction that the nozzle **22** moves while dispensing polymeric material and the "upstream" direction referring to the direction opposite the "downstream" direction. The upstream outlet **24** continuously dispenses an upstream strip **36** of polymeric material, and the downstream outlet **26** continuously dispenses a downstream strip **28** of polymeric material. The upstream and downstream strips **36**, **28** take the cross-sectional form of, respectively, the upstream and downstream outlets **24**, **26**, which are typically substantially rectangular and/or oblong.

As can be seen in **Figure 4**, illustratively and preferably the upstream and downstream outlets **24**, **26** are inclined relative to the nozzle path **N** at an angle α that is typically between about 1 and 13 degrees. Also, there is an offset distance **d** between the leading edge of the upstream outlet **24** and the downstream outlet **26** that is typically between about 0.5 and 7 inches, which distance is also approximately equal to the distance between the upstream and downstream strips **36**, **28** during processing. The outlets **24**, **26** may be configured to apply strips of polymeric material of similar width and thickness or of differing width and/or thickness; a thickness of between about 0.01 and 3 inches is typical.

In operation, as is illustrated in **Figures 3 and 4**, the core **20** is rotated about the longitudinal axis **A1**. The nozzle **22** begins at one end of the core **20**. Polymeric material is applied to the core **20** as the upstream and downstream strips **36, 28** flow through the upstream and downstream nozzles **24, 26** simultaneously and continuously. As polymeric material is applied, the nozzle **22** translates slowly along the nozzle path **N**. The translation distance of the nozzle **22** during one revolution of the core **20** is less than the width of the upstream and downstream strips **36, 28**, such that each of the upstream and downstream strips **36, 28** spirally winds onto the core **20** in overlapping fashion separated from each other by the offset distance **d**. In other words, as the core **20** rotates through an entire revolution, the portion of the downstream strip **28** being applied partially overlaps multiple preceding portions of the downstream strip **28**, with the leading edge **30** of the downstream strip **28** contacting the core **20** and the lagging edge **32** being positioned downstream of the lagging edge of the previously applied portion of the downstream strip **28**. Similarly, the portion of the upstream strip **36** being applied partially overlaps multiple preceding portions of the upstream strip **36**, with the leading edge **38** of the upstream strip **36** contacting previously-applied portions of the downstream strip **28** and the lagging edge **40** being positioned downstream of the lagging edge of the previously applied portion of the upstream strip **28**. The overlapping portions of the downstream strip **28** combine to form an inner layer **34**, and the overlapping portions of the upstream strip **36** combine to form an outer layer **42**.

The polymeric material being applied can be any known to those skilled in this art to be suitable for the production of roll covers; as examples, natural rubber; styrene-butadiene (SBR); nitrile rubber, chlorosulfonated polyethylene; EDPM; polyester; and polyurethane may be employed, with polyurethane being preferred. The polymeric material may contain additives and fillers that can modify or enhance its physical properties and manufacturing characteristics. Exemplary materials, additives and fillers are set forth in U.S. Patent No. 6,328,681 to Stephens, the disclosure of which is hereby incorporated herein in its entirety. The polymeric material should be applied at a temperature that enables the material to flow from the nozzle **22** onto the core **20** and to bond thereto.

In some embodiments, one or more of the translation rate of the nozzle **22**, the rotational speed of the core **20**, and/or the offset distance **d** between the outlets **24, 26** are selected such that, as the downstream strip **28** is applied, portions of the downstream strip **28** underlying the portion of the downstream strip **28** being applied are sufficiently hardened so

as to resist substantial sagging. Also, one or more of these parameters may be selected so that, as the upstream strip **36** is being applied over the downstream strip **28**, portions of the downstream strip **28** underlying the portion of the upstream strip **36** being applied are sufficiently hardened so as to resist substantial sagging. Thus, the inner and outer layers **34**,
5 **42** formed from the upstream and downstream strips **36**, **28** can maintain their shape during casting, with the result that an increased total thickness of the inner and outer layers **34**, **42** can be achieved compared to the thickness of a layer applied with a single nozzle in a single pass.

Those skilled in this art will recognize that, although the use of the multi-outlet nozzle
10 **22** is preferred, embodiments of the invention may be performed with two separate nozzles. If multiple nozzles are employed, the upstream and downstream strips they apply may be applied substantially simultaneously or not, but should be applied sufficiently proximate in time that the downstream strip is still molten and bondable to the upstream strip. It should also be apparent to those skilled in this art that more than two nozzles and/or nozzle outlets
15 may be employed to apply more than two strips of polymeric material.

An additional embodiment of an industrial roll cover, designated broadly at **120**, is illustrated in **Figures 5** and **5A**. The cover **120** includes a base layer **122**, a tie-in layer **124**, and a top stock layer **128** that comprises an inner layer **130** and an outer layer **132**. In the
20 illustrated embodiment, the base layer **122** circumferentially surrounds the core **121** and extends radially outwardly therefrom about 0.010 to 0.250 inches. The tie-in layer **124** circumferentially surrounds the base layer **122** and extends radially outwardly therefrom approximately 0.010 to 0.250 inches. Suitable materials and construction for the base and tie-in layers **122**, **124** are discussed in U.S. Patent No. 6, 328,681, *supra*. The top stock layer
25 **128** covers and adheres to the tie-in layer **124** and provides adequate thickness (typically between about 0.2 and 2.0 inches) for further finishing operations. A top stock layer **128** may be between about 6 and 72 inches in diameter and 50 and 400 inches in length. The hardness of the cured top stock layer **128** is typically between about 2 and 400 on the Pusey and Jones (P&J) hardness scale.

Referring to **Figures 5** and **5A**, the cover **120** can be prepared in the following
30 manner. After the preparation of the core **121**, the base and tie-in layers **122**, **124** are applied with a casting nozzle such as that designated at **150** in **Figure 5**. During application, the nozzle **150** begins at one end of the core **121** and moves axially on a track (not shown) as the

core **121** rotates about its axis; in this manner, the core **121** becomes coated with the base layer **122**, and the tie-in layer **124** covers the base layer **122**.

Referring still to **Figures 5** and **5A**, the top stock layer **128** is applied after application of the tie-in layer **124** (preferably while the tie-in layer **124** is still semi-soft) with a multi-
5 outlet nozzle **156**. The nozzle **156** applies the inner layer **130** of the top stock layer **128** through an outlet **158** (typically at a thickness of between about 0.010 and 3.0 inches), and simultaneously, through an outlet **160**, applies the outer layer **132** of the top stock layer **128** upstream of the portion of the inner layer **130** that is being applied (typically at a thickness of
10 between about 0.010 and 3.0 inches). Thus, as illustrated in **Figure 5A**, several revolutions of the core **121** occur before the outer layer **132** is applied over the inner layer **130** at a given axial location. The process as described can achieve many of the performance advantages described above.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described,
15 those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

20

That Which is Claimed is:

1. A process for forming a cover for an industrial roll, comprising the steps of:
providing an elongate cylindrical core having a longitudinal axis;
rotating the core about the longitudinal axis;

5 providing a nozzle movable along a nozzle path that is substantially parallel to and above the core longitudinal axis, the nozzle having at least an upstream outlet and a downstream outlet, the nozzle outlets being longitudinally offset a distance from each other;
and

10 applying multiple strips of polymeric material to the core through the nozzle outlets as the nozzle moves along the nozzle path such that the downstream strip forms an overlapping spiral inner layer and the upstream strip forms an overlapping spiral outer layer that overlies the inner layer, the inner and outer layers being adhered with the core.

2. The process defined in Claim 1, wherein each of the upstream strip and the
15 downstream strip includes leading and lagging edges, and wherein the lagging edge of the downstream strip is positioned downstream of the leading edge of the upstream strip during the applying step.

3. The process defined in Claim 2, wherein at least one of the polymeric
20 material, the temperature of the polymeric material, the rotational speed of the core, and the offset distance of the nozzle outlets is selected such that, as the downstream strip is applied, previously-applied portions of the downstream strip underlying a portion of the downstream strip being applied are sufficiently cured so as to resist substantial sagging.

25 4. The process defined in Claim 3, wherein the at least one of the polymeric material, the temperature of the polymeric material, the rotational speed of the core, and the offset distance of the nozzle outlets is selected such that, as the upstream strip is applied, portions of the inner layer underlying a portion of the upstream strip being applied are sufficiently cured so as to resist substantial sagging.

30

5. The process defined in Claim 1, wherein the polymeric material is selected from the group consisting of: natural rubber; SBR; nitrile rubber, chlorosulfonated polyethylene; EDPM; and polyurethane.

5 6. The process defined in Claim 1, wherein the thickness of the upstream strip is between about 0.010 and 3.0 inches.

7. The process defined in Claim 1, wherein the thickness of the downstream strip is between about 0.010 and 3.0 inches.

10

8. The process defined in Claim 7, wherein the thickness of the upstream strip is between about 0.010 and 3.0 inches.

9. The process defined in Claim 2, wherein the leading edge of the downstream strip is positioned between about 0.5 and 7 inches from the lagging edge of the upstream strip as each are being applied.

15

10. The process defined in Claim 1, wherein the core comprises a metallic member adhered to a polymeric base layer for the cover, the base layer bonding with the inner layer.

20

11. The process defined in Claim 10, wherein the inner and outer layers together comprise a top stock layer.

12. The process defined in Claim 11, wherein the inner layer directly overlies one of the base layer and an intervening tie-in layer.

25

13. The process defined in Claim 1, wherein the outer layer has a cured hardness of between about 2 and 400 on the Pusey and Jones scale.

30

14. A process for forming a cover for an industrial roll, comprising the steps of: providing an elongate cylindrical core having a longitudinal axis;

rotating the core about the longitudinal axis;
applying a downstream strip of a polymeric material to the core such that the
downstream strip forms an overlapping spiral inner layer; and then
applying an upstream strip of the polymeric material over the inner layer such that the
5 upstream strip forms an overlapping spiral outer layer that overlies the inner layer;
wherein the upstream strip is applied sufficiently proximate in time to the application
of the downstream strip that the downstream strip is molten and bondable to the upstream
strip, but sufficiently distant in time that the downstream strip has sufficiently cured to avoid
substantial sagging, the inner and outer layers being adhered with the core.

10

15. The process defined in Claim 14, wherein the steps of applying the upstream
and downstream strips are performed substantially simultaneously at different axial locations
on the core.

15

16. The process defined in Claim 15, wherein the steps of applying the upstream
and downstream strips are performed with a single application nozzle having upstream and
downstream nozzle outlets.

20

17. The process defined in Claim 14, wherein the polymeric material is selected
from the group consisting of: natural rubber; SBR; nitrile rubber, chlorosulfonated
polyethylene; EDPM; and polyurethane.

25

18. The process defined in Claim 14, wherein the thickness of the upstream strip is
between about 0.010 and 3.0 inches.

19. The process defined in Claim 14, wherein the thickness of the downstream
strip is between about 0.010 and 3.0 inches.

30

20. The process defined in Claim 14, wherein the core comprises a metallic
member adhered to a polymeric base layer for the cover, the base layer bonding with the
inner layer.

21. The process defined in Claim 20, wherein the inner and outer layers together comprise a top stock layer.

5 22. The process defined in Claim 21, wherein the inner layer directly overlies one of the base layer and an intervening tie-in layer.

23. The process defined in Claim 14, wherein the outer layer has a cured hardness of between about 2 and 400 on the Pusey and Jones scale.

10

24. An industrial roll, comprising:
a metallic core;
a polymeric base layer that is adhered to and overlies the core; and
a top stock layer that overlies the base layer, the top stock layer comprising:
15 a substantially cylindrical inner layer, the inner layer being formed of a spirally wound, overlapping strip of a first polymeric material; and
a substantially cylindrical outer layer that circumferentially overlies the inner layer, the outer layer being formed of a spirally wound, overlapping strip of the first polymeric material.

20

25. The industrial roll defined in Claim 24, wherein the first polymeric material is selected from the group consisting of: natural rubber; SBR; nitrile rubber, chlorosulfonated polyethylene; EDPM; polyester; and polyurethane.

25 26. The industrial roll defined in Claim 24, wherein the thickness of the inner layer is between about 0.010 and 3.0 inches.

27. The industrial roll defined in Claim 24, wherein the thickness of the downstream strip is between about 0.010 and 3.0 inches.

30

28. The industrial roll defined in Claim 24, further comprising a polymeric tie-layer between the base layer and the top stock layer.

29. The industrial roll defined in Claim 24, wherein the top stock layer has a hardness of between about 2 and 400 on the Pusey and Jones scale.

5

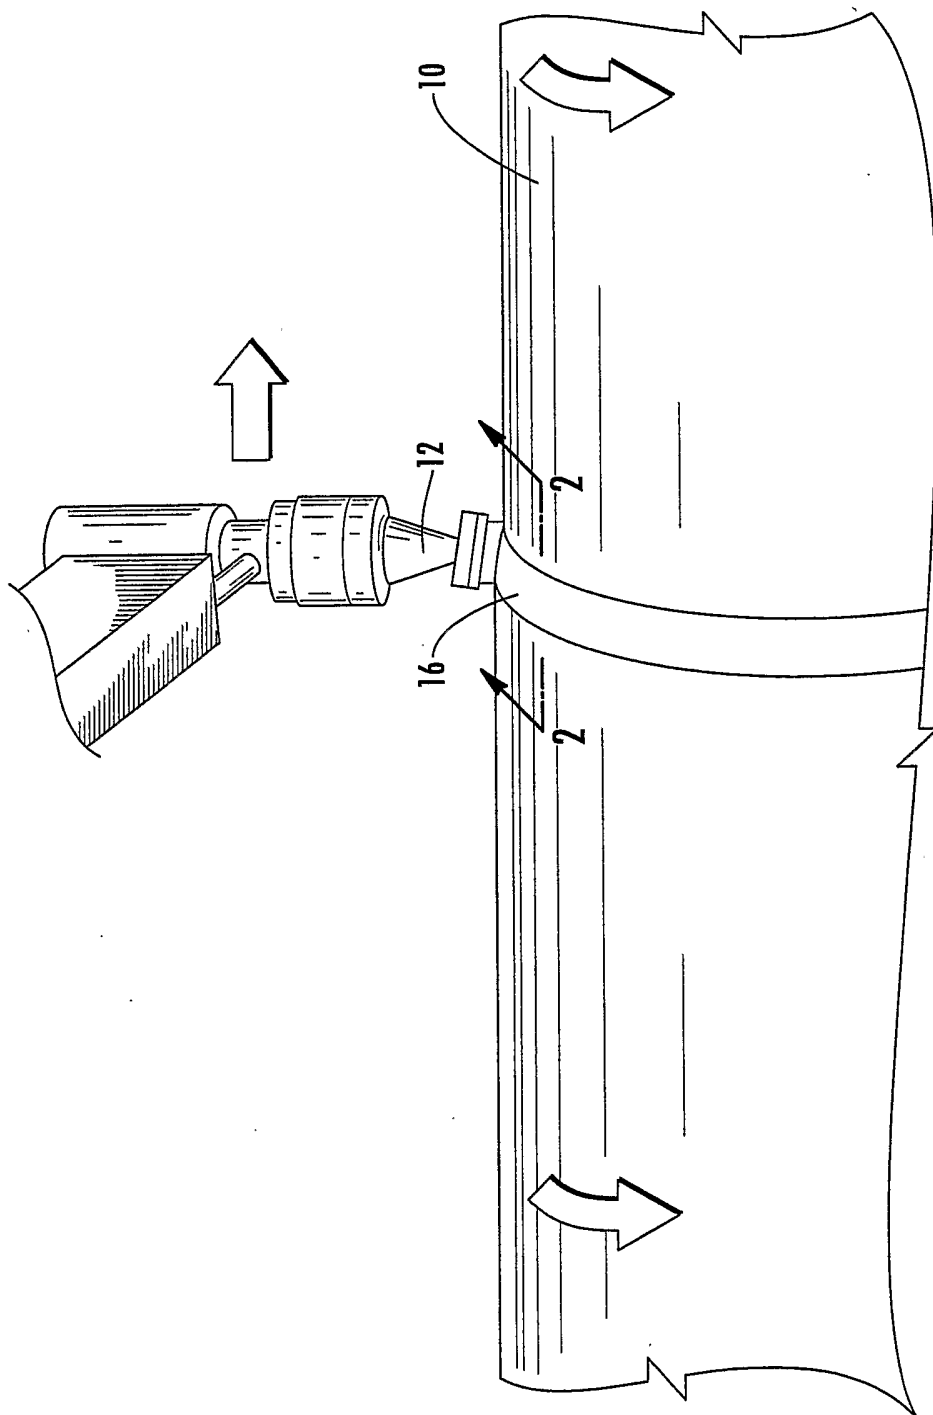


FIGURE 1

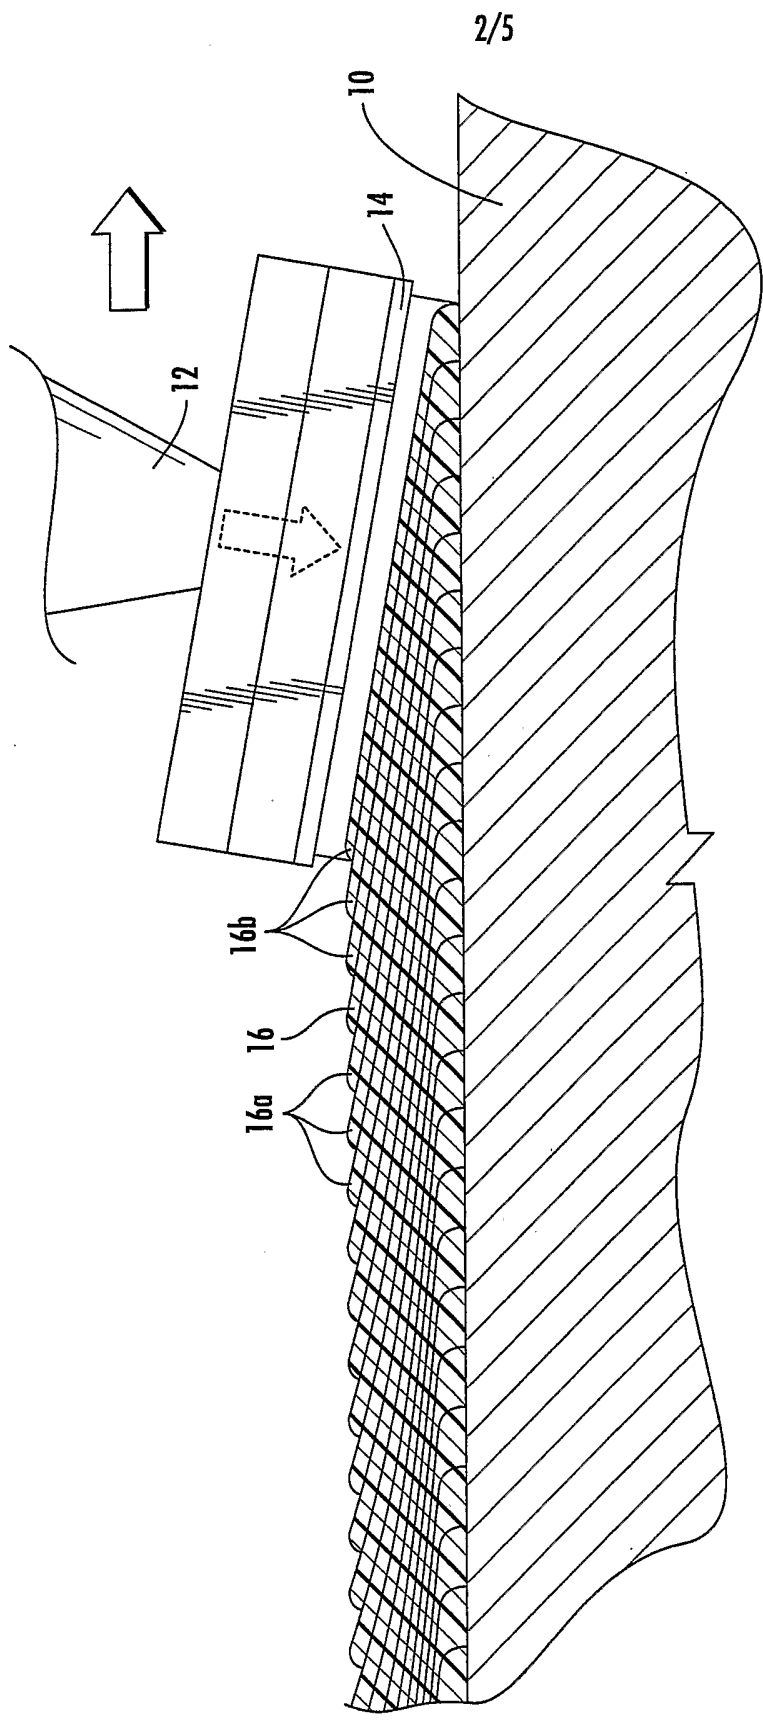


FIGURE 2

3/5

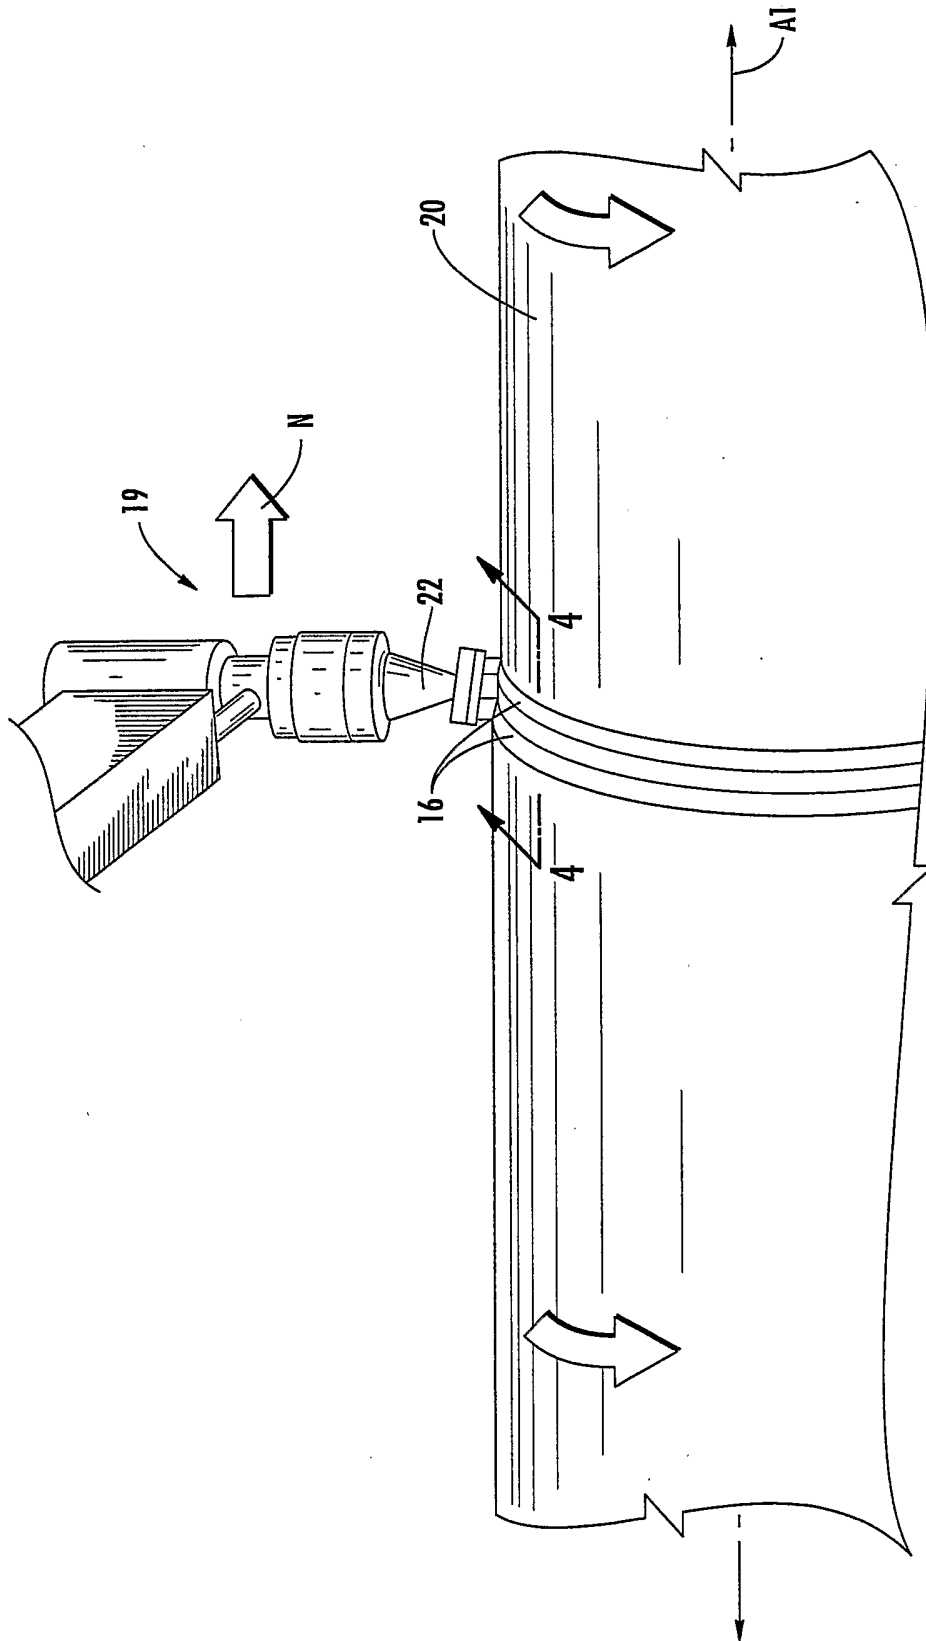


FIGURE 3


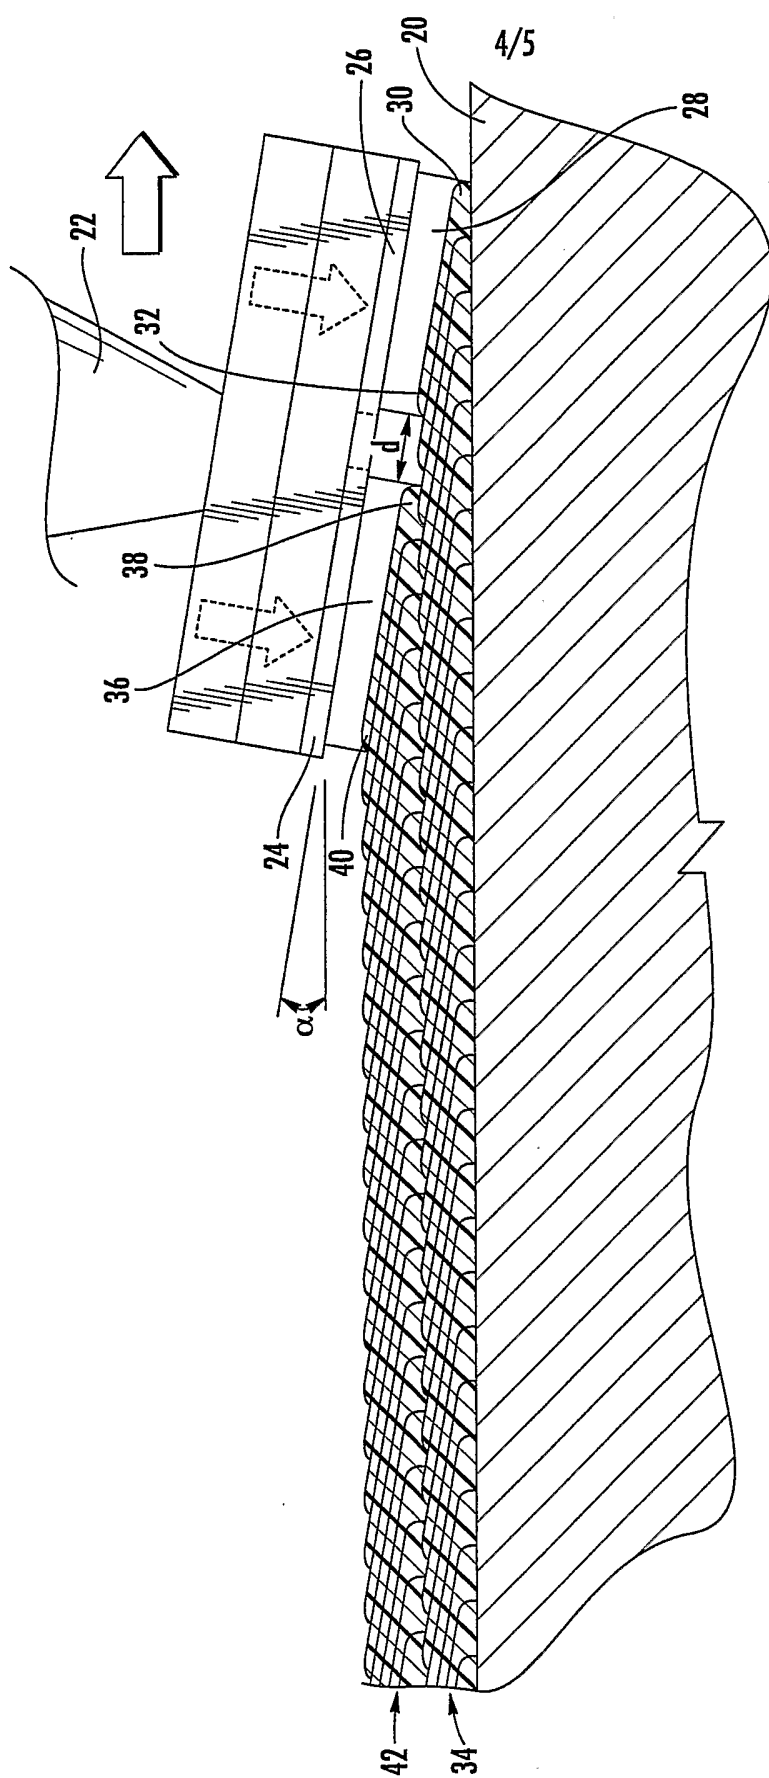


FIGURE 4

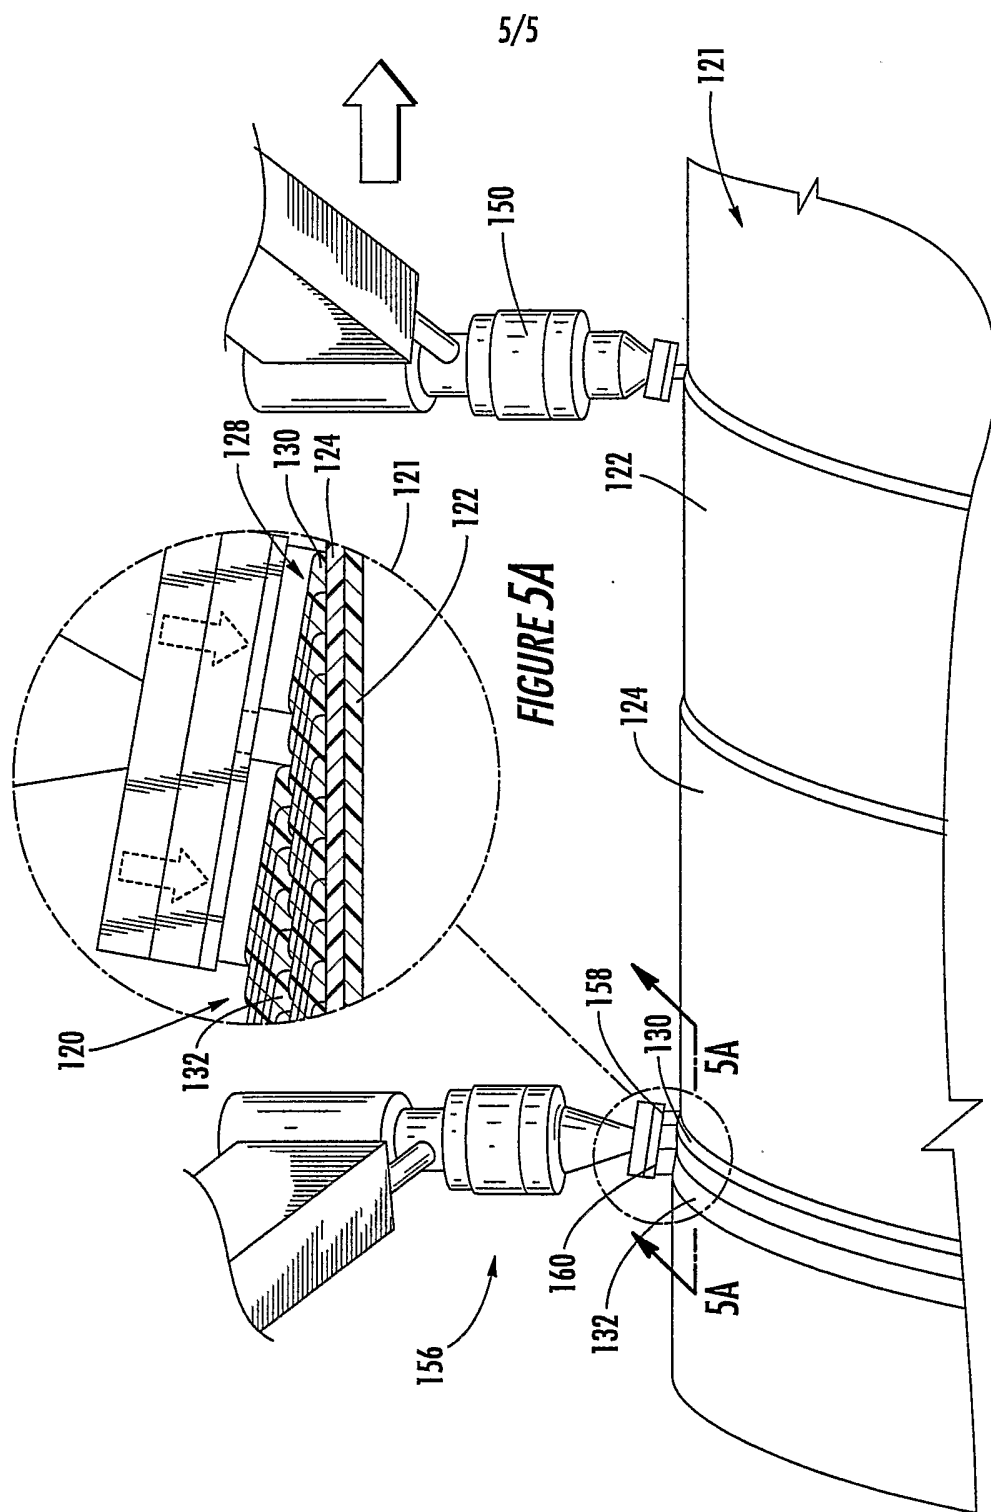

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/007085

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B29C53/58 D21G1/02 B29C47/02 B29C47/06 B29C47/70
//B29K7:00, B29K9:06, B29K19:00, B29K23:00, B29K75:00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B29C D21G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 0081, no. 86 (M-320), 25 August 1984 (1984-08-25) & JP 59 076212 A (TOUYOU KAGAKU KK), 1 May 1984 (1984-05-01) abstract	14, 15, 17-19, 21
X	US 6 375 602 B1 (JONES LISA) 23 April 2002 (2002-04-23) column 5, line 20 - column 8, line 39; figures 3, 7	24-27, 29
A	DE 37 29 269 A (HOECHST AG) 24 March 1988 (1988-03-24) claims 1-3; figure 1	1
A	EP 0 970 797 A (BRIDGESTONE CORP) 12 January 2000 (2000-01-12) paragraph '0035!; claim 1; figures 1, 2	1-29

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

26 July 2004

Date of mailing of the international search report

03/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Foulger, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/007085

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
JP 59076212	A	01-05-1984	JP 1507451 C JP 63059374 B	26-07-1989 18-11-1988
US 6375602	B1	23-04-2002	AU 4310099 A BR 9912373 A CA 2328968 A1 EP 1159485 A1 JP 2002521579 T WO 0005451 A1	14-02-2000 02-10-2001 03-02-2000 05-12-2001 16-07-2002 03-02-2000
DE 3729269	A	24-03-1988	DE 3729269 A1	24-03-1988
EP 0970797	A	12-01-2000	JP 2000079643 A DE 69905655 D1 DE 69905655 T2 EP 0970797 A2 ES 2190635 T3	21-03-2000 10-04-2003 27-11-2003 12-01-2000 01-08-2003